

NTC thermistors for temperature measurement

Miniature sensors with bendable wires

Series/Type: B57861S

Date: January 2018

© EPCOS AG 2018. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.



_			
Toman	Oroturo	MOOOL	irement
пения	erature	IIIeasu	nemeni

B57861S S861

Applications

■ Temperature measurement

Features

- Short response time
- High measuring accuracy
- Tight B value tolerances available
- Epoxy encapsulation
- PTFE-insulated leads of silver-plated nickel wire, AWG 30 (50 mm)
- PTFE-insulated leads of silver-plated Cu wire (19 x 0.07 mm), AWG 28 (350 mm)
- UL approval (E69802)

Options

Alternative lead lengths on request

Delivery mode


Bulk

General technical data


Dimensional drawings

Length





350 mm



Dimensions in mm

Climatic category	(IEC 60068-1)		55/155/56	
Max. power	(at 25 °C)	P ₂₅	60	mW
Resistance tolerance		$\Delta R_R/R_R$	±1, ±3, ±5	%
Rated temperature		T _R	25	°C
Dissipation factor	(in air)	δ_{th}	approx. 1.5 / 3.21)	mW/K
Thermal cooling time c	onstant (in air)	$ au_{ m c}$	approx. 15 / 121)	s
Heat capacity		C _{th}	approx. 22.5 / 38.41)	mJ/K

¹⁾ For PTFE-insulated leads of silver-plated Cu wire (19 x 0.07 mm), AWG 28 (350 mm).



S861

	Ψ. Ε.
Temperature measurement	B57861S

Electrical specification and ordering codes

Miniature sensors with bendable wires

R ₂₅	Component length	No. of R/T	B _{25/100}	Ordering code					
Ω	mm	characteristic	K	-					
B value to	B value tolerance = 0.3%, resistance tolerance = $\pm 1\%$								
5 k	50	8016	3988 ±0.3%	B57861S0502F045					
10 k	50	8016	3988 ±0.3%	B57861S0103F045					
30 k	50	8018	3964 ±0.3%	B57861S0303F045					
B value to	olerance = 1%, resista	nce tolerance = $\pm 1\%$							
10 k	350	8016	3988 ±1%	B57861S0103A039					
B value to	olerance = 1%, resista	nce tolerance = $\pm 1\%$,	±3% or ±5%						
2 k	50	1038	3560 ±1%	B57861S0202+041					
3 k	50	8016	3988 ±1%	B57861S0302+040					
5 k	50	8016	3988 ±1%	B57861S0502+040					
10 k	50	8016	3988 ±1%	B57861S0103+040					
30 k	50	8018	3964 ±1%	B57861S0303+040					
50 k	50	2901	3760 ±1%	B57861S0503+040					
100 k	50	2014	4540 ±1%	B57861S0104+040					

^{+ =} Resistance tolerance

 $F = \pm 1\%$

 $H = \pm 3\%$

 $J = \pm 5\%$

Reliability data

Test	Standard	Test conditions	$\Delta R_{25}/R_{25}$ (typical)	Remarks
Storage in dry heat	IEC 60068-2-2	Storage at upper category temperature T: 155 °C t: 1000 h	< 2%	No visible damage
Storage in damp heat, steady state	IEC 60068-2-78	Temperature of air: 40 °C Relative humidity of air: 93% Duration: 56 days	< 1%	No visible damage
Rapid temperature cycling	IEC 60068-2-14	Lower test temperature: -55 °C Upper test temperature: 155 °C Number of cycles: 100	< 1%	No visible damage
Endurance		P _{max} : 60 mW t: 1000 h	< 3%	No visible damage
Long-term stability (empirical value)		Temperature: 70 °C t: 10000 h	< 2%	No visible damage



_	
Tempera	ture measurement

S861

B57861S

Reliability data according to AEC-Q200, Rev. D

Test	Standard	Test conditions	$\Delta R_{25}/R_{25}$ (typical)	Remarks
High temperature	MIL-STD-202,	Storage at T = +125 °C	< 2%	No visible
exposure (storage)	method 108	t = 1000 h		damage
Biased humidity	MIL-STD-202,	T = 85 °C	< 2 %	No visible
	method 103	Relative humidity of air 85%		damage
		t = 1000 h		
		Test voltage max. 0.3 V DC on		
		NTC ¹⁾		
Operational life	MIL-STD-202,	T = +125 °C	< 2%	No visible
	method 108	t = 1000 h		damage
		Test voltage max. 0.3 V DC on		
		NTC ¹⁾		
Temperature	JESD 22,	Lower test temperature: -55 °C	< 2%	No visible
cycling	method JA-104	Upper test temperature: 125 °C		damage
		1000 cycles		
		Dwell time: max. 30 min at each		
		temperature		
		Transition time in air: max. 1 min		
Terminal strength	MIL-STD-202,	Test leaded device integrity	< 1%	No visible
(leaded)	method 211	Condition A: 2.27 N ²⁾		damage
Mechanical shock	MIL-STD-202,	Acceleration: 40 g 2)	< 1%	No visible
	method 213,	Pulse duration: 6 ms		damage
	condition C	Number of bumps: 3, each		
		direction		
Vibration	MIL-STD-202,	Acceleration: 5 g	< 1%	No visible
	method 204	t = 20 min		damage
		12 cycles in each of 3 directions		
		Frequency range: 10 2000 Hz		

¹⁾ Self heating of the NTC thermistor must not exceed 0.2 K, steady state. Test conditions deviating from AEC-Q200, Rev. D.

Note

- Contact of NTC thermistors with any liquids and solvents shall be prevented. It must be ensured that no water enters the NTC thermistors (e.g. through plug terminals).
- Avoid dewing and condensation unless thermistor is specified for these conditions.

²⁾ Deviating from AEC-Q200, Rev. D.



Tomporo	tura maar	surement
		301(211(211)

B57861S S861

R/T characteristics

R/T No.	1038		2014		2901	
T (°C)	B _{25/100} = 3560 K	(B _{25/100} = 4540 K		B _{25/100} = 3760 K	
	R _T /R ₂₅	α (%/K)	R _T /R ₂₅	α (%/K)	R _T /R ₂₅	α (%/K)
-55.0	58.796	6.6	142	7.8	63.969	6.7
-50.0	42.515	6.4	96.615	7.6	46.179	6.4
-45.0	31.095	6.1	66.562	7.3	33.738	6.2
-40.0	22.992	5.9	46.4	7.1	24.927	6.0
-35.0	17.177	5.7	32.708	6.9	18.611	5.8
-30.0	12.960	5.5	23.302	6.7	14.033	5.6
-25.0	9.8708	5.4	16.77	6.5	10.679	5.4
-20.0	7.5858	5.2	12.186	6.3	8.198	5.3
-15.0	5.8799	5.0	8.937	6.1	6.3123	5.2
-10.0	4.5951	4.9	6.6125	5.9	4.9014	5.1
-5.0	3.6193	4.7	4.9342	5.8	3.821	4.9
0.0	2.8720	4.6	3.712	5.6	3.0027	4.7
5.0	2.2954	4.4	2.8145	5.5	2.3801	4.6
10.0	1.8472	4.3	2.15	5.3	1.9	4.5
15.0	1.4962	4.2	1.6544	5.2	1.5257	4.3
20.0	1.2195	4.0	1.2819	5.0	1.233	4.3
25.0	1.0000	3.9	1.0000	4.9	1.0000	4.1
30.0	0.82472	3.8	0.78514	4.8	0.81679	4.0
35.0	0.68393	3.7	0.62031	4.7	0.67166	3.9
40.0	0.57018	3.6	0.49304	4.5	0.55527	3.8
45.0	0.47777	3.5	0.39417	4.4	0.46095	3.8
50.0	0.40229	3.4	0.3169	4.3	0.38459	3.7
55.0	0.34033	3.3	0.25616	4.2	0.32184	3.6
60.0	0.28920	3.2	0.20815	4.1	0.27068	3.5
65.0	0.24683	3.1	0.17	4.0	0.22907	3.3
70.0	0.21154	3.0	0.13952	3.9	0.19468	3.2
75.0	0.18203	3.0	0.11505	3.8	0.16607	3.1
80.0	0.15722	2.9	0.095302	3.7	0.14221	3.1
85.0	0.13631	2.8	0.079296	3.6	0.12218	3.0
90.0	0.11861	2.7	0.066263	3.5	0.10533	2.9
95.0	0.10358	2.7	0.055601	3.5	0.09123	2.8
100.0	0.090775	2.6	0.046843	3.4	0.079284	2.8
105.0	0.079839	2.5	0.039618	3.3	0.069062	2.7
110.0	0.070433	2.5	0.033634	3.2	0.06034	2.7
115.0	0.062311	2.4	0.028658	3.2	0.052886	2.6
120.0	0.055278	2.4	0.024505	3.1	0.046482	2.5
125.0	0.049170	2.3	0.021026	3.0	0.040985	2.5
130.0	0.043851	2.3	0.018101	3.0	0.036233	2.5
135.0	0.039207	2.2	0.015633	2.9	0.032101	2.4
140.0	0.035142	2.2	0.013544	2.8	0.02851	2.4
145.0	0.031574	2.1	0.011769	2.8	0.025373	2.3
150.0	0.028435	2.1	0.010258	2.7	0.022633	2.3
155.0	0.025666	2.0	0.0089659	2.7	0.020231	2.3



_			
Tampe	erature r	nagelir	amant

B57861S S861

R/T characteristics

R/T No.	8016		8018	
T (°C)	B _{25/100} = 3988 K		B _{25/100} = 3964 K	
	R _T /R ₂₅	α (%/K)	R _T /R ₂₅	α (%/K)
-55.0	96.3	7.4	82.408	7.0
-50.0	67.01	7.2	58.344	6.8
-45.0	47.17	6.9	41.775	6.6
-40.0	33.65	6.7	30.235	6.4
-35.0	24.26	6.4	22.109	6.2
-30.0	17.7	6.2	16.327	6.0
-25.0	13.04	6.0	12.171	5.8
-20.0	9.707	5.8	9.1548	5.6
-15.0	7.293	5.6	6.9458	5.4
-10.0	5.533	5.5	5.3135	5.3
-5.0	4.232	5.3	4.0972	5.1
0.0	3.265	5.1	3.1834	5.0
5.0	2.539	5.0	2.4915	4.8
10.0	1.99	4.8	1.9637	4.7
15.0	1.571	4.7	1.5582	4.6
20.0	1.249	4.5	1.2444	4.4
25.0	1.0000	4.4	1.0000	4.3
30.0	0.8057	4.3	0.80843	4.2
35.0	0.6531	4.1	0.65732	4.1
40.0	0.5327	4.0	0.53743	4.0
45.0	0.4369	3.9	0.44175	3.9
50.0	0.3603	3.8	0.36497	3.8
55.0	0.2986	3.7	0.30303	3.7
60.0	0.2488	3.6	0.2528	3.6
65.0	0.2083	3.5	0.21187	3.5
70.0	0.1752	3.4	0.17836	3.4
75.0	0.1481	3.3	0.15079	3.3
80.0	0.1258	3.2	0.128	3.2
85.0	0.1072	3.2	0.1091	3.2
90.0	0.09177	3.1	0.093342	3.1
95.0	0.07885	3.0	0.080158	3.0
100.0	0.068	2.9	0.069084	2.9
105.0	0.05886	2.9	0.059747	2.9
110.0	0.05112	2.8	0.051845	2.8
115.0	0.04454	2.7	0.045134	2.7
120.0 125.0 130.0 135.0 140.0	0.03893 0.03417 0.03009 0.02654 0.02348	2.6 2.5 2.5 2.4	0.039416 0.034527 0.030333 0.026724 0.02361	2.7 2.6 2.6 2.5 2.5
145.0	0.02083	2.4	0.020914	2.4
150.0	0.01853	2.3	0.018575	2.3
155.0	0.01653	2.3	0.016538	2.3



Temperature measurement	B57861S
Miniature sensors with bendable wires	S861

Mounting instructions

1 Soldering

1.1 Leaded NTC thermistors

Leaded thermistors comply with the solderability requirements specified by CECC.


When soldering, care must be taken that the NTC thermistors are not damaged by excessive heat. The following maximum temperatures, maximum time spans and minimum distances have to be observed:

	Dip soldering	Iron soldering
Bath temperature	max. 260 °C	max. 360 $^{\circ}\text{C}$
Soldering time	max. 4 s	max. 2 s
Distance from thermistor	min. 6 mm	min. 6 mm

Under more severe soldering conditions the resistance may change.

1.1.1 Wave soldering

Temperature characteristic at component terminal with dual wave soldering

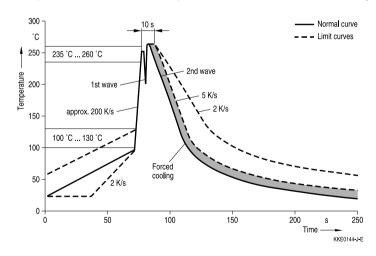



Temperature	measurement	

B57861S

Miniature sensors with bendable wires

S861

1.2 Leadless NTC thermistors

In case of NTC thermistors without leads, soldering is restricted to devices which are provided with a solderable metallization. The temperature shock caused by the application of hot solder may produce fine cracks in the ceramic, resulting in changes in resistance.

To prevent leaching of the metallization, solder with silver additives or with a low tin content should be used. In addition, soldering methods should be employed which permit short soldering times.

1.3 SMD NTC thermistors

SMD NTC thermistors can be provided with a nickel barrier termination or on special request with silver-palladium termination. The use of no-clean solder products is recommended. In any case mild, non-activated fluxes should be used. Flux residues after soldering should be minimized.

- SMD NTCs with AgPd termination are not approved for lead-free soldering.
- Nickel barrier termination




Figure 1
SMD NTC thermistors, structure of nickel barrier termination

The nickel barrier layer of the silver/nickel/tin termination (see figure 1) prevents leaching of the silver base metallization layer. This allows great flexibility in the selection of soldering parameters.

The tin prevents the nickel layer from oxidizing and thus ensures better wetting by the solder. The nickel barrier termination is tested for all commonly-used soldering methods according to IEC 60068-2-58. Insufficient preheating may cause ceramic cracks. Rapid cooling by dipping in solvent is not recommended.

The following test and process conditions apply for nickel barrier termination.



B57861S

S861

		AX I DI

1.3.1 Solderability (test to IEC 60068-2-58)

Miniature sensors with bendable wires

Temperature measurement

Preconditioning: Immersion into flux F-SW 32.

Evaluation criterion: Wetting of soldering areas ≥95%.

Solder	Bath temperature (°C)	Dwell time (s)
SnPb 60/40	215 ±3	3 ±0.3
SnAg (3.0 4.0), Cu (0.5 0.9)	245 ±3	3 ±0.3


1.3.2 Resistance to soldering heat (test to IEC 60068-2-58)

Preconditioning: Immersion into flux F-SW 32. Evaluation criterion: Leaching of side edges ≤1/3.

Solder	Bath temperature (°C)	Dwell time (s)
SnPb 60/40	260 ±5	10 ±1
SnAg (3.0 4.0), Cu (0.5 0.9)	260 ±5	10 ±1

1.3.3 Reflow soldering

Temperature ranges for reflow soldering acc. to IEC 60068-2-58 recommendations.

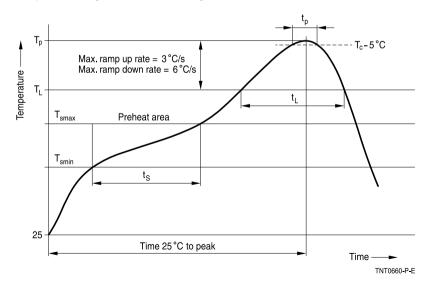



Temperature measurement B57861S

Profile feature		Sn-Pb eutectic assembly	Pb-free assembly
Preheat and soak			
- Temperature min	T _{smin}	100 °C	150 °C
- Temperature max	T _{smax}	150 °C	200 °C
- Time	t_{smin} to t_{smax}	60 120 s	60 120 s
Average ramp-up rate	T_{smax} to T_{p}	3 °C/ s max.	3 °C/ s max.
Liquidous temperature	T_L	183 °C	217 °C
Time at liquidous	t _L	40 150 s	40 150 s
Peak package body temperature	Tp	215 °C 260 °C1)	235 °C 260 °C
Time above (T _P −5 °C)	t _p	10 40 s	10 40 s
Average ramp-down rate	T_p to T_{smax}	6 °C/ s max.	6 °C/ s max.
Time 25 °C to peak temperature		max. 8 minutes	max. 8 minutes

¹⁾ Depending on package thickness.

Notes:


All temperatures refer to topside of the package, measured on the package body


surface.


Number of reflow cycles: 3

Iron soldering should be avoided, hot air methods are recommended for repair purposes.

Solder joint profiles for silver/nickel/tin terminations








Pad geometry too large KKE0071-A-E



Temperature measu	
Tomporataro moaca	

B57861S S861

1.3.4 Recommended geometry of solder pads



Recommended maximum dimensions (mm)

Case size inch/mm	А	В	С
0402/1005	0.6	0.6	1.7
0603/1608	1.0	1.0	3.0
0805/2012	1.3	1.2	3.4
1206/3216	1.8	1.2	4.5

2 Conductive adhesion

An alternative to soldering for silver-palladium terminated components is the gluing of thermistors with conductive adhesives. The benefit of this method is that it involves no thermal stress. The adhesives used must be chemically inert.

3 Clamp contacting

Pressure contacting by means of clamps is particularly suitable for applications involving frequent switching and high turn-on powers.

4 Robustness of terminations (leaded types)

The leads meet the requirements of IEC 60068-2-21. They may not be bent closer than 4 mm from the solder joint on the thermistor body or from the point at which they leave the feed-throughs. During bending, any mechanical stress at the outlet of the leads must be removed. The bending radius should be at least 0.75 mm.



Temperature measurement

Miniature sensors with bendable wires

B57861S S861

Tensile strength: Test Ua1:

Value of applied force for Ua1 test:

value of applied force for our test.		
Diameter (d) of	Force with tolerance of ±10%	
corresponding round leads		
Ø ≤ 0.25 mm	1.0 N	
0.25 < Ø ≤ 0.35 mm	2.5 N	
0.35 < Ø ≤ 0.50 mm	5.0 N	
0.50 < Ø ≤ 0.80 mm	10.0 N	

Bending strength: Test Ub:

Two 90°-bends in opposite directions

Value of applied force for Ub test:

Diameter (d) of	Force with tolerance of ±10%
corresponding round leads	
$\varnothing \le 0.25 \text{ mm}$	0.5 N
0.25 < Ø ≤ 0.35 mm	1.25 N
0.35 < Ø ≤ 0.50 mm	2.5 N
0.50 < Ø ≤ 0.80 mm	5 N

Torsional strength: Test Uc: severity 2

The lead is bent by 90° at a distance of 6 to 6.5 mm from the thermistor body.

The bending radius of the leads should be approx. 0.75 mm. Two torsions of

180° each (severity 2).

When subjecting leads to mechanical stress, the following should be observed:

Tensile stress on leads

During mounting and operation tensile forces on the leads are to be avoided.

Bending of leads

Bending of the leads directly on the thermistor body is not permissible.

A lead may be bent at a minimum distance of twice the wire's diameter +4 mm from the solder joint on the thermistor body. During bending the wire must be mechanically relieved at its outlet. The bending radius should be at least 0.75 mm.



B57861S

S861

Temperature measurement		

5 Sealing and potting

Miniature sensors with bendable wires

Sealing or potting processes can affect the reliability of the component.

When thermistors are sealed, potted or overmolded, there must be no mechanical stress caused by thermal expansion during the production process (curing / overmolding process) and during later operation. The upper category temperature of the thermistor must not be exceeded. Ensure that the materials used (sealing / potting compound and plastic material) are chemically neutral. As thermistors are temperature sensitive components it should be considered that molding can affect the thermal surrounding and may influence e.g. the response time.

Extensive testing is encouraged in order to determine whether overmolding or potting influences the functionality and/ or reliability of the component.

6 Cleaning

Cleaning processes can affect the reliability of the component.

If cleaning is necessary, mild cleaning agents are recommended. Cleaning agents based on water are not allowed. Washing processes may damage the product due to the possible static or cyclic mechanical loads (e.g. ultrasonic cleaning). They may cause cracks which might lead to reduced reliability and/ or lifetime.

7 Storage

In order to maintain their solderability, thermistors must be stored in a non-corrosive atmosphere. Humidity, temperature and container materials are critical factors.

Do not store SMDs where they are exposed to heat or direct sunlight. Otherwise, the packing material may be deformed or SMDs may stick together, causing problems during mounting. After opening the factory seals, such as polyvinyl-sealed packages, use the SMDs as soon as possible.

The components should be left in the original packing. Touching the metallization of unsoldered thermistors may change their soldering properties.

Storage temperature: -25 °C up to 45 °C
Relative humidity (without condensation): ≤75% annual mean

<95%, maximum 30 days per annum


Solder the thermistors listed in this data book after shipment from EPCOS within the time specified:

SMDs with AgPd termination: 6 months
SMDs with nickel barrier termination: 12 months
Leadless components: 12 months
Leaded components: 24 months


S861

8 Placement and orientation of SMD NTC thermistors on PCB


a) Component placement



It is recommended that the PC board should be held by means of some adequate supporting pins such as shown left to prevent the SMDs from being damaged or cracked.




b) Cracks



When placing a component near an area which is apt to bend or a grid groove on the PC board, it is advisable to have both electrodes subjected to uniform stress, or to position the component's electrodes at right angles to the grid groove or bending line (see c) Component orientation).

c) Component orientation



Choose a mounting position that minimizes the stress imposed on the chip during flexing or bending of the board.



l emberai	ture meas	urement

B57861S S861

Cautions and warnings

General

See "Important notes" on page 2.

Storage

- Store thermistors only in original packaging. Do not open the package prior to processing.
- Storage conditions in original packaging: storage temperature −25 °C ... +45 °C, relative humidity ≤75% annual mean, <95% maximum 30 days per annum, dew precipitation is inadmissible.</p>
- Do not store thermistors where they are exposed to heat or direct sunlight. Otherwise, the packing material may be deformed or components may stick together, causing problems during mounting.
- Avoid contamination of thermistor surface during storage, handling and processing.
- Avoid storage of thermistors in harmful environments like corrosive gases (SO_x, CI etc).
- Use the components as soon as possible after opening the original packaging.
- Solder thermistors within the time specified after shipment from EPCOS.
 For leaded components this is 24 months, for SMD components with nickel barrier termination 12 months, for leadless components this is 12 months, for SMD components with AgPd termination 6 months.

Handling

- NTC thermistors must not be dropped. Chip-offs or any other damage must not be caused during handling of NTCs.
- Do not touch components with bare hands. Gloves are recommended.
- Avoid contamination of thermistor surface during handling.
- Washing processes may damage the product due to the possible static or cyclic mechanical loads (e.g. ultrasonic cleaning). They may cause cracks to develop on the product and its parts, which might lead to reduced reliability or lifetime.

Bending / twisting leads

■ A lead (wire) may be bent at a minimum distance of twice the wire's diameter plus 4 mm from the component head or housing. When bending ensure the wire is mechanically relieved at the component head or housing. The bending radius should be at least 0.75 mm.

Soldering

- Use resin-type flux or non-activated flux.
- Insufficient preheating may cause ceramic cracks.
- Rapid cooling by dipping in solvent is not recommended.
- Complete removal of flux is recommended.



Temperature measurement

Miniature sensors with bendable wires

B57861S S861

Mounting

- Ensure that no thermo-mechanical stress occurs due to production processes (curing or overmolding processes) when thermistors are sealed, potted or overmolded or during their subsequent operation. The maximum temperature of the thermistor must not be exceeded. Ensure that the materials used (sealing/potting compound and plastic material) are chemically neutral.
- Electrodes/contacts must not be scratched or damaged before/during/after the mounting process.
- Contacts and housing used for assembly with the thermistor must be clean before mounting.
- Ensure that adjacent materials are designed for operation at temperatures comparable to the surface temperature of the thermistor. Be sure that surrounding parts and materials can withstand the temperature.
- Avoid contamination of the thermistor surface during processing.
- The connections of sensors (e.g. cable end, wire end, plug terminal) may only be exposed to an environment with normal atmospheric conditions.
- Tensile forces on cables or leads must be avoided during mounting and operation.
- Bending or twisting of cables or leads directly on the thermistor body is not permissible.
- Avoid using chemical substances as mounting aids. It must be ensured that no water or other liquids enter the NTC thermistors (e.g. through plug terminals). In particular, water based substances (e.g. soap suds) must not be used as mounting aids for sensors.
- The use of no-clean solder products is recommended. In any case mild, non-activated fluxes should be used. Flux residues after soldering should be minimized.

Operation

- Use thermistors only within the specified operating temperature range.
- Use thermistors only within the specified power range.
- Environmental conditions must not harm the thermistors. Only use the thermistors under normal atmospheric conditions or within the specified conditions.
- Contact of NTC thermistors with any liquids and solvents shall be prevented. It must be ensured that no water enters the NTC thermistors (e.g. through plug terminals). For measurement purposes (checking the specified resistance vs. temperature), the component must not be immersed in water but in suitable liquids (e.g. perfluoropolyethers such as Galden).
- Avoid dewing and condensation unless thermistor is specified for these conditions.
- Bending or twisting of cables and/or wires is not permissible during operation of the sensor in the application.
- Be sure to provide an appropriate fail-safe function to prevent secondary product damage caused by malfunction.

This listing does not claim to be complete, but merely reflects the experience of EPCOS AG.

Display of ordering codes for EPCOS products

The ordering code for one and the same EPCOS product can be represented differently in data



Temperature measurement

B57861S

Miniature sensors with bendable wires

S861

sheets, data books, other publications, on the EPCOS website, or in order-related documents such as shipping notes, order confirmations and product labels. The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products. Detailed information can be found on the Internet under www.epcos.com/orderingcodes



Temperature measurement	B57861S
Miniature sensors with bendable wires	S861

Symbols and terms

Symbol	English	German
A AWG	Area American Wire Gauge	Fläche Amerikanische Norm für Drahtquerschnitte
B B _{25/100}	B value B value determined by resistance measurement at 25 °C and 100 °C	B-Wert B-Wert, ermittelt durch Widerstands- messungen bei 25 °C und 100 °C
C_{th}	Heat capacitance	Wärmekapazität
1	Current	Strom
N	Number (integer)	Anzahl (ganzzahliger Wert)
$\begin{aligned} &P_{25} \\ &P_{diss} \\ &P_{el} \\ &P_{max} \end{aligned}$	Maximum power at 25 °C Power dissipation Electrical power Maximum power within stated temperature range	Maximale Leistung bei 25 °C Verlustleistung Elektrische Leistung Maximale Leistung im angegebenenTemperaturbereich
$\begin{array}{l} \Delta R_{\text{B}}/R_{\text{B}} \\ \\ R_{\text{ins}} \\ R_{\text{P}} \\ \\ R_{\text{R}} \\ \Delta R_{\text{P}}/R_{\text{R}} \\ \\ R_{\text{S}} \\ \\ R_{\text{T}} \end{array}$	Resistance tolerance caused by spread of B value Insulation resistance Parallel resistance Rated resistance Resistance tolerance Series resistance Resistance at temperature T (e.g. R ₂₅ = resistance at 25 °C)	Widerstandstoleranz, die durch die Streuung des B-Wertes verursacht wird Isolationswiderstand Parallelwiderstand Nennwiderstand Widerstandstoleranz Serienwiderstand Widerstand bei Temperatur T (z.B. R ₂₅ = Widerstand bei 25 °C)
$T \\ \Delta T \\ t \\ T_A \\ T_{max} \\ T_{min} \\ T_{op} \\ T_{R}$	Temperature Temperature tolerance Time Ambient temperature Upper category temperature Lower category temperature Operating temperature Rated temperature	Temperatur Temperaturtoleranz Zeit Umgebungstemperatur Obere Grenztemperatur (Kategorietemperatur) Untere Grenztemperatur (Kategorietemperatur) Betriebstemperatur Nenntemperatur
T_{surf} V_{ins}	Surface temperature Voltage Insulation test voltage	Oberflächentemperatur Spannung Isolationsprüfspannung
V ins V _{op} V _{test}	Operating voltage Test voltage	Betriebsspannung Prüfspannung



Temperature measurement	B57861S
Miniature sensors with bendable wires	S861

Symbol	English	German
α	Temperature coefficient	Temperaturkoeffizient
Δ	Tolerance, change	Toleranz, Änderung
δ_{th}	Dissipation factor	Wärmeleitwert
$\tau_c \\ \tau_a$	Thermal cooling time constant Thermal time constant	Thermische Abkühlzeitkonstante Thermische Zeitkonstante

Abbreviations / Notes

Symbol	English	German
SMD	Surface-mounted devices	Oberflächenmontierbares Bauelement
*	To be replaced by a number in ordering codes, type designations etc.	Platzhalter für Zahl im Bestellnummern- code oder für die Typenbezeichnung.
+	To be replaced by a letter.	Platzhalter für einen Buchstaben.
	All dimensions are given in mm.	Alle Maße sind in mm angegeben.
	The commas used in numerical values denote decimal points.	Verwendete Kommas in Zahlenwerten bezeichnen Dezimalpunkte.



Important notes

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed guestions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
- Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).



Important notes

7. The trade names EPCOS, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EPCOS / TDK:

 B57861S0103A039
 B57861S0502F045
 B57861S0303F045
 B57861S0302F040
 B57861S0103J040

 B57861S0103F045
 B57861S0303J040
 B57861S0503F040
 B57861S0302J040
 B57861S0502H040

 B57861S0303H040
 B57861S0104J040
 B57861S0104H040
 B57861S0104F040
 B57861S0303F040
 B57861S0103H040

 B57861S0502F040
 B57861S0503J040
 B57861S0503H040
 B57861S0303F040
 B57861S0103H040