

				نموذج تقديم اعتماد مواد اذار الحريق				
تاريخ نهاية العقد		1.375.641.5		قيمة العقد	توريد وتركيب وتشغيل أنظمة الإطفاء واذار الحريق لأحد المواقع التابعة لديوان رئاسة أمن الدولة بحافظة الطائف		المشروع	
باسكو سيفتي	المقاول	مكتب نمج الإبداع للاستشارات الهندسية		الاستشاري	رئاسة أمن الدولة	المالك	موقع المشروع	
بيانات التقديم								
		17/11/1447		04/05/2026	تاريخ التقديم	MAS-ELEC-04-R00	رقم التقديم	
اخرى	مخططات	مواد	مستند	نوع التقديم		ميكانيكا	كهرياء	
التصنيف	معماري	مدني						
التسلسل	الوصف	الكود	التسلسل	الوصف	الكود	التسلسل	الوصف	
1	نظام مواد اذار الحريق	10						
2	شركة GENT	11						
3		12						
4	الاستلام	المقاول						
5	الختم	التوقيع	ممثل المقاول					
6			م. أحمد علي مصطفى					
7				التاريخ				
8				04/05/2026 - م				
9				17/11/1447 - هـ				
المراجعة الفنية				الملاحظات الفنية				
☐	المدني / الانشائي	١- المبرار اعلاه متوافقة ومعتمدة من الدفاع المدني والكود السعودي NFPA ٢- يجب اذيتج التنفيذ حسب تعليمات الشركة المصنعة والكود السعودي NFPA وتوصيات الجهة المالكة والاستشاري ٣- يجب ان يكون اختيار النظام حسب تعليمات الشركة المصنعة والكود السعودي NFPA						
☐	المعماري							
☒	الكهريائي							
☐	الميكانيكي							
مدير المشروع								
	التوقيع							
9/5/2026	التاريخ							
☐	☒	☐	الكود	العدد	المرافقات	التاريخ	ممثل المالك	
C: مرفوض ويعد التقديم	B: مقبول حسب الملاحظات	A: مقبول		16	☒			
يتعهد المقاول المذكور أعلاه بأنه قد راجع كافة تفاصيل التقديم وطابقها مع شروط ومواصفات ومخططات المشروع المعتمدة وان هذه الموافقة لا تخلي مسؤوليته حسب متطلبات العقد								



Consultants Specification Guide

Vigilon Plus Analogue Addressable System

Contents

1. VIGILON PLUS - FIRE ALARM CONTROL PANELS

- 1.1 VIGILON PLUS – FEATURES
- 1.2 VIGILON COMPACT PLUS AND VIGILON LOOP PARAMETERS
- 1.3 SYSTEM OVERVIEW
- 1.4 POWER SUPPLY & STANDBY BATTERIES
- 1.5 NETWORKING OF CONTROL PANELS
- 1.6 REPEAT PANELS
- 1.7 A3 MIMIC PANEL
- 1.8 LOOP DIAGNOSTICS AND SUPPORT TOOLS

2. S-QUAD ANALOGUE SENSORS RANGE

- 2.1 HEAT SENSOR
- 2.2 HEAT SENSOR SOUNDER
- 2.3 HEAT SENSOR SOUNDER VISUAL ALARM & SPEECH
- 2.4 OPTICAL SENSOR
- 2.5 OPTICAL/HEAT SENSOR
- 2.6 OPTICAL/HEAT SENSOR SOUNDER
- 2.7 DUAL ANGLE OPTICAL/HEAT SENSOR
- 2.8 DUAL ANGLE OPTICAL/HEAT SENSOR SOUNDER
- 2.9 DUAL ANGLE OPTICAL/HEAT SPEECH
- 2.10 DUAL ANGLE OPTICAL/HEAT SENSOR WITH VISUAL ALARM DEVICE
- 2.11 DUAL ANGLE OPTICAL/HEAT SENSOR SOUNDER WITH SPEECH & VAD
- 2.12 DUAL ANGLE OPTICAL/HEAT SENSOR WITH CO
- 2.13 DUAL ANGLE OPTICAL/HEAT SENSOR WITH CO VISUAL ALARM AND SOUNDER
SPEECH

3. BEAM SENSORS

4. DUCT SENSOR HOUSING

5. S-QUAD BASES

6. MANUAL CALL POINTS

7. SOUNDERS

- 7.1 SYSTEM SOUNDER
- 7.2 LOW PROFILE SOUNDER
- 7.3 SYSTEM SOUNDER WITH INTEGRATED VISUAL ALARM DEVICE
(INCLUDING VOICE ENHANCED VARIANTS)
- 7.4 ENVIRONMENTAL PROTECTED SOUNDER WITH INTEGRATED VISUAL
ALARM DEVICE (INCLUDING VOICE ENHANCED VARIANTS)

8. HAND HELD REMOTE CONTROL UNIT

9. SOUNDER CONTROL

10. INTERFACE UNITS

- 10.1 LOOP POWERED 4 CHANNEL INTERFACE UNIT
- 10.2 LOOP POWERED 1 CHANNEL INPUT UNIT/ZONE MODULE
- 10.3 LOOP POWERED 1 CHANNEL INPUT/OUTPUT INTERFACE UNIT
- 10.4 LOOP POWERED 1 CHANNEL OUTPUT INTERFACE MV
- 10.5 LOOP POWERED 1 CHANNEL INPUT/OUTPUT INTERFACE MV
- 10. LOOP POWERED 4 CHANNEL INPUT/OUTPUT INTERFACE MV
- 10.7 MAINS POWERED INTERFACE UNIT

- 10.8 LOOP POWERED SINGLE INPUT KEY OPERATED INTERFACE (NON FIRE)
- 10.9 LOOP POWERED 12 WAY NON FIRE INPUT UNIT
- 10.10 SERIAL INTERFACE WITH HONEYWELL VOICE ALARM
- 10.11 FAAST INTERFACE UNIT

11. WINMAG GRAPHICS

1. VIGILON PLUS - FIRE ALARM CONTROL PANELS

	1 to 2 loop Vigilon Compact Plus Fire Alarm Control Panel EN54 parts 2 & Part Nos: COMPACTPLUS-24 (1 loop Vigilon Compact Fire Alarm Control Panel c/w 1 loop card) Compact LPC-EN (Additional Loop Card) COMPACT-NC (Network Card) PRINTER-HAND (Hand or Wall Mounted Printer) COMPACT-FLUSH (Flush Surround)
Key features: • 1 loop Control Panel • Expandable to 2 loops • Fully Networkable (to any EN54 Vigilon copper network) up to 31 Panels per domain (up to 200 panels on multi domain network) • Remote Printer Option • Internal keypad for programming with full QWERTY keyboard • Surface or flush options • Flash Memory Card to support commissioning and extended event log Vigilon Compact Literature Download CAD/BIM Symbols	
	1 to 4 loop Vigilon Fire Alarm Control Panel EN54 Parts 2 & 4 Part Nos: VIGPLUS-24-NP (1 to 4 loop Vigilon Fire Alarm Control Panel c/w 1 loop card & no printer) VIGPLUS -24 (1- 4 loop Vigilon Control Panel c/w 1 loop card & printer) VIG-LPC-EN (Additional Loop Card) VIG-NC (Network Card -Copper) VIG-NC-FO (Network Card – Fibre) VIG-IOC-DOM (input output card external communications) VIG-24-Flush (Flush Surround)
Key features: • 1 loop Control Panel • Expandable to 4 loops • Fully Networkable (BS & EN Networks) up to 31 Panels per domain (up to 200 panels on multi domain network) • Integral Printer • Internal keypad for programming with full QWERTY keyboard • Surface or flush options • Flash Memory Card to support commissioning and extended event log	

alarm state. The sounder shall be able to perform a resonance search to optimise the frequency to ensure minimum current draw in alarm.

Bell Tone:

In addition to the voice messages above, an 8 Inch solenoid bell recording shall be provided as a standard complex tone.

All speech outputs shall be synchronised with all other loop powered sensor speech devices and other loop powered audible visual units on the panel.

Each sensor will possess an integral red LED giving a flashing indication for a fire signal or a continuous indication for certain fault indications. Optional setting for LED to flash to confirm loop connectivity communications.

[Heat Sensor Sounder Speech VAD Literature](#)

[Download CAD/BIM Symbols](#)

[Download Gent's EN54-23 Explainer Video](#)

[Download Gent's S-Quad Selector App for iOS and Android](#)

2.4 OPTICAL SENSOR



EN 54 Parts 7, 17 & 18

Part Nos:

S4-715 (Optical Smoke Sensor)

S4-700 (Base)

Key Features:

- 200 per loop
- Optical Sensor
- Three selectable EN54 sensing states with combinations of optical smoke and false alarm filtering
- Two integral Line Isolators
- Configurable monitored input output

Optical Sensing:

Will be carried out by means of an Infra-red LED transmitting a pulse of light across an obtuse angled chamber.

Each sensor will possess an integral red LED giving a flashing indication for a fire signal or a continuous indication for certain fault indications. Optional setting for LED to flash to confirm loop connectivity communications.

[Optical Sensor Literature](#)

[Download CAD/BIM Symbols](#)

[Download Gent's S-Quad Selector App for iOS and Android](#)

2.5 OPTICAL/HEAT SENSOR



EN 54 Parts 5, 7, 17 & 1

Part Nos:

S4-710 (Optical Heat Sensor)

S4-700 (Base)

Key Features:

- 200 per loop
- Optical & Heat Sensor
- Sensing elements fully programmable to meet risk11 Sensing States 5 selectable EN54 Sensing States with combinations of Optical smoke and Class A1, A2, A2S, B and BS heat sensing
- Two integral Line Isolators
- Configurable monitored input output

Optical Sensing:

Will be carried out by means of an Infra-red LED transmitting a pulse of light across an obtuse angled chamber.

Heat Sensing:

Will be carried out by a thermistor, sampling the surrounding environmental temperature.

Each sensor will possess an integral red LED giving a flashing indication for a fire signal or a continuous indication for certain fault indications. Optional setting for LED to flash to confirm loop connectivity communications.

[Optical Hear Sensor Literature](#)

2.6 OPTICAL/HEAT SENSOR SOUNDER



EN 54 Parts 3, 5, 7, 17 & 18

Part Nos:

S4-770 S (Optical Heat Sensor)

S4-700 (Base)

Key Features:

- 200 per loop
- Optical & Heat Sensor
- Sensing elements fully programmable to meet risk
- 11 sensing states five selectable EN54 sensing states with combinations of optical smoke and Class A1, A2, A2S, B and BS heat sensing
- Integral Sounder (85dbA typical, +3dbA in turbo mode)
- 2 integral Line Isolators
- Configurable input output

Optical Sensing:

Will be carried out by means of an Infra-red LED transmitting a pulse of light across an obtuse angled chamber.

Heat Sensing:

Will be carried out by a thermistor, sampling the surrounding environmental temperature.

Sounder:

Integral Sounders will be capable of providing up to 3 different sound signals, which are selected/configured via the main control panel. Individual sensor sounder volume levels shall be adjustable via the use of a laptop PC and appropriate programming software from the manufacturer. The frequency of sound signals emitted will be as follows:

- 910Hz Low Sound
- 970Hz High Sound

In order to meet with the requirements of BS5839 Part 1, The sounder shall be able to perform a resonance search to optimise the frequency to ensure minimum current draw in alarm. Activation of the sounder shall be independent of the detection of a fire condition by the sensing element. Each sounder will have its own microprocessor to handle loop communications, which along with all other associated electronic components and will be sealed.

Each sensor will possess an integral red LED giving a flashing indication for a fire signal or a continuous indication for certain fault indications. Optional setting for LED to flash to confirm loop connectivity communications.

The sounder functionality shall be automatically actively monitored daily and indicate a fault in the case of malfunction.

[Optical Heat Sensor Sounder Literature](#)

[Download CAD/BIM Symbols](#)

[Download Gent's S-Quad Selector App for iOS and Android](#)

2.7 DUAL ANGLE OPTICAL/HEAT SENSOR



EN 54 Part 5, 7, 17 &

Part Nos:

S4-711	(Dual Optical Heat Sensor)
S4-700	(Base)
S4BK-700	(Dual Optical Heat Sensor (black))
S4BK-711	(Base in black)

Key Features:

- 200 per loop
- Dual Optical & Heat Sensor
- Sensing elements fully programmable to meet risk
- 10 selectable EN54 sensing states with combinations of optical smoke and Class A1, A2, A2S, B and BS heat sensing
- 2 integral Line Isolators
- Configurable input output

Dual Optical Heat Sensor VAD (Red and White)	S4-711 VAD-HPR S4-711-VAD-HPW
Dual Optical Heat Sensor Sounder with speech and VAD (Red and White)	S4-711-VAD-HPR S4-711-VAD-HPW
CO Sensors	
Dual Optical Heat CO Sensor	S4-901
Dual Optical Heat CO Sensor sounder with speech and Red and White VAD (white body)	S4-911-V-VAD-HPR S4-911-V-VAD-HPW
Dual Optical Heat Sensor Sounder with speech and Red and White VAD (black body)	S4BK-711-V-VAD-HPR
Accessories	
S Quad Sensor Base	S4-700
IP 21 gasket for S-Quad Base	S4-701
IP 21 gasket for S-Quad Base (pack of 5)	S4-705
S Quad Remote LED	13449-01
Duct Housing (<i>including base and 0.6M tube</i>)	S4-34760

2.1 HEAT SENSOR



EN 54 Parts 5, 17 & 18

Part Nos:

S4-720 (Heat Sensor)

S4-700 (Base)

Key Features:

- 200 per loop
- Rate of rise and fixed temperature sensing
- 6 configurable sensing states (Class A1, A2, A2S, B and BS)
- 2 integral Line Isolators
- Configurable monitored input output

Heat Sensing:

Will be carried out by a thermistor, sampling the surrounding environmental temperature. Each sensor will possess an integral red LED giving a flashing indication for a fire signal or a continuous indication for certain fault indications. Optional setting for LED to flash to confirm loop connectivity communications.

Link to - [Heat Sensor Literature](#)

2.2 HEAT SENSOR SOUNDER

EN 54 Parts 3, 5, 17 & 18



Part Nos:
S4-780 S (Heat Sensor Sounder)
S4-700 (Base)

Key Features:

- 200 per loop
- Rate of rise and fixed temperature sensing
- 6 configurable Sensing States (Class A1, A2, A2S, B and BS)
- Integral Sounder (85dbA typical, +3dbA in turbo mode)
- 2 integral Line Isolators
- Active Sounder circuit monitoring
- Configurable monitored input output

Heat Sensing:

Will be carried out by a thermistor, sampling the surrounding environmental temperature.

Sounder:

Integral Sounders will be capable of providing up to 3 different sound signals, which are selected/configured via the main control panel. Individual sensor sounder volume levels shall be adjustable via the use of a laptop PC and appropriate programming software from the manufacturer.

The frequency of sound signals emitted will be as follows:

- 910Hz Low Sound
- 970Hz High Sound

In order to meet with the requirements of BS5839 Part 1.

Activation of the sounder shall be independent of the detection of a fire condition by the sensing element.

Each sounder will have its own microprocessor to handle loop communications, which along with all other associated electronic components will be sealed.

Each sensor will possess an integral red LED giving a flashing indication for a fire signal or a continuous indication for certain fault indications. Optional setting for LED to flash to confirm loop connectivity communications.

It shall be possible to disable the heat sensor functionality independently from the sounder.

[Heat Sensor Sounder Literature](#)

[Download CAD/BIM Symbols](#)

[Download Gent's S-Quad Selector App for iOS and Android](#)

2.3 HEAT SENSOR SOUNDER WITH SPEECH & VISUAL ALARM

**Part Nos:**

S4-720-V-VAD-HPW Heat Sensor c/w speech sounder & Visual Alarm (White)

S4-720 V-VAD-HPR Heat Sensor c/w speech sounder, & Visual Alarm (Red)

S4-700 (Base)

S4-701 IP21 Gasket (**S4-705** Pack of 5)

Key Features:

- 60 per loop as Sounder, 40 per loop as Speech
- Rate of rise and fixed temperature sensing
- 6 selectable EN54 sensing states (Class A1, A2, A2S, B and BS)
- Integral Sounder (85dbA typical, +3dbA in turbo mode)
- 3 Emergency Speech Messages as standard
- 1 Bell Tone
- 2 integral Line Isolators
- Active Sounder and VAD circuit monitoring
- Configurable monitored input output
- Integrated EN54 part 23 visual alarm device

Heat Sensing:

Will be carried out by a thermistor, sampling the surrounding environmental temperature.

Visual Alarm Device

The integral VAD element shall utilise a high power red or white LEDs with variable intensity settings. LED pulsing shall be synchronised with all other loop powered audible visual units located on the fire alarm and detection system with the option to programme changes to the pulse timings (ranging from 1, 2 or 4 seconds). The VAD circuit shall be actively monitored for working operation.

Activation of the VAD shall be independent of the detection of a fire condition by the sensing element.

Speech:

The speech function shall be provided by stored messages on an internal flash memory. Output from the flash memory processor shall be 20 seconds of speech. Additionally there shall be the capability to provide complex tones, such as bell tones. Each sensor shall include 4 standard messages within the flash memory.

As standard, the device flash memory shall contain the following messages:

Alert Message: (Female Voice)	"An incident has been reported in the building, please await further instructions"
Alarm Message 1: (Female Voice)	"Attention please, this is an emergency please leave the building by the nearest available exit"
Alarm Message 2: (Male Voice)	"This is a Fire Alarm! Please leave the building immediately by the nearest available exit"
Test Message: (Female Voice)	"This is a test message, no action is required"

It shall be possible to have bespoke site specific message and tone options recorded and installed. A test of the message storage device, amplifier, power supply and tone generator 'piezo' within the sounder shall be carried out by the fire alarm control panel daily. Should the sounder fail to produce the required tone quality of sound output, then a fault indication shall be provided at the control panel. Sounders shall be capable of being tested for the conditions described above in both the quiescent and

6. MANUAL CALL POINTS



EN54 part 11 & 17

Part Nos:

S4-34800 (Manual Call Point c/w Glass)

S4-34842 (Manual Call Point c/w Glass & Protective Cover)

S4-34805 (Manual Call Point c/w Resettable Element, this element can be branded)

S4-34845 (Manual Call Point c/w Resettable Element & Protective Cover)

S4-34805 EP (Manual Call Point (IP67) c/w Resettable Element & Protective cover)

Key Features:

- 200 per loop
- Option of glass or resettable element
- Surface or Semi Flush options
- 2 integral Line Isolators
- Weather Proof Variant (IP67)

Each MCP shall contain its own microprocessor ensuring a less than 1 second response time from initiation.

All electronic devices contained within the MCP shall be sealed so as to prevent damage from hostile environment conditions: i.e. dust, up to a rating of IP32. For additional protection from environmental conditions a weatherproof version of the MCP shall be available to provide a rating of IP54.

The MCP will be available for either semi-flush or surface fixing. Semi-flush flanges shall be available in black.

The device can be tested functionally without the need to either remove the front cover and/or break the glass, using a special test key (supplied as standard). The key shall insert in a keyway concealed by a sliding cover.

Upon operation of the break glass the integral LED will flash to denote operation, this being cancelled upon the operation of a reset procedure. The system must not allow a "Fire" reset to take place until a new glass has been correctly inserted. Should a "Fire" reset be operated with a MCP still being in the operated mode, the panel will inform the user of the situation, e.g.

- "Call Point not reset properly
- Please investigate and try again"

These devices will comply fully with EN54 Part11

A keyswitch version of the MCP shall be available for use in areas where malicious action is expected to be frequent or where unauthorised activation may present additional hazard. This unit is not certified (part ref - S4-34807 - Manual Call Point c/w Keyswitch)

[Manual Call Point Literature](#)

[Download CAD/BIM Symbols](#)

10. INTERFACE UNITS



EN54 Part 17 & 18

Part Nos:

S4-34450 (4 Channel Input/Output Interface)

Mounting Options available

S4-34490 Large plastic enclosure

S4-34491 Din Rail mounting bracket

S4-34492 Metal Enclosure

Interfaces will be directly connected to the loop, these being:

Loop powered 4 channel interface unit
Loop powered 1 Channel Input Unit/Zone Module
Loop powered 1 Channel Input/Output Interface Unit
Loop Powered 1 Channel Output Interface MV
Loop powered 1 Channel Mains Switching Interface Unit
Loop powered 4 Channel Mains Switching Interface Unit
Mains powered 4 channel interface c/w integral power supply and battery standby (2 versions)
12 NON Fire Input Unit

10.1 LOOP POWERED 4 CHANNEL INTERFACE UNIT

- 170 per loop (8 if sectorised channels set up) or
- 32 per loop if used as Conventional Zone Module (with no requirement for auxiliary power)
- Four input signals which can be interpreted as
 - Zone Fire (conventional Zone) input channel one only
 - Fire Input
 - Fault Input
 - Supervisory Input
 - Confirmation Input
- 4 output signals which can be individually programmed as
 - Output
 - Confirmation Output
- Any combination of inputs or output (Conventional Zone only available on Channel 1)
- NO or NC contacts (configurable)
- Contacts rated at 2A 24V DC
- 2 integral Line Isolators

For input applications, a selectable delay is available

These units will not require any form of external power supply and are fully maintained under mains power failure condition by the control panel's standby batteries.

[Loop Powered 4 Channel Interface Literature](#)

[Download CAD/BIM Symbols](#)

[Download Gent's Interface Selector App for iOS and Android](#)

10.2 LOOP POWERED 1 CHANNEL INPUT UNIT/ZONE MODULE

AWAITING IMAGE

EN54 Part 17 & 18

Part Nos: S4-34410

Mounting Options available

S4-34490 Large plastic enclosure

S4-34491 Din Rail mounting bracket

S4-34492 Metal Enclosure

Key Features:

- 170 per loop or
- 32 per loop if used as Conventional Zone Module (with no requirement for auxiliary power)
- Input signals which can be interpreted as
 - Zone Fire (conventional zones)
 - Fire Input
 - Fault Input
 - Supervisory Input
- 2 integral Line Isolators

For input applications, a selectable delay is available

These units will not require any form of external power supply and are fully maintained under mains power failure condition by the control panel's standby batteries.

[Single Channel \(Input\) Interface Literature](#)

[Download CAD/BIM Symbols](#)

[Download Gent's Interface Selector App for iOS and Android](#)

10.3 LOOP POWERED 1 CHANNEL INPUT/OUTPUT INTERFACE UNIT

AWAITING IMAGE

EN54 Part 17 & 18

Part Nos: S4-34420

Mounting Options available

S4-34490 Large plastic enclosure

S4-34491 Din Rail mounting bracket

S4-34492 Metal Enclosure

Key Features:

- 200 per loop
- Input signal which can be interpreted as
 - Fire Input
 - Fault Input
 - Supervisory Input
 - Confirmation Input
- Output signal can be programmed as
 - Output

- Confirmation Output
- NO or NC contacts (configurable)
- Contacts rated at 2A 24V DC
- 2 integral Line Isolators

For input applications, a selectable is available.

These units will not require any form of external power supply and are fully maintained under mains power failure condition by the control panel's standby batteries

[Single Channel Input/Output Interface Literature](#)

[Download CAD/BIM Symbols](#)

[Download Gent's Interface Selector App for iOS and Android](#)

10.4 LOOP POWERED 1 CHANNEL OUTPUT INTERFACE MV



EN54 Part 17 & 18

Part Nos:

S4-34411 (1 Channel Output Mains Switching Din Rail Mounted)

S4-34415 (1 Channel Output Mains Switching Metal Boxed)

Key features:

- 200 per loop
- NO or NC contacts
- Contacts rated at 13A at a nominal voltage of 230VAC/24V DC

10.5 LOOP POWERED 1 CHANNEL INPUT/OUTPUT INTERFACE MV

AWAITING IMAGE

EN54 Part 17 & 18

Part Nos:

S4-34401 (1 Channel Mains Switching Interface)

Key features:

- 200 per loop
- Input signal can be interpreted as
 - Fire Input
 - Fault Input
 - Supervisory Input
 - Confirmation Input
- Output signal can be programmed as
 - Output
 - Confirmation Output
- NO or NC contacts (configurable)
- Contacts rated at 13A at a nominal voltage of 230VAC/24V DC
- Boxed
- 2 integral Line Isolators

S-Cubed

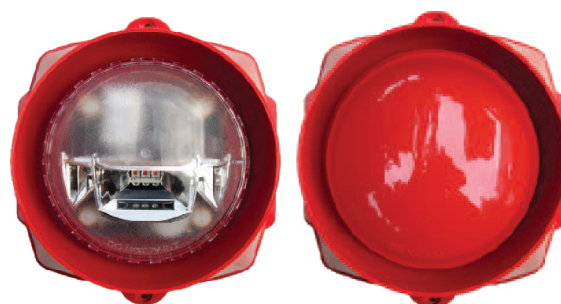
S-Cubed incorporates sound, speech and an EN54-23 visual alarm all in one device.

Description

S-Cubed offers a comprehensive range of loop powered alarm sounders with integrated voice and EN54-23 certified visual alarms. Combined with flexible configuration from the fire control panels, this loop powered device can give a differentiated combination of audible and visual alarms for alert and general evacuation.



NON EP RANGE



EP RANGE

TECHNICAL SPECIFICATION - 1.0 TONE AND VOICE SOUNDERS

Type	System Sounder		
	Standard Tone	Voice Enhanced	Inc Bell Sound
Approx max quantity per Loop (dependent on loop load)	200	200	160
Ingress Protection	Standard Range IP-21. Environmentally Protected 'EP' range - IP66		
Approx Weight	0.3Kg		
Operating Temperature	10°C to +50°C		
Sound Output	103 dB(A) $\pm$ 3dB(A) @1m		
IR Control Operating Distance	3m		
Approvals	LPCB approved to EN54-3, EN54-23 and EN54-17		

KEY FEATURES

- Very low power consumption means that the Vigilon system offers more high performance sounders and VADs on the loop than any other manufacturer
- Each loop can support up to 200 voice sounders, 100 visual alarm devices (VADs) and up to 70 combined sounder VADs
- EN54-23 VADs with adjustable light coverage matching the sounder output
- Environmentally Protected (EP) range with an IP66 rating
- Four voice phrases and a bell tone available as standard
- Voice and tone modes can be freely configured within the same sounder
- Active background monitoring of sounder and VAD circuits
- Adjust the sounder volume via the commissioning tool, the panel or the HandiLink infrared remote control

S-Cubed Technical Specifications






TECHNICAL SPECIFICATION – 1.1 TONE AND VOICE SOUNDERS WITH VAD

Type	Integrated Sounder and VAD		VAD Only
Strobe Colour	Red or White		Red or White
Approx Max Quantity per Loop (dependent on loop load)	High Power - 38 Medium Power - 47 Low Power - 72		High Power - 44 Medium Power - 57 Low Power - 100
Ingress Protection	Standard range IP21		
Approx Weight	0.3Kg		
Operating Temperature	-10°C to +50°C		
Sound Output at 1m	103 dB(A) ± 3 dB(A)		
VAD Category - High Performance			
Power setting	High	Medium	Low
Red	W-6.7-14	W-6.5-12.5	W-5-9.5
White	W-5-12.5	W-4.5-11.3	W-3-8.5
VAD Category - Standard Performance*			
Red	W-3-8.5		
White	W-3-8.5		
Strobe Flash Rate	0.5Hz		
Approvals	Sounder VAD EN54-3, EN54-23:2010, EN54-17 VAD - EN54-23:2010, EN54-17 Voice Sounders are LPCB certified to EN54-3 annex C		

* The Standard Performance category relates to a restricted number of devices in the range, please see part numbers in Order Codes table.

NB: To use the new range of sounders the panel software (main & repeat) may need to be upgraded.

DIMENSIONS (mm)

Non EP Sounder		EP Sounder
Shallow base	Standard base	
		
		

Honeywell Gent

140 Waterside Road
Hamilton Industrial Park,
Leicester, LE5 1TN
Telephone: 0203 409 1779
E-mail: gentenquiry@honeywell.com
www.gent.co.uk

Content subject to change
without notice

S-Cubed 07/2020
© 2020 Honeywell International Inc.

ORDER CODES

Sounders	
Sounder / Red Body	S3-S-R
Sounder / White Body	S3-S-W
Voice Sounder	
Voice Sounder / Red Body	S3-V-R
Voice Sounder / White Body	S3-V-W
Sounder VAD	
Sounder / HP White VAD Red Body	S3-S-VAD-HPW-R
Sounder / HP Red VAD Red Body	S3-S-VAD-HPR-R
Sounder / HP White VAD White Body	S3-S-VAD-HPW-W
Sounder / HP Red VAD White Body	S3-S-VAD-HPR-W
Voice Sounder VAD	
Voice Sounder / HP White VAD / Red Body	S3-V-VAD-HPW-R
Voice Sounder / HP Red VAD / Red Body	S3-V-VAD-HPR-R
VAD	
HP White VAD / Red Body	S3-VAD-HPW-R
HP Red VAD / Red Body	S3-VAD-HPR-R
Standard Power Sounder VAD	
Sounder/Standard Power White VAD/Red Body	S3-S-VAD-LPW-R
Sounder/Standard Power Red VAD/Red Body	S3-S-VAD-LPR-R
EP Range (IP66 rated)	
Sounder/Red Body/EP	S3EP-S-R
Voice Sounder/HP White VAD/Red Body/EP	S3EP-V-VAD-HPW-R
Voice Sounder/HP Red VAD/Red Body/EP	S3EP-V-VAD-HPR-R
HP White VAD/Red Body/EP	S3EP-VAD-HPW-R
HP Red VAD/Red Body/EP	S3EP-VAD-HPR-R

Standard Voice Messages

- Alert Message (female voice)
"An incident has been reported in the building, please await further instructions."
- Alarm Message 1 (female voice)
"Attention please, this is an emergency. Please leave the building by the nearest available exit."
- Alarm Message 2 (male voice)
"This is a fire alarm! Please leave the building immediately by the nearest available exit."
- Test Message (female voice)
"This is a test message, no action is required."

Honeywell
GENT