Bally GAMING + SYSTEMS®

ProSlot® 6000

MODULE 2

MK2-S6MOD-0013

SETUP AND OPERATION

©2004 BALLY GAMING, INC. ALL RIGHTS RESERVED

Bally Gaming and Systems
6601 South Bermuda Road, Las Vegas, NV 89119

For Customer Service and information, call or FAX:
1-877-GO-BALLY (877-462-2559) in the U.S. and Canada
+1-702-896-7772 outside the U.S.
896-7772 in Las Vegas
FAX: +1-702-896-7710
or visit our website at http://www.ballygaming.com

Module 2 - Setup and Operation

Major Components Diagram 6

Upright 6
Slant Top 7
Electrical Specifications 8
Environmental Specifications 8
Physical Specifications 8

Specifications 8

Installing the Machine 9

Installation Checklist 9
Review Power and Environmental Requirements 9
Unpack and Inspect Machine 9
Securing the Machine 10
Install Locks 10

Setup 10

MPU Jumper Selections 10
Battery Enable 10
Door Open Detect Circuit 10
MPU Logic Detect Circuit 10
DIP Switch Selections 11
DS1 - Switch Functions 11
DS1 - Secondary Device Protocol 11
DS2 - Denomination 11
DS2 Switches 5-6 Bill Acceptor 11
DS2 Switches 7-8 Special Features 12
DS3 Switches 1-4, 7-8 Market Code 12
DS3 Switches 5-6 12
SafeRAM™ Clear 12

Switch Functions 13

Demo Mode 13
Real Time Clock (RTC) 13

Machine Options 14

Option Descriptions 16

Machine Operation 21

Message Center 21
Win paid Decimal Points 21
Playing a Game 22
Credit Collect Messages 22

Accounting 23

Electromechanical Meters 23
Machine Meter Groups 24
00: Model Information 24
01: Bookkeeping 25
01: Bookkeeping (MC=3 or MC=4) 26

| - Revised, || - New

©2004 Bally Gaming and Systems

Module 2 - Setup and Operation Table of Contents (Cont.)

01: Bookkeeping (MC=16) 26
02: Win Records 26
| 03: Game Recall 26
04: Game Summary 28
05: Bill Acceptor Records 28
06: Bill Acceptor Transaction History 28
07: Progressive Jackpots 29
08: Current Progressive Values 29
09: Host EFT History 30
10: Host EFT Totals 31
11: Doors 31
12: Secondary Game Bookkeeping Meters 31
13: Data Vault™ Redundant Bookkeeping System 31
14: Voucher Out Transaction History 31
| 15: Coinless Payment System Transaction Records 33
16: Voucher In Transaction History 34
17: Meter Dump 34
18: SAS® General Meters 34
19: NGCB Bookkeeping Meters 35
20: NGCB Bill Meters 35
21: Payback Percentage Display 35
22: Fund Transfer History 35

Diagnostic Tests and Functions 36

#1 - Model Information 36
| **#2 - Output Test 37**
#3 - Input Test 38
Bill Acceptor Input Test 38
Acceptance and Value of Bills 38
Common Reasons for 8a Codes 38
Bill Acceptor Doors 38
WBA Coupon/Voucher Acceptance 38
Coin Acceptor Test 38
Coin Acceptor Test 39
#4 - Hopper/Printer Test 39
#5 - Reel Function Test 39
#6 - Reel Tape Test 40
#7 - Reel Tilt and System Reset Records 40
#8 - Slot Communications 40
#9 - Display Test 40
#10 - Payout Test 41
#11 - Game Optioning 41
#12 - Peripherals Test 41
#13 - Data Vault™ Records 42
#15 - Hopper Dump 42
#16 - Topbox Test 42

©2004 Bally Gaming and Systems

Module 2 - Setup and Operation Table of Contents (Cont.)

Troubleshooting 43

Overview 43
Power on Malfunctions 43
Tilt Messages 43
Coin Acceptor Malfunctions, 2x Series Exception Codes 43
Hopper Malfunctions, 3x Series Malfunction Codes 43
Memory Malfunctions, 8x Series Malfunction Codes 44
Communication Errors, 9x Series Malfunction Codes 44
Reel Malfunctions, 4x and 7x Series Malfunction Codes 44

| **Malfunction and Game Codes 45**

©2004 Bally Gaming and Systems

Major Components Diagram

Upright

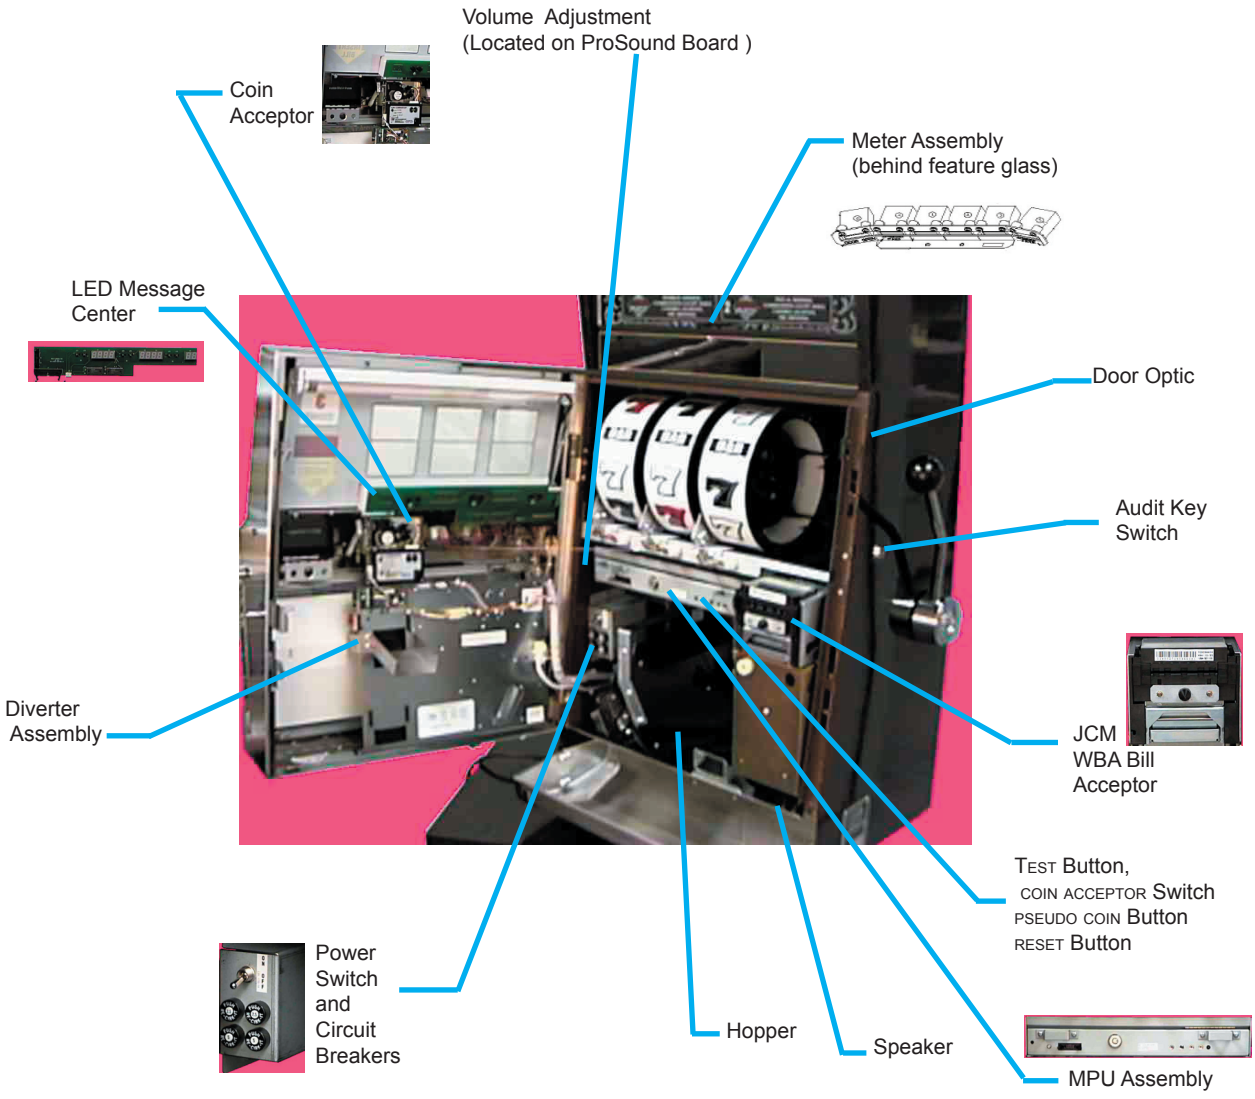

| - Revised, || - New
©2004 Bally Gaming and Systems

Major Components Diagram

Slant Top

TEST and PSEUDO COIN Buttons

Power Switch and
Circuit Breakers



Fluorescent Starters
(Behind Reels)

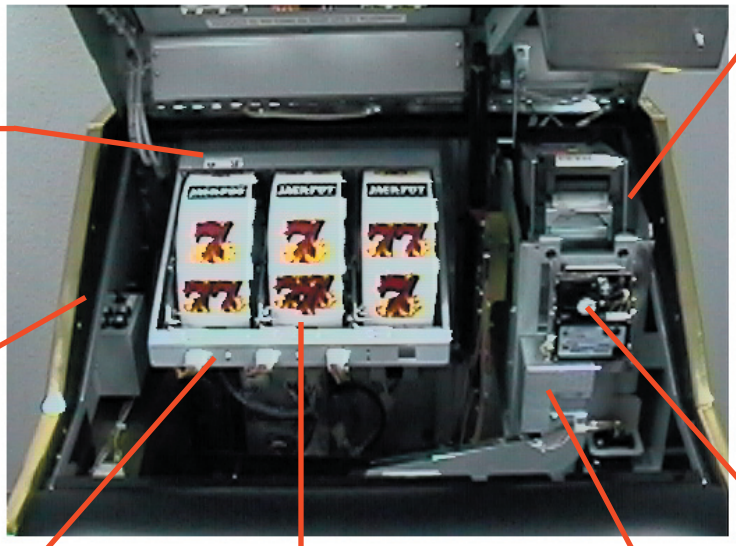

Reel Shelf
Assembly

JCM WBA Bill Acceptor
(Operating Position)



JCM WBA
Bill Acceptor

Coin Acceptor

Coin Optic
Decoder Board

Electromechanical Meters
and Audit Key Switch

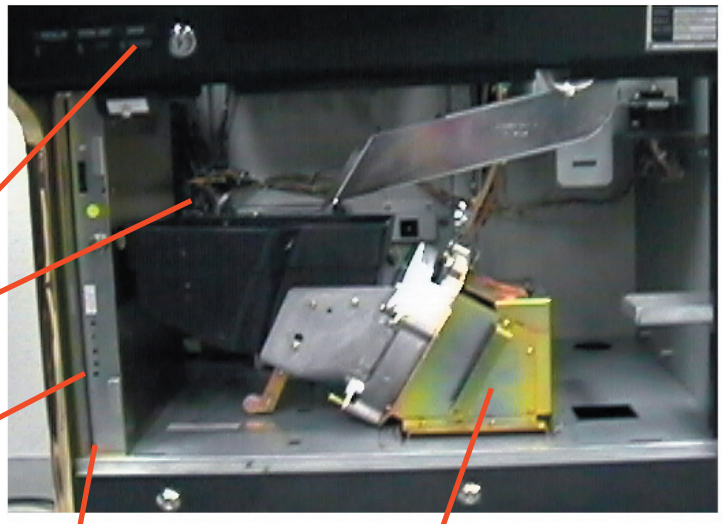

Power Supply

TEST Button
COIN ACCEPTOR
Switch
PSEUDO Button
RESET Button

MPU Board

Hopper

©2004 Bally Gaming and Systems

Specifications

Electrical Specifications

Line Voltage		120/240 VAC 50/60 Hz		
Power Supply Outlets		+5, +12, -12, +24 VDC		
Machine State	Idle	Play	Payout	Maximum Theoretical Draw
Current @ 120 VAC	1.1 AMP	1.2 AMP	1.7 AMP	2.35 AMP
Current @ 240 VAC	.55 AMP	.60 AMP	.85 AMP	1.18 AMP
Power	121W	132W	187W	259W

Environmental Specifications

Ambient Temperature:
Max: 100°F (38°C) Min: 40°F (4°C)
Maximum Relative Humidity: 90%
Average Heat from Machine: 500 BTU/Hr.

Physical Specifications

Style	A		B	
	Inch	CM	Inch	CM
R6	46 1/4	117.48	20	50.80
R6 (Extended)	49 1/4	125.10	20	50.80
W6	40	101.60	20	50.80
W6 (Extended)	49 1/4	125.10	20	50.80
S	50 7/8	129.24	39 1/4	99.70
E	53 3/8	135.57	39 1/4	99.70
Style	**E**		**F**	
	Inch	CM	Inch	CM
R6				
R6 (Extended)				
W6				
W6 (Extended)				
S	31 13/16	80.80	28 1/16	75.57
E	31 13/16	80.80	28 1/16	75.57
Style	**Weight**			
	Lb	Kg		
R6	217	98.43		
R6 (Extended)	219	99.33		
W6	217	98.73		
W6 (Extended)	220	99.79		
S	286	129.73		
E	348	157.85		

Warning: Use a maximum of six machines for each 120VAC 20A grounded circuit.

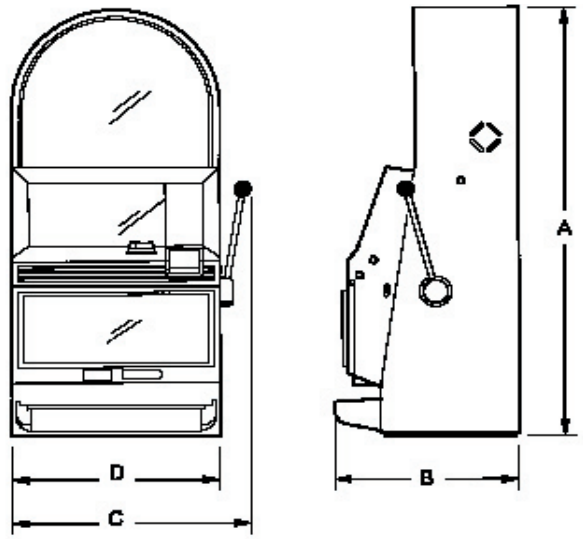

"R6" Style Cabinet

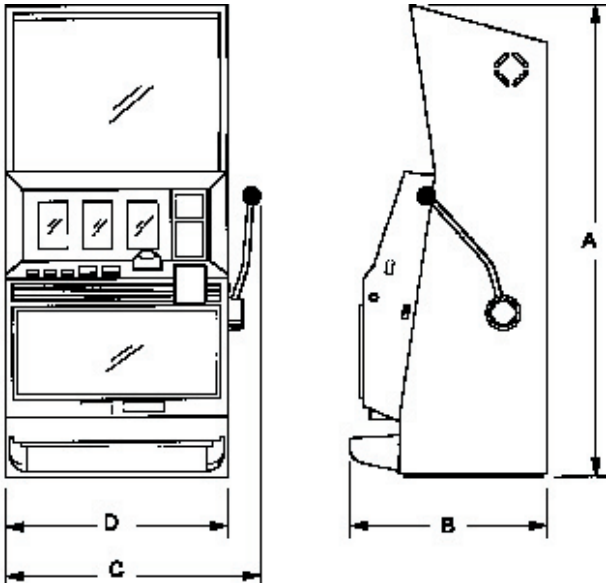

"W6" Style Cabinet

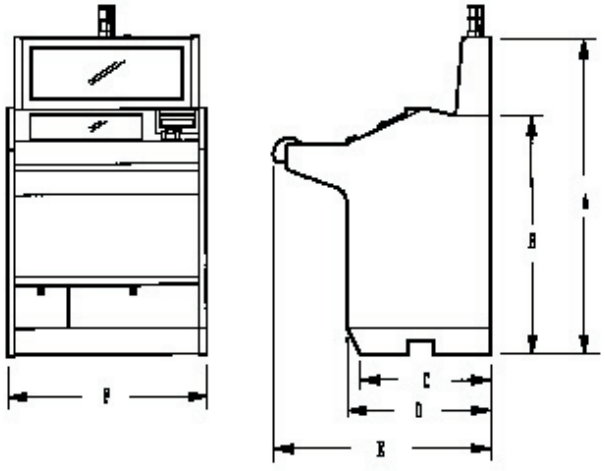

"S" and "E" Style Cabinets

©2004 Bally Gaming and Systems

Installing the Machine

Installation Checklist

- ❑ Review environmental and power requirements
- ❑ Unpack and inspect machine
- ❑ Secure the machine to the stand (upright)
- ❑ Install locks
- ❑ Setup
- ❑ SafeRAM™ Clear
- ❑ Set game options

Review Power and Environmental Requirements

Line power must provide an earth ground for safe operation. Do not overload the circuit. See Electrical Specifications (page 2-7) for more information.

Unpack and Inspect Machine

Unpack and inspect the machine. If the machine is damaged, contact a Bally Gaming and Systems Distributor or Customer Service Representative for Return Merchandise Authorization (RMA) information.

Carefully unpack and remove all loose parts. Verify that the power cord is properly routed out of the cabinet. Remove all packing materials from the hopper. Locate the cloth bag of lock cams and mounting hardware.

Verify Specific Model Information (SMI) information before continuing with installation of the machine.

Warning: When moving the slant top machine, do not grip by the feature box. It can damage the machine or result in serious injury.

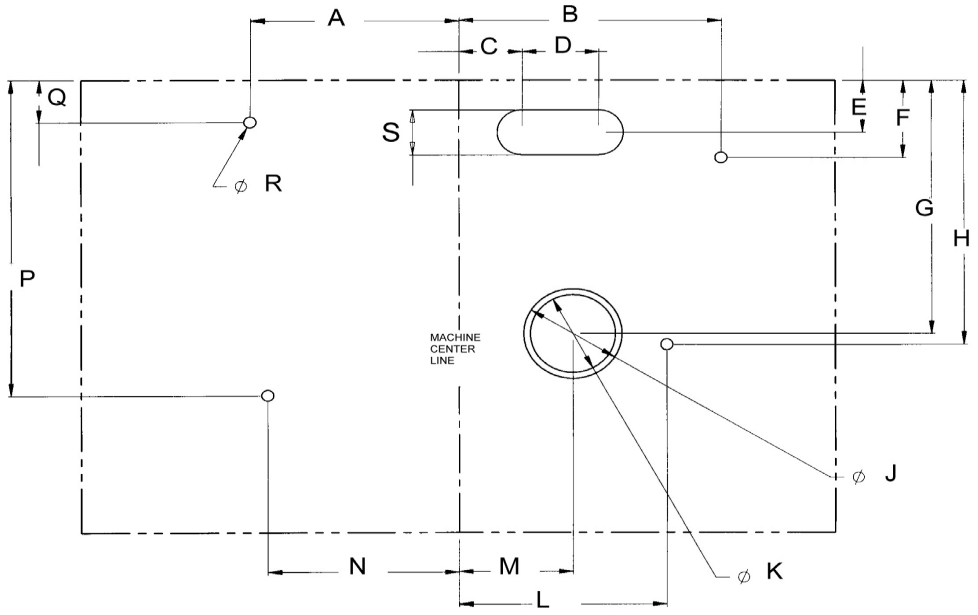

Footprint - ProSlot® 6000™

A		B		C		D		E		F	
Inch	CM	Inch	CM	Inch	CM	Inch	CM	Inch	CM	Inch	CM
7 15/32	19	9 13/32	23.90	2 9/32	5.79	2 3/4	6.99	2 1/16	5.26	3 1/16	7.80
G		**H**		**J**		**K**		**L**		**M**	
Inch	CM	Inch	CM	Inch	CM	Inch	CM	Inch	CM	Inch	CM
10 5/64	25.60	10 1/2	26.70	3 17/32	8.97	3 1/16	7.78	7 15/32	18.97	4 3/32	10.40
N		**P**		**Q**		**R**		**S**			
Inch	CM	Inch	CM	Inch	CM	Inch	CM	Inch	CM		
6 7/8	17.46	12 1/2	31.75	1 21/32	4.21	1 7/16	1.11	1 3/4	4.45		

©2004 Bally Gaming and Systems

Installing the Machine (cont.)

Securing the Machine

Remove the hopper. Mark the center of the stand.

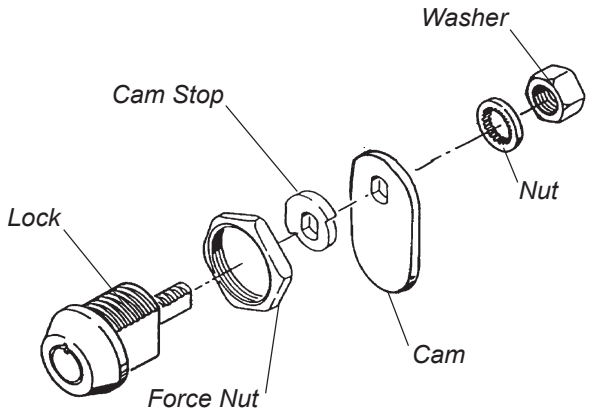

Typical Lock and Cam Assembly

Drill the required mounting, drop chute, and power cord holes. Using a lifting device, place the machine on the stand and route the power cord through the stand hole. Bolt the machine to the stand. Inspect for loose connectors and verify all printed circuit boards are firmly seated.

Install Locks

Door, stand, and other high-security locks should be ordered by the Operator from a reliable lock supplier. See Module 3 Assemblies, Parts and Hardware for lock specifications.

Remove the large and small nuts from the lock and insert the lock into the lock opening. Check the lock for proper orientation before securing. Secure the lock with the large nut. Place the cam stop on the lock cylinder. Attach the lock cam to the shEFT and verify that it moves in the correct direction. Secure the lock cam with the washer and small nut.

Setup

Plug the line cord into a grounded power source, but do not turn the machine on.

MPU Jumper Selections

Battery Enable

The Lithium battery may be disabled for shipping or storage. To enable the battery, locate jumper JW20 left of the battery and place the jumper across the two pins.

Warning: Attempting to charge Lithium batteries can cause them to explode. Replace failed batteries with Bally part E-00628-0023 or its equivalent.

Door Open Detect Circuit

Some jurisdictions require a signal for a door opening while the machine power is OFF. To enable the door open latch, place the jumper at JW15 in position 1 and add a jumper at JW17. Default is OUT (OFF).

MPU Logic Detect Circuit

Some jurisdictions require a signal when the MPU board assembly is disconnected while the power is OFF. To enable the MPU detach latch, place JW15 in position 1 and add a jumper at JW21. Default is OUT (OFF).

The following table lists 2-pin and 3-pin jumper selections:

Position 1



Position 2

Jumper	Shipping Position	Purpose	Pos. 1	Pos. 2
JW1	Out (Off)	External Antenna	In	Out
JW2	2 Meg	Eprom Size	2 Meg	4 Meg
JW3	32K	Personality Eprom Size	32K	64K
JW4	VBB	RAM Power Select	+5	VBB
JW5	RS232	RX Port 3B	RS422	RS232
JW6	Out (Off)	DSR Input 3A	In	Out
JW7	Out (Off)	DTR Output 3A	In	Out
JW8	RS232	Link RX	RS232	RS422
JW9	Enable	Link RS422 Enable	Disable	Enable
JW11	Out (Off)	MPU Detect Feature	In	Out
JW12	In (On)	SafeRAM™ Key	In	Out
JW13	Isol TX	Bill Acceptor TX	ISOL	RS232
JW14	Isol RX	Bill Acceptor RX	ISOL	RS232
JW15	Out (Off)	VBB Door Open Latch	In	Out
JW16	ADC	Smart Socket Enable	ADC	+5
JW17	Out (Off)	Door Open w/Power Off Input	In	Out
JW18	Out (Off)	Alarm	In	Out
JW19	In (On)	MPU Board Antenna	In	Out
JW20	Out (Off)	Battery	In	Out
JW21	Out (Off)	MPU Backplane Detach Detect	In	Out

©2004 Bally Gaming and Systems

Setup (cont.)

DIP Switch Selections

Three eight-switch DIP packages labeled on the MPU board as DS1, DS2, and DS3 set the following machine functions:

Note: If MC=16 denomination must equal 1.00.

| DS1 - Switch Functions

Switch	Game Function
SW1	**Message Center**
ON	Four-digit message center CREDIT and WIN PAID
OFF	Five-digit message center CREDIT and WIN PAID
SW2	**Reserved, Leave ON**
SW3	**Bonusing**
ON	No bonusing
OFF	Bonusing enabled
SW7	**Reserved, Leave ON**
SW8	**SafeRAM™ Clear**
Change of State (OFF/ON)	SafeRAM™ Clear procedure enable (International Jurisdictions)

DS1 - Secondary Device Protocol

DIP Switch DS1 (SW1, SW2 and SW5 Secondary Device Protocol)			
System	**SW4**	**SW5**	**SW6**
Anchor 1.6	OFF	ON	ON
Bally Secondary Game (BSG)	OFF	ON	OFF
Secondary Device (SED)[1]	ON	OFF	ON
[1]Requires wheel control chip.			

| DS2 - Denomination

Market Code	Table Number
1 - 17	1
18	2
19	3
20	2
21	4
22	1
23	5

Market Code	Table Number
24	1
25	1
26	6
27	6
28	1
29	1
30	1

DIP Switch DS2 SW1 — SW4 Denomination					
Table 1: Market Codes 0 — 17, 22*, 24, 25, 28, 29, 30					
SW1	**SW2**	**SW3**	**SW4**	**Value**	**Denomination**
OFF	ON	ON	ON	0001	250
ON	OFF	ON	ON	0002	100
OFF	OFF	ON	ON	0003	50
ON	ON	OFF	ON	0004	25
OFF	ON	OFF	ON	0005	20
ON	OFF	OFF	ON	0006	10
OFF	OFF	OFF	ON	0007	5
ON	ON	ON	OFF	0008	2
OFF	ON	ON	OFF	0009	1
ON	OFF	ON	OFF	0010	0.50
OFF	OFF	ON	OFF	0011	0.25
ON	ON	OFF	OFF	0012	0.20
OFF	ON	OFF	OFF	0013	0.10
ON	OFF	OFF	OFF	0014	0.05
OFF	OFF	OFF	OFF	0015	0.01
ON	ON	ON	ON	0016	4 (MC=07)
*MC 22 does not support denomination less than 2.00					

Table 2: Market Code 18, 20					
SW1	**SW2**	**SW3**	**SW4**	**Value**	**Denomination**
ON	ON	ON	ON	0000	5000
ON	OFF	ON	ON	0002	1000
OFF	OFF	ON	ON	0003	500
OFF	ON	OFF	ON	0005	200
Table 3: Market Code 19					
SW1	**SW2**	**SW3**	**SW4**	**Value**	**Denomination**
ON	ON	ON	ON	0000	1000
OFF	ON	ON	ON	0001	500
ON	OFF	ON	ON	0002	250
ON	ON	OFF	ON	0004	50
OFF	ON	OFF	ON	0005	25
Table 4: Market Code 21					
SW1	**SW2**	**SW3**	**SW4**	**Value**	**Denomination**
ON	ON	ON	ON	0000	1000
OFF	ON	ON	ON	0001	500
ON	OFF	ON	ON	0002	250
OFF	OFF	ON	ON	0003	200
ON	ON	OFF	ON	0004	100
Table 5: Market Code 23					
SW1	**SW2**	**SW3**	**SW4**	**Value**	**Denomination**
ON	ON	ON	ON	0000	500
ON	OFF	ON	ON	0002	100
OFF	OFF	ON	ON	0003	50
ON	ON	OFF	ON	0004	25
ON	OFF	OFF	ON	0006	10
OFF	OFF	OFF	ON	0007	5
ON	ON	ON	OFF	0008	1
OFF	ON	ON	OFF	0009	0.50
ON	OFF	ON	OFF	0010	0.25
OFF	OFF	ON	OFF	0011	0.20
ON	ON	OFF	OFF	0012	0.10
OFF	ON	OFF	OFF	0013	0.05
ON	OFF	OFF	OFF	0014	0.02
OFF	OFF	OFF	OFF	0015	0.01
Table 6: Market Code 26					
SW1	**SW2**	**SW3**	**SW4**	**Value**	**Denomination**
ON	OFF	OFF	ON	0006	5
OFF	OFF	OFF	ON	0007	2
ON	ON	ON	OFF	0008	1
OFF	ON	ON	OFF	0009	0.50
ON	OFF	ON	OFF	0010	0.25
OFF	OFF	ON	OFF	0011	0.20
ON	ON	OFF	OFF	0012	0.10
OFF	ON	OFF	OFF	0013	0.05
ON	OFF	OFF	OFF	0014	0.02
MC26 Supports Denominations greater than 5. See MC 0.					

DS2 Switches 5-6 Bill Acceptor

DIP Switch DS2 SW5 — SW6 (Bill Acceptor)			
SW5	**SW6**	**Value**	**Bill Acceptor**
ON	ON	00	No Bill Acceptor
OFF	ON	01	GPT / Ardac
ON	OFF	02	JCM WBA
OFF	OFF	03	Mars

Note: GPT™ and ARDAC™ bill acceptors must use MPU assembly AS-03356-0451. This assembly consists of MPU assembly AS-03356-0424 and MPU parts kit K-00820-0005.

Setup (cont.)

DIP Switch Selections (cont.)

DS2 Switches 7-8 Special Features

The ProSlot® 6000 supports crazy reel spin where the reels randomly spin forward or reverse. Also, some markets require an optic switch to verify coin diverter position. Market Code 01 (New Jersey) requires an additional protocol selection for Advanced Funds Transfer (AFT).

DIP Switch DS2 SW7 — SW8 (Special Features)	
SW7	**Game Feature**
On	Normal Reel Spin
Off	Crazy (Random Direction) Reel Spin
SW8	**Diverter Optic Support**
On	Not Present
Off	Present
SW8 and MC=1 or 13	**EFT Support**
On	Not Present
Off	Present

DS3 Switches 1-4, 7-8 Market Code

Market	Code
Nevada or VLC	00
New Jersey	01
Deadwood SD or QE	02
France Nominal %	03
France Basic %	04
Puerto Rico	05
South Africa	06
4.00 Denomination	07
Indiana	08
Colorado	10
USAF	11
OLGC	12
Mississippi	13
Germany	14
New Mexico	15

Market	Code
United Kingdom	16
Portugal	17
Italy	18
Greece	19
Russia	20
Chile	21
Venezuela	22
Estonia	23
Philippines	24
Finland	25
Ireland	26
Euro	27
Switzerland	28
Manitoba	29
Hong Kong/Macau	30
Reserved	31-63

Market Code designates specific operation according to the requirements of a gaming control agency.

DIP Switch DS3 (SW1—SW4 and SW7—SW8 Market Code)						
Code	**SW1**	**SW2**	**SW3**	**SW4**	**SW7**	**SW8**
00	ON	ON	ON	ON	ON	ON
01	OFF	ON	ON	ON	ON	ON
02	ON	OFF	ON	ON	ON	ON
03	OFF	OFF	ON	ON	ON	ON
04	ON	ON	OFF	ON	ON	ON
05	OFF	ON	OFF	ON	ON	ON
06	ON	OFF	OFF	ON	ON	ON
07	OFF	OFF	OFF	ON	ON	ON
08	ON	ON	ON	OFF	ON	ON
10	ON	OFF	ON	OFF	ON	ON
11	OFF	OFF	ON	OFF	ON	ON
12	ON	ON	OFF	OFF	ON	ON
13	OFF	OFF	ON	OFF	ON	ON
14	ON	OFF	OFF	OFF	ON	ON
15	OFF	OFF	OFF	OFF	ON	ON
16	ON	ON	ON	ON	OFF	ON

DS3 Switches 1-4, 7-8 Market Code (Cont.)

DIP Switch DS3 (SW1—SW4 and SW7—SW8 Market Code)						
Code	**SW1**	**SW2**	**SW3**	**SW4**	**SW7**	**SW8**
17	OFF	ON	ON	ON	OFF	ON
18	ON	OFF	ON	ON	OFF	ON
19	OFF	OFF	ON	ON	OFF	ON
20	ON	ON	OFF	ON	OFF	ON
21	OFF	ON	OFF	ON	OFF	ON
22	ON	OFF	OFF	ON	OFF	ON
23	OFF	OFF	OFF	ON	OFF	ON
24	ON	ON	ON	OFF	OFF	ON
25	OFF	ON	ON	OFF	OFF	ON
26	ON	OFF	ON	OFF	OFF	ON
27	OFF	OFF	ON	OFF	OFF	ON
28	ON	ON	OFF	OFF	OFF	ON
29	OFF	ON	OFF	OFF	OFF	ON
30	ON	OFF	OFF	OFF	OFF	ON

DS3 Switches 5-6

DS3 Sw5 - Hardware Exception Lock	
Off	Release to 99 Code
On	Lock to 88 Code (requires SafeRAM™ Clear)

DS3 Sw6 - Tokenization	
On	Tokenization unavailable
Off	Tokenization available through Machine Option 22*

*Option 22 is disabled in MC=30 if the coin denomination is more than 100.

SafeRAM™ Clear

A SafeRAM™ Clear erases information stored within battery-backed random access memory (RAM). A Complete SafeRAM™ Clear is essential before the first use, when EPROMs are changed, or if game memory becomes corrupted.

Note: Jumper and DIP switches are enabled only once after each Complete SafeRAM™ Clear.

There are three levels of SafeRAM™ Clear:

- Complete — Erases and reformats SafeRAM™. Game options are restored to factory default. All counters (soft meters) reset to zero.
- Full — Resets all counters to zero except the SafeRAM™ Clear counters. Game options are restored to factory default.
- Partial — Zeros all counters except SafeRAM™ Clear. All game configurations defined by DIP switches, jumper selections and game options are preserved.

For a Complete, Full, or Partial SafeRAM™ Clear, turn the machine power OFF. Unlock and remove the MPU assembly. If SafeRAM™ Clear EPROMs are required, remove the Main EPROMs from U28 and U43 and

| - Revised, || - New
©2004 Bally Gaming and Systems

Setup (cont.)

SafeRAM™ Clear (cont.)

replace them with the corresponding clear chips. If EPROMs are not required, turn DIP DS1 sw8 ON. After ensuring that the MPU assembly is firmly seated

NOTE: A SafeRAM™ Clear for MC=28 requires a SafeRAM™ Clear EPROM, and DS1 sw8 to be enabled (ON).

into the backplane board, turn the machine power ON while depressing the appropriate buttons.

Complete - Press and hold the PSEUDO COIN and TEST

NOTE: The TEST and PSEUDO coin buttons can be located by referring to the pictures on pages 2-5 and 2-6.

buttons, then switch power ON. When the message **CH C** displays in WIN PAID, release the PSEUDO COIN and TEST buttons. The **CH C** message is followed by **CL C**.

Full - Press and hold the PSEUDO COIN button, then switch power ON. When the message **CH F** appears in WIN PAID, release the PSEUDO COIN button. The **CH F** message is followed by **CL F**.

Partial - Switch power ON. The message **CH P** displays in WIN PAID. The **CH P** message is followed by **CL P**.

If an error was detected during SafeRAM™ Clear as designated by **E C**, **E F**, **E P** in WIN PAID, repeat the operation.

Upon a successful SafeRAM™ Clear, the button and tower lamps flash. Switch power OFF and replace the SafeRAM™ Clear EPROMs with the Mains, or turn DS1 sw8 OFF. Replace the MPU assembly and switch machine power ON. The machine will enter a Reel Calibration Procedure whereby the home position is recorded in SafeRAM™. For tilt-free operation, it is important that

NOTE: If door open or MPU logic detection circuits are enabled, an audit key switch activation is required to remove the 82/85 code after power is switched ON.

the procedure completes without interruption.

Demo Mode

With Main versions developed to operate with a host terminal, the ProSlot® 6000 enters a nonrevenue state after a Complete SafeRAM™ Clear. **FrEE** appears in WIN PAID to indicate Demo Mode. Entering a value in Option 79, Host Terminal ID, will enable the machine for revenue operation.

Real Time Clock (RTC)

If U53 is populated with a Dallas Timekeeper IC, an opportunity to change the settings occurs after a Complete SafeRAM™ Clear. Set the date using the SPIN button to increment the number in the flashing field (mm/dd/yy/day-of-the-week; 0=Sunday) and the BET MAX button to move to the next field. Set the time (hh/mm/ss) using the same method as the date. Press CHANGE to confirm changes and exit.

Switch Functions

The buttons on the player panel and on the MPU assembly have multiple uses. Note that the slant top model has additional TEST and PSEUDO COIN buttons on a bracket above the reels for easier access.

Switch	Location	Function
Change	Main Door	•Activate change lamp •Restart or activate some tests •Exit time and date settings after SafeRAM™ Clear
Cash/Credit Print Ticket	Main Door	•Cash out credits
Bet One	Main Door	•Wagers 1 credit •Select Previous Option
Spin	Main Door	•Spin reels •Pause test display •Pause meter display •Change options
Bet Max	Main Door	•Wagers maximum credits •Select next option, meter, or game
Audit Key Switch (Upright)	Right Side of Machine	•Displays bookkeeping meters •Releases jackpot lockup •Triggers some output tests
Audit Key Switch (Slant)	Front Panel, Above Door	•Displays bookkeeping meters •Releases jackpot lockup •Triggers some output tests
Second Key Switch	Near Audit Key Switch	•Selects between revenue or tournament game •Same as test (MC=12) •Adds or removes credits (International)
Test	MPU Assembly	•Selects tests or function •Activates next test or function •Selects level of SafeRAM™ Clear
Coin Acceptor	MPU Assembly	•Enable or disable coin acceptor and bill acceptor
Pseudo Coin	MPU Assembly	•Simulates coin in while main door is open •Selects next option •Selects a level of SafeRAM™ Clear
Reset	MPU Assembly	•Releases a machine tilt •Exits test and diagnostics
Volume	ProSound Board	•Adjusts the level of sound

©2004 Bally Gaming and Systems

Machine Options

Machine options are set through Diagnostic Function #11, Game Optioning. Options cannot be changed during a game or when credits are available. Attempting to change options with credits will display **Err** in WIN PAID.

With the door open, press the TEST button until the Message Center displays **11 d** indicating Diagnostic Function #11 selected. The Message Center responds as follows:

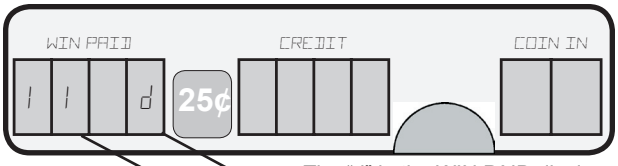

The 11 in the WIN PAID display represents Diagnostic Function #11

The "d" in the WIN PAID display indicates a diagnostic function is accessed

The machine then cycles to the first option (see note), Option 27, and displays the current setting as follows:

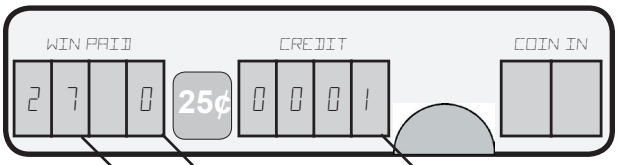

The 27 in WIN PAID indicates Option 27 Bet Mode (refer to the Option table)

The "O" in WIN PAID indicates an option is accessed

The 0001 in CREDIT shows the machine is optioned for credit as the wager mode

Use the SPIN button to increment or the CHANGE button to decrement the numerical settings. Press and hold the buttons to rapidly advance to the setting.

To advance to the next option, use the PSEUDO COIN or BET MAX button. To review the previous option, use the BET ONE button.

Exit and save the options at any time by pressing the RESET button, TEST button, or by closing the door.

Note: If Market Code = 12, the MPU TEST button is inactive. A second key switch provides TEST functions.

#	Option	Setting	Description
27	Bet Mode	(0001)	Credit game
		0003	Coin to credit (Default if MC=16)
26	Rebet-Autospin	0000	No rebet, no autospin
		(0001)	No rebet, autospin at max wager
		0002	No rebet, autospin at max coins or wager
		0003	Rebet, no autospin
		0004	Rebet, autospin at max credits
		0005	Rebet, autospin at max coins or credits
09	Jackpot Bell	0000	No bell
		0001	Bell rings on all wins
		0002	Rings on wins of 20 or more
		0003	Rings on wins of 50 or more
		0004	Rings on wins of 100 or more
		0005	Rings on wins of 200 or more
		(0006)	Rings on wins causing lockup
10	Coin Denomination (Read-Only; Coin Denomination is set by DS2 Sw 1, 2, 3, and 4.)	0000	500
		0001	250
		0002	100
		0003	50
		0004	25
		0005	20
		0006	10
		0007	5
		0008	2
		0009	1
		0010	0.5
		0011	0.25
		0012	0.2
		0013	0.1
		0014	0.05
		0015	0.01
		0016	4
		0017	2.5
11	Change Coin/Credit	0000	Coins from hopper
		(0001)	Credits to CREDIT meter
02	Progressive Type	(0000)	Off — lockup JPS for awarding prizes
		0001	SPL — Serial Progressive Link
		0002	PPL — Parallel Progressive Link
		0003	MAPS® — Multi Area Progressive System
		0004	S/MPI — Serial/Multiplex Progressive Interface
		0005	MPI — Multiplex Progressive Interface
		0006	SAS® — Progressive V3.XX
		0007	OTT — Over the Top
		0008	SAS® — Progressive V4.XX
07	Number of External Game Jackpots	(0000)	None
		0001	One
		0002	Two
		0003	Three
		0004	Four
18	Jackpot 4 Signal	(0000)	Combination of 2 & 3
		0001	Combination of 1 & 2
		0002	Combination of 1 & 3
		0003	Combination of 1, 2, & 3
		0004	Discrete Serial (Mikohn®)
80	Test 2 & 10 Enable	(0000)	Off
		0001	Test 2 output to electromechanical meters, or Test 10, External Jackpot Signal.
01	Tournament Minutes	(0000)	Off
		0001-0099	Minutes for tournament
47	Attract Feature	0000	Off
		(0001)	On
38	Reel Stop Sound	(0000)	Sound from speaker
		0001	Handle solenoid click
48	Tower Configuration	(0000)	This Option has specialized settings. See page 2-18.
		0001-0007	
50Hi	Machine ID	(0000)	Upper four digits of 8-digit identification number.
		0000-9999	
50Lo	Machine ID	(0000)	Lower four digits of 8-digit identification number.
		0000-9999	
54	Coin Hopper Pay Amount	(0000)	Amount paid from hopper upon a lockup under the settings of 56 Credit Lockup and 51 Credit Limit.
		0000-9999	
56	Credit Collect Lockup	(0800)	Number of credits for a lockup upon any collect. Cannot be greater than Option 67, Maximum Voucher Pay. If MC=16, default is 4999.
		0000-9999	
62	Tournament Kitty	(0000)	Starting amount of credits for tournament operation.
		0000-9999	
63	Reset Prog. Amt. ((MC=3 or MC=4))	(0000)	Credits added to counter upon progressive jackpot reset.
		0000-9999	
78Lo	Machine Number	(0000)	S/MPI indentification number (Must match progressive controller).
		0000-0032	

| - Revised, || - New

©2004 Bally Gaming and Systems

Machine Options (cont.)

#	Option	Setting	Description
78Hi	SAS® ID	(0000) 0001-9997 9998 9999	None SAS® 3.X, 4.X and 5.X / GRIPS Coin Free (MC=6) Non-Cashable Credits
04	Even Hand-pay - Collect Lockup	(0000) 0001 0002 0003 0004	Off Even Handpay by 10's Even Handpay by 100's Even Handpay by 1000's Machine Pays to Next 1.00
51	Credit Top Limit	(0800) 0000-9999	Maximum number of credits allowed on CREDIT meter. Follows Option 56 by default. If MC=16, default is 4999.
03	Tournament Seconds	(0000) 0001-0059	Seconds for Tournament
22*	Tokenization (All Markets Except 16 and 30 - See Below)	(0000) 0001	Off 1.0 Token
	Second Coin Denomination (MC=16)	(0001) 0002 0003 0004 0005	1.0 Wager Coin (1:1) 0.50 Wager Coin (1:2) 0.20 Wager Coin (1:5) 0.10 Wager Coin (1:10) 0.05 Wager Coin (1:20)
	Tokenization (MC = 30)	0001 0002 0003 0004	$2 Token $5 Token $10 Token $100 Token
70 71 72	MAPS® Progressive Cabinet ID	0000	The ID can be represented as XXXXYYYYZZZZ where Option 70=XXXX, Option 71=YYYY and Option 72=ZZZZ.
58	Win Lockup	(0800) 0000-9999	Amount of win for a lockup. follows Option 56 by default. Must be greater than Option 57 SAS® Lockup if SAS® enabled. If MC=16, default is 4999.
06	Progressive Group ID	(0000) 0000-0255	SAS® Progressive V4.XX Group ID
57	SAS® Lockup (MC=6)	0800 (0000)-9999	A win that is less than the setting of Option 58, Win Lockup, and greater than the setting of Option 57, SAS® Lockup, causes a win lockup that is released by the Host Accounting System. Option 90, Host Remote Jackpot Release, must be set to enable this option.
12	Win Lockup Credit Release	(0000) 0001-9999	Off Win lockup credits lower than the setting of Option 12 which are added to CREDIT meter by actuation of a second key switch.
90	Host Remote Jackpot Release	(0000) 0001	Off Lockups may be released by Host.
91	Host Queue	(0000) 0001	No Queue Multiple lockups queued for processing.
95	Voucher Denomination Mismatch	(0000) 0001	Redeemable vouchers must be evenly divisible by the machine's denomination to be accepted by the machine. Machine accepts all vouchers and prints a change voucher for odd amount.
73	Voucher Validation Level	0000 0001 0002 (0003)	Standard Host Enhanced Validation Host Secure Enhanced Validation Host System Validation
76	Voucher Receipt Enable	(0000) 0001	Printer dispensed only redeemable vouchers. Printer dispenses redeemable vouchers and informational receipts.
61	Machine Directed Payment Configuration	(0001) 0002 0003	Hopper Only Printer Only Printer and Hopper
81	Coin Acceptor Enable	0000 (0001)	No Coin Acceptor Coin Acceptor Enabled
74	Voucher Expiration	0000 (0001)-0255	No Expiration Days Before Voucher Expires
	(MC=00)	0000 (0030)-0255	No Expiration Days Before Voucher Expires
64	Minimum Voucher Pay	8000 (0000)-9999	Minimum credits paid by voucher.
67	Maximum Voucher Pay	(8000) 0000-9999	Maximum credits paid by voucher.
14	Even Voucher Pay	(0000) 0001 0002 0003 0004 0005 0006 0007 0008 0009 0010	Off Even Voucher Pay by 1.00 Even Voucher Pay by 2.00 Even Voucher Pay by 5.00 Even Voucher Pay by 10.00 Even Voucher Pay by 20.00 Even Voucher Pay by 50.00 Even Voucher Pay by 100.00 Even Voucher Pay by 200.00 Even Voucher Pay by 500.00 Even Voucher Pay by 1000.00
77A 77B 77C	Site Location Label	(0100) 00-FF	Allows the operator to enter three (3) lines of address to be printed on vouchers.
08	Credit Snap	(0000) 0001	Wins added incrementally to CREDIT meter. Wins over 20 added as a sum to CREDIT meter.
05	Even Handpay-Win Lockup	(0000) 0001 0002 0003 0004	Off Even Handpay by 10's Even Handpay by 100's Even Handpay by 1000's Machine Pays to Next 1.00
20	Extra Coin	(0000) 0001	Extra coins returned to the player. Extra coins applied to wager for next game.
68	Game Sounds	0000 (0001)	Internal Device External Sound Board (ProSound I or II)
23	GRIPS® Host	(0000) 0001	No GRIPS® Host, or MC=28 without AFT GRIPS Host (Also 78Hi>0000)
92	SAS® Bonusing	(0000) 0001 0002 0003	Disabled SAS® 5.01 Bonusing Only AFT Bonusing Only Both SAS® 5.01 and AFT Bonusing
98	Primary Host	(0000) 0001 0002	Host Disabled SAS® Host (Also 78Hi>0000) SDS® Host
99	Secondary Host	(0000) 0001 0002	Host Disabled SAS® Host (Also 78Hi>0000) SDS® Host
69	Coin Acceptor	(0000) 0001	Coin Mechanisms, Inc. CC-16 IDX X-20 (Default if MC=16)
19Hi	Asset Number	(0000)-9999	Allows the operator to enter the upper four digits of the Asset Number.
19Lo	Asset Number	(0000)-9999	Allows the operator to enter the lower four digits of the Asset Number.
17	Set SAS® Version	(0000) 0001	SAS® 5.01 SAS® 6.01
93	Bank Meter Transfer (MC=16)	(0000) 0001	No transfer to bank meter. Transfers 2£ from bank to credit each time the TRANSFER button is pressed.
75	Coins to Dispense (MC=16)	(0125) 0000-9999	Number of coins to dispense for diagnostic (Float Level).
29	AFT Registration	0000 0001 0002	Exit Initiate AFT registration cycle Cancel AFT registration
79	VLC Identification	0000-(4000)	The ID can be represented by numbers 0000-4000, with 4000 being default. VLC Jurisdictions only.

* Option 22, Tokenization, is only displayed if DS 3, Switch 6 is in the OFF position.

| - Revised, || - New

Machine Options (cont.)

Option Descriptions

01 Tournament Minutes

With additional hardware and specific software, the ProSlot® 6000 supports a variety of tournament operations. See Module 12, Tournament Operation for more information.

02 Progressive Type

Progressive operation is controlled by the interaction of Option 02, Progressive Type; Option 07, Number of Jackpots; Option 78Lo, Machine Number; and Option 18, Jackpot 4 Operation. Option 02 defines the protocol.

OFF (0000) no progressive jackpot.

Serial Progressive Link (0001) supports a bidirectional RS-232 serial link.

Parallel Progressive Interface Link (0002) supports discrete jackpot and total in signals through opto-isolators.

Multi-Area Progressive System (0003) supports a bidirectional RS-232 serial link for Bally Thrillions™. Once set, changing the option requires a SafeRAM™ Clear.

Serial Multiplexed Progressive Interface (0004) supports multiplexed jackpot and total in signals. The machine receives jackpot values through the RS-485 connection J14. Used for Game generated and Mystery Jackpots.

Multiplexed Progressive Interface (0005) is the same as setting 0004 without the connection at J14 for RS-485 return.

SAS® 3.x Host Progressive (0006) supports IGT's SAS® 3.x Host Progressive system.

Over the Top (0007) supports the OTT Bonusing feature.

SAS® 4.x Host Progressive (0008) supports IGT's SAS® 4.x Host Progressive system.

03 Tournament Seconds

The number of seconds for a tournament. Added to minutes set by Option 01. See Module 12, Tournament Operation.

04 Even Hand Pay—Collect Lockup

When enabled, Even Hand Pay allows a partial payment upon a Collect Lockup from a coin hopper to an even amount. The partial payment can be configured to even thousands, hundreds, or tens. Alternatively, it can pay to the next 1.00.

For example, a Collect Lockup of 12,924 with Option 54, Coin Hopper Pay Amount, set to 500 will result in the following:

Collect Lockup of 12,924 Coins			
Setting		Hopper Pay	Attendant Pay
0000	Off	500	12424
0001	Even 10's	504	12420
0002	Even 100's	524	12400
0003	Even 1000's	924	12000
0004	Next 1.00	Operation depends upon coin demonination setting of DS2.	

05 Even Hand Pay—Win Lockup

When enabled, Even Hand Pay allows a partial payment from the coin hopper upon a Win Lockup to an even amount. The partial payment can be configured to even thousands, hundreds, or tens. Alternatively, it can pay to the next 1.00 (see example for Option 04).

06 Progressive Group ID

Machine ID to support the SAS® v6.xx Host Progressive system.

| 07 Number of External Game Jackpots

The available jackpots are determined by the SMI. Option 07 specifies the number of jackpots available for a progressive.

08 Credit Snap

Wins can accumulate incrementally in the credit meter, or wins over 20 can quickly appear in the credit meter as one sum.

09 Jackpot Bell

Option 09 configures the operation of any available bell hardware.

10 Coin Denomination

Denomination is set once after a SafeRAM™ Clear by the switch positions of DS2 on the MPU board. The current selection is shown through Diagnostic Function #1, Model Information, or by Function #11, Option 10.

11 Change Coin/Credit

Bill acceptor operation can be configured independently from the settings of Option 27, Bet Mode. The setting 0000 dispenses coins from the hopper for all accepted bills.

©2004 Bally Gaming and Systems

Machine Options (cont.)

12 Win Lockup Credit Release

If supported, an Attendant may release a machine from a win lockup less than or equal to the Win Lockup Credit Release value and transfer the jackpot credits to the credit meter instead of canceling the credits and paying the Player in cash.

14 Even Voucher Pay

The machine can be configured to print redeemable vouchers in even values from 1.00 to 1,000.00.

17 Set SAS® Version

The machine can be set for SAS® Version 5.01 or 6.01.

18 Jackpot 4 Signal

The ProSlot® 6000 has only three discrete jackpot signals. If four jackpots are supported by the SMI, the settings of Option 18 determine how the fourth jackpot is represented.

The setting 0000 causes JP2 and JP3 to activate upon the fourth level jackpot. By the combination of JP2 and JP3 signals active simultaneously, JP4 can be inferred.

- 0001 is the same as setting 0000 using JP1 and JP2
- 0002 uses JP1 and JP3
- 0003 uses JP1, JP2, and JP3
- 0004 communicates the jackpot serially

19Hi / 19Lo Asset Number

An eight digit asset number is configurable. The first set of four numbers is entered into 19Hi, the second set of four numbers is entered into 19Lo.

20 Extra Coin

If coins accepted by the machine register in BET (see Option 27, Bet Mode), the machine may accept coins beyond the maximum wager for a game. These additional coins may be applied to the next game, or returned to the Player.

22 Tokenization (All markets except 16)

With some versions of Mains, setting Option 27, Bet Mode, to 0003 (Coin to Credit) and Option 22 to 0001 sets the coin value at 1.00. The denomination of the machine as set by DS2 represents the value of each credit. For example, if DS2 is 0011 (.25), then each coin adds four credits. If DS2 is 0014 (.05), then each coin would add 20 credits.

Upon cashout, the credits decrease the number of credits appropriately for each coin paid. If there are fewer credits than the value of the coin, it is possible to have uncollectible credits remaining after a cashout.

Denom	Credits Per Key Switch Turn	Denom	Credits Per Key Switch Turn
.01	1000	10	70
.05	750	20	60
.10	500	25	50
.20	400	50	40
.25	300	100	30
1	100	250	20
2	90	500	10
5	80		

Key-On Credits (Knock-Off) (MC=52 only)

If the optional hardware K-00694-0601 is installed, actuation of a key switch will remove all credits. Actuating the key switch while pressing CHANGE/SERVICE will add credits according to the machine's denomination as set by DS2.

Note: If MC=16, Option 22 defaults to setting 0001.

22 Second Coin Denomination (MC=16 ONLY)

If the machine's market code is 16, United Kingdom, the ratio of credits per coin is set by Option #22 rather than the switch positions of DIP DS2.

23 GRIPS® Host

The default setting is 0000, No GRIPS® Host. Enabling a GRIPS® Host requires this option and Option 78Hi to be set to 0001 or greater. If MC=28 and GRIPS® Host and without AFT, Option 23 must be set to 0000 and Option 78Hi to be set to 0001 or greater.

26 Rebet-Autospin

Rebet allows the Player to repeat the previous wager by pressing SPIN.

Autospin completes the game without waiting for the SPIN button to be pressed.

Note: A SafeRAM™ Clear is required to change Tokenization settings.

©2004 Bally Gaming and Systems

Machine Options (cont.)

27 Bet Mode

The ProSlot® 6000™ provides two methods of accepting wagers:

- Credit
- Coin to credit

Credit (0001), where coins accepted appear in the credit in (bet) meter. Bill acceptor items, EFT transfers, and wins, appear in the credit meter.

Coin to credit (0003), where coins accepted, bill acceptor items, EFT transfers, and wins appear in the credit meter.

| *Note: 0003 is the only setting available if Market Code = 16 or 30, or Option 22, Tokenization, is set to 0001.*

38 Reel Stop Sound

Each SMI includes digital audio accompaniment to many game functions. Option 38 allows selection of a *mechanical* sound for reel stops. The setting 0001 activates the handle release solenoid for each reel stop instead of a speaker sound.

47 Attract Feature

After a period of inactivity with no credits, feature lights will sequence. Option 47 turns the feature ON or OFF.

48 Tower Configuration

The ProSlot® 6000 can support two-, three-, and four-tier towers. Except in markets where the tower operation is not selectable, the Operator can configure tower operation according to the Tower Light Option table following.

Tower Lights Setting	Function	Tower Display
2-Light (0000)	Service Jackpot Tilts Door(s) Hopper Pay	Top Flashing Top Steady Bottom Flashing Bottom Steady Not Applicable
3-Light 0001	Service Jackpot Tilts Door(s) Hopper Pay	Bottom Flashing Top Flashing Middle Steady Middle Flashing Not Applicable
4-Light 0002	Service Jackpot Tilts Door(s) Hopper Pay	Middle Flashing Top Steady Middle Flashing Bottom Steady Not Applicable
2-Light 0003	Service Jackpot Tilts Door(s) Hopper Pay	Top Flashing Top Steady Bottom Flashing Bottom Steady Top Steady

48 Tower Configuration (Cont.)

Tower Lights Setting	Function	Tower Display
3-Light 0004	Service Jackpot Tilts Door(s) Hopper Pay	Bottom Flashing Top Flashing Middle Flashing Bottom Steady Not Applicable
3-Light 0005	Service Jackpot Tilts Door(s) Hopper Pay	Bottom Flashing Top Flashing Middle Steady Middle Flashing Not Applicable
2-Light 0006	Service Jackpot Tilts Door(s) Hopper Pay Host Disabled	Top Steady Top Flashing Top Flashing Bottom Flash (or Fast Flash if Drop)* Not Applicable Top and Bottom Steady
2-Light 0007	Service Jackpot Tilts Door(s) Hopper Pay Host Disabled Administration	Top Steady Tom and Bottom Slow Flash Top Slow Flash Bottom Flash (or Fast Flash if Drop) Not Applicable Top and Bottom Steady Top Fast Flash
*Light Remains Illuminated until the Start of the Next Game.		

NOTE: Tower configuration is not selectable if the factory option Data Vault™ is installed. In addition, the CHANGE/SERVICE light will flash at five second intervals to indicate an error condition.

50Hi, 50Lo Game ID

Eight-digit Operator-accessible identification field.

51 Credit Top Limit

The Credit Top Limit is the most credits the machine will allow. A win less than Option 58, Win Lockup Limit that causes the limit to be exceeded will instead be paid directly to the Player.

54 Coin Hopper Pay Amount

NOTE: Option #54, Coin Hopper Pay Amount, must equal Option #56 for a partial payment from the hopper.

Maximum coins paid from the hopper upon a collect lockup. Remaining credits must be paid by an Attendant.

| - Revised, || - New
©2004 Bally Gaming and Systems

Machine Options (cont.)

56 Credit Collect Lockup

Value of credits if exceeded upon cashout that causes a win lockup. An Attendant must pay the difference of the remaining credits and Option 54, Coin Hopper Pay Amount.

NOTE: Options 51 and 58 automatically follow Option 56 settings.

NOTE: The value of Option 56, Credit Collect Lockup, cannot exceed the value of Option 67, Maximum Voucher Pay.

57 SAS® Lockup

If MC=6 and Option 78Hi SAS® ID is 9999 or 9998, Option 57 is available. Any win greater than or equal to Option 57 and less than Option 58, Win Lockup, will cause a lockup. The WIN PAID portion of the Message Center alternates “SP (amount)” and “PD 0.” Upon release of the lockup by the Attendant and a successful transfer of credits to the Player’s card, the Message Center show s“PD (amount)” in WIN PAID.

58 Win Lockup

The number of credits for a single winning combination when exceeded to cause a collect lockup.

61 Machine Directed Payment Configuration

The machine can be configured for operation with a printer and coin hopper, or with either individually.

62 Tournament Kitty

Starting credits for tournament. See Module 12, Tournament Operation.

63 Reset Progressive Amount

Value in credits to add to a counter each time an external top jackpot award is won. The option is available only in markets 3 and 4.

64 Minimum Voucher Pay

The minimum value of a voucher can be established.

66 PRD Sound Enable

The PRD Sound Enable option setting is for top boxes equipped with separate sound capabilities. It should have PRD Sound disabled as this option can cause incompatibility between machine and top box sound.

67 Maximum Voucher Pay

The maximum value of a coupon or voucher can be established. The maximum voucher pay must be greater than Option 56, Credit Collect Lockup. Software safeguards against conflicting values.

Example: In a 25¢ machine, the default for Option 67 is 8000, and the default for Option 56, Credit Collect Lockup, is 800. Option 67 can be set to any value between 800 and 9999. If Option 67 decrements, once 800 was reached, the next decrement would be 9999 instead of 799.

Alternately, if Option 67 increments, once 9999 was reached, the next increment would be 800 instead of 0.

If Option 67 should need to be set to a value less than 800 (500 for example), Option 56 would need to be changed to 500 first, followed by Option 67 being changed to 500.

Machines with printers use Option 67 as Credit Collect Lockup. Option 56 determines the maximum number of credits as coins that will be dispensed by a hopper, if one is installed; and the Minimum Voucher Pay, overriding the setting of Option #64, Minimum Voucher Pay.

68 Game Sounds

Machines without external ProSound™ I or ProSound™ II sound boards must enable Game Sounds to prevent incompatibility between internally and externally driven sounds.

69 Coin Acceptor

Option 69 selects Coin Acceptor Type. Set it to 0000 for Coin Mechanism, Inc. CC-16 or 0001 for IDX X-20. All jurisdictions except United Kingdom (MC=16) default to 0000. When MC=16, Option 69 is forced to setting 0001. The coin acceptor device driver interprets coin credit and coin error pulse trains differently based on Option 69.

70, 71, 72 MAPS Progressive Cabinet ID

Bally Multi Area Progressive System (MAPS) requires a unique ID. Options 70, 71, and 72 are 12-digit numbers set four digits at a time.

73 Voucher Validation Level

0000 Standard—The voucher sequence number

Machine Options (cont.)

increments. An eight-digit validation number is calculated from the date and time. The information is logged in the validation buffer and indexed by the sequence number. The host is neither contacted for validation, nor is it notified in advance of the coupon or voucher being printed.

0001 Host Enhanced—The voucher sequence number increments. A 16-digit validation number is calculated from the machine validation ID and the voucher sequence. The information is reported to the host, and logged in the validation buffer indexed by the sequence number. If communication with the host is lost, the machine will operate until the validation buffer is full. Restoration of communication with the host and subsequent reduction of records in the validation buffer restores machine operation.

0002 Host Secure Enhanced—Similar to setting 0001, Host Enhanced, except that communication must be maintained at all times. If communication is lost during a cashout, the machine will lock up requiring an Attendant pay before disabling with a no communication (91-0) tilt.

0003 Host System—The host is contacted for a voucher validation number. Upon receipt of the validation number, the machine prints the voucher, increments the voucher sequence number, and stores the information in the validation buffer indexed by the sequence number.

74 Voucher Expiration

The period of time when vouchers can be redeemed can be configured.

75 Coins to Dispense

Option 75 Coins to Dispense sets the number of coins to eject from the hopper during Diagnostic Test #15, Hopper Dump.

76 Voucher Receipt Enable

The printer can print informational receipts such as paid jackpots, as well as redeemable vouchers.

77 Site Location Label

A three-line address label can appear on each voucher. The information can be downloaded from a host, or entered manually through Option 77ABC.

Each line can have up to 24 characters. The characters are entered as a hexadecimal number of a printable ASCII character. The null

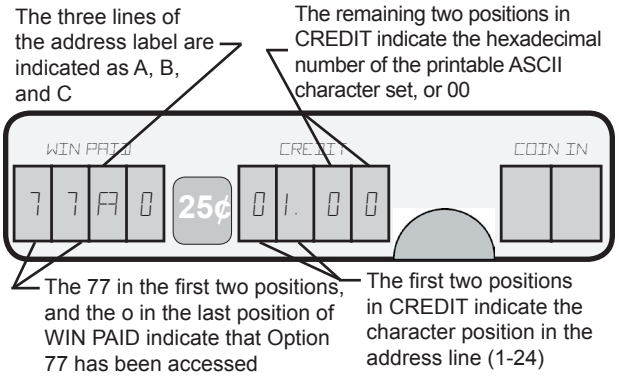

character (00h) truncates the line at the point of entry, regardless of subsequent characters. This means that the Operator can blank the entire line by entering 00 in the first position without changing any of the remaining 23 characters.

Within the option, pressing COLLECT confines navigation to within the address line (BET MAX scrolls forward, BET ONE scrolls backward, SPIN increments value, CHANGE/SERVICE decrements value. Press COLLECT again to advance to the next line of address or the next option.

78Hi SAS® ID

SAS® 3.x, 4.x, 5.x or 6.x requires a setting—usually 0001. GRIPS® implementation of SAS® requires a setting of 9999.

Hex	ASCII	Hex	ASCII	Hex	ASCII	Hex	ASCII
20	space	38	8	50	P	68	h
21	!exclamation	39	9	51	Q	69	i
22	"quote	3A	:colon	52	R	6A	j
23	#	3B	;semicolon	53	S	6B	k
24	$	3C	<	54	T	3C	l
25	%	3D	=	55	U	6D	m
26	&	3E	>	56	V	6E	n
27	'apostrophe	3F	?	57	W	6F	o
28	(	40	@	58	X	70	p
29	)	41	A	59	Y	71	q
2A	*asterick	42	B	5A	Z	72	r
2B	+	43	C	5B	[	73	s
2C	,comma	44	D	5C	\	74	t
2D	-hyphen	45	E	5D	]	75	u
2E	.period	46	F	5E	^circumflex	76	v
2F	/	47	G	5F	_underscore	77	w
30	0	48	H	60	`grave	78	x
31	1	49	I	61	a	79	y
32	2	4A	J	62	b	7A	z
33	3	4B	K	63	c	7B	{
34	4	4C	L	64	d	7C	|
35	5	4D	M	65	e	7D	}
36	6	4E	N	66	f	7E	~tilde
37	7	4F	O	67	g		

Hexadecimal numbers for ASCII printable characters.

NOTE: Navigation within an address line ends at a null entry (00).

©2004 Bally Gaming and Systems

Machine Options (cont.)

If MC=06, SAS® includes an autoplay feature enabling a game to play without intervention. The coin and bill acceptors are disabled. Any activity at the machine or a command from the host will terminate autoplay.

If MC=6 and 78Hi=9999, the machine accepts coins and bills. If a Player's card is inserted, credits become non-cashable. A cashout transfers the credits to the Player's card.

If MC=6 and 78Hi=9998, the coin and bill acceptors are disabled until a Player's card is inserted. Credits are then transferred from the Host. A cashout transfers the credits to the Player's card.

78Lo Machine Number

S/MPI Identification Number. The setting must match the physical connection at the controller. See Module 7, Progressives, for more information.

80 Test 2 and Test 10 Enable

Electromechanical meters are disabled during diagnostics to preserve accounting information. In addition, external jackpot signals are disabled to prevent corruption of external progressive jackpots and false lockups. Option 80 overrides the feature to allow diagnostic testing of meter and jackpot outputs.

81 Coin Acceptor Enable

The coin acceptor can be disabled for coinless operation.

Note: Option 80 is not available in Market Code 10.

90 Host Remote Jackpot Release

If enabled, the host may release win lockups without a manual key switch actuation by an Attendant.

91 Host Queue

A queue can be enabled to ensure uninterrupted machine operation if the host is slow to respond.

92 SAS® Bonusing

SAS® Bonusing is a feature of the SAS® system that can provide additional awards to the Player. The default setting is 0000. Enabling SAS® Bonusing requires the setting to be changed to 0001 and Option 78Hi to be set to 0001 or greater.

93 Bank Meter Transfer

Option 93, Bank Meter Transfer, is only valid if MC=16. A Jackpot game is defined as one having a top payout of more than £25. If the Bank Meter Transfer option is set to 0001 and the game has a bank transfer button, then the Player may transfer £2 from the bank meter to the CREDIT meter each time the transfer button is pressed.

95 Voucher/Denomination Mismatch

A voucher presented to a machine for acceptance may not be evenly divisible by the machine's denomination. The setting determines whether a non-matching voucher is either rejected, or added to the credit meter and a redeemable voucher is given to the Player for the indivisible remainder.

98 Primary Host / 99 Secondary Host

A primary Host and secondary Host cannot both use the same protocol. A dual Host system must use a combination of SAS® (2.xx - 6.xx) and SDS®. Primary Host must be set prior to setting Secondary Host. Note: 78Hi still must be set.

Note: The following does not apply to Market Code 16, United Kingdom.

Machine Operation

Message Center

The LED display center consists of 10 seven-segment LEDs plus decimal points. It shows information about the game to a Player. It also displays counters, option settings, status, and test information to the Operator.

During a game, the COIN IN shows the number of credits wagered. The WIN PAID shows the awards for winning combinations or the number of coins paid from the hopper. The CREDIT shows the number of credits available for wagering.

WIN PAID Decimal Points

Decimal points in WIN PAID are used to display information during normal operation with the door closed. They indicate an important event has occurred. The decimal point is in addition to the number displayed. Reading from left to right, the decimal points shown in WIN PAID represent the following:

Machine Operation (cont.)

- Position 1 - System Reset (no malfunction)
- Position 2 - Door Opened / Closed
- Position 3 - Malfunction During Reel Spin/ Replay
- Position 4 - Bill Transaction

Position 1 - System Reset (no malfunction)

The ProSlot® 6000™ has safeguards against tampering or loss of information that usually result in the microprocessor initiating a system reset. A decimal point appears indicating a system reset (not due to a malfunction) has occurred. This decimal point will remain until the reels spin for the second game played.

Position 2 - Opened Door

The machine shows an opened door by displaying a decimal point in the second position. Upon the opening and closure of a door switch, the machine initiates a system reset; therefore, there is a decimal point in both the first and second positions. This decimal point remains until the reels spin for the second game.

Position 3 - Malfunction During Reel Spin/ Replay

If a malfunction occurs while the reels are spinning, the game is suspended. When the malfunction is corrected, the reels return to the positions they were in before the game started. A decimal point appears in the third position of WIN PAID. The SPIN button illuminates and the handle mechanism unlocks, allowing the game to be replayed. Once the game is restarted, the decimal point disappears.

Position 4 - Bill Transaction

When a bill is accepted, its credit value appears in WIN PAID. A decimal point in the fourth position indicates the amount shown in WIN PAID is from a bill transaction. This decimal point will remain until the start of the next game event.

Note: If a door was opened to correct a spin malfunction, decimal points will be in positions one and two as well as position three.

Playing a Game

The Player must wager at least one credit to play a game. If Option 27, Bet Mode, is not 0000 (cash only), credits are awarded from wins; purchased by inserting coins or bills, or by AFTs. With special Main EPROMs, credits may be added with additional hardware.

Credits are wagered by selecting bet one or bet max. Bet max wagers all available credits or the maximum wager for the game, whichever requires the fewer credits.

Once credits are wagered, the game proceeds according to Option 26 (automatically at max bet if at default 0001). Upon completion of the game, winning combinations increment CREDIT and WIN PAID according to Option 27, Bet Mode; Option 58, Win Lockup; Option 51, Credit Meter Limit, and the game's paytable.

To collect, the Player presses the CASH/CREDIT button. Credits are transferred to a Player's card, paid from the hopper, recorded on a redeemable coupon or voucher, or paid by an Attendant as dictated by the settings of machine options.

Credit Collect Messages

When credits are collected, the WIN PAID display shows a **COL** message followed by the total of credits collected. If credits are collected immediately after a winning combination, a **Pd** message, followed by the number of credits awarded for the winning combination, also displays.

Example 1: A player accumulates 40 credits and decides to cashout. The WIN PAID shows **COL,** then **40**.

Example 1

| - Revised, || - New
©2004 Bally Gaming and Systems

Machine Operation (cont.)

Credit Collect Messages (cont.)

Example 2: There are 0 credits on the CREDIT display. The Player wins 20 credits. The CREDIT display increments to 20. The Player then decides to cashout. The WIN PAID display shows the sequence of **Pd,** then **20** twice and then the display goes blank, then shows the sequence of **COL**, then **20** twice and then the display goes blank.

Example 2

Example 3: A Player accumulates 20 credits. The Player gets a winning combination that pays 20 credits. The CREDIT display increments to 40. The Player then decides to cash out. The WIN PAID display shows the sequence of **Pd,** then **20** twice and then the display goes blank, then shows the sequence of **COL**, then 4**0** twice and then the display goes blank.

Example 3

Accounting

The ProSlot® 6000 stores accounting information in electromechanical counters (hard meters) and in memory (soft meters).

Electromechanical Meters

The hard meters are visible through a window in the feature glass on an upright, or under the arm rest on a slant top. They are numbered one through five. The information recorded is determined by Market Code. These meters cannot be set to zero by the Operator. The following lists common configurations:

Total In - Increments once for each coin or credit wagered.

Total Out - Increments once for each credit won by a Player without a win lockup.

Coin Drop - Increments once for every coin accepted by the machine when the hopper is full.

Combined Drop - Increments for each coin drop and for each credit from a bill transaction.

Attendant Paid - Increments for each credit paid by an Attendant upon a lockup.

Bill Change - Increments the number of credits added to the CREDIT display or coins dispensed from the hopper for accepted bills.

Lockups - Increments once each time the machine is released from a collect lockup by an Attendant.

Games Played - Increments once for each completed game.

Electromechanical Meters					
Market	**Meter #1**	**Meter #2**	**Meter #3**	**Meter #4**	**Meter #5**
00	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
02	Total In	Total Out	Combined Drop	Attendant Paid	Games Played
03, 04	Total In	Coin Drop	Total Out	Attendant Paid	Games Played
05	Total In	Total Out	Combined Drop	Attendant Paid	Lockups
06	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
07	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
08	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin Only)
10	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
11	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
12	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
13	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
14	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)

©2004 Bally Gaming and Systems

Accounting (cont.)

Electromechanical Meters (Cont.)

Electromechanical Meters					
Market	Meter #1	Meter #2	Meter #3	Meter #4	Meter #5
15	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
16	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
17	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
18	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
19	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
20	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
21	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
22	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
23	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
24	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
25	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
26	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
27	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
28	Total In	Total	Soft Attendant Paid	Drop	Games Played
29	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)
30	Total In	Total Out	Combined Drop	Attendant Paid	Bill Change (Coin/Credit)

Machine Meter Groups

The availability of machine meter groups depend upon game configurations, such as Market Code, host protocol, progressives, and accessories, such as a bill acceptor, Data Vault™, and a printer.

Machine meter groups are accessed by turning a key in the audit key switch. Advance through the groups by pressing CHANGE. Pressing and holding SPIN pauses the automatic cycling.

#	Meter Group	Description
00	Model Information	Display of Personality EPROM ID, reel map and win table, and hold percentage.
01	Bookkeeping	Record of totals for all wagers, all payments, and other game activity.
02	Win Records	Listing of the total number of wins for each possible wining combination.
03	Game Recall	Record of the reel positions, number of coins played, win amount, and credits for the last 10 games.
04	Games Summary	Tally of games and wagers.
05	Bill Acceptor Records	Listing of the number of bill transactions by denomination. This group also includes counters for the total number of bills in the stacker, and the total number of credits awarded from bill transactions.
06	Bill Acceptor Transaction History	A record of credits incremented or coins dispensed for each of the last 10 bill transactions.
07	Progressive Jackpots	A record or amount of jackpots paid for up to four (4) jackpot groups.
08	Current Progressive Values	Active display of the current jackpot values as transmitted from the progressive controller. Requires configuration for S/MPI progressive operation (Option 02=0004).
09	Host EFT History	A record of Advanced Fund Transfers, including EFT credits and debits. Requires configuration for SDS® or SAS® protocol.
10	Host EFT Totals	A record of promotional credits, blocked credits, non-blocked credits, and collected credits.
11	Doors (MC=8)	Time and date of the last access through main door, drop door, and bill acceptor cashbox door.
12	Secondary Game Bookkeeping	Record of secondary games.
13	DataVault™	Redundant bookkeeping meters stored off-board.
14	Voucher Out Transaction History	Record of last 35 redeemable vouchers or informational receipts, including status, time and date, validation type, system ID, validation number, and amount.
15	Coinless Payment System Transaction Records	Totals and values for all redeemable coupons, vouchers and informational receipts.
16	Voucher In Transaction History	Record of last 35 redeemable vouchers or informational receipts, including status, time and date, validation type, system ID, validation number, and amount.
17	Meter Dump (MC=3,4)	Downloads and displays the DataVault™ information.
18	SAS® General Meters	Tracks the total value of additional amounts awarded as a result of an external bonusing system and paid by the slot machine.
19	NGCB Bookkeeping Meters	Specific meter regulations as mandated by the Nevada Gaming Control Board.
20	NGCB Bill Meters	Bill meter regulations as mandated by the Nevada Gaming Control Board.
21	Payback Percentage Display	Record of the theoretical payback percentage. The display also shows the total amount bet at that wager level.
22	Fund Transfer History	Record of the last 35 transactions, including the date and time, type, and amount of the transaction.

Note: The availability of some meter groups depends upon Market Code and accessories.

00: Model Information

The following is an example of model information for SMI 8670, which uses EPROM #E761121X-05.

Seq.	Sub Group	Description
1	01	EPROM Program Number
2	02	Reel Map and Win Table (Usually 0000)
3	03	Payback Percentage of the Game (MC=3 or MC=4)
4	04	Main Part Number

Sequence One

The number shown in CREDIT is the first four numbers of the Personality EPROMs in U18 and U20 of the MPU Board

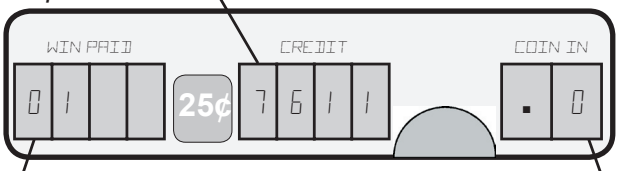

The **01** in the first two positions of WIN PAID indicates that the information shown is the EPROM Number

The **.0** in COIN IN indicates the information shown is the Model Information Group

©2004 Bally Gaming and Systems

Accounting (cont.)

00: Model Information (cont.)

Sequence Two

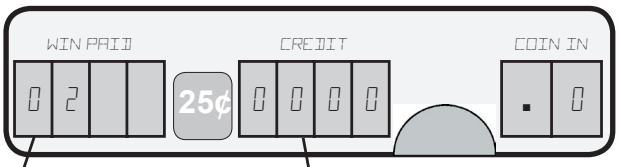

The **02** in the first two positions of WIN PAID indicates that the information shown is the reel map and win table configuration

The number shown in CREDIT is the reel map and win table configuration

Sequence Three

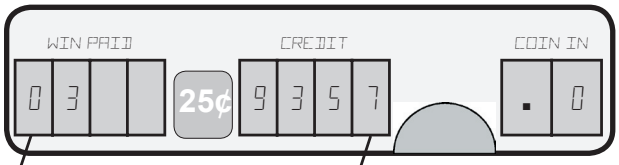

The **03** in the first two positions of WIN PAID indicates that the information shown is the payback percentage of the game

The number shown in CREDIT is the payback percentage for the game

01: Bookkeeping

Sub Group	Meter	Description
00	Total In	Credits wagered.
01	Total Out	Credits won without a win lockup.
02	Coin Drop	Credits sent to a separate container because the hopper was full.
03	Combined Drop	Coin drop plus CHNG Bill (Bill Drop) (see Bill Transaction meter group).
04	Coin In	Credits accepted by the machine.
05	Coin Out	Credits dispensed by the hopper.
06	Total Games	Games played. Incremented at the beginning of each spin.
07	Current Credits	Credits available to the Player when the machine returns to revenue operation.
08	Lockups	Number of times an Attendant has released a jackpot lockup. It is incremented when the Attendant activates the audit key switch.
09	Attendant Paid Credits	Credits paid by an Attendant upon a lockup.
10*	Credit Collect Lockup Credits	Attendant paid credits for a lockup from the setting of Option 56, Credit Collect.
11*	Win Lockup Credits	Attendant paid credits for a lockup from the setting of Option 58, Win Lockup (if not SDS® AFT) (Win Handpaid credits for a lockup SDS® EFT only).
12* (10VLC)	Super Jackpots	Number of times the top awards have been won when Option 07, Number of External Jackpots, is greater than zero.
13* (11 VLC)	Door Opens	Number of times the main door of the machine was opened with power ON.
14*	Cash Box Door Opens	Number of times the bill acceptor cash box door was opened with power ON.
15* (12 VLC)	Games Since Door Open	Games played since the last time the door was opened.
16* (13 VLC)	Games Since Reset	Games played since a system reset.

01: Bookkeeping (cont.)

Sub Group	Meter	Description
17* (14 VLC)	Drop Door Opens	Number of times the drop door has been opened (if drop door switch is connected).
18* (15 VLC)	Partial SafeRAM™ Clears	Number of times the Partial SafeRAM™ Clear procedure has been executed.
19* (16 VLC)	Full SafeRAM™ Clears	Number of times the Full SafeRAM™ Clear procedure has been executed.
20* (17 VLC)	Extra Coins Sent to Drop	Coins that should have been rejected by the coin acceptor, but were diverted into the drop bucket becaus the hopper was full.
21* (18 VLC)	Soft Attendant Paid	Purchased credits paid by an Attendant. Purchased credits are from a bill transaction, key on, AFT, ACT, or from coins when 27=03.
22* (19 VLC)	Soft Credit Collects	Coins paid by the hopper from purchased credits.
23* (20 VLC)	Bill Stacker Door	Number of times the stacker has been opened with power ON.
24* (21 VLC)	Current Non-Cashable Credits	Current credits (Meter #7) that must be wagered.
25* (22 VLC)	Cashable Coupon/Voucher Credits	Credits from non-government bills that can be paid by the hopper upon cashout.
26* (23 VLC)	Non-Cashable Coupon/Voucher Credits	Credits from non-government bills that must be wagered.
27* (24 VLC)	Tokens Out	For a machine with two hoppers, the number of tokens dispensed by the second hopper.
28* (25 VLC)	Knock-Off (Key On) Credits	Credits added by optional knock-off (key on) key switch.
29* (26 VLC)	Hopper Fills	Coins added to hopper after 32 (hopper empty) tilt recovery.
27* VLC	MPU Access	Number of times the MPU board assembly has been removed.
28* VLC	Door Opens with Power Off	Number of times the main door was opened with power off.
30*	Games Since Power Fail	Games played since power ON.
31*	Wins	All wins (not including MC=16)
32	Belly Door Open	Number of times Belly Door and the Top Box door are opened.
33	Slant Style Lower Door Open	Number of times the Lower Door of the Slant cabinet style has been epened.

*Sequence and inclusion depends upon Main software version.

The following is an example of the display of total in the Bookkeeping Meter Group:

Sequence One

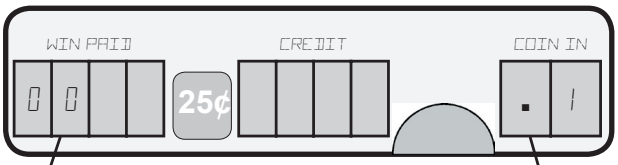

The **00** in the first two positions of WIN PAID indicates that the information is total in

The **.1** in COIN IN represents the Bookkeeping Meter Group

©2004 Bally Gaming and Systems

Accounting (cont.)

01: Bookkeeping (cont.)

Sequence Two

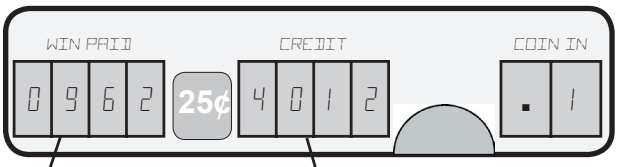

962 in WIN PAID and 4012 in CREDIT shows that the number of credits wagered is 9,624,012

01: Bookkeeping (MC=3 or MC=4)

Sub Group	Meter
00	Total In
01	Coin Drop
02	Total Out
03	Attendant Paid Credits
04	Credit Collect Lockup Credits
05	Win Lockup Credits
06	Total Games
07	Coin In
08	Coin Out
09	Combined Drop
10	Current Credits
11	Lockups
12	Super Jackpots
13	Door Opens

Sub Group	Meter
14	Cash Box Door Opens
15	Games Since Door Open
16	Games Since Reset
17	Drop Door Opens
18	Partial SafeRAM™ Clears
19	Full SafeRAM™ Clears
20	Extra Coins Sent to Drop
21	Soft Attendant Paid
22	Soft Credit Collects
23	Tokens Out
24	Knock Off (Key On) Credits
25	Total Win Meter
26	Belly Door Open
27	Slant Style Door Open

01: Bookkeeping (MC=16)

Sub Group	Meter
00	Total In
01	Total Out
02	Coin Drop Credits
03	Combined Drop
04	Extra Coin Credits Sent to Drop
05	Coin-In Credits
06	Coin-Out Credits
07	Games Played
08	Current Credits
09	Door Open
10	Cash Box Door Opens

Sub Group	Meter
11	Drop Door Opens
12	Bill Stacker Door
13	Games Since Door Open
14	Games Since Reset
15	Games Since Power Fail
16	Number of Partial SafeRAM™ Clears
17	Number of Full SafeRAM™ Clears
18	Hopper Fills
19	Belly Door Open
20	Slant Style Door Open

02: Win Records

The Win Record meter group displays the quantity of wins for each winning reel combination. The sequence begins at **0000,** representing the highest win. The setting **0001** would represent the next highest, etc. The process continues until every possible winning combination has been displayed.

The following is an example of the Message Center as it displays Win Records.

Sequence One

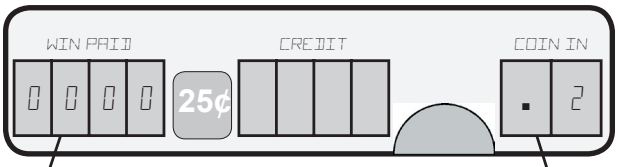

The 0000 in WIN PAID represents the highest winning combination

The .2 in COIN IN indicates Win Records Meter Group

Sequence Two

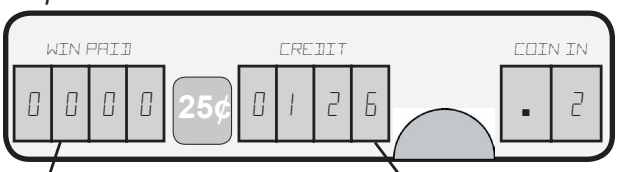

0000 in WIN PAID and 0126 in CREDIT indicates that the highest award has occurred 126 times

03: Game Recall

Game Recall shows information about completed games.

For the first cycle, WIN PAID shows the game sequence as **L** for last, P for previous, **3** for third game back—through **A** for tenth game back. If the game includes multiple spins they are shown according to the following table:

10 Game Recall Including up to 9 Respins									
Last Game / Respins	Previous Game / Respins	3rd Previous Game / Respins	4th Previous Game / Respins	5th Previous Game / Respins	6th Previous Game / Respins	7th Previous Game / Respins	8th Previous Game / Respins	9th Previous Game / Respins	10th Previous Game / Respins
L-L	P-L	3-L	F-L	5-L	6-L	7-L	8-L	9-L	A-L
L-9	P-9	3-9	4-9	5-9	6-9	7-9	8-9	9-9	A-9
L-8	P-8	3-8	4-8	5-8	6-8	7-8	8-8	9-8	A-8
L-7	P-7	3-7	4-7	5-7	6-7	7-7	8-7	9-7	A-7
L-6	P-6	3-6	4-6	5-6	6-6	7-6	8-6	9-6	A-6
L-5	P-5	3-5	4-5	5-5	6-5	7-5	8-5	9-5	A-5
L-4	P-4	3-4	4-4	5-4	6-4	7-4	8-4	9-4	A-4
L-3	P-3	3-3	4-3	5-3	6-3	7-3	8-3	9-3	A-3
L-2	P-2	3-2	4-2	5-2	6-2	7-2	8-2	9-2	A-2
L-1	P-1	3-1	4-1	5-1	6-1	7-1	8-1	9-1	A-1

Sequence One

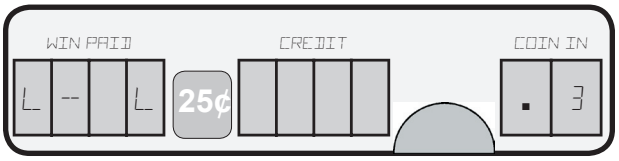

In MC=28, the time is shown. In WIN PAID, the hour is shown as ".hh", the minutes and seconds are shown in CREDIT as "mm.ss", and a decimal point followed by a 3 is shown in COIN IN. The date is shown as MM.DD for the month and day in WIN PAID, and YYYY for the year in CREDIT.

©2004 Bally Gaming and Systems

Accounting (cont.)

03: Game Recall (cont.)

The second cycle shows the initial value of the credit meter after the bet was wagered. For example, if the Player has 100 credits, and then wagers 3 credits, the value of the initial credits meter displays 97.

Sequence Two

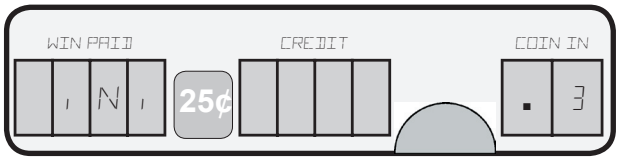

The third cycle shows the wager amount in COIN IN, the amount paid in WIN PAID. If the amount is unknown or the amount cannot be shown, "JP" displays. For MC=16, there is no jackpot flag. The amount paid for the last spin of the game (not the total win) is shown in WIN PAID. The remaining credits is shown in CREDIT.

Sequence Third

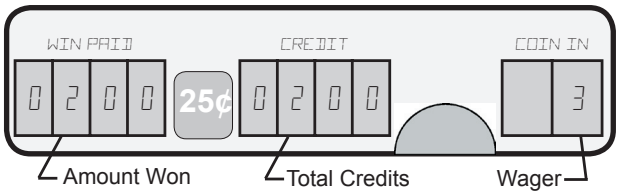

The fourth cycle shows information only for the last spin of a game. **COLL** in is shown in WIN PAID, and COIN IN, and CREDIT are shown as blank.

Sequence Four

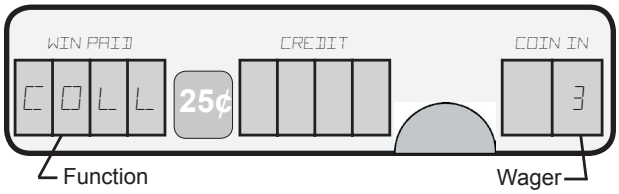

NOTE: During the fourth cycle, the normal SPIN/BET MAX operation does not work.

The fifth cycle shows information only for the last spin of a game. The amount cashed out is shown in WIN PAID, the total credits is shown in CREDIT, and a decimal point followed by meter group number **3** is shown in COIN IN.

Sequence Five

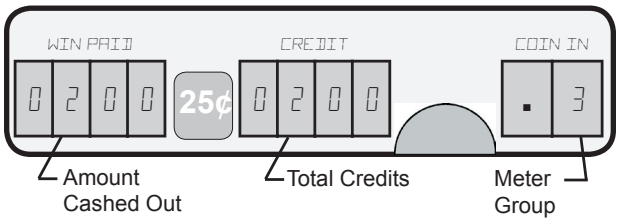

The time and date are shown the same as in the first cycle.

The sixth display cycle shows information only for the last spin of a game. The final amount paid (**F Pd**) is shown in WIN PAID, and a blank COIN IN and CREDIT display is shown.

The seventh display cycle shows the wager amount in

Sequence Six

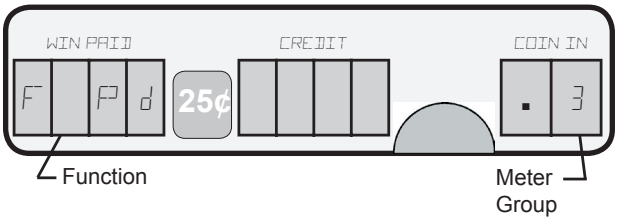

NOTE: During the sixth cycle, the normal SPIN/BET MAX operation does not work.

COIN IN, the total amount paid (total of all spins included as part of the game) in WIN PAID, and the remaining

Sequence Seven

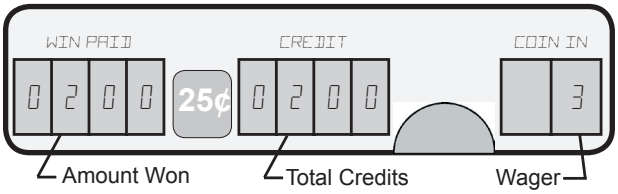

NOTE: During the seventh cycle, the normal SPIN/BET MAX operation does not work.

credits in CREDIT. If the amount is unknown or cannot be shown, WIN PAID shows "JP". The complete cycle repeats.

The reels reposition and the cycle repeats for each of the remaining games and respins or 2nd chance spins if applicable.

L- L in WIN PAID indicates last game and last spin. Previous game is P- L, and games 3-A are indicated by its numbers. Reels position to display game.

Display of Respins or 2nd chance spins stops here twice before going to the next spin for the current game.

Last Spin shows COLLECT. The entire cycle repeats.

The eigth and ninth sequences show the bonus amount. The eigth sequence displays the function name and the ninth sequence shows the amount of

©2004 Bally Gaming and Systems

Accounting (cont.)

the bonus. If using a four-digit display, the first four numbers of the amount are shown in the WIN PAID, and the last four numbers are shown in the CREDIT display. If using a five-digit display, the first three numbers of the amount are shown in WIN PAID, and the last five numbers are shown in the CREDIT display.

Sequence Eight

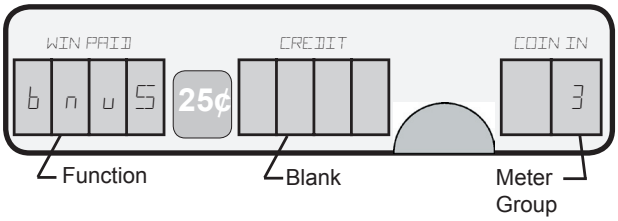

04: Game Summary

The Game Summary meter group shows the number of games played for each quantity of credits wagered. The following is an example of Game Summary:

Sequence One

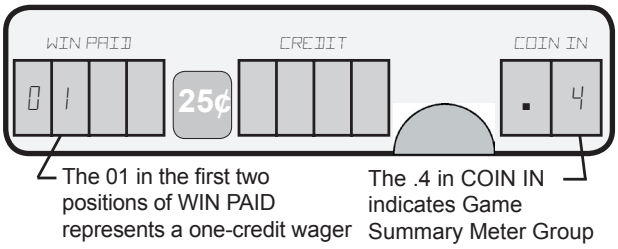

Sequence Two

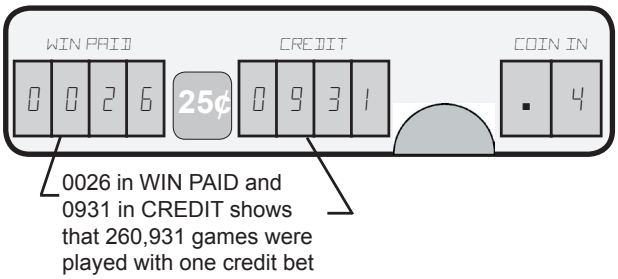

05: Bill Acceptor Records

The Bill Acceptor Records meter group displays information about bills, coupons, and vouchers accepted by the bill acceptor. Included is the number of bills by denomination, coupons and vouchers; the value in credits of all bills, coupons, and vouchers; the number of bills, coupons, and vouchers currently in the stacker; and, optionally, the value in dollars of all bills, coupons, and vouchers accepted.

ID Message	Description
1 Bill	Number of 1 bills accepted
2 Bill	Number of 2 bills accepted
5 Bill	Number of 5 bills accepted
10 Bill	Number of 10 bills accepted
20 Bill	Number of 20 bills accepted
50 Bill	Number of 50 bills accepted
100 Bill	Number of 100 bills accepted
200 Bill	Number of 200 bills accepted (MC=6)
500 Bill	Number of 500 bills accepted (International)
CHNG Bill	Total pounds for all bills accepted (MC=16)
CASH Bill	Total number of bills currently in the cashbox/stacker (resets to 0 during soft drop)
ACCP DOLL	Total value in dollars for all bills and coupons/vouchers accepted

The following is an example of the Message Center when viewing the Bill Acceptor Records meter group:

Sequence One

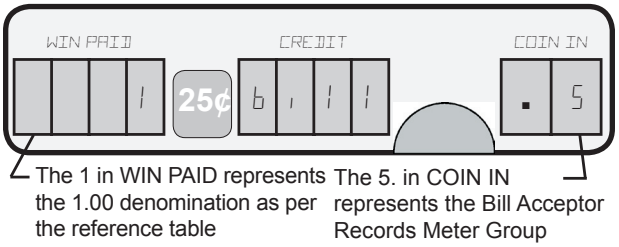

Sequence Two

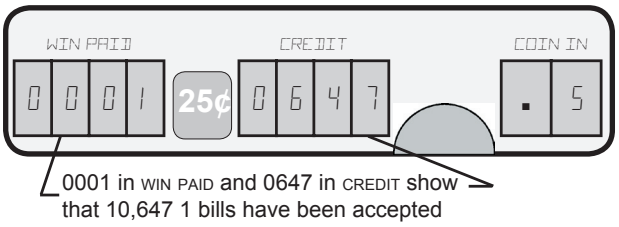

06: Bill Acceptor Transaction History

The Bill Acceptor Transaction History meter group displays the last 100 bills, coupons, or vouchers accepted and the coins or credits given for each transaction. The sequence of transactions is shown in the left position of WIN PAID, with "1" being the most recent transaction. The remaining positions of WIN PAID show the denomination of the bill, COUP for a coupon or VCHR for a voucher.

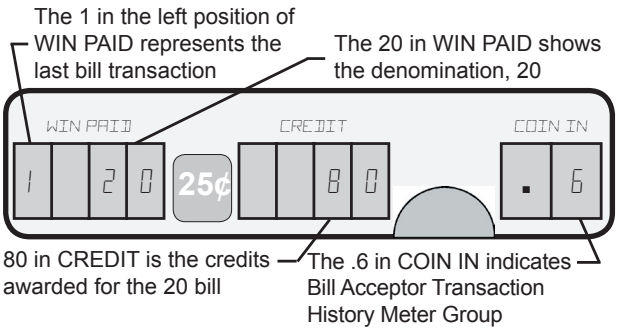

The most significant digit in WIN PAID displays the sequence number from 1 to 0 and wraps around for every 10, i.e. 1 is the most recent event, then 2, 3, ...9, 0 is the 10th event, then 1 again for the 11th and so on. Next, the LED displays time in HH MM SS format

©2004 Bally Gaming and Systems

Accounting (cont.)

across digits 3 and 4 in WIN PAID and CREDIT. After time, the LED displays the date in MM DD YYYY format across WIN PAID and CREDIT. After date, digits 3 and 4 in WIN PAID displays the denomination of the bill inserted, COU for a coupon, or UCH for voucher. CREDIT DISPLAYS the credit value. If a non-matched ticket was inserted, the change amount would be displayed next.

CREDIT shows the number of credits given for the transaction. For example, the figure below shows the last transaction was a $20.00 bill for which 80 credits were given.

07: Progressive Jackpots

If the game is configured for progressive jackpots with serial return, the Progressive Jackpots meter group displays the most recent amount paid for up to eight progressive jackpots. It is shown in monetary units (d) and in credits (c) rounded up.

The following table lists the progressive jackpot Information:

Sub Group	Description
00	Jackpot One (JP0)
01	Jackpot Two (JP1)
02	Jackpot Three (JP2)
03	Jackpot Four (JP3)
04	Jackpot Five (Mystery Machine Only)
05	Jackpot Six (Mystery Machine Only)
06	Jackpot Seven (Mystery Machine Only)
07	Jackpot Eight (Mystery Machine Only)

The following is an example of the Message Center as it shows progressive jackpot sub group 01, jackpot two for a 25¢ machine:

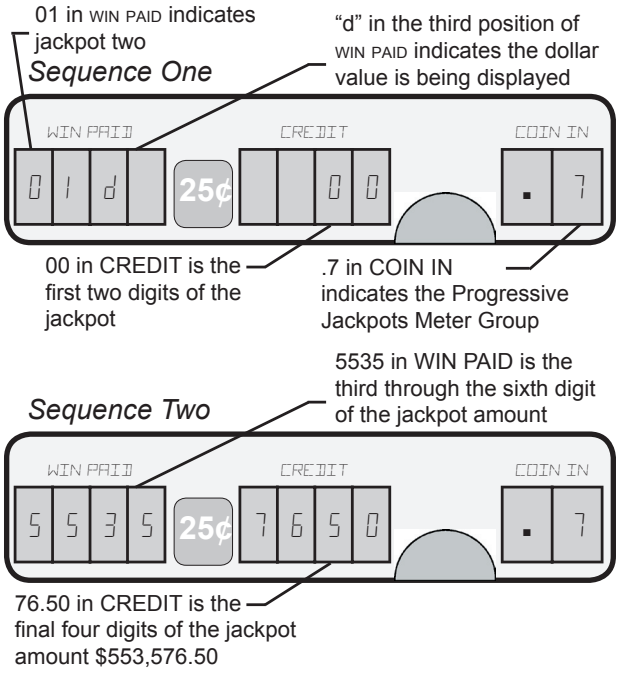

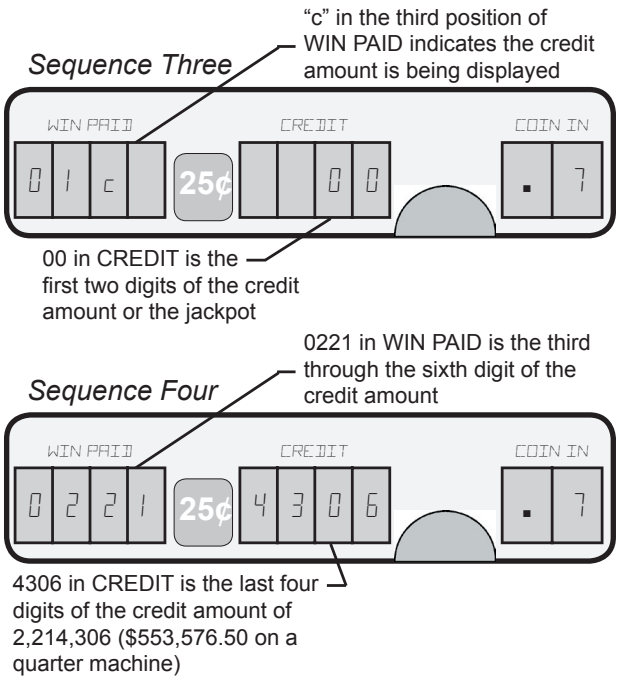

08: Current Progressive Values

If configured for S/MPI operation (Option 02 = 0004) or OTT (Option 02=0007, see Game Options table page 2-12), the Current Progressive Values meter group displays active jackpot values as transmitted from the progressive controller.

The jackpot values display in dollars-and-cents. The values are 10-digit numbers requiring two cycles of the Message Center for each jackpot level.

The first cycle shows the jackpot number (e.g. JP1, JP2) in WIN PAID, and the upper two digits of its value in CREDIT. The second cycle displays the last eight digits of the jackpot value.

The display auto sequences through all the jackpot levels. Pressing BET MAX immediately advances to the next jackpot value. Pressing CHANGE/SERVICE terminates the display.

If an error occurs while viewing the jackpot values, the message **Err** appears in WIN PAID, accompanied by an error code in CREDIT. The following table lists error codes and explanations:

Code	Description	Explanation
ERR 0	No Serial Traffic Found Within the Last 500 Milliseconds	The game is not receiving serial data from the progressive controller. This is most likely caused by an open connection between the machine and the progressive controller, or incorrect configuration of the progressive controller.
ERR 1	Serial Checksum Error	The data received by the game is not the same data sent by the progressive controller. This can be caused by an intermittant connection, or too much noise on the data lines.
ERR 2	Option Error	This error results when Option 02, Progressive Type, is set to 0004 and Option 78Hi, Machine Number, is set to 0000.
ERR 3	Coining Error	Current progressive values are unavailable during a game. Exit the meter group and finish the game. The values will display upon re-entering the meter group.

| - Revised, || - New

Accounting (cont.)

09: Host EFT History

If EFT is enabled by DIP Switch DS1 or Option 98, accounting records dedicated to host operation are available. The following SAS® Host EFT History table assumes that Option 98, Primary Host is set to 0001. Five of the most recent records of each of the five sub groups are presented. Pressing the SPIN button advances to the next record number. Pressing the BET MAX. button circularly advances to the next sub group.

SAS® Host EFT History		
Sup Group	**Meter Name**	**Description**
01	Non-Cashable	Credits transferred that must be wagered.
02	Cashable	Credits transferred that could be wagered or cashed out.
03	Promotional	Credits not won or purchased by a Player (casino promotion).
04	Forced Cashout to the System	Credtis returned to the system when the Player pressed CASH/CREDIT.
05	Forced Cashout from the Hopper	Credits paid in coins by the hopper as instructed by the system from a cashout when the Player pressed CASH/CREDIT.

If Option 98, Primary Host is set to 0002, SDS® Host, five of the most recent events of each of the four sub groups are presented. Pressing the SPIN button advances to the next record number. Pressing the BET MAX. button circularly advances to the next sub group.

The following is an example of the Message Center as it displays Host EFT History:

SAS® Host EFT History		
Sup Group	**Meter Name**	**Description**
00	Current Promotional Credits	Credits not won or purchased by a Player (casino promotion).
01	Promotional Credits Received	Total of all EFT credits sent to the game from the system which are promotional credits (non-cashable).
02	Total EFT In	Total of all EFT credits sent to the game from the system which are soft, cashable credits.
03	Total EFT Out	Total of all hard/soft EFT credits cashed out to the system because 1) Player pressed CASH/CREDIT, 2) a win to system (certify pay) occured (a prize was won that was too large to pay to the CREDIT meter, so it was directly paid back to the EFT Host system).

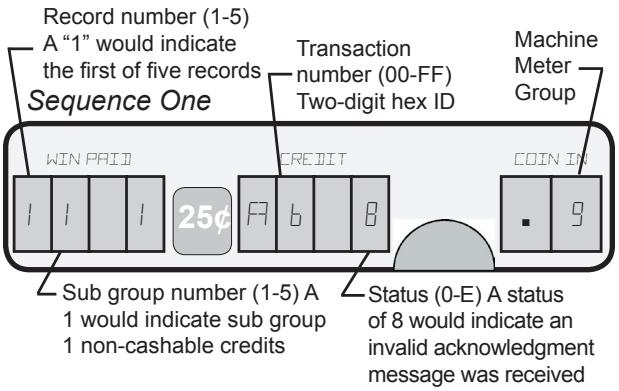

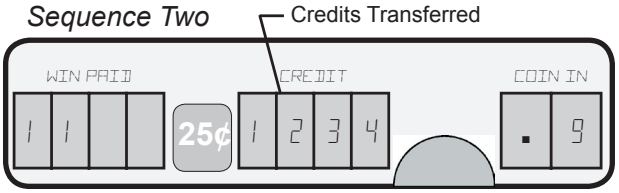

Status Codes		
Code	**Description**	**Definition**
0	Operation Successful	The entire transfer amount has been accepted.
2	Machine Door Open	No transfers to or from the machine are allowed when the door is open. The entire transfer amount is rejected.
4	Transfer Exceeded the Machine's Credit Limit	Transfers to the machine are accepted only up to its credit limit. If a transfer is received that exceeds the machine's credit limit, only a portion of the transfer up to the credit limit is accepted. *Note: does not apply to transfers from the gaming machine.*
5	Invalid Transaction Number	Transaction numbers for all transfers are controlled by the Host and have a valid range of 1 to FF. This number identifies individual transactions. There is only one transaction number per transfer. Any transfer sent with a transaction number of zero is rejected by the machine. Also, if the acknowledgment message by the machine has a different transaction number than the initiation message, the transfer is rejected.
6	Gaming Machine Does Not Possess a Credit Switch	All accepted transfers to the machine are shown in the machine's CREDIT meter. If a machine is configured for non-credit operation, transfers are rejected. *Note: a machine configured for player-selectable credit operation in non-credit mode will default to credit mode, and this status will not be reported.*
7	Machine in a Tilt Condition	A machine in a tilt condition rejects all transfer attempts and reports this status.
8	Invalid "ACK" Message Received	When a machine receives a transfer initiation message from the Host, it checks the "ACK" flag for zero. When receiving the Host acknowledgment message, the gaming machine checks the "ACK" flag for one. If the "ACK" flag is not zero for initiation messages, or one for acknowledgment message, the transfer is rejected.
9	Machine is in a Game	When the gaming machine is in a condition where credits cannot be wagered, it rejects all transfers. This includes game play, operator configuration menus, meter display meters, etc.
A	Data Field Contains Non-BCD Data	When a transfer message is received by the gaming machine, it will verify that the transfer amount in in a BCD format. If the amount field does not contain BCD data, the transfer is rejected.
B	Host Transfer Request Already Completed	When the machine receives a transfer initiation message from the Host, it compares the transaction number, command, and transfer amount to the last logged transfer. If they match, the gaming machine responds with this status and the transfer amount of zero.
C	Machine Disabled	If the Host attempts a transfer to a machine that it has disabled, the machine will reject the transfer and report the status. However, if the Host attempts to transfer credits from a disabled machine that has credits available, the message can be processed, and this status is reported.

©2004 Bally Gaming and Systems

Accounting (cont.)

Status Codes		
Code	**Description**	**Definition**
D	Machine Out of Service	Machines configured to be out of service by an Attendant will reject all transfers and report this status.
E	Machine Busy	If a machine receives a new transfer before completing a prior transfer, it rejects the current transfer and sends this status. If the machine is processing a time-sensitive task when a transfer is received, it responds with "Machine Busy."

10: Host EFT Totals

If EFT is enabled by DIP Switch DS1 or Option 98, accounting totals for host operation are available.

SAS® Host EFT Totals	
Sub Group	**Meter Name**
01	Promotional
02	Non-Cashable (Blocked) Credits
03	Cashable (Non-Blocked) Credits
04	Forced Cashout to the System
05	Credits Won
06	Third from Last Bonus
07	Second from Last Bonus
08	Last Bonus
09	Total Bonus for Tax Status Deductible
10	Total Bonus for Tax Status Non-Deductible
11	Total Bonus for Tax Status Wager Match
12	Last Multiplier Bonus for Tax Status Deductible
13	Last Multiplier Bonus for Tax Status Non-Deductible
14	Total Multiplier Bonus for Tax Status Deductible
15	Total Multiplier Bonus for Tax Status Non-Deductible

11: Doors

If MC=8, the time and date of the last door access is available as described in the following table:

Sub Group	Description
00	Main Door Access
01	Drop Door Access
02	Bill Acceptor Cashbox Access

12: Secondary Game Bookkeeping Meters

If a machine includes a factory-installed secondary feature game, entering Machine Meter Group 12 triggers the display of Bookkeeping Meters for the secondary feature. The information recorded and displayed depends upon the feature. Consult the documentation for the secondary game for more information.

13: Data Vault™ Redundant Bookkeeping System

The Data Vault™ Meter Group collects important machine data and secures it. Meters remain secure within the machine even if the circuit boards change—even if the machine is without power.

The core of the Data Vault™ is a Dallas Semiconductor iButton™ memory and interface. The iButton™ is a computer chip armored in a rugged steel can. The manufacturer guarantees data retention for 10 years without power.

The Data Vault™ interfaces asynchronously with the machine's bookkeeping so the numbers are recorded at the same, yet they are separate from the operations of the machine's meters. Thus accuracy is assured even if the machine's memory becomes corrupted.

The following table describes the sub groups of Data Vault™ meter group:

Sub Group	Name	Description
00	Total In	Increments for each coin or credit wagered.
01	Total Out	Increments for each unit won by a Player.
02	Attendant Paid	Increments for each credit paid by an Attendant upon a jackpot lockup.
03	Coin Drop	Increments for each coin diverted to a container because the hopper was full.
04	Door Opens	Times the main door of the machine was opened with the power ON.
05	Games Played	Increments once for each completed game.
06	Super Jackpots	Number of times the top award(s) have been won when Option 07, Number of External Jackpots, is greater than zero.

14: Voucher Out Transaction History

Information from the most recent 35 vouchers printed by the machine are kept in memory for review. The following table lists the sub groups of the Voucher Out Coinless Payment System History meter group:

The following is an example of the Message Center as it displays information about a voucher:

Sub Group	Description
01	Status
02	Date
03	Time
04	Transaction Type/System ID
05	Validation Number
06	Amount

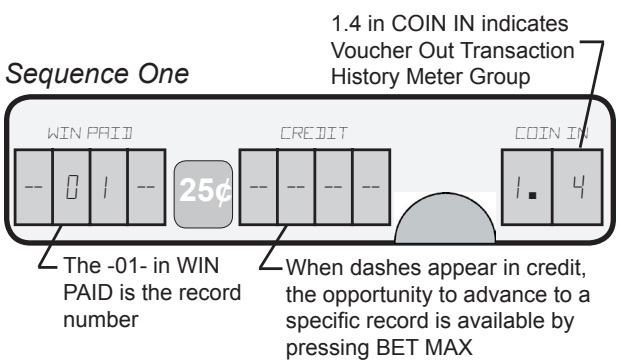

©2004 Bally Gaming and Systems

Accounting (cont.)

14: Voucher Out Transaction History (cont.)

Sequence Two

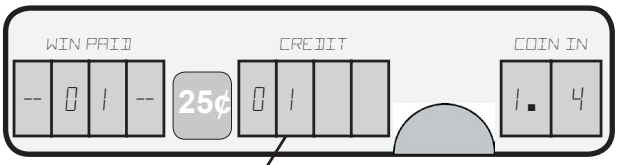

The 01 in CREDIT is the sub group number for status

Sequence Three

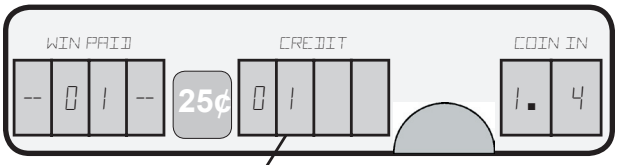

The status can be 01 for unverified or 02 for verified

Sequence Four

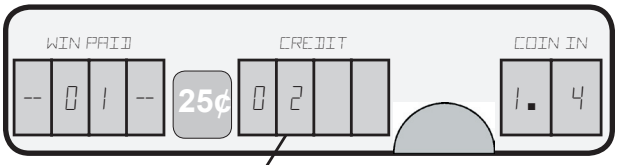

The 02 in CREDIT is the sub group number for date

Sequence Five

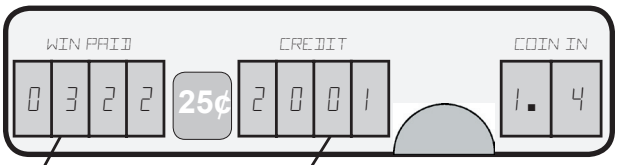

The month and day is shown in WIN PAID

The year is shown in CREDIT

Sequence Six

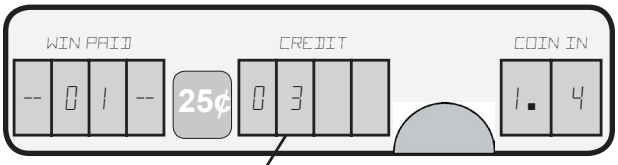

03 in CREDIT indicates the time sub group

Sequence Seven

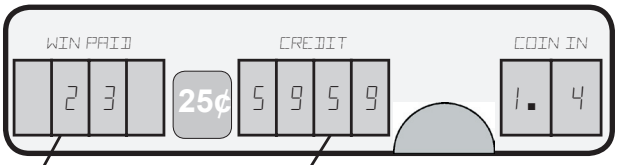

Hours are shown in WIN PAID

The minutes and seconds are shown in CREDIT

Sequence Eight

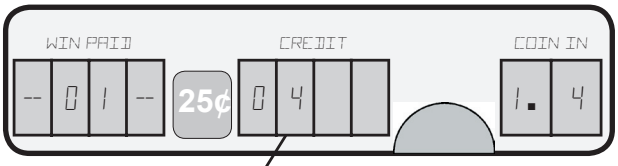

04 in CREDIT indicates the transaction type and system ID sub group

Sequence Nine

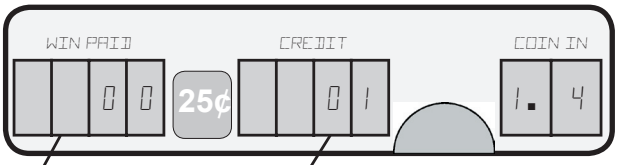

Transaction type is shown in WIN PAID

The system ID is shown in CREDIT

Sequence Ten

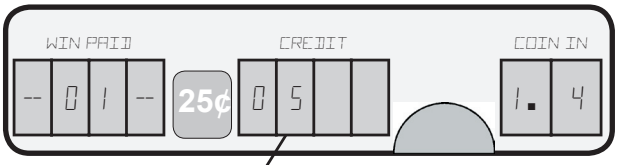

05 in CREDIT indicates the validation number sub group

Sequence Eleven

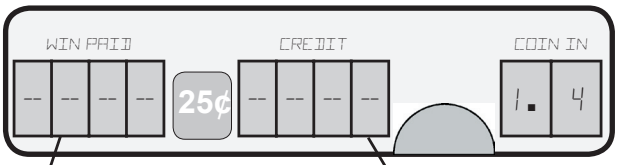

The high-order eight digits of the 16-digit validation number is shown in WIN PAID and CREDIT

Sequence Twelve

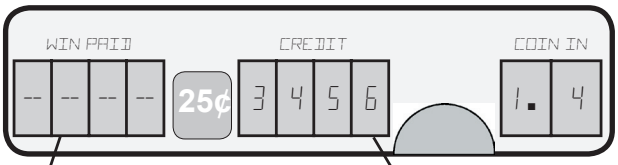

The low-order eight digits of the 16-digit validation number is shown in WIN PAID and CREDIT

Note: Meter 16: Voucher Out Transaction History, displays the first twelve numbers in Sequences Eleven and Twelve.

©2004 Bally Gaming and Systems

14: Voucher Out Transaction History (cont.)

Sequence Thirteen

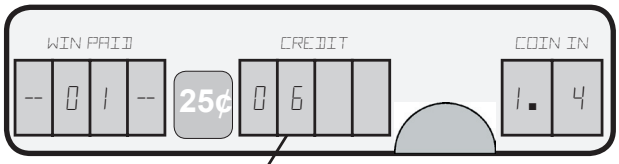

06 in CREDIT indicates the AMOUNT sub group

Sequence Fourteen

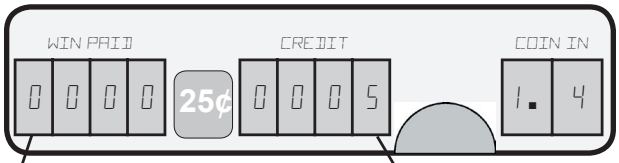

The integer amount of the voucher is shown in WIN PAID and CREDIT

Sequence Fifteen

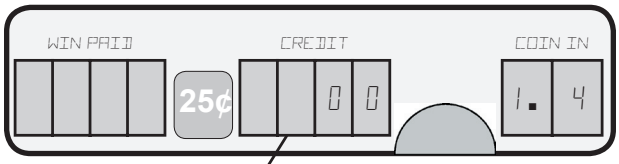

The decimal amount of the voucher is shown in CREDIT

Sequence Sixteen

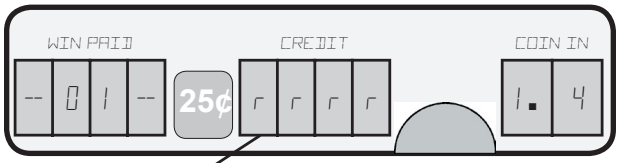

When rrrr appears in CREDIT, an opportunity to repeat the sequences for the record is available by pressing SPIN. Advance to a specific record by pressing BET MAX.

15: Coinless Payment System Transaction Records

A summary of transactions is available for auditing coinless activity on the machine. The information is listed in the following table:

Sub Group	Description
01	Cashable Coupon Redeemed
02	Non-Cashable Coupon Redeemed
21	Cashable Voucher Redeemed
22	Promotional Voucher Redeemed
	23	Cashable Promotional Voucher Redeemed
31	Cashable Voucher with no Lockup
32	Promotional Voucher from Cashout
33	Attendant Pay from Collect Lockup (Receipt Printed)
34	Attendant Pay from Win Lockup (Receipt Printed)
35	Attendant Pay from Collect Lockup (No Receipt)
36	Attendant Pay from Win Lockup (No Receipt)

The following is an example of the Message Center as it displays the information for coinless transactions. Each sub group is further divided into quantity (01), amount (02), and current amount in cashbox (03).

Sequence One

1.5 in CON IN indicates Coinless Payment System Transactions Meter Group

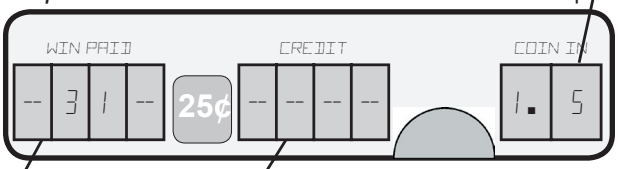

The -31- in WIN PAID is the sub group for cashable voucher with no lockup

When dashes appear in credit, the opportunity to advance to a specific record is available by pressing BET MAX

Sequence Two

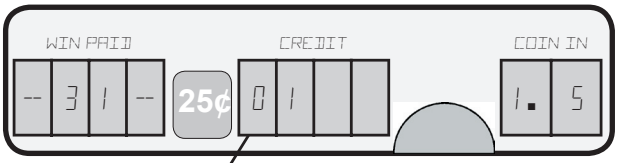

01 in CREDIT indicates that the information to be shown will be quantity

Sequence Three

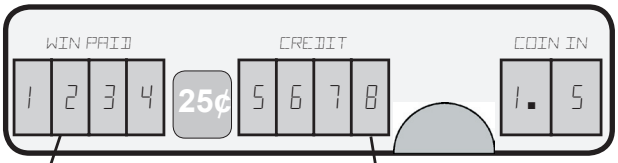

The numbers in WIN PAID and CREDIT is the quantity of cashable vouchers with no lockup

Sequence Four

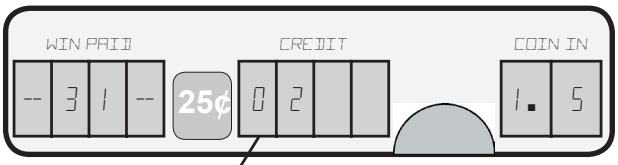

02 in CREDIT indicates that the information to be shown will be amount

Sequence Five

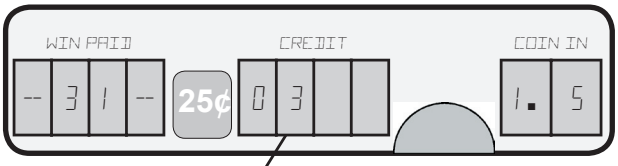

03 in CREDIT indicates that the information to be shown will be the current amount in cashbox

©2004 Bally Gaming and Systems

Accounting

15: Coinless Payment System Transaction Records (cont.)

Note: Current amount in cashbox only applies to redeemed coupons or vouchers.

Sequence Six

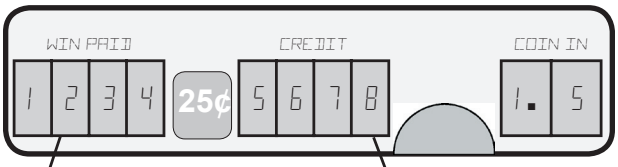

The numbers in WIN PAID and CREDIT is the integer amount of cashable vouchers with no lockup

Sequence Seven

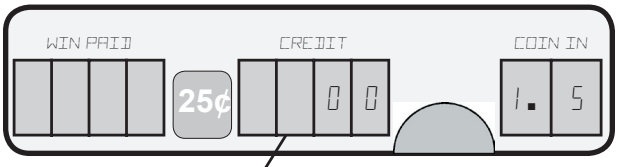

The decimal amount of cashable vouchers with no lockup are shown in CREDIT

Sequence Eight

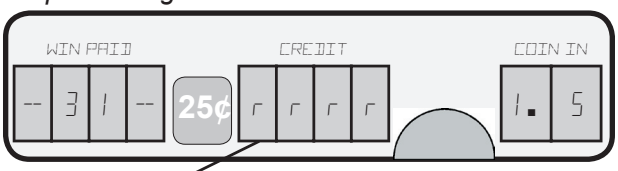

When rrrr appears in CREDIT, an opportunity to repeat the sequences for the record is available by pressing SPIN. Advance to a specific record by pressing BET MAX.

The sequence is similar for each of the eight sub groups.

16: Voucher In Transaction History

Information from the most recent 35 vouchers redeemed by the machine are kept in memory for review. The following table lists the sub groups of the Voucher In Transaction History Meter Group:

Sub Group	Description
01	Status
02	Date
03	Time

Sub Group	Description
04	Transaction Type/System ID
05	Validation Number
06	Amount

Examples of the Message Center as it displays information about a voucher are identical to those shown in Meter 14, Voucher Out Transaction History (page 2-28).

Note: Meter 16: Voucher Out Transaction History, displays the first twelve numbers in Sequences Eleven and Twelve.

17: Meter Dump

Information stored in the DataVault™ is downloaded, and its value is displayed in ASCII form. Meter Group 17, Meter Dump is available only for the French Market, Jurisdictions 3 and 4. The following table shows the meters in the order that they are displayed:

METERS DISPLAYED IN ENGLISH	METERS DISPLAYED IN FRENCH
TOTAL IN	ENTREES
TOTAL OUT	SORTIES
HOPPER OUT	TOTAL DE LA TREMIE
NET ATTEN. PAID	NET PAYE PAR EMPLOYE
COIN ACCEPTOR	ACCEPTEUR DE PIECES
TOTAL DROP	RECETTES
ATTEN. PAID	JACKPOT ET LOTS CUMULES
COIN TO DROP	PIECE INSEREE
HOPPER REFILL	REMPLISSAGE DE TREMIE
GAMES PLAYED	JEUX JOUES
GAMES WON	JEUX GAGNE
CREDIT PLAYED	CREDITS JOUES
CREDIT WON	CREDITS GAGNE

18: SAS® General Meters

SAS® General Meters tracks the total value of additional amounts awarded as a result of an external bonusing system and paid by the slot machine.

The following is an example of the Message Center as it displays the information for coinless transactions. Each sub group is further divided into Machine Paid External Bonus Deductible (00), Machine Paid External Bonus Non-deductible (01), Machine Paid External Bonus Wager Match (02) and Machine Paid External Bonus Payout (03).

Sub Group	Name	Description
00	Machine Paid External Bonus Deductible	SAS® legacy bonus tax status deductible.
01	Machine Paid External Bonus Non-Deductible	SAS® legacy bonus tax status non-deductible.
02	Machine Paid External Bonus Wager Match	SAS® legacy bonus tax status wager match.
03	Machine Paid External Bonus Payout	SAS® legacy bonus cumulative total.

| - Revised, || - New
©2004 Bally Gaming and Systems

Accounting (cont.)

19: NGCB Bookkeeping Meters

Regulations for specific meters, as mandated by the Nevada Gaming Control Board, are displayed in Meter Group 19, NGCB Bookeeping Meters. The WIN PAID display shows the meter number, followed by the meter value. The following table is a description of the meters included:

Sub Group	Meter	Description
00	Coin In	Credits wagered, except Double-or-Nothing wagers.
01	Coin Out	Credits won, not including Progressive Awards and Win Lockups.
02	Coin Drop	Credits sent to a separate container because the hopper was full.
03	Physical Coin In	Coins accepted by the machine.
04	Physical Coin Out	Coins dispensed by the hopper.
05	Attendant Paid Jackpots	Credits paid an Attendant for a Win Lockup.
06	Attendant Paid Cancelled Credits	Soft credits paid by an Attendant.
07	Bill In	Credits from currency.
08	Voucher In	Credits from items other than currency.
09	Voucher Out	Credits vended to the Player.
10	Electronic Fund Transfer In	Credits transferred electronically from a financial institution.
11	Wagering Account Transfer In	Credits transferred electronically to machine from wagering account.
12	Wagering Account Transfer Out	Credits transferred electronically from machine to wagering account.
13	Non-Cashable Electronic Promotion In	Non-Cashable Credits transferred electronically to machine from a promotional account.
14	Cashable Electronic Promotion In	Credits transferred electronically to machine from a promotional account.
15	Non-Cashable Electronic Promotion Out	Non-Cashable Credits transferred electronically from machine to a promotional account.
16	Cashable Electronic Promotion Out	Credits transferred electronically from machine to a promotional account.
17	Coupon Promotion In	Total accepted credits from coupons.
18	Coupon Promotion Out	Total dispensed credits from coupons.
19	Machine Paid External Bonus Payout	Total amount awarded from external bonus, paid by machine.
20	Attendant Paid External Bonus Payout	Total amount awarded from external bonus, paid by Attendant.
21	Attendant Paid Progressive Payout	Progressive awards paid by Attendant.
22	Machine Paid Progressive Payout	Progressive awards paid by machine.
23	Games Since Power Reset	Games played since a system reset.
24	Games Since Door Close	Games played since the last time the door was closed.
25	Games Since Game Initialization	Total of revenued games.

20: NGCB Bill Meters

NGCB Bill Meters records the amount of bills for each denomination that is entered in the machine.

The WIN PAID display shows the value of the currency, and the CREDIT display shows "BILL". The display then shows the amount for the particular denomination entered.

21: Payback Percentage Display

Payback Percentage Display shows, for each wager level, the theoretical payback percentage and the actual payback percentage.

The WIN PAID display shows the amount of coins for each wager level, and "COIN" in the CREDIT display. It then shows the theoretical payback percentage in the WIN PAID display, and the actual payback percentage in the CREDIT display.

If no bets were placed at a particular wager level, it is displayed as dashes. The display also shows the total amount bet at each particular wager level.

22: Fund Transfer History

Fund Transfer History records the date, time, type, and amount of the most recent 35 transactions. The time is separated by decimal points and shows the hour, minutes, and seconds. The following is a table of the types of fund transfer history:

NGCB Fund Transfer Record Types	
Type Number	Description
0	Voucher In
1	Voucher Out
2	Electronic Fund Transfer In
3	Wagering Account Transfer In
4	Wagering Account Transfer Out
5	Non-Cashable Electronic Promotion In
6	Cashable Electronic Promotion In
7	Non-Cashable Electronic Promotion Out
8	Cashable Electronic Promotion Out
9	Coupon Promotion In
10	Coupon Promotion Out

©2004 Bally Gaming and Systems

Diagnostic Tests and Functions

The ProSlot® 6000 has diagnostic tests and functions used to evaluate or change machine operation. Each is accessed by opening the main door and pressing the TEST button located on the front of the MPU assembly.

Every press of the button advances to the next test or function. Pressing CHANGE restarts most tests. Closing the door or pressing RESET exits diagnostics.

WIN PAID shows the number of the test followed by a **d**. COIN IN and CREDIT show information relating to each function.

The following illustration shows a Hopper Test (04).

Diagnostic tests consist of:

- 01 Model Information
- 02 Output Test
- 03 Input Test
- 04 Hopper Test
- 05 Reel Function Test
- 06 Reel Tape Test
- 07 Reel Tilt Records
- 08 Slot Communications
- 09 Display Test
- 10 Payout Test
- 11 Game Optioning
- 12 Peripherals Test
- 13 Data Vault™ Meters
- 14 Memory View
- 15 Hopper Dump
- 16 Top Box Test

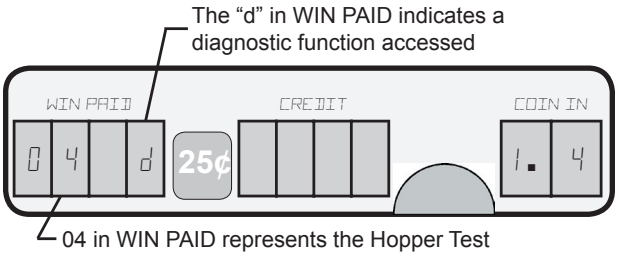

#1 - Model Information

This function enables the Operator to view information stored in the Personality EPROM and SafeRAM™ without removing the MPU board. The SMI documentation verifies the following information:

Code	Description
010D	Personality EPROM ID
011D	Payback Percentage(s)
012D	Reel Map and Win Table
013D	Market Code
014D	Diverter Optic

Code	Description
015D	Crazy Reels
016D	Bill Acceptor
017D	Denomination
018D	WBA CRC Checksum
019D	Reel Time Clock

To access Test #1, press and release the TEST button until **01 d** appears in WIN PAID. Each item of information automatically appears in the Message Center. The Operator can manually advance by successively pressing BET MAX, or pause the display by pressing and holding SPIN.

The third digit of WIN PAID shows the number of each item. For the first item, 01**0**d appears in WIN PAID. CREDIT shows the Personality EPROM identification number.

When WIN PAID shows 01**1**d, CREDIT sequentially shows the nominal and/or basic game percentages.

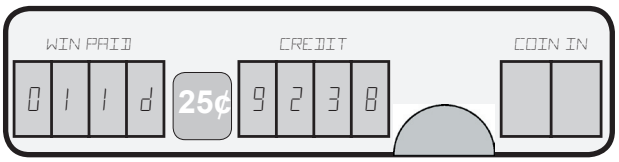

Item 01**2**d displays the reel map and win table configuration stored in SafeRAM™. In the example, reel map is #0 and the win table is #0. Currently all SMIs are 0-0.

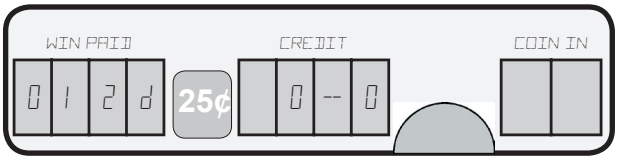

Item 01**3**d displays the two digit Market Code stored in SafeRAM™. Refer to DS3 DIP Switch table (page 2-10) in this module. The example shows configuration for operating within Nevada.

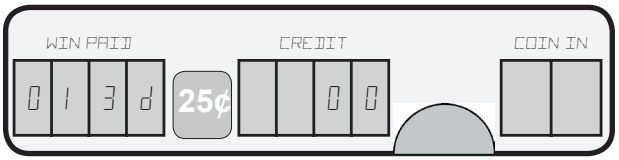

Item 01**4**d indicates diverter optic configuration in SafeRAM™. **0** in the example indicates a diverter optic is not included with this machine.

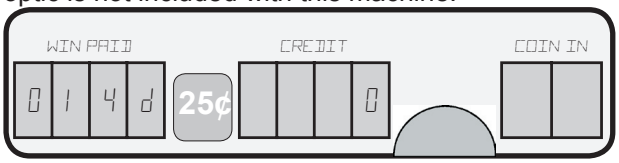

Item 01**5**d indicates the reel operation in SafeRAM™. **0** in the example indicates normal reel spin. A **“1”** would indicate crazy reel operation.

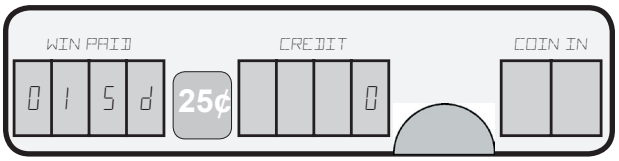

Item 01**6**d shows the bill acceptor stored in SafeRAM™. Refer to the DS2 sw5-sw6 DIP Switch table (page 2-10). The example indicates a machine configured for a JCM WBA bill acceptor.

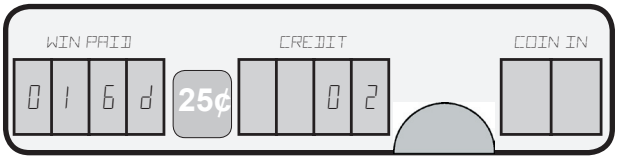

©2004 Bally Gaming and Systems

Diagnostic Tests and Functions

#1 - Model Information (cont.)

Item 017d shows the two-digit code representing the machine's denomination stored in SafeRAM™. Refer to the DS2 DIP Switch table (page 2-10). The example indicates a denomination of .25.

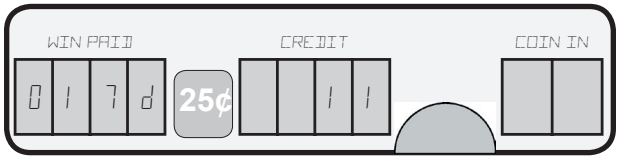

Item 018d displays the Cyclic Redundancy Check, CRC, of a JCM WBA bill acceptor ROM.

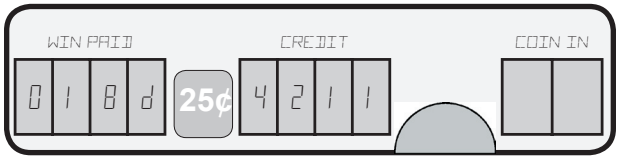

Item 019d shows, when the Dallas Timekeeper IC is installed at MPU U53, the date (mm dd: dw yy) and time (hh mm: ss). The information takes four cycles to complete and continues until exit. It can be paused by holding SPIN.

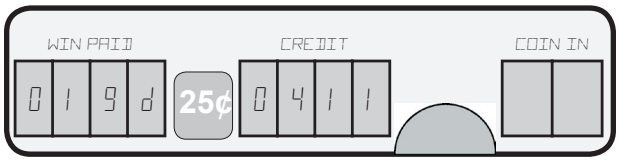

#2 - Output Test

The Output Test begins a routine that selects and turns on or off every output under microprocessor control. There are 64 address locations numbered in hexadecimal from 00 to 3F. The first digit of the number represents the port and the second digit represents the bit. For example, the number 28 represents port 2 bit 8.

Note: If game Option 80 is set to default 0000 (OFF), the electro-mechanical meters will not be tested.

The test is either *auto-step* or *manual*. Auto-step advances through all ports while manual operation allows the Operator to select the port and bit. Refer to the Output table (page 2-37 - page 2-38).

Note: Upon entering Output Test, the first output tested is Port 2 Bit 0, Coin Deflector Solenoid. Thereafter, the ports cycle sequentially.

To select the Output Test, press and release the TEST button until the message **02 d** appears in WIN PAID.

The test starts in auto-step operation as indicated by **020d** in WIN PAID. The CREDIT display shows the two-digit output number and port status (logic level). The status toggles between **1** (logic high) and **0** (logic low).

The process repeats for all outputs. Pressing the CHANGE button while auto-cycling restarts the test.

To manually select an output, press the PSEUDO COIN button on the front of the MPU assembly. WIN PAID changes from **020d** to **021d**. Press the CHANGE button to select an output. Once selected, press the TEST button. WIN PAID shows **022d**. The port status in CREDIT toggles between **1** (logic high) and **0** (logic low) reflecting the state of the output. Press the TEST button again to constantly activate the output in either state. The Message Center shows **021d** in WIN PAID. Exit by pressing the PSEUDO COIN switch until **020d** displays in WIN PAID, indicating return to auto-step operation.

Exit the test by pressing TEST to advance to the next diagnostic test; or by either pressing RESET or closing the door to cause a system reset.

Port	Bit	Output Description	Output Voltage
0	0	Top Tower Lamp	6.5 VAC
0	1	Bottom Tower Lamp	6.5 VAC
0	2	Bill Acceptor Ready	6.5 VAC
0	3	Bill Acceptor Not Ready	6.5 VAC
0	4	Coin Accepted Lamp	6.5 VAC
0	5	Insert Coin Lamp	6.5 VAC
0	6	Hold 3 Lamp	6.5 VAC
0	7	Hold 4 Lamp	6.5 VAC
0	8	Hold 5 Lamp	6.5 VAC
0	9	Hold 8 / Hold Attract Lamp	6.5 VAC
0	A	Coin 7 / Hold 2 Lamp	6.5 VAC
0	B	Coin 6 / Hold 1 Lamp	6.5 VAC
0	C	Cash/Credit Lamp	6.5 VAC
0	D	Bet One and Bet Max Lamps	6.5 VAC
0	E	Spin Lamp	6.5 VAC
0	F	Change Lamp	6.5 VAC
1	0	Coin 1 Lamp	6.5 VAC
1	1	Coin 2 Lamp	6.5 VAC
1	2	Coin 3 Lamp	6.5 VAC
1	3	Coin 4 Lamp	6.5 VAC
1	4	Coin 5 Lamp	6.5 VAC
1	5	Middle Tower Lamp	6.5 VAC
1	6	4th Tower Lamp	6.5 VAC
1	7	Jackpot Bell	6.5 VAC
1	8	Feature 1 Lamp	6.5 VAC
1	9	Feature 2 Lamp	6.5 VAC
1	A	Feature 3 Lamp	6.5 VAC
1	B	Feature 4 Lamp	6.5 VAC
1	C	Feature 5 Lamp	6.5 VAC
1	D	Feature 6 Lamp	6.5 VAC
1	E	Feature 7 Lamp	6.5 VAC
1	F	Feature 8 Lamp	6.5 VAC
2	0	Coin Deflector Solenoid	+24 VDC
2	1	Total In Meter	+24 VDC
2	2	Total Out Meter	+24 VDC

©2004 Bally Gaming and Systems

Diagnostic Tests and Functions

#2 - Output Test (cont.)

Port	Bit	Output Description	Output Voltage
2	3	Combined Drop Meter	+24 VDC
2	4	Attendant Paid Meter	+24 VDC
2	5	Bill Hopper Motor	+24 VDC
2	6	Spare Meter	+24 VDC
2	7	Coin Acceptor Enable	+24 VDC
2	8	Jackpot 1 Relay	+24 VDC
2	9	Jackpot 2 Relay	+24 VDC
2	A	Jackpot 3 Relay	+24 VDC
2	B	Tilt Relay	+24 VDC
2	C	Tivoli Lamps (chase lights for Millionaire Sevens)	+24 VDC
2	D	Total In Relay	+24 VDC
2	E	Game Door Open Signal	+24 VDC
2	F	Handle Release Solenoid	+24 VDC
3	8	Total In Signal	+5 VDC
3	9	Jackpot 1 Signal	+5 VDC
3	A	End of Game Signal	+5 VDC
3	B	Door Switch Signal	+5 VDC
3	C	Key Switch Signal	+5 VDC
3	D	Jackpot / Auxillary Hopper Signal	+5 VDC
3	E	Reserved	
3	F	Reserved	

Note: Some of the possible output tests may be disabled by Jurisdiction or Market Code.

#3 - Input Test

The Input Test verifies machine inputs, including button and door switches. Each input is referenced by a two-digit hexadecimal number. The first digit represents the input port and the second digit represents the bit. For example, 08 represents port 0 bit 8 (see Input Ports table page 2-39).

Press and release the TEST button until **03 d** appears in WIN PAID, indicating the Input Test is selected. Select any button or switch to a test that does not exit the function (RESET button or TEST button). Verify the appropriate code appears. The CREDIT display shows the input's port number and the port status (1=logic high, 0=logic low). Deactivation of the input reverses the logic level.

Bill Acceptor Input Test

Bill acceptor functions can be tested during Input Test #3. They include:

- Acceptance or rejection of bills.
- Value in coins or credits vended for each bill denomination.
- Enabling and disabling of the bill acceptor in response to Cash Door, Cash Box, or COIN ACCEPTOR switch.
- Recognition of coupons or vouchers (WBA only).

Acceptance and Value of Bills

Insert a bill into the bill acceptor. The bill will be returned. An invalid bill is rejected and returned with nothing displayed.

An accepted valid bill will have the bill denomination displayed as a **d** in COIN IN and the denomination in CREDIT. THE number of coins or credits to be vended for the bill displays as a **c** in COIN IN and the value in CREDIT.

A rejected valid bill will generate one of the following codes:

Bill Rejection Codes	
Code	Description
8A	Rejected by the Machine
8B	Rejected by the Bill Acceptor
8C	Failure; Abnormal
8D	Stacker Full

Common Reasons for 8a Codes

8a means that the bill was rejected by the game. The bill denomination could be incompatible with the machine's coin denomination. For example, a $1 bill cannot be accepted by a $5 machine.

Credits vended for the bill would cause the game to exceed the credit limit (Option 51). For example, a $5 game with 990 credits and a credit limit of 1000 cannot add 20 credits from a $100 bill transaction.

Bill Acceptor Doors

Open the cashbox door or toggle the COIN ACCEPTOR switch on the MPU assembly. The bill acceptor should refuse all bills.

WBA Coupon/Voucher Acceptance

With the JCM® WBA bill acceptor, a coupon or voucher is identified by a display of **d** in COIN IN and **coup** in CREDIT.

Coin Acceptor Test

The coin acceptor is active, indicated by the steady amber LED on the COD board or the green LED on the Coin Mechanisms CC-16 acceptor.

| - Revised, || - New
©2004 Bally Gaming and Systems

Diagnostic Tests and Functions

#3 - Input Test

Coin Acceptor Test

An accepted coin will cause **09**, Coin Credit, to appear in the first two digits of the CREDIT display. A count of accepted coins display in the right two digits of CREDIT.

A malfunction or improper coin travel will display as **0A**, Coin Error Signal, in CREDIT as indicated in the following table:

Input Ports		
Port	**Bit**	**Input Description**
0	0	Hold 1 Switch
0	1	Hold 2 Switch
0	2	Hold 3 Switch
0	3	Hold 4 Switch
0	4	Hold 5 Switch
0	5	Hopper Low (Probe) Switch
0	6	Coin Out Switch
0	7	Meter Detection
0	8	Belly Door Switch
0	9	Coin Credit Signal
0	A	Coin Error Signal
0	B	Change Switch
0	C	Spin Switch
0	D	Bet One Switch
0	E	Bet Max Switch
0	F	Cash/Credit Switch
1	0	Bill Door Switch
1	1	Drop Door Switch
1	2	Key Switch
1	3	Hopper Full (Probe) Signal
1	4	Bill Acceptor Busy Signal
1	5	Handle Signal
1	6	Stacker Switch
1	7	Tournament Switch
1	8	Bill Hopper Bill Out Signal
1	9	Bill Hopper Diverter Signal
1	A	Bill Hopper Present Switch
1	B	Bill Hopper Mid Signal
1	C	Bill Hopper Cassette In Switch
1	D	Bonus Trigger
1	E	Bill Hopper Rear Signal
1	F	Reserved
2	3	"Knockoff" Switch
2	4	Coin Mech Switch
2	6	Slant Door
2	9	Pseudo Coin Button
2	B	Drop/Diverter Optic

#4 - Hopper/Printer Test

To enter the Hopper/Printer Test, press and release the TEST button until **04 d** appears in WIN PAID, indicating the Hopper/Printer Test is selected. The Message Center display alternates between Coin and CouP. Press SPIN when the device appears.

Coin—The hopper attempts to pay out 10 coins.

As each coin is dispensed from the hopper, CREDIT increments from 0 to 10. Pressing the CHANGE button repeats the test. If an error occurs, the error code appears in the first two positions of the CREDIT display. Refer to the Malfunction and Game Codes table (page 2-39) for error descriptions. If the machine has a second hopper, press the SPIN button at the start to select the second hopper.

CouP—The printer will dispense a voided coupon or voucher.

#5 - Reel Function Test

The Reel Function Test verifies the reels are operating correctly. When started, the reels spin and stop at consecutive reel positions in reverse order (21-0). The spin-stop sequence continues until the test is exited.

To start the test, press and release the TEST button until **05 d** appears in WIN PAID, indicating the Reel Function Test is selected.

The reels index to the "0" position, then spin and stop at the highest number reel position. The CREDIT display shows the number of times the spin-stop sequence occurred. After a brief pause the reels spin and stop at the next lower position.

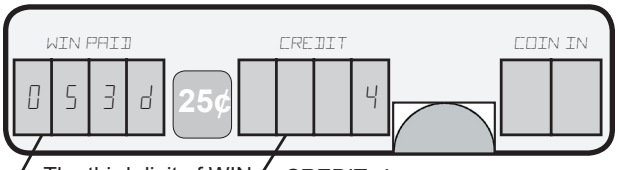

The third digit of WIN PAID shows which reel malfunctioned. Example, reel 3.

CREDIT shows the number of reel malfunctions for all reels

If a reel malfunctions during the spin cycle, the reel number appears in the third position of WIN PAID. The total number of reel malfunctions appears in the CREDIT display. When the reels spin again, the CREDIT display returns to show the number of correct reel spins.

Note: Holding CHANGE when entering Test #5 initiates a reel calibration and store the reel-stop center position in SafeRAM™.

Diagnostic Tests and Functions

#6 - Reel Tape Test

Test #6 provides a means for the Operator to confirm that the reel symbols are in the correct positions and match the information listed in the SMI document.

To begin, press and release the TEST button until **06 d** appears in WIN PAID, indicating the Reel Tape test is selected. The reels slow-spin to position 0 and stop. After a pause the reels simultaneously advance to position 21. The CREDIT display shows the reel position. The sequence continues until this test is exited.

#7 - Reel Tilt and System Reset Records

Test #7 displays the number of reel tilts and system resets recorded.

To enter, press and release the TEST button until the **07 d** appears in WIN PAID, indicating Reel Tilt and System Reset Records is selected. WIN PAID shows a **2** in the third position indicating information on reel tilts is being displayed. The CREDIT display shows the total number of reel tilts that occurred.

To view information on tilt types **4** through **7,** turn the audit key switch once. To view information on resets **8** through **b**, turn the audit key switch again. The Message Center automatically cycles through the reset types. The reset type number appears in the third position of WIN PAID, and the total number of tilts appears in the CREDIT display.

An MPU board with CPU error resets should be removed from service.

Tilt	Description
2	Reels Moving Improperly
4	Accelerating Improperly
5	Running Improperly
6	Decelerating Improperly
7	Reels in Wrong Position
8	Power Fail Resets
9	Door Resets
A	Hardware Resets
B	CPU Error Resets

Note: Reel tilts generated with the main door open are not recorded.

#8 - Slot Communications

The Slot Communication test confirms the serial ports are working properly. The test checks for shorts and opens.

Press and release the TEST button until **08 d** appears in WIN PAID, indicating the Slot Communications test is selected. A dash (**-**) appears in the CREDIT display if a channel is not found.

Note: Test #8 cannot test signal reception without loopback jumpers installed.

Next, **081d** appears in WIN PAID. The test checks for shorts on ports 1A, 1b, 2A, 2b, 3A, and 3b. An **S** appears in the CREDIT display if a short exists. When the machine is finished testing for shorts, the message **082d** appears in the WIN PAID at which time a test pulse is transmitted. Each receiving port is tested for reception of a signal. Physical connection is required. The following table lists the ports and its locations on the game:

Port	Duart	Name	Location	Connector	Jumper
0	1A (U38)	Link RS-485	Backplane Board	J14	CBL-30284-0001
1	1B	Auxiliary	MPU Board	J3	CBL-30293-0001
2	2A (U39)	Bill Acceptor	Backplane Board	J4	CBL-20243-0001
3	2B	System	Backplane Board	J10	CBL-30298-0001
4	3A (U37)	Spare RS-232	Backplane Board	J18	CBL-30283-0001
5	3B	Spare RS-485	Backplane Board	J15	CBL-20239-0001

#9 - Display Test

Test #9 tests the Message Center. Observe to make sure all LED segments in each of the 10 display positions are properly functioning.

Press and release the TEST button until **09 d** appears in WIN PAID, indicating the Display test is selected. A pattern cycles in the Message Center that illuminates each segment and decimal point.

| - Revised, || - New
©2004 Bally Gaming and Systems

Diagnostic Tests and Functions

#10 - Payout Test

The Payout test confirms that reel symbol combinations match the game's pay table as it appears on the feature glass. By positioning the reel symbols on the payline, entering a wager, and pressing SPIN, the win amount appears in WIN PAID. It should match the glass for the same winning combination.

Note: Jackpot signals through connector J13 are disabled to prevent false progressive win lockups. See Option 80 (page 2-13).

Press and release the TEST button until the message **10 d** appears in WIN PAID, indicating the Payout test is selected. Press and hold CHANGE. The message **"rl 1"** appears in CREDIT, indicating reel one is selected. While holding CHANGE, press the SPIN button. Reel one moves to the next stop position. Release and press SPIN (still holding down the CHANGE button) until the desired reel symbol lines up on the pay line, then release the CHANGE button. Repeat to select positions for the remaining reels.

After selecting the reel positions, press BET ONE to select the number of credits to wager. Press SPIN. The CREDIT display shows the win for the reel-symbol combination, the wager, and the credits to be paid from the hopper.

Repeat the procedures above to confirm payouts for any reel combination and wager.

#11 - Game Optioning

Game Optioning is set from Diagnostic Function #11. See the Machine Options section (page 2-14) for detailed instructions on accessing and setting options.

#12 - Peripherals Test

Test #12 allows the operator to evaluate peripheral devices on the ProSlot® 6000.

The results of the test are indicated in the Message Center. Each value shows for two seconds before automatically advancing to the next item. The Operator may also manually advance by successively pressing BET MAX, or may pause the display by pressing and holding SPIN.

To access, press and release the TEST button until **12 d** appears in WIN PAID, indicating the Peripherals test is selected.

Win Paid	Credit	Device
121D	Value	DIP Switch DS1 in Hexadecimal
122D	Value	DIP Switch DS2 in Hexadecimal
123D	Value	DIP Switch DS3 in Hexadecimal
124D	Value	Battery Voltage in Hexadecimal
125D	- 0	Bet One Sound at Current Volume Level
125D	- 1	Bet Max at Full Volume (Alarm)
126D	Value	Current Real Time Clock
127D	E400	Expanded EPROM Memory Status for 2MG

The third digit in WIN PAID shows the identification number for each item in this test. For the first item, **121d** appears in the display. The last two digits of the CREDIT display show the settings of DIP Switch DS1 in hexadecimal representing the value of the eight switches. Refer to the following table to determine the switch settings:

SW 1 & 5	SW 2 & 6	SW 3 & 7	SW 4 & 8	Hex Digits 1st & 2nd
ON	ON	ON	ON	0
OFF	ON	ON	ON	1
ON	OFF	ON	ON	2
OFF	OFF	ON	ON	3
ON	ON	OFF	ON	4
OFF	ON	OFF	ON	5
ON	OFF	OFF	ON	6
OFF	OFF	OFF	ON	7
ON	ON	ON	OFF	8
OFF	ON	ON	OFF	9
ON	OFF	ON	OFF	A
OFF	OFF	ON	OFF	B
ON	ON	OFF	OFF	C
OFF	ON	OFF	OFF	D
ON	OFF	OFF	OFF	E
OFF	OFF	OFF	OFF	F

The first digit represents switches 5-8. The second digit is switches 1-4. For example, a value of **11** for DS1 can be interpreted as 1 = switches 5 through 8 = OFF, ON, ON, ON; 1 = switches 1 through 4 = OFF, ON, ON, ON. The value **11** indicates that the machine is configured for SAS® EFT protocol v4.x or v5.x with no bonus. Refer to the DS1 Switch Communication Protocol table (page 2-9).

DIP Switch settings for DS2, display **122d**, and DS3, display **123d,** can be determined in a similar manner.

When **125d** appears, CREDIT shows **0** in the last digit. The diagnostic function sends the BET ONE sound to the speaker at the current volume level. After two seconds, the last digit of CREDIT shows **1**. The diagnostic function then sends the alarm sound, which is the BET MAX sound at full volume. It requires jumper JW18 to be installed on the MPU board. Refer to the Jumper table (page 2-9).

©2004 Bally Gaming and Systems

Diagnostic Tests and Functions

#12 - Peripherals Test, cont.

When **126d** appears, CREDIT displays the current value of the real time clock in a series of readouts. The first is the month as 01 to 12, and the day as 01 to 31. After two seconds, the next cycle is two digits of the year as 00 to 99, and the day of the week as 01 to 07. Next is the time in hours as 00 to 24, and the minutes as 00 to 59. After two seconds, the seconds as 00 to 59.

When WIN PAID shows **127d**, the CREDIT display shows the status of four megabits of EPROM memory. CREDIT shows PASS if the full four megabits of expanded EPROM memory are functional. If not, it shows an offset address where the test failed. To obtain a PASS, 4Mb EPROMs must be installed and jumper JW2 must be in the 4Mb position. A display of **E400** is normal if the MPU board is properly configured with 2Mb EPROMs.

#13 - Data Vault™ Records

If the Data Vault™ is installed, Test #13 will load the contents of the Data Vault™ into RAM and display it in the Message Center in the manner of machine meter groups (page 2-21). The information shown is described in the following table:

Sub Group	Name	Description
00	Total In	Increments for each coin or credit wagered.
01	Total Out	Increments for each unit won by a Player without a win lockup.
02	Attendant Paid	Increments for each credit paid by an Attendant upon a jackpot lockup.
03	Coin Drop	Increments for each coin diverted to a container because the hopper was full.
04	Door Opens	Times the main door of the machine was opened with power ON.
05	Games Played	Increments once for each completed game.
06	Super Jackpots	Number of times the top award(s) have been won when Option 7, Number of External Jackpots, is greater than zero.

If the unit is defective, WIN PAID indicates the error as “bb-n”, where “n” is the error code according to the following table:

Code	Description
1	No Response
2	Bad Data Transfer
3	No Response and Bad Data
4	Bad CRC
5	No Response and Bad CRC
6	Bad Data and Bad CRC
7	No Response, Bad Data, and Bad CRC

#15 - Hopper Dump

Test #15 is designated for Market Code 16, UK. To begin test, press SPIN. The amount configured for Machine Option 75 is paid to the hopper, and is displayed in the WIN PAID meter.

If the amount of coins in the hopper is less than the amount set in Option 75, Coins to Dispense, the WIN PAID meter reads X/LESS. "X" being the difference between the amount set in Option 75 and the actual amount of coins in the hopper.

If the amount of coins in the hopper is equal to the amount set in Option 75, the WIN PAID meter reads X/FULL. "X" being the amount set in Option 75.

If the amount of coins in the hopper is more than the amount set in Option 75, the WIN PAID meter reads X/PLUS. "X" being the difference between the actual amount of coins in the hopper, and the amount set in Option 75.

To pause the test, press SPIN again. To abort the test, press COLLECT or close the door.

The hopper turns off if no coins are dispensed within 3 seconds, the amount of coins set in Option 75 is dispensed, the door is closed or COLLECT is pressed, or if a tilt, malfunction, or power surge occurs.

#16 - Topbox Test

Test #16 verifies the proper operation of a topbox feature. The specific operation depends upon the feature installed.

| - Revised, || - New
©2004 Bally Gaming and Systems

Troubleshooting

Overview

This section includes resolutions for common malfunctions. Charts defining the numerical codes for malfunctions and normal game operations are included.

Power ON Malfunctions

If the reel and feature fluorescent lamps do not illuminate, check the following:

1. Turn power switch OFF and confirm the machine is plugged into a powered, grounded outlet.
2. Using the overall wiring diagram as a reference, confirm the power supply is properly connected.
3. Check circuit breakers.
4. Confirm the power switch is connected and functioning.
5. Check for loose or frayed wires.
6. Observe the system reset LED on the MPU board. It should illuminate briefly on power ON.

Tilt Messages

If a tilt occurs, the machine exhibits the following:

1. The numerical tilt code displays in WIN PAID.
2. The machine will not accept or dispense coins or bills.
3. All game play is suspended until the condition is resolved by authorized service personnel.

Coin Acceptor Malfunctions, 2x Series Exception Codes

The ProSlot® 6000 contains a coin acceptor with built-in security features to prevent cheating. The most common problems are coins jamming in the bill acceptor because of a bent coin, or shingling from coins inserted at a high rate of speed. For a coin jam, or a 2x code, check the following:

1. If jammed, open the door and remove the bill acceptor module. Once removed, coins can be gently extracted with a small screwdriver or similar tool.
2. Confirm the coin optic decoder board optic sensors and prism are clean. Dirt can block the light path and prevent proper operation.

The acceptor module can be quickly replaced. See Module 8, Peripherals, for further information.

Hopper Malfunctions, 3x Series Malfunction Codes

If a hopper malfunction occurs, a **3x** tilt code displays. The hopper control circuit board also includes status LEDs. Common hopper malfunctions include hopper jams, empty hoppers and jammed mixers. If these problems occur, check the following:

1. Hopper jams usually occur because of a bent coin stuck under the hopper knife, or foreign objects freezing the mixer or pinwheel.
2. An empty hopper condition exists when no coins exit the hopper for approximately 15 seconds. This can be a hopper out of coins, or a hopper that has jammed.
3. Ensure the hopper plug is firmly seated in the connector. Confirm the hopper cable is connected and no wires are frayed or broken. On rare occasions, the hopper motor or control board may need replacement.

If a **30** code for hopper overpays displays, the machine should be taken out of service until hopper operation has been checked through the machine's diagnostics functions (Test #4). The machine should also be checked for possible tampering. A one-coin overpay may indicate a faulty hopper control board. If the problem persists, contact a Bally Field Service Technician.

A **31** code coin-out jam may indicate tampering or defective hopper components. Always check the hopper control board LEDs for activity indicated in the following chart:

Hopper LED	Error Description
Green (FWD) LED Flashing	A reverse entry condition occurred. The dual optic switches detected an incorrect direction of coin travel and notified the microcontroller. It may be caused by a failed optic.
Red (REV) LED Flashing	A coin reverse condition occurred. The dual coin-out optic switches detected an incorrect transition while trying to clear a coin jam.
Red and Green LED's Flashing	An external light source struck the optic switch. The optic switches are modulated and an out-of-phase light source was detected.

Troubleshooting (cont.)

Reel Malfunctions, 4x and 7x Series Malfunction Codes

Reels unable to find the proper stop position result in 4x tilts. 7x tilts are from movement after stopping. Check the following:

1. The optic sensors are not clean. Dirt may block the light path through the code ring of the reel.
2. Check alignment of the code ring to the opto-interrupter on the reel control board.
3. Check for a loose connection of the reel cable.
4. Ensure proper calibration by entering Test #5 and holding the CHANGE button (See #5-Reel Function Test page 2-35).

Memory Malfunctions, 8x Series Malfunction Codes

The ProSlot® 6000 enters a self-test upon each system reset (power or RESET button). A malfunction in system memory will generate an 8x code and flash the tower and button lamps at a coded rate. Refer to the following table for flash codes:

Flash Rate (Per Second)	Error
1	Main EPROM Checksum Error (U28 and U43)
2	Personality EPROM Checksum Error (U18 and U20)
3	Volatile RAM Write/Read Failure (U30 and U45)
4	Non-Volatile RAM (SafeRAM™) Write/Read Failure (U30 and U45)
Continuous	Battery Low (BAT1)

Communication Errors, 9x Series Malfunction Codes

If the machine is configured for S/MPI or VLC host protocol (See Game Optioning on page 2-14 for Progressive Type or Terminal ID), faulty operation will generate one of the following tilt codes:

Code	Message	Description
91-0	No Serial Traffic Found Within the Last 500 Milliseconds	The machine is not receiving data from the progressive controller. This is most likely caused by an open connection between the machine and the progressive controller, or incorrect configuration of the progressive controller.
91-1	Serial Checksum Error	The data received by the machine is not the same data sent by the progressive controller. This can be caused by an intermittent connection, or too much noise on the data lines.
91-2	Option Error	Results when Option 02, Progressive Type, is set to 0004, and Option 78Lo, Machine Number, is set to 0000.
91-4	Mystery Machine Pay Timing Error	Jackpot award data from the progressive controller is present in the serial stream at an inappropriate time. Actuate the audit key switch and observe the jackpot level in the right-most digit of the WIN PAID display (preceded by EHP), and the jackpot amount in the CREDIT display. A key switch activationis required for each jackpot award present. If the condition persists, a loss of communication between the machine and the progressive controller may have occurred.
91-5	Jackpot Information Missing	No jackpot data from MAPS Atomic Progressive Controller.
91-7	Game Error Lockout	Host status poll timeout was detected by the game.
91-8	Host Defined Lockout in Configuration	Game disabled by holiday/non-holiday enable/disable configuration.
91-9	Game in Host Configuration	Host is in the process of configuring the game.
91-A	Game Not Configured by Host	The Host has not configured the game.
91-B	Game in Host Disable	The game has been disabled by the Host.
91-C	Game Disabled by Daily Timeout	The game has been disabled by the daily poll timeout shutdown.
91-D	Game Disabled for Status	The game has been disabled by the Host disable flag in the status poll.
91-E	Even Log Full	The event log has more than 1200 events.
EP EP HP	Awards Available but not Acknowledged by Progressive Controller	The alternation of EP, EP, HP in the WIN PAID display indicates the pulse link is not operating correctly. It can be caused by a machine tilt between coining and payout, or a system reset (including doors) between coining and payout. Activate the audit key switch and observe EP PD on the WIN PAID display. A 91-4 display may result if the progressive controller does not recognize acknowledgment of the award by the machine.

| - Revised, || - New
©2004 Bally Gaming and Systems

Malfunction and Game Codes

Code	Description	Definition
20	Coin In Jam	The optics on the coin optic decoder board have been blocked for too long.
21	Inappropriate Coin In	A coin has been accepted by the machine after the maximum number of extra coins wagered have been registered. Extra coins up to the maximum (currently 15) are paid from the hopper upon completion of the game.
22	Invalid Coin	A coin has passed the coin optics during a reel spin.
23	Coin Not Sensed	Coin was not sensed by the drop optic (DS2-8=OFF Diverter Optic Installed)
24	Coin Reverse	A coin was sensed traveling from bottom to top of the optic block.
50-26[1]	Bill Paused	A bill was detained from entering the bill acceptor stacker within the normal time.
50-27[1]	Bill Jam	A bill was prevented from entering the stacker.
50-29[1]	Bill Acceptor Communication Error	Communication between the bill acceptor and the machine has failed.
30	Hopper Overpay	More coins than expected have been sensed by the hopper's coin-out optic during a payout.
31	Hopper Coin-Out Jam	The hopper's coin-out optic has been blocked too long (see Troubleshooting, Hopper LED Error Codes).
32	Hopper Empty	The hopper circuitry has run in forward direction for longer than 15 seconds with no coins sensed by the coin-out optic.
33	Reset During Payout	A system reset has occurred while the hopper was running.
5[x]-36[1]	Printer Failure	General Printer Failure
5[x]-37[1]	Printer Jammed	The printer is jammed at the platen.
5[x]-38[1]	Printer Empty	The printer is out of paper.
5[x]-39[1]	Printer Low[3]	The paper sensor has detected a low paper condition.
40	Reel Initialization Error	The reels were unable to complete initialization after a system reset.
41	Reel #1 Improper Spin	The reel did not spin to the expected position.
42	Reel #2 Improper Spin	The reel did not spin to the expected position.
43	Reel #3 Improper Spin	The reel did not spin to the expected position.
44	Reel #4 Improper Spin	The reel did not spin to the expected position.
45	Reel #5 Improper Spin	The reel did not spin to the expected position.
50	Slot Door Open	The main door switch senses the door is open.
51	Belly Door Open	The belly door switch senses the door is open.
52	Bill Acceptor Stacker Access	The stacker access switch senses the door is open.
53	Lower Door Open (Slant)	The lower door switch senses the door is open.
54	Drop Door Open	The drop door switch senses the door is open.
55	Bill Acceptor Stacker Removed	Signal received from the bill acceptor that there is no stacker.
|| 56[4]	Logic Door Access	The MPU board is removed or not seated correctly.
|| 57[4]	System (sView/Tahoe) Door Access	The sView door is open.
|| 58[4]	Latched Door Detector Board	The battery is low for the latched (Main, Logic, System, and Cashbox doors) input circuit.
60	Reset During Bill Change	A system reset has occurred during a bill transaction.
65	Mechanical Meter Disconnect	The electromechanical meters are disconnected from the machine (Market Codes 3, 4, 12, 28, and 29).

Code	Description	Definition
70	Door Open During Reel Spin	Any of the door switches have sensed a door open during a reel spin.
71	Reel #1 Movement	The reel moved at an inappropriate time.
72	Reel #2 Movement	The reel moved at an inappropriate time.
73	Reel #3 Movement	The reel moved at an inappropriate time.
74	Reel #4 Movement	The reel moved at an inappropriate time.
75	Reel #5 Movement	The reel moved at an inappropriate time.
77	Secondary Device Communication Fault During Game/Topbox Wheel Feature Tilt	Topbox tilt condition has occurred in the Monte Carlo and Lucky Wheel machines.
80[2]	ROM Checksum Error	The checksum of the Main program (U12, U15, U3, U4), or the Personality (U20, U18) does not match the expected checksum.
81[2]	Battery Low	SafeRAM™ battery is below 2.2 VDC.
82	Door Open with Power OFF	The machine door was opened while the main power was OFF (requires JW11 in).
83[2]	SafeRAM™ Error	SafeRAM™ failed to retain information during self-test.
83F-0	Invalid SafeRAM™ EPROM	Wrong EPROM's used for SafeRAM™ Clear.
83F-1	Invalid Main EPROM	Wrong Main EPROM's detected after SafeRAM™ Clear.
83F-2	Invalid Personality EPROM	Incompatible Personality EPROM's detected after SafeRAM™ Clear.
83F-3	Invalid Coin Denomination	Coin denomination not supported in Market Code.
84[2]	RAM Error	Volatile RAM failed to retain information during a self-test.
85	MPU Removed with Power OFF	The MPU board assembly was disconnected from the backplane while power was OFF (requires JW15 and JW21 in).
88	Catastrophic Failure	The MPU board has failed for an unknown reason (if SafeRAM™ Clear does not resolve error code, replace MPU board).
89	Cashout to Host Error	Cashout to host fails with AFT enabled and cashout to Host set to Hard. Open and close door to clear error code.
90	Display Error	The controller for the LED message center or vacuum fluorescent display has failed.
91	Communication Error	The machine is expecting and not receiving serial communication from the progressive controller (refer to Troubleshooting, Communication Errors). The machine will not tilt, and requires a SafeRAM™ clear to resume operation if the door is opened before releasing progressive win lockup.
91-0	No Communication	No serial traffic found within the last 500 milliseconds.
91-1	Serial Checksum Error	Data received by the machine is not the same as sent by the controller.
91-2	Optioning Error	Conflicting machine options (for example 02=04 and 78Lo=0).
| 91-4	Mystery Progressive Hit during Game Over	Award data is in the serial stream at an unexpected time. A Handpay is required for the Mystery Award. Turning the Keyswitch displays the Handpay information. The tilt will clear in five seconds and the amount awarded is displayed in WIN PAID.
91-5	Jackpot Missing	MAPS jackpot information missing from APC communication.
91-7	Game Error Lockout	Host status poll timeout detected by game.
91-8	Host Defined Lockout in Configuration	Game disabled by holiday/non-holiday enable/disable configuration.
91-9	Game in Host Configuration	Host is in the process of configuring the game.

Malfunction and Game Codes (cont.)

Code	Description	Definition
91-A	Game Not Configured	Host has not configured the game.
91-B	Game in Host Disabled	Game disabled by the Host.
91-C	Host Disabled for Timeout	Game disabled by the Host daily poll timeout shutdown.
91-D	Host Disabled	Game disabled by Host disable flag in status poll.
91-E	Even Log Full	More than 1200 events are in the event log.
EP EP HP	Awards Available But Not Acknowledged by Controller	Awards available but not acknowledged by progressive controller.
HDIS	Communication Loss	No communication with the SAS® Host for five seconds.
99	Severe Failure	An error has been detected with the MPU board. A diagnostic self check has determined that memory is uncorrupted. The error is recoverable.

[x]Door Codes: 50=Main Door, 51=Belly Door, 52=Bill Acceptor Cash Box Door, 53=Slant Lower Door, 54=Drop Door, 55=Bill Acceptor Cash Box.

[1]Malfunction codes with prefix "5x" appear only while the door is open.

[2]Malfunction codes 80, 81, 83, and 84 are part of the machine self-test during power ON or a system reset. Upon an error, all of the machine's lamps flash. The lamps flash one or more times per second depending on the problem.

[3]The tower service light will flash for $^1/_2$ second every 2 $^1/_2$ seconds.

[4] Requires Latched Door Detector Board for proper operation.

The following codes pertain to West Virginia only:

||

Code	Description	Definition
91-p	SAS Poll Timeout	SAS host not polling game.
91-d	Game in ROM Signature Calculation	Game receives a ROM signature request from the host.
91-b	Game Locked Out by the Host	Game locked out by the host.

| - Revised, || - New
©2004 Bally Gaming and Systems

Glass and Decals

MODULE 3A

MK3A-S6MOD-0003

GLASS AND DECALS

©2003 BALLY GAMING, INC. ALL RIGHTS RESERVED

Bally Gaming and Systems
6601 South Bermuda Road, Las Vegas, NV 89119

For Customer Service and information, call or FAX:
1-877-GO-BALLY (877-462-2559) in the U.S. and Canada
+1-702-896-7772 outside the U.S.
896-7772 in Las Vegas
FAX: +1-702-896-7710
or visit our website at http://www.ballygaming.com

Glass and Decals Table of Contents

ProSlot® 6000 ..... 3A-6

Cabinet Styles 3A-6

G592... Feature Glass (WT) 3A-7

G600... Feature Glass (CT) 3A-16

G609... Feature Glass (WR) 3A-21

G692... Feature Glass (WTE Cabinet with Speakers) 3A-31

G693... Feature Glass (Round Cabinet with Speakers) 3A-32

G694... Feature Glass (CT Cabinet with Speakers) 3A-33

G772... Feature Glass (Wide Top Cabinet with Credits) 3A-33

G593... Reel Glass 3A-34

G690... Reel Glass (With Bill Acceptor) 3A-35

G779... Reel Glass (Credit) 3A-36

G595... Display Glass 3A-37

D400... Top Award Decals 3A-46

D305... Coin Play Decals 3A-48

D310... Coin Play Decals 3A-49

D156... Bill Acceptor Bill Value Range 3A-49

D150... Bill Acceptor Bezel Decal 3A-50

D315... Lockup Decal 3A-51

D100... Denomination Decal 3A-53

ProSlant® 6000 / 6000E 3A-56

Slant Feature Housings 3A-56

G605... Feature Glass, Standard 3A-57

G679... Feature Glass, Radial 3A-60

G606... Reel Glass 3A-61

System Overlays 3A-62

©2003 Bally Gaming and Systems

ProSlot® 6000

Feature Glass G609... (WR), G600... (CT), G592... (WT)

Lockup Decal D315**...**

Reel Glass G593..., G705... Vivo™

Denomination Decal D100...

Display Glass G595...

Top Award D400... (If not a progressive award) There can be up to 4 “Top Award” Decal inserts.

Player Tracking system. Usually consists of cardreader, keypad, and display with overlay. See Module 10, SDS Parts Reference.

Coin Play Decal D310... or D305...

Bill Acceptor Bill Value Range D156...

Bill Acceptor Bezel Decal D150...

©2003 Bally Gaming and Systems
| - Revised, || - New

Cabinet Styles

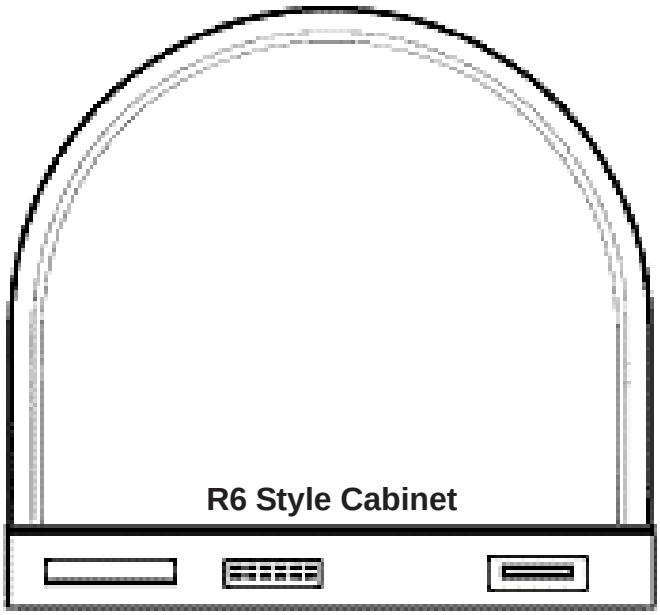

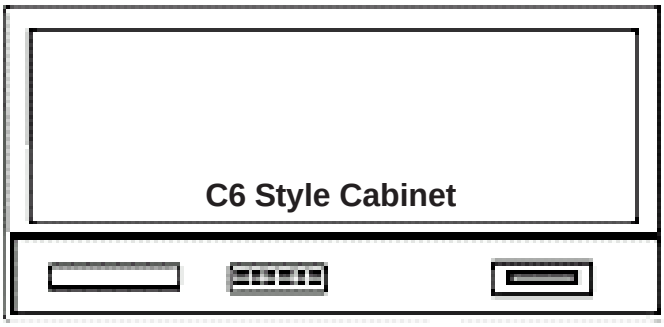

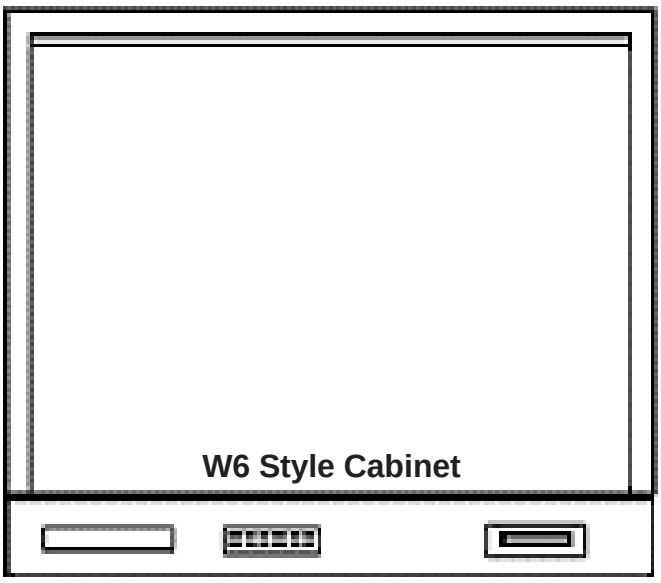

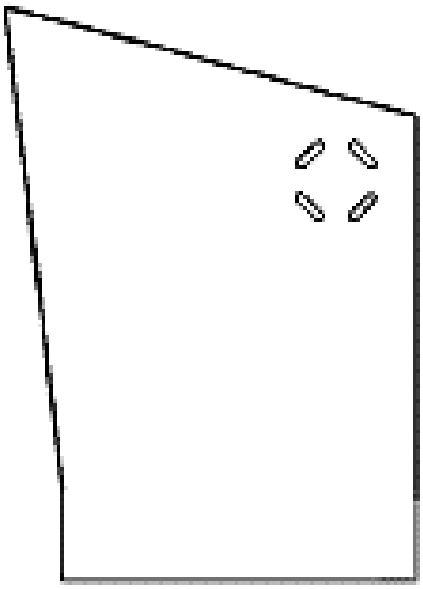

Front

Side

©2003 Bally Gaming and Systems

ProSlot® 6000

G592... Feature Glass (WT)

GLASS	ART FORM	DESCRIPTION
G592-00186-$5++	APT-5014	Ball Of Fire, $5 Pays
G592-00046-$5++	APT-5015	Deuces Wild, $5 Pays
G592-00046-++++	APT-5015	Deuces Wild, Coin Pays
G592-00046-	APT-5015	Deuces Wild, Coin Pays
G592-00105-TRIP	APT-5016	Win A Trip, Coin Pays
G592-00158-++++	APT-5021	Wild Elephant, Coin Pays
G592-00185-++++	APT-5023	Ball Of Fire, Coin Pays
‖ G592-00185-FR++	APT-5023	Ball Of Fire, Coin Pays , French
‖ C592-00185-SP++	APT-5023	Ball Of Fire, Coin Pays , Spanish
G592-00186-	APT-5024	Ball Of Fire, Coin Pays
G592-00186-FR++	APT-5024	Ball Of Fire, Coin Pays , French
G592-00186-++++	APT-5024	Bally Of Fire, Coin Pays
G592-00289-++++	APT-5025	Win 2, Coin Pays
G592-00288-++++	APT-5026	Win, Coin Pays
G592-00288-FR++	APT-5026	Win, French, Coin Pays
‖ C592-00288-SP++	APT-5026	Win, Spanish
G592-00432-++++	APT-5031	Dolphin Mania, Coin Pays
G592-00587-12MI	APT-5033	Euro Pot, Coin Pays
G592-00039-$10+	APW-5001	Bally Las Vegas Only, Custom, $10 Pays
G592-00039-$2++	APW-5001	Bally Las Vegas Only, Custom, $2 Pays
G592-00039-$25+	APW-5001	Bally Las Vegas Only, Custom, $25 Pays
G592-00039-++++	APW-5001	Bally Las Vegas Only, Custom, Coin Pays
G592-00298-$5++	APW-5002	Bally Las Vegas, $5 Pays
G592-00412-++++	APW-5005	Hilton Kansas City Wild Party, Coin Pays
G592-00263-FR++	AT4-5005	Luciene Barriore 7's, French
G592-00297-$5++	BAR-5003	Bally Bars, $5 Pays
G592-00094-++++	BAR-5004	Bars, Coin Pays
G592-00095-++++	BAR-5005	Bars, Coin Pays
G592-00096-++++	BAR-5006	Bars, Coin Pays
G592-00306-++++	BAR-5007	Bally Las Vegas. Jackpot Bars, Coin Pays
G592-00301-$1C+	BC7-5001	Bally Las Vegas, $100 Pays
G592-00127-$1C+	BC7-5004	Black Gold Colors, Golden Nugget, $100 Pays
G592-00127-++++	BC7-5004	Golden Nugget, $100 Pays
G592-00571-$1C+	BC7-5006	Custom Beau Rivage, $100
G592-00613-$1K+	BCP-5001	Paris Flur De Lei, $1000 Pays
G592-00613-$5C+	BCP-5001	Paris Flur De Lei, $500 Pays
G592-00614-$1C+	BCP-5002	Paris Flur De Lei, $100 Pays
G592-00604-PROG	BDM-5001	Betty Boop 2¢, Double Jackpot Devil Blazing 7's, Coin Pays
G592-00605-PROG	BDM-5002	Betty Boop 3¢, Double Jackpot Devil Blazing 7's, Coin Pays
G592-00606-PROG	BDM-5003	Betty Boop 5¢, Double Jackpot Devil Blazing 7's, Coin Pays
G592-00617-PROG	BDM-5004	Betty Boop Devil, Coin Pays
‖ C592-00759-PROG	BDM-5009	Betty Boop Devil Blazing 7's, Coin Pays, English
‖ C592-00759-FRMI	BDM-5009	Betty Boop Devil Blazing 7's, Coin Pays, French
‖ C592-00822-12MI	BDO-5001	Blazing 7's & $, Credits
‖ C592-00816-12MI	BDO-5002	Blazing Dollars & 7's, Credits
‖ G592-00703-PROG	BFB-5001	Betty Boop Roundup, Coin
‖ C592-00704-++++	BFB-5002	Betty Boop Roundup
‖ G592-00704-PROG	BFB-5002	Betty Boop Roundup, Coin
G592-00642-PROG	BFB-5003	Betty Boop Roundup, Coin Pays
C592-00704-++++	BFB-5004	Betty Boop Roundup
G592-00704-PROG	BFB-5004	Betty Boop Roundup, Coin
‖ C592-00746-++++	BFR-5001	Bonus Frenzy
G592-00674-++++	BFR-5001	Bonus Frenzy Coin Pay
‖ C592-00746-$5++	BFR-5001	Bonus Frenzy, $5 Pays
‖ C592-00784-12MI	BFR-5001	Bonus Frenzy, Coin Pays
‖ G592-00706-FR++	BFR-5001	Bonus Frenzy, Coin Pays, French
‖ G592-00706-SP++	BFR-5001	Bonus Frenzy, Coin Pays, Spanish
‖ C592-C0746-$2++	BFR-5001	Bonus Frenzy, Credits
‖ C592-00766-$5++	BFR-5002	Winning For Dummies, $5 Pays
‖ C592-00766-++++	BFR-5002	Winning For Dummies, Coin Pays
‖ C592-00766-FR++	BFR-5002	Winning For Dummies, Coin Pays French
‖ C592-00766-12MI	BFR-5002	Winning For Dummies, Credits
‖ C592-C0869-++++	BFR-5003	99 Bottles Of Beer, Credits
‖ C592-00764-12MI	BFR-5003	Triple Bonus Frenzy
‖ C592-C0764-$2++	BFR-5003	Triple Bonus Frenzy, $2 Pays
‖ C592-C0764-$5++	BFR-5003	Triple Bonus Frenzy, $5 Pays
‖ C592-00764-++++	BFR-5003	Triple Bonus Frenzy, Coin Pays
‖ C592-00764-FR++	BFR-5003	Triple Bonus Frenzy, Coin Pays French
‖ C592-00771-PROG	BFR-5005	Popeye Bonus Frenzy, Coin Pays
‖ C592-00770-++++	BFR-5006	5x Bonus Frenzy, Coin Pays
‖ C592-C0770-$2++	BFR-5006	5x Bonus Frenzy, Credits, $2 Pays
‖ C592-C0868-++++	BFR-5006	Fire Ball Frenzy, Credits
‖ C592-00789-++++	BFR-5007	Bonus Frenzy, Coin Pays
‖ C592-00831-$5++	BFR-5008	Bonus Frenzy, $5 Pays
‖ C592-00790-++++	BFR-5009	Winning For Dummies, Coin Pays
‖ C592-00794-++++	BFR-5010	Richie Rich, Coin Pays
‖ C592-00794-FR++	BFR-5010	Richie Rich, French
‖ C592-00795-++++	BFR-5011	Andy Capp, Coin Pays
‖ C592-00799-12MI	BFR-5012	Blondie Frenzy, Coin Pays
‖ C592-00799-FRMI	BFR-5012	Blondie Frenzy, French
C592-00799-12MI	BFR-5013	Blondie Frenzy, Coin Pays
C592-00799-FRMI	BFR-5013	Blondie Frenzy, French
‖ C592-00800-12MI	BFR-5014	Betty Boop Frenzy, Coin Pays
C592-00800-12MI	BFR-5015	Betty Boop Frenzy, Coin Pays
‖ C592-00867-++++	BFR-5020	Fire Ball Frenzy, Credits

GLASS	ART FORM	DESCRIPTION
‖ C592-00839-FR++	BFR-5021	Blondie Frenzy, Coin, French
‖ C592-00839-FRMI	BFR-5021	Blondie Frenzy, Coin, French
‖ C592-00865-++++	BFR-5022	Scatter Frenzy, Credits
‖ C592-00862-++++	BFR-5025	SNL Frenzy, Credits
G592-00247-FR++	BL2-5001	2nd Chance Blazing 7's Bally France, Coin Pays
G592-00247-++++	BL2-5001	2nd Chance Blazing 7's, Coin Pays
G592-00372-++++	BL3-5001	3's a Charm, Coin Pay
G592-00372-FR++	BL3-5001	3's a Charm, French, Coin Pays
G592-00535-++++	BL3-5002	3's a Charm, Coin Pays
‖ C592-00767-++++	BL4-5001	Blazing 7's, 4 Reel, Coin Pays 25¢
‖ C592-00767-12MI	BL4-5001	Blazing 7's, 4 Reel, Coin Pays 25¢
‖ C592-00767-FRMI	BL4-5001	Blazing 7's, 4 Reel, Coin Pays French
‖ C592-00818-++++	BL4-5002	Blazing 7's, 4 Reel
‖ C592-00768-++++	BL4-5002	Blazing 7's, 4 Reel, Coin Pays $1
‖ C592-00768-12MI	BL4-5002	Blazing 7's, 4 Reel, Coin Pays $1
‖ C592-00805-++++	BL4-5003	Blazing 7's 4 Reel/4 Credit, Credits
‖ C592-00805-12MI	BL4-5003	Blazing 7's 4 Reel/4 Credit, Credits
‖ C592-00805-FR++	BL4-5003	Blazing 7's 4 Reel/4 Credit, Credits, French
‖ C592-00805-FRMI	BL4-5003	Blazing 7's 4 Reel/4 Credit, Credits, French
G592-00040-PGMT	BL7-5007	Blazing 7's Coin Pays
G592-00040-$2++	BL7-5007	Blazing 7's, $2 Pays
G592-00040-$25+	BL7-5007	Blazing 7's, $25 Pays
G592-00040-$5++	BL7-5007	Blazing 7's, $5 Pays
G592-00040-$5MI	BL7-5007	Blazing 7's, $5 Pays
G592-00040-SP++	BL7-5007	Blazing 7's, Spanish, Coin Pay
G592-00170-++++	BL7-5012	ITT Sheraton Green, Coin Pays
G592-00171-++++	BL7-5012	ITT Sheraton, Purple, Coin Pays
G592-00295-$5++	BL7-5020	Blazing 7's, $5 Pays
G592-00008-$5++	BL7-5026	Royal 5l, English/French Canadian, Coin Pays
G592-00630-12MI	BL7-5026	Blazing 7's Red, Coin Pays
G592-00008-$5PG	BL7-5026	Blazing 7's, $5 Pays
G592-00121-BLUE	BL7-5026	Blazing 7's, Blue Background
G592-00008-++++	BL7-5026	Blazing 7's, Coin Pays
G592-00008-14MI	BL7-5026	Blazing 7's, Coin Pays
G592-00008-MICR	BL7-5026	Blazing 7's, Coin Pays
G592-00008-PGMT	BL7-5026	Blazing 7's, Coin Pays
‖ C592-00008-SPMI	BL7-5026	Blazing 7's, Coin Pays, Spanish
‖ C592-C0008-PGMT	BL7-5026	Blazing 7's, Credits
G592-00012-++++	BL7-5041	Reel Gems, Coin Pays
G592-00012-FR++	BL7-5041	Reel Gems, Coin Pays French
‖ G592-00013-$5++	BL7-5052	Reel Gems, $5 Pays
G592-00013-++++	BL7-5052	Reel Gems, Coin Pays
G592-00013-SP++	BL7-5052	Reel Gems, Coin Pays Spanish
G592-00013-FR++	BL7-5052	Reel Gems, French, Coin Pays
C592-00041-$5++	BL7-5053	Blazing 7's, $5 Pays
G592-00041-12MI	BL7-5053	Blazing 7's, Coin Pay
G592-00041-++++	BL7-5053	Blazing 7's, Coin Pays
G592-00087-PGMT	BL7-5053	Blazing 7's, Coin Pays
C592-00041-SP++	BL7-5053	Blazing 7's, Spanish, Coin Pays
G592-00102-++++	BL7-5056	Flaming 7's, Coin Pays
G592-00102-12MI	BL7-5056	Flaming 7's, Coin Pays
G592-00102-FR++	BL7-5056	Flaming 7's, Coin Pays French
G592-00102-SP++	BL7-5056	Flaming 7's, Spanish, Coin Pays
‖ G592-00040-++++	BL7-5057	Blazing 7's, Coin Pays
G592-00077-LN$2	BL7-5059	Majestic Lions, $2 Pays
‖ C592-00077-10MI	BL7-5059	Majestic Lions, MGM Only, $10 Pays
‖ C592-00077-25MI	BL7-5059	Majestic Lions, MGM Only, $25 Pays
G592-00077-$5++	BL7-5059	Majestic Lions, MGM Only, $5 Pays
G592-00077-LION	BL7-5059	Majestic Lions, MGM Only, Coin Pays
‖ C592-00624-$5++	BL7-5059	MGM, $5
G592-00624-12MI	BL7-5059	MGM, Coin Pays
G592-00117-++++	BL7-5060	Treasure Of The Nile, Coin Pays
‖ G592-00395-$1C+	BL7-5061	MGM Lions, $100 Pays
G592-00395-12MI	BL7-5061	MGM Lions, Coin Pays
G592-00395-++++	BL7-5061	MGM, Coin Pays
G592-00087-FCPG	BL7-5062	Blazing 7's, French Canadian, Coin Pays
G592-00343-$5MI	BL7-5062	Station 7's, $5 Pays
G592-00343-	BL7-5062	Station 7's, Coin Pays
G592-00132-++++	BL7-5067	Blazing 7's, Coin Pays
G592-00159-PROG	BL7-5070	Flamingos, Coin Pays
G592-00159-SPPG	BL7-5070	Flamingos, Spanish, Coin Pays
G592-00159-++++	BL7-5070	Mixed Flamingos, Coin Pays
G592-00177-PROG	BL7-5073	Trop World, Worlds Of Cash, Coin Pays
G592-00213-PROG	BL7-5077	Sheraton
G592-00213-$2++	BL7-5077	Sheraton, $2 Pays
G592-00213-$2PG	BL7-5077	Sheraton, $2 Pays
G592-00213-$5PG	BL7-5077	Sheraton, $5 Pays
G592-00368-12MI	BL7-5078	Marlin Mania, Coin Pays
G592-00246-$5PG	BL7-5081	Roman Rewards, $5 Pays
G592-00246-	BL7-5081	Roman Rewards, Coin Pays
G592-00249-PROG	BL7-5082	Sheraton Gold
G592-00265-	BL7-5082	Sheraton Gold, Coin Pays, Purple
G592-00270-	BL7-5082	Sheraton Gold, Green
G592-00291-++++	BL7-5084	Blazing 7's, Coin Pays
G592-00326-	BL7-5086	Monte Carlo, Coin Pays

©2003 Bally Gaming and Systems

ProSlot® 6000

G592... Feature Glass (WT) (cont.)

GLASS	ART FORM	DESCRIPTION
G592-00332-$10P	BL7-5087	Custom Monte Carlo Casino, $10 Pays
G592-00332-$25P	BL7-5087	Custom Monte Carlo Casino, $25 Pays
G592-00332-$5PG	BL7-5087	Custom Monte Carlo Casino, $5 Pays
G592-00332-	BL7-5087	Custom Monte Carlo Casino, Coin Pays
G592-00344-	BL7-5088	Blazing 7's, Coin Pays
G592-00338-$5MI	BL7-5088	Pink Flamingo $5 Pays
G592-00338-	BL7-5089	Pink Flamingo, Coin Pays
G592-00345-	BL7-5090	Pink Flamingo, Coin Pays
G592-00346-	BL7-5091	Kings Ransom Coin Pays
G592-00358-$5++	BL7-5092	Luxor Custom, $5 Pays
|| G592-00358-$5MI	BL7-5092	Luxor Custom, $5 Pays
G592-00358-	BL7-5092	Luxor Custom, Coin Pays
G592-00366-	BL7-5093	Saturn Rings Hilton, Coin Pays
G592-00369-	BL7-5094	New York New York, Coin Pays
G592-00371-	BL7-5095	Flamingo Fortune, Coin Pays
G592-00373-	BL7-5096	Circus Circus, Flying Fortune, Coin Pays
G592-00397-	BL7-5102	Binion's Bonanza, Coin Pay
G592-00399-FR++	BL7-5103	Fabulous Paris, French, Coin Pays
G592-00399-FRMI	BL7-5103	Fabulous Paris, French, Coin Pays
G592-00405-12MI	BL7-5104	Light Speed Jackpot, Coin Pay
G592-00406-12MI	BL7-5105	Light Speed Jackpot, Coin Pay
G592-00422-12MI	BL7-5108	Prima Dollars, Coin Pay
G592-00433-$5MI	BL7-5109	Blazing Gold, $5 Pays
G592-00433-12MI	BL7-5109	Blazing Gold, Coin Pays
G592-00434-12MI	BL7-5110	Flamingo Frenzy, Coin Pays
G592-00468-12MI	BL7-5112	Rio, Coin Pays
G592-00475-12MI	BL7-5115	Black And White Blazing 7's, Coin Pays
G592-00476-12MI	BL7-5116	Black And White Blazing 7's, Coin Pays
G592-00477-12MI	BL7-5117	Black And White Blazing 7's, Coin Pays
G592-00528-12MI	BL7-5119	Jackpots Galore, Coin Pays
G592-00529-12MI	BL7-5122	Jackpots Galore, Coin Pays
G592-00557-12MI	BL7-5124	Karl Marx Custom, Coin Pays
G592-00611-$2MI	BL7-5129	Treasures Of Venice, $2 Pays
G592-00611-12MI	BL7-5129	Treasures Of Venice, Coin Pays
G592-00612-$2MI	BL7-5130	Treasures Of Venice, $2 Pays
G592-00612-12MI	BL7-5130	Treasures Of Venice, Coin Pays
G592-00653-$1C+	BL7-5132	MGM Detroit $100 Majestic Lions
| C592-00699-PROG	BLB-5001	Blazing 7's Betty Boop, Coin Pays
|| C592-00731-PROG	BLB-5001	Blazing Betty, Coin Pays
G592-00421-++++	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G592-00421-0SPC	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G592-00421-1SPC	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G592-00421-12MI	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G592-00421-2PRG	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G592-00421-MICR	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G592-00421-OT++	BLD-5001	Blazing 7's Double Jackpot, English/French Canadian, Coin Pays
G592-00421-FR++	BLD-5001	Blazing 7's Double Jackpot, French, Coin Pays
G592-00505-2PRG	BLD-5002	Blazing 7's Double Deluxe
|| G592-00421-SPEC	BLD-5002	Blazing 7's Double Jackpot
|| G592-00421-2SPC	BLD-5002	Blazing 7's Double Jackpot, Coin Pays
|| C592-00421-SP++	BLD-5002	Blazing 7's Double Jackpot, Coin Pays Spanish
G592-00518-2PRG	BLD-5003	Black & White Double, 2 Meters
G592-00518-++++	BLD-5003	Black & White Double, Coin Pays
|| G592-00518-2SPC	BLD-5003	Black & White Double, Coin Pays
G592-00619-++++	BLD-5004	Blazing 7's Double Jackpot, Coin Pays
G592-00619-12MI	BLD-5004	Blazing 7's Double Jackpot, Coin Pays
| G592-00619-SP++	BLD-5004	Blazing 7's Double Jackpot, Coin Pays Spanish
G592-00619-S9DG	BLD-5004	Blazing 7's Double Jackpot, Coin Pays, Spanish
|| G592-00619-SPMI	BLD-5004	Blazing 7's Double Jackpot, Coin Pays, Spanish
G592-00619-FR++	BLD-5004	Blazing 7's Double Jackpot, French, Coin Pays
G592-00281-++++	BLF-5001	Trail Blazer, Coin Pays
G592-00281-FR++	BLF-5001	Trail Blazer, French, Coin Pays
G592-00393-SP++	BLF-5003	Blazing 7's Deluxe, Spanish, Coin Pays
C592-00393-12MI	BLF-5003	Blazing 7's Double Deluxe, Coin Pay
G592-00393-++++	BLF-5003	Blazing 7's Double Deluxe, Coin Pay
G592-00393-FR++	BLF-5003	Blazing 7's Double Deluxe, Coin Pay, French
G592-00393-MICR	BLF-5003	Blazing 7's Double Deluxe, Coin Pays
G592-00607-PROG	BLM-5001	Betty Boop's Big Hits Triple 7's, Coin Pays
G592-00608-PROG	BLM-5002	Betty Boop's Big Hits Triple 7's, Coin Pays
G592-00609-PROG	BLM-5003	Betty Boop's Big Hits Triple 7's, Coin Pays
G592-00618-PROG	BLM-5004	Betty Boop's Big Hit, Coin Pays
G592-00060-++++	BM7-5008	Black Gold, Coin Pays
G592-00060-PGMT	BM7-5008	Black Gold, Coin Pays
G592-00060-PROG	BM7-5008	Black Gold, Coin Pays
C592-00060-FR++	BM7-5008	Black Gold, Coin Pays French
G592-00272-++++	BM7-5010	Bally Las Vegas, Coin Pays
G592-00292-$10+	BM7-5014	Bally Blazing 7's, $10.00 Pays
G592-00292-$25+	BM7-5014	Bally Blazing 7's, $25.00 Pays
G592-00292-$5++	BM7-5014	Bally Blazing 7's, $5 Pays
C592-00157-++++	BM7-5025	Aladdin Lamps, Coin Pays
G592-00276-12MI	BM7-5026	UFO, Coin Pays
G592-00276-++++	BM7-5026	UFO, Coins
G592-00276-FR++	BM7-5026	UFO, French, Coin Pays
|| C592-00806-12MI	BM7-5027	EFX Mikohn Art, Coin Pays
|| G592-00202-$2PG	BM7-5027	Red Hot 7's, $2 Pays

GLASS	ART FORM	DESCRIPTION
|| G592-00202-PROG	BM7-5027	Red Hot 7's, Coin Pays
G592-00202-$5++	BM7-5027	Red Hot Blazing 7's, $5 Pays
G592-00202-$5MI	BM7-5027	Red Hot Blazing 7's, $5 Pays
G592-00202-++++	BM7-5027	Red Hot Blazing 7's, Coin Pays
G592-00202-12MT	BM7-5027	Red Hot Blazing 7's, Coin Pays
G592-00202-PGMT	BM7-5027	Red Hot Blazing 7's, Coin Pays
G592-00202-SP++	BM7-5027	Red Hot Blazing 7's, Spanish, Coin Pays
G592-00208-PROG	BM7-5028	EFX , Coin Pays
G592-00208-PG10	BM7-5028	EFX, $10 Pays
G592-00241-	BM7-5032	Gold Nugget Flamingo 7's, Coin Pays
G592-00241-++++	BM7-5032	Golden Nugget Flamingo 7's, Coin Pays
G592-00208-++++	BM7-5035	EFX, Coin Pays
G592-00305-$1PG	BM7-5037	Caesars Gold, $1 Pays
G592-00342-	BM7-5038	Blue Station, Coin Pays
G592-00341-	BM7-5038	Red Station 7's, Coin Pays
G592-00407-++++	BM7-5044	UFO, Custom, Hilton Las Vegas, Coin Pays
|| C592-00639-12MI	BNT-5001	Bonus Times, Coin Pays
| G592-00639-++++	BNT-5001	Bonus Times, Coin Pays
| G592-00639-SP++	BNT-5001	Bonus Times, Coin Pays Spanish
|| G592-00639-SPMI	BNT-5001	Bonus Times, Coin Pays Spanish,
| G592-00639-FR++	BNT-5001	Bonus Times, French, Coin Pays
| G592-00639-S9DG	BNT-5001	Bonus Times, Spanish, Coin Pays
|| G592-00705-FR++	BNT-5002	Bonus Times Coin, French
|| G592-00705-++++	BNT-5002	Bonus Times, Coin Pays
|| C592-00705-12MI	BNT-5002	Bonus Times, Coin Pays
|| G592-00729-++++	BNT-5003	Bonus Times, Coin Pays
|| C592-00729-FR++	BNT-5003	Bonus Times, Coin Pays French
G592-00626-PROG	BQM-5001	Born To Boop, 12 Cell Aurora, Coin Pays
|| C592-00627-14MI	BQM-5002	Born To Boop
G592-00627-PROG	BQM-5002	Born To Boop, 12 Cell Aurora, Coin Pays
G592-00628-PROG	BQM-5003	Born To Boop, 12 Cell Aurora, Coin Pays
G592-00629-PROG	BQM-5004	Born To Boop, 12 Cell Aurora, Coin Pays
|| C592-00627-++++	BQM-5004	Born To Boop, Coin Pays
|| C592-00760-PROG	BQM-5009	Born To Boop, English, Coin Pays
|| C592-00760-FRMI	BQM-5009	Born To Boop, French, Coin Pays
G592-00601-PROG	BRT-5001	Betty Boop's Roaring 20's, Coin Pays
G592-00602-PROG	BRT-5002	Betty Boop's Roaring 20's, Coin Pays
|| C592-C0602-PROG	BRT-5002	Betty Boop's Roaring 20's, Credits
G592-00603-PROG	BRT-5003	Betty Boop's Roaring 20's, Coin Pays
G592-00658-PROG	BRT-5005	Betty Boop Swingtime, Coin Pays
G592-00659-PROG	BRT-5006	Betty Boop Swingtime
G592-00660-PROG	BRT-5007	Betty Boop Swingtime
G592-00659-PROG	BRT-5008	Betty Boop Swingtime
G592-00672-PROG	BRT-5013	Born To Boop, Coin Pays
| C592-00688-PROG	BRT-5014	All American Betty
G592-00675-PROG	BRT-5015	All American Betty
| C592-00687-PROG	BRT-5016	All American Betty, Coin Pays
G592-00691-PGTA	BRT-5019	Betty Boop Swingtime, Coin, Payday
G592-00692-PGTA	BRT-5019	Betty Boop Swingtime, Coin, Payday
|| C592-00712-NJ++	BRT-5026	Betty Boop Roaring 20's, Coin Pays, New Jersey
|| C592-00713-NJ++	BRT-5027	Betty Boop Swingtime, Coin Pays, New Jersey
|| C592-00714-NJ++	BRT-5028	All American Betty Boop, Coin Pays, New Jersey
|| C592-00722-PROG	BRT-5029	Blondie Big Dough Coin
|| C592-00720-PROG	BRT-5032	Blondie Big Spender, Coin,
|| C592-00733-PROG	BRT-5033	Blondie Big Spender, Coin Pays
|| C592-00725-SPMI	BRT-5035	Swingtime Betty, Coin Pays, Spanish,
|| C592-00725-++++	BRT-5035	Swingtime Betty, International, Coin Pays
|| C592-00725-12MI	BRT-5035	Swingtime Betty, International, Coin Pays
|| C592-00765-PROG	BRT-5038	Betty Boop Roaring 20's, Coin Pays
|| C592-00772-++++	BS7-5001	Blazing 7's Super Scatter (25¢), Coin Pays
|| C592-00772-12MI	BS7-5001	Blazing 7's Super Scatter (25¢), Coin Pays
|| C592-00772-FR++	BS7-5001	Blazing 7's Super Scatter (25¢), Coin Pays, French
|| C592-00833-PROG	BS7-5002	Blazing 7's Super Scatter ($1), Coin Pays
|| C592-00820-++++	BS7-5002	Blazing 7's Super Scatter, Coin Pays
|| C592-00820-12MI	BS7-5002	Blazing 7's Super Scatter, Coin Pays
|| C592-C0820-++++	BS7-5002	Blazing 7's Super Scatter, Credits
|| C592-00781-PROG	BS7-5003	Betty Boop Scatter, Coin Pays
|| C592-00782-PROG	BS7-5004	Betty Boop Scatter, Coin Pays
|| C592-C0893-++++	BS7-5005	Betty Boop, Super Scatter, Credits
|| C592-C0893-12MI	BS7-5005	Betty Boop, Super Scatter, Credits
|| C592-00775-PROG	BS7-5006	Blondie Super Scatter, Coin Pays
|| C592-00783-PROG	BS7-5007	Blondie Scatter, Coin Pays
|| C592-00783-FRMI	BS7-5007	Blondie Scatter, Coin Pays, French
|| C592-00780-12MI	BS7-5008	Popeye Scatter, Coin Pays
C592-00780-12MI	BS7-5009	Popeye Scatter, Coin Pays
G592-00066-++++	BUB-5006	Crazy 7's, $5 Pays
G592-00066-$5++	BUB-5006	Crazy 7's, Coin Pays
G592-00066-FR++	BUB-5006	Crazy 7's, French, Coin Pays
G592-00020-++++	BUB-5027	Plum Crazy, Coin Pays
G592-00020-FR++	BUB-5027	Plum Crazy, Coin Pays, French
|| G592-00023-$5++	BUB-5028	Balligator, $5 Pays
G592-00023-++++	BUB-5028	Balligator, Coin Pays
G592-00023-12MI	BUB-5028	Balligator, Coin Pays
G592-00023-SP++	BUB-5028	Balligator, Coin Pays Spanish
G592-00023-FR++	BUB-5028	Balligator, Coin Pays, French

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlot® 6000

G592... Feature Glass (WT) (cont.)

GLASS	ART FORM	DESCRIPTION
G592-00033-++++	BUB-5029	Plum Crazy, Coin Pays
G592-00033-FR++	BUB-5029	Plum Crazy, French, Coin Pays
G592-00123-$2++	BUB-5031	Crazy Joker, $2 Pays
G592-00123-$25+	BUB-5031	Crazy Joker, $25 Pays
G592-00123-++++	BUB-5031	Crazy Joker, Coin Pays
G592-00123-FR++	BUB-5031	Crazy Joker, French, Coin Pays
|| G592-00123-$10+	BUB-5031	Crazy Jokers, $10 Pays
G592-00123-$5++	BUB-5031	Crazy Jokers, $5 Pays
G592-00141-++++	BUB-5032	Balligator, Coin Pays
G592-00160-++++	BUB-5033	Wild Jesters, Coin Pays
G592-00182-++++	BUB-5035	Crazy Reels, Coin Pays
G592-00182-FR++	BUB-5035	Crazy Reels, French
G592-00423-++++	BUB-5042	Balligator, Coin Pay
G592-00443-++++	BUB-5042	Balligator, Coin Pays
G592-00452-++++	BUB-5043	Plum Crazy, Coin Pays
G592-00554-SP++	BUB-5044	Frogs, Coin Pays, Spanish
G592-00554-++++	BUB-5044	Frogs, English, Coin Pays
G592-00554-FR++	BUB-5044	Frogs, French, Coin Pays
G592-00556-FR++	BUB-5045	Cash Cow, French, Coin Pays
|| C592-00861-++++	BUY-5001	One Thousand, Credits
|| C592-00757-PROG	BWT-5002	Betty Boop's World Tour, Purple, Coin Pays
|| C592-00758-PROG	BWT-5008	Dagwood's Big Bonus, Coin Pays
|| C592-00740-12MI	BWT-5009	Dagwood's Big Bonus, Coin Pays
|| C592-00741-12MI	BWT-5010	Dagwood's Big Bonus, Coin Pays
|| C592-00776-PROG	BWT-5014	Popeye Spinach Bonus
|| C592-00796-++++	BWT-5019	Frankie & Annette, Coin Pays
G592-00002-++++	CB7-5001	Naughty Nickels, Coin Only
G592-00002-PGMT	CB7-5001	Naughty Nickels, Coin Pays
G592-00219-++++	CB7-5003	Cold Cash, Coin Pays
G592-00073-2PRG	CB7-5023	French Quarters
G592-00073-PGMT	CB7-5023	French Quarters
G592-00073-PROG	CB7-5023	French Quarters
G592-00026-25C+	CB7-5023	French Quarters, Coin Pays
G592-00026-FR++	CB7-5023	French Quarters, Coin Pays French
G592-00026-SP++	CB7-5023	French Quarters, Spanish, Coin Pays
G592-00049-++++	CB7-5025	Naughty Nickels, Coin Pays
G592-00071-PROG	CB7-5026	Naughty Nickels
G592-00114-INOV	CB7-5026	Naughty Nickels
G592-00050-++++	CB7-5026	Naughty Nickels, Coin Pays
G592-00042-25C+	CB7-5027	French Quarters, Coin Pays
G592-00042-SP25	CB7-5027	French Quarters, Spanish, Coin Pays
G592-00043-25C+	CB7-5028	French Quarters, Coin Pays
G592-00115-INOV	CB7-5029	Naughty Nickels
G592-00084-++++	CB7-5029	Naughty Nickels, Coin Pays
G592-00082-25C+	CB7-5030	French Quarters, Coin Pays
G592-00199-PGMT	CB7-5034	Quarter Horse, Coin Pays
G592-00282-++++	CB7-5036	Casino Club Custom, Coin Pays
G592-00404-++++	CB7-5038	All American, Coin Pays
| C592-00693-++++	CB7-5039	Blazing 7's, Coin Pays
|| C592-00708-++++	CB7-5039	Super Blazing 7's
|| C592-00738-++++	CB7-5039	Super Blazing 7's, Coin Pays
|| C592-00738-12MI	CB7-5039	Super Blazing 7's, Coin Pays
| C592-00694-++++	CB7-5040	Blazing 7's, Coin Pays
|| C592-00709-++++	CB7-5040	Super Blazing 7's
|| C592-00739-++++	CB7-5040	Super Blazing 7's, Coin Pays
|| C592-00739-12MI	CB7-5040	Super Blazing 7's, Coin Pays
|| C592-00739-FR++	CB7-5040	Super Blazing 7's, Coin Pays French
|| C592-00739-SP++	CB7-5040	Super Blazing 7's, Coin Pays Spanish
|| C592-00709-SP++	CB7-5040	Super Blazing 7's, Spanish
G592-00068-$1C+	CBM-5004	Black Gold Colors, $100 Pays
G592-00068-$25+	CBM-5004	Black Gold Colors, $25 Pays
G592-00267-SP++	CM7-5003	Cherry-Bar-7's, Spanish
G592-00146-++++	CM7-5027	Bally Display, English, Coin Pays
G592-00090-++++	CM7-5060	Coin Pays
G592-00370-++++	D7B-5002	Blue Light Special, Coin Pays
G592-00576-12MI	DAP-5001	Pool Shark, Coin Pays
G592-00576-1SPC	DAP-5001	Pool Shark, Coin Pays
G592-00576-++++	DAP-5001	Pool Shark, Coin Pays
G592-00576-FR++	DAP-5001	Pool Shark, Coin Pays French
G592-00698-FR++	DAP-5002	Pool Sharks, French, Coin Pays
G592-00248-++++	DB5-5001	Double Trouble, Coin Pays
G592-00248-12MT	DB5-5001	Double Trouble, Coin Pays
G592-00403-++++	DB7-5002	Double Jackpot, Coin Pays
G592-00593-PROG	DBB-5001	Black and White Payday, Coin Pays
G592-00565-PROG	DBB-5004	Black and White Payday, Coin Pays
G592-00549-PROG	DBB-5005	Black and White Payday Generic, Coin Pays
G592-00544-PROG	DBB-5006	Black and White Payday Generic, Coin Pays
|| C592-C0872-12MI	DBF-5001	Popeye Double Jackpot, Credits
|| C592-C0873-12MI	DBF-5002	Betty Boop Devil Double Jackpot, Credits
|| C592-C0874-12MI	DBF-5003	Blondie, Credits
G592-00225-++++	DBK-5002	Spin and Win Coin, Respin
G592-00459-++++	DBX-5006	Reel Lucky-Wild Rose, Coin Pays
G592-00460-++++	DBX-5007	Reel Lucky-Black and White, Coin Pays
G592-00466-++++	DC5-5001	Gimmie 5, Coin Pays
G592-00467-$10+	DC5-5002	5x Black and White, $10 Pays

GLASS	ART FORM	DESCRIPTION
G592-00467-$5++	DC5-5002	5x Black and White, $5 Pays
G592-00467-++++	DC5-5002	5x Black and White, Coin Pays
G592-00467-12MI	DC5-5002	5x Black and White, Coin Pays
G592-00467-FC++	DC5-5002	5x Black and White, Coin Pays French Canadian
G592-00467-SP++	DC5-5002	5x Black and White, Spanish, Coin Pays
G592-00467-OT++	DC5-5002	Black and White 5x, English/French Canadian Coin Pays
G592-00517-++++	DC5-5004	Custom Harrah's Globe, Special Feature
G592-00509-0SPC	DC5-5005	Gimme 5, Coin Pays
G592-00510-0SPC	DC5-5006	Wild Rose 5x, Coin Pays
G592-00514-++++	DC5-5007	5x Joker Wild, Coin Pays
G592-00514-SP++	DC5-5007	5x Joker Wild, Coin Pays Spanish
G592-00588-++++	DC5-5008	5x Double Dragon, Coin Pays
|| C592-00735-++++	DC5-5010	Black and White, Coin Pays
|| C592-00735-FR++	DC5-5010	Black and White, Coin Pays French
G592-00625-++++	DCB-5001	Double Jackpot, Coin Pays
G592-00106-++++	DCM-5023	Double Eagle, Coin Pays
G592-00029-$10+	DCM-5031	California Dreamin', $10 Pays
G592-00029-$5++	DCM-5031	California Dreamin', $5 Pays
G592-00029-PGMT	DCM-5031	California Dreamin', Coin Pays
G592-00029-++++	DCM-5031	California Dreamin', Coin Pays
G592-00029-SP++	DCM-5031	California Dreamin', Coin Pays Spanish
|| G592-00029-FR++	DCM-5031	California Dreamin', French
G592-00100-PGMT	DCM-5032	California Dreamin', Coin Pays
G592-00047-++++	DCM-5032	California Dreamin', Coin Pays
G592-00047-FR++	DCM-5032	California Dreamin, Coin Pays French
G592-00047-SP++	DCM-5032	California Dreamin, Spanish, Coin Pays
G592-00101-++++	DCM-5034	California Dreamin', Coin Pays
G592-00101-FR++	DCM-5034	California Dreamin, French, Coin Pays
G592-00101-SP++	DCM-5034	California Dreamin', Spanish, Coin Pays
G592-00487-$50	DCM-5035	Black & White, $100 Pays
G592-00487-$1C+	DCM-5035	Black & White, $100 Pays
G592-00145-++++	DCM-5037	California Dreamin', Coin Pays
G592-00166-++++	DCM-5039	California Dreamin, Coin Pays
G592-00179-++++	DCM-5040	Double Time
G592-00179-$5++	DCM-5040	Double Time, $5 Pays
G592-00197-++++	DCM-5041	Double Time, Coin Pays
G592-00279-$5++	DCM-5043	Double Take, $5 Pays
G592-00279-++++	DCM-5043	Double Take, Coin Pays
G592-00279-	DCM-5043	Double Take, Coin Pays
G592-00279-FR++	DCM-5043	Double Take, French, Coin Pays
C592-00279-SP++	DCM-5043	Double Take, Spanish, Coin Pays
G592-00339-$5++	DCM-5044	Double Gold, $5 Pays
G592-00339-++++	DCM-5044	Double Gold, Coin Pays
G592-00339-SP++	DCM-5044	Double Gold, Spanish, Coin Pays
G592-00340-++++	DCM-5045	Double Gold, Coin Pays
|| G592-00340-FR++	DCM-5045	Double Gold, Coin Pays French
|| C592-00350-14MI	DCM-5046	Double Take, Coin Pays
G592-00350-++++	DCM-5046	Double Take, Coin Pays
G592-00350-PORT	DCM-5046	Double Take, Portuguese, Coin Pays
G592-00350-SP++	DCM-5046	Double Take, Spanish, Coin Pays
G592-00381-++++	DCM-5049	Double Gold, Coin Pays
|| G592-00381-FR++	DCM-5049	Double Gold, Coin Pays French
G592-00572-++++	DCM-5050	California Dreamin', Coin Pays
|| G592-00448-SP++	DCM-5052	Blazing 7's Times Pay Coin Pays Spanish
|| G592-00448-S9DG	DCM-5052	Blazing 7's Times Pay, Coin Pays Spanish
|| C592-00448-12MI	DCM-5052	Blazing 7's Times Pays Coin Pays
G592-00448-++++	DCM-5052	Blazing 7's Times Pays Coin Pays
|| G592-00449-$10+	DCM-5053	Blazing 7's Times Pays $10 Pays
|| G592-00449-$5++	DCM-5053	Blazing 7's Times Pays $5 Pays
|| C592-00819-12MI	DCM-5053	Blazing 7's Times Pay,
|| C592-00819-$5MI	DCM-5053	Blazing 7's Times Pay, $5,
G592-00449-$2++	DCM-5053	Blazing 7's Times Pays $2 Pays
C592-00449-12MI	DCM-5053	Blazing 7's Times Pays Coin Pays
G592-00449-++++	DCM-5053	Blazing 7's Times Pays Coin Pays
G592-00480-++++	DCM-5055	Kilroy, 10 Times Black & White, Coin Pays
G592-00480-SP++	DCM-5055	Kilroy, 10 Times Black & White, Spanish, Coin Pays
G592-00522-++++	DCM-5057	Five & Ten Times Pays Coin Pays
|| G592-00523-$10+	DCM-5058	Five & Ten Times Pays $10 Pays
| G592-00523-$5++	DCM-5058	Five & Ten Times Pays $5 Pays
G592-00523-++++	DCM-5058	Five & Ten Times Pays Coin Pays
G592-00542-12MI	DCM-5061	Double Jackpot, Coin Pays
G592-00561-++++	DCM-5062	20 Times, Coin Pays
G592-00559-FR++	DCM-5064	Cash Cow, French, Coin Pays
G592-00560-FR++	DCM-5065	French Frog, Coin Pays
\|\| C592-00732-++++ | DCM-5069 | 5 X 10 Feature, Coin Pays |
\|\| C592-C0875-++++ | DCM-507 | Double Money, Credits |
\|\| C592-00851-++++ | DCM-5071 | Double Money, Bonus Frenzy, Credits |
\|\| C592-00851-FR++ | DCM-5071 | Double Money, Bonus Frenzy, Credits, French |
\|\| C592-C0858-++++ | DCM-5072 | Double Money, Credits |
\|\| C592-00845-FR++ | DCM-5073 | Double Money, Coin, French |
\|\| C592-00845-12MI | DCM-5073 | Double Money, Credit |
\|\| C592-00845-++++ | DCM-5073 | Double Money, Credits |
\|\| C592-00843-++++ | DCM-5074 | Double Money 5 Coin Credits |
\|\| C592-00811-++++ | DCM-5076 | 5 Times 10 Times Money, Credits |
\|\| C592-C0877-++++ | DCM-5077 | 5 Times 10 Times Money, Credits |

©2003 Bally Gaming and Systems

G592... Feature Glass (WT) (cont.)

	GLASS	ART FORM	DESCRIPTION
||	C592-00812-++++	DCM-5077	5 Times 10 Times Money, Credits
||	C592-00813-++++	DCM-5078	5 Times 10 Times Money, Credits
||	C592-00814-++++	DCM-5079	5 Times 10 Times Money, Credits
||	C592-00854-++++	DCM-5080	5 Times 10 Times Money, Credits
||	C592-00815-++++	DCM-5080	5 Times 10 Times Money, Credits
	G592-00304-$10+	DD7-5001	Golden Eye 007's, $10 Pays
	G592-00304-$5++	DD7-5001	Golden Eye 007's, $5 Pays
	G592-00304-++++	DD7-5001	Golden Eye 007's, Coin Pays
||	G592-00304-12MI	DD7-5001	Golden Eye 007's, English
	G592-00304-FR++	DD7-5001	Golden Eye 007's, French, Coin Pays
	G592-00304-PORT	DD7-5001	Golden Eye 007's, Portuguese, Coin Pays
	G592-00304-SP++	DD7-5001	Golden Eye 007's, Spanish, Coin Pays
	G592-00322-S9DG	DD7-5003	Gimme 5 Times, Spanish, Coin Pays
	G592-00322-$10+	DD7-5003	Gimme 5, $10 Pays
	G592-00322-$5++	DD7-5003	Gimme 5, $5 Pays
	G592-00322-SP++	DD7-5003	Gimme 5, Spanish, Coin Pays
	G592-00322-++++	DD7-5003	Gimmie 5, Coin Pays
	G592-00389-++++	DD7-5005	007's, Coin Pays
	G592-00389-9DIG	DD7-5005	007's, Pays
	G592-00402-$25+	DD7-5006	5x Black & White, $25 Pays
||	G592-00402-$5++	DD7-5006	5x Black & White, $5 Pays
	G592-00402-++++	DD7-5006	5x Black & White, Coin Pays
	G592-00402-12MI	DD7-5006	5x Black & White, Coin Pays
	G592-00402-SP++	DD7-5006	5x Black & White, Spanish, Coin Pays
||	G592-00402-TEST	DD7-5006	5x Times Black & White
	G592-00427-++++	DD7-5007	Gimme 5, Coin Pays
	G592-00427-SP++	DD7-5007	Gimme 5, Spanish, Coin Pays
	G592-00461-++++	DD7-5008	5x Black & White, Coin Pays
	G592-00516-++++	DD7-5010	5x Black & White, Coin Pays
||	C592-00737-++++	DD8-5001	Hot Line, Coin Pays
||	C592-00737-12MI	DD8-5001	Hot Line, Coin Pays
||	C592-00737-FR++	DD8-5001	Hot Line, Coin Pays French
||	C592-00754-++++	DD8-5002	Hot Lines, Coin Pays
||	C592-00755-++++	DD8-5003	Hot Lines, Coin Pays
||	C592-00804-++++	DD8-5003	Hot Lines, Credits
||	C592-00769-++++	DD8-5004	Hot Lines, Coin Pays
||	C592-00769-NV++	DD8-5004	Hot Lines, Coin Pays
||	C592-00802-++++	DD8-5005	Winning Times 7's, Credits
||	C592-00802-NV++	DD8-5005	Winning Times 7's, Credits
||	C592-00802-FR++	DD8-5005	Winning Times 7's, Credits, French
||	C592-00803-++++	DD8-5006	Winning Times Blazing 7's, Credits
||	C592-00803-NV++	DD8-5006	Winning Times Blazing 7's, Credits
||	C592-00797-NV++	DD8-5007	Tim & Harvey's Joker Wild
||	C592-00797-++++	DD8-5007	Tim & Harvey's Joker Wild, Coin Pays
||	C592-00797-FR++	DD8-5007	Tim & Harvey's Joker Wild, French
||	C592-00797-FC++	DD8-5007	Tim & Harvey's Joker Wild, French Canadian
||	G592-00018-$5++	DDD-5001	Triple Double, Coin Pays
	G592-00018-++++	DDD-5001	Triple Double, Coin Pays
	G592-00203-++++	DDD-5002	Triple Double, Coin Pays
	G592-00296-$5++	DDM-5001	Fun Fives, $5 Pays
	G592-00256-$5++	DDM-5002	Black Gold Look, $5 Pays
||	G592-00099-$5++	DIA-5001	Diamonds
	G592-00099-14MI	DIA-5001	Diamonds, $5 Pays
	G592-00099-++++	DIA-5001	Diamonds, Coin Pays
	G592-00099-FR++	DIA-5001	Diamonds, Coin Pays French
	G592-00099-FC++	DIA-5001	Diamonds, French Canadian, Coin Pays
	G592-00099-PORT	DIA-5001	Diamonds, Portuguese, Coin Pays
	G592-00099-SP++	DIA-5001	Diamonds, Spanish, Coin Pays
	G592-00138-++++	DIA-5002	Diamonds, Coin Pays
	G592-00135-++++	DIA-5003	Diamonds, Coin Pays
	G592-00153-$5++	DIA-5004	Diamond Winners, $5 Pays
	G592-00153-++++	DIA-5004	Diamond Winners, Coin Pays
	G592-00153-SP++	DIA-5004	Diamond Winners, Spanish, Coin Pays
	G592-00465-++++	DIA-5005	Boussea, Coin Pays
	G592-00152-$2++	DIB-5001	Diamond Winners, $2 Pays
	G592-00152-$5++	DIB-5001	Diamond Winners, $5 Pays
	G592-00152-++++	DIB-5001	Diamond Winners, Coin Pays
	G592-00154-$5++	DIB-5002	Diamond Winners, $5 Pays
	C592-00154-++++	DIB-5002	Diamond Winners, Coin Pays
|	G592-00154-12MI	DIB-5002	Diamond Winners, Coin Pays
	G592-00154-PROG	DIB-5002	Diamond Winners, Coin Pays
||	G592-00154-FR++	DIB-5002	Diamond Winners, French, Coin Pays
	G592-00154-PORT	DIB-5002	Diamond Winners, Portuguese, Coin Pays
	G592-00154-SP++	DIB-5002	Diamond Winners, Spanish, Coin Pays
	G592-00314-++++	DIB-5003	Diamonds, Coin Pays
	G592-00417-++++	DID-5001	Diamond Line Double Jackpot 7's, Coin Pays
	C592-00418-++++	DID-5002	Diamond Line Double Jackpot Blazing 7's, Coin Pays
||	C592-00418-SP++	DID-5002	Diamond Line Double Jackpot Blazing 7's, Coin Pays Spanish
	G592-00418-OT++	DID-5002	Diamond Line Double Jackpot Blazing 7's, English/French Canadian, Coin Pays
	G592-00418-SPEC	DID-5002	Triple Blazing 7's, Double Jackpot, Diamond Line, Coin Pays
	G592-00464-++++	DID-5003	Diamond Double, Black & White, Coin Pays
	G592-00464-OT++	DID-5003	Diamond Line Double Jackpot Black & White, English/French Canadian, Coin Pays
	G592-00622-++++	DIV-5001	Diamonds & Devils Diamond Line, Coin Pays

	GLASS	ART FORM	DESCRIPTION
||	G592-00622-S9DG	DIV-5001	Diamonds & Devils Diamond Line, Coin Pays Spanish
||	G592-00622-SPMI	DIV-5001	Diamonds & Devils Diamond Line, Coin Pays Spanish
	G592-00622-SP++	DIV-5001	Diamonds & Devils Diamond Line, Coin Pays Spanish
||	C592-00163-12MI	DL7-5001	Blazing 7's Diamond Line, Coin Pays
	G592-00163-FR++	DL7-5001	Blazing 7's Diamond Line, Coin Pays French
	G592-00163-++++	DL7-5001	Blazing 7's Diamond Line, Coins Pays
|	C592-00163-$5++	DL7-5001	Blazing 7's Diamond Line, Credits
	G592-00163-OT++	DL7-5001	Blazing 7's Diamond Line, English/French Canadian, Coin Pays
	G592-00163-SP++	DL7-5001	Blazing 7's Diamond Line, Spanish, Coin Pays
	G592-00164-$2++	DL7-5002	Blazing 7's Diamond Line, $2 Pays
	G592-00164-$5++	DL7-5002	Blazing 7's Diamond Line, $5 Pays
	G592-00164-++++	DL7-5002	Blazing 7's Diamond Line, Coin Pays
||	G592-00164-12MI	DL7-5002	Blazing 7's Diamond Line, Coin Pays
||	C592-00623-$5++	DLD-5001	Double Diamond Line, $5 Pays
	G592-00623-++++	DLD-5001	Double Diamond Line, Coin Pays
||	C592-00623-FR++	DLD-5001	Double Diamond Line, Coin Pays French
||	C592-00864-++++	DLF-5001	Diamond Line Frenzy, Credits
	G592-00065-$5++	DLI-5002	Double Jackpot, $5 Pays
	G592-00065-++++	DLI-5002	Double Jackpot, Coin Pays
	G592-00065-FR++	DLI-5002	Double Jackpot, French, Coin Pays
	G592-00065-PORT	DLI-5002	Double Jackpot, Portuguese, Coin Pays
	G592-00450-++++	DLI-5012	Double Jackpot, Coin Pays
	G592-00183-$5++	DM7-5001	Blazing 7's Double Symbol, $5 Pays
	G592-00183-$5MI	DM7-5001	Triple Blazing 7's Double Symbol, $5 Pays
	G592-00183-12MI	DM7-5001	Triple Blazing 7's Double Symbol, Coin Pays
	G592-00183-SP++	DM7-5001	Triple Blazing 7's Double Symbol, Spanish, Coin Pays
	G592-00183-++++	DM7-5001	Triple Blazing, 7's Double Symbol
	G592-00184-++++	DM7-5002	Triple Blazing 7's Double Symbol
	G592-00184-MICR	DM7-5002	Triple Blazing 7's Double Symbol, Coin Pays
	G592-00184-	DM7-5002	Triple Blazing 7's Double Symbol, Coin Pays
||	G592-00184-OT++	DM7-5002	Triple Blazing 7's Double Symbol, English/French Canadian, Coin Pays
	G592-00184-FR++	DM7-5002	Triple Blazing 7's Double Symbol, French, Coin Pays
	G592-00184-S9DG	DM7-5002	Triple Blazing 7's Double Symbol, Spanish, Coin Pays
	G592-00184-SP++	DM7-5002	Triple Blazing 7's Double Symbol, Spanish, Coin Pays
	G592-00274-$10+	DM7-5004	All American, $10 Pays
	G592-00274-++++	DM7-5004	All American, Coin Pays
	G592-00274-12MI	DM7-5004	All American, Coin Pays
||	G592-00274-$5MI	DM7-5004	All American, English
	G592-00274-SP++	DM7-5004	All American, Spanish, Coin Pays
	G592-00274-$5++	DM7-5005	All American, $5 Pays
	G592-00275-++++	DM7-5005	All American, Coin Pays
	G592-00275-12MI	DM7-5005	All American, Coin Pays
	G592-00275-PORT	DM7-5005	All American, Coin Pays Portuguese
	G592-00275-SP++	DM7-5005	All American, Spanish, Coin Pays
	G592-00312-++++	DM7-5006	Triple Blazing 7's Double Symbol, Coin Pays
||	C592-00329-12MI	DM7-5007	Triple Blazing 7's Double Symbol, Coin Pays
	G592-00329-++++	DM7-5007	Triple Blazing 7's Double Symbol, Coin Pays
	G592-00329-OT++	DM7-5007	Triple Blazing 7's Double Symbol, English/French Canadian, Coin Pays
	G592-00330-++++	DM7-5008	Triple Blazing 7's Double Symbol, Coin Pays
	G592-00330-SP-++	DM7-5008	Triple Blazing 7's Double Symbol, Coin Pays Spanish
||	C592-00331-12MI	DM7-5009	Triple Blazing 7's Double Symbol, Coin Pays
	G592-00331-++++	DM7-5009	Triple Blazing 7's Double Symbol, Coin Pays
	G592-00331-SP-++	DM7-5009	Triple Blazing 7's Double Symbol, Coin Pays Spanish
||	G592-00331-OT++	DM7-5009	Triple Blazing 7's Double Symbol, English/French Canadian, Coin Pays
	C592-00336-$10+	DM7-5010	Black & White, $10 Pays
	G592-00336-$1C+	DM7-5010	Black & White, $100 Pays
	G592-00336-$25+	DM7-5010	Black & White, $25 Pays
	G592-00336-25MI	DM7-5010	Black & White, $25 Pays
	G592-00336-$5++	DM7-5010	Black & White, $5 Pays
	G592-00336-$5MI	DM7-5010	Black & White, $5 Pays
	G592-00336-12MI	DM7-5010	Black & White, Coin Pays
	G592-00336-++++	DM7-5010	Black & White, Coin Pays
	G592-00336-SP++	DM7-5010	Black & White, Spanish, Coin Pays
	G592-00337-12MI	DM7-5011	Black & White, Coin Pay
	G592-00337-++++	DM7-5011	Black & White, Coin Pays
	G592-00337-MICR	DM7-5011	Black & White, Coin Pays
||	G592-00337-OT++	DM7-5011	Black & White, English/French Canadian, Coin Pays
	C592-00337-FR++	DM7-5011	Black & White, French, Coin Pays
	G592-00337-S9DG	DM7-5011	Black & White, Spanish, Coin Pays
	G592-00337-SP++	DM7-5011	Black & White, Spanish, Coin Pays
	G592-00568-++++	DM7-5012	Apache Gold, Coin Pays
	G592-00377-++++	DM7-5014	Black & White, Coin Pays
	G592-00377-12MI	DM7-5014	Black & White, Coin Pays
||	G592-00377-OT++	DM7-5014	Black & White, English/French Canadian, Coin Pays
	G592-00377-SP++	DM7-5014	Black & White, Spanish, Coin Pays
	G592-00378-++++	DM7-5015	Black & White, Coin Pays
	G592-00378-OT++	DM7-5015	Black & White, English/French Canadian, Coin Pays
	G592-00378-SP++	DM7-5015	Black & White, Spanish, Coin Pays
||	G592-00379-12MI	DM7-5016	Black & White, Coin Pay
	G592-00379-++++	DM7-5016	Black & White, Coin Pays
	G592-00379-1SPC	DM7-5016	Black & White, Coin Pays
	C592-00379-FR++	DM7-5016	Black & White, Coin Pays French

©2003 Bally Gaming and Systems

ProSlot® 6000

G592... Feature Glass (WT) (cont.)

GLASS	ART FORM	DESCRIPTION
C592-00379-FR++	DM7-5016	Black & White, Coin Pays French
C592-00379-SP++	DM7-5016	Black & White, Spanish, Coin Pays
G592-00384-++++	DM7-5017	Island & Wins Custom, Coin Pays
G592-00408-12MI	DM7-5020	All American, English, Coin Pays
G592-00408-++++	DM7-5020	All American, English, Coin Pays
G592-00408-SP++	DM7-5020	All American, Spanish, Coin Pay
G592-00409-$5MI	DM7-5023	Twist & Shout, $5 Pays
G592-00409-++++	DM7-5023	Twist & Shout, Coin Pay
G59200409-S9DG	DM7-5023	Twist & Shout, Spanish
G592-00409-SPMI	DM7-5023	Twist & Shout, Spanish, Coin Pays
G592-00409-SP++	DM7-5023	Twist & Shout, Spanish, Coin Pays
G592-00410-++++	DM7-5024	Twist & Shout, Coin Pay
G592-00410-FR++	DM7-5024	Twist & Shout, French, Coin Pays
G592-00410-SP++	DM7-5024	Twist & Shout, Spanish, Coin Pays
G592-00410-SPMI	DM7-5024	Twist & Shout, Spanish, Coin Pays
G592-00419-12MI	DM7-5027	Border Bucks, Coin Pays
G592-00499-++++	DM7-5028	All American, Coin Pays
C592-C0887-++++	DM7-5031	Blazing 7's Double Jackpot, Credits, South Africa
G592-00458-++++	DM7-5031	Madhatten Double Jackpot
G592-00504-++++	DM7-5032	Lucky Lobster, Generic, Coin Pays
C592-00471-++++	DM7-5035	Black & White Double Jackpot, English, Coin Pays
G592-00471-FR++	DM7-5035	Black & White Double Jackpot, French, Coin Pays
G592-00483-S9DG	DM7-5036	Triple Blazing 7's Double Jackpot Spanish, Coin Pays
G592-00483-++++	DM7-5036	Triple Blazing 7's Double Jackpot, Coin Pays
G592-00483-SPMI	DM7-5036	Triple Blazing 7's Double Jackpot, Spanish, Coin Pays
G592-00483-SP++	DM7-5036	Triple Blazing 7's Double Jackpot, Spanish, Coin Pays
G592-00484-++++	DM7-5037	Triple Blazing 7's Double Jackpot, Coin Pays
G592-00484-12MI	DM7-5037	Triple Blazing 7's Double Jackpot, Coin Pays
G592-00484-14MI	DM7-5037	Triple Blazing 7's Double Jackpot, Coin Pays
G592-00484-14MR	DM7-5037	Triple Blazing 7's Double Jackpot, Coin Pays Micro
G592-00484-SP++	DM7-5037	Triple Blazing 7's Double Jackpot, Spanish, Coin Pays
G592-00484-SPMI	DM7-5037	Triple Blazing 7's Double Jackpot, Spanish, Coin Pays
G592-00481-++++	DM7-5038	Kilroy Black & White Double, Coin Pays
G592-00481-S9DG	DM7-5038	Kilroy Black & White Double, Spanish, Coin Pays
G592-00481-SPMI	DM7-5038	Kilroy Black & White, Spanish, Coin Pays
G592-00481-SP++	DM7-5038	Kilroy Black & White, Spanish, Coin Pays
G592-00482-++++	DM7-5039	Kilroy Black & White Double, Coin Pays
G592-00482-14MR	DM7-5039	Kilroy Black & White Double, Coin Pays
G592-00482-14MI	DM7-5039	Kilroy Black & White Double, French, Coin Pays
G592-00482-FR++	DM7-5039	Kilroy Black & White Double, French, Coin Pays
G592-00482-SP++	DM7-5039	Kilroy Black & White Double, Spanish, Coin Pays
G592-00482-SPMI	DM7-5039	Kilroy Black & White Double, Spanish, Coin Pays
G592-00501-++++	DM7-5040	5 Times Black & White, Coin Pays
G592-00506-0SPC	DM7-5041	Triple Blazing 7's Double Symbol, Coin Pays
G592-00507-0SPC	DM7-5042	Black & White Double Symbol, Coin Pays
G592-00508-0SPC	DM7-5043	Lucky Lobster, Generic, Coin Pays
G592-00512-0SPC	DM7-5044	Nickel Mania, Coin Pays
G592-00513-0SPC	DM7-5045	Double Silver & Gold, Coin Pays
G592-00552-FR++	DM7-5046	Silver & Gold Double Pirate, French, Coin Pays
C592-00583-12MI	DM7-5047	New York Cityscapes
G592-00583-++++	DM7-5047	New York Cityscapes, Coin Pays
G592-00577-++++	DM7-5048	San Francisco Cityscapes, Coin Pays
G592-00577-12MI	DM7-5048	San Francisco Cityscapes, Coin Pays
G592-00578-++++	DM7-5049	Seattle Cityscapes, Coin Pays
G592-00595-++++	DM7-5050	Double Jackpot Blazing 7's, Coin Pays
G592-00673-FR++	DM7-5051	Black & White French
G592-00621-$5++	DM7-5053	Custom Mgm Detroit, $5 Pays Theme Display
G592-00621-++++	DM7-5053	MGM Detroit, Coin Pays
G592-00634-++++	DM7-5055	Black & White, Coin Pays
G592-00656-FR++	DM7-5056	Twist & Shout, French, Coin Pays
C592-00752-++++	DM7-5058	Memphis Blues, Coin Pays
G592-00538-++++	DM7-5060	Triple Blazing 7's Double Jackpot, Coin Pays
G592-00538-12MI	DM7-5060	Triple Blazing 7's Double Jackpot, Coin Pays
G592-00539-++++	DM7-5061	Black & White Double, Coin Pays
C592-00852-++++	DM7-5062	Double Money, Credits
C592-00849-++++	DM7-5063	Double Money, Triple Blazing 7's
C592-00842-++++	DM7-5064	Double Money Triple Blazing 7's, Credits
C592-C0870-++++	DM7-5067	Blazing 7's Double Jackpot, Credits
C592-C0871-++++	DM7-5068	Black & White, Double Jackpot, Credits
C592-C0882-++++	DM7-5070	Black & White Double Jackpot, Credits, South Africa
C592-C0878-++++	DM7-5071	Blazing 7's Double Money, Credits, South Africa
C592-C0888-++++	DM7-5072	Blazing 7's Double Jackpot, Credits, South Africa
C592-C0883-++++	DM7-5073	Black & White Double Jackpot, Credits, South Africa
C592-C0879-++++	DM7-5074	Blazing 7's Double Money, Credits, South Africa
C592-C0889-++++	DM7-5075	Blazing 7's Double Jackpot, Credits, South Africa
C592-C0892-++++	DM7-5076	Black & White, Credits, South Africa
C592-C0881-++++	DM7-5077	Double Money Triple Blazing 7's, Credits, South Africa
C592-C0889-++++	DM7-5078	Blazing 7's Double Jackpot, Credits, South Africa
C592-C0892-++++	DM7-5079	Black & White, Credits, South Africa
C592-C0890-++++	DM7-5081	Blazing 7's Double Jackpot, Credits, South Africa
C592-C0884-++++	DM7-5082	Black & White Double Jackpot, Credits, South Africa
C592-C0880-++++	DM7-5083	Blazing 7's Double Money, Credits, South Africa
C592-C0890-++++	DM7-5084	Blazing 7's Double Jackpot, Credits, South Africa
C592-C0880-++++	DM7-5086	Blazing 7's Double Money, Credits, South Africa
G592-00078-TENG	DMB-5004	10 Grand, Header, Double Jackpot, Black Gold Colors, Coin Pays

GLASS	ART FORM	DESCRIPTION
G592-00078-++++	DMB-5004	10 Grand, No Header, Coin Pays
G592-00112-25C+	DMB-5010	Black Gold, 2 1/2 Grand, Coin Pays 25¢ Only
G592-00078-PGMT	DMB-5010	Double Jackpot
G592-00078-PROG	DMB-5010	Jackpot Bars, Coin Pays
G592-00076-++++	DMB-5019	Black Gold, Coin Pays
G592-00271-++++	DMB-5022	Bally Las Vegas, Coin Pays
G592-00097-++++	DMB-5025	Black Gold, Coin Pays
G592-00097-FR++	DMB-5025	Black Gold, Coin Pays French
G592-00097-PORT	DMB-5025	Black Gold, Portuguese, Coin Pays
G592-00151-FC++	DMB-5032	Jackpot Bars French Canadian, Coin Pays
G592-00151-PROG	DMB-5033	Jackpot Bars, Coin Pays
G592-00053-$5++	DMB-5065	Black Gold, $5 Pays
G592-00053-++++	DMB-5065	Black Gold, Coin Pays
G592-00059-$5++	DMB-5067	Black Gold, $5 Pays
G592-00059-++++	DMB-5067	Black Gold, Coin Pays
G592-00260-$10++	DMB-5068	50 Grand, $10 Pays
G592-00515-++++	DMB-5071	Black Gold, Coin Pays
G592-00293-$10+	DMJ-5001	Double Bally's, $10 Pays
G592-00293-$25+	DMJ-5001	Double Bally's, $25 Pays
G592-00293-$5++	DMJ-5001	Double Bally's, $5 Pays
C592-00205-$5++	DRA-5001	Double Dragon, $5 Pays
G592-00205-$5PG	DRA-5001	Double Dragon, $5 Pays
C592-00205-++++	DRA-5001	Double Dragon, Coin Pays
G592-00205-FR++	DRA-5001	Double Dragon, French
G592-00206-++++	DRA-5002	Double Dragon, English, Coin Pays
G592-00206-FR++	DRA-5002	Double Dragon, French
G592-00519-++++	DRA-5007	Double Dragon, Coin Pays
G592-00216-$10+	DT7-5001	Triple Blazing 7's Diamond Line, $10 Pays
G592-00216-$5++	DT7-5001	Triple Blazing 7's Diamond Line, $5 Pays
G592-00216-$5MI	DT7-5001	Triple Blazing 7's Diamond Line, $5 Pays
G592-00216-2PRG	DT7-5001	Triple Blazing 7's Diamond Line, Coin Pays
G592-00216-++++	DT7-5001	Triple Blazing 7's Diamond Line, Coin Pays
G592-00216-12MI	DT7-5001	Triple Blazing 7's Diamond Line, Coin Pays
G592-00216-FR++	DT7-5001	Triple Blazing 7's Diamond Line, French, Coin Pays
G592-00216-SP++	DT7-5001	Triple Blazing 7's Diamond Line, Spanish, Coin Pays
G592-00347-12MI	DT7-5002	Diamond Back, Coin Pay
G592-00347-++++	DT7-5002	Diamond Back, Coin Pays
C592-00396-14MI	DT7-5003	Triple Blazing 7's Diamond Line
G592-00396-++++	DT7-5003	Triple Blazing 7's Diamond Line, Coin Pays
G592-00396-OT++	DT7-5003	Triple Blazing 7's Diamond Line, English/French Canadian, Coin Pays
G592-00396-S9DG	DT7-5003	Triple Blazing 7's Diamond Line, Spanish, Coin Pays
G592-00396-SP++	DT7-5003	Triple Blazing 7's Diamond Line, Spanish, Coin Pays
G592-00396-SPMI	DT7-5003	Triple Blazing 7's Diamond Line, Spanish, Coin Pays
G592-00149-PROG	DWA-0006	Fast 50's, Coin Pays
G592-00280-$1++	DWA-5001	Pyramid, $1 Pays
G592-00280-++++	DWA-5004	Pyramid, Coin Pays
G592-00175-++++	DWA-5009	Silver & Gold Coin Pays
G592-00175-14MI	DWA-5009	Silver & Gold, Coin Pays
G592-00175-FR++	DWA-5009	Silver & Gold, Coin Pays
G592-00175-PORT	DWA-5009	Silver & Gold, Portuguese, Coin Pays
G592-00175-S9DG	DWA-5009	Silver & Gold, Spanish, Coin Pays
G592-00175-SP++	DWA-5009	Silver & Gold, Spanish, Coin Pays
G592-00175-++++	DWA-5010	Silver & Gold Coin Pays
G592-00175-12MI	DWA-5010	Silver & Gold, Coin Pay
G592-00175-SPMI	DWA-5010	Silver & Gold, Coin Pays Spanish
G592-00175-OT++	DWA-5010	Silver & Gold, English/French Canadian, Coin Pays
G592-00175-PORT	DWA-5010	Silver & Gold, Portuguese, Coin Pays
G592-00175-S9DG	DWA-5010	Silver & Gold, Spanish, Coin Pays
G592-00175-SP++	DWA-5010	Silver & Gold, Spanish, Coin Pays
G592-00290-++++	DWA-5011	Bally Wild Double Symbols, Coin Pays
C592-00762-++++	DWA-5020	Goal, Coin Pays English
C592-00762-FR++	DWA-5020	Goal, Coin Pays French
C592-00762-SP++	DWA-5020	Goal, Coin Pays Spanish
G592-00150-PROG	DWC-5003	Jackpot Bars, Coin Pays
G592-00425-$10+	DWN-5001	Double Jackpot Smiley, $10 Pays
G592-00425-$5++	DWN-5001	Double Jackpot Smiley, $5 Pays
G592-00425-++++	DWN-5001	Double Jackpot Smiley, Coin Pays
G592-00425-SP++	DWN-5001	Double Jackpot Smiley, Coin Pays Spanish
C592-00425-SPMI	DWN-5001	Double Jackpot Smiley, Coin Pays, Spanish
G592-00425-S9DG	DWN-5001	Double Jackpot Smiley, Spanish
G592-00428-++++	DWN-5002	Double Jackpot Smiley, Coin Pays
G592-00428-SP++	DWN-5002	Double Jackpot Smiley, Coin Pays, Spanish
G592-00428-SPMI	DWN-5002	Double Jackpot Smiley, Coin Pays, Spanish
G592-00500-++++	DWN-5003	Double Dragon, Coin Pays
G592-00333-$5++	DWR-5001	Double Wild Rose, $5 Pays
G592-00333-++++	DWR-5001	Double Wild Rose, Coin Pays
G592-00333-$10	DWR-5001	Double Wild Rose, Coin Pays $10 Pays
G592-00333-12MI	DWR-5001	Double Wild Rose, Spanish, Coin Pays
G592-00333-SP++	DWR-5001	Double Wild Rose, Spanish, Coin Pays
C592-00333-SPMI	DWR-5001	Double Wild Rose, Spanish, Coin Pays
G592-00333-S9DG	DWR-5001	Double Wild Rose, Spanish, Coin Pays
G592-00359-++++	DWR-5002	24 Karat Coin Pays
G592-00359-$5++	DWR-5002	24 Karat, $5 Pays
G592-00359-SP++	DWR-5002	24 Karat, Spanish, Coin Pays

©2003 Bally Gaming and Systems

ProSlot® 6000

G592... Feature Glass (WT) (cont.)

GLASS	ART FORM	DESCRIPTION
C592-00360-$10+	DWR-5003	24 Karat, $10 Pays
C592-00360-$5++	DWR-5003	24 Karat, Credits
G592-00361-$10+	DWR-5004	24 Karat, $10 Pays
G592-00361-$25+	DWR-5004	24 Karat, $25 Pays
G592-00411-++++	DWR-5005	24 Karat, Coin Pays
G592-00411-12MI	DWR-5005	24 Karat, Coin Pays
G592-00411-SPMI	DWR-5005	24 Karat, Spanish, Coin Pays
G592-00413-SPMI	DWR-5006	Double Wild Rose, Pays Coins, Spanish
G592-00413-++++	DWR-5006	Wild Rose, Coin Pays
G592-00413-12MI	DWR-5006	Wild Rose, Coin Pays
G592-00413-SP++	DWR-5006	Wild Rose, Spanish, Coin Pays
G592-00415-++++	DWR-5007	Silver Lining, Coin Pays
C592-00415-SP++	DWR-5007	Silver Lining, Coin Pays, Spanish
C592-00689-++++	DWR-5008	Rapid Double Jackpot Coin
C592-00689-FR++	DWR-5008	Rapid Double Jackpot Coin, French
C592-00689-SP++	DWR-5008	Rapid Double Jackpot Coin, Spanish
C592-00689-$5++	DWR-5008	Rapid Double Jackpot, $5 Pays
C592-00690-++++	DWR-5009	Rapid Double Jackpot Coin
C592-00690-FR++	DWR-5009	Rapid Double Jackpot, Coin Pays, French
C592-00857-++++	DWR-5012	2 Times Money, Credits
C592-00834-++++	DWR-5013	2 Times Money
C592-00840-++++	DWR-5014	2 Times Money Blazing 7's, Credits
G592-00061-FR++	EB4-5003	Green Lion, French, Coin Pays
G592-00431-++++	F16-5001	1088 Look, Fruit, Coin Pays
G592-00089-++++	F17-5054	1088 Style, Coin Pays
G592-00089-12MI	F17-5054	1088 Style, Coin Pays
G592-00551-COIN	F17-5060	$ Special, Coin Pays
G592-00390-++++	F17-5060	$1 Special, Coin Pays
G592-00430-++++	F17-5062	1090 Look, Fruit, Coin Pays
G592-00189-++++	FAF-5001	Fame & Fortune Coin Pays
G592-00189-$5++	FAF-5001	Fame & Fortune, $5 Pays
G592-00189-S9DG	FAF-5001	Fame & Fortune, Spanish, Coin Pays
G592-00189-SPMI	FAF-5001	Fame & Fortune, Spanish, Coin Pays
G592-00193-++++	FAF-5002	Fame & Fortune, Coin Pays
G592-00193-14MI	FAF-5002	Fame & Fortune, Coin Pays
G592-00193-14MR	FAF-5002	Fame & Fortune, Coin Pays Micro
G592-00193-FR++	FAF-5002	Fame & Fortune, French, Coin Pays
G592-00193-SP++	FAF-5002	Fame & Fortune, Spanish, Coin Pays
G592-00244-++++	FAF-5003	Hit Parade, Coin Pays
G592-00245-++++	FAF-5004	Country Gold, Coin Pays
G592-00064-FC++	FAI-0003	Fire & Ice, French Canadian/English, Coin Pays
G592-00011-++++	FAI-5003	Fire & Ice, Coin Pays
G592-00011-FR++	FAI-5003	Fire & Ice, Coin Pays French
G592-00011-SP++	FAI-5003	Fire & Ice, Spanish, Coin Pays
G592-00004-$5++	FAI-5004	Fire & Ice, $5
G592-00038-++++	FAI-5005	Fire & Ice, Coin Pays
G592-00038-FR++	FAI-5005	Fire & Ice, Coin Pays French
G592-00133-++++	FAI-5006	Fire & Ice, Coin Pays
G592-00092++++	FAP-5046	1088 Style, Coin Pays
C592-00837-++++	FB7-5001	Famous 7's, Credits
C592-00837-12MI	FB7-5001	Famous 7's, Credits
C592-00838-++++	FB7-5002	Famous 7's, Credits
C592-00838-12MI	FB7-5002	Famous 7's, Credits
G592-00048-$2++	FBF-5002	Fireball, $2 Pays
G592-00048-++++	FBF-5002	Fireball, Coin Pays
G592-00048-POLR	FBF-5002	Fireball, Coin Pays
G592-00048-FR++	FBF-5002	Fireball, Coin Pays French
G592-00048-SP++	FBF-5002	Fireball, Spanish, Coin Pays
G592-00108-++++	FBF-5003	Fireball, Coin Pays
G592-00129-++++	FBF-5006	Fireball, Coin Pays
G592-00218-++++	FBF-5008	Fireball Coin Pays
G592-00030-++++	FBF-5008	Fireball, Coin Pays
G592-00250-++++	FBF-5012	Texas 2 Step, Coin Pays
G592-00251-++++	FBF-5013	Texas 2 Step, Coin Pays
G592-00251-FR++	FBF-5013	Texas 2 Step, French, Coin Pays
G592-00382-++++	FBF-5014	Texas 2 Step, Coin Pays
G592-00091-++++	FBJ-5009	1088 Style, Coin Pays
G592-00169-++++	FBJ-5013	Silver Strike, Coin Pays
G592-00236-++++	FBJ-5014	Custom Big Bill, Coin Pays
C592-00866-++++	FF2-5001	Bonus Frenzy, Credits
G592-00034-PGMT	FLB-5001	Flashback, Coin Pays
G592-00034-++++	FLB-5001	Flashback, Coin Pays
G592-00034-FR++	FLB-5001	Flashback, Coin Pays French
G592-00262-++++	FLB-5002	Wacky Winners, Coin Pays
G592-00262-FR++	FLB-5002	Wacky Winners, Coin Pays, Bally France
C592-00633-14MI	FLB-5003	Wild Ride, Coin Pays
G592-00633-++++	FLB-5003	Wild Ride, Coin Pays
C592-00633-SP++	FLB-5003	Wild Ride, Coin Pays Spanish
G592-00230-++++	FMB-5001	Lucky Dice, Coin Pays
G592-00520-++++	FND-5001	Five & Dime, Coin Pays
C592-00520-SP++	FND-5001	Five & Dime, Coin Pays, Spanish
G592-00521-++++	FND-5002	Five & Dime, Coin Pays
G592-00521-SP++	FND-5002	Five & Dime, Coin Pays Spanish
C592-C0885-++++	FRF-5001	Five Times Rich, Credits
C592-00631-$5++	FX7-5001	5 X 7's, $5 Pays

GLASS	ART FORM	DESCRIPTION
G592-00631-++++	FX7-5001	5 X 7's, Coin Pays
G592-00631-S9DG	FX7-5001	5 X 7's, Coin Pays Spanish
G592-00631-SP++	FX7-5001	5 X 7's, Coin Pays Spanish
C592-00631-FR++	FX7-5001	5 X 7's, Coin Pays, French
G592-00631-SPMI	FX7-5001	5 X 7's, Spanish, Coin Pays
G592-00655-++++	FX7-5002	5 X 7's, Coin Pays
C592-00721-PROG	GBB-5005	Blondie Meal Ticket
C592-00734-PROG	GBB-5006	Blondie Meal Ticket, Coin Pays
C592-00734-FRPG	GBB-5006	Blondie Meal Ticket, Coin Pays, French
C592-C0810-PROG	GBB-5007	Blondie Meal Ticket
C592-00810-FRPG	GBB-5007	Blondie Meal Ticket, French
G592-00676-++++	GDU-5001	Gold Down Under Coin Pays
G592-00677-++++	GDU-5002	Gold Down Under Coin Pays
G592-00144-PRO+	GEN-5001	Pro Series Clear Machine
G592-00323-++++	GJ3-5001	Giant Jackpot, Coin Pays
G592-00324-++++	GJ3-5002	Giant Jackpot, Coin Pays
G592-00001-FR++	GJP-5010	Giant Jackpot, Bally France, Coin Pays
G592-00001-++++	GJP-5010	Giant Jackpot, Coin Pays
G592-00006-$5++	GSL-5001	Grand Slam, $5 Pays
G592-00006-PGMT	GSL-5001	Grand Slam, Coin Pays
G592-00006-++++	GSL-5001	Grand Slam, Coin Pays
G592-00024-$5++	GSL-5002	Grand Slam, $5 Pays
G592-00024-++++	GSL-5002	Grand Slam, Coin Pays
G592-00024-FR++	GSL-5002	Grand Slam, Coin Pays French
G592-00024-FC++	GSL-5002	Grand Slam, Coin Pays French Canadian/English
G592-00014-$5++	GSL-5012	Gold Rush, $5 Pays
G592-00014-PGMT	GSL-5012	Gold Rush, Coin Pays
G592-00014-++++	GSL-5012	Gold Rush, Coin Pays
G592-00015-$5++	GSL-5013	Gold Rush, $5 Pays
G592-00015-++++	GSL-5013	Gold Rush, Coin Pays
G592-00015-FR++	GSL-5013	Gold Rush, Coin Pays French
G592-00015-SP++	GSL-5013	Gold Rush, Coin Pays Spanish
G592-00142-++++	GSL-5018	Gold Rush, Coin Pays
G592-00063-FC++	GSM-0001	Grand Slam, English/French Canadian, Coin Pays
G592-00025-$5++	GSM-5001	Grand Slam, $5 Pays
G592-00025-++++	GSM-5001	Grand Slam, Coin Pays
G592-00025-PROG	GSM-5001	Grand Slam, Header, Coin Pays
G592-00028-++++	HAR-5001	Hit & Run, Coin Pays
G592-00028-FR++	HAR-5001	Hit & Run, Coin Pays French
G592-00057-++++	HAR-5002	Sir Prize, Coin Pays
G592-00057-FR++	HAR-5002	Sir Prize, Coin Pays, French
G592-00110-++++	HAR-5003	Hit & Run, Coin Pays
G592-00111-++++	HAR-5004	Sir Prize, Coin Pays
C592-00844-++++	HPL-5001	Horse Play, Coin Pays
G592-00632-$5++	ITM-5001	In The Money, $5 Pays
G592-00632-$5MI	ITM-5001	In The Money, $5 Pays
G592-00632-++++	ITM-5001	In The Money, Coin Pays
C592-00632-12MI	ITM-5001	In The Money, Coin Pays English
G592-00632-FR++	ITM-5001	In The Money, Coin Pays French
G592-00632-S9DG	ITM-5001	In The Money, Coin Pays Spanish
G592-00632-SPMI	ITM-5001	In The Money, Coin Pays Spanish
G592-00632-SP++	ITM-5001	In The Money, Coin Pays Spanish
C592-00707-FR++	ITM-5002	In The Money, French
C592-00846-++++	ITM-5003	In The Money, Coin Pays
C592-00847-++++	ITM-5004	In The Money, Coin Pays
G592-00348-FRPG	JB4-5001	French Fortune, Coin Pays
G592-00637-PROG	JM7-5002	Bonus Blazing 7's, Coin Pays
G592-00637-12MI	JM7-5002	Bonus Blazing 7's, Coin Pays
C592-00671-12MI	JM7-5005	Flaming Bonus 7's Random Pays
G592-00671-++++	JM7-5005	Flaming Bonus 7's Random Pays
C592-00748-++++	JM7-5006	I Love Jackpots, Coin Pays
C592-00748-FR++	JM7-5006	I Love Jackpots, Coin Pays, French
C592-C0863-++++	JM7-5013	I Love Jackpots, Credits
C592-C0886-++++	JM7-5014	Castle Of Cash, Credits
G592-00380-PROG	JP3-5001	Bally Las Vegas Giant Jackpot Blue Background, Coin Pays
G592-00380-PGRD	JP3-5001	Bally Las Vegas Giant Jackpot Red Background, Coin Pays
G592-00031-++++	JQK-5003	Royal, Coin Pays
G592-00031-FR++	JQK-5003	Royal, French, Coin Pays
G592-00031-SP++	JQK-5003	Royal, Spanish, Coin Pays
G592-00032-++++	JQK-5004	Royal, Coin Pays
G592-00032-OT++	JQK-5004	Royal, English/French Canadian, Coin Pays
G592-00045-++++	JQK-5005	Royal, Coin Pays
G592-00081-++++	JQK-5006	Royal, Coin Pays
G592-00085-$5++	JQK-5007	Royal, $5 Pays
G592-00195-FR++	JQK-5009	Royal, French
G592-00285-++++	JQK-5010	7's, Coin Pays
G592-00285-FR++	JQK-5010	7's, Coin Pays French, Open
C592-00285-FC++	JQK-5010	7's, Coin Pays, French Canadian
G592-00284-++++	JQK-5011	7's, Coin Pays
G592-00284-OT++	JQK-5011	7's, English/French Canadian, Coin Pays
G592-00021-++++	JUJ-5001	Jumpin' Joker, Coin Pays
G592-00021-FC++	JUJ-5001	Jumpin' Joker, Coin Pays French Canadian/English
G592-00021-FR++	JUJ-5001	Jumpin' Joker, Coin Pays, French
G592-00161-++++	JUJ-5002	Bell Ringer, Coin Pays
G592-00019-PROG	LM7-5011	Triple Blazing 7's

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlot® 6000

G592... Feature Glass (WT) (cont.)

GLASS	ART FORM	DESCRIPTION
G592-00005-$5++	LM7-5011	Triple Blazing 7's, $5 Pays
G592-00005-++++	LM7-5011	Triple Blazing 7's, Coin Pays
G592-00005-FC++	LM7-5011	Triple Blazing 7's, French Canadian/English, Coin Pays
G592-00005-FR++	LM7-5011	Triple Blazing 7's, French, Coin Pays
C592-00005-SP++	LM7-5011	Triple Blazing 7's, Spanish, Coin Pays
G592-00109-$5++	LM7-5013	Triple Blazing 7's, $5 Pays
G592-00109-++++	LM7-5013	Triple Blazing 7's, Coin Pays
G592-00109-PROG	LM7-5013	Triple Blazing 7's, Coin Pays
G592-00109-SP++	LM7-5013	Triple Blazing 7's, Spanish, Coin Pays
G592-00118++++	LM7-5014	Triple Lightning 7's, Coin Pays
G592-00118-FR++	LM7-5014	Triple Lightning 7's, French, Coin Pays
G592-00118-SP++	LM7-5014	Triple Lightning 7's, Spanish, Coin Pays
G592-00119-++++	LM7-5015	Triple Lightning 7's, Coin Pays
G592-00131-++++	LM7-5016	Triple Blazing 7's, Coin Pays
G592-00162-++++	LM7-5022	Triple Blazing 7's, Coin Pays
G592-00165-++++	LM7-5023	Triple Lightning 7's, Coin Pays
G592-00167-$5++	LM7-5024	Triple Blazing 7's, $5 Pays
G592-00470-++++	LM7-5026	Chip In, Coin Pays
G592-00226-++++	LM7-5027	Triple Rose, Coin Pays
G592-00226-9DGT	LM7-5027	Triple Rose, Coin Pays
G592-00226-S9DG	LM7-5027	Triple Rose, Coin Pays
G592-00226-SP++	LM7-5027	Triple Rose, Spanish, Coin Pays
‖ G592-00226-SPMI	LM7-5027	Triple Rose, Spanish, Coin Pays
G592-00227-++++	LM7-5028	Triple Rose, Coin Pays
G592-00227-FR++	LM7-5028	Triple Rose, French, Coin Pays
G592-00227-S9DG	LM7-5028	Triple Rose, Spanish, Coin Pays
G592-00227-SP++	LM7-5028	Triple Rose, Spanish, Coin Pays
G592-00328-++++	LM7-5029	Triple Blazing 7's, Coin Pays
G592-00187-$5++	LMN-5001	Triple Blazing 7's, $5 Pays
G592-00187-++++	LMN-5001	Triple Blazing 7's, , Coin Pays
G592-00188-++++	LMN-5002	Triple Blazing 7's, Coin Pays
G592-00188-FC	LMN-5003	Triple Blazing 7's, French Canadian
G592-00188-SP++	LMN-5003	Triple Blazing 7's, Spanish
G592-00220-++++	LMN-5004	Stars & Bars Diamond Line, Coin Pays, USAF
G592-00478-++++	LMN-5005	Kilroy Triple Blazing 7's, Coin Pays
G592-00479-++++	LMN-5006	Kilroy Triple Blazing 7's, Coin Pays
‖ G592-00555-FR++	LMN-5007	Frogs, French, Coin Pays
G592-00563-FR++	LMN-5009	Cash Cow French, Coin Pays
‖ C592-00589-++++	LMN-5010	Les Pirates, English, Coin Pays
G592-00589-FR++	LMN-5010	Les Pirates, French, Coin Pays
G592-00067-$25+	LMS-5005	Black Gold Colors, $25 Pays
G592-00067-$5++	LMS-5005	Black Gold Colors, $5 Pays
G592-00067-++++	LMS-5005	Black Gold Colors, Coin Pays
G592-00070-$1C+	LMS-5007	Black Gold Colors, $100 Pays
G592-00070-$25+	LMS-5007	Black Gold Colors, $25 Pays
G592-00069-$1C+	MB7-0011	Black Gold Colors, $100 Pays
G592-00093-++++	MBO-5054	1088 Style, Coin Pays
G592-00231-++++	MBO-5056	Dice/7's, Coin Pays
G592-00374-++++	MBO-5057	1088/1090, Coin Pays
G592-00075-$2++	MBV-5001	Black Velvet, $2 Pays
G592-00075-$5++	MBV-5001	Black Velvet, $5 Pays
G592-00075-++++	MBV-5001	Black Velvet, Coin Pays
G592-00074-$25+	MBV-5002	Black Velvet, $25 Pays
G592-00116-$2++	MBV-5003	Black Velvet, $2 Pays
G592-00116-$5++	MBV-5003	Black Velvet, Coin Pays
G592-00116-++++	MBV-5003	Black Velvet, Coin Pays
G592-00116-FR++	MBV-5003	Black Velvet, French, Coin Pays
G592-00147-FR++	MBV-5004	Black Velvet, French, Coin Pays
G592-00255-$5++	MG7-5015	Black Gold, $5 Pays
G592-00269-$2MI	MG7-5016	Magnificent 7's $2 Pays
G592-00269-	MG7-5016	Magnificent 7's, Coin Pays
G592-00269-++++	MG7-5016	Magnificent 7's, Universal, Coin Pays
‖ G592-00352-$5++	MG7-5017	Magnificent 7's, Blue, $5 Pays
G592-00352-++++	MG7-5017	Magnificent 7's, Blue, Coin Pays
G592-00334-++++	MG7-5018	Magnificent 7's, Coin Pays
G592-00235-++++	MJ7-5003	Magnificent 7's, Coin Pays
G592-00253-$5++	MJ7-5004	Black Gold, $5 Pays
G592-00351-++++	MJ7-5005	Magnificent 7's, Blue, Coin Pays
G592-00351-FR++	MJ7-5005	Magnificent 7's, Blue, French, Coin Pays
G592-00351-SP++	MJ7-5005	Magnificent 7's, Blue, Spanish, Coin Pays
G592-00335-$5++	MJ7-5006	Magnificent 7's, $5 Pays
G592-00335-++++	MJ7-5006	Magnificent 7's, Coin Pays
G592-00335-FR++	MJ7-5006	Magnificent 7's, French, Coin Pays
G592-00398-PROG	MJ7-5008	Blazing Magnificent 7's, Coin Pays
G592-00398-++++	MJ7-5008	Blazing Magnificent 7's, Coin Pays
G592-00398-OT++	MJ7-5008	Blazing Magnificent 7's, English/French Canadian, Coin Pays
G592-00398-SP++	MJ7-5008	Blazing Magnificent 7's, Spanish, Coin Pays
G592-00400-++++	MJ7-5009	Gold Pot, Coin Pays
G592-00414-++++	MJ7-5010	Blue 7's, Coin Pays
G592-00669-++++	MJ7-5012	Magnificent 7's
G592-00638-++++	MJT-5012	Magnificent 7's, Coin Pays
G592-00644-++++	MNB-5001	Money Bars
‖ C592-00644-12MI	MNB-5001	Money Bars, Coin Pays
| G592-00644-FR++	MNB-5001	Money Bars, French
‖ G592-00644-S9DG	MNB-5001	Money Bars, Spanish

GLASS	ART FORM	DESCRIPTION
| G592-00644-SP++	MNB-5001	Money Bars, Spanish
‖ G592-00644-SPMI	MNB-5001	Money Bars, Spanish
‖ G592-00744-FC++	MNB-5002	Money Bars, 5 Line, Coin Pays French Canadian
‖ C592-00744-++++	MNB-5002	Money Bars, Coin Pays
‖ C592-00744-FR++	MNB-5002	Money Bars, Coin Pays French
G592-00086-$5++	MNC-5001	Monte Carlo, $5 Pays
G592-00086-++++	MNC-5001	Monte Carlo, Coin Pays
G592-00086-FR++	MNC-5001	Monte Carlo, French, Coin Pay
G592-00098-++++	MNC-5002	Las Vegas, Coin Pays
G592-00098-12MI	MNC-5002	Las Vegas, Coin Pays
G592-00098-SP++	MNC-5002	Las Vegas, Spanish, Coin Pays
G592-00098-FR++	MNC-5004	Las Vegas, Coin Pays French
‖ G592-00411-SP++	MWR-5005	24 Karat, Spanish, Coin Pays
G592-00376-++++	OTT-5001	Over The Top, Coin Pays
‖ G592-00357-++++	OV7-5001	Blue 7's Coin Pays
G592-00355-++++	OV7-5001	Blue 7's, Coin Pays
G592-00357-	OV7-5001	Blue 7's, Coin Pays
G592-00356-$5++	OV7-5002	Blue 7's $5 Pays
G592-00356-++++	OV7-5002	Blue 7's, Coin Pays
G592-00356-	OV7-5002	Blue 7's, Coin Pays
G592-00356-FR++	OV7-5002	Blue 7's, French, Coin Pays
G592-00391-12MI	OV7-5003	Flamingo Frenzy, Coin Pays
G592-00394-++++	OV7-5004	G-Force, Coin Pays
G592-00488-PROG	OV7-5006	Blue 7's, Coin Pays
G592-00027-++++	OVR-5001	Overload, Coin Pays
G592-00027-FR++	OVR-5001	Overload, Coin Pays French
G592-00136-++++	OVR-5003	Overload, Coin Pays Open
G592-00575-++++	OVR-5010	Count De Monee, Coin Pays
‖ C592-00645-12MI	QD7-5001	Quick Hit Triple Blazing 7's Double Symbol, Coin Pays
C592-00645-SPMI	QD7-5001	Quick Hit Triple Blazing 7's Double Symbol, Coin Pays Spanish
‖ C592-00749-12MI	QD7-5001	Quick Hits, Coin
‖ C592-OT749-12MI	QD7-5001	Quick Hits, Coin, Ontario
‖ C592-00749-SPMI	QD7-5001	Quick Hits, Coin, Spanish
‖ C592-00646-$5++	QD7-5003	Black & White Double Symbol, Quick Hit, $5 Pays
‖ C592-00646-$5AC	QD7-5003	Black & White Double Symbol, Quick Hit, $5 Pays
C592-00646-$5MI	QD7-5003	Black & White Double Symbol, Quick Hit, $5 Pays
‖ C592-OT646-$5++	QD7-5003	Black & White Double Symbol, Quick Hit, $5 Pays Ontario
C592-OT646-$5MI	QD7-5003	Black & White Double Symbol, Quick Hit, $5 Pays Ontario
‖ C592-00647-++++	QD7-5003	Black & White Double, Coin Pays
| C592-00647-12MI	QD7-5003	Black & White Double, Coin Pays
‖ C592-00647-FR++	QD7-5003	Black & White Double, Coin Pays French
‖ C592-OT647-12MI	QD7-5003	Black & White Double, Coin Pays Ontario
‖ C592-00647-SPMI	QD7-5003	Black & White Double, Coin Pays Spanish
‖ C592-00860-FR++	QD7-5003	Quick Hits, 5 X 10, French
‖ C592-00648-$5AC	QD7-5004	Black & White Double Symbol, Quick Hit, $5 Pays
| C592-00648-$5MI	QD7-5004	Black & White Double Symbol, Quick Hit, $5 Pays
‖ C592-OT648-$5MI	QD7-5004	Black & White Double Symbol, Quick Hit, $5 Pays Ontario
‖ C592-C0749-12MI	QD7-5005	Quick Hits, Credits
‖ G592-00723-12MI	QDC-5001	5 X 10 Quick Hits, Coin Pays
‖ G592-00723-SPMI	QDC-5001	5 X 10 Quick Hits, Coin Pays, Spanish
G592-00649-12MI	QDC-5001	5 X 10, Quick Hit, Coin Pays
‖ C592-00649-FR++	QDC-5001	5 X 10, Quick Hit, Coin Pays French
‖ G592-00649-SPMI	QDC-5001	5 X 10, Quick Hit, Coin Pays Spanish
‖ C592-00859-FR++	QDC-5001	Quick Hits, Black & White, French
C592-00651-12MI	QDC-5002	Black Gold 5 X 10 Quick Hit, Coin Pays
‖ C592-00651-SPMI	QDC-5002	Black Gold 5 X 10 Quick Hit, Coin Pays Spanish
‖ G592-00724-$5MI	QDC-5003	5 X 10 Quick Hits, $5 Pays
‖ C592-00724-$5++	QDC-5003	5 X 10 Quick Hits, $5 Pays
G592-00650-$5MI	QDC-5003	5 X 10, Quick Hit, $5 Pays
‖ C592-00719-$5MI	QDC-5004	5 X 10 Black Gold Colors, $5 Quick Hit
G592-00652-$5MI	QDC-5004	Black Gold 5 X 10 Quick Hit, $5 Pays
G592-00176-$4++	RAF-5001	Custom Red Gold, $4 Pays
G592-00103-$2++	RAF-5001	Rich & Famous, $2 Pays
G592-00103-$25+	RAF-5001	Rich & Famous, $25 Pays
G592-00103-$5++	RAF-5001	Rich & Famous, $5 Pays
G592-00103-++++	RAF-5001	Rich & Famous, Coin Pays
G592-00103-FR++	RAF-5001	Rich & Famous, French, Coin Pays
G592-00103-S9DG	RAF-5001	Rich & Famous, Spanish, Coin Pays
G592-00103-SP++	RAF-5001	Rich & Famous, Spanish, Coin Pays
‖ G592-00103-SPMI	RAF-5001	Rich & Famous, Spanish, Coin Pays
G592-00581-++++	RAF-5002	Miami Cityscapes, Coin Pays
G592-00581-12MI	RAF-5002	Miami Cityscapes, Coin Pays
G592-00104-$5++	RAF-5002	Rich & Famous, $5 Pays
G592-00104-++++	RAF-5002	Rich & Famous, Coin Pays
G592-00300-++++	RAF-5003	Bally Las Vegas/Motorcycle, Coin Pays
G592-00148-++++	RAF-5004	Rich & Famous, Coin Pays
G592-00148-FR-++	RAF-5004	Rich & Famous, French
G592-00148-SP++	RAF-5004	Rich & Famous, Spanish, Coin Pays
G592-00174-++++	RAF-5006	Win with the Stars, Ann Margaret, Coin Pays
G592-00172-++++	RAF-5006	Win with the Stars, George Burns, Coin Pays
G592-00173-++++	RAF-5006	Win with the Stars, Wayne Newton, Coin Pays
| G592-00178-$1C+	RAF-5010	$100 Rich & Famous
G592-00212-++++	RAF-5012	Rich & Famous, USAF, Coin Pays
G592-00233-++++	RAF-5013	Rich & Famous, Coin Pays
G592-00238-$1C+	RAF-5014	Rich & Famous, $100 Pays

©2003 Bally Gaming and Systems

G592... Feature Glass (WT) (cont.)

GLASS	ART FORM	DESCRIPTION
G592-00239-$25+	RAF-5015	Rich & Famous, $25 Pays
G592-00240-$10+	RAF-5016	Rich & Famous, $10 Pays
G592-00242-++++	RAF-5017	Hit Parade, Coin Pays
G592-00243-++++	RAF-5018	Country Gold, Coin Pays
G592-00266-++++	RAF-5019	Born To Be Wild, Harley
G592-00424-++++	RAF-5024	Golden Eye 007's, Coin Pays
G592-00386-FR++	RAF-5027	Green Lion, French, Coin Pays
G592-00469-++++	RAF-5029	Rich & Famous, Coin Pays
G592-00469-SP++	RAF-5029	Rich & Famous, Spanish, Coin Pays
G592-00502-++++	RAF-5030	Spielbank Wiesbaden Raven, Custom, Coin Pays
G592-00401-++++	RAF-5031	Rich & Famous Black & White, Coin Pays
G592-00474-++++	RAF-5033	Kick & Win, Custom, Coin Pays
G592-00453-++++	RAF-5040	Rich & Famous, Coin Pays
G592-00473-++++	RAF-5041	Black & White, Coin Pays
G592-00473-SP++	RAF-5041	Black & White, Coin Pays Spanish
G592-00489-++++	RAF-5047	Silver & Gold, Coin Pays Usaf
G592-00579-++++	RAF-5050	Chicago Cityscapes, Coin Pays
|| G592-00579-12MI	RAF-5050	Chicago Cityscapes, Coin Pays
|| G592-00580-++++	RAF-5051	Dallas Cityscapes, Coin Pays
G592-00582-++++	RAF-5054	New Orleans Cityscapes, Coin Pays
G592-00582-12MI	RAF-5054	New Orleans Cityscapes, Coin Pays
G592-00596-++++	RAF-5055	Magic Fortune Coin Pays
|| C592-00753-++++	RAF-5057	Memphis Blues, Coin Pays
|| C592-00753-12MI	RAF-5057	Memphis Blues, Coin Pays Credits,
G592-00591-PROG	RBB-5002	Payday Black & Gold, Coin Pays
G592-00547-PROG	RBB-5004	Payday Black & Gold Generic, Coin Pays
G592-00599-PROG	RBB-5005	Payday Generic Black & Gold, Coin Pays
G592-00546-PROG	RBB-5006	Payday Black & Gold Generic, Coin Pays
G592-00615-$1C+	RBF-5001	Paris Flur De Lei, $100 Pays
| C592-00156-$5MI	RH7-5001	Red Hot 7's, $5 Pays
G592-00156-$5++	RH7-5001	Red Hot 7's, $5 Pays
G592-00156-++++	RH7-5001	Red Hot 7's, Coin Pays
G592-00156-FR++	RH7-5001	Red Hot 7's, French, Coin Pays
G592-00156-SP++	RH7-5001	Red Hot 7's, Spanish, Coin Pays
G592-00237-	RH7-5002	Harrah's Red Hot Genies,
G592-00237-25MI	RH7-5002	Harrah's Red Hot Genies, $25 Pays
G592-00237-$5PG	RH7-5002	Harrah's Red Hot Genies, $5 Pays
G592-00446-$5++	RTW-5001	Roaring 20's, $5 Pays
G592-00446-$5MI	RTW-5001	Roaring 20's, $5 Pays
G592-00446-OSPC	RTW-5001	Roaring 20's, 2 Open S, Coin Pays
|| G592-00446-++++	RTW-5001	Roaring 20's, Coin Pays
G592-00446-12MI	RTW-5001	Roaring 20's, Coin Pays
G592-00446-14MI	RTW-5001	Roaring 20's, Coin Pays
G592-00446-SPMI	RTW-5001	Roaring 20's, Coin Pays Spanish
G592-00446-OT++	RTW-5001	Roaring 20's, English/French Canadian, Coin Pays
G592-00446-FR++	RTW-5001	Roaring 20's, French, Coin Pays
G592-00446-FR2+	RTW-5001	Roaring 20's, French, Coin Pays
G592-00446-SAFR	RTW-5001	Roaring 20's, South Africa Special
G592-00446-S9DG	RTW-5001	Roaring 20's, Spanish, Coin Pays
G592-00446-SP++	RTW-5001	Roaring 20's, Spanish, Coin Pays
G592-00446-S12M	RTW-5001	Roaring 20's, Spanish
G592-00463-++++	RTW-5002	Question Mark Game, Coin Pays
G592-00463-12MI	RTW-5002	Question Mark Game, Coin Pays
|| C592-00463-SPMI	RTW-5002	Question Mark Game, Coin Pays Spanish
G592-00463-FR++	RTW-5002	Question Mark Game, French, Coin Pays
G592-00463-SAFR	RTW-5002	Question Mark Game, South Africa Special, Coin Pays
|| G592-00463-SP++	RTW-5002	Question Mark Game, Spanish, Coin Pays
G592-00574-++++	RTW-5004	Swing Time, Coin Pays
|| G592-00574-SPMI	RTW-5004	Swing Time, Coin Pays Spanish
|| C592-00715-NJ++	RTW-5004	Swing Time, Coin Pays, New Jersey
G592-00574-FR++	RTW-5004	Swing Time, French, Coin Pays
G592-00574-S9DG	RTW-5004	Swing Time, French, Coin Pays Spanish
G592-00574-12MI	RTW-5005	Swing Time, Coin Pays
G592-00574-SP++	RTW-5007	Swing Time, Coin Pays Spanish
G592-00574-++++	RTW-5008	Swing Time, Coin Pays
G592-00574-SP++	RTW-5008	Swing Time, Coin Pays Spanish
G592-00620-++++	RTW-5009	Y2k Bug, Coin Pays
G592-00620-S9DG	RTW-5009	Y2k Bug, Coin Pays Spanish
G592-00620-FR++	RTW-5009	Y2k Bug, French, Coin Pays
G592-00620-SP++	RTW-5009	Y2k Bug, Spanish Coin
|| G592-00635-12MI	RTW-5012	Krazy Kops, Coin Pays
G592-00635-++++	RTW-5012	Krazy Kops, Coin Pays
C592-00635-SP++	RTW-5012	Krazy Kops, Coin Pays Spanish
|| G592-00635-S9DG	RTW-5012	Krazy Kops, Coin Pays Spanish
|| G592-00635-SPMI	RTW-5012	Krazy Kops, Coin Pays Spanish
G592-00654-++++	RTW-5013	Roaring 20's, Coin Pays
| C592-00696-++++	RTW-5023	At The Hop, Coin Pays
|| C592-00696-$5++	RTW-5023	At The Hop, Coin Pays $5 Pays
|| C592-00696-$5MI	RTW-5023	At The Hop, Coin Pays $5 Pays
|| C592-00696-SP++	RTW-5023	At The Hop, Coin Pays Spanish
| C592-00697-++++	RTW-5024	At The Hop, Coin Pays
G592-00007-PROG	SAB-5005	Stars & Bars
G592-00007-++++	SAB-5005	Stars & Bars, Coin Pays
G592-00007-3PRG	SAB-5005	Stars & Bars, Coin Pays
G592-00007-FR++	SAB-5005	Stars & Bars, French, Coin Pays

GLASS	ART FORM	DESCRIPTION
G592-00072-PROG	SAB-5006	Stars & Bars
G592-00003-++++	SAB-5006	Stars & Bars, Coin Pays
G592-00003-FR++	SAB-5006	Stars & Bars, French, Coin Pays
G592-00009-++++	SAB-5009	Stars & Bars, Coin Pays
G592-00010-++++	SAB-5016	Stars & Bars, Coin Pays
G592-00051-++++	SAB-5017	Stars & Bars, Coin Pays
G592-00051-SP++	SAB-5017	Stars & Bars, Spanish, Coin Pays
G592-00052-++++	SAB-5018	Stars & Bars, Coin Pays
G592-00052-SP++	SAB-5018	Stars & Bars, Spanish, Coin Pays
G592-00083-++++	SAB-5019	Stars & Bars, Coin Pays
G592-00083-	SAB-5019	Stars & Bars, Coin Pays
G592-00190-++++	SAB-5020	Stars & Bars, Coin Pays
G592-00190-SP++	SAB-5020	Stars & Bars, Spanish, Coin Pays
G592-00113-++++	SAB-5021	Stars & Bars, Coin Pays
G592-00134-++++	SAB-5021	Stars & Bars, Coin Pays
G592-00088-++++	SAB-5022	Stars & Bars, Coin Pays
G592-00137-++++	SAB-5025	Stars & Bars, Coin Pays
G592-00387-12MI	SAB-5032	Laser 7's, Coin Pays
G592-00590-PROG	SBB-5002	Payday Blazing 7's, Coin Pays
G592-00584-12MI	SBB-5002	Win A Jag, Coin Pays
|| G592-00558-12MI	SBB-5004	Blazing Triple 7's with Double Symbol, English
G592-00558-PROG	SBB-5004	Payday Blazing 7's
G592-00550-PROG	SBB-5004	Payday Blazing 7's Generic, Coin Pays
G592-00598-PROG	SBB-5005	Payday Generic Blazing 7's, Coin Pays
G592-00543-PROG	SBB-5006	Payday Blazing 7's Generic, Coin Pays
G592-00485-12MI	SBC-5001	Win A Cadillac Custom, Coin Pays
G592-00180-$5++	SBW-5001	Stars & Bars with Wild Diamond, $5 Pays
G592-00180-++++	SBW-5001	Stars & Bars with Wild Diamond, Coin Pays
G592-00180-2PRG	SBW-5001	Stars & Bars with Wild Diamond, Coin Pays
G592-00181-++++	SBW-5002	Stars & Bars with Wild Diamond, Coin Pays
G592-00181-12MI	SBW-5002	Stars & Bars with Wild Diamond, Coin Pays
G592-00181-S9DG	SBW-5002	Stars & Bars with Wild Diamond, Spanish, Coin Pays
C592-00181-SP++	SBW-5002	Stars & Bars with Wild Diamond, Spanish, Coin Pays
G592-00221-++++	SBW-5003	Stars & Bars Wild Diamond, Open
G592-00222-++++	SBW-5004	Stars & Bars Wild Diamond, Open
|| C592-00793-++++	SCC-5002	Leprechauns, Coin Pays
C592-00636-++++	SCC-5003	Lucky Game, Coin Pays
|| C592-00636-FR++	SCC-5003	Lucky Game, Coin Pays French
|| C592-00636-SP++	SCC-5003	Lucky Game, Coin Pays Spanish
G592-00392-++++	STR-5001	Blue Streak, Coin Pay
G592-00035-++++	SUC-5012	Super Continental, Coin Pays
G592-00035-PROG	SUC-5012	Super Continental, Coin Pays
G592-00035-FR++	SUC-5012	Super Continental, French, Coin Pays
G592-00416-CL93	SUC-5013	Club 93 Custom
G592-00457-++++	SUC-5014	Super Continental, Coin Pays
G592-00128-++++	SVN-5001	7's, Coin Pays
G592-00200-++++	SVN-5001	7's, Coin Pays
G592-00128-OT++	SVN-5001	7's, English/French Canadian, Coin Pays
G592-00128-FR++	SVN-5001	7's, French, Coin Pays
G592-00286-++++	SVN-5003	Bars, Coin Pays
G592-00287-++++	SVN-5004	Bars, Coin Pays
G592-00062-FC++	SWB-0027	Jackpot Eruption, English/French Canadian, Coin Pays
G592-00055-++++	SWB-5032	T-Rex, Coin Pays
G592-00139-++++	SWB-5035	T-Rex, Coin Pays Open
G592-00325-++++	SWB-5036	T-Rex, 5 Coin, Coin Pays
G592-00016-++++	SWR-5001	Instant Repay, Coin Pays
G592-00592-PROG	TBB-5001	Payday Stars & Bars, Coin Pays
G592-00600-PROG	TBB-5004	Payday Generic Black & White, Coin Pays
G592-00548-PROG	TBB-5005	Payday Stars & Bars Meter, Coin Pays
G592-00545-PROG	TBB-5006	Payday Stars & Bars Generic, Coin Pays
|| C592-00829-++++	TDM-5001	Triple Double Money, Credits
|| C592-00830-++++	TDM-5003	Triple Double Money, Credits
|| C592-00825-++++	TDM-5004	Triple Double Money, Credits
|| C592-00826-++++	TDM-5005	Triple Double Money –Credits
|| C592-00835-++++	TFR-5001	Bonus Times Frenzy, Credits
|| C592-00836-++++	TFR-5002	Pool Ball Frenzy, Credits
G592-00223-$5++	TGD-5001	Triple Gold, $5 Pays
G592-00223-++++	TGD-5001	Triple Gold, Coin Pays
G592-00223-PORT	TGD-5001	Triple Gold, Portuguese, Coin Pay
G592-00223-SP++	TGD-5001	Triple Gold, Spanish, Coin Pays
G592-00223-12MI	TGD-5002	Triple Gold, Coin Pays
G592-00224-++++	TGD-5002	Triple Gold, Coin Pays
G592-00224-FR++	TGD-5002	Triple Gold, French, Coin Pays
G592-00224-PORT	TGD-5002	Triple Gold, Portuguese, Coin Pays
G592-00224-SP++	TGD-5002	Triple Gold, Spanish, Coin Pays
G592-00311-++++	TGD-5003	Hockey Hat Trick, Coin Pays
G592-00223-14MI	TGD-5003	Triple Gold, Coin Pays
G592-00299-$10+	TGD-5004	Bally Las Vegas Triple Gold, $10 Pays
G592-00299-$25+	TGD-5004	Bally Las Vegas Triple Gold, $25 Pays
G592-00299-$5++	TGD-5004	Bally Las Vegas Triple Gold, $5 Pays
|| G592-00299-++++	TGD-5004	Bally Las Vegas Triple Gold, Coin Pays
G592-00367-	TGD-5005	Triple Launch Hilton, Coin Pays
G592-00451-++++	TGD-5007	Triple Gold, Jackpot Bars, Coin Pays
G592-00553-FR++	TGD-5008	Silver & Gold Pirate, French, Coin Pays
|| C592-00853-++++	TGD-5010	Triple Money, Credits

©2003 Bally Gaming and Systems

ProSlot® 6000

G592... Feature Glass (WT) (cont.)

GLASS	ART FORM	DESCRIPTION
	C592-00841-++++	TGD-5011	Triple Money, Credits
	C592-00856-++++	TGD-5012	Triple Money, Credits
	C592-00856-FR++	TGD-5012	Triple Money, Credits, French
	C592-00855-FR++	TGD-5014	Triple Money, Coin, French
	C592-00855-++++	TGD-5014	Triple Money, Credits
G592-00155-FR++	THB-5001	Thunderbolt, French, Coin Pays
G592-00155-++++	THB-5001	Thunderbolt, Coin Pays
G592-00155-SP++	THB-5001	Thunderbolt, Spanish, Coin Pays
G592-00201-++++	THB-5002	Thunderbolt Coin Pays
G592-00309-$5++	TM7-5001	Triple Jackpot, Triple Blazing 7's, $5 Pays
G592-00309-++++	TM7-5001	Triple Jackpot, Triple Blazing 7's, Coin Pays
G592-00309-12MI	TM7-5001	Triple Jackpot, Triple Blazing 7's, Coin Pays
G592-00310-++++	TM7-5002	Triple Jackpot, Triple Blazing 7's, Coin Pays
G592-00310-SP++	TM7-5002	Triple Jackpot, Triple Blazing 7's, Coin Pays Spanish
	G592-00310-12MI	TM7-5002	Triple Symbol Blazing Triple 7's, English
	C592-00808-++++	TM7-5004	Triple Blazing 7's, Triple Money, Credits
	C592-00848-++++	TM7-5004	Triple Money
	C592-00821-++++	TM7-5005	Triple Blazing, Triple Money, Credits
	C592-00827-++++	TM7-5006	Triple Blazing Triple Money, Credits
	C592-00828-++++	TM7-5007	Triple Blazing Triple Money, Credits
	C592-00823-++++	TR7-5001	Fabulous 7's, Credits
	C592-C0876-FR++	TR7-5002	Fabulous 7's, Coins, French
	C592-00824-++++	TR7-5003	Fabulous 7's, Credits
	C592-C0824-12MI	TR7-5003	Fabulous 7's, Credits
	C592-00777-++++	TRB-5001	3 Way Pay, Coin Pays
	C592-00777-12MI	TRB-5001	3 Way Pay, Coin Pays
	C592-00777-14MI	TRB-5001	3 Way Pay, Coin Pays
	C592-00777-FR++	TRB-5001	3 Way Pay, Coin Pays French
	C592-00786-PROG	TRB-5001	3 Way, Coin Pays
	C592-00777-SP++	TRB-5001	4 Way Pay, Coin Pays Spanish
	C592-00850-++++	TTM-5003	Ten Times Money, Credits
G592-00307-++++	TWO-5001	Twin Win Bally Custom, Coin Pays
G592-00307-2PRG	TWO-5001	Twin Win Bally Custom, Coin Pays
G592-00308-++++	TWO-5002	Twin Win Bally Custom, Coin Pays
G592-00308-2PRG	TWO-5002	Twin Win Bally Custom, Coin Pays
G592-00140-++++	WB7-5001	Wild 7's, Coin Pays (5000 Tour Look Like)
G592-00668-++++	WB7-5002	Tournament Blazing 7's
G592-00168-$5++	WB7-5005	Open Sesame, $5 Pays
G592-00168-++++	WB7-5005	Open Sesame, Coin Pays
	C592-00745-SP++	WB7-5007	Caribbean Getaway, Coin Pays Spanish
	C592-00700-++++	WB7-5009	Born To Boop Tournament
	C592-00728-++++	WB7-5010	Blondie Tournament, Coin Pays
C592-00756-++++	WB7-5011	Popeye Tournament, Coin Pays
	C592-00779-++++	WB7-5012	Frankie & Annette Tournament, Coin Pays
	C592-00798-++++	WB7-5013	Playboy Tournament, Coin Pays
G592-00315-++++	WBE-5001	Bally Las Vegas Wild Bells, Coin Pays
G592-00264-$25+	WBO-5011	Wild Rose, $25 Pays
G592-00017-++++	WFC-5001	Firecracker, Coin Pays
G592-00017-FR++	WFC-5001	Firecracker, Coin Pays French
G592-00056-$10+	WHL-5001	White Lightning, $10 Pays
G592-00056-$5++	WHL-5001	White Lightning, $5 Pays
G592-00056-++++	WHL-5001	White Lightning, Coin Pays
G592-00056-FR++	WHL-5001	White Lightning, Coin Pays French
G592-00056-FC++	WHL-5001	White Lightning, Coin Pays French Canadian/English
G592-00056-SP++	WHL-5001	White Lightning, Spanish, Coin Pays
G592-00079-$25++	WHL-5002	White Lightning, $25 Pays
G592-00079-$5++	WHL-5002	White Lightning, $5 Pays
	C592-00079-++++	WHL-5002	White Lightning, Coin Pays
G592-00080-$1C+	WHL-5003	White Lightning, $100 Pays
G592-00080-$25+	WHL-5003	White Lightning, $25 Pays
G592-00080-$5++	WHL-5003	White Lightning, $5 Pays
G592-00080-++++	WHL-5003	White Lightning, Coin Pays
G592-00107-$5++	WHL-5005	White Lightning, $5 Pays
G592-00107-++++	WHL-5005	White Lightning, Coin Pays
G592-00107-SP++	WHL-5005	White Lightning, Spanish, Coin Pays
G592-00130-++++	WHL-5006	White Lightning, Coin Pays
G592-00124-$1C+	WHL-5007	Golden Nugget Custom, $100 Pays
G592-00196-$25+	WHL-5013	Custom Hilton Only, $25 Pays
G592-00215-++++	WHL-5014	White Lightning, Coin Pays
G592-00570-$1C+	WHL-5016	Custom Beau Rivage, $100
G592-00191-FR++	WLI-5024	Wild Rose, Coin Pays French
G592-00022-$10+	WLI-5027	White Gold, $10 Pays
G592-00022-$5++	WLI-5027	White Gold, $5 Pays
G592-00022-++++	WLI-5027	White Gold, Coin Pays
G592-00022-FR++	WLI-5027	White Gold, Coin Pays French
G592-00022-SP++	WLI-5027	White Gold, Spanish, Coin Pays
G592-00054-$10+	WLI-5028	Black Gold, $10 Pays
G592-00054-$25+	WLI-5028	Black Gold, $25 Pays
G592-00054-$5++	WLI-5028	Black Gold, $5 Pays
G592-00054-PG$5	WLI-5028	Black Gold, $5 Pays
G592-00054-++++	WLI-5028	Black Gold, Coin Pays
G592-00054-PGMT	WLI-5028	Black Gold, Coin Pays
G592-00054-FR++	WLI-5028	Black Gold, Coin Pays French
G592-00054-SP++	WLI-5028	Black Gold, Spanish, Coin Pays
G592-00207-$5++	WLI-5030	White Gold, $5 Pays

GLASS	ART FORM	DESCRIPTION
G592-00143-$5++	WLI-5032	White Gold, $5 Pays
G592-00191-$10+	WLI-5034	Wild Rose, $10 Pays
G592-00191-$25	WLI-5034	Wild Rose, $25 Pays
G592-00191-$5++	WLI-5034	Wild Rose, $5 Pays
G592-00191-++++	WLI-5034	Wild Rose, Coin Pays
G592-00198-PGMT	WLI-5035	Prairie Meadow Gold
G592-00316-	WLI-5036	Sheraton Green Coin Pays
G592-00320-$5PG	WLI-5036	Sheraton Green, $5 Pays
G592-00317-	WLI-5036	Sheraton Purple Coin Pays
G592-00321-$5PG	WLI-5036	Sheraton Purple, $5 Pays
G592-00259-$10+	WLI-5037	Black Gold, $10 Pays
G592-00234-$10+	WLI-5038	Black Gold, $10 Pays
G592-00234-$1C+	WLI-5038	Black Gold, $100 Pays
G592-00234-$25+	WLI-5038	Black Gold, $25 Pays
G592-00234-$5++	WLI-5038	Black Gold, $5 Pays
G592-00234-++++	WLI-5038	Black Gold, Coin Pays
	G592-00234-$5MI	WLI-5038	Black Gold, English, $5 Pays
G592-00211-++++	WM7-5006	Cherries Jubilee, Coin Pays
G592-00122-$5++	WMB-5001	Black Gold, $5 Pays
G592-00122-$5PG	WMB-5001	Black Gold, $5 Pays
G592-00232-$5++	WMB-5018	Bally Gold, $5 Pays
G592-00294-$5++	WMS-5001	Bally 7's Wild, $5 Pays
G592-00254-$5++	WMS-5002	Black Gold, $5 Pays
	G592-00192-++++	WR0-5003	Black Gold, Coin Pays
G592-00426-++++	WRN-5001	Wild Smiley, Coin Pays
G592-00429-++++	WRN-5002	Wild Smiley, Coin Pays
G592-00429-FR++	WRN-5002	Wild Smiley, French, Coin Pays
G592-00429-SP++	WRN-5002	Wild Smiley, Spanish, Coin Pays
G592-00503-++++	WRN-5003	Double Dragon, Coin Pays
G592-00120-$2++	WRO-5001	Wild Rose, $2 Pays
G592-00120-$20+	WRO-5001	Wild Rose, $25 Pays
G592-00120-$25+	WRO-5001	Wild Rose, $25 Pays
G592-00120-$5++	WRO-5001	Wild Rose, $5 Pays
G592-00120-++++	WRO-5001	Wild Rose, Coin Pays
G592-00120-9DGT	WRO-5001	Wild Rose, Coin Pays
	C592-00120-SPMI	WRO-5001	Wild Rose, Spanish, Coin Pays
G592-00120-S9DG	WRO-5001	Wild Rose, Spanish, Coin Pays
G592-00120-SP++	WRO-5001	Wild Rose, Spanish, Coin Pays
G592-00194-++++	WRO-5002	Wild Rose, Coin Pays
G592-00194-	WRO-5002	Wild Rose, Coin Pays
G592-00194-FC++	WRO-5002	Wild Rose, Coin Pays, French Canadian
G592-00194-FR++	WRO-5002	Wild Rose, French, Coin Pays
G592-00194-SP++	WRO-5002	Wild Rose, Spanish, Coin Pays
G592-00192-$25+	WRO-5003	Black Gold, $25 Pays
G592-00192-$5++	WRO-5003	Black Gold, $5 Pays
G592-00217-++++	WRO-5005	Winner Circle, Coin Pays
G592-00214-++++	WRO-5006	Black Velvet, Coin Pays
G592-00313-++++	WRO-5007	Wild Rose, Coin Pays
G592-00313-SP++	WRO-5007	Wild Rose, Spanish, Coin Pays
G592-00278-$1C+	WRO-5008	Wild Rose, $100 Pays
	G592-00277-++++	WRO-5009	Wild Rose
G592-00277-$25+	WRO-5009	Wild Rose, $25 Pays
G592-00261-$10++	WRO-5010	Wild Rose, $10 Pays
	G592-00275-S9DG	WRO-5013	All American, Spanish, Coin Pays
G592-00252-$5++	WRO-5013	Silver & Gold, $5 Pays
G592-00252-++++	WRO-5013	Silver & Gold, Coin Pays
	G592-00252-SP++	WRO-5013	Silver & Gold, Spanish
G592-00252-S9DG	WRO-5013	Silver & Gold, Spanish, Coin Pays
G592-00258-++++	WRO-5014	Wild Rose, Coin Pays
G592-00209-++++	WRO-5016	Cherries Jubilee, Coin Pays
G592-00210-++++	WRO-5017	Cherries Jubilee, Coin Pays
G592-00273-++++	WRO-5019	Sweet Hearts, Coin Pays
G592-00302-++++	WRO-5021	Wild Rose, Coin Pays
	G592-00302-FR++	WRO-5021	Wild Rose, French
G592-00302-SP++	WRO-5021	Wild Rose, Spanish, Coin Pays
G592-00303-++++	WRO-5022	Wild Rose, Coin Pays
G592-00303-FR++	WRO-5022	Wild Rose, French, Coin Pays
G592-00303-SP++	WRO-5022	Wild Rose, Spanish, Coin Pay
G592-00353-FR++	WRO-5024	Black Gold, Coin Pays, French
G592-00354-PROG	WRO-5025	Quarter Horse, Coin Pays
G592-00362-$5++	WRO-5026	24 Karat with Wild Symbol, $5 Pays
G592-00362-++++	WRO-5026	24 Karat with Wild Symbol, Coin Pays
G592-00362-FR++	WRO-5026	24 Karat with Wild Symbol, French, Coin Pay
G592-00363-$10+	WRO-5027	24 Karat with Wild Symbol, $10 Pays
G592-00327-$25+	WRO-5027	Wild Rose, $25 Pays
G592-00364-$25+	WRO-5028	24 Karat with Wild Symbol, $25 Pays
G592-00364-FR++	WRO-5028	24 Karat with Wild Symbol, French, Coin Pays
G592-00365-$1C+	WRO-5029	24 Karat with Wild Symbol, $100 Pays
	C592-00365-++++	WRO-5029	24 Karat with Wild Symbol, Coin Pays
G592-00375-++++	WRO-5030	Sweet Hearts, Coin Pays
G592-00388-12MI	WRO-5031	Wild Comet, Coin Pay
G592-00420-12MI	WRO-5033	24 Karat, Coin Pay
G592-00420-++++	WRO-5033	24 Karat, Coin Pays
G592-00454-++++	WRO-5034	Wild Rose, Coin Pays
	C592-00763-++++	WTS-5003	Wild Times Slot

©2003 Bally Gaming and Systems
| - Revised, || - New

ProSlot® 6000

G592... Feature Glass (WT) (cont.)

GLASS	ART FORM	DESCRIPTION
C592-00763-$5++	WTS-5003	Wild Times Slot, $5 Pays
C592-00763-FR++	WTS-5003	Wild Times Slot, French
C592-00785-LIBE	WTS-5009	Liberace, Credits
C592-C0891-12MI	WTS-5013	Blues Brothers, Credits
C592-C0891-12MI	WTS-5014	Blues Brothers, Credits
G592-00319-$5++	WWB-5002	Diamonds & Roses, $5 Pays
G592-00319-++++	WWB-5002	Diamonds & Roses, Coin Pays
G592-00319-	WWB-5002	Diamonds & Roses, Coin Pays
G592-00349-9DIG	WWB-5003	Diamond & Roses, Coin Pays
G592-00349-++++	WWB-5003	Diamonds & Roses, Coin Pays
G592-00383-S9DG	WWB-5005	Diamond & Roses, $5 Pay, Spanish
G592-00383-$5++	WWB-5005	Diamond & Roses, $5 Pays
G592-00383-SP++	WWB-5005	Diamond & Roses, Coin Pay, Spanish
C592-00383-++++	WWB-5005	Diamond & Roses, Coin Pays
C592-00383-SPMI	WWB-5005	Diamond & Roses, Coin Pays, Spanish
C592-00385-++++	WWB-5006	Diamonds & Roses, Coin Pay
G592-00385-14MI	WWB-5006	Diamonds & Roses, Coin Pays
G592-00385-FR++	WWB-5006	Diamonds & Roses, French, Coin Pays
G592-00385-SP++	WWB-5006	Diamonds & Roses, Spanish, Coin Pays
G592-00670-++++	ZDM-5001	Bonus Times Coin
G592-00670-SP++	ZDM-5001	Bonus Times Coin, Spanish
C592-00670-FR++	ZDM-5001	Bonus Times, Coin Pays French

G600... Feature Glass (CT)

GLASS	ART FORM	DESCRIPTION
G600-00057-FC++	AC4-5020	English/French Canadian
G600-00065-++++	APD-5001	Any Double Jackpot, Coin Pays
G600-00065-FC++	APD-5001	Any Double Jackpot, Coin Pays, English/French Canadian
G600-00013-++++	APN-5001	Hat Trick, Coin Pays
G600-00051-++++	APT-5001	Wild Tiger, Coin Pays
G600-00051-FC++	APT-5001	Wild Tiger, Coin Pays, English/French Canadian
G600-00060-++++	APT-5002	Wild Tiger, Coin Pays
G600-00060-FC++	APT-5002	Wild Tiger, English/French Canadian, Coin Pays
G600-00062-FC++	APT-5003	Fruit Loot, English/French Canadian
G600-00018-++++	APT-5014	Deuces Wild, Coin Pays
G600-00041-++++	APT-5015	Deuces Wild, Coin Pays
G600-00158-++++	APT-5023	Ball Of Fire, Coin Pays
G600-00158-9DIG	APT-5023	Ball Of Fire, Coin Pays
G600-00158-FC++	APT-5023	Ball Of Fire, French Canadian, Coin Pays
G600-00159-++++	APT-5024	Ball Of Fire, Coin Pays
G600-00232-++++	APT-5025	Win, Coin Pays
G600-00227-++++	APT-5026	Win, Coin Pays
G600-00227-FC++	APT-5026	Win, French Canadian, Coin Pays
C600-00633-$2++	APW-5001	Wild & Mixed Sevens, Credit Pays
C600-00633-12MI	APW-5001	Wild & Mixed Sevens, Credit Pays
C600-00547-$5++	APW-5005	Wild Party, $5 Pay,
C600-00648-++++	APW-5005	Wild Party, Credit Pays
G600-00115-++++	BAR-5004	Gold Rush Style Jackpot Bars, Coin Pays
G600-00130-++++	BAR-5005	Jackpot Bars Gold Rush Style, Coin Pays
G600-00099-++++	BAR-5006	Bars, Coin Pays
G600-00423-PROG	BDM-5001	Betty Boop Double Jackpot, Coin Pays
G600-00424-PROG	BDM-5002	Betty Boop Double Jackpot, Coin Pays
G600-00425-PROG	BDM-5003	Betty Boop Double Jackpot, Coin Pays
G600-00426-PROG	BDM-5004	Betty Boop Double Jackpot, Coin Pays
C600-00586-PROG	BDM-5011	Boop, Triple Blazing 7's, Coin Pays
G600-00437-PROG	BFB-5001	Respin Roundup
G600-00438-PROG	BFB-5002	Respin Roundup
G600-00439-PROG	BFB-5003	Respin Roundup
C600-00546-$2++	BFR-5001	Bonus Frenzy, $2 Pays
C600-00546-$5++	BFR-5001	Bonus Frenzy, $5 Pays
C600-00608-12MI	BFR-5001	Bonus Frenzy, Credit Pays
C600-C0708-++++	BFR-5001	Bonus Frenzy, Credit Pays
C600-C0708-FC++	BFR-5001	Bonus Frenzy, Credit Pays, French Canadian
C600-00537-12MI	BFR-5002	Winning For Dummies, Coin Pays
C600-00537-++++	BFR-5002	Winning For Dummies, Coin Pays,
C600-00611-++++	BFR-5003	Bonus Frenzy, Credit Pays
C600-C0611-$2++	BFR-5003	Bonus Frenzy, Credit Pays, $2 Pays
C600-C0612-++++	BFR-5006	Five Times Bonus Frenzy, Credit Pays
C600-00542-++++	BFR-5007	Bonus Frenzy, Coin Pays
C600-00541-$5++	BFR-5008	Bonus Fenzy, $5 Pays
C600-C0675-$2++	BFR-5008	Bonus Frenzy, Credit Pays
C600-00543-++++	BFR-5009	Winning For Dummies, Coin Pays
C600-00610-++++	BFR-5010	Richie Rich, Credit Pays
C600-00609-++++	BFR-5011	Andy Capp, Credit Pays
C600-00626-12MI	BFR-5012	Blondie Bonus Frenzy, Coin Pays
C600-C0711-12MI	BFR-5014	Betty Boop Bonus Frenzy, Credit Pays
C600-C0697-++++	BFR-5020	Fireball Frenzy, Credit Pays
C600-C0699-++++	BFR-5022	Scatter Frenzy, Credit Pays
G600-00209-++++	BL2-5001	2nd Chance Blazing 7's, Coin Pays
G600-00209-FC++	BL2-5001	2nd Chance Blazing 7's, French Canadian, Coin Pays
G600-00271-++++	BL3-5001	3's A Charm, Coin Pays
C600-C0534-12MI	BL4-5001	Blazing 7's, 4 Reel, 25¢, Credit Pays
C600-00535-++++	BL4-5002	Blazing 7's, 4 Reel, Coin Pays, $1
C600-00535-12MI	BL4-5002	Blazing 7's, 4 Reel, Coin Pays, $1
C600-00534-++++	BL4-5002	Blazing 7's, 4 Reel, Coin Pays, 25¢
C600-00622-12MI	BL4-5002	Blazing 7's, 4 Reel, Credit Pays
C600-00582-12MI	BL4-5003	Blazing 7's, 4 Reel, Credit Pays
G600-00054-FC++	BL7-46	Reel Gems, French Canadian/English, Coin Pays
G600-00028-9DIG	BL7-5007	Blazing 7's
G600-00028-$25+	BL7-5007	Blazing 7's, $25 Pay
C600-00025-$5MI	BL7-5007	Blazing 7's, $5 Pays
G600-00028-++++	BL7-5007	Blazing 7's, Coin Pays
G600-00028-OT$5	BL7-5007	Blazing 7's, Ontario, $5 Pays
C600-C0673-++++	BL7-5018	Blazing 7's, Credit Pays
G600-00028-$5++	BL7-5021	Blazing 7's, $5 Pays
G600-00028-OT$P	BL7-5021	Blazing 7's, Ontario, $5 Pays
G600-00083-$2PG	BL7-5026	Blazing 7's, $2 Pays
G600-00083-$5PG	BL7-5026	Blazing 7's, $5 Pays
G600-00083-9DIG	BL7-5026	Blazing 7's, Coin Pays
G600-00083-MICR	BL7-5026	Blazing 7's, Coin Pays
G600-00121-PROG	BL7-5026	Blazing 7's, Coin Pays
C600-C0083-PGMT	BL7-5026	Blazing 7's, Credit Pays
G600-00015-++++	BL7-5041	Reel Gems, Coin Pays
G600-00002-++++	BL7-5052	Reel Gems, Coin Pays
G600-00002-PROG	BL7-5052	Reel Gems, Coin Pays
G600-00085-OT++	BL7-5053	Blazing 7's English/French Canadian, Coin Pays
G600-00085-OTPG	BL7-5053	Blazing 7's English/French Canadian, Coin Pays
G600-00085-OT20	BL7-5053	Blazing 7's, $20 Pays, English/French Canadian
G600-00025-$5++	BL7-5053	Blazing 7's, $5 Pays
C600-00599-PGMT	BL7-5053	Blazing 7's, Coin Pays
C600-C0599-12MI	BL7-5053	Blazing 7's, Coin Pays
G600-00025-++++	BL7-5053	Blazing 7's, Coin Pays
G600-00085-OT$2	BL7-5053	Blazing 7's, English/French Canadian, $2 Pays
G600-00025-FC++	BL7-5053	Blazing 7's, French Canadian, Coin Pays
C600-00566-12MI	BL7-5053	Blazing 7'sNova Scotia, Coin Pays
G600-00080-++++	BL7-5056	Flaming 7's, Coin Pays
G600-00028-PROG	BL7-5057	Blazing 7's, Coin Pays
G600-00069-LION	BL7-5061	Majestic Lions, MGM, Coin Pays
G600-00085-MICR	BL7-5062	Blazing 7's
G600-00085-PG++	BL7-5062	Blazing 7's, Coin Pays
G600-00085-FCPG	BL7-5062	Blazing 7's, Coin Pays, English/French Canadian
G600-00101-PROG	BL7-5064	Moonshadow, Coin Pays
G600-00102-PROG	BL7-5065	Hot Hot Hot, Coin Pays
G600-00109-$5++	BL7-5069	Blazing 7's $5 Pays
G600-00332-12MI	BL7-5077	Sheraton, Coin Pays
G600-00272-++++	BL7-5078	Marlin Mania, Coin Pays
G600-00190-++++	BL7-5082	Sheraton Gold, Coin Pays
G600-00192-MINI	BL7-5083	Crazy Crawdads, Coin Pays
G600-00289-2PRG	BL7-5099	Blue Station 7's
G600-00288-2PRG	BL7-5099	Red Station 7's, Coin Pays
C600-00561-++++	BL7-5142	Red Hot Genies Credit Pays, Harrah's
C600-00463-PROG	BLB-5001	Blazing 7's Betty Boop, Coin Pays,
C600-00602-PROG	BLB-5008	Blazing 7's Betty Boop, Coin Pays
G600-00315-1SPC	BLD-5001	Blazing 7's Double Jackpot
C600-00315-2SPC	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G600-00315-++++	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G600-00315-12MI	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G600-00315-2PRG	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G600-00315-CAND	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G600-00315-OT++	BLD-5001	Blazing 7's Double Jackpot, English/French Canadian, Coin Pays
G600-00440-++++	BLD-5004	Blazing 7's Double Coin Pays
C600-00440-12MI	BLD-5004	Blazing 7's Double, Coin Pays
G600-00230-++++	BLF-5001	Trailblazer, Coin Pays
G600-00293-++++	BLF-5003	Blazing 7's Deluxe, Coin Pays
G600-00293-OT$2	BLF-5003	Blazing 7's Deluxe, English/French Canadian, $2 Pays
G600-00293-OT20	BLF-5003	Blazing 7's Deluxe, English/French Canadian, $20 Pays
G600-00427-PROG	BLM-5001	Betty Boop's Big Hit, Coin Pays
G600-00428-PROG	BLM-5002	Betty Boop's Big Hit, Coin Pays
G600-00429-PROG	BLM-5003	Betty Boop's Big Hit, Coin Pays
G600-00430-PROG	BLM-5004	Betty Boop's Big Hit, Coin Pays
C600-00038-12MI	BM7-5008	Black Gold
G600-00038-$5++	BM7-5008	Black Gold, $5 Pays
G600-00038-MICR	BM7-5008	Black Gold, Coin Pays
G600-00038-OT++	BM7-5008	Black Gold, English/French Canadian, Coin Pays
G600-00038-OTPG	BM7-5008	Black Gold, English/French Canadian, Coin Pays
G600-00038-FC++	BM7-5008	French Canadian Black Gold, Coin Pays
C600-C0658-++++	BM7-5008	Golden Red 7's, Credit Pays
G600-00166-++++	BM7-5013	Park Place Jackpot Bars, Black Gold, Coin Pays
G600-00166-FC++	BM7-5013	Park Place Jackpot Bars, English/French Canadian, Coin Pays
G600-00179-++++	BM7-5033	Red Hot 7's, Coin Pays
G600-00179-MINI	BM7-5033	Red Hot 7's, Coin Pays
G600-00181-++++	BM7-5034	EFX, Coin Pays (MGM)
G600-00222-++++	BM7-5036	UFO, Coin Pays
C600-00449-$2++	BNT-5001	Bonus Time, $2 Pays,
C600-00614-++++	BNT-5001	Bonus Times, Credit Pays
C600-C0614-12MI	BNT-5001	Bonus Times, Credit Pays
G600-00530-++++	BNT-5002	Bonus Times, Coin Pays

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlot® 6000

G600... Feature Glass (CT) (cont.)

GLASS	ART FORM	DESCRIPTION
C600-00503-12MI	BNT-5003	Bonus Times, Coin Pays
C600-00604-++++	BNT-5003	Bonus Times, Credit Pays
C600-C0604-FC++	BNT-5003	Bonus Times, Credit Pays, French Canadian
G600-00434-PROG	BQM-5001	Born To Boop
C600-00435-PROG	BQM-5002	Born To Boop
G600-00436-PROG	BQM-5003	Born To Boop
C600-00587-PROG	BQM-5011	Betty Boop Question Mark, Coin Pays
G600-00431-PROG	BRT-5001	Roaring 20's
G600-00432-PROG	BRT-5002	Roaring 20's
G600-00433-PROG	BRT-5003	Roaring 20's
G600-00451-PROG	BRT-5005	Coin Pays
G600-00480-NJ++	BRT-5005	Swingtime Betty, New Jersey
G600-00452-PROG	BRT-5006	Swingtime
G600-00481-NJ++	BRT-5006	Swingtime Betty, New Jersey
G600-00453-PROG	BRT-5007	Swingtime
G600-00452-PROG	BRT-5008	Swingtime
G600-00442-++++	BRT-5012	Born To Boop Coin Pays
G600-00442-PROG	BRT-5012	Born To Boop Coin Pays
G600-00443-PROG	BRT-5013	Born To Boop, Coin Pays
G600-00455-PROG	BRT-5018	Swingime Payday, Coin Pays
G600-00455-++++	BRT-5018	Swingtime Payday, Coin Pays
G600-00482-NJ++	BRT-5018	Swingtime, Payday, New Jersey, Coin Pays
G600-00456-++++	BRT-5019	Roaring 20's Payday Coin Pays
G600-00456-PROG	BRT-5019	Roaring 20's Payday, Coin Pays
G600-00483-NJ++	BRT-5019	Roaring 20's, New Jersey, Coin Pays
G600-00468-PROG	BRT-5029	Blondie Big Dough Coin Pays
C600-00484-NJ++	BRT-5029	Blondie Big Dough Coin Pays, New Jersey
C600-00469-PROG	BRT-5030	Blondie Big Dough Coin Pays
C600-00485-NJ++	BRT-5030	Blondie Big Dough Coin Pays, New Jersey
C600-00470-PROG	BRT-5031	Blondie Big Dough Coin Pays
C600-00486-NJ++	BRT-5031	Blondie Big Dough Coin Pays, New Jersey
C600-00471-PROG	BRT-5032	Blondie Big Dough Coin Pays
C600-00490-NJ++	BRT-5032	Blondie Big Spender, Coin Pays, New Jersey
C600-00487-NJ++	BRT-5033	Big Spender Blondie, Coin Pays, New Jersey
C600-00472-PROG	BRT-5033	Blondie Big Spender Coin Pays
C600-00473-PROG	BRT-5034	Blondie Big Spender Coin Pays
C600-00491-NJ++	BRT-5034	Blondie Big Spender, New Jersey, Coin Pays
C600-00600-PROG	BRT-5040	Betty Boop Roaring 20's, Coin Pays
C600-00639-++++	BS7-5001	Super Scatter, Credit Pays
C600-C0639-12MI	BS7-5001	Super Scatter, Credit Pays
C600-C0710-12MI	BS7-5002	Blazing 7's, Scatter Pay, Credit Pays
C600-00551-PROG	BS7-5003	Betty Boop, Coin Pays
C600-00552-PROG	BS7-5004	Betty Boop, Coin Pays
C600-00553-PROG	BS7-5006	Blondie, Coin Pays
C600-00554-PROG	BS7-5007	Blondie, Coin Pays
C600-00601-PROG	BS7-5012	$10k Betty Boop Scatter, Coin Pays
G600-00338-++++	BUB-5006	Crazy 7's, Coin Pays
G600-00027-$5++	BUB-5027	Plum Crazy, $5 Pays
G600-00027-++++	BUB-5027	Plum Crazy, Coin Pays
G600-00017-++++	BUB-5028	Balligator, Coin Pays
G600-00012-++++	BUB-5029	Plum Crazy, Coin Pays
C600-C0655-$2MI	BUB-5031	Crazy Joker, Credit Pays
C600-C0655-$5++	BUB-5031	Crazy Joker, Credit Pays
C600-C0655-++++	BUB-5031	Crazy Joker, Credit Pays
C600-C0655-12MI	BUB-5031	Crazy Joker, Credit Pays
G600-00104-9DIG	BUB-5031	Crazy Jokers
G600-00104-$10+	BUB-5031	Crazy Jokers, $10 Pays
C600-00104-$2++	BUB-5031	Crazy Jokers, $2 Pays
C600-00104-$25+	BUB-5031	Crazy Jokers, $25 Pays
G600-00296-$5++	BUB-5038	Western Joker, $5 Pays
C600-C0671-++++	BUB-5040	Crazy Western Joker, Credit Pays
C600-C0694-++++	BUY-5004	Thousands, Credit Pays
C600-C0663-++++	BWT-5019	Frankie & Annette, Credit Pays
G600-00045-++++	CB7-5001	Naughty Nickels, Coin Pays
G600-00075-++++	CB7-5003	Cold Cash, Coin Pays
G600-00047-FC++	CB7-5003	Cold Cash, English/French Canadian, Coin Pays
G600-00045-PROG	CB7-5005	Naughty Nickels
G600-00063-FC++	CB7-5010	Fast 50's, Coin Pays, English/French Canadian
G600-00203-++++	CB7-5021	Bally Las Vegas, Money Bags, Coin Pays
G600-00022-++++	CB7-5023	French Quarters, Coin Pays
G600-00022-25C+	CB7-5023	French Quarters, Coin Pays
G600-00022-SP++	CB7-5023	French Quarters, Spanish, Coin Pays
G600-00029-++++	CB7-5027	Naughty Nickels/ French Quarters, Coin Pays
G600-00030-++++	CB7-5028	Naughty Nickels/ French Quarters, Coin Pays
G600-00241-++++	CB7-5029	Naughty Nickels, Coin Pays
G600-00171-++++	CB7-5030	French Quarters, Coin Pays
C600-00510-12MI	CB7-5039	Super Blazing 7's, Coin Pays
C600-00510-++++	CB7-5039	Super Blazing 7's, Coin Pays,
C600-00621-++++	CB7-5040	Super Blazing 7's, Credit Pays
C600-00621-12MI	CB7-5040	Super Blazing 7's, Credit Pays
G600-00066-FC++	CM7-5003	English/French Canadian, Coin Pays
G600-00238-++++	CM7-5027	Cherry-Mixed Bars, Coin Pays
G600-00059-FC++	CM7-5027	French Canadian
G600-00220-++++	CM7-5060	1088 Style, Coin Pays
G600-00415-++++	DAP-5001	Pool Sharks, Coin Pays

GLASS	ART FORM	DESCRIPTION
G600-00197-$2++	DB5-5001	Double Trouble, $2 Pays
G600-00197-++++	DB5-5001	Double Trouble, Coin Pays
C600-C0686-12MI	DBF-5001	Betty Boop Double Jackpot, Credit Pays
C600-C0685-12MI	DBF-5001	Popeye Double Jackpot, Credit Pays
C600-C0687-12MI	DBF-5003	Blondie, Credit Pays
G600-00174-++++	DBK-5002	Win & Spin, Coin Pays
G600-00206-++++	DBK-5003	Bally Win & Spin, Coin Pays
G600-00333-++++	DC5-5001	Gimme 5 5x, Coin Pays
C600-00329-12MI	DC5-5002	Black & White 5x, Coin Pays
G600-00329-OT20	DC5-5002	Black & White 5x, Coin Pays, English/French Canadian
C600-00646-$2++	DC5-5002	Black & White 5x, Credit Pays
C600-00646-++++	DC5-5002	Black & White 5x, Credit Pays
G600-00329-OT++	DC5-5002	Black & White 5x, English/French Canadian
G600-00329-OT$2	DC5-5002	Black & White 5x, English/French Canadian, $2 Pays
G600-00329-FC++	DC5-5002	Black & White 5x, French Canadian, Coin Pays
G600-00405-++++	DC5-5007	Joker 5x, Coin Pays
C600-00606-++++	DC5-5010	Black & White, Credit Pays
C600-00597-++++	DC5-5011	Five Times Money, Credit Pays
G600-00053-++++	DCM-5023	Double Eagle, Coin Pays
G600-00053-FC++	DCM-5023	Double Eagle, English/French Canadian, Coin Pays
G600-00011-$5++	DCM-5031	California Dreamin', $5 Pays
G600-00011-++++	DCM-5031	California Dreamin', Coin Pays
G600-00035-++++	DCM-5032	California Dreamin', Coin Pays
G600-00035-FC++	DCM-5032	California Dreamin', Coin Pays, English/French Canadian
G600-00088-++++	DCM-5034	California Dreamin', Coin Pays
G600-00151-++++	DCM-5040	Double Time, Coin Pays
G600-00163-++++	DCM-5041	Double Time, Coin Pays
G600-00163-FC++	DCM-5041	Double Time, Coin Pays, French Canadian
G600-00226-$10+	DCM-5043	Double Take, $10 Pays
C600-00226-$25+	DCM-5043	Double Take, $25 Pays,
G600-00226-$5++	DCM-5043	Double Take, $5 Pays
G600-00226-$2PG	DCM-5043	Double Take, $2 Pays
G600-00226-++++	DCM-5043	Double Take, Coin Pays
G600-00226-12MI	DCM-5043	Double Take, Coin Pays
G600-00244-++++	DCM-5044	Double Gold Coin Pays
G600-00245-++++	DCM5045	Double Gold Coin Pays
G600-00245-FC++	DCM-5045	Double Gold, French Canadian, Coin Pays
G600-00253-++++	DCM5046	Double Take, Coin Pays
G600-00336-++++	DCM-5049	Double Gold, Coin Pays
G600-00324-++++	DCM-5052	Blazing 7's, Coin Pays
G600-00324-FC++	DCM-5052	Blazing 7's, Coin Pays, French Canadian
G600-00325-++++	DCM-5053	Blazing 7's, Coin Pays
C600-00325-12MI	DCM-5053	Blazing 7's, Coin Pays
G600-00328-++++	DCM-5054	California Dreamin', Coin Pays
G600-00407-++++	DCM-5055	Black & White Payday, Kilroy, Coin Pays
C600-00641-++++	DCM-5057	5 X 10 Times, Credit Pays
C600-00640-++++	DCM-5058	5 X 10 Times, Credit Pays
C600-00560-++++	DCM-5060	Blazing 7's, 7x Pay, Coin Pays
G600-00403-++++	DCM-5061	Double Jackpot, Coin Pays
G600-00253-FC	DCM-5068	Double Take, Coin Pays, French Canadian
C600-00588-++++	DCM-5070	Double Money, Credit Pays
C600-C0661-++++	DCM-5071	Double Money, Credit Pays
C600-00589-++++	DCM-5072	Double Money, Credit Pays
C600-C0589-$5++	DCM-5072	Double Money, Credit Pays, $5 Pays
C600-00590-++++	DCM-5073	Double Money, Credit Pays
C600-C0668-++++	DCM-5074	Double Money, Credit Pays
C600-00649-++++	DCM-5076	5 X 10 Times, Credit Pays
C600-00598-++++	DCM-5077	5 X 10 Money, Credit Pays
G600-00406-$2++	DCM-9058	5 X 10 Pays, $2 Pays
G600-00406-$5++	DCM-9058	5 X 10 Pays, Coin Pays, $5 Pays
G600-00406-FC++	DCM-9058	5 X 10 Pays, Coin Pays, French Canadian
G600-00228-++++	DD7-5001	Golden Eye 007, Coin Pays
G600-00237-++++	DD7-5003	Gimme 5 Coin Pays
G600-00237-$5++	DD7-5003	Gimme 5, $5 Pays
G600-00237-12MI	DD7-5003	Gimme 5, Coin Pays
G600-00237-FC++	DD7-5003	Gimme 5, French Canadian, Coin Pays
G600-00237-$10+	DD7-5003	Gimmie 5, $10 Pays
G600-00283-++++	DD7-5005	Golden Eye 007, Coin Pays
G600-00283-9DIG	DD7-5005	Golden Eye 007, Coin Pays
G600-00301-++++	DD7-5006	5x Black & White, Coin Pays
G600-00301-FC++	DD7-5006	5x Black & White, French Canadian, Coin Pays
G600-00320-++++	DD7-5007	Gimme 5, Coin Pays
G600-00400-++++	DD7-5008	Gimme 5 Black & White, Coin Pays
C600-00504-++++	DD8-5001	Hot Line, Coin Pays
C600-00504-12MI	DD8-5001	Hot Line, Coin Pays
C600-C0709-++++	DD8-5002	Hot Lines, Credit Pays
C600-00525-++++	DD8-5003	Hot Lines, Coin Pays
C600-00618-++++	DD8-5004	Hot Lines, Credit Pays
C600-00619-++++	DD8-5005	Winning Times 7's, Credit Pays
C600-00563-++++	DD8-5006	Winning Times Blazing 7's, Credit Pays
C600-00616-++++	DD8-5007	Tim & Harvey Joker Wild, Credit Pays
C600-C0616-FC++	DD8-5007	Tim & Harvey Joker Wild, Credit Pays, French Canadian
G600-00004-++++	DDD-5001	Triple Double, Coin Pays
G600-00052-FC++	DDD-5001	Triple Double, Coin Pays English/French Canadian
G600-00061-FC++	DDD-5002	Triple Double, Coin Pays, English/French Canadian

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlot® 6000

G600... Feature Glass (CT)

GLASS	ART FORM	DESCRIPTION
G600-00061-++++	DDD-5002	Triple Double, English, Coin Pays
G600-00094-++++	DIA-5001	Diamonds, Coin Pays
G600-00094-PROG	DIA-5001	Diamonds, Coin Pays
G600-00094-FC++	DIA-5001	Diamonds, French Canadian, Coin Pays
G600-00337-++++	DIA-5003	Diamonds, Coin Pays
G600-00142-++++	DIA-5006	Diamonds, Coin Pays
G600-00120-$25+	DIB-5001	Diamonds, $25 Pays
G600-00120-++++	DIB-5001	Diamonds, Coin Pays
G600-00143-PROG	DIB-5002	Diamond, Coin Pays
G600-00143-++++	DIB-5002	Diamonds, Coin Pays
G600-00199-++++	DIB-5003	Diamonds, Coin Pays
C600-00312-$5MI	DID-5001	Diamond Line Double Jackpot 7's, $5 Pays
C600-00312-12MI	DID-5001	Diamond Line Double Jackpot 7's, Credit Pays
C600-00623-++++	DID-5001	Diamond Line Double Jackpot, Credit Pays
G600-00313-++++	DID-5002	Diamond Line Double Jackpot Blazing 7's, Coin Pays
G600-00313-OT++	DID-5002	Diamond Line Double Jackpot Blazing 7's, English/French Canadian, Coin Pays
G600-00313-OT20	DID-5002	Diamond Line Double Jackpot Blazing 7's, English/French Canadian, Coin Pays, $20 Pays
G600-00313-OT$2	DID-5002	Double Jackpot Blazing 7's, English/French Canadian, $2 Pays
G600-00313-OT$5	DID-5002	Double Jackpot Blazing 7's, English/French Canadian, $5pays
G600-00331-++++	DID-5003	Black & White Diamond Doubler, Coin Pays
G600-00331-OT++	DID-5003	Black & White Double Jackpot, English/French Canadian, Coin Pays
G600-00331-OT$2	DID-5003	Diamond Line Double Jackpot Black & White, English/French Canadian, $2 Pays
G600-00331-OT20	DID-5003	Diamond Line Double Jackpot Black & White, English/French Canadian, $20 Pays
G600-00331-OT$5	DID-5003	Diamond Line Double Jackpot Black & White, English/French Canadian, $5 Pays
C600-00557-++++	DIV-5001	Diamonds & Devils, Coin Pays,
C600-00557-FC++	DIV-5001	Diamonds & Devils, Coin Pays, French Canadian
G600-00064-++++	DJP-5001	Solid Gold, Coin Pays
G600-00064-FC++	DJP-5001	Solid Gold, Coin Pays, English/French Canadian
G600-00141-OT++	DL7-5001	Blazing 7's Diamond Line, English/French Canadian, Coin Pays
G600-00141-FC++	DL7-5001	Blazing 7's Diamond Line, French Canadian, Coin Pays
G600-00141-PGMT	DL7-5001	Blazing 7's, Coin Pays
C600-00629-++++	DL7-5001	Blazing 7's, Credit Pays
C600-C0629-12MI	DL7-5001	Blazing 7's, Credit Pays
G600-00128-++++	DL7-5002	Blazing 7's Diamond Line, Coin Pays
C600-00412-12MI	DLD-5001	Double Dragon, Coin Pays
G600-00412-++++	DLD-5001	Double On Diamonds, Coin Pays
C600-C0693-++++	DLF-5001	Diamond Line Frenzy, Credit Pays
G600-00134-++++	DLI-5002	Double Jackpot, Coin Pays
G600-00285-++++	DLI-5012	Double Jackpot, Coin Pays
C600-00642-++++	DM7-5001	Double Symbol, Triple Blazing 7's, Credit Pays
C600-C0642-$5++	DM7-5001	Double Symbol, Triple Blazing 7's, Credit Pays
C600-00156-$25+	DM7-5001	Triple Blazing 7's Double Symbol, $25 Pays
G600-00156-$5++	DM7-5001	Triple Blazing 7's Double Symbol, $5 Pays
G600-00156-$5PG	DM7-5001	Triple Blazing 7's Double Symbol, $5 Pays
C600-00156-12MI	DM7-5001	Triple Blazing 7's Double Symbol, Coin Pays
G600-00156-$2++	DM7-5001	Triple Blazing 7's, Double Symbol, $2 Pays
G600-00157-MICR	DM7-5002	Triple Blazing 7's Double Symbol, Coin Pays
G600-00157-MINI	DM7-5002	Triple Blazing 7's Double Symbol, Coin Pays
G600-00157-FC++	DM7-5002	Triple Blazing 7's Double Symbol, Coin Pays, French Canadian, Coin Pays
G600-00157-OT++	DM7-5002	Triple Blazing 7's Double Symbol, English/French Canadian, Coin Pays
C600-00630-++++	DM7-5002	Triple Blazing 7's, Credit Pays
G600-00157-$5++	DM7-5002	Triple Blazing 7's, Double Symbol, $5 Pays
G600-00157-9DIG	DM7-5002	Triple Blazing 7's, Double Symbol, Coin Pays
C600-00584-++++	DM7-5003	Double Money Triple Blazing 7's, Credit Pays
G600-00223-++++	DM7-5004	All American, Coin Pays
G600-00248-++++	DM7-5005	All American Double, Coin Pays
C600-C0670-12MI	DM7-5005	All American Double, Credit Pays
G600-00200-++++	DM7-5006	Triple Blazing 7's Double Symbol, Coin Pays
C600-00638-++++	DM7-5007	Double Symbol, Credit Pays
G600-00249-OT++	DM7-5007	Triple Blazing 7's Double Symbol, English/French Canadian, Coin Pays
G600-00256-OT++	DM7-5008	Triple Blazing 7's Double Symbol, English/French Canadian, Coin Pays
C600-00631-++++	DM7-5008	Triple Blazing 7's, Credit Pays
C600-00255-12MI	DM7-5009	Triple Blazing 7's Double Symbol, Coin Pays
G600-00255-OT++	DM7-5009	Triple Blazing 7's Double Symbol, English/French Canadian, Coin Pays
C600-00634-++++	DM7-5009	Triple Blazing 7's, Credit Pays
C600-C0634-12MI	DM7-5009	Triple Blazing 7's, Credit Pays
G600-00269-$25+	DM7-5010	Black & White, $25 Pays
G600-00269-$5PG	DM7-5010	Black & White, $5 Pays
C600-00269-$5++	DM7-5010	Black & White, $5 Pays
G600-00269-12MI	DM7-5010	Black & White, Coin Pays
G600-00269-MICR	DM7-5010	Black & White, Coin Pays
G600-00269-OT++	DM7-5010	Black & White, Coin Pays, English/French Canadian
C600-00624-++++	DM7-5010	Black & White, Credit Pays
G600-00269-FC++	DM7-5010	Black & White, French Canadian, Coin Pays
G600-00270-$5++	DM7-5011	Black & White, $5 Pays
G600-00270-9DIG	DM7-5011	Black & White, Coin Pays
G600-00270-MINI	DM7-5011	Black & White, Coin Pays

GLASS	ART FORM	DESCRIPTION
C600-00613-++++	DM7-5011	Black & White, Credit Pays
G600-00270-FC++	DM7-5011	Black & White, English/French Canadian, Coin Pays
G600-00270-OT++	DM7-5011	Black & White, English/French Canadian, Coin Pays
G600-00194-++++	DM7-5012	Apache Gold, Coin Pays
C600-C0654-++++	DM7-5014	Black & White Triple 7's, Credit Pays
G600-00278-OT++	DM7-5014	Black & White, English/French Canadian, Coin Pays
C600-00627-++++	DM7-5015	Black & White, Double Jackpot, Credit Pays
C600-00280-12MI	DM7-5016	Black & White
G600-00280-FC++	DM7-5016	Black & White, Coin Pays, English/French Canadian
C600-00636-++++	DM7-5016	Black & White, Credit Pays
G600-00280-OT++	DM7-5016	Black & White, English/French Canadian, Coin Pays
C600-00635-++++	DM7-5020	All American, Credit Pays
G600-00304-++++	DM7-5023	Twist & Shout
G600-00305-++++	DM7-5024	Twist & Shout
G600-00306-++++	DM7-5025	Tap The Rockies, Coin Pays
G600-00307-++++	DM7-5026	Tap The Rockies, Coin Pays
G600-00317-++++	DM7-5028	All American, Coin Pays
C600-C0689-++++	DM7-5031	Blazing 7's Double Jackpot, Credit Pays, South Africa
G600-00339-++++	DM7-5032	Lucky Lobster, Coin Pays Generic
G600-00421-++++	DM7-5036	Triple Blazing 7's Kilroy Coin Pays 2c
G600-00422-++++	DM7-5037	Triple Blazing 7's Kilroy/Coin Pays 3c
G600-00419-++++	DM7-5038	Black & White Kilroy Coin Pays 2c
G600-00420-++++	DM7-5039	Black & White Kilroy Coin Pays 3c
G600-00402-++++	DM7-5040	5x Black & White, Coin Pays
G600-00416-++++	DM7-5047	New York Cityscape, Coin Pays
C600-00416-12MI	DM7-5047	New York Cityscape, Coin Pays, 12 Cell Mini,
G600-00417-++++	DM7-5048	San Francisco Cityscape, Coin Pays
C600-00417-12MI	DM7-5048	San Francisco Cityscape, Coin Pays, 12 Cell Mini,
G600-00418-++++	DM7-5049	Seattle Cityscape, Coin Pays
C600-00418-12MI	DM7-5049	Seattle Cityscape, Coin Pays, 12 Cell Mini,
G600-00459-++++	DM7-5050	Double Jackpot Coin Pays, Triple Blazing 7
C600-00536-++++	DM7-5054	Double Jackpot, Triple Blazing 7's, Coin Pays
C600-00520-++++	DM7-5058	Memphis Blues, Coin Pays
G600-00409-++++	DM7-5060	Blazing 7's Double Jackpot, Coin Pays
C600-00593-++++	DM7-5062	Double Money Triple Blazing 7's, Credit Pays
C600-00637-++++	DM7-5064	Double Money, Credit Pays
C600-C0704-++++	DM7-5065	Triple Blazing Double Money, Credit Pays
C600-00595-++++	DM7-5066	Double Money Triple Blazing 7's, Credit Pays
C600-C0696-++++	DM7-5067	Blazing 7's Double Jackpot, Credit Pays
C600-C0695-++++	DM7-5068	Black & White, Credit Pays
C600-C0680-++++	DM7-5070	Black & White, Double Jackpot, Credit Pays, South Africa
C600-C0676-++++	DM7-5071	Double Money Blazing 7's, Credit Pays, South Africa
C600-C0690-++++	DM7-5072	Blazing 7's Double Jackpot, Credit Pays, South Africa
C600-C0681-++++	DM7-5073	Black & White, Double Jackpot, Credit Pays, South Africa
C600-C0677-++++	DM7-5074	Double Money Blazing 7's, Credit Pays, South Africa
C600-C0691-++++	DM7-5075	Blazing 7's Double Jackpot, Credit Pays, South Africa
C600-C0706-++++	DM7-5076	Black & White, Credit Pays, South Africa
C600-C0679-++++	DM7-5077	Double Money Blazing 7's, Credit Pays, South Africa
C600-C0706-++++	DM7-5078	Black & White, Credit Pays, South Africa
C600-C0691-++++	DM7-5078	Blazing 7's Double Jackpot, Credit Pays, South Africa
C600-C0679-++++	DM7-5080	Double Money Blazing 7's, Credit Pays, South Africa
C600-C0692-++++	DM7-5081	Blazing 7's Double Jackpot, Credit Pays, South Africa
C600-C0682-++++	DM7-5082	Black & White, Double Jackpot, Credit Pays, South Africa
C600-C0678-++++	DM7-5083	Double Money Blazing 7's, Credit Pays, South Africa
C600-C0692-++++	DM7-5084	Blazing 7's Double Jackpot, Credit Pays, South Africa
C600-C0678-++++	DM7-5086	Double Money Blazing 7's, Credit Pays, South Africa
G600-00132-++++	DMB-5004	Black Gold Colors, Coin Pays
G600-00007-++++	DMB-5010	10 Grand, Coin Pays, Red Background
G600-00039-++++	DMB-5012	Black Gold Colors, Coin Pays
G600-00077-++++	DMB-5019	Black Gold, Coin Pays
G600-00087-++++	DMB-5025	Black Gold, Coin Pays
G600-00087-12MI	DMB-5025	Black Gold, Coin Pays
G600-00087-9DIG	DMB-5025	Black Gold, Coin Pays
G600-00044-FC++	DMB-5032	10 Grand, Coin Pays
G600-00044-++++	DMB-5032	10 Grand, Coin Pays
G600-00204-++++	DMB-5039	Bally Las Vegas, Coin Pays
G600-00046-++++	DMB-5057	Cherries Deluxe, Coin Pays
G600-00046-FC++	DMB-5057	Cherries Deluxe, English/French Canadian, Coin Pays
C600-00090-$10+	DMB-5065	Black Gold, $10 Pays
C600-00090-$5++	DMB-5065	Black Gold, $5 Pays
G600-00037-++++	DMB-5067	Black Gold, Coin Pays
G600-00297-++++	DMB-5069	Bally's Most Wanted, Coin Pays
G600-00295-++++	DMB-5070	Bally's Most Wanted, Coin Pays
G600-00326-++++	DMB-5071	Black Gold, Coin Pays
G600-00095-25C+	DMB-55	Lightning Quarters, Bally Grand Only
C600-00168-$5++	DRA-5001	Double Dragon, $5 Pays
C600-00168-$5MI	DRA-5001	Double Dragon, $5 Pays
G600-00168-$5PG	DRA-5001	Double Dragon, $5 Pays
C600-00168-++++	DRA-5001	Double Dragon, Credit Pays
C600-00168-$2++	DRA-5001	Double Dragon, Eng, $2 Pays
G600-00168-OT$2	DRA-5001	Double Dragon, English/French Canadian, $2 Pays
G600-00168-OT20	DRA-5001	Double Dragon, English/French Canadian, $20 Pays
G600-00168-OT$5	DRA-5001	Double Dragon, English/French Canadian, $5 Pays
G600-00172-9DIG	DRA-5002	Double Dragon, Coin Pays
C600-00172-12MI	DRA-5002	Double Dragon, Coin Pays

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlot® 6000

G600... Feature Glass (CT)

GLASS	ART FORM	DESCRIPTION
C600-00645-++++	DRA-5002	Double Dragon, Credit Pays
G600-00172-OT++	DRA-5002	Double Dragon, English/French Canadian, Coin Pays
G600-00172-OTPG	DRA-5002	Double Dragon, English/French Canadian, Coin Pays
G600-00189-2PRG	DT7-5001	Triple Blazing 7's Diamond Line, Coin Pays
G600-00189-$5++	DT7-5001	Triple Blazing 7's Diamond Line, $5 Pays
G600-00189-OT++	DT7-5001	Triple Blazing 7's Diamond Line, English/French Canadian
G600-00189-$5MI	DT7-5001	Triple Blazing 7's, $5 Pays
G600-00189-++++	DT7-5001	Triple Blazing 7's, Coin Pays
G600-00189-12MI	DT7-5001	Triple Blazing 7's, Coin Pays
G600-00250-++++	DT7-5002	Diamond Back, Coin Pays
G600-00274-MICR	DT7-5003	Triple Blazing 7's Diamond Line, Coin Pays
G600-00274-MINI	DT7-5003	Triple Blazing 7's Diamond Line, Coin Pays
G600-00274-OT++	DT7-5003	Triple Blazing 7's Diamond Line, English/French Canadian
G600-00274-9DIG	DT7-5003	Triple Blazing 7's, Diamond Line, Coin Pays
G600-00274-++++	DT7-5003	Triple Blazing 7's, Diamond Line, Coin Pays
G600-00149-++++	DWA-5001	Pyramids, Coin Pays
C600-C0669-++++	DWA-5004	10,000 Pyramids, Credit Pays
C600-C0672-50C+	DWA-5007	$5,000 Pyramids, Credit Pays
C600-C0674-$2++	DWA-5008	$25,000 Pyramid, Credit Pays
G600-00167-12MI	DWA-5009	Silver & Gold, Coin Pays
G600-00167-FC++	DWA-5009	Silver & Gold, Coin Pays
G600-00167-OT++	DWA-5009	Silver & Gold, English/French Canadian, Coin Pays
C600-00167-$2++	DWA-5009	Silver Gold, $2 Pays
G600-00167-++++	DWA-5009	Silver Gold, Coin Pays
C600-C0702-OTMI	DWA-5010	Silver & Gold, Coin Pays
G600-00205-++++	DWA-5011	Bally Wild Bally Double, Coin Pays
C600-C0656-12MI	DWA-5015	Park Place, Custom, Credit Pays
G600-00298-++++	DWA-5016	Bronco Buster, Coin Pays
C600-00529-++++	DWA-5020	Goal, Coin Pays,
C600-00529-FR++	DWA-5020	Goal, Coin Pays, French
C600-00529-SP++	DWA-5020	Goal, Coin Pays, Spanish
G600-00123-++++	DWC-5003	Park Place Jackpot Bars, Coin Pays
G600-00318-++++	DWN-5001	Double Jackpot Smiley, Coin Pays
G600-00321-++++	DWN-5002	Double Jackpot Smiley, Coin Pays
G600-00242-$10+	DWR-5001	Double Wild Rose, $10 Pays
C600-00242-$2++	DWR-5001	Double Wild Rose, $2 Pays
G600-00242-++++	DWR-5001	Double Wild Rose, Coin Pays
G600-00242-FC++	DWR-5001	Double Wild Rose, French Canadian, Coin Pays
G600-00261-$5PG	DWR-5002	24 Karat, $5 Pay
G600-00261-$5++	DWR-5002	24 Karat, $5 Pays
G600-00262-$10+	DWR-5003	24 Karat, $10 Pays
G600-00263-$25+	DWR-5004	24 Karat, $25 Pays
G600-00308-++++	DWR-5005	24 Karat, Coin Pays
C600-00309-$2++	DWR-5006	Wild Rose, $2 Pays
G600-00309-12MI	DWR-5006	Wild Rose, Coin Pays
C600-00632-++++	DWR-5006	Wild Rose, Credit Pays
G600-00309-FC++	DWR-5006	Wild Rose, French Canadian, Coin Pays
G600-00310-++++	DWR-5007	Silver Lining, Coin Pays
G600-00310-12MI	DWR-5007	Silver Lining, Coin Pays
C600-00508-$2MI	DWR-5008	Rapid Double Jackpot, $2
C600-00508-$5++	DWR-5008	Rapid Double Jackpot, $5 Pays
C600-00508-++++	DWR-5008	Rapid Double Jackpot, Coin Pays
C600-00508-12MI	DWR-5008	Rapid Double Jackpot, Coin Pays
C600-00513-++++	DWR-5009	Rapid Double Jackpot, Coin Pays
C600-00556-++++	DWR-5010	Double Money, Coin Pays
C600-00596-++++	DWR-5014	Two Times Money, Credit Pays
G600-00335-++++	F16-5001	New Look 1088, Coin Pays, $1 & .25
G600-00284-++++	F17-5060	$1 Special, Coin Pays
G600-00284-FC++	F17-5060	$1 Special, French Canadian, Coin Pays
G600-00334-++++	F17-5062	New Look 1090, Coin Pays, $1 & .25
G600-00169-++++	FAF-5001	Fame & Fortune, Coin Pays
G600-00175-++++	FAF-5002	Caesars Atlantic City, Coin Pays
G600-00175-SP++	FAF-5002	Fame & Fortune, Spanish, Coin Pays
G600-00016-++++	FAI-5003	Fire & Ice, Coin Pays
G600-00016-FC++	FAI-5003	Fire & Ice, Coin Pays
G600-00091-$5++	FAI-5004	Fire & Ice, $5 Pays
G600-00023-++++	FAI-5005	Fire & Ice, Coin Pays
G600-00286-++++	FAP-5046	1088 Style, Coin Pays
G600-00076-++++	FBF-5002	Fireball, Coin Pays
G600-00076-FC++	FBF-5002	Fireball, Coin Pays, English/French Canadian
G600-00098-++++	FBF-5003	Fireball, Coin Pays
G600-00251-FC++	FBF-5008	Fireball, Coin Pays, French Canadian
G600-00196-++++	FBF-5012	Texas 2 Step, Coin Pays
G600-00247-++++	FBF-5013	Texas 2 Step, Coin Pays
G600-00117-++++	FBF-5055	1088 Style, Coin Pays
G600-00116-++++	FBJ-5012	1088 Style, Coin Pays
G600-00444-++++	FDM-5001	5 & Dime, Coin Pays
G600-00410-++++	FDM-5002	5 & Dime, Coin Pays
C600-C0698-++++	FFR-5001	Bonus Frenzy, Credit Pays
G600-00009-++++	FLB-5001	Flashback, Coin Pays
G600-00198-++++	FLB-5002	Wacky Winner, Coin Pays
G600-00461-++++	FLB-5003	Ride To Riches Coin Pays
C600-C0683-++++	FRF-5001	5 Times Pay Rich, Credit Pays
C600-00411-12MI	FX7-5001	5 Times Pay 7's
C600-00411-$2++	FX7-5001	5 Times Pay 7's, $2 Pays

GLASS	ART FORM	DESCRIPTION
C600-00411-$5++	FX7-5001	5 Times Pay 7's, $5 Pays
G600-00411-++++	FX7-5001	5 Times Pay 7's, Coin Pays
G600-00467-++++	FX7-5002	5 Times Pay 7's Coin Pays
C600-00467-12MI	FX7-5002	5 Times Pay 7's, Coin Pays
G600-00457-++++	GBB-5001	Wild Gold Payday Coin Pays
G600-00457-PROG	GBB-5001	Wild Gold Payday, Coin Pays
C600-00501-NJ++	GBB-5001	Wild Gold Payday, Coin Pays, New Jersey
C600-00474-PROG	GBB-5005	Blondie Meal Ticket Coin Pays
C600-00475-PROG	GBB-5006	Blondie Meal Ticket Coin Pays
C600-00476-PROG	GBB-5007	Blondie Meal Ticket Coin Pays
G600-00145-++++	GJP-5010	Giant Jackpot, Coin Pays
G600-00024-++++	GSL-5001	Grand Slam, Coin Pays
G600-00031-++++	GSL-5002	Grand Slam, Coin Pays
G600-00031-FC++	GSL-5002	Grand Slam, French Canadian, Coin Pays
G600-00021-++++	GSL-5012	Gold Rush, Coin Pays
G600-00003-++++	GSL-5013	Gold Rush, Coin Pays
G600-00003-9DIG	GSL-5013	Gold Rush, Coin Pays
G600-00055-FC++	GSL-5013	Gold Rush, English/French Canadian, Coin Pays
G600-00068-$1++	GSM-5001	Grand Slam, $1, Coin Pays
G600-00068-$5++	GSM-5001	Grand Slam, $5 Pays
G600-00068-++++	GSM-5001	Grand Slam, Coin Pays
G600-00068-PROG	GSM-5001	Grand Slam, Coin Pays
G600-00043-FC++	GSM-5001	Grand Slam, Coin Pays, English/French Canadian
G600-00043-FCPG+	GSM-5001	Grand Slam, Coin Pays, English/French Canadian
G600-00010-++++	HAR-5001	Hit & Run, Coin Pays
G600-00078-++++	HAR-5002	Sir Prize, Coin Pays
G600-00108-++++	HAR-5004	Sir Prize, Coin Pays
G600-00607-++++	ITM-5001	In The Money, Credit Pays
G600-C0652-12MI	ITM-5001	In The Money, Credit Pays
G600-C0607-FC++	ITM-5001	In The Money, Credit Pays, French Canadian
C600-00518-$2MI	ITM-5001	In The Money, Split Pays $2
C600-00518-$2MI	ITM-5002	In The Money, Split Pays $2
C600-00544-++++	ITM-5003	In The Money, Coin Pays
C600-00545-++++	ITM-5004	In The Money, Coin Pays
C600-C0703-$5++	ITM-5004	In The Money, Credit Pays
C600-C0688-++++	JM7-5013	I Love Jackpots, Credit Pays
C600-C0684-++++	JM7-5014	Castle Of Cash, Credit Pays
G600-00032-++++	JQK-5003	Mini Royal, Coin Pays
C600-C0705-++++	JQK-5004	Jack, Queen, King, Credit Pays
G600-00026-OT++	JQK-5004	Mini Royal, English/French Canadian, Coin Pays
G600-00074-++++	JQK-5005	Mini Royal, Coin Pays
G600-00124-++++	JQK-5006	Mini Royal, Coin Pays
G600-00081-OT$5	JQK-5007	Mini Royal English/French Canadian, $5 Pays
G600-00081-$5++	JQK-5007	Mini Royal, $5 Pays
G600-00235-$5++	JQK-5010	7's, $5 Pays
G600-00235-++++	JQK-5010	7's, Coin Pays
C600-00235-FC++	JQK-5010	7's, Coin Pays, French Canadian
G600-00235-OT++	JQK-5010	7's, Coin Pays, Ontario
G600-00236-12MI	JQK-5011	7's 5 Line, Coin Pays
G600-00236-OT++	JQK-5011	7's English/French Canadian, Coin Pays
G600-00236-++++	JQK-5011	7's, 5 Line, Coin Pays
G600-00236-7DIG	JQK-5011	7's, Coin Pays
G600-00040-$5++	JUJ-5001	Jumpin' Joker, $5 Pays
G600-00040-++++	JUJ-5001	Jumpin' Joker, Coin Pays
G600-00040-FC++	JUJ-5001	Jumpin Joker, French Canadian, Coin Pays
G600-00144-++++	JUJ-5002	Bell Ringer, Coin Pays
G600-00207-++++	LB7-5001	Bally Bells
G600-00118-2PRG	LM75011	Triple Blazing 7's, Coin Pays
G600-00014-PROG	LM7-5011	Triple Blazing 7's
G600-00014-++++	LM7-5011	Triple Blazing 7's, Coin Pays
G600-00048-FC++	LM7-5011	Triple Blazing 7's, English/French Canadian, Coin Pays
C600-00105-++++	LM7-5013	Blazing 7's, Coin Pays
G600-00105-FC++	LM7-5013	Blazing 7's, Coin Pays
G600-00105-PHTN	LM7-5013	Blazing 7's, Coin Pays
G600-00105-PROG	LM7-5013	Blazing 7's, Coin Pays
G600-00103-++++	LM7-5014	Lightning 7's, Coin Pays
G600-00103-MICR	LM7-5014	Lightning 7's, Coin Pays
G600-00119-2PRG	LM7-5014	Triple Lightning 7's, Coin Pays
G600-00106-++++	LM7-5015	Lightning 7's, Coin Pays
G600-00106-PHTN	LM7-5015	Lightning 7's, Coin Pays
G600-00111-$5++	LM7-5020	Triple Blazing 7's, $5 Pays
G600-00110-$5++	LM7-5021	Triple Lightning 7's, $5 Pays
G600-00129-++++	LM7-5022	Triple Blazing 7's, Coin Pays
G600-00188-$5++	LM7-5027	Triple Rose, $5 Pays
G600-00188-++++	LM7-5027	Triple Rose, Coin Pays
G600-00188-MINI	LM7-5027	Triple Rose, Coin Pays
G600-00210-++++	LM7-5028	Triple Rose, Coin Pays
G600-00210-PHTN	LM7-5028	Triple Rose, Coin Pays
G600-00290-++++	LM7-5029	Triple Blazing 7's, Coin Pays
G600-00154-$5++	LMN-5001	Triple Blazing 7's Nudge, $5 Pays
G600-00154-++++	LMN-5001	Triple Blazing 7's Nudge, Coin Pays
G600-00155-++++	LMN-5002	Triple Blazing 7's Nudge, Coin Pays
G600-00155-FC++	LMN-5002	Triple Blazing 7's Nudge, Coin Pays, French
G600-00165-$25+	LMS-5005	Lightning 7's, $25 Pays
C600-00516-$5++	M75-5001	Black & White Millionaire 7's, $5 Pays

©2003 Bally Gaming and Systems

ProSlot® 6000

G600... Feature Glass (CT)

GLASS	ART FORM	DESCRIPTION
C600-00516-++++	M75-5001	Black & White Millionaire 7's, Coin Pays
C600-00507-++++	M7D-5001	Millionaire 7's Coin Pays
C600-00507-$5++	M7D-5005	Millionaire 7's, $5 Pays
G600-00056-FC	MB7-23	Blue, French Canadian, Coin Pays
G600-00056-++++	MB7-5023	Blue, Coin Pays
G600-00058-FC++	MBO-5015	English/French Canadian
G600-00173-++++	MBO-5050	Harrah's Custom, Coin Pays
G600-00239-++++	MBO-5057	1088/1090 Look, Coin Pays
G600-00239-FC$5	MBO-5057	1088/1090 Look, Coin Pays, French Canadian, $5 Pays
G600-00311-++++	MBO-5058	Bar-7's, Coin Pays
G600-00082-$5++	MBV-5001	Black Velvet, $5 Pays
G600-00133-++++	MBV-5001	Black Velvet, Coin Pays
G600-00136-$10+	MBV-5002	Black Velvet, $10 Pays
G600-00136-$25+	MBV-5002	Black Velvet, Pays $25
G600-00093-++++	MBV-5003	Black Velvet, Coin Pays
G600-00093-$5++	MBV-5003	Black Velvet, Coin Pays, $5 Pays
G600-00093-FC++	MBV-5003	Black Velvet, Coin Pays, French Canadian
G600-00093-FC$2	MBV-5003	Black Velvet, Pays $2, French Canadian
G600-00254-++++	MG7-5017	Magnificent 7's, Coin Pays
G600-00254-FC++	MG7-5017	Magnificent 7's, French Canadian, Coin Pays
G600-00150-++++	MJ7-5003	Magnificent 7's, Coin Pays
G600-00177-++++	MJ7-5003	Magnificent 7's, Coin Pays
G600-00243-++++	MJ7-5003	Magnificent 7's, Coin Pays
G600-00259-++++	MJ7-5005	Magnificent 7's, Coin Pays
G600-00299-++++	MJ7-5008	Blazing Magnificent 7's, Coin Pays
G600-00299-OT++	MJ7-5008	Blazing Magnificent 7's, English/French Canadian, Coin Pays
C600-00448-12MI	MNB-5001	Money Bars, Coin Pays
C600-00628-++++	MNB-5001	Money Bars, Credit Pays
C600-00505-12MI	MNB-5002	Money Bars, Coin Pays
C600-00605-++++	MNB-5002	Money Bars, Credit Pays
G600-00089-++++	MNC-5001	Monte Carlo, Coin Pays
G600-00089-FC++	MNC-5001	Monte Carlo, French Canadian, Coin Pays
G600-00097-++++	MNC-5002	Las Vegas, Coin Pays
G600-00202-++++	MNC-5005	Monte Carlo, Coin Pays
G600-00275-++++	OTT-5001	Over The Top, Coin Pays
G600-00257-++++	OV7-5001	Blue 7's, Coin Pays
G600-00257-12MI	OV7-5001	Blue 7's, Coin Pays
G600-00258-++++	OV7-5002	Blue 7's, Coin Pays
G600-00258-12MI	OV7-5002	Blue 7's, Coin Pays
G600-00020-++++	OVR-5001	Overload, Coin Pays
C600-00466-++++	QD7-5001	Quick Hits, Black & White, Coin Pays
C600-00519-++++	QD7-5001	Quick Hits, Coin Pays
C600-00492-$5++	QD7-5002	Quick Hits, $5, Blazing 7's, Double Jackpot,
C600-00492-$5MI	QD7-5002	Quick Hits, $5, Blazing 7's, Double Jackpot,
C600-OT492-$5MI	QD7-5002	Quick Hits, $5, Blazing 7's, Double Jackpot, , Ontario
C600-00466-12MI	QD7-5003	Quick Hits, Black & White, Coin Pays
C600-C0466-FCMI	QD7-5003	Quick Hits, Black & White, French Canadian, Credit Pays
C600-OT493-$5++	QD7-5004	Black & White Double Jackpot, $5, Quick Hit
C600-00493-$5++	QD7-5004	Black & White Double Jackpot, $5, Quick Hit
C600-00493-$5MI	QD7-5004	Black & White Double Jackpot, $5, Quick Hit
C600-OT493-$5MI	QD7-5004	Black & White Double Jackpot, $5, Quick Hit, Ontario
C600-C0657-12MI	QD7-5009	Quick Hits, Credit Pays
C600-C0657-FCMI	QD7-5009	Quick Hits, Credit Pays, French Canadian
G600-00496-++++	QDC-5001	Quick Hits, 5 & 10 Times, Coin Pays
C600-00464-12MI	QDC-5001	Quick Hits, 5 & 10 Times, Coin Pays
C600-C0707-++++	QDC-5001	Quick Hits, Credit Pays
C600-00550-12MI	QDC-5002	Quick Hits, Coin Pays
G600-00497-$5++	QDC-5003	5 & 10 Times Quick Hits, $5 Pays
G600-00497-$5MI	QDC-5003	5 & 10 Times Quick Hits, $5 Pays
C600-00495-$5++	QDC-5004	5 & 10 Times, $5, Quick Hits
C600-00495-$5MI	QDC-5004	5 & 10 Times, $5, Quick Hits
C600-C0659-12MI	QDC-5009	Quick Hits, 5 & 10 Times, Credit Pays
C600-C0660-12MI	QDC-5010	Quick Hits, Black & Gold, Credit Pays
G600-00100-$2++	RAF-5001	Rich & Famous, $2 Pays
G600-00100-FC$2	RAF-5001	Rich & Famous, $2 Pays, French Canadian
G600-00100-++++	RAF-5001	Rich & Famous, Coin Pays
G600-00100-9DIG	RAF-5001	Rich & Famous, Coin Pays
G600-00100-FC++	RAF-5001	Rich & Famous, French Canadian, Coin Pays
G600-00112-$5++	RAF-5002	Rich & Famous, $5 Pays
G600-00140-++++	RAF-5004	Rich & Famous, Coin Pays
G600-00140-9DIG	RAF-5004	Rich & Famous, Coin Pays
G600-00140-SP++	RAF-5004	Rich & Famous, Spanish, Coin Pays
G600-00112-++++	RAF-5007	Rich & Famous, Coin Pays
G600-00138-++++	RAF-5011	Starlight Magic
G600-00139-++++	RAF-5011	Win A Truck
G600-00213-$1C+	RAF-5014	Rich & Famous, $100 Pays
G600-00215-$25+	RAF-5015	Rich & Famous, $25 Pays
G600-00218-$10+	RAF-5016	Rich & Famous, $10 Pays
G600-00302-++++	RAF-5017	Rich & Famous Hit Parade, Coin Pays
G600-00303-++++	RAF-5018	Rich & Famous Country Gold, Coin Pays
G600-00264-++++	RAF-5019	Born To Be Wild, Coin Pays
G600-00291-++++	RAF-5024	Golden Eye 007, Coin Pays
G600-00273-++++	RAF-5026	Silver & Gold, Coin Pays
G600-00273-9DIG	RAF-5026	Silver & Gold, Coin Pays
G600-00300-++++	RAF-5031	Rich & Famous Black & White, Coin Pays

GLASS	ART FORM	DESCRIPTION
G600-00300-3PRG	RAF-5031	Rich & Famous Black & White, Coin Pays
C600-00512-12MI	RAF-5050	Chicago Cityscape, Coin Pays
C600-00625-++++	RAF-5050	Chicago Cityscape, Credit Pays
G600-00446-++++	RAF-5052	Miami Coin Pays
C600-00446-12MI	RAF-5052	Miami, Coin Pays
G600-00445-++++	RAF-5054	New Orleans Coin Pays
C600-00445-12MI	RAF-5054	New Orleans, Coin Pays
G600-00441-++++	RAF-5056	Black & White Coin Pays
C600-00521-++++	RAF-5057	Memphis Blues, Coin Pays
G600-00287-9DIG	RG4-5001	Custom Reel Gem, Coin Pays
G600-00131-$5++	RH7-5001	Red Hot 7's, $5 Pays
G600-00131-++++	RH7-5001	Red Hot 7's, Coin Pays
G600-00131-12MI	RH7-5001	Red Hot 7's, Coin Pays
C600-C0701-$2MI	RH7-5001	Red Hot 7's, Credit Pays
G600-00212-++++	RH7-5002	Red Hot Genies, Coin Pays
G600-00221-MINI	RH7-5002	Red Hot Genies, Coin Pays
G600-00323-++++	RTW-5001	Roaring 20's, Coin Pays
G600-00323-OT$2	RTW-5001	Roaring 20's, English/French Canadian, $2 Pays
G600-00323-OT20	RTW-5001	Roaring 20's, English/French Canadian, $20 Pays
G600-00323-OT$5	RTW-5001	Roaring 20's, English/French Canadian, $5 Pays
G600-00323-OT++	RTW-5001	Roaring 20's, English/French Canadian, Coin Pays
G600-00323-FC++	RTW-5001	Roaring 20's, French Canadian, Coin Pays
G600-00323-SP++	RTW-5001	Roaring 20's, Spanish, Coin Pays
G600-00330-++++	RTW-5002	Question, Coin Pays
C600-00488-NJ++	RTW-5004	Swing Time, Coin Pays
C600-C0664-++++	RTW-5007	Swing Time, Credit Pays
G600-00414-++++	RTW-5009	Y2k Bug, Coin Pays
G600-C0665-++++	RTW-5012	Krazy Kops, Credit Pays
C600-00558-12MI	RTW-5023	At The Hop
C600-00615-++++	RTW-5023	At The Hop, Credit Pays
G600-00460-++++	RTW-5026	Millionaire 7's , Coin Pays
C600-00462-++++	RTW-5026	Millionaire 7's Coin Pays
C600-00477-++++	RTW-5026	Millionaire 7's Coin Pays
C600-00489-++++	RTW-5028	Millionaire 7's, Coin Pays
C600-00515-$5++	RTW-5031	Millionaire 7's, $5 Pays
G600-00008-++++	SAB-5005	Stars & Bars, Coin Pays
G600-00008-PROG	SAB-5005	Stars & Bars, Coin Pays
G600-00067-++++	SAB-5006	Stars & Bars, Coin Pays
G600-00067-PROG	SAB-5006	Stars & Bars, Coin Pays
G600-00019-++++	SAB-5009	Stars & Bars, Coin Pays
G600-00033-$2++	SAB-5017	Stars & Bars, $2 Pays
G600-00033-++++	SAB-5017	Stars & Bars, Coin Pays
G600-00033-PROG	SAB-5017	Stars & Bars, Coin Pays
G600-00034-++++	SAB-5018	Stars & Bars, Coin Pays
G600-00086-++++	SAB-5019	Stars & Bars, Coin Pays
G600-00071-++++	SAB-5020	Stars & Bars, Coin Pays
G600-00072-++++	SAB-5021	Stars & Bars, Coin Pays
G600-00070-++++	SAB-5022	Stars & Bars, Coin Pays
G600-00147-++++	SAB-5027	Stars & Bars, Starlight Magic, Coin Pays
G600-00178-++++	SAB-5029	Stars & Bars, Coin Pays
G600-00178-9DIG	SAB-5029	Stars & Bars, Tournament
G600-00152-$5++	SBW-5001	Stars & Bars Wild Diamond, $5 Pays
G600-00152-++++	SBW-5001	Stars & Bars, Diamonds, Coin Pays
G600-00153-9DIG	SBW-5002	Stars & Bars Diamonds, Coin Pays
G600-00153-++++	SBW-5002	Stars & Bars, Diamonds, Coin Pays
C600-00517-++++	SCC-5003	Leprechauns, Coin Pays
G600-00292-++++	STR-5001	Blue Streak, Coin Pays
G600-00146-++++	SUC-5012	Super Continental, Coin Pays
G600-00126-OT$2	SVN-5001	7's $2 Pays English/French Canadian
G600-00126-$2++	SVN-5001	7's, $2 Pays
G600-00126-$5++	SVN-5001	7's, $5 Pays
G600-00126-++++	SVN-5001	7's, Coin Pays
G600-00126-12MI	SVN-5001	7's, Coin Pays
G600-00126-OT20	SVN-5001	7's, Coin Pays, Ontario $20 Pays
G600-00126-OT++	SVN-5001	7's, English/French Canadian
G600-00137-++++	SVN-5002	7's, Coin Pays
G600-00176-++++	SVN-5002	7's, Coin Pays
G600-00224-++++	SVN-5003	Bars, Coin Pays
G600-00277-++++	SVN-5004	7's, Coin Pays
G600-00233-++++	SVN-5004	Bars, Coin Pays
G600-00049-++++	SWB-5027	Jackpot Eruption, Coin Pays
G600-00049-FC++	SWB-5027	Jackpot Eruption, English/French Canadian, Coin Pays
G600-00036-++++	SWB-5032	T-Rex, Coin Pays
G600-00240-++++	SWB-5036	T-Rex 5 Coin Pays, Coin Pays
G600-00096-++++	SWR-5001	Instant Repay, Coin Pays
G600-00191-$5++	TGD-5001	Triple Gold, $5 Pays
G600-00191-++++	TGD-5001	Triple Gold, Coin Pays
G600-00187-++++	TGD-5002	Triple Gold, Coin Pays
G600-00187-MINI	TGD-5002	Triple Gold, Coin Pays
G600-00193-++++	TGD-5003	Hockey Hat Trick, Coin Pays
G600-00193-FC++	TGD-5003	Hockey Hat Trick, French Canadian, Coin Pays
C600-00591-++++	TGD-5010	Triple Money, Credit Pays
C600-C0591-$5++	TGD-5010	Triple Money, Credit Pays, $5 Pays
C600-00650-++++	TGD-5011	Triple Money, Credit Pays
C600-C0662-++++	TGD-5013	Triple Money, Credit Pays

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlot® 6000

G600... Feature Glass (CT)

GLASS	ART FORM	DESCRIPTION
‖ C600-C0667-++++	TGD-5014	Triple Money, Credit Pays
G600-00125-++++	THB-5001	Thunderbolt, Coin Pays
G600-00164-++++	THB-5002	Thunderbolt, Coin Pays
G600-00229-++++	TM7-5001	Triple Blazing 7's Triple, Coin Pays
G600-00234-++++	TM7-5002	Triple Blazing 7's Triple, Coin Pays
‖ G600-00234-FC++	TM7-5002	Triple Blazing 7's Triple, Coin Pays, French Canadian
‖ C600-00594-++++	TM7-5003	Triple Money, Credit Pays
‖ C600-00498-++++	TOP-5001	Tower Of Power, Coin Pays
‖ C600-00522-++++	TOP-5001	Tower Of Power, Coin Pays
‖ C600-00499-++++	TOP-5002	Tower Of Power, Coin Pays
‖ C600-00523-++++	TOP-5002	Tower Of Power, Coin Pays
‖ C600-00527-++++	TOP-5005	Black & White Tower Of Power, Coin Pays
‖ C600-00528-++++	TOP-5007	Tower Of Power Diamonds, Coin Pays
‖ C600-00531-++++	TOP-5009	Tower Of Power, Blazing 7's, Coin Pays
‖ C600-00643-++++	TR7-5001	Fabulous 7's (Red, White, Blue) Flag, Credit Pays
‖ C600-C0643-$5++	TR7-5001	Fabulous 7's (Red, White, Blue) Flag, Credit Pays
‖ C600-00644-++++	TR7-5002	Fabulous 7's (Red, White, Blue) Flag, Credit Pays
‖ C600-00617-++++	TRB-5001	3 Way Pay, Credit Pays
G600-00114-$5++	WB7-5005	Open Sesame, Harrah's Custom, $5 Pays
G600-00114-++++	WB7-5005	Open Sesame, Harrah's Custom, Coin Pays
G600-00276-TOUR	WB7-5007	Tournament Blazing 7's, Coin Pays
G600-00454-++++	WB7-5008	Betty Boop Tournament
‖ C600-00526-++++	WB7-5011	Popeye Tournament, Coin Pays
‖ C600-00559-++++	WB7-5013	Playboy Coin Pays Tournament
‖ C600-00653-++++	WB7-5014	Tournament Cash For Life, Coin Pays
G600-00260-++++	WBE-5001	Wild Bells, Coin Pays
G600-00001-$5++	WFC-5001	Firecracker, $5 Pays
G600-00001-++++	WFC-5001	Firecracker, Coin Pays
G600-00050-FC++	WFC-5001	Firecracker, Coin Pays, English/French Canadian
G600-00042-PGMT	WHL-5001	White Lightning
G600-00042-++++	WHL-5001	White Lightning, Coin Pays
G600-00042-FC++	WHL-5001	White Lightning, Coin Pays, English/French Canadian
G600-00092-$25+	WHL-5002	White Lightning, $25 Pays
G600-00135-$25+	WHL-5003	White Lightning, $25 Pays
G600-00084-$1C+	WHL-5004	White Lightning, $100 Pays
G600-00107-++++	WHL-5005	Lightning Bars, Coin Pays
G600-00170-++++	WHL-5006	White Lightning, Coin Pays
G600-00113-$1C+	WHL-5009	White Lightning, $100 Pays
G600-00180-++++	WHL-5015	White Light, Coin Pays
G600-00073-$5++	WLI-5027	White Gold, $5 Pays
G600-00073-++++	WLI-5027	White Gold, Coin Pays
G600-00073-FC++	WLI-5027	White Gold, Coin Pays, English/French Canadian
G600-00079-$10++	WLI-5028	Black Gold, $10 Pays
G600-00079-$2++	WLI-5028	Black Gold, $2 Pays
‖ C600-0079-$25+	WLI-5028	Black Gold, $25 Pays
G600-00079-$5++	WLI-5028	Black Gold, $5 Pays
G600-00079-$5PG	WLI-5028	Black Gold, $5 Pays
G600-00079-++++	WLI-5028	Black Gold, Coin Pays
G600-00079-12MI	WLI-5028	Black Gold, Coin Pays
G600-00079-PGMT	WLI-5028	Black Gold, Coin Pays
G600-00160-$5++	WLI-5034	Wild Rose, $5 Pays
G600-00316-$10+	WLI-5038	Black Gold, $10 Pays
G600-00316-++++	WLI-5038	Black Gold, Coin Pays
G600-00185-++++	WM7-5006	Cherry Jubilee, Coin Pays
	C600-00005-$5++	WMB-5001	Black Gold, $5 Pays
G600-00005-++++	WMB-5001	Black Gold, Coin Pays
G600-00319-++++	WRN-5001	Wild Smiley, Coin Pays
G600-00322-++++	WRN-5002	Wild Smiley, Coin Pays
G600-00401-++++	WRN-5003	Double Dragon, Coin Pays
G600-00127-$2++	WRO-5001	Wild Rose, $2 Pays
G600-00127-FC$2	WRO-5001	Wild Rose, $2 Pays, French Canadian
G600-00127-$5++	WRO-5001	Wild Rose, $5 Pays
G600-00127-++++	WRO-5001	Wild Rose, Coin Pays
G600-00127-9DIG	WRO-5001	Wild Rose, Coin Pays
G600-00127-MINI	WRO-5001	Wild Rose, Coin Pays
G600-00201-++++	WRO-5001	Wild Rose, Coin Pays
G600-00127-FC++	WRO-5001	Wild Rose, English/French Canadian, Coin Pays
‖ C600-00647-++++	WRO-5002	Wild Rose, Credit Pays
G600-00161-FC++	WRO-5002	Wild Rose, French Canadian, Coin Pays
G600-00162-++++	WRO-5003	Black Gold, Coin Pays
G600-00214-$1C+	WRO-5008	Wild Rose, $100 Pays
G600-00216-$25+	WRO-5009	Wild Rose, $25 Pays
G600-00217-$10+	WRO-5010	Wild Rose, $10 Pays
G600-00195-++++	WRO-5013	Silver & Gold, Coin Pays
G600-00195-PHTN	WRO-5013	Silver & Gold, Coin Pays
G600-00182-++++	WRO-5014	Wild Rose, Coin Pays
G600-00183-++++	WRO-5016	Cherry Jubilee, Coin Pays
G600-00184-++++	WRO-5017	Cherry Jubilee, Coin Pays
G600-00208-++++	WRO-5018	Bally Las Vegas, Blazing 7's, Coin Pays
G600-00225-++++	WRO-5019	Sweet Hearts, Coin Pays
G600-00211-++++	WRO-5020	Black Velvet, Coin Pays
G600-00246-++++	WRO-5021	Wild Rose, Coin Pays
G600-00219-++++	WRO-5022	Wild Rose, Coin Pays
G600-00219-FC	WRO-5022	Wild Rose, Coin Pays, French
G600-00265-$5++	WRO-5026	24 Karat Wild Symbol, $5 Pays
G600-00266-$10+	WRO-5027	24 Karat Wild Symbol, $10 Pays
G600-00267-$25+	WRO-5028	24 Karat Wild Symbol, $25 Pays
G600-00268-$1C+	WRO-5029	24 Karat Wild Symbol, $100 Pays
G600-00314-++++	WRO-5033	24 Karat, Coin Pays
G600-00314-12MI	WRO-5033	24 Karat, Coin Pays
G600-00327-++++	WRO-5035	Black Gold, Coin Pays
‖ C600-00580-++++	WRO-5036	Wild Money, Credit Pays
‖ C600-00651-++++	WRO-5038	Wild Times, Credit Pays
‖ C600-00620-++++	WRO-5039	Wild Money, Credit Pays
‖ C600-00585-++++	WTS-5003	Wild Times, Credit Pays
G600-00231-++++	WWB-5002	Diamonds & Roses, Coin Pays
G600-00231-9PHT	WWB-5002	Diamonds & Roses, Coin Pays
G600-00252-++++	WWB-5003	Diamonds & Roses, Coin Pays
G600-00281-++++	WWB-5005	Diamond & Roses, Coin Pays
‖ G600-00281-FC++	WWB-5005	Diamond & Roses, French Canadian, Coin Pays
G600-00282-++++	WWB-5006	Diamond & Roses, Coin Pays
‖ C600-00514-++++	ZDM-5001	Bonus Line, Coin Pays

G609... Feature Glass (WR)

GLASS	ART FORM	DESCRIPTION
G609-00451-$5++	AP2-5006	Paris Hot Air Balloons, $5 Pays
G609-00038-$5++	APD-5001	Any Double Jackpot, $5 Pays
G609-00012-++++	APN-5001	Hat Trick, Coin Pays
G609-00012-12MI	APN-5001	Hat Trick, Coin Pays
G609-00100-++++	APT-5001	Wild Tiger, Coin Pays
‖ G609-00101-++++	APT-5002	Wild Tiger, Coin Pays
G609-00054-++++	APT-5014	Deuces Wild, Coin Pays
G609-00054-PORT	APT-5014	Deuces Wild, Portuguese, Coin Pays
G609-00067-++++	APT-5015	Deuces Wild, Coin Pays
G609-00089-++++	APT-5017	Bank Of The Nile, Coin Pays
G609-00175-$5++	APT-5023	Ball Of Fire, $5 Pays
G609-00175-++++	APT-5023	Ball Of Fire, Coin Pays
G609-00175-MINI	APT-5023	Ball Of Fire, Coin Pays
G609-00253-++++	APT-5023	Saarlared Jackpot, Coin Pays
G609-00175-SP++	APT-5023	Spanish Bar Of Fire, Coin Pays
G609-00309-12MI	APT-5024	Atlantis Cash, Coin Pays
‖ G609-00176-12MI	APT-5024	Ball Of Fire
G609-00176-++++	APT-5024	Ball Of Fire, Coin Pays
G609-00232-++++	APT-5025	Win, Coin Pays
G609-00227-++++	APT-5026	Win, Coin Pays
G609-00227-PORT	APT-5026	Win, Portuguese, Coin Pays
G609-00227-SP++	APT-5026	Win, Spanish, Coin Pays
G609-00353-12MI	APT-5030	Atlantis Cash Wild, Coin Pays
G609-00361-++++	APT-5031	Dolphin Mania, Coin Pays
G609-00404-PORT	APT-5032	Estoril Povoa Express, Portuguese, Coin Pays
G609-00430-12MI	APT-5033	Euro Pot, Coin Pays
G609-00216-$2++	APW-5001	Wild Party Bally Custom, $2 Pays
‖ C609-00216-$5SP	APW-5001	Wild Party Bally Custom, $5 Pays, Spanish
G609-00216-++++	APW-5001	Wild Party Bally Custom, Coin Pays
G609-00216-$5++	APW-5001	Wild Party Bally Custom, Coin Pays, $5 Pays
‖ G609-00216-12MI	APW-5001	Wild Party Bally Custom, Credit
G609-00325-++++	APW-5004	Jackpot Fives, Coin Pays
‖ C609-00570-$2++	APW-5005	Wild Party, $2 Pays
‖ C609-00570-$5++	APW-5005	Wild Party, $5 Pays
‖ C609-00570-$5MI	APW-5005	Wild Party, $5 Pays
G609-00570-++++	APW-5005	Wild Party, Coin
‖ C609-00570-12MI	APW-5005	Wild Party, Coin Pays
G609-00451-$10+	APW-5006	Paris Hot Air Balloons, $10 Pays
‖ G609-00451-$25+	APW-5006	Paris Hot Air Balloons, $25 Pays
G609-00451-++++	APW-5006	Paris Hot Air Balloons, Coin Pays
‖ C609-00838-12MI	APW-5008	Park Place Only, Blue Martini, Credit
G609-00138-++++	BAR-5004	Bars, Coin Pays
G609-00128-++++	BAR-5005	Gold Rush, Coin Pays
G609-00112-++++	BAR-5006	Bars, Coin Pays
G609-00462-$1K+	BCP-5001	Custom Paris Flur De Lei, $1000 Pays
G609-00462-$5C+	BCP-5001	Custom Paris Flur De Lei, $500 Pays
G609-00463-$1C+	BCP-5002	Custom Paris Flur De Lei, $100 Pays
G609-00460-PROG	BDM-5001	Betty Boop Devil Double Jackpot Triple Blazing 7's, Coin Pays
G609-00471-PROG	BDM-5002	Betty Boop Triple Blazing 7's Devil, Coin Pays
G609-00457-PROG	BDM-5003	Betty Boop Double Jackpot Blazing 7's Devil, Coin Pays
G609-00465-PROG	BDM-5004	Betty Boop Devil, Coin Pays
‖ C609-00812-12MI	BDO-5002	Blazing $ & 7's, Credit Pays
‖ C609-00813-++++	BF3-5001	Money Frenzy, Credit Pays
‖ G609-00574-PROG	BFB-5001	Betty Boop Roundup Coin Pays
‖ G609-00575-PROG	BFB-5002	Betty Boop Roundup Coin Pays
‖ G609-00576-PROG	BFB-5003	Betty Boop Roundup Coin Pays
‖ G609-00575-PROG	BFB-5004	Betty Boop Roundup Coin Pays
‖ C609-00600-$5MI	BFR-5001	Bonus Frenzy, $5 Pays
‖ C609-00595-12MI	BFR-5001	Bonus Frenzy, Coin Pays
‖ C609-00595-$2++	BFR-5001	Bonus Frenzy, Coin Pays, $2 Pays
‖ C609-00595-SPMI	BFR-5001	Bonus Frenzy, Coin Pays, Spanish

©2003 Bally Gaming and Systems
| - Revised, || - New

G609... Feature Glass (WR) (cont.)

GLASS	ART FORM	DESCRIPTION
C609-00835-SP++	BFR-5001	Bonus Frenzy, Coin Pays, Spanish
C609-00600-SP++	BFR-5001	Bonus Frenzy, Spanish
C609-00660-++++	BFR-5001	Bonus Frenzy, Coin Pays
C609-00660-12MI	BFR-5001	Bonus Frenzy, Coin Pays
G609-00636-++++	BFR-5002	Winning For Dummies
C609-00627-++++	BFR-5002	Winning For Dummies, Coin Pays
C609-00636-12MI	BFR-5002	Winning For Dummies, Coin Pays
C609-00636-SPMI	BFR-5002	Winning For Dummies, Spanish
C609-00633-++++	BFR-5003	Triple Bonus Frenzy, Coin Pays
C609-00633-12MI	BFR-5003	Triple Bonus Frenzy, Coin Pays
C609-00633-SPMI	BFR-5003	Triple Bonus Frenzy, Coin Pays, Spanish
C609-00633-SP++	BFR-5003	Triple Bonus Frenzy, Coin Pays, Spanish
C609-00642-PROG	BFR-5005	Popeye Bonus Frenzy
C609-00641-12MI	BFR-5006	5 X Bonus Frenzy
C609-00641-++++	BFR-5006	5 X Bonus Frenzy, Coin Pays
C609-C0641-++++	BFR-5006	5 X Bonus Frenzy, Credit
C609-00656-++++	BFR-5007	Bonus Frenzy, Coin Pays
C609-C0655-$10+	BFR-5008	Bonus Frenzy, $10 Pays, Credit
C609-00655-$5++	BFR-5008	Bonus Frenzy, $5 Pays
C609-00657-++++	BFR-5009	Winning For Dummies, Coin Pays
C609-00772-12MI	BFR-5010	Richie Rich
C609-00772-++++	BFR-5010	Richie Rich, Coin Pays
C609-00772-SP++	BFR-5010	Richie Rich, Coin Pays, Spanish
C609-C0772-++++	BFR-5010	Richie Rich, Credit
C609-00771-++++	BFR-5011	Andy Capp, Coin Pays
C609-00771-12MI	BFR-5011	Andy Capp, Coin Pays
C609-00781-12MI	BFR-5012	Blondie Frenzy, Coin Pays
C609-00781-12MI	BFR-5013	Blondie Frenzy, Coin Pays
C609-00782-12MI	BFR-5014	Betty Boop Frenzy, Coin Pays
C609-00782-12MI	BFR-5015	Betty Boop Frenzy, Coin Pays
C609-C0871-+++	BFR-5020	Fireball Frenzy, Credit
C609-C0873-++++	BFR-5022	Scatter Frenzy, Credit
C609-C0843-12MI	BFR-5023	Jamaican Me Rich, Credit, Blue
C609-C0845-12MI	BFR-5024	Jamaican Me Rich, Credit, Blue
C609-C0844-12MI	BFR-5024	Jamaican Me Rich, Credit, Yellow
C609-C0846-12MI	BFR-5024	Jamaican Me Rich, Credit, Yellow
C609-C0877-++++	BFR-5025	SNL Frenzy, Credit
G609-00475-$5++	BG7-5001	Paris Bonus, Hit & Run, $5 Pays
G609-00477-$10+	BG7-5002	Paris Bonus, Hit & Run, $10 Pays
G609-00479-$25+	BG7-5003	Paris Bonus, Hit & Run, $25 Pays
G609-00474-$5++	BGW-5001	Paris Bonus, Hit & Run, $5 Pays
G609-00476-$10+	BGW-5002	Paris Bonus, Hit & Run, $10 Pays
G609-00478-$25+	BGW-5003	Paris Bonus, Hit & Run, $25 Pays
G609-00524-$5++	BGW-5004	Custom Hilton, $5 Pays
G609-00538-$10+	BGW-5005	Hilton Bonus, $10 Pays
G609-00539-$5++	BGW-5006	Hilton Bonus, $5 Pays
G609-00213-$5++	BL2-5001	2nd Chance Blazing 7's, $5 Pays
G609-00213-++++	BL2-5001	2nd Chance Blazing 7's, Coin Pays
G609-00213-FC++	BL2-5001	2nd Chance Blazing 7's, French Canadian, Coin Pays
G609-00213-FC25	BL2-5001	2nd Chance Blazing 7's, French Canadian, Coin Pays, $25 Pays
G609-00213-FC2$	BL2-5001	2nd Chance Blazing 7's, French Canadian, Coin Pays, 2$ Pays
G609-00213-MINI	BL2-5001	2nd Chance, Coin Pays
G609-00278-++++	BL3-5001	3's A Charm, Coin Pays
G609-00421-++++	BL3-5002	3's A Charm, Coin Pays
C609-00637-++++	BL4-5001	Blazing 7's, 4 Reel, Coin Pays, 25¢,
C609-00637-12MI	BL4-5001	Blazing 7's, 4 Reel, Coin Pays, 25¢,
C609-00637-SPMI	BL4-5001	Blazing 7's, 4 Reel, Coin Pays, 25¢, Spanish
C609-00638-++++	BL4-5002	Blazing 7's, 4 Reel, Coin Pays, $1
C609-00638-12MI	BL4-5002	Blazing 7's, 4 Reel, Coin Pays, $1
C609-00638-$5MI	BL4-5002	Blazing 7's, 4 Reel, Coin Pays, $5 Pays
C609-00790-12MI	BL4-5003	Blazing 7's, 4 Reel, 4 Credit
G609-00018-++++	BL7-5007	Blazing 7's
G609-00018-$1++	BL7-5007	Blazing 7's, $1 Pays
G609-00018-$1C+	BL7-5007	Blazing 7's, $100 Pays
G609-00018-$20+	BL7-5007	Blazing 7's, $20 Pays
G609-00018-$25+	BL7-5007	Blazing 7's, $25 Pays
G609-00018-$5++	BL7-5007	Blazing 7's, $5 Pays
G609-00018-PGMT	BL7-5007	Blazing 7's, Coin Pays
G609-00127-SPEC	BL7-5007	Blazing 7's
G609-00018-SP++	BL7-5007	Blazing 7's, Spanish, Coin Pays
G609-00018-PG$2	BL7-5021	Blazing 7's, $2 Pays
G609-00018-PG$5	BL7-5021	Blazing 7's, $5 Pays
G609-00047-OT$5	BL7-5021	Blazing 7's, $5 Pays, English/French Canadian
G609-00047-FC$5	BL7-5021	Blazing 7's, English/French Canadian, Coin Pays
G609-00047-FC++	BL7-5021	Blazing 7's, English/French Canadian, Coin Pays
G609-00047-FC$M	BL7-5021	Blazing 7's, English/French Canadian, Coin Pays, $100
G609-00047-FC2M	BL7-5021	Blazing 7's, English/French Canadian, Coin Pays, $5 Pays
G609-00047-FC$C	BL7-5021	Blazing 7's, English/French Canadian, Coin Pays,$100
G609-00047-FC25	BL7-5021	Blazing 7's, French Canadian/English, $5 Pays
C609-00141-$10+	BL7-5026	Blazing 7's, $10 Pays
G609-00141-$10P	BL7-5026	Blazing 7's, $10 Pays
G609-00141-$2PG	BL7-5026	Blazing 7's, $2 Pays
C609-00141-25MI	BL7-5026	Blazing 7's, $25 Pays
G609-00141-$5PG	BL7-5026	Blazing 7's, $5 Pays
G609-00141-++++	BL7-5026	Blazing 7's, Coin Pays

GLASS	ART FORM	DESCRIPTION
G609-00141-2PRG	BL7-5026	Blazing 7's, Coin Pays
G609-00141-MICR	BL7-5026	Blazing 7's, Coin Pays
G609-00141-PGMT	BL7-5026	Blazing 7's, Coin Pays
G609-00329-2PRG	BL7-5026	Blazing 7's, Coin Pays
G609-00141-14MI	BL7-5026	Blazing 7's, Coin Pays
G609-00141-SPPG	BL7-5026	Blazing 7's, Spanish, Coin Pays
G609-00041-$25+	BL7-5030	Blazing 7's, $25 Pays
G609-00068-$5++	BL7-5041	Reel Gems, $5 Pays
G609-00068-PGMT	BL7-5041	Reel Gems, Coin Pays
G609-00068-++++	BL7-5041	Reel Gems, Coin Pays
G609-00068-SPPG	BL7-5041	Reel Gems, Coin Pays, Spanish
G609-00025-$5++	BL7-5052	Reel Gems, $5 Pays
G609-00025-++++	BL7-5052	Reel Gems, Coin Pays
G609-00025-PGMT	BL7-5052	Reel Gems, Coin Pays
C609-00025-SPMI	BL7-5052	Reel Gems, Coin Pays, Spanish
G609-00025-MICR	BL7-5052	Reel Gems, Coin Pays
G609-00010-$5PG	BL7-5053	Blazing 7's $5
G609-00010-$2++	BL7-5053	Blazing 7's, $2 Pays
G609-00010-$5++	BL7-5053	Blazing 7's, $5 Pays
G609-00010-++++	BL7-5053	Blazing 7's, Coin Pays
G609-00010-2PGM	BL7-5053	Blazing 7's, Coin Pays
G609-00010-2PRG	BL7-5053	Blazing 7's, Coin Pays
G609-00010-PGMT	BL7-5053	Blazing 7's, Coin Pays
G609-00010-PROG	BL7-5053	Blazing 7's, Coin Pays
G609-00010-OT20	BL7-5053	Blazing 7's, Coin Pays, Ontario, $20 Pays
G609-00010-OTPG	BL7-5053	Blazing 7's, English/French Canadian
G609-00010-HOT+	BL7-5053	Blazing 7's, Hot Slot Snipe, Coin Pays
G609-00010-SP++	BL7-5053	Blazing 7's, Spanish, Coin Pays
G609-00010-FC++	BL7-5053	French Canadian Blazing 7's, Coin Pays
G609-00098-++++	BL7-5056	Flaming 7's, Coin Pays
G609-00098-PGMT	BL7-5056	Flaming 7's, Coin Pays
G609-00098-SP++	BL7-5056	Flaming 7's, Spanish, Coin Pays
G609-00062-++++	BL7-5060	Treasures Of The Nile, Luxor, Coin Pays
G609-00062-PROG	BL7-5060	Treasures Of The Nile, Luxor, Coin Pays
G609-00010-PGMT	BL7-5062	Blazing 7's, Coin Pays
G609-00328-2PRG	BL7-5062	Blazing 7's, Coin Pays
G609-00010-FCP2	BL7-5062	Blazing 7's, French Canadian, $2 Pays
G609-00010-FC5P	BL7-5062	Blazing 7's, French Canadian, $5 Pays
G609-00010-FCPG	BL7-5062	Blazing 7's, French Canadian, Coin Pays
G609-00251-$5MI	BL7-5062	Blue Station 7's, $5 Pays
G609-00251-MINI	BL7-5062	Blue Station 7's, Coin Pays
G609-00118-PROG	BL7-5066	Blast Of Cash, Coin Pays
G609-00164-$5++	BL7-5069	$5 Blazing 7's
G609-00244-MINI	BL7-5070	Flamingo's, Coin Pays
G609-00155-$5PG	BL7-5072	Itt Sheraton Green, $5 Pays
G609-00155-++++	BL7-5072	Itt Sheraton Green, Coin Pays
G609-00156-++++	BL7-5072	Itt Sheraton Purple
G609-00156-$5PG	BL7-5072	Itt Sheraton Purple, $5 Pays
G609-00170-$5PG	BL7-5073	Worlds Of Cash, $5 Pays
G609-00170-PROG	BL7-5073	Worlds Of Cash, Coin Pays
G609-00161-PRG+	BL7-5074	Bank Of The Nile, Coin Pays
G609-00165-++++	BL7-5075	Sheraton DI, Coin Pays
G609-00186-$2MI	BL7-5076	Marlin Mania, Blue, $2 Pays
G609-00186-++++	BL7-5076	Marlin Mania, Blue, Coin Pays
G609-00186-PGBL	BL7-5076	Marlin Mania, Blue, Coin Pays
G609-00186-PROG	BL7-5076	Marlin Mania, Yellow, Coin Pays
G609-00190-MINI	BL7-5080	Island Gods, Acres, Coin Pays
G609-00190-$5PG	BL7-5080	Island Gods/Tropicana, $5 Pays
C609-00794-12MI	BL7-5081	Roman Rewards, Coin Pays,
G609-00207-$5PG	BL7-5082	Sheraton Gold, $5 Pays, Green
G609-00206-$5PG	BL7-5082	Sheraton Gold, $5 Pays, Purple
G609-00207-MINI	BL7-5082	Sheraton Gold, Coin Pays, Green
G609-00206-MINI	BL7-5082	Sheraton Gold, Coin Pays, Purple
G609-00245-$5MI	BL7-5088	Pink Flamingo, $5 Pays
G609-00245-MINI	BL7-5089	Pink Flamingo, Coin Pays
G609-00252-MINI	BL7-5090	Pink Flamingo, Coin Pays
G609-00273-MINI	BL7-5093	Hilton Saturn Rings, Coin Pays
G609-00288-2PRG	BL7-5097	Blue Station 7's, Coin Pays
G609-00288-12MI	BL7-5097	Blue Stations 7's, Coin Pays
G609-00287-12MI	BL7-5097	Red Stations 7's, Coin Pays
G609-00287-2PRG	BL7-5097	Red Stations 7's, Coin Pays
G609-00290-12MI	BL7-5098	Blue Stations 7's, Coin Pays
G609-00289-12MI	BL7-5098	Red Stations 7's, Coin Pays
G609-00312-2PRG	BL7-5099	Blue St Charles, Coin Pays
G609-00292-12MI	BL7-5099	Blue Station 7's, Coin Pays
G609-00292-2PRG	BL7-5099	Blue Stations 7's, 2 , Coin Pays
G609-00311-2PRG	BL7-5099	Red St Charles, Coin Pays
G609-00291-2PRG	BL7-5099	Red Station 7's, Coin Pays
G609-00291-12MI	BL7-5099	Red Stations 7's, Coin Pays
G609-00331-2PRG	BL7-5101	Blazing 7's, Coin Pays
G609-00330-2PRG	BL7-5101	St Charles Blazing 7's, Coin Pays
G609-00346-++++	BL7-5106	Trail Blazer, Coin Pays
G609-00350-12MI	BL7-5108	Prima $, Coin Pays
G609-00378-12MI	BL7-5111	Klondike Nugget, Coin Pays
G609-00407-12MI	BL7-5112	Rio Runaway Reels, Coin Pays

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlot® 6000

G609... Feature Glass (WR) (cont.)

GLASS	ART FORM	DESCRIPTION
G609-00385-12MI	BL7-5115	Black & White Blazing 7's, Coin Pays
G609-00386-12MI	BL7-5116	Black & White Blazing 7's, Coin Pays
G609-00387-12MI	BL7-5117	Black & White Blazing 7's, Coin Pays
G609-00410-$5MI	BL7-5118	24 Karat, Coin Pays
G609-00418-12MI	BL7-5119	Jackpots Galore, Coin Pays
G609-00419-12MI	BL7-5122	Jackpots Galore, Coin Pays
G609-00431-$2MI	BL7-5126	Golden Lotus, $2 Pays
G609-00431-12MI	BL7-5126	Golden Lotus, Mandalay Bay, Coin Pays
‖ G609-00450-$10+	BL7-5128	Paris Magnifique, $10 Pays
G609-00450-$2MI	BL7-5128	Paris Magnifique, $2 Pays
‖ G609-00450-$25+	BL7-5128	Paris Magnifique, $25 Pays
‖ G609-00450-$5++	BL7-5128	Paris Magnifique, $5 Pays
G609-00450-12MI	BL7-5128	Paris Magnifique, Coin Pays
G609-00540-12MI	BL7-5131	Royal Tiger, Coin Pays
‖ C609-00649-12MI	BL7-5137	Jamaican Me Rich, Coin Pays, Blue
‖ C609-00650-12MI	BL7-5138	Jamaican Me Rich, Coin Pays, Blue
‖ C609-00651-12MI	BL7-5139	Jamaican Me Rich, Coin Pays, Blue
‖ C609-00648-++++	BL7-5140	John Ascuaga's Nugget, Coin Pays
‖ C609-00648-12MI	BL7-5140	John Ascuaga's Nugget, Coin Pays
C609-00572-PROG	BLB-5001	Blazing 7's Betty Boop Coin Pays
G609-00348-++++	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G609-00348-12MI	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G609-00348-2PRG	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G609-00348-2SPC	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
G609-00348-MICR	BLD-5001	Blazing 7's Double Jackpot, Coin Pays
‖ C609-00348-$2P2	BLD-5001	Blazing 7's Double Jackpot, Coin Pays, $2 Pays,
‖ G609-00348-OT++	BLD-5001	Blazing 7's Double Jackpot, English/French Canadian
G609-00348-1SPC	BLD-5001	Blazing 7's Double Jackpot, Pays
G609-00348-SP++	BLD-5001	Blazing 7's Double Jackpot, Spanish, Coin Pays
G609-00348-$5MI	BLD-5001	Blazing 7's Double Jackpot, $5 Pays
‖ C609-00770-12MI	BLD-5001	Red Background, Coin Pays
G609-00408-1SPC	BLD-5002	Blazing 7's Double Jackpot 2 , Coin Pays
G609-00408-++++	BLD-5002	Blazing 7's Double Jackpot, Coin Pays
‖ G609-00408-2PRG	BLD-5002	Blazing 7's Double Jackpot, Coin Pays
G609-00409-2SPC	BLD-5003	Black & White Double Jackpot, Coin Pays
‖ G609-00409-2PRG	BLD-5003	Black & White Double Jackpot, Coin Pays,
G609-00467-++++	BLD-5004	Blazing 7's Double Jackpot, Coin Pays
G609-00467-12MI	BLD-5004	Blazing 7's Double Jackpot, Coin Pays
G609-00467-$10++	BLD-5004	Blazing 7's Double Jackpot, Coin Pays, $10 Pays
‖ C609-00467-$2++	BLD-5004	Blazing 7's Double Jackpot, Coin Pays, $2 Pays
‖ C609-00467-$5++	BLD-5004	Blazing 7's Double Jackpot, Coin Pays, $5 Pays
‖ C609-00467-2SPC	BLD-5004	Blazing 7's Double Jackpot, Coin Pays, & Micro
‖ C609-00467-SPMI	BLD-5004	Blazing 7's Double Jackpot, Coin Pays, 12 , Spanish
G609-00230-++++	BLF-5001	Trail Blazer, Coin Pays
‖ G609-00230-OT++	BLF-5001	Trail Blazer, Coin Pays, Ontario
G609-00230-SP++	BLF-5001	Trail Blazer, Spanish, Coin Pays
G609-00230-12MI	BLF-5002	Trail Blazer, Coin Pays
G609-00314-++++	BLF-5003	Blazing 7's Deluxe, Coin Pays
G609-00314-12MI	BLF-5004	Blazing 7's Deluxe, Coin Pays
G609-00461-PROG	BLM-5001	Betty Boop's Big Hit, Coin Pays
G609-00473-PROG	BLM-5002	Betty Boop's Big Hit, Coin Pays
G609-00458-PROG	BLM-5003	Betty Boop Big Hit 5c, Coin Pays
G609-00466-PROG	BLM-5004	Betty Boop's Big Hit, Coin Pays
G609-00493-++++	BLX-5009	Le Jacque Pot Sevy, Blazing 7's, Coin Pays
G609-00026-++++	BM7-5004	7/10,000, B-Style S5000, Coin Pays
‖ G609-00022-12MI	BM7-5008	Black Gold
G609-00022-$2++	BM7-5008	Black Gold, $2 Pays
G609-00022-$25+	BM7-5008	Black Gold, $25 Pays
G609-00022-$5++	BM7-5008	Black Gold, $5 Pays
G609-00022-++++	BM7-5008	Black Gold, Coin Pays
G609-00022-9PHO	BM7-5008	Black Gold, Coin Pays
G609-00022-PROG	BM7-5008	Black Gold, Coin Pays
‖ G609-00022-OT++	BM7-5008	Black Gold, English/French Canadian Ontario
G609-00022-FC++	BM7-5008	Black Gold, French Canadian/English, Coin Pays
G609-00022-SP++	BM7-5008	Black Gold, Spanish, Coin Pays
G609-00022-MYST	BM7-5008	Black Gold, Coin Pays
G609-00033-$5++	BM7-5009	7/50,000, $5 Pays
G609-00554-++++	BM7-5010	Bally's Gold Coin
G609-00046-++++	BM7-5013	Black Gold, Coin Pays
G609-00046-FC++	BM7-5013	Black Gold, Park Place Jackpot Bars, English/French Canadian, Coin Pays
‖ C609-00797-++++	BM7-5017	Black Gold 7's, Coin Pays
G609-00204-$5MI	BM7-5027	Red Hot Blazing 7's, $5 Pays
G609-00204-++++	BM7-5027	Red Hot Blazing 7's, Coin Pays
G609-00204-MINI	BM7-5027	Red Hot Blazing 7's, Coin Pays
G609-00204-SP++	BM7-5033	Red Hot Blazing 7's, Spanish, Coin Pays
G609-00222-++++	BM7-5036	UFO, Coin Pays
‖ G609-00222-12MI	BM7-5036	UFO, Coin Pays
G609-00222-SP++	BM7-5036	UFO, Spanish, Coin Pays
G609-00372-$5++	BM7-5037	Caesars Gold, $5 Pays
G609-00372-++++	BM7-5037	Caesars Gold, Coin Pays
G609-00250-++++	BM7-5038	Blue Station 7's, Coin Pays
G609-00250-2PRG	BM7-5038	Blue Station 7's, Coin Pays
G609-00250-MINI	BM7-5038	Blue Station 7's, Coin Pays
‖ G609-00249-2PRG | BM7-5038 | Red Station 7's |

GLASS	ART FORM	DESCRIPTION
G609-00249-++++	BM7-5038	Red Station 7's, Coin Pays
G609-00249-MINI	BM7-5038	Red Station 7's, Coin Pays
G609-00249-PROG	BM7-5038	Red Station 7's, Coin Pays
G609-00281-12MI	BM7-5040	Blue Station 7's, Coin Pays
G609-00281-2PRG	BM7-5040	Blue Station 7's, Coin Pays
G609-00282-2PRG	BM7-5040	Red Station 7's, Coin Pays
G609-00282-12MI	BM7-5040	Red Station 7's, Coin Pays
G609-00280-12MI	BM7-5041	Harrah's Red Hot Genies, Coin Pays
G609-00304-12MI	BM7-5043	Blazing Star, Coin Pays
G609-00499-PROG	BMQ-5001	Born To Boop, Coin Pays
G609-00500-PROG	BMQ-5002	Born To Boop, Coin Pays
G609-00501-PROG	BMQ-5003	Born To Boop, Coin Pays
‖ G609-00520-++++	BNT-5001	Bonus Times, Coin Pays
‖ G609-00520-$10++	BNT-5001	Bonus Times, Coin Pays, $10 Pays
‖ G609-00520-$5++	BNT-5001	Bonus Times, Coin Pays, $5 Pays
‖ C609-00520-SP++	BNT-5001	Bonus Times, Coin Pays, Spanish
‖ C609-00635-++++	BNT-5002	Bonus Times, Coin Pays
‖ C609-00635-12MI	BNT-5002	Bonus Times, Coin Pays
‖ C609-00600-++++	BNT-5003	Bonus Times, Coin Pays
‖ C609-00600-12MI	BNT-5003	Bonus Times, Coin Pays
‖ C609-00667-PROG	BPM-5009	Betty Boop Devil, Triple Blazing 7's, Coin Pays
‖ C609-00668-PROG	BQM-5009	Born To Boop, Coin Pays
G609-00459-PROG	BRT-5001	Betty Boop Roaring 20's, Coin Pays
G609-00472-PROG	BRT-5002	Betty Boop Roaring 20's, Coin Pays
G609-00456-PROG	BRT-5003	Betty Boop Roaring 20's, Coin Pays
G609-00543-PROG	BRT-5005	Swingtime Betty Boop, Coin Pays
‖ G609-00580-NJ++	BRT-5005	Swingtime Betty Boop, New Jersey, Coin
G609-00544-PROG	BRT-5006	Swingtime Betty Boop, Coin Pays
‖ G609-00581-NJ++	BRT-5006	Swingtime Betty Boop, New Jersey, Coin
G609-00545-PROG	BRT-5007	Swingtime Betty Boop, Coin Pays
G609-00544-PROG	BRT-5008	Swingtime Betty Boop, Coin Pays
G609-00549-PROG	BRT-5012	Born To Boop Coin
G609-00550-PROG	BRT-5013	Born To Boop Coin
G609-00562-PROG	BRT-5014	All American Betty Coin
G609-00560-PROG	BRT-5015	All American Betty Coin
G609-00561-PROG	BRT-5016	All American Betty Coin
G609-00560-PROG	BRT-5017	All American Betty Coin
‖ C609-00590-NJ++	BRT-5018	Swingtime Payday, New Jersey, Coin
‖ C609-00591-NJ++	BRT-5019	Roaring 20's Payday, New Jersey, Coin
G609-00557-PROG	BRT-5022	Blondie Roaring 20's, $1
G609-00558-PROG	BRT-5023	Blondie Swingtime
G609-00565-PROG	BRT-5029	Big Dough
‖ C609-00582-NJ++	BRT-5029	Blondie Big Spender, New Jersey, Coin
G609-00566-PROG	BRT-5030	Big Dough
‖ C609-00583-NJ++	BRT-5030	Blondie Big Spender, New Jersey, Coin
‖ C609-00584-NJ++	BRT-5031	Blondie Big Spender, New Jersey, Coin
‖ C609-00588-NJ++	BRT-5032	Blondie Big Spender, New Jersey, Coin Pays
G609-00563-PROG	BRT-5033	Blondie Big Spender
‖ C609-00585-NJ++	BRT-5033	Blondie Big Spender, New Jersey, Coin
G609-00564-PROG	BRT-5034	Blondie Big Spender
‖ C609-00589-NJ++	BRT-5034	Blondie Big Spender, New Jersey, Coin Pays
‖ C609-00614-SPMI	BRT-5035	International Swingtime Betty, Spanish, Coin Pays
‖ C609-00602-12MI	BRT-5036	Play The Market, Coin
‖ C609-00669-PROG	BRT-5038	Boop Roaring 20's, Coin Pays
‖ C609-00643-14MI	BS7-5001	Blazing 7's Scatter
‖ C609-00643-12MI	BS7-5001	Blazing 7's Scatter, Coin Pays, (25¢)
‖ C609-00643-SP++	BS7-5001	Blazing 7's Scatter, Coin Pays, Spanish
‖ C609-00643-SPMI	BS7-5001	Blazing 7's Scatter, Coin Pays, Spanish
‖ C609-00818-12MI	BS7-5002	Blazing 7's Scatter, Coin Pays, ($1)
‖ C609-00663-PROG	BS7-5003	Betty Boop Scatter, Coin Pays
‖ C609-00664-PROG	BS7-5004	Betty Boop Scatter, Coin Pays
‖ C609-00646-PROG	BS7-5006	Blondie Super Scatter, Coin Pays
‖ C609-00665-PROG	BS7-5007	Blondie Scatter, Coin Pays
‖ C609-00817-12MI	BS7-5008	Popeye Scatter, Coin Pays
G609-00040-$25+	BUB-5019	Crazy Joker, Coin Pays, $25 Pays, Park Place Jackpot
G609-00007-$5++	BUB-5027	Plum Crazy, $5 Pays
G609-00007-++++	BUB-5027	Plum Crazy, Coin Pays
G609-00007-12MI	BUB-5027	Plum Crazy, Coin Pays
G609-00007-SP++	BUB-5027	Plum Crazy, Spanish, Coin Pays
‖ C609-00030-$10+	BUB-5028	Balligator, $10 Pays
G609-00030-$5++	BUB-5028	Balligator, $5 Pays
G609-00030-++++	BUB-5028	Balligator, Coin Pays
G609-00030-SP++	BUB-5028	Balligator, Spanish, Coin Pays
G609-00008-++++	BUB-5029	Plum Crazy, Coin Pays
‖ G609-00032-9PHT	BUB-5031	Crazy Jokers
G609-00032-$10+	BUB-5031	Crazy Jokers, $10 Pays
‖ C609-00032-$1C+	BUB-5031	Crazy Jokers, $100 Pays
G609-00032-$2++	BUB-5031	Crazy Jokers, $2 Pays
‖ G609-00032-$20+	BUB-5031	Crazy Jokers, $20 Pays
G609-00032-$25+	BUB-5031	Crazy Jokers, $25 Pays
‖ C609-00032-25MI	BUB-5031	Crazy Jokers, $25 Pays
‖ C609-00032-$5MI	BUB-5031	Crazy Jokers, $5 Pays
G609-00032-$5++	BUB-5031	Crazy Jokers, $5 Pays
G609-00032-++++	BUB-5031	Crazy Jokers, Coin Pays
G609-00032-9PHO	BUB-5031	Crazy Jokers, Coin Pays

©2003 Bally Gaming and Systems

G609... Feature Glass (WR) (cont.)

GLASS	ART FORM	DESCRIPTION
|| C609-C0032-12MI	BUB-5031	Crazy Jokers, Credit
G609-00032-SP++	BUB-5031	Crazy Jokers, Spanish, Coin Pays
G609-00505-++++	BUB-5035	Happy Joker, Coin Pays
|| C609-00199-$2++	BUB-5036	Crazy 7's, $2 Pays
G609-00199-++++	BUB-5036	Crazy 7's, Coin Pays
G609-00183-++++	BUB-5036	Lucky Lizard, Coin Pays
G609-00321-$5++	BUB-5038	Western Crazy Joker, $5 Pays
G609-00321-++++	BUB-5038	Western Crazy Joker, Coin Pays
G609-00366-++++	BUB-5043	Plum Crazy, Coin Pays
G609-00480-++++	BUB-5044	Fric & Frac, English, Coin Pays
|| C609-C0868-++++	BUY-5001	(One) Thousand, Credit
|| C609-00787-PROG	BWT-500	Dagwood's Big Bonus, Credit Pays
|| C609-00625-PROG	BWT-5002	World Tour, Purple
|| C609-00647-PROG	BWT-5014	Popeye Spinach Bonus,
|| C609-00773-++++	BWT-5019	Frankie & Annette, Coin Pays
G609-00072-++++	CB7-5001	Chamber Of Choices, Coin Pays, Luxor
G609-00052-++++	CB7-5001	Naughty Nickels, Coin Pays
G609-00102-++++	CB7-5003	Cold Cash, Coin Pays
G609-00070-++++	CB7-5023	French Quarters, Coin Pays
|| G609-00070-12MI	CB7-5023	French Quarters, Coin Pays
G609-00070-FR++	CB7-5023	French Quarters, French, Coin Pays
G609-00070-SP++	CB7-5023	French Quarters, Spanish, Coin Pays
G609-00123-++++	CB7-5025	Naughty Nickels, Coin Pays
G609-00086-5C++	CB7-5026	Naughty Nickels, Coin Pays
G609-00087-25C+	CB7-5027	French Quarters, Coin Pays
G609-00097-25C+	CB7-5028	French Quarters, Coin Pays
G609-00121-++++	CB7-5032	Pascua Yaqui Logo
|| C609-00607-++++	CB7-5039	Super Blazing 7's, Coin Pays
|| C609-00607-12MI	CB7-5039	Super Blazing 7's, Coin Pays
|| C609-00608-$2MI	CB7-5040	Super Blazing 7's, $2
|| C609-00609-$5++	CB7-5040	Super Blazing 7's, $5 Pays
|| C609-00608-++++	CB7-5040	Super Blazing 7's, Coin Pays
|| C609-00608-12MI	CB7-5040	Super Blazing 7's, Coin Pays
|| C609-00608-12MI	CB7-5040	Super Blazing 7's, Coin Pays
|| C609-00608-2SPC	CB7-5040	Super Blazing 7's, Coin Pays
|| C609-00608-SP++	CB7-5040	Super Blazing 7's, Coin Pays, Spanish
|| C609-00608-SPMI	CB7-5040	Super Blazing 7's, Coin Pays, Spanish
G609-00140-$XMI	CBM-5004	Black Gold Colors, $10 Pays
|| C609-00140-25MI	CBM-5004	Black Gold Colors, $10 Pays
|| G609-00140-$25+	CBM-5004	Black Gold Colors, $25 Pays
|| G609-00140-$5++	CBM-5004	Black Gold Colors, Pays $5
G609-00162-++++	CLJ-5003	Golden Gate San Francisco, Coin Pays
G609-00219-++++	CM7-5060	1088 Style, Coin Pays
G609-00140-$1C+	CMB-5004	Black Gold Colors, $100 Pays
G609-00434-12MI	DAP-5001	Pool Shark, Coin Pays
G609-00434-1SPC	DAP-5001	Pool Shark, Coin Pays
|| C609-00434-SPMI	DAP-5001	Pool Shark, Coin Pays, Spanish
G609-00434-++++	DAP-5002	Pool Shark, Coin Pays
|| G609-00208-$5++	DB5-5001	Double Trouble, $5 Pays
G609-00208-++++	DB5-5001	Double Trouble, Coin Pays
G609-00208-MINI	DB5-5001	Double Trouble, Coin Pays
G609-00208-SP++	DB5-5001	Double Trouble, Spanish, Coin Pays
G609-00402-PROG	DBB-5001	Payday Black & White, Coin Pays
G609-00398-PROG	DBB-5002	Payday Black & White, Coin Pays
G609-00449-PROG	DBB-5004	Payday Black & White Generic, Coin Pays
G609-00444-PROG	DBB-5005	Payday Black & White Generic, Coin Pays
G609-00441-PROG	DBB-5006	Payday Black & White Generic, Coin Pays
|| C609-C0858-12MI	DBF-5001	Popeye, Double Jackpot, Credit
|| C609-C0859-12MI	DBF-5002	Betty Boop Double Jackpot, Credit
|| C609-C0860-12MI	DBF-5003	Blondie, Credit
G609-00210-$5++	DBK-5002	Win & Spin, $5 Pays
G609-00210-++++	DBK-5002	Win & Spin, Coin Pays
G609-00494-++++	DBX-5012	Le Jacque Sevy Black & White, Coin Pays
|| C609-C0375-$5++	DC5-5001	Gimme 5, $5 Pays, Credit
G609-00375-++++	DC5-5001	Gimme 5, Coin Pays
G609-00376-$10+	DC5-5002	Black & White 5x, $10 Pays
|| C609-00376-$2++	DC5-5002	Black & White 5x, $2 Pays,
G609-00376-$5++	DC5-5002	Black & White 5x, $5 Pays
G609-00376-++++	DC5-5002	Black & White 5x, Coin Pays
G609-00376-12MI	DC5-5002	Black & White 5x, Coin Pays
|| C609-00376-SPMI	DC5-5002	Black & White 5x, Spanish, Coin Pays
G609-00376-SP++	DC5-5002	Black & White 5x, Spanish, Coin Pays
|| G609-00376-OT++	DC5-5002	Black & White, English/French Canadian
G609-00425-OSPC	DC5-5005	Gimme 5, 5x, Coin Pays
|| C609-00411-$2++	DC5-5007	5 Times Joker Wild, $2 Pays
G609-00411-++++	DC5-5007	5 Times Joker Wild, Coin Pays
G609-00495-++++	DC5-5009	Le Jacque Pot Sevy 5x, Coin Pays
C609-00605-++++	DC5-5010	Black & White, Coin
C609-00605-12MI	DC5-5010	Black & White, Coin Pays, Pays
C609-00605-SP++	DC5-5010	Black & White, Coin Pays, Spanish
G609-00103-++++	DCM-5023	Double Eagle, Coin Pays
G609-00009-$10+	DCM-5031	California Dreamin', $10 Pays
G609-00010-$10+	DCM-5031	California Dreamin', $10 Pays
G609-00009-$2++	DCM-5031	California Dreamin', $2 Pays
G609-00009-$5++	DCM-5031	California Dreamin', $5 Pays

GLASS	ART FORM	DESCRIPTION
G609-00009-++++	DCM-5031	California Dreamin', Coin Pays
|| C609-00009-SPMI	DCM-5031	California Dreamin', Coin Pays, Spanish
G609-00053-$5++	DCM-5032	California Dreamin', $5 Pays
G609-00053-++++	DCM-5032	California Dreamin', Coin Pays
G609-00053-MINI	DCM-5032	California Dreamin', Coin Pays
G609-00053-PORT	DCM-5032	California Dreamin', Portuguese, Coin Pays
G609-00099-++++	DCM-5034	California Dreamin', Coin Pays
G609-00403-$1C+	DCM-5035	Black & White, $100 Pays
G609-00403-$50+	DCM-5035	Black & White, $100 Pays
G609-00403-$1FC	DCM-5035	Black & White, $100 Pays, French Canadian
G609-00403-$5++	DCM-5035	Black & White, $5 Pays
G609-00136-++++	DCM-5038	Double Eagle, Coin Pays
|| G609-00146-$5++	DCM-5040	Double Time, $5 Pays
G609-00146-++++	DCM-5040	Double Time, Coin Pays
G609-00146-SP++	DCM-5040	Double Time, Spanish, Coin Pays
G609-00177-++++	DCM-5041	Double Time, Coin Pays
G609-00177-MINI	DCM-5041	Double Time, Coin Pays
G609-00177-FC++	DCM-5041	Double Time, Coin Pays, French Canadian
G609-00226-$2++	DCM-5043	Double Take, $2 Pays
|| C609-00226-$25+	DCM-5043	Double Take, $25 Pays
|| C609-00226-25MI	DCM-5043	Double Take, $25 Pays
G609-00226-$5++	DCM-5043	Double Take, $5 Pays
G609-00226-++++	DCM-5043	Double Take, Coin Pays
G609-00226-12MI	DCM-5043	Double Take, Coin Pays
G609-00226-MYST	DCM-5043	Double Take, Coin Pays
G609-00226-PORT	DCM-5043	Double Take, Portuguese, Coin Pays
G609-00247-$2++	DCM-5044	Double Gold, $2 Pays
G609-00247-++++	DCM-5044	Double Gold, Coin Pays
G609-00247-12MI	DCM-5044	Double Gold, Coin Pays
G609-00248-++++	DCM-5045	Double Gold, Coin Pays
G609-00248-12MI	DCM-5045	Double Gold, Coin Pays
G609-00248-PORT	DCM-5045	Double Gold, Portuguese, Coin Pays
|| G609-00258-++++	DCM-5046	Double Take, Coin Pays
G609-00286-++++	DCM-5048	Alexander The Great, Coin Pays
G609-00322-++++	DCM-5051	Runaway Jackpot, Coin Pays
G609-00364-++++	DCM-5052	Blazing 7x, Coin Pays
G609-00364-12MI	DCM-5052	Blazing 7x, Coin Pays
G609-00364-$5++	DCM-5052	Blazing 7x, Coin Pays, $5 Pays
G609-00364-FC++	DCM-5052	Blazing 7x, Coin Pays, French
|| C609-00364-$10+	DCM-5052	Blazing 7x, Coin Pays, French, $10 Pays
|| C609-00364SPMI	DCM-5052	Blazing 7x, Coin Pays, Spanish
G609-00365-$5++	DCM-5053	Blazing 7x, $5 Pays
G609-00365-++++	DCM-5053	Blazing 7x, Coin Pays
G609-00365-12MI	DCM-5053	Blazing 7x, Coin Pays
G609-00390-++++	DCM-5055	10 X Black & White Kilroy, Coin Pays
G609-00417-++++	DCM-5056	Custom Oneida Double Connection, Coin Pays
G609-00414-++++	DCM-5057	Five & Ten, Coin Pays
|| G609-00414-BLCK	DCM-5057	Five & Ten, Coin Pays, Black
|| C609-00415-$10+	DCM-5058	Five & Ten, $10 Pays
G609-00415-$2++	DCM-5058	Five & Ten, $2 Pays
G609-00415-$5++	DCM-5058	Five & Ten, $5 Pays
G609-00415-++++	DCM-5058	Five & Ten, Coin Pays
G609-00415-$5MI	DCM-5058	Five & Ten, Coin Pays, $5
|| G609-00415-BLCK	DCM-5058	Five & Ten, Coin Pays, Black
G609-00432-++++	DCM-5062	20 Times, Coin Pays
G609-00429-12MI	DCM-5066	North Star Custom, Coin Pays
G609-00258-FC++	DCM-5068	Double Take, Coin Pays, French Canadian
|| C609-00824-++++	DCM-5070	Double Money, Credit
|| C609-00836-++++	DCM-5071	Double Money, Credit
|| C609-00819-++++	DCM-5072	Double Money Coin
|| C609-00819-12MI	DCM-5072	Double Money Coin
|| C609-00819-$5++	DCM-5072	Double Money Credit
|| C609-00819-$1C+	DCM-5072	Double Money Credit
|| C609-00819-$20+	DCM-5072	Double Money Credit
|| C609-00825-++++	DCM-5073	Double Money Credit
|| C609-00805-++++	DCM-5076	5 Times 10 Times Money, Credit Pays
|| C609-00806-++++	DCM-5077	5 Times 10 Times Money, Credit Pays
|| C609-00807-++++	DCM-5078	5 Times 10 Times Money, Credit Pays
|| C609-00808-++++	DCM-5079	5 Times 10 Times Money, Credit Pays
|| C609-00809-++++	DCM-5080	5 Times 10 Times Money, Credit Pays
G609-00228-$10+	DD7-5001	007, $10 Pays
G609-00228-$2++	DD7-5001	007, $2 Pays
G609-00228-$5++	DD7-5001	007, $5 Pays
G609-00228-MYST	DD7-5001	007, Coin Pay
G609-00228-++++	DD7-5001	007, Coin Pays
G609-00228-PORT	DD7-5001	007, Portuguese, Coin Pays
G609-00238-$10+	DD7-5003	Gimme 5, $10 Pays
G609-00238-$2++	DD7-5003	Gimme 5, $2 Pays
G609-00238-$5++	DD7-5003	Gimme 5, $5 Pays
|| G609-00238-12MI	DD7-5003	Gimme 5, Coin
G609-00238-++++	DD7-5003	Gimme 5, Coin Pays
|| G609-00238-FC++	DD7-5003	Gimme 5, French Canadian, Coin Pays
G609-00238-PORT	DD7-5003	Gimme 5, Portuguese, Coin Pays
G609-00238-SP++	DD7-5003	Gimme 5, Spanish, Coin Pays
G609-00302-++++	DD7-5005	007, Coin Pays

©2003 Bally Gaming and Systems

ProSlot® 6000

G609... Feature Glass (WR) (cont.)

GLASS	ART FORM	DESCRIPTION
G609-00302-9DIG	DD7-5005	007, Coin Pays
G609-00338-++++	DD7-5006	Black & White, Coin Pays
G609-00338-12MI	DD7-5006	Black & White, Coin Pays
G609-00357-++++	DD7-5007	Gimme 5, Coin Pays
G609-00357-12MI	DD7-5007	Gimme 5, Coin Pays
G609-00357-SP++	DD7-5007	Gimme 5, Spanish, Coin Pays
G609-00373-12MI	DD7-5008	Black & White 5x, Coin Pays
G609-00405-12MI	DD7-5009	24 Karat, Coin Pays
G609-00416-++++	DD7-5010	Black & White 5x, Coin Pays
\| C609-00603-++++ | DD8-5001 | Hot Line, Coin |
\| C609-00603-12MI | DD8-5001 | Hot Line, Coin Pays |
\| C609-00603-SP++ | DD8-5001 | Hot Line, Coin Pays, Spanish |
\| C609-00620-++++ | DD8-5002 | Hot Lines, Coin Pays |
\| C609-00621-++++ | DD8-5003 | Hot Lines, Coin Pays |
\| C609-00789-++++ | DD8-5003 | Hot Lines, Credit Pays |
\| C609-00640-++++ | DD8-5004 | Hot Lines, Coin Pays |
\| C609-00640-SP++ | DD8-5004 | Hot Lines, Spanish |
\| C609-00783-++++ | DD8-5005 | Winning Times 7's, Credit Pays |
\| C609-00784-+++ | DD8-5006 | Winning Times Blazing 7's, Credit Pays |
\| C609-00777-++++ | DD8-5007 | Tim & Harvey Jokers Wild, Coin Pays |
\| C609-00811-++++ | DD8-5008 | Hot Lines, Coin Pays |
G609-00011-$5++ | DDD-5001 | Triple Double Jackpot, $5 Pays |
G609-00011-++++ | DDD-5001 | Triple Double Jackpot, Coin Pays |
G609-00011-$2++ | DDD-5001 | Triple Double, Jackpot, $2 Pays |
G609-00256-FC++ | DDD-5002 | Triple Double, French Canadian, Coin Pays |
G609-00552-$5++ | DDM-5001 | Bally's Fun Fives |
G609-00508-$5++ | DDM-5003 | Paris Fun $5 |
G609-00512-$5++ | DDM-5003 | Paris Fun 5's, Coin Pays |
\| G609-00113-9PHO | DIA-5001 | Diamonds |
G609-00113-$5++ | DIA-5001 | Diamonds, $5 Pays |
G609-00113-++++ | DIA-5001 | Diamonds, Coin Pays |
G609-00113-9PHT | DIA-5001 | Diamonds, Coin Pays |
\| G609-00113-MICR | DIA-5001 | Diamonds, Coin Pays |
\| G609-00113-MINI | DIA-5001 | Diamonds, Coin Pays |
G609-00113-FC++ | DIA-5001 | Diamonds, Coin Pays, French Canadian |
\| G609-00113-PORT | DIA-5001 | Diamonds, Portuguese, Coin Pays |
\| G609-00143-++++ | DIA-5002 | Diamonds, Coin Pays |
\| C609-00143-SPMI | DIA-5002 | Diamonds, Coin Pays, Spanish |
\| G609-00143-$5++ | DIA-5004 | Diamonds, $5 Pays |
\| G609-00381-++++ | DIA-5005 | Diamond Line, Russia Custom, Coin Pays |
\| G609-00428-12MI | DIA-5009 | Bunny Money, Coin Pays |
\| G609-00427-12MI | DIA-5009 | Playboy Winner, Coin Pays |
\| G609-00139-$5++ | DIB-5001 | Diamonds, $5 Pays |
\| G609-00139-++++ | DIB-5001 | Diamonds, Coin Pays |
\| G609-00153-$5++ | DIB-5002 | Diamonds, $5 Pays |
\| G609-00153-++++ | DIB-5002 | Diamonds, Coin Pays |
\| G609-00153-2PRG | DIB-5002 | Diamonds, Coin Pays |
\| G609-00153-MICR | DIB-5002 | Diamonds, Coin Pays |
\| G609-00153-MINI | DIB-5002 | Diamonds, Coin Pays |
\| G609-00153-PORT | DIB-5002 | Diamonds, Coin Pays, Portuguese |
\| G609-00153-FC$2 | DIB-5002 | Diamonds, French Canadian, $2 Pays |
\| G609-00153-SP++ | DIB-5002 | Diamonds, Spanish, Coin Pays |
\| C609-00344-$5MI | DID-5001 | Diamond Line, Double Jackpot 7's, $5 Pays |
\| G609-00344-++++ | DID-5001 | Diamond Line, Double Jackpot 7's, Coin Pays |
\| G609-00344-SP++ | DID-5001 | Diamond Line, Double Jackpot 7's, Coin Pays, Spanish |
\| G609-00345-12MI | DID-5002 | Diamond Line Double Jackpot Blazing 7's, Coin Pays |
\| G609-00345-OT++ | DID-5002 | Diamond Line Double Jackpot Blazing 7's, English/French Canadian |
\| C609-00345-$5++ | DID-5002 | Diamond Line, Double Jackpot Blazing 7's, $5 Pays |
\| G609-00345-OT$5 | DID-5002 | Diamond Line, Double Jackpot Blazing 7's, $5 Pays, English/French Canadian |
\| G609-00345-++++ | DID-5002 | Diamond Line, Double Jackpot Blazing 7's, Coin Pays |
\| G609-00345-OT20 | DID-5002 | Diamond Line, Double Jackpot Blazing 7's, Coin Pays Ontario, $20 Pays |
\| G609-00380-OT++ | DID-5003 | Black & White Double Jackpot, English/French Canadian |
\| G609-00380-OT$5 | DID-5003 | Black And White, $5 Pays Ontario, English/French Canadian |
\| G609-00380-++++ | DID-5003 | Diamond Doubler, Black & White, Coin Pays |
\| C609-00497-SP++ | DIV-5001 | Diamonds & Devils Diamond Line, Coin Pays, Spanish |
\| C609-00775-++++ | DIV-5001 | Diamonds & Devils, Coin Pays |
\| C609-C0775-12MI | DIV-5001 | Diamonds & Devils, Credit |
\| G609-00037-$5++ | DJP-5001 | Solid Gold, $5 Pays |
\| G609-00152-++++ | DL7-5001 | Blazing 7's Diamond Line, Coin Pays |
\| C609-00152-12MI | DL7-5001 | Blazing 7's Diamond Line, Coin Pays |
\| G609-00152-FCPG | DL7-5001 | Blazing 7's Diamond Line, French Canadian, Coin Pays |
\| G609-00152-OT++ | DL7-5001 | Blazing 7's Diamond Line, Ontario, Coin Pays |
\| G609-00152-PROG | DL7-5001 | Blazing 7's Diamond Line, Pays , Coin Pays |
\| G609-00152-SP++ | DL7-5001 | Blazing 7's Diamond Line, Spanish, Coin Pays |
\| G609-00150-$20+ | DL7-5002 | Blazing 7's Diamond Line, $20 Pays |
\| G609-00150-++++ | DL7-5002 | Blazing 7's Diamond Line, Coin Pays |
\| G609-00150-PRG+ | DL7-5002 | Blazing 7's Diamond Line, Coin Pays |
\| G609-00150-FC++ | DL7-5002 | Blazing 7's Diamond Line, French Canadian, Coin Pays |
\| G609-00150-SP++ | DL7-5002 | Blazing 7's Diamond Line, Spanish, Coin Pays |
\| C609-C0498-$5++ | DLD-5001 | Double On Diamond Line, $5 Credit |
\| C609-00498-$5MI | DLD-5001 | Double On Diamond Line, $5 Pays |
\| G609-00498-++++ | DLD-5001 | Double On Diamond Line, Coin Pays |

GLASS	ART FORM	DESCRIPTION
\| C609-00498-12MI | DLD-5001 | Double On Diamond Line, Coin Pays |
\| C609-00498-SP++ | DLD-5001 | Double On Diamond Line, Coin Pays, Spanish |
\| C609-C0498-++++ | DLD-5001 | Double On Diamond Line, Credit |
\| C609-C0866-++++ | DLF-5001 | Diamond Line Frenzy, Credit |
\| G609-00148-++++ | DLI-5002 | Double Jackpot, Coin Pays |
G609-00168-$10 | DM7-5001 | Triple Blazing 7's Double Symbol, $10 Pays |
\| G609-00168-$2++ | DM7-5001 | Triple Blazing 7's Double Symbol, $2 Pays |
\| G609-00168-$25+ | DM7-5001 | Triple Blazing 7's Double Symbol, $25 Pays |
\| G609-00168-$5MI | DM7-5001 | Triple Blazing 7's Double Symbol, $5 Pays |
\| C609-00168-$5++ | DM7-5001 | Triple Blazing 7's Double Symbol, $5 Pays |
\| G609-00168-12MI | DM7-5001 | Triple Blazing 7's Double Symbol, Coin Pays |
\| G609-00168-MYST | DM7-5001 | Triple Blazing 7's Double Symbol, Coin Pays |
\| G609-00168-OT++ | DM7-5001 | Triple Blazing 7's Double Symbol, English/French Canadian |
G609-00168-SP++ | DM7-5001 | Triple Blazing 7's Double Symbol, Spanish, Coin Pays |
\| G609-00168-++++ | DM7-5001 | Triple Blazing 7's, Double Symbol, Coin Pays |
G609-00174-$5++ | DM7-5002 | Blazing 7's Double Symbol, $5 Pays |
G609-00174-++++ | DM7-5002 | Blazing 7's Double Symbol, Coin Pays |
G609-00174-MINI | DM7-5002 | Blazing 7's Double Symbol, Coin Pays |
G609-00174-FC++ | DM7-5002 | Blazing 7's Double Symbol, French Canadian, Coin Pays |
G609-00174-PORT | DM7-5002 | Blazing 7's Double Symbol, Portuguese, Coin Pays |
G609-00174-SP++ | DM7-5002 | Blazing 7's Double Symbol, Spanish, Coin Pays |
\| G609-00174-OT++ | DM7-5002 | Triple Blazing 7's Double Symbol, English/French Canadian |
G609-00223-$10++ | DM7-5004 | All American, $10 Pays |
G609-00223-$2++ | DM7-5004 | All American, $2 Pays |
G609-00223-$5++ | DM7-5004 | All American, $5 Pays |
G609-00223-++++ | DM7-5004 | All American, Coin Pays |
G609-00223-12MI | DM7-5004 | All American, Coin Pays |
G609-00223-SP++ | DM7-5004 | All American, Spanish, Coin Pays |
G609-00237-++++ | DM7-5005 | All American, Coin Pays |
G609-00237-12MI | DM7-5005 | All American, Coin Pays |
G609-00237-PORT | DM7-5005 | All American, Portuguese, Coin Pays |
G609-00237-SP++ | DM7-5005 | All American, Spanish, Coin Pays |
G609-00246-++++ | DM7-5006 | Triple Blazing 7's Double Symbol, Coin Pays |
G609-00255-12MI | DM7-5007 | Triple Blazing 7's Double Symbol, Coin Pays |
G609-00255-++++ | DM7-5007 | Triple Blazing 7's Double Symbol, Coin Pays |
\| G609-00255-OT++ | DM7-5007 | Triple Blazing 7's Double Symbol, English/French Canadian |
G609-00255-SP++ | DM7-5007 | Triple Blazing 7's Double Symbol, Spanish, Coin Pays |
G609-00259-++++ | DM7-5008 | Triple Blazing 7's Double Symbol, Coin Pays |
G609-00259-12MI | DM7-5008 | Triple Blazing 7's Double Symbol, Coin Pays |
G609-00259-SP++ | DM7-5008 | Triple Blazing 7's Double Symbol, Spanish, Coin Pays |
G609-00259-OT++ | DM7-5008 | Triple Blazing 7's Double Symbol, Spanish, Coin Pays, Ontario |
G609-00261-++++ | DM7-5009 | Blazing 7's Double Symbol, Coin Pays |
G609-00261-MINI | DM7-5009 | Blazing 7's Double Symbol, Coin Pays |
G609-00261-SP++ | DM7-5009 | Blazing 7's Double Symbol, Spanish |
\| G609-00261-OT++ | DM7-5009 | Triple Blazing 7's Double Symbol, English/French Canadian |
G609-00275-$20+ | DM7-5010 | Black & White, $10 Pays |
G609-00275-$10+ | DM7-5010 | Black & White, $10 Pays |
G609-00275-$2++ | DM7-5010 | Black & White, $2 Pays |
G609-00275-$25+ | DM7-5010 | Black & White, $25 Pays |
\| G609-00275-25MI | DM7-5010 | Black & White, $25 Pays |
G609-00275-$5++ | DM7-5010 | Black & White, $5 Pays |
G609-00275-$5MI | DM7-5010 | Black & White, $5 Pays |
G609-00275-FC$5 | DM7-5010 | Black & White, $5 Pays, French Canadian |
G609-00275-12MI | DM7-5010 | Black & White, Coin Pays |
G609-00275-++++ | DM7-5010 | Black & White, Coin Pays |
G609-00275-$1C+ | DM7-5010 | Black & White, Coin Pays, $100 Pays |
G609-00275-FC++ | DM7-5010 | Black & White, Coin Pays, French Canadian |
\| G609-00275-OT++ | DM7-5010 | Black & White, English/French Canadian |
G609-00275-SP++ | DM7-5010 | Black & White, Spanish, Coin Pays |
G609-00276-++++ | DM7-5011 | Black & White, Coin Pays |
G609-00276-12MI | DM7-5011 | Black & White, Coin Pays |
G609-00276-MICR | DM7-5011 | Black & White, Coin Pays |
\| G609-00276-OT++ | DM7-5011 | Black & White, English/French Canadian |
G609-00276-PORT | DM7-5011 | Black & White, Portuguese, Coin Pays |
G609-00276-SP++ | DM7-5011 | Black & White, Spanish, Coin Pays |
G609-00276-SPPG | DM7-5011 | Black & White, Spanish, Coin Pays |
G609-00285-12MI | DM7-5012 | Tropicana Black & White, Coin Pays |
G609-00293-++++ | DM7-5014 | Black & White, Coin Pays |
G609-00293-12MI | DM7-5014 | Black & White, Coin Pays, Coin |
\| G609-00293-OT++ | DM7-5014 | Black & White, English/French Canadian |
G609-00293-SP++ | DM7-5014 | Black & White, Spanish, Coin Pays |
G609-00294-SP++ | DM7-5014 | Black & White, Spanish, Coin Pays |
G609-00294-++++ | DM7-5015 | Black & White, Coin Pays |
\| G609-00294-OT++ | DM7-5015 | Double Jackpot Black & White, English/French Canadian |
\| G609-00295-OT++ | DM7-5016 | Black & White English/French Canadian |
G609-00295-MKR+ | DM7-5016 | Black & White, Micro, Coin Pays |
G609-00295-12MI | DM7-5016 | Black & White, Coin Pays |
G609-00295-++++ | DM7-5016 | Black & White, Coin Pays |
G609-00295-SP++ | DM7-5016 | Black & White, Spanish, Coin Pays |
G609-00310-12MI | DM7-5018 | Bohania Bucks, Coin Pays |
G609-00320-++++ | DM7-5020 | All American, Coin Pays |
G609-00320-MINI | DM7-5020 | All American, Coin Pays |
G609-00320-SP++ | DM7-5020 | All American, Spanish, Coin Pays |
G609-00339-++++ | DM7-5023 | Twist & Shout, Coin Pays |
G609-00339-SP++ | DM7-5023 | Twist & Shout, Spanish, Coin Pays |

©2003 Bally Gaming and Systems

ProSlot® 6000

G609... Feature Glass (WR) (cont.)

GLASS	ART FORM	DESCRIPTION
G609-00340-++++	DM7-5024	Twist & Shout, Coin Pays
G609-00340-SP++	DM7-5024	Twist & Shout, Spanish, Coin Pays
G609-00351-12MI	DM7-5029	Lucky Lobster, Coin Pays, Sun Atlantis
C609-C0862-++++	DM7-5031	Blazing 7's Double Jackpot, Credit, South Africa
G609-00379-++++	DM7-5033	Midnight Sun, Coin Pays
G609-00379-12MI	DM7-5033	Midnight Sun, Coin Pays
C609-C0879-++++	DM7-5035	Black & White, Coin
G609-00393-SP++	DM7-5036	Triple Blazing 7's Double Jackpot, Spanish, Coin Pays
G609-00393-++++	DM7-5036	Triple Blazing 7's, Double Jackpot, Coin Pays
G609-00394-++++	DM7-5037	Triple Blazing 7's, Double Jackpot, Coin Pays
G609-00394-SP++	DM7-5037	Triple Blazing 7's, Double Jackpot, Spanish, Coin Pays
G609-00391-++++	DM7-5038	Black & White Double Kilroy, Coin Pays
G609-00391-12MI	DM7-5038	Black & White Double Kilroy, Coin Pays
G609-00391-SP++	DM7-5038	Black & White Double Kilroy, Coin Pays, Spanish
G609-00392-++++	DM7-5039	Black & White Double Kilroy, Coin Pays
G609-00392-12MI	DM7-5039	Black & White Double Kilroy, Coin Pays
G609-00392-SP++	DM7-5039	Black & White Double Kilroy, Spanish, Coin Pays
G609-00406-++++	DM7-5040	5x Black & White, Coin Pays
G609-00426-++++	DM7-5045	Double Silver & Gold, Coin Pays
G609-00426-OSPC	DM7-5045	Double Silver & Gold, Coin Pays
G609-00526-++++	DM7-5047	New York Cityscape, Coin Pays
G609-00526-12MI	DM7-5047	New York Cityscape, Coin Pays
G609-00527-++++	DM7-5048	San Francisco Cityscape, Coin Pays
G609-00528-++++	DM7-5049	Seattle Cityscape, Coin Pays
G609-00503-++++	DM7-5050	Triple Blazing 7's Double Jackpot, Coin Pays
C609-00555-++++	DM7-5051	Black & White, Coin
G609-00555-FR++	DM7-5051	Black & White, Coin, French
C609-00804-++++	DM7-5054	Triple Blazing 7's Double Symbol, Coin Pays
C609-00616-++++	DM7-5058	Memphis Blues Wild, Coin Pays
C609-00616-12MI	DM7-5058	Memphis Blues Wild, Coin Pays
G609-00423-++++	DM7-5060	Double Symbol Blazing 7's, Coin Pays
G609-00424-++++	DM7-5061	Black & White Double, Coin Pays
C609-C0848-$10+	DM7-5062	Double Money, Credit
C609-C0848-++++	DM7-5062	Double Money, Credit
C609-00828-++++	DM7-5063	Double Money, Triple Blazing 7's, Credit
C609-00829-++++	DM7-5063	Double Money, Triple Blazing 7's, Credit
C609-00832-++++	DM7-5066	Double Money, Triple Blazing 7's, Credit
C609-C0870-++++	DM7-5067	Blazing 7's Double Jackpot, Credit
C609-C0869-++++	DM7-5068	Black & White, Credit
C609-C0853-++++	DM7-5070	Black & White, Double Jackpot, Credit, South Africa
C609-C0849-++++	DM7-5071	Double Money, Credit, South Africa
C609-C0863-++++	DM7-5072	Blazing 7's Double Jackpot, Credit, South Africa
C609-C0854-++++	DM7-5073	Black & White, Double Jackpot, Credit, South Africa
C609-C0850-++++	DM7-5074	Double Money, Credit, South Africa
C609-C0850-++++	DM7-5075	Blazing 7's Double Jackpot, Credit Pays, South Africa
C609-C0876-++++	DM7-5076	Black & White, Credit, South Africa
C609-C0852-++++	DM7-5077	Double Money, Credit, South Africa
C609-C0864-++++	DM7-5078	Blazing 7's Double Jackpot, Credit Pays, South Africa
C609-C0876-++++	DM7-5079	Black & White, Credit, South Africa
C609-C0852-++++	DM7-5080	Double Money, Credit, South Africa
C609-C0865-++++	DM7-5081	Blazing 7's Double Jackpot, Credit Pays, South Africa
C609-C0855-++++	DM7-5082	Black & White, Double Jackpot, Credit, South Africa
C609-C0851-++++	DM7-5083	Double Money, Credit, South Africa
C609-C0865-++++	DM7-5084	Blazing 7's Double Jackpot, Credit Pays, South Africa
C609-C0851-++++	DM7-5086	Double Money, Credit, South Africa
G609-00095-PROG	DMB-5004	10 Grand, Coin Pays
G609-00027-$10+	DMB-5004	Black Gold, $10 Pays
G609-00027-++++	DMB-5004	Black Gold, Coin Pays
G609-00027-FIVG	DMB-5004	Black Gold, Five Grand, Coin Pays, 50¢ Only
G609-00027-PORT	DMB-5004	Black Gold, Portuguese, Coin Pays
G609-00027-TENG	DMB-5004	Black Gold, Ten Grand, Coin Pays 50¢ Only
C609-00792-12MI	DMB-5010	10 Grand Coin Pays
G609-00024-$10+	DMB-5012	100 Grand $10 Pays
G609-00132-$10+	DMB-5012	100k, $10 Pays
G609-00024-++++	DMB-5012	Black Gold, Coin Pays
G609-00023-$5++	DMB-5013	Black Gold, $5 Pays
G609-00044-$5MI	DMB-5019	Black Gold, $5 Pays
G609-00044-++++	DMB-5019	Black Gold, Coin Pays
G609-00044-FC++	DMB-5019	Black Gold, English/French Canadian, Coin Pays
G609-00045-++++	DMB-5020	Double Jackpot, Black Gold, Coin Pays
G609-00045-FC$5	DMB-5020	Double Jackpot, English/French Canadian, Black Gold, $5 Pays
G609-00045-FC++	DMB-5020	Double Jackpot, English/French Canadian, Coin Pays Black Gold
G609-00045-FC$2	DMB-5020	French Canadian Double Jackpot, $2 Pays
G609-00553-+++	DMB-5022	Bally's Las Vegas Bally's Gold
G609-00034-$5++	DMB-5024	Double Jackpot, Coin Pays
G609-00090-12MI	DMB-5025	Black & Gold, Coin Pays
G609-00090-++++	DMB-5025	Black Gold, Coin Pays
G609-00090-2PRG	DMB-5025	Black Gold, Coin Pays
G609-00090-PROG	DMB-5025	Black Gold, Coin Pays
G609-00090-SP++	DMB-5025	Black Gold, Spanish, Coin Pays
G609-00090-$10+	DMB-5025	Jackpot Bars & 7's Black Gold, $10 Pays
G609-00090-$2MI	DMB-5025	Jackpot Bars & 7's, $2 Pays
G609-00029-++++	DMB-5030	Black Gold, Park Place Jackpot Bars, Coin Pays
C609-00791-12MI	DMB-5033	Double Jackpot, Coin Pays
G609-00081-++++	DMB-5056	Cherries Deluxe, Coin Pays

GLASS	ART FORM	DESCRIPTION
G609-00081-FC++	DMB-5056	French Canadian Cherries Deluxe, Coin Pays
C609-00093-$10+	DMB-5065	Black Gold, 100 Grand, $10 Pays
C609-00093-$5MI	DMB-5065	Black Gold, 50 Grand, $5 Pays
G609-00093-$5++	DMB-5065	Black Gold, 50 Grand, $5 Pays
G609-00370-$2++	DMB-5071	Black Gold, $2 Pays
G609-00370-++++	DMB-5071	Black Gold, Coin Pays
G609-00369-++++	DMB-5072	Hilton Gold, Coin Pays
G609-00436-$10++	DMB-5073	Paris Gold, $10 Pays
G609-00437-$10+	DMB-5073	Paris Gold, $10 Pays
G609-00436-$5++	DMB-5073	Paris Gold, $5 Pays
G609-00437-$5++	DMB-5073	Paris Gold, $5 Pays
G609-00436-++++	DMB-5073	Paris Gold, Coin Pays
G609-00437-++++	DMB-5073	Paris Gold, Coin Pays
G609-00035-$5++	DMC-5022	Double Eagle, $5 Pays
C609-00788-++++	DOL-5001	Spin For A Million, Coin Pays
G609-00556-++++	DPW-5002	Flamingo Fortune Coin Pays
G609-00122-$5++	DRA-5001	Double Dragon, $5 Pays
G609-00122-$5MI	DRA-5001	Double Dragon, $5 Pays
G609-00122-OT$5	DRA-5001	Double Dragon, $5 Pays, English/French Canadian
G609-00122-OT20	DRA-5001	Fruit-Both Ways, Ontario, $20 Pays
G609-00167-$5PG	DRA-5002	Double Dragon, $5 Pays
G609-00167-++++	DRA-5002	Double Dragon, Coin Pays
G609-00167-12MI	DRA-5002	Double Dragon, Coin Pays
G609-00167-$5++	DRA-5002	Double Dragon, Coin Pays, $5 Pays
G609-00167-OT++	DRA-5002	Double Dragon, English/French Canadian
G609-00254-++++	DT7-5001	Diamond Back, Coin Pays
C609-00254-SPMI	DT7-5001	Diamond Back, Coin Pays, Spanish
G609-00185-$10+	DT7-5001	Triple Blazing 7's Diamond Line, $10 Pays
G609-00185-$2++	DT7-5001	Triple Blazing 7's Diamond Line, $2 Pays
G609-00185-$5++	DT7-5001	Triple Blazing 7's Diamond Line, $5 Pays
G609-00185-++++	DT7-5001	Triple Blazing 7's Diamond Line, Coin Pays
G609-00185-2PRG	DT7-5001	Triple Blazing 7's Diamond Line, Coin Pays
G609-00185-MINI	DT7-5001	Triple Blazing 7's Diamond Line, Coin Pays
G609-00185-OT++	DT7-5001	Triple Blazing 7's Diamond Line, English/French Canadian
G609-00185-SP++	DT7-5001	Triple Blazing 7's Diamond Line, Spanish, Coin Pays
G609-00334-++++	DT7-5003	Triple Blazing 7's Diamond Line, Coin Pays
G609-00334-OT++	DT7-5003	Triple Blazing 7's Diamond Line, Coin Pays, Ontario
G609-00334-SP++	DT7-5003	Triple Blazing 7's Diamond Line, Spanish, Coin Pays
G609-00334-12MI	DT7-5003	Triple Blazing 7's Diamond Line, Coin Pays
G609-00117-$1++	DWA-5001	$10,000 Pyramid, $1 Only, Park Place
G609-00060-++++	DWA-5003	$10,000 Chamber, Luxor
G609-00117-$5++	DWA-5005	$50,000 Pyramid, $5 Pays, Park Place
G609-00306-50C+	DWA-5007	Pyramids $5,000, 50¢ Pays
G609-00154-$2++	DWA-5008	$25,000 Pyramid, $2 Pays
G609-00188-$5++	DWA-5009	Silver & Gold, $5 Pays
G609-00188-++++	DWA-5009	Silver & Gold, Coin Pays
G609-00188-MINI	DWA-5009	Silver & Gold, Coin Pays
G609-00188-SP++	DWA-5009	Silver & Gold, Coin Pays, Spanish
G609-00188-FC++	DWA-5009	Silver & Gold, French Canadian, Coin Pays
G609-00188-FC2$	DWA-5009	Silver & Gold, French Canadian, Coin Pays, 2$ Pays
G609-00188-FC5$	DWA-5009	Silver & Gold, French Canadian, Coin Pays, 5$ Pays
G609-00188-OT++	DWA-5009	Silver & Gold, French Canadian, Coin Pays, Ontario French Canadian
C609-00333-++++	DWA-5015	Jackpot Roundup
G609-00333-MICR	DWA-5015	Jackpot Roundup, Coin Pays
C609-00333-12MI	DWA-5015	Jackpot Roundup, Credit
G609-00324-++++	DWA-5016	Bronco Buster, Coin Pays
C609-00629-++++	DWA-5020	Goal, Coin Pays
C609-00629-FR++	DWA-5020	Goal, Coin Pays, French
C609-00629-SP++	DWA-5020	Goal, Coin Pays, Spanish
C609-00793-12MI	DWC-5003	Park Place Black Gold Look, Coin Pays
G609-00355-++++	DWN-5001	Double Jackpot Smiley, Coin Pays
G609-00355-SP++	DWN-5001	Double Jackpot Smiley, Spanish, Coin Pays
G609-00358-++++	DWN-5002	Double Jackpot Smiley, Coin Pays
G609-00358-SP++	DWN-5002	Double Jackpot Smiley, Spanish, Coin Pays
G609-00374-++++	DWN-5003	Double Dragon, Coin Pays
G609-00239-$10+	DWR-5001	Double Wild Rose, $10 Pays
C609-00239-$2++	DWR-5001	Double Wild Rose, $2 Pays
G609-00239-$5++	DWR-5001	Double Wild Rose, $5 Pays
G609-00239-12MI	DWR-5001	Double Wild Rose, Coin Pays
G609-00239-++++	DWR-5001	Double Wild Rose, Coin Pays
G609-00239-OT++	DWR-5001	Double Wild Rose, Coin Pays, French Canadian
G609-00239-FC++	DWR-5001	Double Wild Rose, Coin Pays, French Canadian/English
G609-00239-FC$5	DWR-5001	Double Wild Rose, French Canadian $5 Pays
G609-00239-FC2$	DWR-5001	Double Wild Rose, French Canadian 2$ Pays
G609-00239-OT$5	DWR-5001	Double Wild Rose, French Canadian, $5 Pays
G609-00239-SP++	DWR-5001	Double Wild Rose, Spanish, Coin Pays
G609-00266-$5++	DWR-5002	24 Karat, $5 Pays
G609-00266-$5PG	DWR-5002	24 Karat, $5 Pays
G609-00266-12MI	DWR-5002	24 Karat, Coin Pays
G609-00266-FC$5	DWR-5002	24 Karat, French Canadian/English, $5
G609-00267-$10+	DWR-5003	24 Karat, $10 Pays
G609-00267-$5++	DWR-5003	24 Karat, $5 Pays
G609-00267-++++	DWR-5003	24 Karat, Coin Pays
G609-00267-$1C+	DWR-5003	24 Karat, Coin Pays, $100 Pays

©2003 Bally Gaming and Systems

ProSlot® 6000

G609... Feature Glass (WR) (cont.)

GLASS	ART FORM	DESCRIPTION
	C609-00268-$10+	DWR-5004	24 Karat, $10 Pays
G609-00268-$20+	DWR-5004	24 Karat, $20 Pays
G609-00268-$5++	DWR-5004	24 Karat, $25 Pays, $5
G609-00268-$25+	DWR-5004	24 Karat, $25pays
G609-00341-++++	DWR-5005	24 Karat, Coin Pays
G609-00341-12MI	DWR-5005	24 Karat, Coin Pays
G609-00342-++++	DWR-5006	Wild Rose, Coin Pays
G609-00342-12MI	DWR-5006	Wild Rose, Coin Pays
G609-00342-SP++	DWR-5006	Wild Rose, Spanish, Coin Pays
G609-00343-++++	DWR-5007	Silver Lining, Coin Pays
G609-00343-12MI	DWR-5007	Silver Lining, Coin Pays
	C609-00343-SP++	DWR-5007	Silver Lining, Coin Pays, Spanish
	C609-00343-SPMI	DWR-5007	Silver Lining, Coin Pays, Spanish
	C609-00609-++++	DWR-5008	Rapid Double Jackpot, Coin Pays
	C609-00609-12MI	DWR-5008	Rapid Double Jackpot, Coin Pays
	C609-00609-SPMI	DWR-5008	Rapid Double Jackpot, Coin Pays, Spanish
	C609-C0609-12MI	DWR-5008	Rapid Double Jackpot, Credit
	C609-00611-++++	DWR-5009	Rapid Double Jackpot, Coin Pays
	C609-00611-12MI	DWR-5009	Rapid Double Jackpot, Coin Pays
	C609-00611-SPMI	DWR-5009	Rapid Double Jackpot, Coin Pays, Spanish
	C609-00776-++++	DWR-5010	Double Money, Coin Pays
	C609-00830-++++	DWR-5012	2 Times Money, Credit
	C609-C0841-++++	DWR-5013	2 Times Money, Credit
	C609-00831-++++	DWR-5014	2 Times Money, Credit
G609-00122-++++	F17-5054	Fruit-Both Ways
G609-00303-++++	F17-5060	$1 Special, Coin Pays
G609-00303-12MI	F17-5060	$1 Special, Coin Pays
	G609-00303-FC++	F17-5060	$1 Special, Coin Pays, French Canadian
	C609-00303-SP++	F17-5060	$1 Special, Spanish
	G609-00303-COIN	F17-5060	$1 Special, Coin Pays
G609-00147-++++	FAB-5046	1088 Style, Coin Pays
G609-00187-$10+	FAF-5001	Fame & Fortune, $10 Pays
G609-00187-++++	FAF-5001	Fame & Fortune, Coin Pays
G609-00197-$5++	FAF-5002	Fame & Fortune, $5 Pays
G609-00197-++++	FAF-5002	Fame & Fortune, Coin Pays
G609-00197-SP++	FAF-5002	Fame & Fortune, Coin Pays, Spanish
	G609-00002-$5++	FAI-5003	Fire & Ice, $5 Pays
G609-00002-++++	FAI-5003	Fire & Ice, Coin Pays
G609-00028-$5++	FAI-5004	Fire & Ice, $5 Pays
G609-00057-$5++	FAI-5005	Fire & Ice, $5 Pays
G609-00057-++++	FAI-5005	Fire & Ice, Coin Pays
G609-00057-HOT+	FAI-5005	Fire & Ice/Hot Slot Snipe, Coin Pays
	C609-00822-++++	FB7-5001	Famous 7's, Credit
	C609-00822-12MI	FB7-5001	Famous 7's, Credit
	C609-00823-++++	FB7-5002	Famous 7's, Credit
	C609-00823-12MI	FB7-5002	Famous 7's, Credit
G609-00080-++++	FBF-5002	Fireball, Coin Pays
G609-00080-PROG	FBF-5002	Fireball, Coin Pays
G609-00080-SP++	FBF-5002	Fireball, Spanish, Coin Pays
G609-00073-HOT+	FBF-5002	Fireball/Hot Slot Snipe, Coin Pays
G609-00115-++++	FBF-5003	Fireball, Coin Pays
G609-00155-POLR	FBF-5003	Fireball, Coin Pays, Polar Motion Light Kit
G609-00137-++++	FBF-5006	Fireball, Coin Pays
G609-00212-++++	FBF-5012	Texas 2 Step, Coin Pays
G609-00243-++++	FBF-5013	Texas 2 Step, Coin Pays
G609-00243-PORT	FBF-5013	Texas 2 Step, Portuguese, Coin Pays
G609-00184-++++	FBJ-5009	1088 Style, Coin Pays
	G609-00412-$2++	FDM-5002	Five & Dime, $2 Pays
G609-00412-++++	FDM-5002	Five & Dime, Coin Pays
G609-00413-++++	FDM-5002	Five & Dime, Coin Pays
G609-00412-12MI	FDM-5002	Five & Dime, Coin Pays
	C609-00412-SPMI	FDM-5002	Five & Dime, Coin Pays, Spanish
	C609-00412-SP++	FDM-5002	Five & Dive, Coin Pays, Spanish
	C609-C0872-++++	FFR-5001	Bonus Frenzy, Credit
G609-00017-++++	FLB-5001	Flashback, Coin Pays
G609-00017-PORT	FLB-5001	Flashback, Portuguese, Coin Pays
G609-00209-++++	FLB-5002	Wacky Winners, Coin Pays
G609-00209-12MI	FLB-5002	Wacky Winners, Coin Pays
G609-00209-SP++	FLB-5002	Wacky Winners, Spanish, Coin Pays
	C609-00209-SPMI	FLB-5002	Wacky Winners, Spanish, Coin Pays
G609-00517-++++	FLB-5003	Wild Ride, Coin Pays
	C609-00517-SP++	FLB-5003	Wild Ride, Coin Pays, Spanish
	C609-00517-SPMI	FLB-5003	Wild Ride, Coin Pays, Spanish
	C609-C0856-++++	FRF-5001	Five Times Rich, Credit
G609-00514-++++	FX7-5001	5 X 7, Coin Pays
	G609-00514-$2++	FX7-5001	5 X 7, Coin Pays, $2 Pays
G609-00514-$5++	FX7-5001	5 X 7, Coin Pays, $5 Pays
	C609-00514-SP++	FX7-5001	5 X 7, Coin Pays, Spanish
	C609-00514-SPMI	FX7-5001	5 X 7, Coin Pays, Spanish
	C609-00542-$2++	FX7-5002	5 X Pay 7's, $2 Pays
G609-00542-++++	FX7-5002	5 X Pay 7's, Coin Pays
G609-00542-12MI	FX7-5002	5 X Pay 7's, Coin Pays
	C609-00542-SPMI	FX7-5002	5 X Pay 7's, Coin Pays, Spanish
	C609-00592-PROG	GBB-5001	Wild Gold Payday, Coin
G609-00559-PROG	GBB-5003	Blondie Dagwood Sandwich, 25¢

GLASS	ART FORM	DESCRIPTION
G609-00567-PROG	GBB-5005	Meal Ticket
G609-00568-PROG	GBB-5007	Meal Ticket
	C609-00601-12MI	GBB-5008	Play The Market, Coin
G609-00048-++++	GJP-5010	Giant Jackpot, Coin Pays
G609-00048-2PRG	GJP-5010	Giant Jackpot, Coin Pays
G609-00013-++++	GSL-5001	Grand Slam, Coin Pays
G609-00051-2PRG	GSL-5002	Grand Slam, Coin Pays
G609-00066-++++	GSL-5002	Grand Slam, Coin Pays
G609-00066-12MI	GSL-5002	Grand Slam, Coin Pays
G609-00006-++++	GSL-5012	Gold Rush, Coin Pays
G609-00005-$5++	GSL-5013	Gold Rush, $5 Pays
G609-00005-++++	GSL-5013	Gold Rush, Coin Pays
G609-00005-PGMT	GSL-5013	Gold Rush, Coin Pays
G609-00096-PROG	GSL-5013	Gold Rush, Micro, Coin Pays
G609-00014-$5++	GSM-5001	Grand Slam, $5 Pays
G609-00014-++++	GSM-5001	Grand Slam, Coin Pays
G609-00014-PGMT	GSM-5001	Grand Slam, Coin Pays
G609-00015-++++	HAR-5001	Hit & Run, Coin Pays
G609-00075-++++	HAR-5002	Sir Prize, Coin Pays
G609-00126-++++	HAR-5003	Hit & Run, Coin Pays
	G609-00516-$2MI	ITM-5001	In The Money, $2 Pays
	C609-00516-$2++	ITM-5001	In The Money, $2 Pays,
G609-00516-$5++	ITM-5001	In The Money, $5 Pays
G609-00516-++++	ITM-5001	In The Money, Coin Pays
	G609-00516-12MI	ITM-5001	In The Money, Coin Pays
	G609-00516-SP++	ITM-5001	In The Money, Coin Pays, Spanish
	C609-00658-++++	ITM-5003	In The Money, Coin Pays
	C609-00659-++++	ITM-5004	In The Money, Coin Pays
	C609-C0659-$25+	ITM-5004	In The Money, Credit
G609-00319-++++	JB7-5001	Park Place Horse Shoe, Coin Pays
G609-00318-++++	JGS-5001	Park Place Horse Shoe, Coin Pays
G609-00317-++++	JM7-5001	Park Place Horse Shoe, Coin Pays
G609-00383-++++	JM7-5002	Grand Bonus 7's, Coin Pays
G609-00383-12MI	JM7-5002	Grand Bonus 7's, Coin Pays
G609-00470-$10+	JM7-5003	Paris Magnifique Bonus, $10 Pays
G609-00470-$2MI	JM7-5003	Paris Magnifique Bonus, $2 Pays
G609-00470-$5++	JM7-5003	Paris Magnifique Bonus, $5 Pays
G609-00470-12MI	JM7-5003	Paris Magnifique Bonus, Coin Pays
	G609-00470-$25+	JM7-5003	Paris Magnifique, $25 Pays
	C609-00639-++++	JM7-5006	I Love Jackpots
	C609-C0861-++++	JM7-5013	I Love Jackpots, Credit
	C609-C0857-++++	JM7-5014	Castle Of Cash, Credit
G609-00131-++++	JPO-5001	Longshot, Binion's Horseshoe, 25¢
G609-00031-++++	JQK-5003	Royal, Coin Pays
G609-00056-++++	JQK-5004	Royal, Coin Pays
	G609-00056-OT++	JQK-5004	Royal, English/French Canadian
G609-00120-++++	JQK-5005	Royal, Coin Pays
G609-00120-SP++	JQK-5005	Royal, Spanish, Coin Pays
G609-00130-++++	JQK-5006	Royal, Coin Pays
G609-00092-$5++	JQK-5007	Royal, $5 Pays
G609-00092-OT$5	JQK-5007	Royal, $5 Pays, English/French Canadian
G609-00092-++++	JQK-5007	Royal, Coin Pays
G609-00092-SP++	JQK-5007	Royal, Spanish, Coin Pays
	G609-00235-OT$5	JQK-5010	7's Coin Pays, Ontario, $5 Pays
G609-00235-$5++	JQK-5010	7's, Coin Pays
G609-00235-++++	JQK-5010	7's, Coin Pays
G609-00235-MYST	JQK-5010	7's, Coin Pays
G609-00236-++++	JQK-5010	7's, Coin Pays
G609-00235-OT++	JQK-5010	7's, Coin Pays, Ontario
G609-00236-12MI	JQK-5011	7's, Coin Pays
	G609-00236-OT++	JQK-5011	7's, English/French Canadian
G609-00065-++++	JUJ-5001	Jumpin' Joker, Coin Pays
G609-00142-++++	JUJ-5002	Bell Ringer, Coin Pays
G609-00082-PGMT	LM7-5010	Triple Red 7's, Coin Pays
G609-00016-$2++	LM7-5011	Triple Blazing 7's, $2 Pays
	G609-00016-$5++	LM7-5011	Triple Blazing 7's, $5 Pays
G609-00016-++++	LM7-5011	Triple Blazing 7's, Coin Pays
G609-00016-PROG	LM7-5011	Triple Blazing 7's, Coin Pays
G609-00085-PROG	LM7-5011	Triple Blazing 7's, Coin Pays
G609-00016-SP++	LM7-5011	Triple Blazing 7's, Coin Pays, Spanish
G609-00016-HOT+	LM7-5011	Triple Blazing 7's, Hot Slot
G609-00116-$1++	LM7-5013	Triple Blazing 7's, $1 Pays
G609-00116-$1C+	LM7-5013	Triple Blazing 7's, $100 Pays
G609-00116-$5++	LM7-5013	Triple Blazing 7's, $5 Pays
G609-00116-++++	LM7-5013	Triple Blazing 7's, Coin Pays
G609-00116-2PRG	LM7-5013	Triple Blazing 7's, Coin Pays
G609-00332-2PRG	LM7-5013	Triple Blazing 7's, Coin Pays
G609-00125-++++	LM7-5014	Triple Lightning 7's, Coin Pays
G609-00284-12MI	LM7-5014	Triple Lightning 7's, Coin Pays
G609-00284-2PRG	LM7-5014	Triple Lightning 7's, Coin Pays
	G609-00125-12MI	LM7-5014	Triple Lightning 7's, Coin Pays
G609-00125-SP++	LM7-5014	Triple Lightning 7's, Coin Pays, Spanish
G609-00182-++++	LM7-5016	Blazing Triple 7's, Coin Pays
G609-00159-$5++	LM7-5020	Blazing Triple 7's, $5 Pays
G609-00160-$5++	LM7-5021	Triple Lightning 7's, $5 Pays

©2003 Bally Gaming and Systems
| - Revised, || - New

ProSlot® 6000

G609... Feature Glass (WR) (cont.)

GLASS	ART FORM	DESCRIPTION
G609-00307-++++	LM7-5022	Blazing Triple 7's, Coin Pays
G609-00201-$25+	LM7-5027	Triple Rose, $25 Pays
G609-00201-$5++	LM7-5027	Triple Rose, $5 Pays
G609-00201-++++	LM7-5027	Triple Rose, Coin Pays
G609-00201-9DIG	LM7-5027	Triple Rose, Coin Pays
G609-00201-MINI	LM7-5027	Triple Rose, Coin Pays
G609-00201-SP++	LM7-5027	Triple Rose, Spanish, Coin Pays
G609-00202-++++	LM7-5028	Triple Rose, Coin Pays
G609-00202-MINI	LM7-5028	Triple Rose, Coin Pays
G609-00202-SP++	LM7-5028	Triple Rose, Coin Pays, Spanish
G609-00116-PROG	LM7-5103	Triple Blazing 7's, Coin Pays
G609-00173-$5++	LMN-5001	Triple Blazing 7's Nudge, $5 Pays
G609-00173-++++	LMN-5001	Triple Blazing 7's Nudge, Coin Pays
G609-00173-9DIG	LMN-5001	Triple Blazing 7's Nudge, Coin Pays
G609-00173-MINI	LMN-5001	Triple Blazing 7's Nudge, Coin Pays
|| G609-00173-FC2$	LMN-5001	Triple Blazing 7's Nudge, French Canadian 2$ Pays, Coin Pays
G609-00173-FC++	LMN-5001	Triple Blazing 7's Nudge, French Canadian, Coin Pays
G609-00173-$10+	LMN-5001	Triple Blazing 7's, $10 Pays
G609-00172-++++	LMN-5002	Triple Blazing 7's Nudge, Coin Pays
G609-00172-MINI	LMN-5002	Triple Blazing 7's Nudge, Coin Pays
G609-00172-SP++	LMN-5002	Triple Blazing 7's Nudge, Spanish, Coin Pays
G609-00388-++++	LMN-5005	Triple Blazing 7's Kilroy, Coin Pays
G609-00389-++++	LMN-5006	Triple Blazing 7's Kilroy, Coin Pays
G609-00189-$25+	LMS-5002	Black Gold Colors, $25 Pays
|| C609-00108-$25+	LMS-5005	Black Gold Colors, $25 Pays
G609-00094-$1C+	LMS-5007	Black Gold Colors, $100 Pays
|| C609-00094-1CMI	LMS-5007	Black Gold Colors, $100 Pays
G609-00042-$1C+	LMS-5010	Black Gold, $100 Pays
G609-00039-$25+	LMS-5011	$25 Park Place Jackpot Bars, Black Gold Colors
G609-00491-++++	LMX-5003	Le Jacque Pot Sevy Bar 5, Coin Pays
|| C609-00612-$5++	M75-5001	Black & White Millionaire 7's, $5 Pays
|| C609-00612-++++	M75-5001	Black & White Millionaire 7's, Coin Pays
|| C609-00606-$5++	M7D-5001	Millionaire Diamonds 7's, $5 Pays
|| C609-00606-++++	M7D-5001	Millionaire Diamonds 7's, Coin
G609-00214-$5++	MBO-5050	Harrah's Sultans Custom, $5 Pays
G609-00214-++++	MBO-5050	Harrah's Sultans Custom, Coin Pays
G609-00218-++++	MBO-5057	1088/1090, Coin Pays
G609-00077-$5++	MBV-5001	Black Velvet, $5 Pays
G609-00077-++++	MBV-5001	Black Velvet, Coin Pays
|| C609-00078-$1C+	MBV-5002	Black Velvet, $100 Pays
G609-00078-$20+	MBV-5002	Black Velvet, $20 Pays
|| C609-00078-25MI	MBV-5002	Black Velvet, $25 Pays
G609-00078-$25+	MBV-5002	Black Velvet, $25 Pays
G609-00078-FC$5	MBV-5002	Black Velvet, French Canadian, $5 Pays
G609-00088-FC++	MBV-5003	Black Velvet French Canadian, Coin Pays
G609-00088-++++	MBV-5003	Black Velvet, Coin Pay
G609-00220-$2PG	MG7-5016	Magnificent 7's, $2 Pays
G609-00220-++++	MG7-5016	Magnificent 7's, Coin Pays
|| G609-00264-$5++	MG7-5017	Blue Magnificent 7's, $5 Pays
G609-00264-++++	MG7-5017	Blue Magnificent 7's, Coin Pays
|| G609-00264-12MI	MG7-5017	Blue Magnificent 7's, Coin Pays
G609-00264-SP++	MG7-5017	Blue Magnificent 7's, Spanish, Coin Pays
G609-00217-++++	MJ7-5003	Magnificent 7's, Coin Pays
G609-00277-PROG	MJ7-5005	Blue Magnificent 7's
G609-00277-++++	MJ7-5005	Blue Magnificent 7's, Coin Pays
G609-00277-12MI	MJ7-5005	Blue Magnificent 7's, Coin Pays
G609-00277-MYST	MJ7-5005	Blue Magnificent 7's, Coin Pays
G609-00277-SP++	MJ7-5005	Blue Magnificent 7's, Spanish, Coin Pays
G609-00308-12MI	MJ7-5007	Lucky Lobster, Coin Pays
G609-00336-++++	MJ7-5008	Blazing Magnificent 7's, Coin Pays
G609-00336-12MI	MJ7-5008	Blazing Magnificent 7's, Coin Pays
G609-00336-PROG	MJ7-5008	Blazing Magnificent 7's, Coin Pays
|| G609-00336-OT++	MJ7-5008	Blazing Magnificent 7's, English/French Canadian
G609-00335-++++	MJ7-5009	Gold Pot, Coin Pays
G609-00352-12MI	MJ7-5011	Bahama Bucks, Coin Pays, Sun Atlantis
G609-00525-++++	MNB-5001	Money Bars, Coin Pays
|| C609-00525-$2++	MNB-5001	Money Bars, Coin Pays, $2 Pays
|| C609-00525-SP++	MNB-5001	Money Bars, Coin Pays, Spanish
|| C609-00525-12MI	MNB-5001	Money Bars, Credit Pays
|| C609-00604-++++	MNB-5002	Money Bars, Coin
|| C609-00604-12MI	MNB-5002	Money Bars, Coin Pays, Split Pays
|| C604-C0604-12MI	MNB-5002	Money Bars, Credit, Split Pays
G609-00104-$5++	MNC-5001	Monte Carlo, $5 Pays
G609-00104-++++	MNC-5001	Monte Carlo, Coin Pays
G609-00105-$5++	MNC-5002	Las Vegas, $5 Pays
G609-00105-++++	MNC-5002	Las Vegas, Coin Pays
|| C609-00652-12MI	MOC-5005	Jamaican Me Rich, Coin Pays, Yellow
|| C609-00653-12MI	MOC-5006	Jamaican Me Rich, Coin Pays, Yellow
|| C609-00654-12MI	MOC-5007	Jamaican Me Rich, Coin Pays, Yellow
G609-00504-++++	NE7-5001	Eiffel Tower 7's, Coin Pays
G609-00506-++++	NE7-5002	Eiffel Tower 7's, Coin Pays
G609-00485-PROG	NE7-5003	Paris Payday Any 7, Coin Pays
G609-00485-++++	NE7-5003	Paris Payday, Coin Pays
G609-00488-PROG	NE7-5004	Paris Payday Any 7, $1/Coin Pays
G609-00482-PROG	NE7-5005	Paris Payday Any 7, Coin Pays

GLASS	ART FORM	DESCRIPTION
G609-00283-++++	OTT-5001	Over The Top, Coin Pays
G609-00262-++++	OV7-5001	Blue 7's, Coin Pays
G609-00263-$5++	OV7-5002	Blue 7's, $5 Pays
G609-00263-$5MI	OV7-5002	Blue 7's, $5 Pays
G609-00263-++++	OV7-5002	Blue 7's, Coin Pays
G609-00263-12MI	OV7-5002	Blue 7's, Coin Pays
G609-00263-SP++	OV7-5002	Blue 7's, Spanish, Coin Pays
G609-00323-++++	OV7-5005	Gold Fever, Coin Pays
G609-00433-++++	OVR-5001	Count De Monee, Coin Pays
G609-00084-++++	OVR-5001	Overload, Coin Pays
G609-00469-$2++	PAW-5001	Paris Balloons, $2 Pays
G609-00469-$5++	PAW-5001	Paris Balloons, $5 Pays
|| C609-C0615-FC2M	QD7-5001	$2 Credit, French Canadian
|| C609-C0615-FC25	QD7-5001	$25 Credit, French Canadian
|| C609-C0615-FC5M	QD7-5001	$5 Credit, French Canadian
|| C609-C0615-FCMI	QD7-5001	Credit, French Canadian
| C609-00530-$25M	QD7-5002	Triple Blazing 7's Quick Hit Double Symbol, $25 Pays
|| C609-OT530-$25M	QD7-5002	Triple Blazing 7's Quick Hit Double Symbol, $25 Pays, Ontario
| C609-00530-$5MI	QD7-5002	Triple Blazing 7's Quick Hit Double Symbol, $5 Pays
|| G609-00530-$5++	QD7-5002	Triple Blazing 7's Quick Hit Double Symbol, $5 Pays
|| C609-OT530-$5++	QD7-5002	Triple Blazing 7's Quick Hit Double Symbol, $5 Pays, Ontario
|| C609-OT530-$5MI	QD7-5002	Triple Blazing 7's Quick Hit Double Symbol, $5 Pays, Ontario
|| C609-00530-25MI	QD7-5002	Triple Blazing 7's Quick Hit Double Symbol,$25 Pays
|| C609-C0531-FC5M	QD7-5003	Black & White Jackpot Quick Hit, $5 Credit, French Canadian
G609-00531-12MI	QD7-5003	Black & White Jackpot Quick Hit, Coin Pays
|| G609-00531-++++	QD7-5003	Black & White Jackpot Quick Hit, Coin Pays
|| C609-C0531-FCMI	QD7-5003	Black & White Jackpot Quick Hit, Credit, French Canadian
|| C609-00532-10MI	QD7-5004	Black & White Jackpot Quick Hit, $10 Pays
|| C609-OT532-10MI	QD7-5004	Black & White Jackpot Quick Hit, $10 Pays, Ontario
| C609-00532-$5MI	QD7-5004	Black & White Jackpot Quick Hit, $5 Pays
|| G609-00532-$5++	QD7-5004	Black & White Jackpot Quick Hit, $5 Pays
|| C609-OT532-$5++	QD7-5004	Black & White Jackpot Quick Hit, $5 Pays, Ontario
|| C609-OT532-$5MI	QD7-5004	Black & White Jackpot Quick Hit, $5 Pays, Ontario
|| C609-00814-$5++	QD7-5006	Quick Hits, Blazing 7's, Double, Coin Pays
G609-00533-++++	QDC-5001	5 X 10 Quick Hit, Coin Pays
|| C609-C0593-FC2M	QDC-5001	5 X 10 Quick Hits, $2 Pays, Credits, French Canadian
|| C609-00593-25MI	QDC-5001	5 X 10 Quick Hits, $25 Pays
|| C609-00593-++++	QDC-5001	5 X 10 Quick Hits, Coin Pays
|| G609-00593-12MI	QDC-5001	5 X 10 Quick Hits, Coin Pays
|| C609-C0593-FCMI	QDC-5001	5 X 10 Quick Hits, Credits, French Canadian
|| G609-00533-12MI	QDC-5001	Quick Hit, 5 X 10 Pays, Coin Pays
|| G609-00774-++++	QDC-5002	Quick Hits, Coin Pays, Black Gold Colors
|| C609-00774-12MI	QDC-5002	Quick Hits, Coin Pays, Black Gold Colors
G609-00594-$5MI	QDC-5003	5 X 10 Quick Hits, $5 Pays
|| C609-00535-$5MI	QDC-5003	5 X10 Quick Hit, $5 Pays
|| G609-00535-$5++	QDC-5003	5 X10 Quick Hit, $5 Pays
|| C609-00780-$25M	QDC-5004	5 X 10 Black Gold Quick Hits, $25
|| C609-00780-$5MI	QDC-5004	5 X 10 Black Gold Quick Hits, $5
G609-00537-$25M	QDC-5004	Black Gold 5 X 10 Quick Hits $25 Pays
G609-00537-$5MI	QDC-5004	Black Gold 5 X 10 Quick Hits $5 Pays
G609-00537-$5++	QDC-5004	Black Gold 5 X 10 Quick Hits, $5 Pays
|| C609-00780-$5++	QDC-5008	5 X 10 Black Gold Quick Hits, $5 Pays
|| C609-C0842-12MI	QDC-5010	Quick Hits, Credit
G609-00129-FC++	RAF-5001	Rich & Famous French Canadian, Coin Pays
G609-00129-$20+	RAF-5001	Rich & Famous, $20 Pays
G609-00129-$4++	RAF-5001	Rich & Famous, $4 Pays
G609-00129-$5++	RAF-5001	Rich & Famous, $5 Pays
G609-00129-++++	RAF-5001	Rich & Famous, Coin Pays
G609-00129-PROG	RAF-5001	Rich & Famous, Coin Pays
G609-00129-SP++	RAF-5001	Rich & Famous, Coin Pays, Spanish
G609-00111-$5++	RAF-5002	Rich & Famous, $5 Pays
G609-00111-++++	RAF-5002	Rich & Famous, Coin Pays
G609-00163-PORT	RAF-5004	Rich & Famous, $5 Pays, Portuguese
G609-00163-++++	RAF-5004	Rich & Famous, Coin Pays
G609-00163-12MI	RAF-5004	Rich & Famous, Coin Pays
G609-00163-9DIG	RAF-5004	Rich & Famous, Coin Pays
G609-00163-SP++	RAF-5004	Rich & Famous, Coin Pays, Spanish
G609-00134-++++	RAF-5006	Win with the Stars, Ann Margaret, Coin Pays
| C609-00133-++++	RAF-5006	Win with the Stars, George Burns, Coin Pays
G609-00135-++++	RAF-5006	Win with the Stars, Wayne Newton, Coin Pays
G609-00166-$4++	RAF-5009	Red Gold Custom, $4 Pays
G609-00215-$1C+	RAF-5014	Rich & Famous, English, $100 Pays
G609-00215-FC1C	RAF-5014	Rich & Famous, French Canadian, $100 Pays
G609-00296-++++	RAF-5026	Silver & Gold, Coin Pays
G609-00301-FR++	RAF-5027	Green Lion, French, Coin Pays
G609-00326-2PRG	RAF-5029	Rich & Famous
G609-00326-++++	RAF-5029	Rich & Famous, Coin Pays
G609-00327-2PRG	RAF-5030	Raven Rich & Famous
G609-00337-++++	RAF-5031	Rich & Famous Black & White, Coin Pays
G609-00362-++++	RAF-5031	Shoot & Win, Coin Pays
G609-00360-++++	RAF-5033	Kick & Win, Coin Pays
G609-00367-++++	RAF-5040	Rich & Famous, Coin Pays
G609-00384-++++	RAF-5046	Happy Joker, Coin Pays
G609-00546-++++	RAF-5050	Chicago Cityscapes, Coin Pays
G609-00546-12MI	RAF-5050	Chicago Cityscapes, Coin Pays

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlot® 6000

G609... Feature Glass (WR) (cont.)

GLASS	ART FORM	DESCRIPTION
G609-00547-++++	RAF-5052	Miami Cityscapes, Coin Pays
G609-00547-12MI	RAF-5052	Miami Cityscapes, Coin Pays
G609-00548-++++	RAF-5054	New Orleans, Cityscapes, Coin Pays
G609-00548-12MI	RAF-5054	New Orleans, Cityscapes, Coin Pays
| C609-00617-++++	RAF-5057	Memphis Blues Double, Coin Pays
| C609-00617-12MI	RAF-5057	Memphis Blues Double, Coin Pays
G609-00395-PROG	RBB-5001	Payday Rich & Famous, Coin Pays
G609-00400-PROG	RBB-5002	Payday Rich & Famous, Coin Pays
G609-00442-PROG	RBB-5004	Payday Black & Gold Generic, Coin Pays
G609-00447-PROG	RBB-5005	Payday Black & Gold Generic, Coin Pays
G609-00439-PROG	RBB-5006	Payday Black & Gold Generic, Coin Pays
G609-00452-++++	RBB-5008	Eiffel Tower 7's Black Gold, Paris Payday, Coin Pays
G609-00453-++++	RBB-5009	Eiffel Tower 7's Black Gold, Paris Payday, Coin Pays
| G609-00487-$1C+	RBB-5010	Paris Payday, Black Gold, $100 Pays
G609-00487-PROG	RBB-5010	Paris Payday, Black Gold, Coin Pays
G609-00489-PROG	RBB-5011	Paris Payday Black Gold, Coin Pays
G609-00484-++++	RBB-5012	Paris Payday Black Gold, Coin Pays
G609-00484-PROG	RBB-5012	Paris Payday Black Gold, Coin Pays
G609-00464-$1C+	RBF-5001	Custom Paris Flur De Lei, $100 Pays
G609-00151-$2++	RH7-5001	Red Hot 7's, Coin Pays
G609-00151-++++	RH7-5001	Red Hot 7's, Coin Pays
G609-00151-MINI	RH7-5001	Red Hot 7's, Coin Pays
G609-00151-$5++	RH7-5001	Red Hot 7's, $5 Pays
G609-00195-MINI	RH7-5002	Harrah's Red Hot Genies
G609-00195-PG$5	RH7-5002	Harrah's Red Hot Genies, $5 Pays
G609-00481-EGGS	RMB-5001	Faberge Egg, No Pays
| G609-00363-SAFR	RTW-5001	Roaring 20's
G609-00363-$5++	RTW-5001	Roaring 20's, $5 Pays
G609-00363-OT$5	RTW-5001	Roaring 20's, $5 Pays, English/French Canadian
G609-00363-++++	RTW-5001	Roaring 20's, Coin Pays
G609-00363-12MI	RTW-5001	Roaring 20's, Coin Pays
| G609-00363-14MI	RTW-5001	Roaring 20's, Coin Pays
G609-00363-MICR	RTW-5001	Roaring 20's, Coin Pays
| G609-00363-OT20	RTW-5001	Roaring 20's, Coin Pays, Ontario, $20 Pays
| G609-00363-OT++	RTW-5001	Roaring 20's, English/French Canadian
G609-00363-SP++	RTW-5001	Roaring 20's, Spanish, Coin Pays
G609-00363-SPPG	RTW-5001	Roaring 20's, Spanish, Coin Pays
G609-00377-++++	RTW-5002	Question Mark Game, Coin Pays
| C609-00377-SPMI	RTW-5002	Question Mark Game, Coin Pays, Spanish
| C609-00377-SP++	RTW-5002	Question Mark Game, Coin Pays, Spanish
G609-00377-SAFR	RTW-5002	Question Mark Game, South Africa, Coin Pays
G609-00515-++++	RTW-5004	Swing Time, Coin Pays
| C609-00515-SP++	RTW-5004	Swing Time, Coin Pays, Spanish
G609-00468-++++	RTW-5009	Y2k Bug, Coin Pays
| G609-00468-$1C+	RTW-5009	Y2k Bug, Coin Pays, $100
| G609-00518-$5++	RTW-5012	Krazy Kops, $5 Pays
G609-00518-++++	RTW-5012	Krazy Kops, Coin Pays
| G609-00518-SP++	RTW-5012	Krazy Kops, Coin Pays, Spanish
| G609-00518-SPMI	RTW-5012	Krazy Kops, Coin Pays, Spanish
G609-00541-++++	RTW-5013	Roaring 20's, Coin Pays
| C609-00785-$5++	RTW-5023	At The Hop, $5 Pays Credits, English
| C609-00785-SP++	RTW-5023	At The Hop, Coin Pays, Spanish
| C609-00785-SPMI	RTW-5023	At The Hop, Coin Pays, Spanish
| C609-C0785-12MI	RTW-5023	At The Hop, Credit
| C609-00785-++++	RTW-5023	At The Hop, Credit Pays
| C609-00571-++++	RTW-5026	Millionaire 7's Coin
| C609-00577-++++	RTW-5026	Millionaire 7's, Coin Pays
G609-00569-++++	RTW-5026	Millionaire 7's, Coin Pays
| C609-00587-++++	RTW-5028	Millionaire 7's Coin
| C609-00610-$5++	RTW-5031	Millionaire 7's, $5 Pays
| C609-C0878-++++	RTW-5035	Cash For Life, OLGC, Credit
| G609-00003-$10+	SAB-5005	Stars & Bars, $10 Pays
G609-00003-$2++	SAB-5005	Stars & Bars, $2 Pays
G609-00003-$5++	SAB-5005	Stars & Bars, $5 Pays
| G609-00003-++++	SAB-5005	Stars & Bars, Coin Pays
| G609-00003-PROG	SAB-5005	Stars & Bars, Coin Pays
G609-00050-2PRG	SAB-5005	Stars & Bars, Coin Pays
G609-00064-++++	SAB-5006	Stars & Bars, Coin Pays
G609-00020-$5++	SAB-5009	Stars & Bars, $5 Pays
G609-00020-++++	SAB-5009	Stars & Bars, Coin Pays
G609-00058-$25+	SAB-5017	Stars & Bars, $25 Pays
G609-00058-$5++	SAB-5017	Stars & Bars, $5 Pays
G609-00058-++++	SAB-5017	Stars & Bars, Coin Pays
G609-00058-PROG	SAB-5017	Stars & Bars, Coin Pays
| G609-00058-SP++	SAB-5017	Stars & Bars, Coin Pays, Spanish
G609-00059-++++	SAB-5018	Stars & Bars, Coin Pays
G609-00510-++++	SAB-5019	Stars & Bars, Coin Pays
G609-00071-++++	SAB-5020	Stars & Bars, Coin Pays
G609-00071-SP++	SAB-5020	Stars & Bars, Spanish, Coin Pays
G609-00091-++++	SAB-5021	Stars & Bars, Coin Pays
G609-00069-$5++	SAB-5022	Stars & Bars, Coin Pays
G609-00069-++++	SAB-5022	Stars & Bars, Coin Pays
G609-00299-12MI	SAB-5032	Hilton Laser 7's, Coin Pays
G609-00399-PROG	SBB-5001	Payday, Blazing 7's, Coin Pays
G609-00396-PROG	SBB-5002	Payday, Blazing 7's, Coin Pays

GLASS	ART FORM	DESCRIPTION
G609-00445-PROG	SBB-5004	Payday, Blazing 7's Generic, Coin Pays
G609-00446-PROG	SBB-5005	Payday, Blazing 7's Generic, Coin Pays
G609-00438-PROG	SBB-5006	Payday, Blazing 7's Generic, Coin Pays
G609-00454-++++	SBB-5007	Eiffel Tower 7's, Paris Payday, Coin Pays
G609-00455-++++	SBB-5008	Eiffel Tower Blazing 7's, Paris Payday, Coin Pays
G609-00486-PROG	SBB-5009	Paris Payday Blazing 7's, Coin Pays
G609-00490-PROG	SBB-5010	Paris Payday Blazing 7's, Coin Pays
G609-00483-PROG	SBB-5011	Paris Payday Blazing 7's, Coin Pays
G609-00507-++++	SBB-5012	Can Can Quarters, Coin Pays
G609-00171-$2++	SBW-5001	Stars & Bars Wild Diamond, $2 Pays
G609-00171-$5++	SBW-5001	Stars & Bars Wild Diamond, $5 Pays
G609-00171-$5MI	SBW-5001	Stars & Bars Wild Diamond, $5 Pays
G609-00171-++++	SBW-5001	Stars & Bars, Wild Diamonds, Coin Pays
G609-00169-SP++	SBW-5002	Stars & Bars Wild Diamonds, Spanish, Coin Pays
G609-00169-12MI	SBW-5002	Stars & Bars, Wild Diamond, Coin Pays
G609-00169-9DIG	SBW-5002	Stars & Bars, Wild Diamond, Coin Pays
G609-00169-SPPG	SBW-5002	Stars & Bars, Wild Diamond, Spanish, Coin Pays
G609-00169-++++	SBW-5002	Stars & Bars, Wild Diamonds, Coin Pays
G609-00496-++++	SBX-5009	Le Jacque Pot Sevy, Stars & Bars, Coin Pays
G609-00511-++++	SCC-5001	Can Can Quarters, Coin Pays
| C609-00613-++++	SCC-5002	Leprechauns, Coin Pays
| C609-00613-SP++	SCC-5002	Leprechauns, Spanish, Coin Pays
| C609-00613-SPMI	SCC-5002	Leprechauns, Spanish, Coin Pays
| G609-00519-SP++	SCC-5003	Lucky Game, Coin Pays, Spanish
| C609-C0875-12MI	SNF-5001	Saturday Night Frenzy, $10,000 Credit
| C609-C0875-12MI	SNF-5002	Saturday Night Frenzy, $10,000 Credit
G609-00313-++++	STR-5001	Blue Streak, Coin Pays
G609-00313-12MI	STR-5001	Blue Streak, Coin Pays
G609-00049-++++	SUC-5012	Super Continental, Coin Pays
G609-00049-2PRG	SUC-5012	Super Continental, Coin Pays
G609-00157-++++	SVN-5001	7's, Coin Pays
| G609-00157-OT++	SVN-5001	7's, English/French Canadian
G609-00144-++++	SVN-5002	7's, Coin Pays
G609-00224-++++	SVN-5003	Bars, Coin Pays
G609-00233-++++	SVN-5004	Bars, Coin Pays
G609-00265-$5++	SWB-5027	Jackpot Eruption, $5 Pays
G609-00106-++++	SWB-5027	Jackpot Eruption, Coin Pays
G609-00074-++++	SWB-5032	T-Rex, Coin Pays
G609-00316-++++	SWB-5036	T-Rex, Coin Pays
G609-00107-++++	SWR-5001	Instant Repay, Coin Pays
G609-00401-PROG	TBB-5001	Payday Stars & Bars, Coin Pays
G609-00397-PROG	TBB-5002	Payday , Stars & Bars, Coin Pays
G609-00448-PROG	TBB-5004	Payday Stars & Bars Generic, Coin Pays
G609-00443-PROG	TBB-5005	Payday Stars & Bars Generic, Coin Pays
G609-00440-PROG	TBB-5006	Payday Stars & Bars Generic, Coin Pays
| C609-00820-++++	TFR-5001	Bonus Time Frenzy, Credit
G609-00203-$25+	TGD-5001	Triple Gold, $5 Pays
G609-00203-$5++	TGD-5001	Triple Gold, $5 Pays
G609-00203-++++	TGD-5001	Triple Gold, Coin Pays
G609-00205-MYST	TGD-5002	Triple Gold
G609-00205-$5++	TGD-5002	Triple Gold, $5 Pays
G609-00205-$25+	TGD-5002	Triple Gold, $5 Pays,$25 Pays
G609-00205-++++	TGD-5002	Triple Gold, Coin Pays
G609-00205-MINI	TGD-5002	Triple Gold, Coin Pays
G609-00205-PORT	TGD-5002	Triple Gold, Portuguese, Coin Pays
G609-00205-SP++	TGD-5002	Triple Gold, Spanish, Coin Pays
G609-00221-$5++	TGD-5003	Hockey Hat Trick, $5 Pays
G609-00221-++++	TGD-5003	Hockey Hat Trick, Coin Pays
G609-00221-PORT	TGD-5003	Hockey Hat Trick, Portuguese, Coin Pays
G609-00222-MINI	TGD-5003	UFO, Coin Pays
G609-00274-MINI	TGD-5005	Hilton Triple Launch, Coin Pays
G609-00203-$1C+	TGD-5009	Triple Gold, $100 Pays
| C609-C0840-$5++	TGD-5010	Triple Money, Credit
| C609-C0840-++++	TGD-5010	Triple Money, Credit
| C609-00826-$5++	TGD-5011	Triple Money, Credit
| C609-00826-++++	TGD-5011	Triple Money, Credit
| C609-00833-++++	TGD-5014	Triple Money, Credit
G609-00149-++++	THB-5001	Thunderbolt, Coin Pays
G609-00149-2PRG	THB-5001	Thunderbolt, Coin Pays
G609-00149-PGMT	THB-5001	Thunderbolt, Coin Pays
G609-00149-PROG	THB-5001	Thunderbolt, Coin Pays
G609-00158-++++	THB-5002	Thunderbolt, Coin Pays
G609-00229-$2++	TM7-5001	Triple Blazing 7's Triple, $2 Pays
G609-00229-++++	TM7-5001	Triple Blazing 7's Triple, Coin Pays
G609-00229-SP++	TM7-5001	Triple Blazing 7's Triple, Spanish, Coin Pays
G609-00234-PORT	TM7-5002	Triple Blazing 7's Triple Symbol, Portuguese, Coin Pays
G609-00234-SP++	TM7-5002	Triple Blazing 7's Triple Symbol, Spanish, Coin Pays
G609-00234-++++	TM7-5002	Triple Blazing 7's Triple, Coin Pays
G609-00234-12MI	TM7-5002	Triple Blazing 7's Triple, Coin Pays
G609-00234-FC++	TM7-5002	Triple Blazing 7's Triple, French Canadian, Coin Pays
| C609-C0881-++++	TM7-5003	Triple Money, Credit
| C609-00827-++++	TM7-5004	Triple Money, Credit
| C609-C0867-++++	TOD-5015	Quarter Millions, Credit
| C609-00597-++++	TOP-5001	Tower Of Power, Coin Pays
| C609-00618-++++	TOP-5001	Tower Of Power, Coin Pays

©2003 Bally Gaming and Systems

| - Revised, || - New

G609... Feature Glass (WR) (cont.)

	GLASS	ART FORM	DESCRIPTION
||	C609-00619-++++	TOP-5002	Tower Of Power, Coin Pays
||	C609-00598-++++	TOP-5002	Tower Of Power, Coin Pays
||	C609-00619-SP++	TOP-5002	Tower Of Power, Coin Pays, Spanish
||	C609-00623-++++	TOP-5005	Black & White, Tower Of Power, Coin Pays
||	C609-00624-++++	TOP-5007	Diamonds, Tower Of Power, Coin Pays
||	C609-00630-++++	TOP-5009	Tower Of Power, Blazing 7's, Coin Pays
||	C609-00630-FC++	TOP-5009	Tower Of Power, French Canadian
||	C609-00630-FR++	TOP-5009	Tower Of Power, French, Coin Pays
||	C609-00631-++++	TOP-5011	Tower Of Power, Black & White, Coin Pays
||	C609-00631-FR++	TOP-5011	Tower Of Power, Black & White, French, Coin Pays
||	C609-00632-++++	TOP-5013	Tower Of Power, Diamonds, Coin Pays
||	C609-00632-FR++	TOP-5013	Tower Of Power, Diamonds, French, Coin Pays
||	C609-00837-$5++	TR7-5001	Fabulous 7's (Flag) Credit
||	C609-C0880-++++	TR7-5002	Fabulous 7's, Credit
||	C609-C0880-12MI	TR7-5002	Fabulous 7's, Credit
||	C609-00834-++++	TR7-5003	Fabulous 7's
||	C609-00628-++++	TRB-5001	Triple Winner, Coin Pays
||	C609-00628-SP++	TRB-5001	Triple Winner, Coin Pays, Spanish
||	C609-00628-SPMI	TRB-5001	Triple Winner, Coin Pays, Spanish
||	C609-00821-++++	TRF-5002	Pool Ball Frenzy, Credit
	G609-00354-++++	WB7-5001	Wild Four 7
	G609-00001-$5++	WB7-5005	Harrah's Open Sesame, $5 Pays
	G609-00001-++++	WB7-5005	Harrah's Open Sesame, Coin Pays
	G609-00001-PROG	WB7-5005	Harrah's Open Sesame, Coin Pays
||	C609-00573-++++	WB7-5009	Born To Boop Tournament, Coin Pays
||	C609-00596-++++	WB7-5010	Blondie Tournament, Coin Pays
||	C609-00622-++++	WB7-5011	Popeye Tournament, Coin Pays
||	C609-00778-++++	WB7-5012	Frankie & Annette
||	C609-00779-++++	WB7-5013	Playboy Tournament, Coin Pays
	G609-00036-$5++	WBC-5001	American Eagle, $5 Pays
	G609-00279-++++	WBO-5020	Black Velvet, Coin Pays
	G609-00004-$5++	WFC-5001	Firecracker, $5 Pays
	G609-00004-++++	WFC-5001	Firecracker, Coin Pays
	G609-00004-PGMT	WFC-5001	Firecracker, Coin Pays
	G609-00004-PROG	WFC-5001	Firecracker, Coin Pays
	G609-00004-SP++	WFC-5001	Firecracker, Spanish, Coin Pays
	G609-00055-$10+	WHL-5001	White Lightning, $10 Pays
	G609-00055-$25+	WHL-5001	White Lightning, $25 Pays
	G609-00055-$5++	WHL-5001	White Lightning, $5 Pays
	G609-00055-++++	WHL-5001	White Lightning, Coin Pays
	G609-00055-MYST	WHL-5001	White Lightning, Coin Pays
	G609-00083-FC25	WHL-5002	White Lightning French Canadian, $25 Pays
	G609-00083-$20+	WHL-5002	White Lightning, $20 Pays
	G609-00083-$25+	WHL-5002	White Lightning, $25 Pays
	G609-00083-$5++	WHL-5002	White Lightning, $5 Pays
	G609-00076-$1C+	WHL-5003	White Lightning, $100 Pays
	G609-00076-$25+	WHL-5003	White Lightning, $25 Pays
	G609-00076-$5++	WHL-5003	White Lightning, $5 Pays
	G609-00076-++++	WHL-5003	White Lightning, Coin Pays
|	C609-00109-$1C+	WHL-5004	White Lightning, $100 Pays
||	G609-00110-$5++	WHL-5005	Treasure Glass, $5 Pays
	G609-00110-++++	WHL-5005	White Lightning, Coin Pays
	G609-00181-++++	WHL-5006	White Lightning, Coin Pays
	G609-00124-$1C+	WHL-5009	White Lightning, $100 Pays
	G609-00043-$1C+	WLI-5025	Black Gold, $100 Pays
	G609-00063-$25+	WLI-5027	White Gold, $25 Pays
	G609-00063-$5++	WLI-5027	White Gold, $5 Pays
	G609-00063-$5PG	WLI-5027	White Gold, $5 Pays
	G609-00063-++++	WLI-5027	White Gold, Coin Pays
||	C609-00019-$10+	WLI-5028	Black Gold, $10 Pays
	G609-00019-$100	WLI-5028	Black Gold, $100 Pays
	G609-00019-$2++	WLI-5028	Black Gold, $2 Pays
	G609-00019-$25+	WLI-5028	Black Gold, $25 Pays
	G609-00019-$5++	WLI-5028	Black Gold, $5 Pays
	G609-00019-$5PG	WLI-5028	Black Gold, $5 Pays
	G609-00019-5MIR	WLI-5028	Black Gold, $5 Pays
	G609-00019-++++	WLI-5028	Black Gold, Coin Pays
	G609-00019-PROG	WLI-5028	Black Gold, Coin Pays
||	G609-00019-FC$2	WLI-5028	Black Gold, French Canadian, $2 Pays
	G609-00019-FC++	WLI-5028	Black Gold, French Canadian/English, Coin Pays
	G609-00061-++++	WLI-5029	Pharaoh's Treasures Luxor, Coin Pays
	G609-00061-PROG	WLI-5029	Pharaoh's Treasures Luxor, Coin Pays
	G609-00119-$5++	WLI-5030	White Gold, $5 Pays, Jackpot Bars
	G609-00180-$10+	WLI-5034	Wild Rose, $10 Pays
	G609-00180-$XMI	WLI-5034	Wild Rose, $10 Pays
	G609-00180-$25+	WLI-5034	Wild Rose, $25 Pays
	G609-00180-25MI	WLI-5034	Wild Rose, $25 Pays
||	C609-00180-$5MI	WLI-5034	Wild Rose, $5 Pays
	G609-00180-$5++	WLI-5034	Wild Rose, $5 Pays
	G609-00180-++++	WLI-5034	Wild Rose, $5 Pays
	G609-00198-$5PG	WLI-5036	Purple Sheraton Gold, $5 Pays
	G609-00196-$5PG	WLI-5036	Sheraton Gold, $5 Pays
	G609-00349-12MI	WLI-5038	Black Gold, Coin Pays
	G609-00349-++++	WLI-5038	Black Gold, Coin Pays
	G609-00349-$10+	WLI-5038	Black Gold, $10 Pays

	GLASS	ART FORM	DESCRIPTION
||	C609-00349-$25+	WLI-5038	Black Gold, $25 Pays
	G609-00349-$5++	WLI-5038	Black Gold, $5 Pays
	G609-00021-$10+	WMB-5001	Black Gold, $10 Pays
	G609-00021-$25+	WMB-5001	Black Gold, $25 Pays
	G609-00021-$5++	WMB-5001	Black Gold, $5 Pays
	G609-00021-$5PG	WMB-5001	Black Gold, $5 Pays
	G609-00021-5MIR	WMB-5001	Black Gold, $5 Pays
	G609-00021-++++	WMB-5001	Black Gold, Coin Pays
	G609-00021-FC$5	WMB-5001	Black Gold, French Canadian, $5 Pays
	G609-00021-FC++	WMB-5001	Black Gold, French Canadian/English, Coin Pays
	G609-00534-$5++	WMB-5018	Bally, Black Gold, $5 Pays
||	G609-00502-PROG	WMS-5001	Fun 5's
	G609-00502-$5++	WMS-5001	Fun 5's, $5 Pays
	G609-00509-$5++	WMS-5003	Paris Fun $5
	G609-00513-$5++	WMS-5003	Paris Fun 5's, Coin Pays
	G609-00356-++++	WRN-5001	Wild Smiley, Coin Pays
	G609-00359-++++	WRN-5002	Wild Smiley, Coin Pays
	G609-00382-++++	WRN-5003	Double Dragon, Coin Pays
	G609-00145-$1C+	WRO-5001	Wild Rose, $100 Pays
	G609-00145-$20+	WRO-5001	Wild Rose, $20 Pays
	G609-00145-$5++	WRO-5001	Wild Rose, $5 Pays
	G609-00145-++++	WRO-5001	Wild Rose, Coin Pays
	G609-00145-9DIG	WRO-5001	Wild Rose, Coin Pays
	G609-00145-MINI	WRO-5001	Wild Rose, Coin Pays
||	G609-00145-FC$2	WRO-5001	Wild Rose, Coin Pays, French Canadian, $2 Pays
	G609-00178-++++	WRO-5002	Wild Rose, Coin Pays
	G609-00178-MYST	WRO-5002	Wild Rose, Coin Pays
	G609-00178-FC++	WRO-5002	Wild Rose, Coin Pays, French Canadian
||	C609-00179-$25+	WRO-5003	Black & Gold, $25 Pays
	G609-00179-$20+	WRO-5003	Black Gold, $20 Pays
	G609-00179-$5++	WRO-5003	Black Gold, $5 Pays
	G609-00179-++++	WRO-5003	Black Gold, Coin Pays
	G609-00179-MINI	WRO-5003	Black Gold, Coin Pays
	G609-00200-++++	WRO-5006	Black Velvet, Coin Pays
	G609-00200-MINI	WRO-5006	Black Velvet, Coin Pays
	G609-00305-++++	WRO-5007	Wild Rose, Coin Pays
	G609-00191-$1C+	WRO-5008	$100 Wild Rose
	G609-00191-$1FC	WRO-5008	$100 Wild Rose, French Canadian
|	C609-00192-$25+	WRO-5009	$25 Wild Rose
|	C609-00193-$10+	WRO-5010	$10 Wild Rose
	G609-00194-$25+	WRO-5011	$25 Wild Rose
	G609-00211-MINI	WRO-5013	Silver & Bold, Coin Pays
	G609-00211-$5++	WRO-5013	Silver & Gold, $5 Pays
	G609-00211-++++	WRO-5013	Silver & Gold, Coin Pays
	G609-00211-SP++	WRO-5013	Silver & Gold, Spanish, Coin Pays
	G609-00225-++++	WRO-5019	Sweet Heart, Coin Pays
	G609-00225-SP++	WRO-5019	Sweet Heart, Spanish, Coin Pays
	G609-00240-++++	WRO-5021	Wild Rose, Coin Pays
	G609-00240-SP++	WRO-5021	Wild Rose, Spanish, Coin Pays
	G609-00241-++++	WRO-5022	Wild Rose, Coin Pays
||	G609-00269-$5PG	WRO-5026	$5 Pays
|	C609-00269-$5++	WRO-5026	24 Karat Double Symbol, $5 Pays
	G609-00270-$10+	WRO-5027	24 Karat Double Symbol, $10 Pays
	G609-00270-$5++	WRO-5027	24 Karat Double Symbol, $5 Pays
	G609-00271-$25+	WRO-5028	24 Karat Double Symbol, $25 Pays
	G609-00271-$5++	WRO-5028	24 Karat Double Symbol,$5 Pay
	G609-00272-$1C+	WRO-5029	24 Karat Double Symbol, $100 Pays
||	C609-00272-1CMI	WRO-5029	24 Karat Double Symbol, $100 Pays
||	C609-00272-$20+	WRO-5029	24 Karat Double Symbol, $20 Pays
	G609-00272-$5++	WRO-5029	24 Karat Double Symbol, $5 Pays
	G609-00272-$5MI	WRO-5029	24 Karat Double Symbol, $5 Pays
	G609-00300-12MI	WRO-5031	Hilton Wild Comet, Coin Pays
	G609-00315-++++	WRO-5032	Black Gold, Coin Pays
	G609-00347-++++	WRO-5033	24 Karat, Coin Pays
	G609-00347-12MI	WRO-5033	24 Karat, Coin Pays
||	C609-00347-$5MI	WRO-5033	24 Karat, Credit, $5 Pays
	G609-00368-++++	WRO-5034	Wild Rose, Coin Pays
	G609-00371-$5++	WRO-5035	Black Gold, $5 Pays
	G609-00371-++++	WRO-5035	Black Gold, Coin Pays
||	C609-00795-SP++	WRO-5036	Wild Money, Spanish, Coin Pays
||	C609-C0839-$5++	WRO-5038	Wild Money, Credit
||	C609-00634-++++	WTS-5003	Wild Times
||	C609-00796-++++	WTS-5008	Blues Brothers, Credit Pays
||	C609-00786-LIBE	WTS-5009	Liberace, Credits Pays
||	C609-C0874-12MI	WTS-5022	Blues Brothers, Credit
	G609-00231-$2++	WWB-5002	Diamonds & Roses, $2 Pays
	G609-00231-$5++	WWB-5002	Diamonds & Roses, $5 Pays
	G609-00231-++++	WWB-5002	Diamonds & Roses, Coin Pays
	G609-00257-++++	WWB-5003	Diamond & Roses 3c, Coin Pays
	G609-00297-++++	WWB-5005	Diamonds & Roses, Coin Pays
	G609-00298-++++	WWB-5006	Diamonds & Roses, Coin Pays
||	C609-00551-SPMI	ZDM-5001	Bonus Line, Coin Pays, Spanish
||	C609-00551-++++	ZDM-5001	Bonus Live Coin
|	G609-00551-SP++	ZDM-5001	Bonus Live Coin Pays, Spanish
||	C609-00551-12MI	ZDM-5001	Bonus Live, Coin Pays

©2003 Bally Gaming and Systems

ProSlot® 6000

G692... Feature Glass (WTE Cabinet with Speakers)

GLASS	ART FORM	DESCRIPTION
C692-00072-FR++	BDM-5009	Boop, Triple Play, Coin Pays, French
C692-00013-2SPC	BDO-5002	Blazing Dollars, Credit Pays
C692-00017-++++	BF3-5001	Money Frenzy, Credit Pays
C692-00034-++++	BFR-5001	Bonus Frenzy, Coin Pays
C692-C0034-12MI	BFR-5002	Bonus Frenzy, Credit Pays
C692-00033-++++	BFR-5002	Winning For Dummies, Coin Pays
C692-C0034-$2++	BFR-5003	Bonus Frenzy, Credit Pays, $2
C692-00015-++++	BFR-5003	Triple Bonus Frenzy, Coin Pays
C692-00033-FR++	BFR-5003	Winning For Dummies, Coin Pays, French
C692-00034-FR++	BFR-5004	Bonus Frenzy, Coin Pays, French
C692-C0015-$2++	BFR-5004	Triple Bonus Frenzy, Credit Pays, $2
C692-00015-FR++	BFR-5005	Triple Bonus Frenzy, Coin Pays, French
C692-00016-++++	BFR-5006	5x Bonus Frenzy, Coin Pays
C692-C0129-++++	BFR-5006	5x Bonus Frenzy, Credit Pays
C692-C0129-$2++	BFR-5006	5x Bonus Frenzy, Credit Pays, $2
C692-00025-++++	BFR-5007	Bonus Frenzy, Credit Pays
C692-00018-$5++	BFR-5008	$5 Bonus Frenzy, Coin Pays
C692-00004-++++	BFR-5010	Richie Rich, Credit Pays
C692-C0159-++++	BFR-5011	Andy Capp, Credit Pays
C692-00004-FR++	BFR-5011	Richie Rich, Coin Pays, French
C692-00065-FR++	BFR-5012	Blondie Frenzy, Coin Pays, French
C692-C0147-++++	BFR-5020	Fireball Frenzy, Credit Pays
C692-00104-FR++	BFR-5021	Blondie Frenzy, Coin Pays, French
C692-00104-FRMI	BFR-5021	Blondie Frenzy, Coin Pays, French
C692-C0149-++++	BFR-5022	Scatter Frenzy, Credit Pays
C692-00116-++++	BFR-5025	SNL Frenzy, Credit Pays
C692-00116-12MI	BFR-5025	SNL Frenzy, Credit Pays
C692-C0121-++++	BL4-5001	Blazing 7's, 4 Reel, Credit Pays, 25¢
C692-C0121-12MI	BL4-5001	Blazing 7's, 4 Reel, Credit Pays, 25¢
C692-00125-FRMI	BL4-5001	Blazing 7's, Coin Pays, French
C692-00012-++++	BL4-5002	Blazing 7's, 4 Reel, Credit Pays
C692-00064-FR++	BL4-5003	Blazing 7's, 4 Reel, Coin Pays, French
C692-00005-12MI	BL4-5003	Blazing 7's, 4 Reel, Credit Pays
C692-00012-12MI	BL4-5003	Blazing 7's, 4 Reel, Credit Pays
C692-00097-$5MI	BL7-5007	Blazing 7's, Credit Pays
C692-C0097-12MI	BL7-5007	Blazing 7's, Credit Pays, $5
C692-00074-++++	BL7-5026	Blazing 7's, Coin Pays
C692-00074-PGMT	BL7-5027	Blazing 7's, Coin Pays
C692-C0074-$2MI	BL7-5028	Blazing 7's Credit Pays, $2
C692-C0074-$5MI	BL7-5029	Blazing 7's Credit Pays, $5
C692-C0160-12MI	BL7-5052	Blazing 7's, Credit Pays
C692-C0126-12MI	BL7-5053	Blazing 7's, Credit Pays
C692-00085-$214	BL7-5059	Blazing 7's, MGM, Coin Pays, $2
C692-00085-$514	BL7-5059	Blazing 7's, MGM, Coin Pays, $5
C692-C0126-12MI	BL7-5062	Blazing 7's, Credit Pays
C692-C0122-12MI	BL7-5062	Blazing 7's, Credit Pays
C692-00080-2SPC	BLD-5001	Blazing 7's, Double
C692-C0080-12MI	BLD-5001	Blazing 7's, Double, Credit Pay
C692-C0153-2SPC	BLD-5003	Black & White, Credit Pays
C692-00081-++++	BLD-5004	Blazing 7's, Double, Coin Pays
C692-C0081-12MI	BLD-5004	Blazing 7's, Double, Credit Pay
C692-00112-++++	BLF-5003	Blazing 7's Deluxe, Credit Pays
C692-C0154-12MI	BM7-5027	Red Hot Blazing 7's, Credit Pays
C692-00086-++++	BM7-5032	Golden Nugget Flaming 7's, Coin Pay
C692-00062-++++	BNT-5001	Bonus Times, Coin Pays
C692-C0062-$2++	BNT-5002	Bonus Times, Credit Pays, $2
C692-00028-FR++	BNT-5003	Bonus Times, Coin Pays, French
C692-00028-++++	BNT-5003	Bonus Times, Credit Pays
C692-C0062-$5++	BNT-5003	Bonus Times, Credit Pays, $5
C692-00073-FR++	BQM-5009	Betty Boop Question Mark, Coin Pays, French
C692-C0120-++++	BS7-5001	Super Scatter, Blazing 7's, Credit Pays
C692-00014-12MI	BS7-5002	Blazing 7's Scatter, Credit Pays
C692-C0120-12MI	BS7-5002	Super Scatter, Blazing 7's, Credit Pays
C692-00035-PROG	BS7-5003	Betty Boop Scatter, Credit Pays
C692-C0014-$2MI	BS7-5003	Blazing 7's Scatter, Credit Pays, $2
C692-00120-FR++	BS7-5003	Super Scatter, Blazing 7's, Coin Pays, French
C692-00032-PROG	BS7-5006	Blondie Scatter, Credit Pays
C692-00069-FR++	BS7-5014	Blondie Super Scatter, Coin Pays, French
C692-00077-FR++	BUB-5028	Color Bars, Coin Pays, French
C692-C0144-++++	BUY-5001	Thousands, Credit Pays
C692-00026-PROG	BWT-5003	World Tour
C692-00031-PROG	BWT-5008	Dagwood's Big Bonus
C692-00071-FR++	BWT-5011	Betty Boop World Tour, Coin Pays, French
C692-C0166-++++	BWT-5019	Frankie & Annette, Credit Pays
C692-00093-++++	BWW-5001	Black & White, Pound Pays, United Kingdom
C692-C0172-PROG	DBB-5005	Payday, Black & White, Credit Pays
C692-C0139-12MI	DBF-5001	Double Jackpots, Popeye, Credit Pays
C692-C0140-12MI	DBF-5002	Double Jackpots, Betty Boop, Credit Pays
C692-C0141-12MI	DBF-5003	Double Jackpots, Blondie, Credit Pays
C692-00084-++++	DC5-5010	Black & White, Coin Pays
C692-00074-FR++	DC5-5010	Black & White, Coin Pays, French
C692-C0084-++++	DC5-5010	Black & White, Credit Pays
C692-00021-++++	DC5-5013	5x Money, Credit Pays

GLASS	ART FORM	DESCRIPTION
C692-00042-++++	DC5-5071	5x Money, Credit Pays
C692-C0181-++++	DCM-5052	Blazing 7's, Cherries, Credit Pays
C692-C0183-++++	DCM-5070	Double Money, Credit Pays
C692-00019-FR++	DCM-5071	Double Money, Coin Pays, French
C692-00019-++++	DCM-5071	Double Money, Credit Pays
C692-00044-++++	DCM-5072	Double Money, Credits Pay
C692-C0128-$2++	DCM5073	Double Money, Credit Pays
C692-00124-FR++	DCM-5073	Double Money, Coin Pays, French
C692-C0128-++++	DCM-5073	Double Money, Credit Pays
C692-00049-++++	DCM-5074	Double $, Credit Pays
C692-00029-++++	DCM-5075	California Dreamin', United Kingdom
C692-00038-++++	DCM-5075	California Dreamin', United Kingdom , Pound Pays
C692-00051-++++	DCM-5076	5 Times 10 Times Money, Credit Pays
C692-00052-++++	DCM-5077	5 Times 10 Times Money, Credit Pays
C692-00053-++++	DCM-5078	5 Times 10 Times Money, Credit Pays
C692-00101-++++	DCM-5078	5 Times 10 Times Money, Credit Pays
C692-00054-++++	DCM-5079	5 Times 10 Times Money, Credit Pays
C692-00103-++++	DCM-5079	5 Times 10 Times Money, Credit Pays
C692-00055-++++	DCM-5080	5 Times 10 Times Money, Credit Pays
C692-00102-++++	DCM-5080	5 Times 10 Times Money, Credit Pays
C692-00039-++++	DCM-5081	Double Money, United Kingdom , Pound Pays
C692-00039-++++	DCM-5082	Double Money, United Kingdom , Pound Pays
C692-00039-++++	DCM-5083	Double Money, United Kingdom , Pound Pays
C692-00038-++++	DCM-5084	California Dreamin', United Kingdom , Pound Pays
C692-00038-++++	DCM-5085	California Dreamin', United Kingdom , Pound Pays
C692-00076-FR++	DD8-5001	2x-4x-8x, Coin Pays, French
C692-C0076-++++	DD8-5001	2x-4x-8x, Credit Pays
C692-C0155-++++	DD8-5002	Hot Lines, Credit Pays
C692-C0184-++++	DD8-5004	2x-3x-5x, Hot Lines, Credit Pays
C692-00002-FR++	DD8-5005	Winning Times, Coin Pay, French
C692-00067-FR++	DD8-5005	Winning Times, Coin Pay, French
C692-00002-++++	DD8-5005	Winning Times, Credits Pay
C692-00003-++++	DD8-5006	Winning Times, Blazing 7's, Credit Pays
C692-00066-FR++	DD8-5007	Conway & Korman, Coin Pays, French
C692-00001-++++	DD8-5007	Tim & Harvey Joker Wild
C692-00006-++++	DD8-5008	Hot Lines
C692-00115-$5++	DDM-5002	Black Gold, Credit Pays, $5
C692-00096-$5++	DIB-5001	Diamond, Credit Pays
C692-00118-++++	DIV-5001	Diamonds & Devils, Credit Pays
C692-C0118-$5++	DIV-5001	Diamonds & Devils, Credit Pays, $5
C692-C0108-++++	DL7-5001	Blazing 7's, Credit Pays
C692-00108-$5++	DL7-5001	Blazing 7's, Credit Pays, $5
C692-C0175-++++	DL7-5002	Blazing 7's, Diamond Line, Credit Pays
C692-00117-FR++	DLD-5001	Double On Diamond Line, Coin Pays, French
C692-00117-++++	DLD-5001	Double On Diamond Line, Credit Pays
C692-00030-++++	DLD-5002	Diamond Line, United Kingdom
C692-00036-++++	DLD-5003	Double On Diamond, Pound Pays, United Kingdom
C692-00036-++++	DLD-5004	Double On Diamond, Pound Pays, United Kingdom
C692-00037-++++	DLD-5005	Diamond Line, Pound Pays, United Kingdom
C692-C0143-++++	DLF-5001	Diamond Line Frenzy, Credit Pays
C692-C0182-++++	DM7-5001	Blazing Triple 7's, Credit Pays
C692-C0152-++++	DM7-5007	Double Symbol, Credit Pays
C692-C0178-++++	DM7-5008	Double Symbol, Blazing Triple 7's, Credit Pays
C692-C0162-12MI	DM7-5016	Black & White, Triple 7's, Credit Pays
C692-00059-FR++	DM7-5035	Black & White, Double Jackpot, Coin Pays, French
C692-C0133-++++	DM7-5048	New York Cityscape, Credit Pays
C692-C0132-++++	DM7-5048	San Francisco Cityscape, Credit Pays
C692-C0131-++++	DM7-5049	Seattle Cityscape, Credit Pays
C692-C0161-++++	DM7-5050	Blazing Triple 7's, Credit Pays
C692-C0134-++++	DM7-5058	Memphis Blues, Credit Pays
C692-00040-++++	DM7-5062	Double Money Triple Blazing 7's, Credit Pays
C692-C0127-++++	DM7-5063	Double Money, Credit Pay
C692-C0127-12MI	DM7-5063	Double Money, Credit Pay
C692-00010-++++	DM7-5064	Double Money, Triple Blazing 7's, Credit Pays
C692-C0119-++++	DM7-5066	Triple Blazing 7's, Double Money, Credit Pays
C692-C0146-++++	DM7-5067	Blazing 7's Double Jackpot, Credit Pays
C692-C0145-++++	DM7-5068	Black & White, Credit Pays
C692-C0182-++++	DM7-9001	Blazing Triple 7's, Credit Pays
C692-00110-++++	DMB-5004	Mixed Jackpot Bars, Credit Pays
C692-00111-++++	DMB-5019	Black Gold, Credit Pays
C692-C0177-++++	DT7-5001	Diamond Line, Credit Pays
C692-C0058-++++	DWA-5009	Silver & Gold, Credit Pays
C692-00058-FR++	DWA-5010	Silver & Gold, Coin Pays, French
C692-C0180-++++	DWR-5001	Wild Rose, Credit Pays
C692-00100-++++	DWR-5010	2 Times Money, Credit Pays
C692-00048-++++	DWR-5011	2 Times Money, Credit Pays
C692-00007-++++	DWR-5014	2 Times Money, Credit Pays
C692-00089-++++	FB7-5001	Famous 7's, Credit Pays
C692-00089-12MI	FB7-5001	Famous 7's, Credit Pays
C692-00090-++++	FB7-5002	Famous 7's, Credit Pays
C692-00090-12MI	FB7-5002	Famous 7's, Credit Pays
C692-C0148-++++	FFR-5001	Bonus Frenzy, Credit Pays
C692-C0137-++++	FRF-5001	5x Rich, Credit Pays

©2003 Bally Gaming and Systems

G692... Feature Glass (WTE Cabinet with Speakers) (cont.)

GLASS	ART FORM	DESCRIPTION
C692-00070-FR++	GBB-5004	Blondie & Dagwood, Coin Pays, French
G692-00079-++++	ITM-5001	In The Money, Coin Pays
G692-00092-++++	ITM-5003	In The Money, Credit Pays
G692-C0130-++++	ITM-5004	In The Money, Credit Pays
C692-00027-++++	JM7-5006	I Love Jackpots
C692-00027-FR++	JM7-5007	I Love Jackpots, Coin Pays, French
C692-C0142-++++	JM7-5013	I Love Jackpots, Credit Pays
C692-C0138-++++	JM7-5014	Castle Of Cash, Credit Pays
C692-00098-PROG	MFL-5005	Cash For Life, Blazing 7's, Credit Pays
C692-00099-PROG	MFL-5009	Cash For Life, Rich & Famous, Credit Pays
C692-00068-FR++	MNB-5002	Money Bars, Coin Pays, French
C692-00105-++++	MNB-5002	Money Bars, Credit Pays
C692-C0164-12MI	QD7-5005	Quick Hits, Blazing 7's, Credit Pays
C692-C0157-$5MI	QD7-5006	Quick Hits, Blazing 7's, Credit Pays
C692-C0163-12MI	QD7-5007	Quick Hits, Black & White, Credit Pays
C692-C0158-$5MI	QD7-5008	Quick Hits, Black & White, Credit Pays
C692-C0156-$5MI	QDC-5004	Quick Hits, 5x 10x, Credit Pays
C692-C0165-12MI	QDC-5005	Quick Hits, 5x 10x, Credit Pays
C692-C0167-$5MI	QDC-5006	Quick Hits, 5x 10x, Credit Pays, $5
C692-C0170-$5++	QRO-5026	24 Karat Gold, Credit Pays, $5
C692-C0136-++++	RAF-5050	Chicago Cityscape, Credit Pays
C692-C0135-++++	RAF-5052	Miami Cityscape, Credit Pays
C692-C0151-++++	RAF-5054	New Orleans Cityscape, Credit Pays
C692-00061-++++	RAF-5057	Memphis Blues, Coin Pays
C692-C0171-PROG	RBB-5004	Payday, Black & Gold, Credit Pays
C692-C0176-++++	RH7-5001	Red Hot 7's, Credit Pays
C692-C0179-++++	RTW-5002	Question Mark, Credit Pays
C692-00082-++++	RTW-5023	At The Hop, Coin Pays
C692-00094-++++	RTW-5032	Roaring 20's, Pound Pays, United Kingdom
C692-C0174-PROG	SBB-5004	Payday, Blazing 7's, Credit Pays
C692-C0173-PROG	TBB-5005	Stars & Bars, Credit Pays
C692-00011-++++	TDM-5002	Triple Double Money, Credit Pays
C692-00087-++++	TFR-5001	Bonus Times Frenzy, Credit Pays
C692-00088-++++	TFR-5002	Pool Ball Frenzy, Credit Pays
C692-00020-++++	TGD-5010	Triple Money, Credit Pays
C692-C0123-++++	TGD-5011	Triple Money, Credit Pays
C692-00050-FR++	TGD-5012	Triple Money, Coin Pays, French
C692-00050-++++	TGD-5012	Triple Money, Credit Pays
C692-00045-++++	TGD-5013	Triple Money, Credit Pays
C692-00046-FR++	TGD-5014	Triple Money, Coin Pays, French
C692-00046-++++	TGD-5014	Triple Money, Credit Pays
C692-00106-++++	TM7-5001	Triple Symbol, Credit Pays
C692-00107-++++	TM7-5002	Triple Symbol, Credit Pays
C692-00041-++++	TM7-5003	Triple Blazing, Triple Money, Credit Pays
C692-00009-++++	TM7-5004	Blazing Triple Money, Credit Pays
C692-00109-++++	TR7-5001	Fabulous 7's, Credit Pays
C692-00008-++++	TR7-5002	Fabulous 7's, Credit Pays
C692-00113-FR++	TR7-5003	Fabulous 7's, Coin Pays, French
C692-00113-++++	TR7-5003	Fabulous 7's, Credit Pays
C692-C0008-$5++	TR7-5003	Fabulous 7's, Credit Pays, $5
C692-00024-++++	TRB-5001	3 Way Pay, Credits Pays
C692-00024-FR++	TRB-5002	4 Way Pay, Coin Pays, French
C692-00022-++++	TTM-5001	10x Money, Credit Pays
C692-00083-++++	TTM-5004	10x Money, Credit Pays
C692-00095-++++	TTM-5004	Ten Times, Credit Pays
C692-C0168-$5++	WLI-5028	Black Gold, Credit Pays, $5
C692-C0169-$5++	WLI-5029	Wild Rose, Credit Pays, $5
C692-00023-++++	WRO-50	Wild Money, Credit Pays
C692-00114-$5++	WRO-5001	Wild Rose, Credit Pays, $5
C692-00047-++++	WRO-5037	Wild Money
C692-00043-++++	WRO-5038	Wild Money, Credit Pays
C692-00091-++++	WTS-5003	Wild Times, Credit Pays
C692-00091-$5++	WTS-5004	Wild Times, Credit Pays, $5
C692-00091-FR++	WTS-5005	Wild Times, Coin Pays, French
C692-C0150-12MI	WTS-5013	Blues Brothers, Credit Pays
C692-C0150-12MI	WTS-5014	Blues Brothers, Credit Pays
C692-00057-++++	ZDM-5001	Bonus Line, Credit

G693... Feature Glass (Round Cabinet with Speakers)

GLASS	ART FORM	DESCRIPTION
C693-00089-2SPC	BDO-5002	Blazing $ & 7's, Credit Pays
C693-00028-++++	BFR-5001	Bonus Frenzy, Credit Pays
C693-00028-12MI	BFR-5001	Bonus Frenzy, Credit Pays
C693-00087-++++	BFR-5002	Winning For Dummies, Credit Pays
C693-00054-++++	BFR-5003	Triple Bonus Frenzy, Coin Pays
C693-00013-PROG	BFR-5004	Popeye Bonus Frenzy, Credit Pays
C693-00065-$5++	BFR-5008	Bonus Frenzy, $5 Pays
C693-00065-++++	BFR-5008	Bonus Frenzy, Coin Pays
C693-00016-++++	BFR-5009	Winning For Dummies, Credit Pays
C693-00058-++++	BFR-5010	Richie Rich, Credit Pays
C693-00018-++++	BFR-5011	Andy Capp, Coin Pays
C693-00008-12MI	BFR-5012	Blondie Frenzy, Credit Pays
C693-00005-12MI	BFR-5014	Betty Boop Frenzy, Credit Pays
C693-00059-++++	BFR-5016	5 Times Bonus, Coin Pays
C693-00104-++++	BL4-5001	Blazing 7's 4 Reel, Coin Pays
C693-00036-12MI	BL4-5002	Blazing 7's 4 Reel, Credit Pays
C693-00034-12MI	BL4-5002	Blazing 7's Scatter, Credit Pays
C693-00011-12MI	BL4-5003	Blazing 7's, 4 Reel, Credit Pays
C693-00081-$5MI	BL7-5021	Blazing 7's, $5 Credit Pays
C693-00081-12MI	BL7-5021	Blazing 7's, Credit Pays
C693-00019-10MI	BL7-5026	Blazing 7's, $10 Pays
C693-00019-$5MI	BL7-5026	Blazing 7's, $5 Pays
C693-00019-12MI	BL7-5026	Blazing 7's, Credits Pays
C693-00098-12MI	BL7-5062	Blazing 7's, Credit Pays
C693-00032-++++	BLD-5004	Blazing 7's Double Jackpot, Credit Pays
C693-00030-++++	BNT-5001	Bonus Times, Credit Pays
C693-00074-++++	BNT-5003	Bonus Times, Credit Pays
C693-00105-++++	BS7-5001	Blazing 7's Scatter, Credit Pays
C693-00105-12MI	BS7-5001	Blazing 7's Scatter, Credit Pays
C693-00004-PROG	BS7-5003	Betty Boop Super Scatter, Credit Pays
C693-00007-PROG	BS7-5006	Blondie Scatter, Credit Pays
C693-00012-12MI	BS7-5009	Popeye Super Scatter, Credit Pays
C693-00083-$10+	BUB-5031	Crazy Winner, $10 Pays
C693-00083-$25+	BUB-5031	Crazy Winner, $25 Pays
C693-00083-$5++	BUB-5031	Crazy Winner, $5 Pays
C693-00006-PROG	BWT-5006	World Tour, Credit Pays
C693-00009-PROG	BWT-5010	Dagwood's Big Bonus, Credit Pays
C693-00017-PROG	BWT-5016	Popeye Spinach Bonus, Coin Pays
C693-00010-++++	BWT-5019	Frankie & Annette
C693-00080-$5++	DC5-5002	Black & White 5x, $5 Credit Pays
C693-00080-++++	DC5-5002	Black & White 5x, Credit Pays
C693-00084-$5++	DC5-5006	Wild Rose 5x, $5 Credit Pays
C693-00073-++++	DC5-5010	Black & White 5x, Credit Pays
C693-00095-++++	DC5-5011	5x Times Money, Credit Pays
C693-00096-++++	DC5-5012	5x Times Money, Credit Pays
C693-00106-++++	DC5-5015	5x Times Money, Credit Pays
C693-00085-$1C+	DCM-5035	Black & White, $100 Credit Pays
C693-00024-++++	DCM-5052	Blazing 7's X Pay, Credit Pays
C693-00092-++++	DCM-5058	5 X 10 Times
C693-00056-++++	DCM-5071	Double Money, Credit Pays
C693-00112-++++	DCM-5071	Double Money, Credit Pays
C693-00099-++++	DCM-5072	Double Money, Credit Pays
C693-00048-++++	DCM-5073	Double Money, Credit Pays
C693-00067-++++	DCM-5076	5 Times 10 Times, Credit Pays
C693-00068-++++	DCM-5077	5 Times 10 Times, Credit Pays
C693-00069-++++	DCM-5078	5 Times 10 Times, Credit Pays
C693-00070-++++	DCM-5079	5 Times 10 Times, Credit Pays
C693-00071-++++	DCM-5080	5 Times 10 Times, Credit Pays
C693-00103-++++	DCM-9057	5 Times 10 Times, Credit Pays
C693-00076-++++	DD8-5004	Hot Lines, Credit Pays
C693-00002-++++	DD8-5005	Winning Times 7's, Credits Pays
C693-00003-++++	DD8-5006	Winning Times Blazing 7's, Credits Pay
C693-00001-++++	DD8-5007	Tim & Harvey Joker Wild, Coin Pays
C693-00101-++++	DL7-5001	Blazing 7's Diamond Line, Credit Pays
C693-00100-++++	DL7-5002	Diamond Line, Blazing 7's, Credit Pays
C693-0082-$25+	DM7-5001	Triple Blazing 7's Double, $25 Pays
C693-00082-$5++	DM7-5001	Triple Blazing 7's Double, $5 Pays
C693-00090-++++	DM7-5002	Triple Blazing 7's Double, Credit Pays
C693-00090-12MI	DM7-5002	Triple Blazing 7's Double, Credit Pays
C693-00091-12MI	DM7-5009	4 Blazing 7's Double, Credit Pays
C693-00025-++++	DM7-5009	Triple Blazing 7's Double, Coin Pays
C693-00091-++++	DM7-5009	Triple Blazing 7's Double, Credit Pays
C693-00079-$5++	DM7-5010	Black & White Double Jackpot, $5 Pays, Credit Pays
C693-00079-++++	DM7-5010	Black & White Double Jackpot, Credit Pays
C693-00026-++++	DM7-5016	Black & White, Credit Pays
C693-00026-12MI	DM7-5016	Black & White, Credit Pays
C693-00072-++++	DM7-5020	All American, Credit Pays
C693-00072-12MI	DM7-5020	All American, Credit Pays
C693-00027-++++	DM7-5050	Triple Blazing 7's, Double Jackpot, Credit Pays
C693-00061-++++	DM7-5054	Triple Blazing 7's Double, Credit Pays
C693-00055-++++	DM7-5063	Triple Blazing 7's Double, Credit Pays
C693-00060-++++	DM7-5065	Triple Blazing 7's Double, Credit Pays
C693-00110-++++	DM7-5066	Double Money, Credit Pays

©2003 Bally Gaming and Systems

ProSlot® 6000

G693... Feature Glass (Round Cabinet with Speakers) (cont.)

GLASS	ART FORM	DESCRIPTION
C693-00097-++++	DM7-5071	Black & White Double Jackpot, Credit Pays
C693-00041-$5++	DWR-5002	24 Karat, $5 Credit Pays
C693-00045-$10+	DWR-5003	24 Karat, $10 Credit Pays
C693-00022-++++	DWR-5006	Double Wild Rose, Credit Pays
C693-00021-++++	DWR-5009	Rapid Double Jackpot, Credit Pays
C693-00052-++++	DWR-5012	2 Times Money, Credit Pays
C693-00050-++++	DWR-5012	2 Times Money, Credits Pays
C693-00109-++++	DWR-5014	2 Times Money, Credit Pays
C693-00023-++++	FDM-5001	5 & Dime, Credit Pays
C693-00029-++++(G)	ITM-5001	In The Money, Credit Pays
C693-00029-12MI(G)	ITM-5001	In The Money, Credit Pays
G693-00063-$10+	ITM-5003	In The Money, $10 Coin Pays
G693-00063-$25+	ITM-5003	In The Money, $25 Coin Pays
G693-00063-$5++	ITM-5003	In The Money, $5 Coin Pays
G693-00063-++++	ITM-5003	In The Money, Coin Pays
G693-00062-++++	ITM-5004	In The Money, Coin Pays
C693-00093-++++	JM7-5007	I Love Jackpots, Coin Pays
C693-00066-$1C+	MBV-5002	Black Velvet, $100
C693-00031-++++	MNB-5001	Money Bars, Credit Pays
C693-00075-++++	MNB-5002	Money Bars, Credit Pays
C693-00046-25MI	QD7-5002	Quick Hits, Triple Blazing 7's, $25 Credit Pays
C693-OT046-25MI	QD7-5002	Quick Hits, Triple Blazing 7's, $25 Credit Pays, Ontario
C693-00046-$5MI	QD7-5002	Quick Hits, Triple Blazing 7's, $5 Credit Pays
C693-00043-10MI	QD7-5004	Quick Hits, Black & White, $10 Credit Pays
C693-OT043-10MI	QD7-5004	Quick Hits, Black & White, $10 Credit Pays, Ontario
C693-00043-$5MI	QD7-5004	Quick Hits, Black & White, $5 Credit Pays
C693-00047-25MI	QDC-5003	Quick Hits, 5 X 10, $25 Credit Pays
C693-00042-$5MI	QDC-5004	Quick Hits, Black Gold, 5 X 10, $5 Credit Pays
C693-00038-$5MI	QDC-5008	Quick Hits, Black Gold, 5 X 10, $5 Credit Pays
C693-00033-++++	RTW-5008	Swing Time, Credit Pays
C693-00015-++++	RTW-5023	At The Hop, Credit Pays
C693-00049-++++	TGD-5011	Triple Money, Credits Pays
C693-00078-++++	TGD-5014	Triple Money, Credit Pays
C693-00051-++++	TM7-5004	Triple Money, Credit Pays
C693-00053-++++	TM7-5004	Triple Money, Credit Pays
C693-00035-++++	TRB-5001	3 Way Pay, Credit Pays
C693-00077-++++	TTM-5001	Ten Times Money, Credit Pays
C693-00088-++++	TTM-5002	Ten Times Money, Credit Pays
C693-00094-++++	TTM-5005	Ten Times Money, Credit Pays
C693-00039-$5++	WLI-5028	Black Gold, $5 Credit Pays
C693-00040-$5++	WLI-5034	Wild Rose, $5 Credit Pays
C693-00086-$1C+	WLI-5038	Black Gold, $100 Credit Pays
C693-00044-$10+	WRO-5010	Wild Rose, $10 Credit Pays
C693-00037-$5++	WRO-5026	24 Karat, $5 Credit Pays
C693-00102-++++	WRO-5038	Wild Money, Credit Pays
C693-00107-++++	WRO-5039	Wild Money, Credit Pays
C693-00108-++++	WRO-5040	Wild Money, Credit Pays
C693-00014-++++	WTS-5008	Wild Times Blues Brothers
C693-00057-LIBE	WTS-5009	Liberace, Credit Pays
C693-00110-12MI	WTS-5010	Blues Brothers, Wild Times
C693-00110-12MI	WTS-5011	Blues Brothers, Wild Times
C693-00064-++++	WTS-5083	Wild Times, Credit Pays
C693-00020-++++	ZDM-5001	Bonus Line, Credit Pays

G694... Feature Glass (CT Cabinet with Speakers)

GLASS	ART FORM	DESCRIPTION
C694-00004-++++	BFR-5071	Andy Capp
C694-00003-12MI	BL4-5001	Blazing 7's Bonus
C694-00002-++++	DD8-5005	Winning Times 7's, Credit Pays
C694-00001-++++	DD8-5007	Tim & Harvey Joker Wild, Coin Pays
C694-00006-++++	DM7-5066	Double Money, Triple Blazing 7's, Credit Pays
C694-00005-++++	ITM-5003	In The Money

G772... Feature Glass (Wide Top Cabinet with Credits)

GLASS	ART FORM	DESCRIPTION
C772-00003-++++	BFR-5001	Bonus Frenzy, Credit Pays
C772-00010-$2MI	BFR-5001	Bonus Frenzy, $2 Credit
C772-00006-$2MI	BFR-5002	Winning For Dummies, $2 Credits
C772-00006-++++	BFR-5002	Winning For Dummies, Credit Pays
C772-00006-12MI	BFR-5002	Winning For Dummies, Credit Pays
C772-00014-++++	BFR-5003	Triple Bonus Frenzy Credit
C772-00015-++++	BFR-5006	5 Times Bonus Frenzy Credit
C772-00018-++++	BFR-5011	Andy Capp Credit
C772-00007-$2MI	BL7-5053	Blazing 7's, $2 Credit
C772-00007-12MI	BL7-5053	Blazing 7's, Credit Pays
C772-00012-$2MI	BLD-5001	Blazing 7's Double, $2 Credit
C772-00023-++++	BNT-5001	Bonus Times Credit
C772-00004-++++	BNT-5003	Bonus Times, Credit Pays
C772-00028-++++	BS7-5001	Super Scatter Blazing 7's, Credit
C772-00013-12MI	BS7-5002	Super Scatter Blazing 7's, Credit
C772-00030-++++	CB7-5040	Blazing 7's Credit
C772-00027-++++	DC5-5010	Black & White 5x Credit
C772-00032-++++	DD8-5001	Hot Lines Credit
C772-00026-++++	DD8-5004	2x-3x-5x Credit
C772-00024-++++	DIB-5001	Diamonds Credit
C772-00008-++++	DID-5002	Diamond Lines, Credit Pays, Blazing 7's Double Jackpot
C772-00001-++++	DL7-5001	Blazing 7's, Diamond Line, Credit Pays
C772-00020-++++	DM7-5016	Double Jackpot Black & White Credit
C772-00022-++++	DWR-5008	Double Jackpot Mixed Credit
G772-00002-$2MI	ITM-5001	In The Money, $2 Credit
G772-00002-++++	ITM-5001	In The Money, Credit Pays
C772-00011-$2MI	MNB-5001	Money Bars, $2 Credit
C772-00005-++++	MNB-5002	Money Bars, Credit Pays
C772-00016-++++	RTW-5023	At The Hop Credit
C772-00021-++++	SCC-5005	Leprechauns Credit
C772-00025-++++	TRB-5001	3 Way Pay Credit
C772-00031-++++	WRO-5002	Wild Rose Credit
C772-00029-++++	ZDM-5001	Double Symbol Credit

©2003 Bally Gaming and Systems

ProSlot® 6000

G593... Reel Glass

GLASS	ART FORM	DESCRIPTION
G593-6508-FCRD	AC4-0020	7's, English/French Canadian, 11-Inch, 4 Reel, 3 Line
G593-65001-FCBK	APD-0001	Double Colored Bars, English/French Canadian, 11-Inch
G593-5501-FCBK	APD-5001	Double Colored Bars, French Canadian, 9-Inch
G593-60001-BLCK	APN-5001	Hat Trick
G593-65001-FCBK	APT-0001	Wild Tigers, English/French Canadian, 11-Inch
G593-65001-FCBK	APT-0002	Wild Tigers, English/French Canadian, 11-Inch
G593-65001-FCBK	APT-0003	Fruit Loot, English/French Canadian, 11-Inch
G593-55001-FCBK	APT-5001	Wild Tigers, English/French Canadian, 9-Inch
G593-55001-FCBK	APT-5002	Wild Tigers, English/French Canadian, 9-Inch
G593-55001-FCBK	APT-5003	Fruit Loot, English/French Canadian, 9-Inch
G593-55100-RED+	APT-5014	Deuces Wild, Custom Monte Carlo
G593-55001-RED+	APT-5015	Deuces Wild, 9-Inch
G593-00020-AUST	AUS-5001	Custom Australia
G593-00023-AUST	AUS-5002	Diamond Winners, Australian
G593-00034-6000	BDM-5003	Betty Boop's Double Jackpot, Blazing 7's Devil, English
G593-00040-6000	BDM-5004	Betty Boop's Double Jackpot, Blazing 7's Devil, English, 5 Line
G593-00052-6000	BFB-5003	Betty Boop Respin Roundup, Custom
C593-10022-6000	BFR-5001	Bonus Frenzy
C593-10022-F600	BFR-5001	Bonus Frenzy, French
C593-10022-S600	BFR-5001	Bonus Frenzy, Spanish
C593-C0058-FC++	BFR-5001	Bonus Frenzy, English/French Canadian
C593-16006-FBLK	BFR-5002	Winning For Dummies, French
C593-10033-F600	BFR-5003	Triple Bonus Frenzy, French
C593-10034-6000	BFR-5006	5 Times Bonus Frenzy
C593-10034-F600	BFR-5006	5 Times Bonus Frenzy, French
G593-55001-GRN+	BK7-5023	French Quarters, 9-Inch
G593-65001-FCBK	BL7-0021	Blazing 7's, French Canadian, 11-Inch
G593-55001-FCBK	BL7-5007	Blazing 7's, French Canadian
G593-55001-FCBK	BL7-5021	Blazing 7's, English/French Canadian
G593-55001-F266	BL7-5041	Reel Gems, French
G593-06001-266+	BL7-5052	Reel Gems, English
G593-06001-CBLK	BL7-5052	Reel Gems
G593-06001-SP26	BL7-5052	Reel Gems, Spanish
G593-55001-F266	BL7-5052	Reel Gems, French
G593-06001-FCBK	BL7-5057	Blazing 7's Double Jackpot, Quick Hits, English/French Canadian
G593-00028-6000	BL7-5112	Rio Rita Runaway, English
G593-16001-FBLK	BLD-5004	Double Blazing 7's, Double Jackpot, French
G593-00035-6000	BLM-5003	Betty Boop's Big Hit, English
G593-00041-6000	BLM-5004	Betty Boop Classic, 5 Line
C593-10023-6000	BNT-5003	Bonus Times, 5 Line
C593-10023-F600	BNT-5003	Bonus Times, French, 5 Line
C593-C0073-FC60	BNT-5003	Bonus Times, 5 Line, French Canadian
G593-00044-6000	BQM-5003	Betty Boop Born To Boop
C593-10029-F600	BQM-5009	Betty Boop Born To Boop, French
G593-00068-6000	BRT-5001	World Tour, 5 Coin, Coin Pays
G593-00033-6000	BRT-5003	Betty Boop Roaring 20's, English
G593-00054-6000	BRT-5007	Betty Boop's Swingtime
C593-00059-6000	BRT-5015	All American Betty
C593-00059-6000	BRT-5016	All American Betty
C593-00063-6000	BRT-5023	Blondie's Swingtime
C593-00062-6000	BRT-5029	Blondie's Big Dough
C593-00062-6000	BRT-5030	Blondie's Big Dough, New Jersey
C593-00063-6000	BRT-5032	Blondie's Big Spender
C593-00063-6000	BRT-5033	Blondie Big Spender, New Jersey
G593-16001-FBLK	BS7-5007	Blondie Scatter Pays, French
G593-16001-FBLK	BS7-5014	Blondie Scatter Pays, French
G593-55001-BLUE	BUB-5006	Crazy 7's, 9-Inch
G593-55001-FBLU	BUB-5006	Crazy 7's, French, 9-Inch
G593-55001-BLUE	BUB-5027	Plum Crazy, 9-Inch
G593-55001-FBLU	BUB-5029	Plum Crazy, French, 9-Inch
G593-55001-FBLU	BUB-5034	Crazy 7's, French, 9-Inch
G593-55001-BLUE	BUB-5035	Happy Joker
G593-55001-FBLU	BUB-5035	Happy Joker, French
C593-10027-F600	BWT-5011	Betty's World Tour, French
C593-10027-6000	BWT-5012	Betty's World Tour, French
G593-65001-GRN+	CB7-0001	Mixed 7's, 11-Inch
G593-65001-FCBL	CB7-0003	Cold Cash, English/French Canadian, 11-Inch
G593-65001-FCBL	CB7-0010	Aqua 7's, English/French Canadian, 11-Inch
G593-55001-BLUE	CB7-5003	Cold Cash, 9-Inch
G593-55001-FCBL	CB7-5003	Cold Cash, English/French Canadian, 9-Inch
G593-55001-GRN+	CB7-5005	Mixed 7's, 9-Inch
G593-55001-FCBL	CB7-5010	Aqua 7's, English/French Canadian, 9-Inch
G593-55001-FGRN	CB7-5023	Naughty Nickels, French, 9-Inch
G593-55001-GRN+	CB7-5023	Naughty Nickels, 9-Inch
G593-55100-GRN+	CB7-5023	Naughty Nickels, Custom Monte Carlo
G593-00010-55++	CB7-5027	Naughty Nickels, 3 Line, 9-Inch
G593-00012-55++	CB7-5028	Naughty Nickels, 5 Or 3 Line, 9-Inch
G593-55001-GRN+	CB7-5029	Naughty Nickels
G593-16001-FBLK	CB7-5040	Super Blazing 7's, French
G593-55001-BLCK	CBM-5004	7's, 9-Inch
G593-65003-FCRD	CM7-0003	7's, English/French Canadian, 3 Line, 11-Inch
G593-65003-FCRD	CM7-0019	7's, French Canadian, 3 Line, 11-Inch
G593-65005-FCBK	CM7-0027	7's, English/French Canadian, 5 Line, 11-Inch
G593-55003-FCRD	CM7-5003	7's, English/French Canadian, 5 Line, 5 Coin, 9-Inch
G593-00016-6000	DBB-5006	Black & White Generic Payday, English

GLASS	ART FORM	DESCRIPTION
G593-60009-CBLK	DBF-5001	Popeye Double Jackpot, 3 Line, 9 Coin
G593-60009-CBLK	DBF-5002	Betty Boop Double Jackpot, 3 Line, 9 Coin
G593-60009-CBLK	DBF-5003	Blondie's Double Jackpot
G593-00036-6000	DC5-5002	Black & White, Custom RCCL
G593-06001-BLCK	DC5-5005	Gimme 5, 5 Times Pay
C593-10010-F600	DC5-5010	Black & White, French, 5 Line, 5 Coin
C593-10010-F600	DC5-5010	Black & White, French
C593-C0016-6000	DC5-5010	Black & White, 5 Line
G593-00016-S600	DC5-5010	Black & White, Spanish, 5 Line
G593-65001-FCRD	DCM-0023	Double Eagle, English/French Canadian, 11-Inch
G593-55001-FCRD	DCM-5023	Double Eagle, English/French Canadian
G593-55001-FBLK	DCM-5031	California Dreamin', French
G593-06001-RUBK	DCM-5032	California Dreamin', English (Russian Glass)
G593-10011-6000	DCM-5034	California Dreamin', 3 Line
G593-00036-6000	DCM-5043	Double Take, Custom RCCL
G593-16001-BLCK	DCM-5049	Double Gold, Black Gold, French, 3 Coin
G593-10038-FR++	DCM-5071	Double Money, French
G593-00036-6000	DCM-9057	Five & Ten Times Pay, Glitter Tapes, Custom RCCL
C593-00076-6000	DD8-5001	Hot Lines, 5 Lines
C593-00076-6000	DD8-5001	Hot Lines, 5 Lines
C593-10026-F600	DD8-5001	Hot Lines, French, 5 Lines
C593-C0076-6000	DD8-5001	Hot Lines, 5 Lines
C593-10037-6000	DD8-5004	Hot Lines, 5 Lines
C593-C0076-6000	DD8-5004	Hot Lines, 2x-3x-5x
C593-00090-6000	DD8-5008	Hot Lines, 3 Lines, 9 Coin
G593-65001-FCBL	DDD-0001	Triple Double 7's, English/French Canadian, 11-Inch
G593-65001-FCBL	DDD-0002	Triple Double 7's, English/French Canadian, 11-Inch
G593-55001-FCBL	DDD-5002	7's Double Symbol, English/French Canadian
G593-00010-RU60	DIA-5001	Diamonds, English (Russian Glass)
G593-00018-55++	DIA-5001	Diamonds, Custom
G593-00018-55FR	DIA-5001	Diamonds, 3 Coin, French, Custom
G593-00018-55++	DIA-5002	Diamonds, USAF
G593-00003-6000	DIA-5005	Borussia Diamond Line, Black Diamond Line Glass, Custom
G593-00018-55SP	DIB-5002	Diamond Winners, Spanish
G593-10001-F600	DIB-5002	Diamonds, Diamond Line, French
G593-00010-FC60	DIV-5001	Diamonds & Devils, English/French Canadian
G593-65001-FCBK	DJP-0001	Solid Gold Double, English/French Canadian, 11-Inch
G593-55001-FCBK	DJP-5001	Solid Gold Double, English/French Canadian
G593-10001-F600	DLD-5001	Double On Diamond Line, French
G593-65001-RED+	DLI-0002	Bermuda Keyline/Traditional, 11-Inch
G593-55001-FRED	DLI-5002	Double Jackpot, French
G593-55001-RED+	DLI-5002	Bermuda Keyline/Traditional
G593-06001-BLUE	DM7-5004	Double Jackpot Smiley, English
G593-00036-6000	DM7-5007	Triple Blazing 7's, Double Symbol, Custom RCCL
G593-06001-BLCK	DM7-5007	Triple Blazing 7's Double Symbol
G593-06001-OTBK	DM7-5007	Triple Blazing 7's Double Symbol, English/French Canadian
G593-06001-RUBK	DM7-5007	Triple Blazing 7's, Double Symbol, Russian
G593-16001-SBLK	DM7-5007	Triple Blazing 7's Double Symbol, Spanish
G593-55001-BLCK	DM7-5007	Triple Blazing 7's Double Symbol
G593-60001-BLCK	DM7-5007	Triple Blazing 7's Double Symbol, English
G593-00015-6000	DM7-5009	Triple Blazing 7's Double Symbol
G593-00015-OT60	DM7-5009	Triple Blazing 7's Double Symbol, English/French Canadian, 5 Line
G593-00015-RU60	DM7-5009	Triple Blazing 7's, Double Symbol, Russian, 5 Line
G593-10003-S600	DM7-5009	Blazing 7's Double Symbol, Spanish, 5 Lines
G593-00036-6000	DM7-5010	Black & White, Custom RCCL, 5 Line
G593-06001-0TBK	DM7-5014	Black & White, English/French Canadian
G593-06001-BLCK	DM7-5014	Black & White, English
G593-06001-OTBK	DM7-5014	Black & White, English/French Canadian
G593-06001-SBLK	DM7-5014	Black & White, Spanish
G593-55001-SBLK	DM7-5014	Black & White, Spanish
G593-60001-BLCK	DM7-5014	Black & White
G593-00016-6000	DM7-5016	Black & White, English, 5 Lines
G593-00016-OT60	DM7-5016	Black & White, English/French Canadian, 5 Lines
G593-00038-6000	DM7-5016	Black & White, Custom RCCL, 3 Line
G593-10010-6000	DM7-5016	Black & White, 5 Lines
G593-10010-F600	DM7-5016	Black & White, French, 5 Lines
G593-10010-S600	DM7-5016	Black & White, Spanish, 5 Lines
G593-60001-BLCK	DM7-5033	Midnight Sun, Custom
G593-16001-FBLK	DM7-5035	Black & White, French
G593-06001-BLCK	DM7-5036	Triple Blazing 7's, Double Symbol, Custom RCCL
G593-06001-BLCK	DM7-5038	Black & White, Custom RCCL
G593-00045-6000	DM7-5050	Triple Blazing 7's, Double Jackpot, 3 Line, 6 Coin
G593-06001-BLCK	DM7-5060	Triple Blazing 7's Double Symbol, English
G593-06001-RUBK	DM7-5060	Triple Blazing 7's, Double Symbol, Russian
C593-C0095-6000	DM7-5068	Black & White Double Jackpot
G593-65001-FCBK	DMB-0019	Black Gold, English/French Canadian, 11-Inch
G593-65001-FCBK	DMB-0020	7's, Doubles, English/French Canadian, 11-Inch
G593-65003-FCBL	DMB-0032	7's, Double Symbols, French Canadian, 3 Line, 11-Inch
G593-00007-65FC	DMB-0056	Bermuda Cherry, English/French Canadian, 11-Inch
G593-00007-65FC	DMB-0057	Bermuda Cherry, English/French Canadian, 11-Inch
G593-55001-FBLK	DMB-5025	Black Gold, French
G593-00007-55FC	DMB-5056	Bermuda Cherry, English/French Canadian
G593-00019-55++	DRA-5001	Double Dragon, 3 Different Themes
G593-06001-BLCK	DWA-5019	Silver & Gold, Nevada
G593-06001-BLCK	DWN-5001	Double Jackpot Smiley, English

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlot® 6000

G593... Reel Glass (cont.)

GLASS	ART FORM	DESCRIPTION
G593-00036-BLCK	DWN-5002	Smiley, Custom RCCL
G593-06001-BLCK	DWN-5002	Double Jackpot Smiley
G593-06001-BLCK	DWN-5003	Double Dragon, English
G593-00036-6000	DWR-5007	Silver Lining, Glitter Tapes, Custom RCCL
G593-16001-SBLK	DWR-5008	Rapid Double Jackpot, 2 Coin, Spanish
G593-06001-FRBK	DWR-5009	Rapid Double Jackpot, French
G593-55014-FBLK	EB4-5003	Green Lion Giant Jackpot, French, 4 Reel
G593-65001-FCBK	FAI-0003	Fire & Ice, English/French Canadian, 11-Inch
G593-55001-FCBK	FAI-5003	Fire & Ice, English/French Canadian
G593-55100-BLCK	FLB-5001	Flashback, Custom Monte Carlo
G593-16001-FBLK	FX7-5001	5 Times Pay With 7's, French
C593-00064-6000	GBB-5005	Blondie's Meal Ticket
G593-00060-6000	GDU-5002	Gold Down Under, Touch Glass
G593-06006-BKRU	GJP-5010	Giant Jackpot, English
G593-16018-BLCK	GJP-5010	Giant Jackpot
G593-55008-BLCK	GJP-5010	Giant Jackpot, 9-Inch Reel
G593-55018-BLCK	GJP-5010	Giant Jackpot, 4 Reel
G593-55018-FRBK	GJP-5010	Giant Jackpot, French, 4 Reel
G593-60018-BLCK	GJP-5010	Giant Jackpot, English
G593-65001-FCBK	GSL-0013	Gold Rush, English/French Canadian, 11-Inch
G593-55001-FCGR	GSL-5002	Grand Slam, Blue 7's, French Canadian
G593-55001-FGRN	GSL-5002	Grand Slam, Blue 7's, French
G593-55001-FCBK	GSL-5013	Gold Rush, French Canadian
G593-65001-FCGR	GSM-0001	Grand Slam, French Canadian, 11-Inch
G593-55001-FGRN	HAR-5001	Hit & Run, French
G593-55100-GRN+	HAR-5001	Hit & Run, Custom Monte Carlo
G593-55001-FBLK	HAR-5002	Hit & Run, 3 Coin, French
C593-00070-6000	HPL-5001	Horse Play
G593-C0053-FC60	ITM-5001	In The Money, English/French Canadian
G593-00004-55++	JQK-5003	Mini Royal, 3 Line
G593-00004-55FR	JQK-5003	Mini Royal, French, 3 Line
G593-00009-55++	JQK-5004	Mini Royal, 5 Line
G593-00029-6000	JQK-5004	Mini Royal, English
G593-55001-BLUE	JQK-5005	Mini Royal, 9-Inch
G593-00004-55++	JQK-5007	Mini Royal, 3 Line, 9-Inch
G593-00014-6000	JQK-5011	7's, English
G593-00005-55++	JUJ-5001	Jumpin' Joker, 9-Inch
G593-00005-55FC	JUJ-5001	Jumpin' Joker, French Canadian, 9-Inch
G593-00005-55FR	JUJ-5001	Jumpin' Joker, French, 9-Inch
G593-65001-FCRD	LM7-0011	Triple Blazing 7's, English/French Canadian, 11-Inch
G593-55001-FCRD	LM7-5011	Triple Blazing 7's, French Canadian, 9-Inch
G593-55001-FRED	LM7-5011	Triple Blazing 7's, French, 9-Inch
G593-06001-RED+	LMN-5001	Triple Blazing 7's, English
G593-06001-RED+	LMN-5002	Blazing Triple 7's, English
G593-55001-BLCK	LMS-5007	Black Colors, 9-Inch
G593-06001-BLCK	M7D-5003	Diamonds, Millionaire 7's
G593-65003-FCBK	MB0-0015	7's, English/French Canadian, 3 Line, 11-Inch
G593-55003-FCBK	MB0-5015	7's, English/French Canadian, 3 Line, 9-Inch
G593-65003-FCBL	MB7-0023	Any Two 7's, English/French Canadian,, 3 Line, 11-Inch
G593-55003-FCBL	MB7-5023	Any Two 7's, English/French Canadian, 3 Line, 9-Inch
G593-10025-6000	MNB-5002	Money Bars, 5 Line
G593-55001-BLCK	MNC-5001	Monte Carlo, USAF, 9-Inch
G593-55001-F266	MNC-5002	Las Vegas, French, 9-Inch
G593-06001-FBLK	MOC-5002	Monte Carlo, Wild, France
G593-06001-FBLK	MOC-5003	Monte Carlo, Rich & Famous, France
G593-06001-BLCK	NE7-5005	Payday, Paris Custom, 5 Lines
G593-55001-FBLK	OVR-5001	Overload, French, 9-Inch
G593-06001-QHIT	QD7-5002	Quick Hits, Triple Blazing 7's, Ontario
G593-10036-FR++	QD7-5003	Quick Hits, Black & White Double Jackpot, French
G593-06001-QHIT	QD7-5004	Quick Hits, Black & Whit
C593-C6001-FCQH	QD7-5005	Quick Hits, Blazing 7's, Double Jackpot, English/French Canadian
C593-C6001-FCQH	QD7-5007	Quick Hits, Black & White Double Jackpot, English/French Canadian
G593-10036-FR++	QDC-5001	Quick Hits, 5 Times 10 Pay, French
C593-C6001-FCQH	QDC-5005	Quick Hits, 5 Times 10 Pay, English/French Canadian
C593-C6001-FCQH	QDC-5007	Quick Hits, Black & White Double Jackpot, English/French Canadian
G593-55001-FBLK	RAF-5004	Rich & Famous, 3 Coin, French
G593-55001-FBLK	RAF-5027	French Green Lion, 9-Inch
G593-06001-BLCK	RBB-5006	Black & Gold Generic Payday, English
G593-06001-BLCK	RBB-5006	Blazing 7's Generic Payday, English
G593-06001-BLCK	RBB-5012	Payday, Paris, Black & Gold, Custom, 5 Lines
G593-00036-6000	RTW-5001	Roaring 20's, Custom RCCL
G593-00037-6000	RTW-5002	Question Mark Game, Custom RCCL
G593-16001-SBLU	RTW-5002	Question Mark Game, Spanish
G593-00037-SP55	RTW-5007	Swing Time, Spanish, Custom
G593-10018-S600	RTW-5007	Swing Time, Spanish
G593-06001-BLUE	RTW-5023	At The Hop
G593-65001-BLUE	SAB-0006	Stars & Bars, Red, White & Blue, 11-Inch
G593-55001-FBLU	SAB-5005	Stars & Bars, French, 9-Inch
G593-06001-BLUE	SAB-5006	Stars & Bars
G593-55001-FBLU	SAB-5006	Stars & Bars, French, 9-Inch
G593-00002-55++	SAB-5017	Stars & Bars, 3 Line, 9-Inch
G593-00017-55MC	SAB-5017	Stars & Bars, Custom Monte Carlo, 3 Line
G593-10014-S600	SAB-5018	Stars & Bars, Red, White, And Blue, Spanish
G593-06001-BLUE	SAB-5019	Stars & Bars
G593-55001-SBLU	SAB-5020	Stars & Bars, Spanish, 9-Inch
G593-06001-BLCK	SBB-5006	Blazing 7's Generic Payday, English
G593-06001-BLCK	SBB-5011	Blazing 7's, Payday, Paris, Custom, 5 Lines
C593-10021-6000	SCC-5002	Leprechauns, 3 Line
C593-10021-S600	SCC-5003	Leprechauns, Spanish, 3 Line
C593-10021-F600	SCC-5005	Leprechauns, French, 3 Line
G593-06006-BKRU	SUC-5012	Super Continental, English
G593-06006-BLCK	SUC-5012	Super Continental
G593-16018-BLCK	SUC-5012	Super Continental, English
G593-55018-BLCK	SUC-5012	Super Continental, 9-Inch
G593-55018-FBLK	SUC-5012	Super Continental, French, 9-Inch
G593-INT11-55BK	SUC-5012	Super Continental
G593-65001-FCBK	SWB-0027	Eruptions, English/French Canadian, 11-Inch
G593-55001-FCBK	SWB-5027	Eruptions, English/French Canadian, 9-Inch
G593-55001-BLCK	SWB-5035	T-Rex, USAF, 9-Inch
G593-00017-6000	TBB-5006	Stars & Bars Generic, Payday, English
G593-16001-FBLK	TGD-5012	Triple Money, French
C593-10038-FR++	TGD-5014	Triple Money, French, 5 Lines
G593-00036-6000	TM7-5002	Triple Blazing 7's, Custom RCCL
C593-00087-6000	TOP-5001	Tower Of Power
C593-00087-6000	TOP-5002	Tower Of Power
C593-00087-6000	TOP-5009	Tower Of Power
C593-00087-6000	TOP-5010	Tower Of Power
C593-10030-F600	TOP-5010	Tower Of Power, French
C593-06001-BLCK	TR7-5003	Fabulous 7's
C593-10035-6000	TRB-5001	3 Way Pay
C593-C0092-CH60	TRB-5003	Golden 8's, Chinese
G593-00008-65FC	WFC-0001	English/French Canadian, 11-Inch
G593-00001-55FR	WFC-5001	Firecracker, French, 9-Inch
G593-55001-BLCK	WFC-5001	Firecracker, 9-Inch
G593-00001-55++	WFC-5003	Firecracker, 9-Inch
G593-55001-FCBK	WHL-5001	White Lightning, English/French Canadian, 9-Inch
G593-65001-FCBK	WLI-0013	Black Gold, English/French Canadian, 11-Inch
G593-00006-55++	WLI-5027	White Gold, 9-Inch
G593-00006-55FR	WLI-5027	White Gold, French, 9-Inch
G593-00016-55MC	WLI-5027	White Gold, Custom Monte Carlo
G593-65001-FCBK	WMB-0001	English/French Canadian, 11-Inch
G593-55001-BLCK	WRO-5007	Wild Rose
G593-55001-SBLK	WRO-5007	Wild Rose, Spanish
G593-60001-BLCK	WRO-5007	Wild Rose
G593-00021-6000	WRO-5022	Wild Rose, English
G593-10004-6000	WRO-5022	Wild Rose, English, 5 Lines
G593-10004-F600	WRO-5022	Wild Rose, French, 5 Lines
G593-06001-CHBK	WTS-5003	Wild Times, Chinese
C593-00078-6000	ZDM-5001	Bonus Line, Custom 4
C593-00078-S600	ZDM-5001	Bonus Line, Spanish, Tic Marks Reel 4
C593-10024-F600	ZDM-5001	Bonus Line, French
C593-10024-S600	ZDM-5001	Bonus Line, Spanish
C593-00051-6000		Monte Carlo, Wild
C593-00082-6000		Monte Carlo, Wild
C593-00083-6000		Monte Carlo, Rich & Famous
C593-00084-6000		Monte Carlo, Blazing 7's, Glitter Tapes
C593-00084-6000		Monte Carlo, Blazing 7's, Glitter Tapes
G593-06001-OT26		Generic, Single Line, English/French Canadian, Maroon Background
G593-06001-OTBK		Generic, Single Line, English/French Canadian, Black Background
G593-06001-OTBL		Generic, Single Line, English/French Canadian, Blue Background
G593-06001-OTGR		Generic, Single Line, English/French Canadian, Green Background
G593-06001-OTRD		Generic, Single Line, English/French Canadian, Red Background
G593-10036-FR++		Quick Hits, Black & White Double Jackpot, French

G690... Reel Glass (With Bill Acceptor)

GLASS	ART FORM	DESCRIPTION
G690-06006-CBLK	BFR-5002	Winning For Dummies
G690-06006-SBLK	BFR-5002	Winning For Dummies, Spanish
G690-06006-BLUE	BFR-5010	Richie Rich
G690-16006-FBLU	BFR-5010	Richie Rich, French
G690-60001-SPBK	BFR-5011	Andy Capp, Spanish
G690-06006-BLCK	BFR-5014	Betty Boop Frenzy
G690-06006-BLCK	BFR-5016	Playboy Frenzy
G690-06006-BLCK	BFR-5017	Playboy Frenzy
G690-06006-BLCK	BFR-5018	Playboy Frenzy
G690-06006-SBLK	BFR-5018	Playboy Frenzy, Spanish
G690-46003-CBLK	BFR-5019	Fireball Frenzy
G690-06006-CBLK	BFR-5022	Scatter Frenzy, Yellow Background
G690-06006-BLCK	BFR-5025	Saturday Night Live Frenzy
G690-06006-CBLK	BFR-5025	Saturday Night Frenzy
G690-06006-BLCK	BFR-5026	99 Bottles Of Beer Frenzy
G690-06006-CBLK	BFR-5026	99 Bottles Of Beer Frenzy
G690-06006-BLCK	BFR-5027	Quarter Millions Frenzy
G690-06006-CBLK	BFR-5027	Quarter Millions Frenzy
G690-06006-BLCK	BL4-5001	Blazing 7's 4 Reel
G690-06006-SBLK	BL4-5001	Blazing 7's 4 Reel, Spanish
G690-16006-FBLK	BL4-5001	Blazing 7's 4 Reel, French

©2003 Bally Gaming and Systems

G690... Reel Glass (With Bill Acceptor) (cont.)

GLASS	ART FORM	DESCRIPTION
G690-06006-BLCK	BL4-5002	Blazing 7's 4 Reel
G690-16006-FBLK	BL4-5003	Blazing 7's, 4 Reel, French
G690-60001-BLCK	BL7-5137	Jamaican Me Rich, Custom Isle Of Capri, Blue
G690-60001-BLCK	BL7-5138	Jamaican Me Rich, Custom Isle Of Capri, Blue
G690-60001-BLCK	BL7-5139	Jamaican Me Rich, Custom Isle Of Capri, Blue
G690-16001-FBLK	BS7-5001	Blazing 7's Scatter Pays Bonus, French
G690-60001-BLCK	BS7-5001	Blazing 7's Scatter Pays Bonus
G690-60001-SBLK	BS7-5001	Blazing 7's Scatter Pays, Spanish
G690-60001-BLCK	BS7-5002	Blazing 7's Scatter Pays Bonus
G690-60001-BLCK	BS7-5003	Betty Boop Scatter
G690-60001-BLCK	BS7-5004	Betty Boop Scatter
G690-00008-6000	BS7-5006	Blondie Scatter
G690-00008-6000	BS7-5007	Blondie Scatter
G690-06001-BLUE	BS7-5008	Popeye Scatter Pays
G690-06001-BLUE	BS7-5009	Popeye Scatter Pays
G690-06001-CBLK	BUY-5001	One Thousand
G690-60001-BLUE	BWT-5008	Dagwood's Big Bonus
G690-60001-BLUE	BWT-5009	Dagwood's Big Bonus
G690-60001-BLUE	BWT-5010	Dagwood's Big Bonus
G690-00003-6000	BWT-5011	Betty's World Tour
G690-60001-BLCK	BWT-5014	Popeye Spinach Bonus, Nv
G690-60001-BLCK	BWT-5015	Popeye Spinach Bonus
G690-60001-BLCK	BWT-5016	Popeye Spinach Bonus
G690-60001-BLUE	BWT-5020	Dagwoods Big Bonus
G690-60001-BLUE	BWT-5021	Dagwoods Big Bonus
G690-60001-SPBK	DCM-5073	Double Money, Spanish
G690-60001-BLCK	DM7-5059	Playboy Rabbit
G690-60001-SBLK	DM7-5059	Playboy Rabbit, Spanish
G690-60009-CBLK	DM7-5087	Lil' Abner
G690-06006-CBLK	FFR-5001	Bonus Frenzy, Yellow Background
G690-60001-CBLK	FRF-5001	Five Times Rich
G690-00009-6000	ITM-5003	In The Money, 5 Line
G690-00010-6000	ITM-5004	In The Money, 2 Coin
G690-C0010-6000	ITM-5004	In The Money, 2 Coin
G690-60009-CBLK	JM7-5013	I Love Jackpots
G690-60009-CBLK	JM7-5014	Castle Of Cash
G690-60001-BLCK	MOC-5001	Monte Carlo, Blazing 7's
G690-60001-SBLK	MOC-5001	Monte Carlo, Blazing 7's
G690-60001-BLCK	MOC-5002	Monte Carlo, Wild 7's
G690-60001-BLCK	MOC-5003	Monte Carlo, Rich & Famous
G690-60001-SBLK	MOC-5003	Monte Carlo, Rich & Famous
G690-60001-BLCK	MOC-5004	Playboy, White
G690-60001-BLCK	MOC-5005	Jamaican Me Rich, Custom Isle Of Capri, Yellow
G690-60001-BLCK	MOC-5006	Jamaican Me Rich, Custom Isle Of Capri, Yellow
G690-60001-BLCK	MOC-5007	Jamaican Me Rich, Custom Isle Of Capri, Yellow
G690-60001-BLCK	MOC-5013	Monte Carlo, Rich & Famous
G690-60001-CBLK	MOC-5016	Monte Carlo, Spin & Win, Blazing 7's, Purple
G690-60001-CBLK	MOC-5018	Monte Carlo, Wild Symbol, Blue
G690-60001-CBLK	MOC-5019	Monte Carlo, Rich & Famous, Red
G690-06006-CBLK	RF4-5001	Famous Bars
G690-06006-CBLK	SNF-5001	Saturday Night Live Frenzy
G690-06006-CBLK	SNF-5002	Saturday Night Live
G690-06006-BLCK	TFR-5001	Bonus Times Frenzy
G690-06006-BLCK	TFR-5002	Pool Ball Frenzy
G690-16001-FBLK	WTS-5003	Wild Times Slot
G690-60001-BLCK	WTS-5003	Wild Times Slot
G690-60001-BLCK	WTS-5009	Liberace
G690-60001-BLCK	WTS-5010	Blues Brother's Wild Times
G690-60001-BLCK	WTS-5011	Blues Brother's Wild Times
G690-60001-CBLK	WTS-5013	Blues Brothers Wild Times
G690-60001-CBLK	WTS-5014	Blues Brothers Wild Times
G690-06001-BLUE		Popeye Scatter Pays
G690-06006-BLCK		Blazing 7's 4 Reel
G690-60001-BLCK		Scatter Pays Bonus
G690-60001-BLCK		Scatter Pays Bonus
G690-60001-CBLK		Blues Brothers Wild Times

G779... Reel Glass (Credit)

GLASS	ART FORM	DESCRIPTION
G779-06001-BLCK	BDM-5011	Betty Boop, Blazing Betty
C779-00002-6000	BFR-5001	Bonus Frenzy
G779-06006-BLCK	BFR-5002	Winning For Dummies
C779-00005-6000	BFR-5003	Triple Bonus Frenzy
G779-06001-BLCK	BL7-5007	Blazing 7's
G779-06001-BLCK	BL7-5053	Blazing 7's
G779-06001-BLCK	BL7-5062	Blazing 7's
G779-06001-BLCK	BLD-5001	Blazing 7's Double Jackpot
G779-06001-BLCK	BNT-5001	Bonus Times
G779-06001-BLCK	BQM-5011	Betty Boop, Born To Boop
G779-06001-BLCK	BRT-5040	Betty Boop Roaring 20's
G779-06001-BLCK	BS7-5001	Scatter Pays Bonus
G779-06001-BLCK	BS7-5002	Scatter Pays Bonus
C779-00006-6000	DIV-5001	Diamonds & Devils
C779-00006-6000	DLD-5001	Double On Diamond Lines
G779-06001-BLCK	DM7-5011	Black & White
G779-06001-BLCK	DM7-5063	Double Money, Triple Blazing 7's
G779-06001-BLCK	DWR-5003	24 Karat
G779-06001-BLCK	DWR-5013	Two Times Money
G779-06001-BLCK	DWR-5014	Two Times Money
G779-00004-6000	ITM-5001	In The Money
G779-06001-BLCK	MNB-5001	Money Bars
G779-06001-BLCK	RH7-5001	Red Hot 7's
G779-06001-BLUE	RTW-5023	At The Hop
G779-06001-BLCK	TGD-5010	Triple Money
G779-06001-BLCK	TM7-5004	Triple Money
C779-06001-BLCK	TOP-5012	Tower Of Power Black & White
C779-06001-BLCK	TOP-5014	Tower Of Power Diamonds
G779-06001-BLCK	WRO-5039	Wild Money
G779-06001-BLCK	WTS-5012	Blues Brothers Wild Times
C779-00001-6000	ZDM-5001	Bonus Line
C779-00006-6000		Double On Diamond Lines
G779-06001-BLCK		Blues Brothers Wild Times
G779-06001-BLCK		Scatter Pays Bonus

©2003 Bally Gaming and Systems

ProSlot® 6000

G595... Display Glass

GLASS	ART FORM	DESCRIPTION
	G595-00061-ADBL	APD-5001	Any Position Double
	G595-00030-$5++	APE-5001	Wild Party, $5, Bally Custom
	G595-00037-BLCK	APN-5001	Hat Trick
G595-00037-HAT+	APN-5001	Hat Trick
G595-00071-TIGR	APT-0001	Wild Tigers
	G595-00071-TIGR	APT-0002	Wild Tigers
	G595-00074-FLOT	APT-0003	Fruit Loot
	G595-00071-TIGR	APT-5001	Wild Tigers
	G595-00071-TIGR	APT-5002	Wild Tiger
	G595-00074-FLOT	APT-5003	Fruit Loot
	G595-00028-2WLD	APT-5014	Deuces Wild
	G595-00028-2WLD	APT-5015	Deuces Wild
G595-00100-BANK	APT-5017	Bank Of The Nile, Custom Caesars
	G595-00099-TRIP	APT-5018	7's Win A Trip, Custom
G595-00125-ELEP	APT-5021	Wild Elephant
G595-00159-BFIR	APT-5023	Ball Of Fire
	G595-00159-BFIR	APT-5024	Ball Of Fire
	G595-00220-WIN+	APT-5025	Win
G595-00220-WIN+	APT-5026	Win
G595-00250-SAAR	APT-5028	Saarland Jackpot, Custom
	G595-00289-CASH	APT-5029	Atlantis Cash, Custom Sun International
G595-00347-ATLA	APT-5030	Wild Atlantis Cash, Custom Sun Atlantis
G595-00352-DLPN	APT-5031	Dolphin Mania
G595-00389-A+++	APT-5032	Estoril Povoa Express
G595-00389-B+++	APT-5032	Estoril Povoa Express
G595-00435-EURO	APT-5033	Euro-Pot West Spiel Jackpot
G595-00030-$10+	APW-5001	Wild Party, $10, Custom Bally
G595-00030-$2++	APW-5001	Wild Party, $2, Custom Bally Las Vegas
G595-00030-$25+	APW-5001	Wild Party, $25, Custom Bally Las Vegas
G595-00030-++++	APW-5001	Wild Party, Custom Bally Las Vegas
G595-00225-$5++	APW-5002	Wild, $5, Bally Las Vegas
G595-00310-++++	APW-5004	Jackpot Fiesta, Custom Park Place
	C595-00336-$2++	APW-5005	Wild Party, $2
	C595-00336-$5++	APW-5005	Wild Party, $5
G595-00336-++++	APW-5005	Wild Party
G595-00447-$10+	APW-5006	Paris Hot Air Baloons, $10, Custom
	G595-00447-$25+	APW-5006	Paris Hot Air Baloons, $25, Custom
G595-00447-$5++	APW-5006	Paris Hot Air Baloons, $5, Custom
G595-00447-++++	APW-5006	Paris Hot Air Baloons, Custom
	C595-00829-++++	APW-5008	Blue Martini, Custom Park Place
	G595-00097-RICH	AUS-5001	Rich & Famous, Double Wild Symbol, Custom Australia
	G595-00096-++++	AUS-5002	Australian Diamond Winners
G595-00224-$5++	BAR-5003	Bars, $5, Bally Las Vegas
G595-00007-++++	BAR-5004	Jackpot Bars
	G595-00073-++++	BAR-5005	Twist & Shout
G595-00093-++++	BAR-5006	Bars
G595-00231-BALY	BAR-5007	Jackpot Bars, Custom Bally Las Vegas
G595-00228-$1C+	BC7-5001	Any 7, $100, Custom Bally Las Vegas
	G595-00076-$1C+	BC7-5004	Any Golden Nugget, $100, Custom Golden Nugget
	G595-00076-$1C+	BC7-5006	Triple Blazing 7's, $100, Custom Beau Rivage
G595-00455-$1K+	BCP-5001	Flur De Lei, $1000, Custom Paris
G595-00455-$5C+	BCP-5001	Flur De Lei, $500, Custom Paris
G595-00455-$1C+	BCP-5002	Flur De Lei, $100, Custom Paris
G595-00451-BETY	BDM-5001	Betty Boop Devil Double Jackpot Blazing Triple 7's
	G595-00451-BETY	BDM-5002	Betty Boop Devil
	G595-00451-BETY	BDM-5003	Betty Boop Devil Double Jackpot Blazing 7's
	G595-00451-BETY	BDM-5004	Betty Boop Devil
	G595-00451-BETY	BDM-5005	Betty Boop Double Jackpot Blazing 7's Devil
	G595-00451-BETY	BDM-5006	Betty Boop Double Jackpot Blazing 7's Devil
	G595-00451-BETY	BDM-5007	Betty Boop Double Jackpot Blazing 7's Devil
	G595-00451-BETY	BDM-5008	Betty Boop Double Jackpot Blazing 7's Devil
	G595-00451-BETY	BDM-5009	Betty Boop Double Jackpot Blazing 7's Devil
	G595-00451-BETY	BDM-5010	Blazing Betty
	G595-00451-BETY	BDM-5011	Betty Boop, Blazing Betty
	C595-00752-BZ7$	BDO-5001	Blazing Dollars & 7's
	C595-00752-BZ7$	BDO-5002	Blazing Dollars & 7's
	C595-00784-++++	BDO-5002	Blazing Dollars & 7's
	C595-00753-$FRZ	BF3-5001	Money Bonus Frenzy
G595-00492-BETY	BFB-5001	Betty Boop Respin Round Up, Custom
	G595-00492-BETY	BFB-5002	Betty Boop Respin Round Up, Custom
	G595-00492-BETY	BFB-5003	Betty Boop Respin Round Up, Custom
	G595-00492-BETY	BFB-5004	Betty Boop Respin Round Up, Custom
C595-00514-BFRZ	BFR-5001	Bonus Frenzy
	C595-00740-DUMY	BFR-5002	Winning For Dummies
	C595-00660-3FRZ	BFR-5003	Triple Bonus Frenzy
	C595-00557-POPI	BFR-5004	Popeye Bonus Frenzy
	C595-00557-POPI	BFR-5005	Popeye Bonus Frenzy
	C595-00690-5XBF	BFR-5006	5 Times Bonus Frenzy
	C595-00514-BFRZ	BFR-5007	Bonus Frenzy
	C595-00514-BFRZ	BFR-5008	Bonus Frenzy
	C595-00740-DUMY	BFR-5009	Winning For Dummies
	C595-00709-RICH	BFR-5010	Richie Rich
	C595-00589-ANDY	BFR-5011	Andy Capp
	C595-00723-BLO6	BFR-5012	Blondie Frenzy
	C595-00723-BLO6	BFR-5013	Blondie Frenzy

GLASS	ART FORM	DESCRIPTION
	C595-00724-BETY	BFR-5014	Betty Boop Frenzy
	C595-00724-BETY	BFR-5015	Betty Boop Frenzy
	C595-00778-++++	BFR-5016	Playboy Frenzy
	C595-C0779-$5++	BFR-5017	Playboy Frenzy, $5
	C595-00780-++++	BFR-5018	Playboy Frenzy
	C595-00780-SP++	BFR-5018	Playboy Frenzy, Spanish
	C595-00823-FBAL	BFR-5019	Fireball Frenzy
	C595-00823-FBAL	BFR-5020	Fireball Frenzy
	C595-00723-BLO6	BFR-5021	Blondie Frenzy
	C595-00820-SCFZ	BFR-5022	Scatter Frenzy
	C595-00700-JAMA	BFR-5023	Jamaican Me Rich
	C595-00701-JAMA	BFR-5023	Jamaican Me Rich
	C595-00701-JAMA	BFR-5024	Jamaican Me Rich
	C595-00814-SNFZ	BFR-5025	Saturday Night Live Frenzy
	C595-00824-99FZ	BFR-5026	99 Bottles Of Beer Frenzy
	C595-00854-QTML	BFR-5027	Quarter Millions Frenzy
	G595-00459-$5++	BG7-5001	Paris Bonus, $5
	G595-00459-$10+	BG7-5002	Paris Bonus, $10
	G595-00459-$25+	BG7-5003	Paris Bonus, $25
G595-00459-$5++	BGW-5001	Paris Bonus, $5
G595-00459-$10+	BGW-5002	Paris Bonus, $10
G595-00459-$25+	BGW-5003	Paris Bonus, $25
G595-00499-$25+	BGW-5004	Las Vegas Hilton Bonus, $25
G595-00499-$10+	BGW-5005	Las Vegas Hilton Bonus, $10
	G595-00499-$5++	BGW-5006	Las Vegas Hilton Bonus, $5
	G595-00019-FQ25	BK7-5023	French Quarters
G595-00188-BL2C	BL2-5001	2nd Chance Blazing 7's
G595-00402-10K+	BL3-5002	Three's A Charm
	C595-00682-BL74	BL4-5001	Blazing 7's, 4 Reel
	C595-00682-BL74	BL4-5002	Blazing 7's, 4 Reel
	C595-00743-BL4+	BL4-5003	Blazing 7's, 4 Reel
	C595-00031-BL7+	BL7-0005	Blazing 7's
	C595-00031-BL7+	BL7-0011	Blazing 7's
	C595-00031-BL7+	BL7-0021	Blazing 7's
	C595-00031-BL7+	BL7-0030	Blazing 7's
	G595-00011-GEMS	BL7-0046	Reel Gems
	G595-00011-GEMS	BL7-0047	Reel Gems
	G595-00011-GEMS	BL7-0048	Reel Gems
C595-00031-BL7+	BL7-5007	Blazing 7's
	C595-00031-BL7+	BL7-5018	Blazing 7's
	C595-00031-BL7+	BL7-5020	Blazing 7's
	C595-00031-BL7+	BL7-5021	Blazing 7's
	C595-00031-BL7+	BL7-5026	Blazing 7's
C595-00031-RED+	BL7-5026	Blazing 7's, Red
G595-00011-GEMS	BL7-5041	Reel Gems
	G595-00011-GEMS	BL7-5052	Reel Gems
	C595-00031-BL7+	BL7-5053	Blazing 7's
	C595-00761-NOVA	BL7-5053	Blazing 7's, Custom Nova Scotia
	G595-00031-BL7+	BL7-5053	Blazing 7's
G595-00098-FLM7	BL7-5056	Flaming 7's
	C595-00031-BL7+	BL7-5057	Blazing 7's
	G595-00011-GEMS	BL7-5058	Reel Gems
G595-00036-MGM+	BL7-5059	Majestic Lions, Custom Mgm
G595-00081-NILE	BL7-5060	Treasures Of The Nile, Custom Luxor
	G595-00036-MGM+	BL7-5061	Mgm Lions, $100
	C595-00031-BL7+	BL7-5062	Blazing 7's
	G595-00248-ST7B	BL7-5062	Station 7's, Custom Station Casinos
G595-00023-MOON	BL7-5064	Moonshadow
G595-00108-HOT+	BL7-5065	Hot Hot Hot
G595-00109-CASH	BL7-5066	Blast Of Cash
	C595-00031-BL7+	BL7-5067	Blazing 7's
	G595-00031-BL7+	BL7-5069	Blazing Triple 7's
G595-00126-FLAM	BL7-5070	Flamingos
G595-00139-++++	BL7-5072	Mixed Bars, Custom Itt Sheraton
G595-00143-CASH	BL7-5073	Worlds Of Cash
	G595-00100-BANK	BL7-5074	Bank Of The Nile
	G595-00138-++++	BL7-5077	Mixed Bars, Custom Itt Sheraton
G595-00170-BLUE	BL7-5078	Marlin Mania, Blue
	G595-00170-MRLN	BL7-5078	Marlin Mania, Yellow
G595-00180-ISLD	BL7-5080	Island Gods, Tropicana
G595-00187-ROMN	BL7-5081	Roman Rewards, Custom Caesars Palace Las Vegas
	G595-00184-GRN+	BL7-5082	Sheraton Gold, Green
	G595-00184-SHGD	BL7-5082	Sheraton Gold
G595-00198-CDAD	BL7-5083	Crazy Crawdads
	C595-00031-BL7+	BL7-5084	Blazing 7's
	G595-00087-++++	BL7-5086	Blazing 7's, Custom Monte Carlo Hotel
G595-00240-MCLO	BL7-5087	Monte Carlo Casino Custom Game
	G595-00240-MCLO	BL7-5088	Monte Carlo Riches, Custom Monte Carlo Casino
	G595-00245-PINK	BL7-5089	Pink Flamingo, Flamingo Kansas City
	G595-00245-PINK	BL7-5090	Pink Flamingo,Custom
G595-00251-KING	BL7-5091	Kings Ransom, Custom The Reserve
G595-00259-LUXR	BL7-5092	Luxor Riches
G595-00262-STRN	BL7-5093	Staturn's Rings, Custom Las Vegas Hilton
G595-00265-NY++	BL7-5094	Big Apple, Custom New York, New York
G595-00268-FLGO	BL7-5095	Flamingo Fortune, Custom

©2003 Bally Gaming and Systems

| - Revised, || - New

G595... Display Glass (cont.)

GLASS	ART FORM	DESCRIPTION
G595-00271-CIRC	BL7-5096	Flying Fortunes, Custom Circus Circus
G595-00247-ST7R	BL7-5097	Station 7's, Custom Station Casino Kansas City, Red
G595-00248-ST7B	BL7-5097	Station 7's, Custom Station Casino Kansas City, Blue
G595-00247-ST7R	BL7-5098	Station 7's, Custom Station Casino Kansas City, Red
G595-00248-ST7B	BL7-5098	Station 7's, Custom Station Casino Kansas City, Blue
G595-00247-ST7R	BL7-5099	Station 7's, Custom Station Casino Kansas City, Red
G595-00248-ST7B	BL7-5099	Station 7's, Custom Station Casino Kansas City, Blue
G595-00291-CHSR	BL7-5101	Station 7's, St. Charles, Red
G595-00292-CHSB	BL7-5101	Station 7's, St. Charles, Blue
G595-00300-PARS	BL7-5103	Fabulous Paris
G595-00325-LITE	BL7-5104	Light Speed, Custom Hilton Las Vega
G595-00325-LITE	BL7-5105	Light Speed, Custom Hilton Las Vegas
G595-00217-TBLZ	BL7-5106	Trailblazer
G595-00313-BONZ	BL7-5107	Binion's Bonanza
G595-00343-PRM$	BL7-5108	Prima Dollar
G595-00354-BZGD	BL7-5109	Blazing Gold, Golden Nugget
G595-00294-FRZY	BL7-5110	Flamingo Frenzy, Custom Flamingo Hilton
G595-00365-KLON	BL7-5111	Klondike Nugget
G595-00369-RITA	BL7-5112	Rio Rita, Custom
G595-00334-BZGD	BL7-5114	Blazing Gold, Golden Nugget
G595-00378-BWB7	BL7-5115	Black & White Blazing 7's
G595-00378-BWB7	BL7-5116	Black & White Blazing 7's
G595-00378-BWB7	BL7-5117	Black & White Blazing 7's
G595-00261-24KT	BL7-5118	24 Karat
G595-00400-GLOR	BL7-5119	Jackpots Galore, Custom Riveria
G595-00400-GLOR	BL7-5120	Jackpots Galore, Custom Riveria
G595-00400-GLOR	BL7-5121	Jackpots Galore, Custom Riveria
G595-00400-GLOR	BL7-5122	Jackpots Galore, Custom Riveria
G595-00400-GLOR	BL7-5123	Jackpots Galore, Custom Riveria
G595-00414-MARX	BL7-5124	Grawert Neukolln/Karl Marx, Custom
G595-00436-$1++	BL7-5126	Golden Lotus, Custom Mandalay Bay $1
G595-00436-$2++	BL7-5126	Golden Lotus, Custom Mandalay Bay $2
G595-00446-PRS2	BL7-5128	Paris Magnifique, Custom
G595-00454-VENC	BL7-5129	Treasures Of Venice, Custom
G595-00454-VENC	BL7-5130	Treasures Of Venice, Custom
G595-00500-TIGR	BL7-5131	Royal Tiger, Custom Mandalay Bay
G595-00501-$1C+	BL7-5132	Blazing 7's, $100, Custom Mgm Detroit
C595-00031-BL7+	BL7-5133	Blazing 7's
C595-00701-JAMA	BL7-5137	Jamaican Me Rich, Custom Isle Of Capri
C595-00701-JAMA	BL7-5138	Jamaican Me Rich, Custom Isle Of Capri
C595-00701-JAMA	BL7-5139	Jamaican Me Rich, Custom Isle Of Capri
C595-00699-ASCU	BL7-5140	Perfect, Custom John Ascuaga's Nugget
G595-00181-GENE	BL7-5142	Red Hot Genies, Harrah's
C595-00550-BETY	BLB-5001	Blazing 7's, Betty Boop
C595-00550-BETY	BLB-5002	Blazing 7's, Betty Boop
C595-00550-BETY	BLB-5003	Blazing 7's, Betty Boop
C595-00550-BETY	BLB-5004	Blazing 7's, Betty Boop
C595-00550-BETY	BLB-5006	Blazing 7's, Betty Boop
C595-00550-BETY	BLB-5007	Blazing 7's, Betty Boop
C595-00550-BETY	BLB-5008	Blazing 7's, Betty Boop
C595-00703-++++	BLD-5001	Blazing 7's Double Jackpot
G595-00344-B7DJ	BLD-5001	Blazing 7's Double Jackpot
G595-00456-BZ2X	BLD-5001	Blazing 7's Double Jackpot
G595-00344-B7DJ	BLD-5002	Blazing 7's Double Jackpot
G595-00391-BWX2	BLD-5003	Black & White Doubler
G595-00456-BZ2X	BLD-5004	Double Blazing 7's, Double Jackpot
G595-00217-TBLZ	BLF-5001	Trailblazer
G595-00217-TBLZ	BLF-5002	Trailblazer
G595-00296-7DLX	BLF-5003	Blazing 7's Deluxe
G595-00296-7DLX	BLF-5004	Blazing 7's Deluxe
C595-00855-UKB7	BLK-5001	Blazing 7's, United Kingdom
C595-00855-UKB7	BLK-5002	Blazing 7's, United Kingdom
C595-00855-UKB7	BLK-5003	Blazing 7's, United Kingdom
G595-00452-BETY	BLM-5001	Betty Boop's Big Hit Triple 7's
G595-00452-BETY	BLM-5002	Betty Boop's Big Hit
G595-00452-BETY	BLM-5003	Betty Boop's Big Hit
G595-00452-BETY	BLM-5004	Betty Boop's Big Hit Triple 7's
G595-00452-BETY	BLM-5005	Betty Boop's Big Hit
G595-00467-PARS	BLX-5009	Le Jacque Pot Sevy, Blazing 7's, Custom Paris
G595-00034-++++	BM7-0004	Magnificient Jackpot 7's
G595-00056-++++	BM7-0009	Jackpot 7's
G595-00050-BG7+	BM7-0011	Black Gold
G595-00050-BG7+	BM7-0013	Gold Red 7's
G595-00050-BG7+	BM7-5008	Black Gold
G595-00204-BLY7	BM7-5010	Bally Gold, Custom Bally Las Vegas
G595-00050-BG7+	BM7-5013	Park Place Jackpot
G595-00221-$10+	BM7-5014	Blazing 7's, $10
G595-00221-$25+	BM7-5014	Blazing 7's $25
G595-00221-$5++	BM7-5014	Blazing 7's, Custom Bally Las Vegas, $5
G595-00445-PARS	BM7-5016	Paris Gold, Custom
G595-00050-BG7+	BM7-5017	Gold Red 7's, Bally France
C595-00124-++++	BM7-5025	Aladdin's Lamp
G595-00050-BG7+	BM7-5026	Black Gold
C595-00760-EFX+	BM7-5027	Efx
G595-00123-HOT7	BM7-5027	Red Hot 7's

GLASS	ART FORM	DESCRIPTION
G595-00165-EFX+	BM7-5028	Efx, Custom Mgm
G595-00165-EYES	BM7-5028	Efx Eyes, Custom Mgm
G595-00183-FLM7	BM7-5032	Flaming 7's, Custom Mirage Casinos
G595-00123-HOT7	BM7-5033	Red Hot 7's
G595-00165-EFX+	BM7-5034	Efx, Custom Mgm
G595-00165-EFX+	BM7-5035	Efx, Custom Mgm
G595-00211-UFO+	BM7-5036	Ufo
G595-00230-GOLD	BM7-5037	Caesars Gold, Custom
G595-00247-ST7R	BM7-5038	Station 7's, Custom Kansas City Station, Red
G595-00248-ST7B	BM7-5038	Station 7's, Custom Kansas City Station, Blue
G595-00211-OVNI	BM7-5039	Ufo, French
G595-00211-UFO+	BM7-5039	Ufo
G595-00247-ST7R	BM7-5040	Station 7's, Red
G595-00248-ST7B	BM7-5040	Station 7's, Blue
G595-00181-GENE	BM7-5041	Red Hot Genies, Custom Harrah's
G595-00211-OVNI	BM7-5042	Ufo, French
G595-00286-STAR	BM7-5043	Blazing Star, Custom Harrah's Las Vegas
G595-00327-UFO+	BM7-5044	Ufo, Custom Las Vegas Hilton
G595-00489-BNTM	BNT-5001	Bonus Times
G595-00489-BNTM	BNT-5002	Bonus Times
C595-00489-BNTM	BNT-5003	Bonus Times
C595-00695-++++	BNT-5003	Bonus Times
G595-C0849-++++	BNT-5004	Most Wanted, Park Place
G595-00476-BETY	BQM-5001	Betty Boop's Born To Boop
G595-00476-BETY	BQM-5002	Betty Boop's Born To Boop
G595-00476-BETY	BQM-5003	Betty Boop's Born To Boop
G595-00476-BETY	BQM-5004	Betty Boop's Born To Boop
G595-00476-BETY	BQM-5005	Betty Boop's Born To Boop
G595-00476-BETY	BQM-5006	Betty Boop's Born To Boop
G595-00476-BETY	BQM-5007	Betty Boop's Born To Boop
G595-00476-BETY	BQM-5008	Betty Boop's Born To Boop
C595-00476-BETY	BQM-5009	Betty Boop's Question Mark Game
G595-00476-BETY	BQM-5010	Betty Boop's Born To Boop
G595-00476-BETY	BQM-5011	Betty Boop's Born To Boop
C595-00654-++++	BRT-5001	Betty Boop's World Tour
G595-00450-BETY	BRT-5001	Betty Boop's Roaring 20's
G595-00450-BETY	BRT-5002	Betty Boop's Roaring 20's
G595-00450-BETY	BRT-5003	Betty Boop's Roaring 20's
G595-00450-BETY	BRT-5004	Betty Boop's Roaring 20's
G595-00504-BETY	BRT-5005	Betty Boop's Swingtime
G595-00504-BETY	BRT-5006	Betty Boop's Swingtime
G595-00504-BETY	BRT-5007	Betty Boop's Swingtime
G595-00504-BETY	BRT-5008	Betty Boop's Roaring 20's
G595-00450-BETY	BRT-5009	Betty Boop's Roaring 20's
G595-00450-BETY	BRT-5010	Betty Boop's Roaring 20's
G595-00450-BETY	BRT-5011	Betty Boop's Roaring 20's
G595-00476-BETY	BRT-5012	Betty Boop's Born To Boop
G595-00476-BETY	BRT-5013	Betty Boop's Born To Boop
C595-00516-BETY	BRT-5014	All American Betty
C595-00516-BETY	BRT-5015	All American Betty
C595-00516-BETY	BRT-5016	All American Betty
C595-00516-BETY	BRT-5017	All American Betty
C595-00519-PDAY	BRT-5018	Swingtime Payday
C595-00520-PDAY	BRT-5019	Roaring 20's Payday
G595-00520-PDAY	BRT-5019	Roaring 20's Payday
C595-00733-BLO1	BRT-5022	Blondie's, Roaring 20's
G595-00734-BLO2	BRT-5023	Blondie
G595-00450-BETY	BRT-5026	Betty Boop's Roaring 20's
G595-00504-BETY	BRT-5027	Betty Boop's Swingtime
G595-00516-BETY	BRT-5028	All American Betty
C595-00733-BLO1	BRT-5029	Blondie's Big Dough
C595-00733-BLO1	BRT-5030	Blondie's Big Dough
C595-00733-BLO1	BRT-5031	Blondie's Big Dough
C595-00734-BLO2	BRT-5032	Blondie's Big Spender
C595-00735-BLO2	BRT-5032	Blondie's Big Spender
C595-00734-BLO2	BRT-5033	Blondie's Big Spender
C595-00734-BLO2	BRT-5034	Blondie's Big Spender
G595-00504-BETY	BRT-5035	Betty Boop's Swingtime
C595-00535-MKT+	BRT-5036	Play The Market
G595-00504-BETY	BRT-5037	Betty Boop's Swingtime, International
G595-00450-BETY	BRT-5038	Blondie's Roaring 20's
G595-00450-BETY	BRT-5039	Blondie's Roaring 20's
G595-00450-BETY	BRT-5040	Blondie's Roaring 20's
G595-00645-IN$+	BRT-5041	Payday, In The Money Theme, Park Place
G595-C0847-++++	BRT-5041	Payday, In The Money Theme, Park Place
C595-00692-BLZ7	BS7-5001	Blazing 7's Scatter Pays Bonus
C595-00692-BLZ7	BS7-5002	Scatter Pays Bonus
C595-00693-BETY	BS7-5003	Betty Boop's Super Scatter
C595-00693-BETY	BS7-5004	Betty Boop's Scatter
C595-00693-BETY	BS7-5005	Betty Boop's Scatter
C595-00694-BLO5	BS7-5006	Blondie's Scatter Pay
C595-00694-BLO5	BS7-5007	Blondie's Scatter Pay
C595-00557-POPI	BS7-5008	Popeye Scatter Pay
C595-00557-POPI	BS7-5009	Popeye Super Scatter Pay
C595-00693-BETY	BS7-5010	Betty Boop's Scatter

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlot® 6000

G595... Display Glass (cont.)

GLASS	ART FORM	DESCRIPTION
C595-00693-BETY	BS7-5011	Betty Boop's Scatter
C595-00693-BETY	BS7-5012	Betty Boop's Scatter
C595-00694-BLO5	BS7-5014	Blondie's Scatter Pays
G595-00055-CRWI	BUB-0002	Crazy Joker
G595-00055-CRWI	BUB-0019	Crazy Joker
G595-00055-CRWI	BUB-5006	Crazy 7's
G595-00015-PLUM	BUB-5027	Plum Crazy
G595-00018-GATR	BUB-5028	Balligator
G595-00015-PLUM	BUB-5029	Gold Rush
G595-00055-CRWI	BUB-5031	Crazy Joker
G595-00112-JOKR	BUB-5031	Crazy Joker
G595-00018-GATR	BUB-5032	Balligator
G595-00127-++++	BUB-5033	Wild Jestors
G595-00055-CRWI	BUB-5034	Crazy 7's
G595-00156-CZRL	BUB-5035	Happy Joker
G595-00164-LKLZ	BUB-5036	Lucky Lizard, Custom
G595-00305-WEST	BUB-5040	Western Crazy Joker, Custom Park Place
G595-00018-GATR	BUB-5042	Balligator
G595-00015-PLUM	BUB-5043	Plum Crazy
G595-00411-FROG	BUB-5044	Frogs
G595-00413-CCOW	BUB-5045	Cash Cow
C595-00798-1THO	BUY-5001	One Thousand
C595-00654-++++	BWT-5001	Betty Boop's World Tour
C595-00684-++++	BWT-5002	Betty Boop's World Tour
C595-00689-++++	BWT-5003	Betty Boop's World Tour
C595-00684-++++	BWT-5004	Betty Boop's World Tour
C595-00684-++++	BWT-5005	Betty Boop's World Tour
C595-00684-++++	BWT-5006	Betty Boop's World Tour
C595-00684-++++	BWT-5007	Betty Boop's World Tour
C595-00685-++++	BWT-5008	Dagwood's Big Bonus
C595-00686-++++	BWT-5009	Dagwood's Big Bonus
C595-00686-++++	BWT-5010	Dagwood's Big Bonus
C595-00675-++++	BWT-5011	Betty Boop's World Tour
C595-00675-CRDT	BWT-5011	Betty Boop's World Tour
C595-00675-FR++	BWT-5011	Betty Boop's World Tour, French
C595-00556-FR++	BWT-5012	Betty Boop's World Tour, French
C595-00684-++++	BWT-5013	Betty Boop's World Tour
C595-00691-++++	BWT-5014	Popeye Spinach Bonus
C595-00691-NV++	BWT-5014	Popeye Spinach Bonus, Nevada
C595-00691-++++	BWT-5015	Popeye Spinach Bonus
C595-00691-++++	BWT-5016	Popeye Spinach Bonus
C595-00710-++++	BWT-5019	Frankie & Annette
C595-00710-CRDT	BWT-5019	Frankie & Annette
C595-00685-++++	BWT-5020	Dagwood's Big Bonus
C595-00686-++++	BWT-5021	Dagwood's Big Bonus
C595-00802-BWLD	BWW-5001	Black & White
G595-00002-++++	CB7-0001	Mixed 7's
G595-00047-++++	CB7-0003	Cold Cash
G595-00070-FC++	CB7-0003	French Canadian
G595-00065-BLUE	CB7-0010	Aqua 7's, Park Place
G595-00002-++++	CB7-5001	Naughty Nickels
G595-00047-++++	CB7-5003	Cold Cash
G595-00070-FC++	CB7-5003	Cold Cash, French Canadian
G595-00171-CASH	CB7-5003	Cold Cash
G595-00002-++++	CB7-5005	Naughty Nickels
G595-00065-BLUE	CB7-5010	Aqua 7's
G595-00215-FCRD	CB7-5010	Cherries, French Canadian
G595-00002-++++	CB7-5011	Naughty Nickels
G595-00002-++++	CB7-5014	Naughty Nickels
G595-00205-MBAG	CB7-5021	Money Bags, Custom Bally Las Vegas
G595-00019-FQ25	CB7-5023	French Quarters
G595-00002-++++	CB7-5025	Naughty Nickels
G595-00002-++++	CB7-5026	Naughty Nickels
G595-00019-FQ25	CB7-5027	French Quarters, 25¢
G595-00019-FQ25	CB7-5028	French Quarters
G595-00002-++++	CB7-5029	Naughty Nickels
G595-00019-FQ25	CB7-5030	French Quarters, 25¢
G595-00083-LUXR	CB7-5031	Chamber Of Choices, Custom Luxor
G595-00163-QTRH	CB7-5034	Quarter Horse, Custom Prarie Meadows
G595-00002-++++	CB7-5035	Naughty Nickels
G595-00218-CLUB	CB7-5036	Casino Club
G595-00210-AMER	CB7-5038	All American
C595-00565-SUP7	CB7-5039	Super Blazing 7's
C595-00565-SUP7	CB7-5040	Super Blazing 7's
G595-00075-$25+	CBM-5004	Black Gold, $25
G595-00076-$1C+	CBM-5004	Black Gold, $100
G595-00146-$10+	CBM-5004	Black Gold, $10
G595-00146-$5++	CBM-5004	Cherry Bars Black, $5
G595-00148-GATE	CLJ-5003	San Fransisco Golden Gate Bridge, Custom
G595-00065-RED+	CM7-0003	Red 7's
G595-00065-RED+	CM7-0019	Red 7's
G595-00065-BLCK	CM7-0027	Black 7's
G595-00065-RED+	CM7-5003	Red 7's
G595-00092-TR7+	CM7-5003	Cherry/Mix Bars/7's, 3 Red 7's
G595-00215-RED+	CM7-5019	Cherry, Custom Casino De Hull

GLASS	ART FORM	DESCRIPTION
G595-00092-TR7+	CM7-5027	Cherry Mixed Bars
G595-00118-BLCK	CM7-5027	7's
G595-00090-$1++	CM7-5060	Mixed Bars 7's, $1
G595-00090-25C+	CM7-5060	Mixed Bars 7's
G595-00266-BLIT	D7B-5002	Double 7 Blue Light Special
G595-00425-SHRK	DAP-5001	Pool Sharks
G595-00425-SHRK	DAP-5002	Pool Sharks
G595-00189-TRBL	DB5-5001	Double Trouble
G595-00330-++++	DB5-5001	Double Trouble
G595-00285-DJP+	DB7-5002	Double Jackpot
G595-00387-PDAY	DBB-5001	Payday, Black & White
G595-00387-PDAY	DBB-5002	Payday, Black & White
G595-00387-PDAY	DBB-5004	Payday, Black & White
G595-00387-PDAY	DBB-5005	Payday, Black & White
G595-00387-PDAY	DBB-5006	Payday, Black & White
C595-C0848-++++	DBB-5007	Payday, Double Money, Park Place
C595-00826-POPI	DBF-5001	Popeye Double Jackpot
C595-00451-BETY	DBF-5002	Betty Boop's Double Jackpot
C595-00827-CRDT	DBF-5003	Blondie's Double Jackpot
G595-00175-SPIN	DBK-5002	Win & Spin, Respin Feature
G595-00241-DROS	DBX-5006	Reel Lucky Double Wild Rose
G595-00244-BW++	DBX-5007	Reel Lucky Black & White
G595-00468-PARS	DBX-5012	Le Jacque Pot Sevy, Black & White, Custom Paris
G595-00238-GIME	DC5-5001	Gimme 5, 5 Times
G595-00316-5XBW	DC5-5002	5x Black & White
G595-00363-5XBW	DC5-5002	Black & White
G595-00396-++++	DC5-5004	Harrah's Globe, Custom
G595-00238-GIME	DC5-5005	Gimme 5, 5 Times
G595-00392-5XWR	DC5-5006	Wild Rose 5x
G595-00395-5XJW	DC5-5007	5 Times Joker Wild
G595-00115-CENT	DC5-5008	5 Times Double Dragon
G595-00469-PARS	DC5-5009	Le Jacque Pot Sevy, 5 Times Pay, Custom Paris
C595-00697-++++	DC5-5010	Black & White 5 Times
C595-C0697-CRDT	DC5-5010	Black & White 5 Times
G595-00363-5XBW	DC5-5010	Black & White
C595-00756-5X$+	DC5-5011	5 Times Money
C595-00756-5X$+	DC5-5012	5 Times Money
C595-00756-5X$+	DC5-5013	5 Times Money
C595-00756-5X$+	DC5-5014	5 Times Money
C595-00756-5X$+	DC5-5015	5 Times Money
G595-00285-DJP+	DCB-5001	Double Jackpot
G595-00058-DEGL	DCM-0022	Double Eagle
G595-00058-DEGL	DCM-0023	Double Eagle
G595-00022-++++	DCM-5031	Californa Dreamin'
G595-00088-++++	DCM-5031	Californa Dreamin'
G595-00022-++++	DCM-5032	Californa Dreamin'
G595-00022-++++	DCM-5034	Californa Dreamin'
G595-00244-BW++	DCM-5035	Black & White
G595-00022-++++	DCM-5036	Californa Dreamin'
G595-00022-++++	DCM-5037	Californa Dreamin'
G595-00022-++++	DCM-5039	Californa Dreamin'
G595-00136-TIME	DCM-5040	Double Time
G595-00329-++++	DCM-5040	Double Time
G595-00136-TIME	DCM-5041	Double Time
G595-00022-++++	DCM-5042	Californa Dreamin'
G595-00216-TAKE	DCM-5043	Double Take
G595-00246-2GLD	DCM-5044	Double Gold
G595-00328-++++	DCM-5044	Double Gold
G595-00246-2GLD	DCM-5045	Double Gold
G595-00216-TAKE	DCM-5046	Double Take
G595-00275-ALEX	DCM-5048	Alexander The Great, Custom
G595-00246-2GLD	DCM-5049	Double Gold
G595-00022-++++	DCM-5050	California Dreamin'
G595-00308-RWAY	DCM-5051	Runaway Jackpots
G595-00236-BL7X	DCM-5052	Blazing 7's Times Pay
G595-00236-BL7X	DCM-5053	Blazing 7's Times Pay
G595-00022-++++	DCM-5054	California Dreamin'
G595-00380-10X+	DCM-5055	Black & White 10 Times Pays, Kilroy
G595-00398-5X10	DCM-5057	5 & 10 Times Pays
G595-00398-5X10	DCM-5058	5 & 10 Times Pays
G595-00236-BL7X	DCM-5059	Blazing 7x Pay
G595-00236-BL7X	DCM-5060	Blazing 7's Times Pay
G595-00285-$1++	DCM-5061	Double Jackpot, $1
G595-00285-$1BL	DCM-5061	Double Jackpot, $1, Blue
G595-00285-DJP+	DCM-5061	Double Jackpot
G595-00285-YEL+	DCM-5061	Double Jackpot, Yellow
G595-00415-20X+	DCM-5062	Twenty Times
G595-00244-BW++	DCM-5063	Black & White
G595-00413-CCOW	DCM-5064	Cash Cow
G595-00411-FROG	DCM-5065	Frogs, Grenovilles French
G595-00398-5X10	DCM-5067	5 & 10 Times Pay
G595-00216-TAKE	DCM-5068	Double Take
G595-00398-5X10	DCM-5069	5 & 10 Times Pay
C595-00754-2X$+	DCM-5070	Double Money
C595-00754-2X$+	DCM-5071	Double Money

©2003 Bally Gaming and Systems
| - Revised, || - New

G595... Display Glass (cont.)

GLASS	ART FORM	DESCRIPTION
C595-00754-2X$+	DCM-5072	Double Money
C595-00754-2X$+	DCM-5073	Double Money
C595-00754-2X$+	DCM-5074	Double Money
C595-00768-UK++	DCM-5075	Californina Dreamin', United Kingdom
C595-00782-5X10	DCM-5076	5 & 10 Times Pay
C595-00782-5X10	DCM-5077	5 & 10 Times Pay
C595-00782-5X10	DCM-5078	5 & 10 Times Pay
C595-00782-5X10	DCM-5079	5 & 10 Times Pay
C595-00782-5X10	DCM-5080	5 & 10 Times Pay
C595-00767-UK++	DCM-5081	Double Money, United Kingdom
C595-00767-UK++	DCM-5082	Double Money, United Kingdom
C595-00767-UK++	DCM-5083	Double Money, United Kingdom
C595-00769-BALY	DCM-5083	Double Money
C595-00768-UK++	DCM-5084	Californina Dreamin', United Kingdom
C595-00768-UK++	DCM-5085	Californina Dreamin', United Kingdom
C595-00769-BALY	DCM-5085	Californina Dreamin'
G595-00398-5X10	DCM-9057	5 & 10 Times Pay
G595-00398-5X10	DCM-9058	5 & 10 Times Pay
G595-00229-007+	DD7-5001	Golden Eye 007
G595-00238-GIME	DD7-5003	Gimme 5
G595-00229-007+	DD7-5004	Golden Eye 007
G595-00229-007+	DD7-5005	Golden Eye 007
G595-00283-++++	DD7-5005	Golden Eye 007
G595-00316-5XBW	DD7-5006	5 Times Black & White
G595-00238-GIME	DD7-5007	Gimme 5
G595-00363-5XBW	DD7-5008	Gimme 5 Black & White
G595-00261-24KT	DD7-5009	24 Karat
G595-00316-5XBW	DD7-5010	5 Times Black & White
C595-00598-HOTL	DD8-5001	Hot Lines
C595-00698-++++	DD8-5001	Hot Lines
C595-00598-HOTL	DD8-5002	Hot Lines
C595-00598-HOTL	DD8-5004	Hot Lines
C595-00728-++++	DD8-5005	Winning Times
C595-00728-CRDT	DD8-5005	Winning Times
C595-00728-FR++	DD8-5005	Winning Times, French
C595-00728-++++	DD8-5006	Winning Times
C595-00729-++++	DD8-5006	Winning Times, Blazing 7's
C595-00714-WILD	DD8-5007	Tim Conway & Harvey Korman Jokers Wild
C595-00742-HOTL	DD8-5008	Hot Lines
G595-00014-++++	DDD-0001	Triple Double
G595-00014-++++	DDD-0002	Triple Double 7's
G595-00014-++++	DDD-5001	Triple Double Jackpot
G595-00014-++++	DDD-5002	Triple Double Jackpot
G595-00223-$5++	DDM-5001	Fun Fives, $5, Bally Las Vegas
C595-00194-$5CR	DDM-5002	Double Symbol, Mixed Bars
G595-00481-PS$5	DDM-5003	Fun Fives, $5, Paris Custom
G595-00114-CENT	DGN-5002	Double Dragon
G595-00096-++++	DIA-5001	Diamonds
G595-00173-++++	DIA-5001	Diamonds
G595-00096-++++	DIA-5002	Diamonds
G595-00096-++++	DIA-5003	Diamond Winners
G595-00096-++++	DIA-5004	Diamond Winners
G595-00135-++++	DIA-5004	Diamonds
G595-00368-BRUS	DIA-5005	Borussia Diamond Line, Custom
G595-00149-++++	DIA-5006	Diamonds
G595-00096-++++	DIA-5007	Diamond Line
G595-00096-++++	DIA-5008	Diamonds
G595-00420-PBOY	DIA-5009	Playboy Winners, Custom
G595-00096-++++	DIA-5010	Diamonds
G595-00421-PBOY	DIA-5011	Playboy Bunny Money, Custom
G595-00096-++++	DIB-5001	Diamonds
G595-00134-$25+	DIB-5001	Diamonds, $25
G595-00134-++++	DIB-5001	Diamonds
G595-00096-++++	DIB-5002	Diamonds
G595-00150-++++	DIB-5002	Diamonds
G595-00172-++++	DIB-5002	Diamonds
G595-00202-++++	DIB-5003	Diamonds
G595-00340-DJ7+	DID-5001	Double Jackpot Diamond Line 7's
G595-00341-DJB7	DID-5002	Diamond Line Double Jackpot Blazing 7's
G595-00367-DDBW	DID-5003	Diamond Line Double Black & White
G595-00472-D+DS	DIV-5001	Diamonds & Devils
G595-00060-SGLD	DJP-0001	Solid Gold
G595-00060-SGLD	DJP-5001	Cherry-Colored Bars-Solid Gold Double
G595-00133-BZ7+	DL7-5001	Blazing 7's Diamond Line
G595-00133-BZ7+	DL7-5002	Blazing 7's Diamond Line
G595-00133-BZ7+	DL7-5003	Diamond Line
C595-00704-++++	DLD-5001	Double Diamond Line
G595-00473-2XDL	DLD-5001	Double On Diamond Lines
C595-00769-BALY	DLD-5003	Double Diamond Line
C595-00766-UK++	DLD-5004	Double Diamond Line, United Kingdom
C595-00766-UK++	DLD-5005	Double Diamond Line, United Kingdom
C595-00769-BALY	DLD-5005	Double Diamond Line
C595-00819-DLFZ	DLF-5001	Diamond Line Frenzy
G595-00073-DJ++	DLI-5002	Double Jackpot
G595-00285-$1++	DLI-5012	Double Jackpot, $1
G595-00285-DJP+	DLI-5012	Double Jackpot
G595-00285-YEL+	DLI-5012	Double Jackpot, Yellow
G595-00155-DBZ7	DM7-5001	Triple Blazing 7's, Double Symbol
G595-00155-DBZ7	DM7-5002	Triple Blazing 7's, Double Symbol
G595-00210-AMER	DM7-5004	All American
G595-00332-DBAM	DM7-5004	All American Double
G595-00210-AMER	DM7-5005	All American Double
G595-00155-DBZ7	DM7-5006	Triple Blazing 7's, Double Symbol
G595-00155-DBZ7	DM7-5007	Triple Blazing 7's, Double Symbol, Custom Rccl
G595-00155-DBZ7	DM7-5008	Triple Blazing 7's Double Symbol
C595-00838-CRDT	DM7-5009	Triple Blazing 7's Double Symbol
G595-00155-DBZ7	DM7-5009	Triple Blazing 7's Double Symbol
G595-00244-BW++	DM7-5010	Black & White, Custom Reel Rccl
G595-00321-++++	DM7-5010	Black & White
G595-00244-BW++	DM7-5011	Black & White
G595-00315-EMPR	DM7-5011	Black & White, Custom Empress Cruise Lines
G595-00177-++++	DM7-5012	Apache Gold
G595-00274-TROP	DM7-5013	Double Jackpot Black & White, Custom Tropicana
G595-00244-BW++	DM7-5014	Black & White
C595-00244-BW++	DM7-5015	Black & White
G595-00244-BW++	DM7-5016	Black & White
G595-00278-HAWI	DM7-5017	Island Wins, Custom Gold Strike
G595-00290-BUCK	DM7-5018	Bahama Bucks, Custom Sun International
G595-00210-AMER	DM7-5020	All American
G595-00210-AMER	DM7-5022	All American
G595-00331-TWST	DM7-5023	Twist & Shout
G595-00331-TWST	DM7-5024	Twist & Shout
G595-00333-CORS	DM7-5025	Tap The Rockies, Custom Bally's Wild West (Park Place)
G595-00333-CORS	DM7-5026	Tap The Rockies, Custom Bally's Wild West (Park Place)
G595-00342-BOBK	DM7-5027	Border Bucks, Custom Primadonna
G595-00210-AMER	DM7-5028	All American
G595-00155-DBZ7	DM7-5031	Blazing 7's Double Jackpot
G595-00390-LOBS	DM7-5032	Lucky Lobster
G595-00366-SUN+	DM7-5033	Midnight Sun
G595-00244-BW++	DM7-5035	Black & White
G595-00382-KROY	DM7-5036	Kilroy, Triple Blazing 7's
G595-00382-KROY	DM7-5037	Kilroy, Triple Blazing 7's
G595-00381-KROY	DM7-5038	Kilroy, Black & White
G595-00381-KROY	DM7-5039	Kilroy, Black & White Double
G595-00363-5XBW	DM7-5040	5 Times Black & White
G595-00155-DBZ7	DM7-5041	Triple Blazing 7's
G595-00244-BW++	DM7-5042	Black & White
G595-00390-LOBS	DM7-5043	Lucky Lobster
G595-00394-5C++	DM7-5044	Double Silver & Gold & Diamonds
G595-00393-DBSG	DM7-5045	Gimme 5 Five Times
G595-00412-SG++	DM7-5046	Silver & Double Gold
C595-00762-NYNY	DM7-5047	New York New York Display
G595-00427-NYNY	DM7-5047	Cityscapes, New York
G595-00428-FRAN	DM7-5048	Cityscapes, San Fransico
G595-00429-SETL	DM7-5049	Cityscapes, Seatle
G595-00155-DBZ7	DM7-5050	Double Jackpot Triple Blazing 7's
G595-00544-++++	DM7-5050	Double Jackpot Blazing 7's
G595-00244-BW++	DM7-5051	Black & White
G595-00471-MGMD	DM7-5053	Blazing Triple 7's, Custom Mgm Detroit
C595-00750-3B2$	DM7-5054	Triple Blazing 7's Double Money
G595-00244-BW++	DM7-5055	Black & White
G595-00331-TWST	DM7-5056	Twist & Shout
G595-00244-BW++	DM7-5057	Black & White Double Jackpot
C595-00624-MBLU	DM7-5058	Memphis Blues
C595-00687-$5++	DM7-5059	Playboy Rabbit, $5
C595-00687-++++	DM7-5059	Playboy Rabbit
C595-00687-SP++	DM7-5059	Playboy Rabbit, Spanish
G595-00155-DBZ7	DM7-5060	Triple Blazing 7's Double Symbol
G595-00244-BW++	DM7-5061	Black & White
C595-00750-3B2$	DM7-5062	Double Money Triple Blazing 7's
C595-00750-3B2$	DM7-5063	Double Money Triple Blazing 7's
C595-00750-3B2$	DM7-5064	Double Money Triple Blazing 7's
C595-00750-3B2$	DM7-5065	Double Money Triple Blazing 7's
C595-00750-3B2$	DM7-5066	Double Money Triple Blazing 7's
C595-00155-DBZ7	DM7-5067	Triple Blazing 7's Double Jackpot
C595-00244-BW++	DM7-5068	Black & White Double Jackpot
G595-00244-BW++	DM7-5070	Black & White
C595-00750-3B2$	DM7-5071	Double Money Triple Blazing 7's
G595-00155-DBZ7	DM7-5072	Blazing 7's Double Jackpot
G595-00244-BW++	DM7-5073	Black & White
C595-00750-3B2$	DM7-5074	Double Money Triple Blazing 7's
C595-00155-BZDJ	DM7-5075	Blazing 7's Double Jackpot
C595-00750-3B2$	DM7-5075	Blazing 7's Double Jackpot
C595-00244-BW++	DM7-5076	Black & White
C595-00750-3B2$	DM7-5077	Double Money Triple Blazing 7's
C595-00155-BZDJ	DM7-5078	Blazing 7's Double Jackpot
C595-00750-3B2$	DM7-5078	Blazing 7's Double Jackpot
C595-00750-3B2$	DM7-5079	Double Money Triple Blazing 7's
C595-00750-3B2$	DM7-5080	Double Money Triple Blazing 7's
C595-00155-BZDJ	DM7-5081	Blazing 7's Double Jackpot

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlot® 6000

G595... Display Glass (cont.)

GLASS	ART FORM	DESCRIPTION
G595-00244-BW++	DM7-5082	Black & White
C595-00750-3B2$	DM7-5083	Double Money Triple Blazing 7's
C595-00155-BZDJ	DM7-5084	Blazing 7's Double Jackpot
C595-00750-3B2$	DM7-5085	Black & White
G595-00244-BW++	DM7-5085	Black & White
C595-00750-3B2$	DM7-5086	Double Money Triple Blazing 7's
C595-00845-ABNR	DM7-5087	Lil' Abner
G595-00155-DBZ7	DM7-9001	Triple Blazing 7's Double Symbol
G595-00035-++++	DMB-0010	Mixed Jackpot Bars, 7's, Double Symbol
G595-00053-++++	DMB-0012	Black Gold
G595-00052-$5++	DMB-0013	Black Gold, $5
G595-00062-FC++	DMB-0019	Black Gold, French Canadian
G595-00063-FC++	DMB-0020	Black Gold Doubles, French Canadian
G595-00057-$5++	DMB-0026	Double Jackpot, $5
G595-00054-++++	DMB-0030	Black Gold Jackpot Bars, Park Place
G595-00068-FC++	DMB-0032	Mixed Jackpot Bars, 7's, Double Symbol, French Canadian
G595-00103-++++	DMB-0055	Mixed Jackpot Bars, Park Place
G595-00072-FC++	DMB-0056	Bermuda Cherry 7's, French Canadian
G595-00091-++++	DMB-0056	Cherries Deluxe
G595-00069-++++	DMB-0057	Cherries Deluxe
G595-00069-FC++	DMB-0057	Cherries Deluxe, French Canadian
G595-00053-$10+	DMB-5004	Black Gold, $10
G595-00053-++++	DMB-5004	Triple Blazing 7's Double Symbol
G595-00053-PT++	DMB-5004	Black Gold, Portuguese
G595-00082-++++	DMB-5010	Black Gold
G595-00053-$10+	DMB-5012	Black Gold Double 7's, $10
G595-00053-++++	DMB-5012	Black Gold
G595-00062-$5++	DMB-5019	Black Gold, $5
G595-00062-++++	DMB-5019	Black Gold
G595-00062-FC++	DMB-5019	Black Gold, French Canadian
G595-00063-FC$2	DMB-5020	Black Gold, French Canadian, $2
G595-00063-FC$5	DMB-5020	Double Jackpot Black Gold, French Canadian, $5
G595-00203-++++	DMB-5022	Bally's Gold, Custom Bally Las Vegas
G595-00094-$10+	DMB-5025	Black Gold, $10
G595-00094-$2++	DMB-5025	Black Gold, $2
G595-00094-++++	DMB-5025	Black Gold
G595-00094-FR++	DMB-5025	Black Gold, French
G595-00094-PORT	DMB-5025	Black Gold, Portuguese
G595-00068-++++	DMB-5032	7's, Double Symbol
G595-00068-FC++	DMB-5032	Jackpot Bars, French Canadian
G595-00068-++++	DMB-5033	Jackpot Bars
G595-00068-FC++	DMB-5033	Mixed Jackpot Bars, 7's, Double Symbols, French Canadian
G595-00206-++++	DMB-5039	Mixed Jackpot Bars, Custom Bally Las Vegas
G595-00072-FC++	DMB-5056	Bermuda Cherry 7's, French Canadian
G595-00069-++++	DMB-5057	Cherries Deluxe
C595-00041-$10+	DMB-5065	Black Gold, $10
G595-00041-$5++	DMB-5065	Black Gold, $5
G595-00041-++++	DMB-5065	Black Gold
G595-00049-$5++	DMB-5067	Black Gold, $5
G595-00049-++++	DMB-5067	Black Gold
G595-00193-$10+	DMB-5068	Black Gold, $10
G595-00306-++++	DMB-5069	Bally's Most Wanted, Custom Park Place
G595-00304-++++	DMB-5070	Bally's Most Wanted, Custom Park Place
G595-00358-$2++	DMB-5071	Black Gold Symbol, $2
G595-00358-++++	DMB-5071	Black Gold Symbol
G595-00359-++++	DMB-5072	Hilton Gold, Custom
G595-00453-$10+	DMB-5073	Paris Gold, $10
G595-00453-$5++	DMB-5073	Paris Gold, $5, Custom
G595-00453-++++	DMB-5073	Paris Gold, Custom
G595-00226-$10+	DMJ-5001	Mixed Jackpot Bars-7's-Double Bally's
G595-00226-$25+	DMJ-5001	Mixed Jackpot Bars-7's-Double Bally's, $25
G595-00226-$5++	DMJ-5001	Double Bally, $5, Custom Bally Las Vegas
G595-00505-++++	DPW-5001	Caesar's Cash, Custom Caesar's
G595-00515-FORT	DPW-5002	Flamingo Fortune
G595-00114-LEFT	DRA-5001	Double Dragon
G595-00115-CENT	DRA-5001	Double Dragon
G595-00116-RITE	DRA-5001	Double Dragon
G595-00115-CENT	DRA-5002	Double Dragon
G595-00115-RITE	DRA-5002	Double Dragon
G595-00116-RITE	DRA-5002	Double Dragon
G595-00115-CENT	DRA-5007	Double Dragon
G595-00168-D3B7	DT7-5001	Triple Blazing 7's Diamond Line
G595-00252-DBAK	DT7-5002	Diamond Back
G595-00168-D3B7	DT7-5003	Triple Blazing 7's Diamond Line
G595-00482-IN$+	DT7-5003	In The Money
G595-00105-$1++	DWA-0001	Pyramid, Park Place, $1
G595-00105-++++	DWA-0004	Pyramid Game
G595-00105-$5++	DWA-0005	Pyramid, Park Place, $5
G595-00105-$1++	DWA-5001	Pyramids, $1
G595-00078-LUXR	DWA-5003	$10,000 Chambers, Luxor Custom
G595-00105-++++	DWA-5004	Pyramids Wild 7's
G595-00105-$5++	DWA-5005	$50,000 Pyramid, $5
G595-00105-50C+	DWA-5007	$5000 Pyramid, 50¢
G595-00140-$2++	DWA-5008	$25,000 Pyramid, $2
G595-00141-S&G+	DWA-5009	Silver & Gold

GLASS	ART FORM	DESCRIPTION
G595-00141-S+G+	DWA-5009	Silver & Gold
G595-00141-S+G+	DWA-5010	Silver & Gold
G595-00207-BYJP	DWA-5011	Bally Wild & Double Symbols, Custom Bally Las Vegas
G595-00312-RDUP	DWA-5015	Jackpot Roundup, Custom Park Place
G595-00307-BROC	DWA-5016	Bronco Buster, Custom Park Place
G595-00337-QUST	DWA-5017	Hilton Space Quest
G595-00141-S+G+	DWA-5019	Silver & Gold
C595-00657-GOAL	DWA-5020	Goal
G595-00121-++++	DWC-5003	Jackpot Bars, Park Place
G595-00349-SMIL	DWN-5001	Double Jackpot Smiley
G595-00349-SMIL	DWN-5002	Smiley, Custom Rccl
G595-00115-CENT	DWN-5003	Double Dragon
G595-00241-DROS	DWR-5001	Double Wild Rose
G595-00320-++++	DWR-5001	Double Wild Rose
G595-00261-24KT	DWR-5002	24 Karat
G595-00261-24KT	DWR-5003	24 Karat
G595-00261-24KT	DWR-5004	24 Karat
G595-00261-24KT	DWR-5005	24 Karat
G595-00241-DROS	DWR-5006	Double Wild Rose
G595-00334-SLVR	DWR-5007	Silver Lining, Custom Rccl
C595-00541-RDJP	DWR-5008	Rapid Double Jackpot
C595-00541-RDJP	DWR-5009	Rapid Double Jackpot
C595-00746-2X$+	DWR-5010	Two Times Money
C595-00746-2X$+	DWR-5011	Two Times Money
C595-00746-2X$+	DWR-5012	Two Times Money
C595-00746-2X$+	DWR-5013	Two Times Money
C595-00746-2X$+	DWR-5014	Two Times Money
G595-00064-FR++	EB4-5003	French Green Lion Giant Jackpot
G595-00090-$1++	F16-5001	Cherry-Fruit-Bar, $1
G595-00090-$1++	F17-5054	Fruit, $1
G595-00090-05C+	F17-5054	Fruit, 5¢
G595-00090-25C+	F17-5054	Fruit, 25¢
G595-00090-$1++	F17-5055	Fruit, $1
G595-00284-$SPC	F17-5060	Dollar Special
G595-00298-++++	F17-5060	Fruit
G595-00090-$1++	F17-5062	Fruit, $1
G595-00160-FAME	FAF-5001	Triple Gold
G595-00160-FAME	FAF-5002	Fame & Fortune
G595-00010-FAI+	FAI-0003	Fire & Ice
G595-00032-FAI+	FAI-0003	Fire & Ice, Black 7's
G595-00004-$5++	FAI-0004	Fire & Ice, Black 7's, $5
G595-00032-FAI+	FAI-0005	Fire & Ice, Black 7's
G595-00010-GFAI	FAI-5003	Fire & Ice, Mgm
G595-00032-FAI+	FAI-5003	Fire & Ice
G595-00032-FAI+	FAI-5004	Fire & Ice
G595-00032-FAI+	FAI-5005	Fire & Ice
G595-00032-FAI+	FAI-5006	Fire & Ice
G595-00032-FAI+	FAI-5007	Fire & Ice, Black 7's
G595-00090-$1++	FAP-5046	Fruit, $1
G595-00090-25¢+	FAP-5046	Fruit, 25¢
C595-00794-++++	FB7-5001	Famous 7's
C595-00794-++++	FB7-5002	Famous 7's
G595-00039-FBAL	FBF-5002	Fireball
G595-00039-FBAL	FBF-5003	Fireball
G595-00039-FBAL	FBF-5006	Fireball
G595-00039-FBAL	FBF-5008	Fireball
G595-00190-TEXS	FBF-5012	Texas 2 Step
G595-00190-TEXS	FBF-5013	Texas 2 Step
G595-00190-TEXS	FBF-5014	Texas 2 Step
G595-00090-$1++	FBJ-5009	Cherry-Fruit-Bar-7's, $1
G595-00090-5OC+	FBJ-5009	Cherry-Fruit-Bar-7's, 50¢
G595-00090-$1++	FBJ-5012	Cherry-Fruit-Bar-7's, $1
G595-00137-SLVR	FBJ-5013	Silver Strike, Custom Silver Smith Casino
G595-00182-BILL	FBJ-5014	Big Bill, Custom State Line Casino
G595-00397-5N10	FDM-5001	Five & Dime
G595-00397-5N10	FDM-5002	Five & Dime
C595-00821-BFZ2	FFR-5001	Bonus Frenzy
G595-00026-FLSH	FLB-5001	Flashback
G595-00195-WACK	FLB-5002	Wacky Winners
G595-00483-RIDE	FLB-5003	Ride To Riches
G595-00026-FLSH	FLB-5008	Flashback
G595-00178-DICE	FMB-5001	Lucky Dice
C595-00834-5XRH	FRF-5001	Five Times Rich
G595-00480-5X7+	FX7-5001	5 Times Pay With 7's
G595-00480-5X7+	FX7-5002	5 Times Pay With 7's
G595-00521-PDAY	GBB-5001	Payday, Wild Gold
C595-00735-BLO3	GBB-5003	Blondie Dagwood Sandwich
C595-00735-BLO3	GBB-5004	Blondie's Meal Ticket
C595-00735-BLO3	GBB-5005	Blondie's Meal Ticket
C595-00735-BLO3	GBB-5006	Blondie's Meal Ticket
C595-00735-BLO3	GBB-5007	Blondie's Meal Ticket
C595-00535-MKT+	GBB-5008	Play The Market
C595-00494-$BAR	GBB-5009	Payday, Money Bars, Park Place
C595-C0846-++++	GBB-5009	Payday, Money Bars, Park Place
C595-00518-GDU+	GDU-5002	Gold Down Under

©2003 Bally Gaming and Systems
| - Revised, || - New

ProSlot® 6000

G595... Display Glass (cont.)

	GLASS	ART FORM	DESCRIPTION
	G595-00117-PRO+	GEN-5001	Clear Display
	G595-00001-GJP+	GJP-5010	Giant Jackpot
	G595-00077-++++	GJP-5010	Giant Jackpot
|	G595-00276-BALL	GJP-5010	High Casino Style, Giant Jackpot
|	G595-00006-GSLM	GSL-0001	Grand Slam, Blue 7's
|	G595-00006-GSLM	GSL-0002	Grand Slam
|	G595-00012-GRSH	GSL-0013	Gold Rush
	G595-00006-GSLM	GSL-5001	Grand Slam
|	G595-00006-GSLM	GSL-5002	Grand Slam
	G595-00012-GRSH	GSL-5012	Gold Rush
|	G595-00012-GRSH	GSL-5013	Gold Rush
|	G595-00006-GSLM	GSL-5015	Grand Slam
|	G595-00012-GRSH	GSL-5016	Gold Rush
|	G595-00012-GRSH	GSL-5018	Gold Rush
|	G595-00006-GSLM	GSM-0001	Grand Slam
|	G595-00048-$5++	GSM-0001	Grand Slam
|	G595-00048-++++	GSM-0001	Grand Slam
|	G595-00067-FC++	GSM-0001	Grand Slam, French Canadian
|	G595-00006-GSLM	GSM-5001	Grand Slam
	G595-00048-$5++	GSM-5001	Grand Slam, $5
	G595-00048-++++	GSM-5001	Grand Slam
	G595-00067-FC++	GSM-5001	Grand Slam, French Canadian
	G595-00021-++++	HAR-5001	Hit & Run, French
	G595-00046-SIR+	HAR-5002	Sir Prize
|	G595-00021-++++	HAR-5003	Hit & Run
|	G595-00046-SIR+	HAR-5004	Sir Prize
|	G595-00046-SIR+	HAR-5006	Sir Prize
|	C595-00797-++++	HPL-5001	Horse Play
	G595-00482-IN$+	ITM-5001	In The Money
|	G595-00645-$2++	ITM-5001	In The Money, $2
|	G595-00645-CRDT	ITM-5001	In The Money
|	G595-00482-IN$+	ITM-5002	In The Money, French
|	G595-00622-$2++	ITM-5002	In The Money, $2
|	G595-00706-++++	ITM-5003	In The Money
|	G595-00707-IN$+	ITM-5004	In The Money
|	C595-00856-EXTR	ITM-5007	Extra Money
|	C595-00253-++++	JB4-5001	Fortune, Custom Bally France
	G595-00253-FTUN	JB4-5001	Fortune, Custom Bally France
|	G595-00299-SHOE	JB7-5001	Blazing 7's Horseshoe, Custom Park Place
|	G595-00299-SHOE	JGS-5001	Gold Rush Horseshoe, Custom Park Place
|	G595-00293-++++	JIL-5004	Oranges-Bars-7's
	G595-00299-SHOE	JM7-5001	Magnificient 7's Horseshoe, Custom Park Place
	G595-00376-GRD7	JM7-5002	Bonus Blazing 7's, Grand Casino
	G595-00458-$10+	JM7-5003	Paris Magnifique, Custom Paris, $10
	G595-00458-$2++	JM7-5003	Paris Magnifique, Custom Paris, $2
|	G595-00458-$25+	JM7-5003	Paris Magnifique, Custom Paris, $25
	G595-00458-$5++	JM7-5003	Paris Magnifique, Custom Paris, $5
	G595-00458-++++	JM7-5003	Paris Magnifique, Custom Paris
|	G595-00376-GRD7	JM7-5004	Bonus Blazing 7's
|	G595-00508-BO7S	JM7-5005	Flaming Bonus 7's
|	C595-00619-++++	JM7-5006	I Love Jackpots
|	C595-00619-++++	JM7-5007	I Love Jackpots
|	C595-00619-FR++	JM7-5007	I Love Jackpots, French
|	C595-00818-CRDT	JM7-5013	I Love Jackpots
|	C595-00835-CRDT	JM7-5014	Castle Of Cash
|	G595-00277-GJP5	JP3-5002	Giant Jackpot 7's, Custom Bally Las Vegas
|	G595-00277-RED5	JP3-5002	Giant Jackpot 7's, Custom Bally Las Vegas, Red
	G595-00128-SHOT	JPO-5001	Longshot, Custom Binions Horseshoe
	G595-00024-++++	JQK-5003	Mini Royal
	G595-00024-FR++	JQK-5003	Mini Royal, French
	G595-00024-SP++	JQK-5003	Mini Royal, Spanish
|	G595-00024-++++	JQK-5004	Mini Royal
|	G595-00024-OT++	JQK-5004	Mini Royal, English/French Canadian
	G595-00038-ROYL	JQK-5005	Mini Royal
	G595-00085-++++	JQK-5005	Mini Royal
	G595-00085-SP++	JQK-5005	Mini Royal, Spanish
|	G595-00038-ROYL	JQK-5006	Mini Royal
|	G595-00086-$5++	JQK-5007	Mini Royal, $5
|	G595-00086-++++	JQK-5007	Mini Royal
|	G595-00086-OT$5	JQK-5007	Mini Royal, English/French Canadian, $5
|	G595-00086-SP++	JQK-5007	Mini Royal, Spanish
|	G595-00024-FR++	JQK-5009	Mini Royal, French
|	G595-00110-7S++	JQK-5010	7's
|	G595-00110-7S++	JQK-5011	7's
	G595-00016-JOKR	JUJ-5001	Jumpin' Joker
	G595-00130-BELL	JUJ-5002	Bell Ringer
|	G595-00092-TR7+	LM7-0010	Triple 7's
|	G595-00005-BL37	LM7-0011	Blazing Triple 7's
|	G595-00011-GEMS	LM7-0046	Reel Gems
|	G595-00005-BL37	LM7-5011	Triple Blazing 7's
|	G595-00005-BL37	LM7-5013	Triple Blazing 7's
	G595-00101-BLUE	LM7-5014	Triple Lightning 7's, Blue
	G595-00101-LIT7	LM7-5014	Triple Lightning 7's
|	G595-00101-LIT7	LM7-5015	Triple Lightning 7's
|	G595-00005-BL37	LM7-5016	Triple Blazing 7's

	GLASS	ART FORM	DESCRIPTION
|	G595-00005-BL37	LM7-5018	Triple Blazing 7's
|	G595-00101-BLUE	LM7-5019	Triple Lightning 7's, Blue
|	G595-00101-LIT7	LM7-5019	Triple Lightning 7's
|	G595-00005-BL37	LM7-5020	Blazing Triple 7's
|	G595-00101-LIT7	LM7-5021	Triple Lightning 7's
|	G595-00005-BL37	LM7-5022	Triple Blazing 7's
|	G595-00101-LIT7	LM7-5023	Triple Lightning 7's
|	G595-00005-BL37	LM7-5024	Triple Blazing 7's
	G595-00375-CHIP	LM7-5026	Blazing Triple 7's, Custom Chip Casino
	G595-00176-3ROS	LM7-5027	Triple Rose
	G595-00214-++++	LM7-5027	Triple Rose
|	G595-00176-3ROS	LM7-5028	Triple Rose
|	G595-00005-BL37	LM7-5029	Triple Blazing 7's
|	G595-00176-3ROS	LM7-5031	Triple Rose
|	G595-00466-PARS	LMM-5002	Le Jacque Pot Sevy, Custom Paris
|	G595-00005-BL37	LMN-5001	Triple Blazing 7's
|	G595-00005-BL37	LMN-5002	Triple Blazing 7's
|	G595-00005-BL37	LMN-5003	Triple Blazing 7's
|	G595-00005-BL37	LMN-5004	Triple Blazing 7's
	G595-00379-KROY	LMN-5005	Triple Blazing 7's Kilroy
|	G595-00379-KROY	LMN-5006	Triple Blazing 7's Kilroy
	G595-00411-FROG	LMN-5007	Frogs
|	G595-00413-CCOW	LMN-5009	Cash Cow
|	G595-00412-SG++	LMN-5010	Silver & Double Gold
|	G595-00076-$1C+	LMS-0007	Black Colors, $100
|	G595-00050-BG7+	LMS-0010	Black Gold
|	G595-00050-BG7+	LMS-0011	Jackpot Bars, Park Place
|	G595-00075-$25+	LMS-5002	Lightning Jackpot Bars Mixed 7's, Black Gold, $25
|	G595-00042-BG++	LMS-5005	Black Gold
|	G595-00075-$25+	LMS-5005	Black Gold, $25
|	G595-00075-$25+	LMS-5007	Black Gold Jackpot Bars, $25
|	G595-00076-$1C+	LMS-5007	Black Gold, $100
	G595-00465-PARS	LMX-5003	Le Jacque Pot Sevy, Custom Paris
|	C595-00585-BWM7	M75-5001	Black & White Millionaire 7's
|	C595-00585-BWM7	M75-5002	Black & White Blazing Millionaire 7's
|	C595-00585-BWM7	M75-5003	Black & White Millionaire 7's
|	C595-00585-BWM7	M75-5004	Black & White Millionaire 7's
|	C595-00585-BWM7	M75-5007	Black & White Blazing Millionaire 7's
|	C595-00602-ML7D	M7D-5001	Millionaire Diamonds
|	C595-00602-ML7D	M7D-5002	Millionaire Diamonds
|	C595-00602-ML7D	M7D-5003	Millionaire 7's Diamonds
|	C595-00602-ML7D	M7D-5004	Millionaire 7's Diamonds
|	C595-00602-ML7D	M7D-5005	Millionaire 7's Diamonds
|	C595-00602-ML7D	M7D-5006	Millionaire 7's Diamonds
|	C595-00844-RAIN	MAL-5001	Rainbow Jackpot
|	G595-00065-BLCK	MB0-0015	7's
|	G595-00065-BLCK	MB0-5015	7's
|	G595-00090-$1++	MB0-5050	Harrah's Sultans, Custom Harrah's, $1
|	G595-00090-$5++	MB0-5050	Harrah's Sultans, $5
|	G595-00090-$1++	MB0-5054	Fruit, $1
|	G595-00090-50C+	MB0-5054	Mixed Bars 7's, 50¢
	G595-00179-$1++	MB0-5056	Mixed Dice 7's, $1
|	G595-00090-$1++	MB0-5057	Mixed Bars 7's, $1
|	G595-00335-$1++	MB0-5058	Bar 7's, $1
|	G595-00076-$1C+	MB7-0011	Black Colors, $100
|	G595-00065-BLUE	MB7-0023	Any Two 7's, Blue
|	G595-00092-TR7+	MB7-5023	Mixed Bars
|	G595-00079-BVEL	MBV-5001	Black Velvet
	G595-00079-BVEL	MBV-5002	Black Velvet
|	G595-00079-BVEL	MBV-5003	Black Velvet
|	G595-00079-BVEL	MBV-5004	Black Velvet
|	C595-C0810-++++	MFL-5001	Cash For Life
|	C595-C0831-++++	MFL-5001	Cash For Life
|	C595-C0810-++++	MFL-5002	Cash For Life
|	C595-C0810-++++	MFL-5003	Cash For Life
|	C595-C0811-$5++	MFL-5004	Cash For Life, $5
|	C595-C0811-++++	MFL-5004	Cash For Life
|	G595-00770-++++	MFL-5005	Cash For Life, Blazing 7's
|	G595-00770-++++	MFL-5006	Cash For Life, Blazing 7's
|	G595-00770-++++	MFL-5007	Cash For Life, Blazing 7's
|	C595-00772-$5++	MFL-5008	Cash For Life, Blazing 7's
|	G595-00771-++++	MFL-5009	Cash For Life, Rich & Famous
|	G595-00771-++++	MFL-5010	Cash For Life, Rich & Famous
|	G595-00771-++++	MFL-5011	Cash For Life, Rich & Famous
|	G595-00773-$5++	MFL-5012	Cash For Life, Rich & Famous, $5
|	G595-00775-++++	MFL-5013	Cash For Life, Black & White
|	G595-00775-++++	MFL-5014	Cash For Life, Black & White
|	G595-00775-++++	MFL-5015	Cash For Life, Black & White
|	G595-00774-$5++	MFL-5016	Cash For Life, Black & White, $5
|	G595-00776-++++	MFL-5017	Cash For Life, Blues Brothers
|	G595-00776-++++	MFL-5018	Cash For Life, Blues Brothers
|	G595-00776-++++	MFL-5019	Cash For Life, Blues Brothers
|	G595-00777-$5++	MFL-5020	Cash For Life, Blues Brothers, $5
|	G595-00075-$5++	MG7-5015	Generic Black Gold, $5
	G595-00201-MG$1	MG7-5016	Magnificent 7's, $1

©2003 Bally Gaming and Systems

ProSlot® 6000

G595... Display Glass (cont.)

GLASS	ART FORM	DESCRIPTION
G595-00201-MG$2	MG7-5016	Magnificent 7's , $2
G595-00255-MAG7	MG7-5017	Magnificent 7's
| G595-00242-MAG7	MG7-5018	Magnificent 7's
G595-00158-++++	MJ7-5003	Magnificent 7's
| G595-00075-$5++	MJ7-5004	Generic Black Gold, $5
| C595-00254-CRDT	MJ7-5005	Magnificent 7's
G595-00254-++++	MJ7-5005	Magnificent 7's
G595-00254-PROG	MJ7-5005	Magnificent 7's
G595-00254-SP++	MJ7-5005	Magnificent 7's, Spanish
G595-00243-$5++	MJ7-5006	Magnificent 7's, $5
| G595-00243-++++	MJ7-5006	Magnificent 7's
| G595-00243-FR++	MJ7-5006	Magnificent 7's, French
G595-00288-++++	MJ7-5007	Lucky Lobster, Custom Sun International
G595-00311-++++	MJ7-5008	Blazing Magnificent 7's
| G595-00311-OT++	MJ7-5008	Blazing Magnificent 7's, English/French Canadian
G595-00311-PROG	MJ7-5008	Blazing Magnificent 7's
G595-00311-SP++	MJ7-5008	Blazing Magnificent 7's, Spanish
G595-00326-++++	MJ7-5009	Gold Pot
| G595-00264-BLU7	MJ7-5010	Blue 7's
G595-00346-BAHA	MJ7-5011	Bahama Bucks, Custom Sun Atlantis
| C595-00702-++++	MNB-5001	Money Bars
G595-00494-$BAR	MNB-5001	Money Bars
| C595-00696-++++	MNB-5002	Money Bars
| C595-C0696-CRDT	MNB-5002	Money Bars
| G595-00494-$BAR	MNB-5002	Money Bars
| G595-00087-++++	MNC-5001	Monte Carlo Model
G595-00095-LV++	MNC-5002	Las Vegas
| G595-00087-++++	MNC-5003	Jumpin' Joker
| G595-00095-LV++	MNC-5004	Las Vegas
| G595-00087-++++	MNC-5005	Monte Carlo
| C595-00679-$5++	MOC-5001	Monte Carlo, Blazing 7's, $5
| C595-00679-++++	MOC-5001	Monte Carlo, Blazing 7's
| C595-00679-COIN	MOC-5001	Monte Carlo Blazing 7's, 25¢, 50¢
| C595-00679-SP++	MOC-5001	Monte Carlo, Blazing 7's, Spanish
| C595-00781-$5++	MOC-5001	Monte Carlo, Blazing 7's, $5
| C595-00680-$5++	MOC-5002	Monte Carlo, Wild 7's, $5
| C595-00680-++++	MOC-5002	Monte Carlo, Wild
| C595-00680-COIN	MOC-5002	Monte Carlo Wild, 25¢, 50¢
| C595-00680-FR++	MOC-5002	Monte Carlo Wild, French
| C595-00681-$5++	MOC-5003	Monte Carlo, Rich & Famous $5
| C595-00681-++++	MOC-5003	Monte Carlo, Rich & Famous
| C595-00681-COIN	MOC-5003	Monte Carlo Rich & Famous, 25¢, 50¢
| C595-00681-FR++	MOC-5003	Monte Carlo, Rich & Famous, French
| C595-00681-SP++	MOC-5003	Monte Carlo, Rich & Famous, Spanish
| C595-00688-++++	MOC-5004	Playboy Magazine Cover
| C595-00700-JAMA	MOC-5005	Jamaican Me Rich, Custom Isle Of Capri
| C595-00700-JAMA	MOC-5006	Jamaican Me Rich, Custom Isle Of Capri
| C595-00700-JAMA	MOC-5007	Jamaican Me Rich, Custom Isle Of Capri
| C595-00719-$5++	MOC-5008	Monte Carlo, Blazing 7's, $5
| C595-00719-++++	MOC-5008	Monte Carlo, Blazing 7's
| C595-00719-COIN	MOC-5008	Monte Carlo, Blazing 7's, 25¢, 50¢
| C595-00720-++++	MOC-5009	Monte Carlo Wild
| C595-00720-COIN	MOC-5009	Monte Carlo Wild, 25¢, 50¢
| C595-00738-++++	MOC-5010	Monte Carlo, Rich & Famous
| C595-00738-COIN	MOC-5010	Monte Carlo, Rich & Famous, 25¢, 50¢
| C595-00795-$5++	MOC-5013	Monte Carlo, Rich & Famous, $5
| C595-00795-++++	MOC-5013	Monte Carlo, Rich & Famous
| C595-00795-COIN	MOC-5013	Monte Carlo Rich & Famous, 25¢, 50¢
| C595-00796-++++	MOC-5014	Monte Carlo, Rich & Famous
| C595-00796-COIN	MOC-5014	Monte Carlo, Rich & Famous, 25¢, 50¢
| C595-C0850-++++	MOC-5016	Monte Carlo, Spin & Win, Blazing 7's
| C595-C0851-++++	MOC-5018	Monte Carlo Wild
| C595-C0852-++++	MOC-5019	Monte Carlo, Rich & Famous
| G595-00449-PRS4	NE7-5001	Paris Eiffel Tower 7's
| G595-00449-PRS4	NE7-5002	Eiffel Tower 7's, Custom Paris
| G595-00463-PARS	NE7-5003	Paris Payday
| G595-00463-PARS	NE7-5004	Payday, Custom Paris
G595-00463-PARS	NE7-5005	Payday, Custom Paris
G595-00273-TOP+	OTT-5001	Over The Top
G595-00264-BLU7	OV7-5001	Blue 7's
| G595-00264-BLU7	OV7-5002	Blue 7's
G595-00294-FRZY	OV7-5003	Flamingo Frenzy, Custom Flamingo Hilton
| G595-00297-GFOR	OV7-5004	G-Force, Custom Treasure Island
G595-00309-FEVR	OV7-5005	Gold Fever, Custom Park Place
| G595-00264-BLU7	OV7-5006	Blue 7's
| G595-00020-OVER	OVR-5001	Overload
| G595-00089-++++	OVR-5001	Overload
| G595-00020-OVER	OVR-5003	Overload
G595-00424-MONE	OVR-5010	Count De Monee
| G595-00009-++++	PAB-5017	Stars & Bars
| G595-00447-$2++	PAW-5001	Paris Balloons, $2
| G595-00447-$5++	PAW-5001	Paris Balloons $5
C595-00495-QHIT	QD7-5001	Quick Hits, Triple Blazing 7's Double Jackpot
| C595-00649-QHIT	QD7-5001	Quick Hits, Triple Blazing 7's Double Jackpot
| C595-OT649-QHIT	QD7-5001	Quick Hits, Triple Blazing 7's Double Jackpot

GLASS	ART FORM	DESCRIPTION
| C595-00495-QHIT	QD7-5002	Quick Hits, Triple Blazing 7's
| G595-00495-QHIT	QD7-5002	Quick Hits, Triple Blazing 7's Double Jackpot
C595-00496-QHIT	QD7-5003	Quick Hits, Black & White Double Jackpot
| C595-00650-QHIT	QD7-5003	Quick Hits Black & White Double Jackpot
| C595-00813-FR++	QD7-5003	Quick Hits, Black & White Double Jackpot, French
| C595-00496-QHIT	QD7-5004	Quick Hits, Black & White
| C595-00650-QHIT	QD7-5004	Quick Hits, Black & White Double Jackpot
| C595-00495-FCQH	QD7-5005	Quick Hits, Blazing 7's Double Jackpot, French Canadian
| C595-00495-QHIT	QD7-5005	Quick Hits, Triple Blazing 7's Double Jackpot
| C595-00495-QHIT	QD7-5006	Quick Hits, Triple Blazing 7's Double Jackpot
| C595-00649-QHIT	QD7-5006	Quick Hits, Triple Blazing 7's Double Jackpot
| G595-00650-QHIT	QD7-5006	Quick Hits, Triple Blazing 7's Double Jackpot
| C595-00496-FCQH	QD7-5007	Quick Hits, Black & White Double Jackpot, French Canadian
| C595-00496-QHIT	QD7-5007	Quick Hits Black & White
| C595-00650-QHIT	QD7-5007	Quick Hits, Black & White Double Jackpot
| C595-00496-QHIT	QD7-5008	Quick Hits, Black & White Double Jackpot
| C595-00495-QHIT	QD7-5009	Quick Hits, Triple Blazing 7's Double Jackpot
| C595-00496-QHIT	QD7-5010	Quick Hits, Black & White Double Jackpot
| G595-00495-QHIT	QD7-5011	Quick Hits, 5 Times 10 Pays
| C595-00496-QHIT	QD7-5012	Quick Hits, Black & White Double Jackpot
C595-00497-QHIT	QDC-5001	Quick Hits, 5 Times 10 Pays
| C595-00651-QHIT	QDC-5001	Quick Hits, 5 Times 10 Pays
| C595-00812-FR++	QDC-5001	Quick Hits, 5 Times 10 Pays, French
| G595-00575-QHIT	QDC-5001	Quick Hits, 5 Times 10 Pays
| C595-00566-QHIT	QDC-5002	Quick Hits, 5 Times 10 Pays, Black Gold
| C595-00652-QHIT	QDC-5002	Quick Hits, 5 Times 10 Pays
| C595-00497-QHIT	QDC-5003	Quick Hits, 5 Times 10 Pays
| C595-00575-QHIT	QDC-5003	Quick Hits, 5 Times 10 Pays
| C595-00651-QHIT	QDC-5003	Quick Hits, 5 Times 10 Pays
| C595-00498-QHIT	QDC-5004	Quick Hits, Black Gold, 5 Times 10 Pays
| C595-00566-QHIT	QDC-5004	Quick Hits, 5 Times 10 Pays
| C595-00652-QHIT	QDC-5004	Quick Hits, Black Gold 5 Times 10 Pays
| C595-00575-FCQH	QDC-5005	Quick Hits, 5 Times 10 Pays, French Canadian
| C595-00575-QHIT	QDC-5005	Quick Hits, 5 Times 10 Pays
| C595-00651-QHIT	QDC-5005	Quick Hits, 5 Times 10 Pays
| G595-00651-QHIT	QDC-5005	Quick Hits, 5 Times 10 Pays
| C595-00575-QHIT	QDC-5006	Quick Hits, 5 Times 10 Pays
| C595-00651-QHIT	QDC-5006	Quick Hits, 5 Times 10 Pays
| C595-00496-FCQH	QDC-5007	Black & White Double Jackpot Quick Hits, French Canadian
| C595-00566-QHIT	QDC-5007	Quick Hits
| C595-00566-QHIT	QDC-5008	Quick Hits Black Gold
| C595-00575-QHIT	QDC-5009	Quick Hits
| C595-00566-QHIT	QDC-5010	Quick Hits Black Gold 5 Times 10 Pays
| C595-00757-QHIT	QDC-5011	Quick Hits, 5 Times 10 Pays
| C595-00566-QHIT	QDC-5012	Quick Hits Black Gold 5 Times 10 Pays
G595-00097-RICH	RAF-5001	Rich & Famous
| G595-00097-RICH	RAF-5002	Rich & Famous
| G595-00097-RICH	RAF-5004	Rich & Famous
G595-00129-GEOR	RAF-5006	Win With The Stars George Burns
G595-00131-ANN+	RAF-5006	Win With The Stars Ann Margaret
G595-00132-WAYN	RAF-5006	Win With The Stars, Wayne Newton
| G595-00097-RICH	RAF-5007	Rich & Famous
G595-00142-RGLD	RAF-5009	Red Gold, Custom
| G595-00097-RICH	RAF-5010	Rich & Famous
G595-00147-TRCK	RAF-5011	Lightning Bars, Win A Truck
| G595-00097-RICH	RAF-5012	Rich & Famous
| G595-00097-RICH	RAF-5013	Rich & Famous
| G595-00097-RICH	RAF-5014	Rich & Famous
| G595-00097-RICH	RAF-5015	Rich & Famous
| G595-00097-RICH	RAF-5016	Rich & Famous
G595-00323-PARD	RAF-5017	Rich & Famous Hit Parade
G595-00324-GOLD	RAF-5018	Rich & Famous Country Gold
G595-00197-BORN	RAF-5019	Born To Be Wild
| G595-00097-RICH	RAF-5023	Rich & Famous
| G595-00229-007+	RAF-5024	Golden Eye 007
| G595-00097-RICH	RAF-5025	Rich & Famous
| G595-00141-S+G+	RAF-5026	Silver & Gold, Rich & Famous
| G595-00064-FR++	RAF-5027	Green Lion, French
| G595-00097-RICH	RAF-5029	Rich & Famous
G595-00302-RAVN	RAF-5030	Raven Rich & Famous, Custom Bgi Germany
G595-00317-BWLD	RAF-5031	Black & White
G595-00317-BWLD	RAF-5032	Black & White
G595-00351-KICK	RAF-5033	Rich & Famous Kick & Win
| G595-00229-007+	RAF-5037	Golden Eye 007
| G595-00317-BWLD	RAF-5038	Black & White
G595-00355-SHOT	RAF-5039	Shoot & Win
| G595-00097-RICH	RAF-5040	Rich & Famous
| G595-00317-BWLD	RAF-5041	Black & White
G595-00377-HJKR	RAF-5046	Happy Joker Rich & Famous
| G595-00141-S+G+	RAF-5047	Silver & Gold
| G595-00317-BWLD	RAF-5049	Black & White Rich & Famous
G595-00430-CHGO	RAF-5050	Cityscapes, Chicago
G595-00432-MIAM	RAF-5052	Cityscape, Miami
G595-00433-ORLN	RAF-5054	Cityscapes, New Orleans
G595-00444-KEWD	RAF-5055	Magic Fortune, Custom Kewadan Casino

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlot® 6000

G595... Display Glass (cont.)

GLASS	ART FORM	DESCRIPTION
G595-00317-BWLD	RAF-5056	Rich & Famous Black & White
C595-00624-MBLU	RAF-5057	Memphis Blues
G595-00097-RICH	RAF-5058	Rich & Famous
G595-00384-PDAY	RBB-5001	Payday, Black Gold
G595-00384-PDAY	RBB-5002	Payday, Blazing 7's
G595-00384-PDAY	RBB-5004	Payday, Generic Black Gold
G595-00384-PDAY	RBB-5005	Payday, Generic Black Gold
G595-00384-PDAY	RBB-5006	Payday, Generic Blazing 7's
G595-00477-TOWR	RBB-5008	Eiffel Tower 7's, Custom
G595-00449-PRS4	RBB-5009	Eiffel Tower 7's, Custom
G595-00448-PRS3	RBB-5010	Payday, Black Gold, Custom Paris
G595-00448-PRS3	RBB-5011	Payday, Black Gold, Custom Paris
G595-00448-PRS3	RBB-5012	Payday, Black Gold, Custom Paris
C595-00842-BARS	RF4-5001	Famous Bars
G595-00287-RLGM	RG4-5001	Reel Gems, Custom
G595-00123-25C+	RH7-5001	Red Hot 7's, 25¢
G595-00123-HOT7	RH7-5001	Red Hot 7's
G595-00181-GENE	RH7-5002	Red Hot Genies, Custom Harrahs
G595-00318-++++	RH7-5002	Red Hot Genies
G595-00460-++++	RMB-5001	Faberge Eggs, Custom Paris
G595-00461-++++	RMB-5002	Faberge Eggs, Custom Paris
G595-00462-++++	RMB-5003	Faberge Eggs, Custom Paris
G595-00227-ROAR	RTW-5001	Betty Boop's Roaring 20's
G595-00364-QUST	RTW-5002	Question Mark Game, Custom Rccl
G595-00227-ROAR	RTW-5003	Betty Boop's Roaring 20's
G595-00423-SWNG	RTW-5004	Swingtime
G595-00423-SWNG	RTW-5005	Swingtime
G595-00423-SWNG	RTW-5006	Swingtime
G595-00423-SWNG	RTW-5007	Swingtime
G595-00423-SWNG	RTW-5008	Swingtime
G595-00457-Y2K+	RTW-5009	Y2k Bug
G595-00227-ROAR	RTW-5010	Betty Boop's Roaring 20's
G595-00364-QUST	RTW-5011	Question Mark Game
G595-00486-KOPS	RTW-5012	Krazy Kops
G595-00486-KOPS	RTW-5012	Krazy Kops
G595-00227-ROAR	RTW-5013	Betty Boop's Roaring 20's
G595-00227-ROAR	RTW-5014	Betty Boop's Roaring 20's
G595-00423-SWNG	RTW-5016	Swingtime
G595-00423-SWNG	RTW-5017	Swingtime
G595-00423-SWNG	RTW-5018	Swingtime
G595-00423-SWNG	RTW-5019	Swingtime
G595-00423-SWNG	RTW-5020	Swingtime
G595-00227-ROAR	RTW-5021	Betty Boop's Roaring 20's
G595-00423-SWNG	RTW-5022	Swingtime
C595-00543-HOP+	RTW-5023	At The Hop
C595-00543-HOP+	RTW-5024	At The Hop
C595-00543-HOP+	RTW-5025	At The Hop
C595-00551-MIL7	RTW-5026	Millionaire 7's
C595-00551-MIL7	RTW-5027	Millionaire 7's
C595-00551-MIL7	RTW-5028	Millionaire 7's
C595-00551-MIL7	RTW-5029	Millionaire 7's
C595-00551-MIL7	RTW-5031	Millionaire 7's
C595-00801-ROAR	RTW-5032	Millionaire 7's
C595-00839-OLGC	RTW-5034	Cash For Life, Olgc
G595-00003-++++	SAB-0005	Stars & Bars, Red, White & Blue
G595-00003-++++	SAB-0006	Stars & Bars, Red, White & Blue
G595-00003-$10+	SAB-5005	Stars & Bars, $10
G595-00003-$2++	SAB-5005	Stars & Bars, $2
G595-00003-$5++	SAB-5005	Stars & Bars, $5
G595-00003-++++	SAB-5005	Stars & Bars
G595-00003-FR++	SAB-5005	Stars & Bars, French
G595-00003-++++	SAB-5006	Stars & Bars
G595-00003-FR++	SAB-5006	Stars & Bars, French
G595-00008-$5++	SAB-5009	Stars & Bars, $5
G595-00008-++++	SAB-5009	Stars & Bars
G595-00009-$2++	SAB-5017	Star & Bars, $2
G595-00009-$25+	SAB-5017	Stars & Bars, $25
G595-00009-$5++	SAB-5017	Stars & Bars $5
G595-00009-++++	SAB-5017	Stars & Bars
G595-00009-++++	SAB-5018	Stars & Bars
G595-00009-SP++	SAB-5018	Stars & Bars, Red, White & Blue, Spanish
G595-00084-++++	SAB-5019	Stars & Bars
G595-00003-++++	SAB-5020	Stars & Bars
G595-00003-SP++	SAB-5020	Stars & Bars, Spanish
G595-00003-++++	SAB-5021	Stars & Bars
G595-00008-$5++	SAB-5022	Stars & Bars, $5
G595-00008-++++	SAB-5022	Stars & Bars
G595-00008-++++	SAB-5023	Stars & Bars
G595-00157-++++	SAB-5024	Stars & Bars
G595-00003-++++	SAB-5025	Stars & Bars
G595-00157-++++	SAB-5028	Stars & Bars, Tournament
G595-00191-++++	SAB-5029	Stars & Bars, Flamingo Hilton Tournament
G595-00191-++++	SAB-5030	Stars & Bars, Flamingo Hilton, Tournament
G595-00279-++++	SAB-5032	Laser 7's, Custom Hilton
G595-00385-PDAY	SBB-5001	Payday Blazing 7's

GLASS	ART FORM	DESCRIPTION
G595-00385-PDAY	SBB-5002	Payday Blazing 7's
G595-00385-PDAY	SBB-5004	Payday Generic, Blazing 7's
G595-00385-PDAY	SBB-5005	Payday Generic, Blazing 7's
G595-00385-PDAY	SBB-5006	Payday Generic, Blazing 7's
G595-00449-PRS4	SBB-5007	Eiffel Tower 7's, Custom
G595-00449-PRS4	SBB-5008	Eiffel Tower 7's, Custom
G595-00464-PARS	SBB-5009	Blazing 7's Payday, Custom Paris
G595-00464-PARS	SBB-5010	Blazing 7's Payday, Custom Paris
G595-00464-PARS	SBB-5011	Blazing 7's Payday, Custom Paris
G595-00479-CAN+	SBB-5012	Can Can Quarters, Custom Paris
G595-00383-CADY	SBC-5001	Cadillac, Custom Ac Hilton
G595-00434-JAG+	SBC-5002	Jaguar, Custom Ac Hilton
G595-00152-$2++	SBW-5001	Wild Diamond, $2
G595-00152-$5++	SBW-5001	Stars & Bars Wild Diamond, $5
G595-00152-++++	SBW-5001	Stars & Bars Wild Diamond
G595-00152-SP++	SBW-5001	Stars & Bars Wild Diamond, Spanish
C595-00153-SP++	SBW-5002	Stars & Bars Wild Diamond, Spanish
G595-00153-++++	SBW-5002	Stars & Bars Wild Diamon
G595-00153-++++	SBW-5003	Stars & Bars Wild Diamond
G595-00153-++++	SBW-5004	Stars & Bars Wild Diamond
G595-00470-PARS	SBX-5009	Le Jacque Pot Sevy, Star & Bars, Custom Paris
G595-00479-CAN+	SCC-5001	Can Can Quarters, Custom Paris
C595-00487-LUCK	SCC-5002	Leprechauns
C595-00487-LUCK	SCC-5003	Leprechauns
C595-00618-++++	SCC-5003	Leprechauns
C595-00487-LUCK	SCC-5004	Leprechauns
C595-00487-LUCK	SCC-5005	Leprechauns
C595-00487-LUCK	SCC-5006	Leprechauns
C595-00814-SNFZ	SNF-5001	Saturday Night Live Frenzy
C595-00814-SNFZ	SNF-5002	Saturday Night Live Frenzy
G595-00295-BLST	STR-5001	Blue Streak
G595-00322-++++	STR-5001	Blue Streak
G595-00027-++++	SUC-5012	Super Continental
G595-00027-FR++	SUC-5012	Super Continental, French
G595-00043-SUC+	SUC-5012	Super Continental
G595-00276-BALL	SUC-5012	Super Continental, Custom
G595-00339-CL93	SUC-5013	Club 93 Promotional
G595-00362-++++	SUC-5014	Super Continental
G595-00110-7S++	SVN-5001	7's
G595-00110-7S++	SVN-5002	7's
G595-00219-BARS	SVN-5003	Bars
G595-00219-BARS	SVN-5004	7's
G595-00066-JPER	SWB-0027	Eruptions
G595-00151-$5++	SWB-5001	Stars & Bars With Wild Diamond, $5
G595-00066-JPER	SWB-5027	Jackpot Eruptions
G595-00044-TREX	SWB-5032	T-Rex
G595-00044-TREX	SWB-5035	T-Rex
G595-00044-TREX	SWB-5036	T-Rex
G595-00025-RPAY	SWR-5001	Instant Repay
G595-00388-++++	TBB-5001	Rich & Famous, Payday
G595-00386-PDAY	TBB-5002	Payday Generic, Stars & Bars
G595-00407-PDAY	TBB-5004	Payday Generic, Stars & Bars
G595-00386-PDAY	TBB-5005	Payday Generic, Stars & Bars
G595-00386-PDAY	TBB-5006	Payday Generic, Stars & Bars
C595-00751-32$+	TDM-5001	Triple Double Money
C595-00751-32$+	TDM-5002	Triple Double Money
C595-00751-32$+	TDM-5003	Triple Double Money
C595-00751-32$+	TDM-5004	Triple Double Money
C595-00751-32$+	TDM-5005	Triple Double Money
C595-00792-++++	TFR-5001	Bonus Times Frenzy
C595-00793-++++	TFR-5002	Pool Ball Frenzy
C595-00853-PBOY	TFR-5003	Playmate Times Frenzy
G595-00174-TGLD	TGD-5001	Triple Gold
G595-00174-TGLD	TGD-5002	Triple Gold
G595-00199-HOCK	TGD-5003	Hockey Hat Trick
G595-00174-TGLD	TGD-5004	Triple Gold Bally 7's
G595-00263-3LCH	TGD-5005	Triple Launch, Custom Las Vegas Hilton
G595-00174-TGLD	TGD-5006	Triple Gold, Custom Bally Las Vegas
G595-00174-TGLD	TGD-5007	Triple Gold, Jackpot Bars
G595-00412-SG++	TGD-5008	Silver & Double Gold
G595-00174-TGLD	TGD-5009	Triple Gold
C595-00755-3X$+	TGD-5010	Triple Money
C595-00755-3X$+	TGD-5011	Triple Money
C595-00755-3X$+	TGD-5012	Triple Money
C595-00755-3X$+	TGD-5013	Triple Money
C595-00755-3X$+	TGD-5014	Triple Money
G595-00122-BOLT	THB-5001	Thunderbolt
G595-00122-BOLT	THB-5002	Thunderbolt
G595-00233-TJ3B	TM7-5001	Triple Symbol Triple Blazing 7's
G595-00233-TJ3B	TM7-5002	Triple Symbol Triple Blazing 7's
C595-00749-3X$+	TM7-5003	Triple Blazing Triple Money
C595-00749-3X$+	TM7-5004	Triple Money
C595-00749-3X$+	TM7-5005	Triple Blazing Triple Money
C595-00749-3X$+	TM7-5006	Triple Blazing Triple Money
C595-00749-3X$+	TM7-5007	Triple Blazing Triple Money

©2003 Bally Gaming and Systems

ProSlot® 6000

G595... Display Glass (cont.)

GLASS	ART FORM	DESCRIPTION
C595-00641-POWR	TOP-5001	Tower Of Power
C595-00641-POWR	TOP-5002	Tower Of Power
C595-00641-POWR	TOP-5003	Tower Of Power
C595-00641-POWR	TOP-5004	Tower Of Power
C595-00643-BWTP	TOP-5005	Tower Of Power Black & White
C595-00643-BWTP	TOP-5006	Tower Of Power Black & White
C595-00644-DITP	TOP-5007	Tower Of Power Diamonds
C595-00644-DITP	TOP-5008	Tower Of Power Diamonds
C595-00641-POWR	TOP-5009	Tower Of Power
C595-00641-POWR	TOP-5010	Tower Of Power
C595-00643-BWTP	TOP-5011	Tower Of Power Black & White
C595-00643-BWTP	TOP-5012	Tower Of Power Black & White
C595-00644-DITP	TOP-5013	Tower Of Power Diamonds
C595-00644-DITP	TOP-5014	Tower Of Power Diamonds
C595-00822-QTML	TOP-5015	Quarter Millions
C595-00748-FAB7	TR7-5001	Fabulous 7's
C595-00748-FAB7	TR7-5002	Fabulous 7's
C595-00748-FAB7	TR7-5003	Fabulous 7's
C595-00653-++++	TRB-5001	3 Way Pay
C595-00653-FR++	TRB-5001	3 Way Pay, French
C595-00653-SP++	TRB-5001	3 Way Pay, Spanish
C595-C0653-FC++	TRB-5001	3 Way Pay, French Canadian
C595-00828-CH++	TRB-5003	Golden 888's, Chinese
C595-00843-3RCH	TRF-5001	Triple Rich
C595-00757-10X$	TTM-5001	10 Times Money
C595-00757-10X$	TTM-5002	10 Times Money
C595-00757-10X$	TTM-5003	10 Times Money
C595-00757-10X$	TTM-5004	10 Times Money
C595-00757-10X$	TTM-5005	10 Times Money
G595-00232-TWIN	TWO-5001	Twin Win 7's, Custom Bally Las Vegas
G595-00232-TWIN	TWO-5002	Twin Win 7's, Custom Bally Las Vegas
G595-00113-WLD7	WB7-5001	Wild 7's, Tournament
G595-00029-++++	WB7-5005	Open Sesame, Custom Harrah's
C595-00031-BL7+	WB7-5007	Blazing 7's, Tournament
G595-00450-BETY	WB7-5008	Betty Boop Roaring 20's, Tournament
C595-00476-BETY	WB7-5009	Born To Boop, Tournament
C595-00735-BLO3	WB7-5010	Blondie, Tournament
C595-00557-POPI	WB7-5011	Popeye, Tournament
C595-00595-F+A+	WB7-5012	Frankie & Annette, Tournament
C595-00717-PB1+	WB7-5013	Playboy, Tournament
C595-00830-CFL+	WB7-5014	Cash For Life, Tournament
G595-00208-BELL	WBE-5001	Wild Bells, Custom Bally's Las Vegas
G595-00059-EAGL	WBL-0001	American Eagle
C595-00841-WBLZ	WBS-5007	Wild Blazing 7's
G595-00013-++++	WFC-0001	Firecracker
G595-00013-++++	WFC-5001	Firecracker
G595-00013-++++	WFC-5003	Firecracker
G595-00045-WLIT	WHL-5001	White Lightning
G595-00107-++++	WHL-5001	White Lightning
G595-00045-WLIT	WHL-5002	White Lightning
G595-00045-WLIT	WHL-5003	White Lightning
G595-00045-WLIT	WHL-5004	White Lightning
G595-00045-WLIT	WHL-5005	White Lightning
G595-00045-WLIT	WHL-5006	White Lightning
G595-00111-GNUG	WHL-5007	24 Karat Gold Bars, Golden Nugget Custom
G595-00045-WLIT	WHL-5008	White Lightning
G595-00045-WLIT	WHL-5009	White Lightning
G595-00045-WLIT	WHL-5012	White Lightning
G595-00045-WLIT	WHL-5014	White Lightning
G595-00045-WLIT	WHL-5015	White Lightning
G595-00422-BEAU	WHL-5016	24 Karat Gold Bars, Custom Beau Rivage
G595-00042-BG++	WIL-5028	Black Gold
G595-00235-BGLD	WIL-5038	Black Gold
G595-00042-BG++	WLI-0013	Black Gold
G595-00017-WGLD	WLI-0027	White Gold
G595-00017-WGLD	WLI-5027	White Gold
G595-00042-BG++	WLI-5028	Black Gold
G595-00080-PARO	WLI-5029	Pharoah's Treasures, Custom Luxor
G595-00017-WGLD	WLI-5030	White Gold Jackpot Bars
G595-00017-WGLD	WLI-5032	White Gold Jackpot Bars
G595-00102-ROSE	WLI-5034	Wild Rose
G595-00162-MGLD	WLI-5035	Prairie Meadows Gold, Custom Prairie Meadows
G595-00184-GRN+	WLI-5036	Sheraton Gold, Green
G595-00184-SHGD	WLI-5036	Sheraton Gold
G595-00042-BG++	WLI-5037	Black Gold
G595-00235-BGLD	WLI-5038	Black Gold
G595-00192-CHRY	WM7-5006	Cherries Jubilee
G595-00051-$25+	WMB-0001	Black Gold, $25
G595-00051-$5++	WMB-0001	Black Gold, $5
G595-00051-FC++	WMB-0001	Black Gold, French Canadian
C595-C0051-$5++	WMB-5001	Black Gold, $5
G595-00033-++++	WMB-5001	Black Gold
G595-00051-$10+	WMB-5001	Black Gold, $10
G595-00051-$5++	WMB-5001	Black Gold, $5
G595-00051-FC$5	WMB-5001	Black Gold, $5, French Canadian

GLASS	ART FORM	DESCRIPTION
G595-00234-$5++	WMB-5018	Bally's Gold, Custom, $5
G595-00222-$5++	WMS-5001	Fun Fives, $5, Custom Bally Las Vegas
G595-00075-$5++	WMS-5002	Generic Black Gold, $5
G595-00478-$5++	WMS-5003	Fun Fives, $5, Custom Paris
G595-00356-WSML	WRN-5001	Wild Smiley
G595-00356-WSML	WRN-5002	Wild Smiley
G595-00115-CENT	WRN-5003	Double Dragon
G595-00102-ROSE	WRO-5001	Wild Rose
G595-00213-++++	WRO-5001	Wild Rose
G595-00102-ROSE	WRO-5002	Wild Rose
G595-00042-BG++	WRO-5003	Black Gold
G595-00102-ROSE	WRO-5004	Wild Rose
G595-00167-WINR	WRO-5005	Winners Circle, Custom Prairie Meadows
G595-00079-BVEL	WRO-5006	Black Velvet
G595-00102-ROSE	WRO-5007	Wild Rose
G595-00102-ROSE	WRO-5008	Wild Rose
G595-00102-ROSE	WRO-5009	Wild Rose
G595-00102-ROSE	WRO-5010	Wild Rose
G595-00102-ROSE	WRO-5011	Wild Rose
G595-00141-S+G+	WRO-5013	Silver & Gold
G595-00102-ROSE	WRO-5014	Wild Rose
G595-00192-CHRY	WRO-5016	Cherries Jubilee
G595-00192-CHRY	WRO-5017	Cherries Jubilee
G595-00042-BG++	WRO-5018	Black Gold, Custom Bally Las Vegas
G595-00209-HART	WRO-5019	Sweethearts
G595-00079-BVEL	WRO-5020	Wild Rose
G595-00102-ROSE	WRO-5021	Wild Rose
G595-00102-ROSE	WRO-5022	Wild Rose
G595-00102-ROSE	WRO-5023	Wild Rose
G595-00042-BG++	WRO-5024	Black Gold
G595-00163-QTRH	WRO-5025	Quarter Horse, Custom Prairie Meadows
G595-00261-24KT	WRO-5026	24 Karat Wild
G595-00261-24KT	WRO-5027	24 Karat
G595-00261-24KT	WRO-5028	24 Karat
G595-00261-24KT	WRO-5029	24 Karat
G595-00209-HART	WRO-5030	Sweethearts
G595-00280-COMT	WRO-5031	Wild Comet, Custom Hilton
G595-00042-BG++	WRO-5032	Black Gold
G595-00261-24KT	WRO-5033	24 Karat
G595-00102-ROSE	WRO-5034	Wild Rose
G595-00235-BGLD	WRO-5035	Black Gold Symbol
C595-00758-WLD$	WRO-5036	Wild Money
C595-00758-WLD$	WRO-5037	Wild Money
C595-00758-WLD$	WRO-5038	Wild Money
C595-00758-WLD$	WRO-5039	Wild Mone
C595-00758-WLD$	WRO-5040	Wild Money
C595-00659-$5++	WTS-5003	Wild Times, $5
C595-00659-++++	WTS-5003	Wild Times
C595-00659-CRDT	WTS-5003	Wild Times
C595-00659-FR++	WTS-5003	Wild Times, French
C595-C0659-CHNA	WTS-5003	Wild Times, Chinese
C595-00732-++++	WTS-5009	Liberace
C595-00788-++++	WTS-5010	Blues Brother's Wild Times
C595-00788-++++	WTS-5011	Blues Brother's Wild Times
C595-00747-++++	WTS-5012	Blues Brothers Wild Times
C595-00836-CRDT	WTS-5013	Blues Brothers Wild Times
C595-00837-CRDT	WTS-5014	Blues Brothers Wild Times
G595-00237-DIRO	WWB-5004	Diamonds & Roses
G595-00237-DIRO	WWB-5005	Diamonds & Roses
G595-00237-DIRO	WWB-5006	Diamonds & Roses
C595-00507-BLIN	ZDM-5001	Bonus Line
C595-00610-++++		Monte Carlo Wild
C595-00611-++++		Monte Carlo Rich & Famous
C595-00612-$5++		Monte Carlo Blazing 7's, $5
C595-00612-++++		Monte Carlo Blazing 7's
C595-00650-FR++		Quick Hits Black & White Double Jackpot, French
C595-00651-FR++		Quick Hits 5 Times 10 Pays, French
G595-00166-WALI		Walligator, Custom
G595-00177-++++		Apache Gold, Custom
G595-00244-BW++		Black & White
G595-00361-MADD		Madhatten Double Jackpot, Custom New York New York
G595-00427-NYNY		Cityscapes Series, New York
G595-00437-BLCK		98% Theme Display, Black
G595-00437-BLUE		98% Theme Display, Blue
G595-00437-RED+		98% Theme Display, Red
G595-00473-2XDL		Double On Diamond Lines

©2003 Bally Gaming and Systems
| - Revised, || - New

D400... Top Award Decals

A (2.25" X 1.625")

B (2.25" X 1.125")

C (2.25" X .875")

D (2.125" X .6875")

E (2.125" X .5625")

F (2.625" X 1.625")

G (2.625" X 1.25")

H (2.625" X 1.25")

I (4" X 1.5625")

J (4.5" X .75")

©2003 Bally Gaming and Systems

ProSlot® 6000

D400... Top Award Decals (cont.)

K (5.625" X 1.5")

L (3.375" X 1.2812")

M (3.68" X 1.114")

N (4.2833" X 1.6375")

Silver and Gold Only (6" X 2")

©2003 Bally Gaming and Systems

D400... Top Award Decals (cont.)

DECAL	DESCRIPTION
D400-+++N1-SIZE	Top Award
D400-$100K-00I3	"I" Size, 100,000
D400-$125K-00F3	"F" Size, 125,000
D400-$125K-00L3	"L" Size, 125,000
D400-$125K-00N3	"N" Size, 125,000
D400-$5000-00B3	"B" Size, 5,000
D400-$5000-00C3	"C" Size, 5,000
D400-$8000-00C3	"C" Size, 8,000
D400-$8000-00G3	"G" Size, 8,000
D400-$8000-00N3	"N" Size, 8,000
D400-0$10K-00C3	"C" Size, 10,000
D400-0$10K-00G3	"G" Size, 10,000
D400-0$10K-00H3	"H" Size, 10,000
D400-0$10K-00I3	"I" Size, 10,000
D400-0$10K-00M3	"M" Size, 10,000
D400-0$20K-00C3	"C" Size, 20,000
D400-0$20K-00G3	"G" Size, 20,000
D400-0$20K-00K3	"K" Size, 20,000
D400-0$25K-00C3	"C" Size, 25,000
D400-0$25K-00F3	"F" Size, 25,000
D400-0$25K-00H3	"H" Size, 25,000
D400-0$25K-00I3	"I" Size, 25,000
D400-0$25K-00M3	"M" Size, 25,000
D400-0$50K-00H3	"H" Size, 50,000
D400-0$50K-00K3	"K" Size, 50,000
D400-0$50K-00L3	"L" Size, 50,000
D400-0PROG-00C1	"C" Size
D400-0PROG-00D1	"D" Size
D400-0PROG-00F1	"F" Size
D400-0PROG-00G1	"G" Size
D400-0PROG-00H1	"H" Size
D400-0PROG-00I1	"I" Size
D400-0PROG-00K1	"K" Size
D400-0PROG-00L1	"L" Size
D400-0PROG-00M1	"M" Size
D400-0PROG-00N1	"N" Size
D400-0000K-00I3	"I" Size
D400-0010K-00F1	"F" Size, 10,000
D400-0010K-00G1	"G" Size, 10,000
D400-0010K-00H1	"H" Size, 10,000
D400-0010K-00I1	"I" Size, 10,000
D400-0010K-00K1	"K" Size, 10,000
D400-0010K-00L1	"L" Size, 10,000
D400-0010K-00M1	"M" Size, 10,000
D400-0015K-00L2	"L" Size, 15,000
D400-0020K-00F2	"F" Size, 20,000
D400-0020K-00L2	"L" Size, 20,000
D400-0025K-00F2	"F" Size, 25,000
D400-0025K-00L2	"L" Size, 25,000
D400-0050K-00L2	"L" Size, 50,000
D400-0050K-00N2	"N" Size, 50,000
D400-00500-00B2	"B" Size, 500
D400-00500-00G2	"G" Size, 500
D400-00500-00L2	"L" Size, 500
D400-00800-00B2	"B" Size, 800
D400-01000-00C1	"C" Size, 1,000
D400-01000-00G1	"G" Size, 1,000
D400-01000-00H1	"H" Size, 1,000
D400-01000-00I1	"I" Size, 1,000
D400-01000-00K1	"K" Size, 1,000
D400-01000-00L1	"L" Size, 1,000
D400-01000-00M1	"M" Size, 1,000
D400-01000-00N1	"N" Size, 1,000
D400-01199-00F2	"F" Size, 1,199
D400-01199-00L2	"L" Size, 1,199
D400-01199-00N2	"N" Size, 1,199
D400-01200-00G2	"G" Size, 1,200
D400-01500-00H2	"H" Size, 1,500
D400-01500-00I2	"I" Size, 1,500
D400-01600-00F1	"F" Size, 1,600
D400-01600-00L1	"L" Size, 1,600
D400-02000-00F1	"F" Size, 2,000
D400-02000-00G1	"G" Size, 2,000
D400-02000-00I1	"I" Size, 2,000
D400-02000-00M1	"M" Size, 2,000
D400-02400-00A1	"A" Size, 2,400
D400-02400-00F1	"F" Size, 2,400
D400-02400-00L1	"L" Size, 2,400
D400-02500-00B2	"B" Size, 2,500
D400-02500-00F1	"F" Size, 2,500
D400-02500-00H1	"H" Size, 2,500
D400-02500-00I1	"I" Size, 2,500
D400-02500-00K1	"K" Size, 2,500
D400-02500-00L1	"L" Size, 2,500
D400-03000-00H2	"H" Size, 3,000
D400-04000-00L1	"L" Size, 4,000
D400-05000-00B1	"B" Size, 5,000
D400-05000-00F1	"F" Size, 5,000
D400-05000-00G1	"G" Size, 5,000
D400-05000-00H1	"H" Size, 5,000
D400-05000-00I1	"I" Size, 5,000
D400-05000-00K1	"K" Size, 5,000
D400-05000-00L1	"L" Size, 5,000
D400-05000-00N1	"N" Size, 5,000

D305... Coin Play Decals

D305-00003-BERM

GLASS	DESCRIPTION
D305-00001-BERM	Play 1 Coin
D305-00002-BERM	Play 2 Coins
D305-00003-BERM	Play 3 Coins
D305-00003-FR++	Play 3 Coins, French
D305-00004-BERM	Play 4 Coins
D305-00004-CRDT	Play 4 Credits
D305-00005-BERM	Play 5 Coins
D305-00006-BERM	Play 6 Coins
D305-00007-BERM	Play 7 Coins
D305-00008-BERM	Play 8 Coins
D305-00008-CRDT	Play 8 Credits
D305-00009-BERM	Play 9 Coins
D305-00012-BERM	Play 2 Credits
D305-00013-BERM	Play 3 Credits
D305-00014-BERM	Millionaire 7's, Play 3 Coins & Annuity Statement
D305-00015-BERM	Play 5 Credits
D305-00018-BERM	Play 20 Coins
D305-00019-BERM	Play 6 Credits
D305-00020-BERM	Play 9 Credits
D305-00022-BERM	Play 25 Credits
D305-FC++2-BERM	Play 2 Coins, English/French Canadian
D305-FC++3-BERM	Play 3 Coins, English/French Canadian
D305-FC++5-BERM	Play 5 Coins, English/French Canadian
D305-PT++3-BERM	Play 3 Coins, Portuguese
D305-SP++3-BERM	Play 3 Coins, Spanish
D305-SP+10-BERM	Play 1 To 3 Coins, Special Custom Spanish For S.A. "Juega De 1 A 3 Monedas"
D305-SP+11-BERM	Play 1 To 2 Coins, Special Custom Spanish For S.A. "Juega De 1 A 2 Monedas"
D305-SP+16-BERM	Play 1 To 4 Coins: Spanish, Juega De 1 A 4 Monedas
D305-SP+17-BERM	Play 1 To 5 Coins: Spanish, Juega De 1 A 5 Monedas

©2003 Bally Gaming and Systems

ProSlot® 6000

D310... Coin Play Decals

D310-00003-BERM

GLASS	DESCRIPTION
D310-00001-BERM	Play 1 Coin
D310-00002-BERM	Play 2 Coins
D310-00003-BERM	Play 3 Coins
D310-00004-BERM	Play 4 Coins
D310-00004-CRDT	Play 4 Credits
D310-00005-BERM	Play 5 Coins
D310-00006-BERM	Play 6 Coins
D310-00006-CRDT	Play 6 Credits
D310-00007-BERM	Play 7 Coins
D310-00008-BERM	Play 8 Coins
D310-00008-CRDT	Play 8 Credits
D310-00009-BERM	Play 9 Coins
D310-00009-CRDT	Play 9 Credits
D310-00010-BERM	Play 3 Coins, Boop Roaring 20's, New Jersey
D310-00012-BERM	Play 2 Credits
D310-00013-BERM	Play 3 Credits
D310-00014-BERM	Play 3 Coins, Boop Roaring 20's, New Jersey
D310-00018-BERM	Play 2 Coins
D310-00019-BERM	Play 3 Coins
D310-00020-BERM	3 7's On Payline, Millionaire 7's
D310-00021-BERM	3 Coin Blondie
D310-00022-BERM	3 Coin Blondie
D310-00023-BERM	5 Coin Blondie
D310-00024-BERM	Play 3 Coins With 20 Year Annuity
D310-00025-BERM	Play 3 Coins With Respin & Annuity
D310-00026-BERM	Play Max Coins
D310-00027-BERM	Play 3 With Respin & Annuity
D310-00028-BERM	Bonus Line Custom, 2 Coin
D310-00029-BERM	Bonus Line Custom, 3 Coin
D310-00030-BERM	At The Hop Respin
D310-00031-UK++	Play 2 Credits, 1 Credit = 20p (Diamond Line), United Kingdom
D310-00032-UK++	Play 1 Credit, 1 Credit = 50p (Double Money), United Kingdom
D310-00033-MAPS	Multi Denom Maps
D310-00034-NJ++	Maps Multi Denom, New Jersey
D310-00035-MIL7	Play 3 Coins + Multi Denom + Annuity, Millionaire 7's
D310-00036-UK++	Play 3 Credits, 1 Credit = 10p, United Kingdom
D310-00039-CRDT	Play 5 Credits
D310-00041-CFL+	Play 3 Credits + Multi Denom + Cash For Life Annuity
D310-C0040-OLGC	Play 3 Credits + Cash For Life, OLGC
D310-FC++1-BERM	Play 1 Coin, French Canadian
D310-FC++2-BERM	Play 2 Coins, English/French Canadian
D310-FC++3-BERM	Play 3 Coins, English/French Canadian
D310-FR++2-BERM	Play 2 Coins, French
D310-FR++3-BERM	Play 3 Coins, French
D310-FRN+3-BERM	Play 3 Coins, French, Narrow
D310-FRN+4-BERM	Play 4 Coins, French , Narrow
D310-FRN+5-BERM	Play 5 Coins, French , Narrow
D310-N+++(1-9)-BERM	1-9 Narrow Bermuda Style
D310-N+++4-CRDT	Play 4 Credits
D310-N+++6-CRDT	Play 6 Credits
D310-N+++8-CRDT	Play 8 Credits
D310-N+++9-CRDT	Play 9 Credits
D310-N++12-BERM	Play 2 Credits, Narrow
D310-N++13-BERM	Play 3 Credits, Narrow
D310-N++39-BERM	Play 5 Credits, Narrow
D310-PT++1-BERM	Play 1 Coin, Portuguese
D310-PT++2-BERM	Play 2 Coins, Portuguese
D310-PT++3-BERM	Play 3 Coins, Portuguese
D310-PT++4-BERM	Play 4 Coins, Portuguese
D310-PT++5-BERM	Play 5 Coins, Portuguese
D310-PT++6-BERM	Play 6 Coins, Portuguese
D310-PT++7-BERM	Play 7 Coins, Portuguese
D310-PT++8-BERM	Play 8 Coins, Portuguese
D310-PT++9-BERM	Play 9 Coins, Portuguese
D310-SP++1-BERM	Play 1 Coin, Spanish
D310-SP++2-BERM	Play 2 Coin, Spanish
D310-SP++3-BERM	Play 3 Coins, Spanish
D310-SP++4-BERM	Play 4 Coins, Spanish
D310-SP++5-BERM	Play 5 Coins, Spanish
D310-SP++6-BERM	Play 6 Coins, Spanish
D310-SP++7-BERM	Play 7 Coins, Spanish
D310-SP++8-BERM	Play 8 Coins, Spanish
D310-SP++9-BERM	Play 9 Coins, Spanish
D310-SP+10-BERM	Play 1 To 3 Coins, Spanish
D310-SP+11-BERM	Play 1 To 2 Coins, Spanish
D310-SPN+3-BERM	Play 3 Coins, Spanish, Narrow
D310-SPN10-BERM	Play 1 To 3 Coins, Spanish, Narrow
D310-SPN11-BERM	Play 1 To 2 Coins, Spanish, Narrow

D156... Bill Acceptor Bill Value Range

D156-00003-USSA

GLASS	DESCRIPTION
D156-00001-RAND	Rands, R10, R20/R10, R20, R50/R10, R20, R50, R100/R10, R20, R50, R100, R200
D156-00002-DM++	Deutsche Marks, 10dm, 20dm/10dm, 20dm, 50dm/10dm.20dm, 50dm, 100dm/100dm
D156-00003-US$A	U.S. Dollars $1/$1, $5/$1, $5, $10, $20/$1, $5, $10, $20, $50, $100
D156-00003-US$B	U.S. Dollars $10/$20/$50/$100/$10, $20/$5, $20/$5, $10, $20, $50, $100
D156-00003-US$C	U.S. Dollars $10/$20/$50/$100/$10, $20/$20, $100/$50, $100/$10, $20, $50, $100/$20, $50, $100/$10, $20, $50
D156-00003-US$D	U.S. Dollars $1, $5, $10, $20, $50, $100
D156-00004-LIRA	Italian Lira, Lit 5k, 10k, 50k, 100k/10k/50k/100k
D156-00005-FCAN	French Canadian With Canadian Bill Orientation. Accepts 5$, 10$, 20$/10$ & 20$/10$, 20$, 50$/5$, 10$
D156-00006-RM++	Malaysian Ringett Rm10, Rm50, Rm100
D156-00007-FIM+	Finland Fim 50 & Fim 100
D156-00008-ÖS++	Austrian Schillings 20 Ös, 50 Ös, 100 Ös, 500 Ös & 1000 Ös
D156-00009-USSR	Russian Currency (Rubels) R5.000, R10.000, R50.000, R100.000/ R10.000, R50.000, R100.000
D156-00010-HGRY	Hungarian Currency F1.000, F2.000, F5.000, F10.000
D156-00011-BELF	Belgian Francs Bf 1.000 & Bf 2.000
D156-00012-KRON	Estonian Currency (Krona) 25, 50, 100, 500
D156-00013-ESC+	For 25 Esc, 1.000 Esc & 2.000 Esc / Rev Add 1000, 2000, 5.000 & 10.000
D156-00014-EEK	50 Eek, 500 Eek / Rev 2/23/00, 10, 25, 50, 100, 500
D156-00015-ATS+	Austrian Schillings, Ats 50, 100, 500, 1000

©2003 Bally Gaming and Systems
| - Revised, || - New

D156... Bill Acceptor Bill Value Range (cont.)

GLASS	DESCRIPTION
D156-00016-FCAN	French Canadian Market, With Canadian Bill Orientation. Accepts 5$, 10$, 20$/10$ & 20$/10$, 20$, 50$/5$
D156-00017-SP++	For Argentina And Other S.A. Jurisdictions. "$2, $5, $10, $20, $100"
D156-00018-DR++	For Greece. Dr 1.000, Dr 10.000
D156-00019-WON+	Korean Currency. "1,000 Won, 5,000 Won, 10,000 Won"
D156-00020-USSR	Russian Currency And Text. "10 Py6, 50 Py6, 100 Py6, 500 Py6"/Revised 10 Py6, 50 & 100 Py6
D156-00021-BS++	Boliares. "Bs. 5.000, Bs. 2.000, Bs. 1.000", Revised 100, 500, 1000, & 5000
D156-00022-MALT	Malta Currency "2l, 5l, 10l, 20l"
D156-00023-GUIL	Netherlands Guilders 10, 50, 100
D156-00024-BS++	Bs.500, Bs.1000, Bs.5000
D156-00025-SIT+	Sit 500, 1, 000, 5, 000
D156-00026-PARS	Custom Paris White Background Blue Copy 5-100/10-100/50-100/100
D156-00027-URUG	Uruguay $20, $50, $100, $200, $500, $1000
D156-00028-FIN	Fin 50, 100, 500
D156-00029-LATS	Lats 5, 10, 20, 50, 100
D156-00030-CHLI	Chile Currency $500, $1,000, $2,000, $5,000, $10,000
D156-00031-ARGE	Accepta $2, $5, $10, $20, $50, $100
D156-00032-CHIL	Accepta $1, 000/ $2, 000/ $5, 000/ $10, 000
D156-00033-EEK(C)	50 Eek / 100 Eek / 500 Eek, Digital
D156-00034-BS++(C)	Bs, 1000, Bs 2,000, Bs 5,000, Bs 10,000, Bs 20,000, Digital
D156-00035-$++++(C)	$10, $20, $50, $100, Digital
D156-00036-FCAN(C)	Fr Canadian 5$, 19$, 20$, 50$, 100$, Digital
D156-00037-BFR+	Bfr 1.000, Bfr 2.000
D156-00038-PERU	Peruivan Sol, S/10, S/20, S/50, S/100
D156-00039-DM++	10 Dm, 20 Dm, 50 Dm, 100 Dm, 200 Dm
D156-00041-EURO	Euro Bv Range, 5, 10, 20, 50
D156-00042-EURO	Euro, 10, 20, 50, 100, 200
D156-00043-EURO	Euro Range, 5 - 500
D156-00044-EURO	Euro, 10 - 500
D156-00045-EURO	Euro, 5, 10, 20, 50, 100
D156-00046-EURO	Euro, 10, 20, 50, 100
D156-00047-EURO	Euro, 10, 20, 50
D156-00048-EURO	Euro, 5 - 100
D156-00049-EURO	Euro, 10 - 200
D156-00050-SFR+	Accepts Sfr 10, 20, 50, 100, 200
D156-00051-USSR	Russian Currency 10 Py6, 50 Py6, 100 Py6, 500 Py6, 1000 Py6
D156-00052-CAND	Canadian Bills Only $5, $10, $20
D156-00053-EURO	5, 10, 20
D156-00054-FL++	Fl. 10, 25, 50, 100
D156-00055-SWIS	Swiss Currency, "10 Fs, 20 Fs, 50 Fs, 100 Fs"
D156-00056-SWIS	Swiss Currency, "10 Fs, 20 Fs, 50 Fs, 100 Fs, 200 Fs"
D156-00057-EURO	20, 50, 100 Euro
D156-00058-URUG	Uruguay $20, $50, $100, $500, $1000

D150... Bill Acceptor Bezel Decal

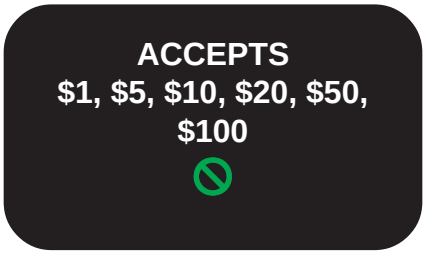

D150-00108-$A++

GLASS	DESCRIPTION
D150-00022-GRN+	Gang Art, Green Lighted Area For Bill Acceptors
D150-00070-$+++	Slant Top Us $ Bv Range, $1, $5, $10, $20, $50, $100/$5, $10, $20/$10, $20, $50, $100/$20, $50, $100/$10, $20/$20, $100/$10, $5/$5, $10, $20, $50/$1, $5, $10/$10, $20, $50/$50, $100/$100
D150-00070-SLNT	Slant Top, Red & Green Ready/Not Ready Symbols
D150-00070-B+++	$5 - $100 Slant
D150-00075-DM++	Deutsche Marks, 10dm, 20dm/10dm, 20dm, 50dm/10dm, 20dm, 50dm, 100dm/100dm
D150-00081-RAND	Rands, R10, R20/R10, R20, R50/R10, R20, R50, R100/R10, R20, R50, R100, R200
D150-00084-FIM+	Fim 50, Fim 100
D150-00090-CAND	Upright, Canadian Bill Orientation, English Text
D150-00093-ESC+	1.000, 2, 000 Esc/1.000, 2.000, 5.000, 10.000 Esc
D150-00095-CAND	Upright, Canadian Bill Orientation, No Denomination
D150-00097-LIRA	Lit.5k, 10k, 50k, 100k/10k, 50k, 100k
D150-00100-EEK+	50 Eek, 500 Eek, 10, 25, 50, 100, 500
D150-00103-AUST	Australian Accepts 5, 10& 20 Notes/5, 10, 20 & 50 Notes/5, 10, 20, 50, 100 Notes
D150-00106-ATS+	Austrian Schillings Ats 50, 100, 500, 1000.
D150-00109-DM++	Dm1 Only Deutsche Marks, 10dm, 20dm, 50dm, 100dm
D150-00110-RAND	Rands, R10, R20/R10, R20, R50/R10, R20, R50, R100/R10, R20, R50, R100, R200
D150-00111-FIM+	Fim 50, Fim 100
D150-00112-SP$+	Spanish Text W/Us Range, $1, $5, $10, $20, $50, $100
D150-00113-CAND	Upright, Canadian Bill Orientation, English Text
D150-00114-ESC+	1.00, 2.000 Esc/1.000, 2.000, 5.000, 10.000 Esc
D150-00115-LIRA	Lit. 5k, 10k, 50k, 100k/10k, 50k, 100k
D150-00116-EEK+	50 Eek, 500 Eek 10, 25, 50, 100, 500
D150-00117-AUST	Australian Accepts 5, 10 & 20 Notes/5, 10, 20 & 50 Notes/5, 10, 20, 50, 100 Notes
D150-00118-ATS+	Australian Schillings Ats 50, 100, 500, 1000.
D150-00120-USSR	Russian Currency, Rubles, Accepts R5.000, R10.000, R50, 000, R100.000
D150-00121-USSR	Russian Currency, Rubles, Accepts R5.000, R10.000, R50, 000, R100.000
D150-00123-FC1+	French Canadian Market, With Canadian Bill Orientation 5$, 10$, 20$, 50$, 100$
D150-00123-FCAN	French Canadian Market, With Canadian Bill Orientation. Accepts 5$, 10$, 20$/10$, 20$/10$, 20$, 50$/5$, 10$, 20$, 50$, 100$/10$, 20$, 50$, 100$/$100
D150-00124-FCAN	French Canadian Market, With Canadian Bill Orientation. Accepts 5$, 10$, 20$/10$ & 20$/10$, 20$, 50$/5$, 10$, 20$, 50$, 100$/10$, 20$, 50$, 100$
D150-00140-DR++	For Greece, Dr 1.000, Dr 10.000
D150-00141-DR++	For Greece, Dr 1.000, Dr 10.000
D150-00143-ARGE	Spanish For Argentina. $2, $5, $10, $20, $100
D150-00144-ARGE	Spanish For Argentina. $2, $5, $10, $20, $100
D150-00146-WON+	Korean Won 1, 000/5, 000, 10, 000
D150-00147-WON+	Korean Won 1, 000/5, 000, 10, 000
D150-00151-Bs++	Boliares Bs. 100, Bs. 500, Bs. 1.000, Bs. 5.000
D150-00153-MALT	Malta Currency 2l, 5l, 10l, 20l
D150-00156-FLOR	Florin 10, 50, 100
D150-00159-USSR	10 Py6, 50 Py6, 100 Py6, & 500 Py6
D150-00160-USSR	10 Py6, 50 Py6, 100 Py6, & 500 Py6
D150-00161-GUIL	Guilders 10, 50, 100
D150-00164-USSR	Russian Text, 10 Pyg, 50 Pyg, 100 Pyg, 500 Pyg
D150-00167-CAND	Canadian Bill Orientation
D150-00170-BS++	Bs. 500, Bs. 1.000, Bs. 5.000
D150-00173-SIT+	Sit 500, 1.000, 5.000
D150-00176-PARS	Custom Paris W/Paris Logo, 5-100, 10-100, 50-100, $100
D150-00179-BFRC	Belgian Francs Bf 1.000, Bf 2.000
D150-00182-BFRC	Belgian Francs Bf 1.000, Bf 2.000
D150-00191-FIN+	Fin 50, 100, 500
D150-00195-SP++	Acepta $1, $5, $10, $20, $50, $100.
D150-00196-LATS	Lats 5, 10, 20, 50, 100
D150-00197-CHLI	Acepta $500, $1.000, $2.000, $5.000, $10.000
D150-00203-ARGE	Accepta $2, $5, $10, $20, $50, & $100
D150-00207-CHLI	Accepta $1, 000, $2, 000, $5, 000, $10, 000
D150-00215-PERU(C)	Accepta Us $5, $10, $20, $50, $100
D150-00222-BS++	Bs 1000, Bs 2,000, Bs 5,000, Bs 10,000, Bs 20,000
D150-00223-BS++(C)	Bs 1000, Bs 2,000, Bs 5,000, Bs 10,000, Bs 20,000
D150-00224-EEK+(C)	Gpt / 50 Eek, 100 Eek, 500 Eek
D150-00225-EEK+(C)	50 Eek, 100 Eek, 500 Eek
D150-00228-$+++	$10, $20, $50, $100
D150-00229-PHIL	Gpt Philippines P 500, P 1000
D150-00230-FCAN	French Canadian 50$ & 100$
D150-00233-BFR+	Gpt, Belgium 1.000 Bfr 2.000 Bfr
D150-00234-DM++	Dm-10 Dm, 20 Dm, 50 Dm, 100 Dm, 200 Dm
D150-00235-EURO	5e, 10e, 20e, 50e, 100e / 10, 20, 50, 100 / 10, 20, 50
D150-00236-EURO	5, 10, 20, 50 / 10, 20, 50, 100, 200 / 5, 10, 20, 50, 100, 200, 500, 10, 20, 50, 100, 200, 500
D150-00240-PERU	Peruvian Sol Accepta, S/10, S/20, S/50, S/100
D150-00241-PERU	Peruvian Sol Accepta, S/10, S/20, S/50, S/100
D150-00244-EEK+	50 Eek, 100 Eek

©2003 Bally Gaming and Systems

ProSlot® 6000

D150... Bill Acceptor Bezel Decal (cont.)

GLASS	DESCRIPTION
D150-00246-SA++	So. America - Spanish, Accepta Us $1, $5, $10, $20, $50, $100
D150-00249-EURO	5 - 50 Euro
D150-00250-EURO	10 - 200 Euro
D150-00251-EURO	5 - 500 Euro
D150-00252-EURO	10 - 500 Euro
D150-00253-EURO	5 - 100 Euro
D150-00254-EURO	10 - 100 Euro
D150-00255-EURO	10 - 50 Euro
D150-00263-EURO	5 - 100 Euro
D150-00264-EURO	10, 20, 50, 100 Euro
D150-00265-EURO	10, 20, 50 Euro
D150-00266-EURO	5, 10, 20, 50 Euro
D150-00267-EURO	10 - 200 Euro
D150-00268-EURO	5 - 500 Euro
D150-00269-EURO	10 - 500 Euro
D150-00277-SFR+	Accepts Sfr 10, 20, 50, 100, 200
D150-00278-FLOR	Florin 10, 25, 50, 100 / 1, 5, 20, 50, 100
D150-00282-FLOR	Florin 10, 25, 50, 100 / 1, 5, 20, 50, 100
D150-00283-US$+	U.S. $5, $10, $20
D150-00284-USSR	10 Py6, 50 Py6, 100 Py6, 500 Py6, 1000 Py6
D150-00287-PHIL	Philippines Accepta 10p, 20p, 50p, 100p, 500p, 1000p, Gpt
D150-00289-CAND	Canadian Bills Only $5, $10, $20
D150-00292-BS++	Bs 25, Bs 500, Bs 1000, Bs 2000, Bs 5000, Bs 10, 000, Bs 20, 000
D150-00298-ARGE	Acepta $2, $5, $10, $20, $50, $100
D150-00299-EURO	5, 10, 20
D150-00302-EURO	5, 10, 20 Euro
D150-00303-PHIL	Philippines P100, P500, P1000
D150-00305-BS++	Bs- 500, 1000, 2000, 5000, 10, 000
D150-00306-SA++	Acepta $2.000, $5.000, $10.000, $20.000, $50.000
D150-00310-EURO	20, 50, 100
D150-00313-CHF+	10, 20, 50, 100, 200 Chf
D150-00314-CHF+	10, 20, 50, 100, 200 Chf
D150-00315-SWIS	10 Fs, 20 Fs, 50 Fs, 100 Fs
D150-00317-SWIS	10 Fs, 20 Fs, 50 Fs, 100 Fs
D150-00318-SWIS	10 Fs, 20 Fs, 50 Fs, 100 Fs, 200 Fs
D150-00320-SWIS	10 Fs, 20 Fs, 50 Fs, 100 Fs, 200 Fs
D150-00321-CAND	Canadian Bills Only, 5, 10, 20, 50, 100
D150-00325-HYRV	Hryvnia 10, 20, 50, 100
D150-00329-CAND	Queens Head, Canadian Belez Only, $5-$100
D150-00330-CAND	Canadian Bills Only, $10-$100
D150-00331-US++	$1-$100 Ref. D150-180
D150-00335-UK++	United Kingdom Pounds, Accepts £5, £10, £20
D150-00336-++++	Borgata - Accept Tickets $5 - $100
D150-00337-++++	Accepts Tickets, $10 -$100
D150-00338-++++	Borgata - Acpets Tickets $50 & $100
D150-00342-CAND	With Queen $5, $10, $20

D315... Lockup Decal

GLASS	DESCRIPTION
D315-00001-BERM	All Jackpots Paid By Machine
D315-00003-BERM	Top Jackpot Paid By Attendant.
D315-00004-BERM	Progressive Jackpot Paid By Attendant.
D315-00005-BERM	Jackpots Of 200 Coins Or More Paid By Attendant.
D315-00006-BERM	Jackpots Of 200 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00007-CRDT	Jackpots Of 400 Credits Or More Paid By Attendant.
D315-00008-BERM	Jackpots Of 400 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00009-BERM	Jackpots Of 500 Coins Or More Paid By Attendant.
D315-00010-BERM	Jackpots Of 500 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00012-BERM	Jackpots Of 1000 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00013-BERM	Jackpots Of 1200 Coins Or More Paid By Attendant.
D315-00014-BERM	Jackpots Of 1200 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00015-BERM	Jackpots Of 1600 Coins Or More Paid By Attendant.
D315-00016-BERM	Jackpots Of 1600 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00017-BERM	Jackpots Of 2000 Coins Or More Paid By Attendant.
D315-00018-BERM	Jackpots Of 2000 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00019-BERM	Jackpots Of $1200 Or More Paid By Attendant.
D315-00020-BERM	Jackpots Of $1200 Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00021-BERM	Jackpots Of $1195 Or More Paid By Attendant.
D315-00022-BERM	Jackpots Of $1195 Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00023-BERM	Jackpots Of $1175 Or More Paid By Attendant.
D315-00024-BERM	Jackpots Of $1175 Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00025-BERM	Jackpots Of 600 Coins Or More Paid By Attendant.
D315-00026-BERM	Jackpots Of 600 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00027-BERM	Jackpots Of 400 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00028-BERM	Jackpots Or Credits Of 1000 Coins Or More Paid By Attendant.
D315-00029-BERM	Jackpots Of 400 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00030-BERM	Jackpots Of 1000 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00031-BERM	Jackpots Over $1000 Paid By Attendant.
D315-00032-BERM	400 Coins Paid By Machine, Balance Paid By Attendant.
D315-00033-BERM	500 Coins Paid By Machine, Balance Paid By Attendant.
D315-00034-BERM	600 Coins Paid By Machine, Balance Paid By Attendant.
D315-00035-BERM	1000 Coins Paid By Machine, Balance Paid By Attendant.
D315-00036-BERM	Jackpots Or Credits Of $1195 Or More Paid By Attendant.
D315-00037-BERM	Jackpots Or Credits Of $1195 Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00038-BERM	Progressive Jackpot Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00039-BERM	Jackpots Of 800 Coins Or More Paid By Attendant.
D315-00040-BERM	Machine Pays Up To 1000 Coins. Larger Amounts Paid By Attendant.
D315-00041-BERM	Jackpots Or Credits Over 200 Coins Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00042-BERM	Jackpots Or Credits Over 200 Coins Paid By Attendant.
D315-00043-BERM	Jackpots Or Credits Over 400 Coins Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00044-BERM	Jackpots Or Credits Over 400 Coins Paid By Attendant.
D315-00045-BERM	Jackpots Or Credits Over 600 Coins Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00046-BERM	Jackpots Or Credits Over 600 Coins Paid By Attendant.
D315-00047-BERM	Jackpots Or Credits Over 800 Coins Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00048-BERM	Jackpots Or Credits Over 800 Coins Paid By Attendant.
D315-00049-BERM	Jackpots Or Credits Over 1000 Coins Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00050-BERM	Jackpots Or Credits Over 1000 Coins Paid By Attendant.
D315-00051-BERM	Jackpots Or Credits Over 1200 Coins Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again.
D315-00052-BERM	Jackpots Or Credits Over 1200 Coins Paid By Attendant.
D315-00053-BERM	Machine Pays Up To 200 Coins. Larger Amounts Paid By Attendant.
D315-00054-BERM	Machine Pays Up To 500 Coins. Larger Amounts Paid By Attendant.
D315-00055-BERM	Jackpots Over 400 Coins Paid By Attendant.
D315-00056-BERM	Jackpots Over 1000 Coins Paid By Attendant.

.9496" x 9.6562"

ALL JACKPOTS PAID BY MACHINE.

D315-00001-BERM

©2003 Bally Gaming and Systems

| - Revised, || - New

D315... Lockup Decal (cont.)

GLASS	DESCRIPTION
D315-00057-BERM	Jackpots Over $800 Paid By Attendant.
D315-00058-BERM	Jackpots Or Credits Over 500 Coins Paid By Attendant.
D315-00060-BERM	Jackpots Paid By Attendant.
D315-00062-BERM	Jackpots Of 500 Credits Or More Paid By Attendant.
D315-00063-BERM	Jackpots Of $1500 Or More Paid By Attendant.
D315-00064-BERM	Machine Pays Up To 800 Coins. Larger Amounts Paid By Attendant.
D315-00065-BERM	Machine Pays Up To 2000 Coins. Larger Amounts Paid By Attendant.
D315-00066-BERM	Machine Pays Up To 400 Coins. Larger Amounts Paid By Attendant.
D315-00067-BERM	Jackpots Over 1000 Coins Paid By Attendant, Player May Not Cash Out During Bonus Play.
D315-00068-BERM	Jackpots Over 400 Coins Paid By Attendant.
D315-00069-BERM	Millionaire 7's Custom, Press Button To Start Bonus & 400 Coin Lock Up.
D315-00069-FC++	Millionaire 7's Custom, Press Button To Start Bonus & 400 Coin Lock Up., French Canadian
D315-00069-SP++	Millionaire 7's Custom, Press Button To Start Bonus & 400 Coin Lock Up., Spanish
D315-00070-BERM	I Love Jackpots Custom, 400 Coin & Bonus Button
D315-00071-BERM	I Love Jackpots Custom, 1000 Coin & Bonus Button
D315-00072-BERM	Dagwood's Big Bonus, 400 Coin & Bonus Button
D315-00073-BERM	Dagwood's Big Bonus, 1000 Coin & Bonus Button
D315-00074-BERM	World Tour, 400 Coin & Bonus Button
D315-00075-BERM	World Tour, 1000 Coin & Bonus Button
D315-00076-BERM	Monte Carlo Bonus Statement & 400 Coin Lock Up & Bonus Button, Nap
D315-00076-SP++	Monte Carlo Bonus Statement & 400 Coin Lock Up & Bonus Button, Spanish
D315-00077-BERM	Monte Carlo Bonus Statement & 1000 Coin Lock Up & Bonus Button, Nap
D315-00078-BERM	All Wins Paid By Machine.
D315-00079-BERM	Jackpots Paid By Attendant.
D315-00080-BERM	Wild Statement + 400 Coin, Lock Up Logo Is Wild & Multiplies Winning Combination.
D315-00081-BERM	Wild Statement + 1000 Coin, Lock Up Logo Is Wild & Multiplies Winning Combination.
D315-00082-BERM	All Payouts Go To Ticket.
D315-00084-BERM	2000 Coins Paid By Machine, Balance Paid By Attendant.
D315-00086-BERM	Jackpots Of 2000 Credits Or More Paid By Attendant. (Ticket Printer)
D315-00092-BERM	Golden Nugget, Machine Pays Up To 300 Coins, All Other Paid By Attendant.
D315-00093-BERM	Max Coin Bonus! 4th Reel Feature Multiplus Adds To, Or Respins Winning Combination When On Payline.
D315-00093-SP++	Max Coin Bonus! 4th Reel Feature Multiplus Adds To, Or Respins Winning Combination When On Payline, Spanish.
D315-00094-BERM	Max Coin Bonus! Dagwood's Big Bonus (Logo) Pays Bonus Feature, Press (B) To Start Bonus.
D315-00095-BERM	Max Coin Bonus! World Tour Logo, Play Bonus Feature, Press (B) To Start Bonus.
D315-00095-CRDT	Max Credit Bonus! World Tour Logo, Play Bonus Feature, Press (B) To Start Bonus.
D315-00097-BERM	Ray Charles, America The Beautiful, Max Coin Bonus, (3 Tickets) Atb Bonus Pays Up To 1000 Coin Bonus.
D315-00098-BERM	Max Coin Bonus (3 Sym) Contestant Bonus Pays Up To 1000 Credits.
D315-00099-BERM	Bonus Game
D315-00100-BERM	Max Coin Bonus Awards 4th Reel, Frenzy Bonus, Win Up To $10,000 Credits.
D315-00101-BERM	Machine Pays Up To 160 Coins, Larger Amounts Paid By Attendant.
D315-00102-BERM	Bonus Info
D315-00103-BERM	Max Coin Bonus (4-7's) Pays Super Jackpot.
D315-00103-CRDT	Max Credit Bonus (4-7's) Pays Super Jackpot.
D315-00103-FR++	Max Coin Bonus (4-7's) Pays Super Jackpot., French
D315-00103-SP++	Max Coin Bonus (4-7's) Pays Super Jackpot., Spanish
D315-00104-BERM	Max Coin Bonus (4-7's) Pays $5000.
D315-00105-BERM	Playboy, Max Coin Bonus (3) Sym, Wins Super Jackpot.
D315-00106-BERM	Playboy, Max Coin Bonus & Button.
D315-00107-BERM	Millionaire 7's, Button Top Jackpot Paid By Attendant., French
D315-00108-BERM	Millionaire 7's, Bonus Statement, Jackpots Of $1200 Or More Paid By Attendant.
D315-00109-BERM	Blazing 7's Scatter Pays
D315-00109-CRDT	Blazing 7's Scatter Pays
D315-00109-FR++	Blazing 7's Scatter Pays, French
D315-00109-SP++	Blazing 7's Scatter Pays, Spanish
D315-00110-BERM	Popeye Bonus Frenzy, Bonus Information

GLASS	DESCRIPTION
D315-00111-BERM	5x Bonus Frenzy Win Up To 25,000 Credits.
D315-00112-BERM	Hot Lines Bonuses (3 Symbols) Bonus Line Pays When In A Winning Combination.
D315-00113-BERM	Spinach Can Bonus Spinner (Sym) On 3rd Reel Wins Bonus Feature On Or Within One Position Of Payline.
D315-00114-BERM	1000 Credits To Be Paid To Card. Balance Paid By Attendant.
D315-00115-BERM	Frankie & Annette, Heart Mystery Bonus
D315-00116-BERM	Max Coin Bonus! 4th Reel Feature Multiplus Adds To, Or Respins Winning Combination When On Payline.
D315-00117-BERM	Max Coin Bonus! 4th Reel Feature Multiplus Adds To, Or Respins Winning Combination When On Payline. Jackpot Of 400 Coins Or More Paid By Attendant. (Slant)
D315-00118-BERM	Max Coin Bonus! 4th Reel Feature Multiplus Adds To, Or Respins Winning Combination When On Payline. Jackpot Of 1000 Coins Or More Paid By Attendant. (Slant)
D315-00119-BERM	Popeye Scatter Pays
D315-00121-BERM	5 Line Hotlines Bonus
D315-00121-SP++	5 Line Hotlines Bonus, Spanish
D315-00122-BERM	2 Coin Bonus, In The Money
D315-00123-BERM	5 Line Bonus, In The Money
D315-00124-BERM	Frankie & Annette, Bonus
D315-00125-BERM	Mr. Magoo, Bonus
D315-00125-SP++	Mr. Magoo, Bonus, Spanish
D315-00127-BERM	Richie Rich, Bonus
D315-00127-SP++	Richie Rich, Bonus, Spanish
D315-00128-BERM	Andy Capp, Bonus
D315-00129-BERM	Ray Charles
D315-00130-BERM	100 CPBM BPBA
D315-00131-BERM	Bonus
D315-00132-BERM	Bonus Statement, Double Money
D315-00133-BERM	Playboy Bonus, Super Jackpot
D315-00134-BERM	Play Bonus, 10,000
D315-00134-FR++	Play Bonus, 10,000, French
D315-00135-BERM	Monte Carlo, 400 Coin Lock Up, Nevada
D315-00135-SP++	Monte Carlo, Spanish, Nevada
D315-00136-BERM	Bonus
D315-00137-BERM	Redeem Ticket With Cashier Or Use At Other Ticket Machine. All Wins Paid By Machine Or Attendant.
D315-00138-BERM	Wild Times Bonus
D315-00139-BERM	Funky Times Bonus
D315-00140-BERM	Bonus Statement Winning Times
D315-00140-FR++	Bonus Statement Winning Times, French
D315-00141-BERM	Liberace Bonus Statement
D315-00142-BERM	Monte Carlo Credits, 400 Coin
D315-00143-BERM	Monte Carlo Credits, 1000 Coin
D315-00144-BERM	Millionaire 7's Button, 400 Coin, Change To Credits
D315-00145-BERM	Bonus, Max Coin Bonus Special Scatter Bonus Pays
D315-00145-FR++	Bonus, Max Coin Bonus Special Scatter Bonus Pays, French
D315-00146-BERM	Credit Version, Bonus Statement
D315-00147-BERM	Hans & Franz, Bonus Statement
D315-00148-BERM	Cone Heads, Bonus Statement
D315-00149-BERM	Blues Brothers, Bonus Statement
D315-00150-BERM	Bonus Statement
D315-00151-BERM	Bonus
D315-00152-BERM	Bonus Statement
D315-00152-FR++	Bonus Statement
D315-00153-BERM	Bonus Statement
D315-00153-FR++	Bonus Statement, French
D315-00154-BERM	Bonus Statement
D315-00155-BERM	Bonus Statement
D315-00156-BERM	Bonus Statement
D315-00156-SP++	Bonus Statement, Spanish
D315-00157-NV++	Monte Carlo 1000 Coin
D315-00158-UK++	Bonus Statement, United Kingdom, Diamond Line
D315-00159-UK++	Double Money Bonus Statement, United Kingdom
D315-00160-UK++	California Dreamin' Bonus Statement, United Kingdom
D315-00161-BERM	MOC Bonus Statement, $1195, $5
D315-00162-NV++	MOC Bonus Statement, $5
D315-00163-++++	Cash For Life, Annuity Statement, Multi Denom
D315-00164-BERM	No Lock Up Bonus Info, MOC Only
D315-00165-NV++	No Lock Up Bonus Info, MOC Only, Nevada Button
D315-00166-BERM	Maps Multi Denom Only
D315-00167-BERM	Playboy Frenzy Bonus
D315-00168-BERM	Monte Carlo Bonus $1200 Coin
D315-00169-BERM	Maps Multi Denom Plus 1000 Coin

©2003 Bally Gaming and Systems

ProSlot® 6000

D315... Lockup Decal (cont.)

GLASS	DESCRIPTION
D315-00170-BERM	Maps Multi Denom Plus 400 Coin
D315-00171-BERM	5 Times 10 Times Money Bonus Statement
D315-00172-NV++	Nevada Monte Carlo Bonus Info & $1200 Lockup
D315-00173-BERM	Horse Play, 400 Coin Lockup & 1000 Coin Lockup
D315-00174-BERM	Bonus Decal Blues Brothers Wild Times
D315-00175-BERM	Monte Carlo, Non - Nevada, 300 Coin Lock Up
D315-00176-$MAT	Non Progressive Lock Up
D315-00176-SP++	Non Progressive Lock Up, Spanish
D315-00177-BERM	Bonus Statement
D315-00179-BERM	Bonus
D315-00180-BERM	Bonus
D315-00181-NV++	Nevada Monte Carlo, 300 Coin Lockup
D315-00184-BERM	Bonus 7's, Bonus, Credit
D315-00184-SP++	Bonus 7's, Bonus, Credit, Spanish
D315-00185-BERM	Hanz & Franz Progressive Bonus
D315-00186-BERM	Cone Heads Progressive Bonus
D315-00187-1+++	Park Place Custom - 5¢ - 50¢
D315-00188-1++++	Park Place Custom - $2
D315-00189-1++++	Park Place Custom - $1
D315-00190-1++++	Park Place Custom - $5
D315-00191-BERM	Millionaire 7's Custom, Press Button To Start Bonus & 400 Credit Lock Up.
D315-00192-UK++	Roaring 20's Bonus Statement
D315-00193-UK++	Black & White Bonus Statement
D315-00194-++++	Cone Heads, Bonus Statement, 10,000 Top Award
D315-00195-++++	40,000 Top Award
D315-00196-++++	Hanz & Franz Progressive Bonus 10k
D315-00197-++++	Hanz & Franz Progressive Bonus 40k
D315-00198-++++	2000 Coins Paid By Machine, Balance Paid By Attendant
D315-00198-CRDT	2000 Credits Paid By Machine, Balance Paid By Attendant
D315-00199-21+++	No Person Under 21 Years Of Age May Play (Oregon)
D315-00200-++++	SNL Bonus Frenzy
D315-00201-++++	Single Meter Decal
D315-00202-BERM	5¢/50¢ Park Place Easy Pay Ticket 50 Credit/$3,000
D315-00203-BERM	$1 & $2, 25 Credit/ $3,000
D315-00204-BERM	$5, 10 Credit / $10,000
D315-00205-BERM	$10, $25, $100, 5 Credits/ $10,000
D315-00206-CRDT	Max Credit Bonus
D315-00207-CRDT	Bonus Play Info
D315-00208-CRDT	Bonus Play Info
D315-00209-CRDT	Bonus Play Info
D315-00210-CRDT	Diamond Line Frenzy, Credit
D315-00211-CRDT	Quarter Millions Credit
D315-00212-CRDT	One Thousand Credit
D315-00213-CRDT	Fireball Frenzy Credit
D315-00214-CRDT	Bonus Frenzy Ii Credit
D315-00215-CRDT	Scatter Frenzy Credit
D315-00216-CRDT	SNL Frenzy Bonus $10,000
D315-00217-OLGC	Cash For Life, Bonus, OLGC
D315-00218-BERM	Lil' Abner
D315-00219-BERM	Bonus Statement
D315-00220-BERM	Bonus Statement
D315-00221-BERM	Bonus Statement
D315-00222-BERM	Bonus Statement
D315-00223-BERM	Bonus Statement
D315-00224-BERM	Triple Spin Bonus + Player Tip
D315-FC++6-BERM	Jackpots Of 200 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again. French Canadian
D315-FC+10-BERM	Jackpots Of 500 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again. French Canadian
D315-FC+11-BERM	Jackpots Of 1000 Coins Or More Paid By Attendant. French Canadian
D315-FC+40-BERM	Machine Pays Up To 1000 Coins. Larger Amounts Paid By Attendant. French Canadian
D315-FC+53-BERM	Machine Pays Up To 200 Coins. Larger Amounts Paid By Attendant. French Canadian
D315-FC+54-BERM	Machine Pays Up To 500 Coins. Larger Amounts Paid By Attendant. French Canadian
D315-FR++3-BERM	Top Jackpot Paid By Attendant. French, Malfunction Disclaimer
D315-FR178-BERM	Top Jackpot Paid By Attendant, French
D315-FR182-BERM	Top Jackpot Paid By Attendant. French
D315-OT++5-BERM	Jackpots Of 200 Coins Or More Paid By Attendant. English/French Canadian
D315-OT++7-BERM	Jackpots Of 400 Coins Or More Paid By Attendant. English/French Canadian
D315-OT++9-BERM	Jackpots Of 500 Coins Or More Paid By Attendant. English/French Canadian
D315-OT+11-BERM	Jackpots Of 1000 Coins Or More Paid By Attendant. English/French Canadian
D315-OT+12-BERM	Jackpots Of 1000 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again. French Canadian
D315-OT+40-BERM	Machine Pays Up To 1000 Coins. Larger Amounts Paid By Attendant. English/French Canadian
D315-OT+47-BERM	Jackpots Or Credits Over 800 Coins Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again. English/French Canadian
D315-OT+53-BERM	Machine Pays Up To 200 Coins. Larger Amounts Paid By Attendant. English/French Canadian
D315-OT+54-BERM	Machine Pays Up To 500 Coins. Larger Amounts Paid By Attendant. English/French Canadian
D315-PT++3-BERM	Top Jackpot Paid By Attendant. Portuguese
D315-PT++7-BERM	Jackpots Of 400 Coins Or More Paid By Attendant. Portuguese
D315-SP++2-BERM	All Jackpots Paid By Machine. To Play Credit Mode Press Cash Button, To Cancel Press Button Again. Spanish
D315-SP++5-BERM	Jackpots Of 200 Coins Or More Paid By Attendant. Spanish
D315-SP++7-BERM	Jackpots Of 400 Coins Or More Paid By Attendant. Spanish
D315-SP++8-BERM	Jackpots Of 400 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again. Spanish
D315-SP+11-BERM	Jackpots Of 1000 Coins Or More Paid By Attendant. Spanish
D315-SP+12-BERM	Jackpots Of 1200 Coins Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again. Spanish
D315-SP+20-BERM	Jackpots Of $1200 Or More Paid By Attendant. To Play Credit Mode Press Cash Button, To Cancel Press Button Again. Spanish
D315-SP+59-BERM	Premios De 400 Monedas O Mas Pagos Por El Asistente Special Translation For Some S.A. Jurisdictions, Jackpots Of 400 Or More Coins Paid By Attendant
D315-SP+61-BERM	Premios De 1000 Monedas O Mas Pagos Por El Asistente, Plus Standard Credit Mode Special Translation For Some S.A. Jurisdictions, Jackpots Of 1000 Or More Coins Paid By Attendant
D315-SP090-BERM	Premios De 1000 Monedas O Mas Pagos Por El Asistente.

D100... Denomination Decal

DECAL	DESCRIPTION
D100-.05++-BERM	.05
D100-.10++-BERM	.10
D100-.20++-BERM	.20
D100-.25++-BERM	.25
D100-.50++-BERM	.50
D100-0.10+-BERM	0.10
D100-1.00+-BERM	1.00
D100-1++++-BERM	1
D100-5.00+-BERM	5
D100-20+++-BERM	20
D100-50+++-BERM	50
D100-66+++-BERM	66
D100-100++-BERM	100
D100-W500+-BERM	500
D100-1000+-BERM	1000

D100-.25$+-BERM	.25$
D100-.50$+-BERM	.50$
D100-1$+++-BERM	1$
D100-2$+++-BERM	2$
D100-5$+++-BERM	5$

©2003 Bally Gaming and Systems

D100... Denomination Decal (cont.)

DECAL	DESCRIPTION
D100-1.00$-BERM	1.00$
D100-2.00$+-BERM	2.00$
D100-5.00$+-BERM	5.00$
D100-25.$+-BERM	25.00$
D100-1C$++-BERM	100.00$
D100-1C+++-BERM	1C
D100-20CCC-BERM	20C
D100-50CCC-BERM	50c
D100-2P+++-BERM	2P
D100-10P++-BERM	10P
D100-20P++-BERM	20P
D100-1CENT-BERM	1¢
D100-5C+++-BERM	5¢
D100-10C++-BERM	10¢
D100-20C++-BERM	20¢
D100-25C++-BERM	25¢
D100-50C++-BERM	50¢
D100-75¢++-BERM	75¢
D100-$.25+-BERM	$ .25
D100-$.50+-BERM	$ .50
D100-US$1+-BERM	US$1
D100-$1+++-BERM	$1
D100-$2+++-BERM	$2
D100-$3+++-BERM	$3
D100-$5+++-BERM	$5
D100-$10++-BERM	$10
D100-$20++-BERM	$20
D100-$25++-BERM	$25
D100-$50++-BERM	$50
D100-++$50-BERM	$50
D100-$100+-BERM	$100.00
D100-$1C++-BERM	$100
D100-$200+-BERM	$200
D100-$500+-BERM	$500.00
D100-$1K++-BERM	$1,000.00
D100-ATS2+-BERM	ATS 2
D100-ATS5+-BERM	ATS 5
D100-ATS10-BERM	ATS 10
D100-ATS20-BERM	ATS 20
D100-BF20+-BERM	BF20
D100-BF50+-BERM	BF50
D100-BS.50-BERM	BS .50
D100-BS500-BERM	BS .500
D100-BS5++-BERM	BS 5, 1 FICHA 100 CREDITOS
D100-BS10+-BERM	BS 10, 1 FICHA 50 CREDITOS
D100-BS25+-BERM	BS 25, 1 FICHA 20 CREDITOS
D100-BS100-BERM	BS 100
D100-BS1C+-BERM	BS 100
D100-2CENT-BERM	2 CENT
D100-5++++-BERM	5 CENTS
D100-20CEN-BERM	20 CENT
D100-25COP-BERM	25 COPECK
D100-50COP-BERM	50 COPECK
D100-1/2DN-BERM	1/2 DINAR
D100-1/4DN-BERM	1/4 DINAR
D100-1DINA-BERM	1 DINAR
D100-5DINA-BERM	5 DINAR
D100-DKR1+-BERM	DKR1
D100-DKR10-BERM	DKR10
D100-1DM++-BERM	1 DM
D100-2DM++-BERM	2 DM
D100-5DM++-BERM	5 DM
D100-DR25+-BERM	DR 25
D100-DR50+-BERM	DR 50

DECAL	DESCRIPTION
D100-DR100-BERM	DR 100
D100-DR200-BERM	DR 200
D100-DR250-BERM	DR 250
D100-DR500-BERM	DR 500
D100-DR1K+-BERM	DR 1000
D100-E1+++-BERM	E1
D100-E2+++-BERM	E2
D100-E5+++-BERM	E5
D100-EEK++-BERM	EEK
D100-EEK1+-BERM	EEK 1
D100-EEK5+-BERM	EEK 5
D100-ESC25-BERM	ESC 25
D100-ESC50-BERM	ESC 50
D100-ESC1C-BERM	ESC 100
D100-ESC2C-BERM	ESC 200
D100-0.01E-BERM	0.01E (EURO)
D100-20EUR-BERM	0.20E (EURO)
D100-50EUR-BERM	0.50E (EURO)
D100-1EURO-BERM	1E (EURO)
D100-2EURO-BERM	2E (EURO)
D100-F1+++-BERM	F1
D100-F2+++-BERM	F2
D100-F5+++-BERM	F5
D100-F10++-BERM	F10
D100-20F++-BERM	20F
D100-F50++-BERM	F50
D100-1FF++-BERM	1 FF
D100-2FF++-BERM	2 FF
D100-5FF++-BERM	5 FF
D100-10FF+-BERM	10 FF
D100-20FF+-BERM	20 FF
D100-25FF+-BERM	25 FF
D100-50FF+-BERM	50 FF
D100-100FF-BERM	100 FF
D100-2FFTK-BERM	2 FF TOKEN
D100-10FFT-BERM	10 FF TOKEN
D100-50FFT-BERM	50 FF TOKEN
D100-10CFI-BERM	10¢ FICHA
D100-25CFI-BERM	25¢ FICHA
D100-50CFI-BERM	50¢ FICHA
D100-1FICH-BERM	1 FICHAS
D100-FICHA-BERM	FICHA
D100-FICHS-BERM	FICHAS
D100-FIM1+-BERM	FIM1
D100-FIM5+-BERM	FIM5
D100-FIM10-BERM	FIM10
D100-FL+++-BERM	FL
D100-FL1++-BERM	FL1
D100-FLN25-BERM	FLORIN .25
D100-FLORN-BERM	FLORIN
D100-050FS-BERM	0.50 FS (FRANC, SWISS)
D100-1FS++-BERM	1 FS (FRANC, SWISS)
D100-2FS++-BERM	2 FS (FRANC, SWISS)
D100-5FS++-BERM	5 FS (FRANC, SWISS)
D100-10FS+-BERM	10 FS (FRANC, SWISS)
D100-20FS+-BERM	20 FS (FRANC, SWISS)
D100-20RAP-BERM	20 RAPPEN
D100-20RTK-BERM	20 RAPPEN
D100-50RPN-BERM	50 RAPPEN
D100-5CFRF-BERM	500 FRF
D100-1KFRF-BERM	1000 FRF

©2003 Bally Gaming and Systems

ProSlot® 6000

D100... Denomination Decal (cont.)

DECAL	DESCRIPTION
D100-FRS2+-BERM	FRS 2
D100-FRS5+-BERM	FRS 5
D100-25KOP-BERM	0,25 KOPEG
D100-50KOP-BERM	0,50 KOPEG
D100-1KR++-BERM	1 KR
D100-5KR++-BERM	5 KR
D100-10KR+-BERM	10 KR
D100-KSH5+-BERM	KSH 5
D100-10KSH-BERM	TOKEN 10 KSH
D100-20KSH-BERM	TOKEN 20 KSH
D100-L2+++-BERM	L2
D100-L500+-BERM	L500
D100-L1000-BERM	L1000
D100-L5000-BERM	L5000
D100-10LAT-BERM	.10 LATS
D100-20LAT-BERM	.20 LATS
D100-50LAT-BERM	.50 LATS
D100-LAT1+-BERM	LAT 1
D100-LIT5C-BERM	LIT 500
D100-LIT1K-BERM	LIT 1000
D100-LIT2K-BERM	LIT 2000
D100-LIT5K-BERM	LIT 5000
D100-1LITA-BERM	1 LITAS
D100-5LITA-BERM	5 LITAS
D100-LL1K+-BERM	LL 1.000
D100-LL2K+-BERM	LL 2.000
D100-LL5K+-BERM	LL 5.000
D100-LL20K-BERM	LL 20.000
D100-LM.10-BERM	LM0.10
D100-LM.25-BERM	LM0.25
D100-LM.50-BERM	LM0.50
D100-LUF20-BERM	LUF 20
D100-LUF50-BERM	LUF 50
D100-MLT$1-BERM	MULTI-DENOMINATION INSERT $1
D100-MLT25-BERM	MULTI-DENOMINATION INSERT 25¢
D100-MLT50-BERM	MULTI-DENOMINATION INSERT 50¢
D100-MLT5C-BERM	MULTI-DENOMINATION INSERT 5¢
D100-MULTI-BERM	MULTI-DENOMINATION
D100-NKR1+-BERM	NKR 1
D100-NKR5+-BERM	NKR 5
D100-5OS++-BERM	5 OS
D100-10OS+-BERM	10 OS
D100-200S++-BERM	20 OS
D100-20OS+-BERM	20 OS
D100-P1+++-BERM	P1
D100-P2+++-BERM	P2
D100-P5+++-BERM	P5
D100-P10++-BERM	P10
D100-2PESO-BERM	2 PESO
D100-50PES-BERM	50 PESOS
D100-1CPES-BERM	100 PESOS
D100-R0.20-BERM	R0.20
D100-R0.50-BERM	R0.50
D100-R1.00-BERM	R1.00
D100-R1+++-BERM	R1
D100-R2.00-BERM	R2.00
D100-R2+++-BERM	R2
D100-R5.00-BERM	R5.00
D100-R5+++-BERM	R5

DECAL	DESCRIPTION
D100-R10++-BERM	R10
D100-R25++-BERM	R25
D100-R500+-BERM	R500
D100-1ROUB-BERM	1 ROUBLE
D100-2ROUB-BERM	2 ROUBLES
D100-2RUBL-BERM	2 ROUBLE
D100-5ROUB-BERM	5 ROUBLE
D100-10ROU-BERM	10 ROUBLES
D100-20ROU-BERM	20 ROUBLES
D100-1RS++-BERM	1 RS
D100-RS2++-BERM	RS 2
D100-1PY6+-BERM	1 PY6 (RUSSIAN)
D100-2PY6+-BERM	2 PY6 (RUSSIAN)
D100-5PY6+-BERM	5 PY6 (RUSSIAN)
D100-10PY6-BERM	10 PY6 (RUSSIAN)
D100-1SEK+-BERM	1 SEK
D100-SEK1+-BERM	SEK1
D100-SEK5+-BERM	SEK5
D100-10SEK-BERM	10 SEK
D100-1SF++-BERM	1 SF
D100-20SF+-BERM	20 SF
D100-SING1-BERM	SING 1¢
D100-SIN20-BERM	SING 20¢
D100-SIN50-BERM	SING .50
D100-SING$-BERM	SING $1
D100-SING5-BERM	SING 5
D100-1SOL++-BERM	1 SOL
D100-1/2SL-BERM	1/2 SOLE
D100-SOLE+-BERM	SOLE
D100-SOLE5-BERM	S/.05
D100-1RTKN-BERM	1R TOKEN
D100-SMTKN-BERM	SMALL TOKEN
D100-TOKEN-BERM	TOKEN
D100-TOKN2-BERM	TOKEN 2
D100-TOK10-BERM	TOKEN 10
D100-TOK25-BERM	TOKEN 25
D100-TOK1C-BERM	TOKEN 100
D100-TOK2C-BERM	TOKEN 200
D100-TOK5C-BERM	TOKEN 500
D100-5PENC-BERM	5 PENCE
D100-PENCE-BERM	PENCE
D100-UK1LB-BERM	(UK) 1
D100-100CR-BERM	1C=US ($1=100CR)
D100-10CR+-BERM	10C=US ($1=10CR)
D100-20CR+-BERM	20C=US ($1=20CR)
D100-25+++-BERM	25C-US ($1=100CR)
D100-1C-25-BERM	1C=25¢, BUYS 25 CREDITS
D100-25-25-BERM	1C 25¢= 25 CREDITS
D100-5PTKN-BERM	5P 10P= 5 CREDITS
D100-5CTKN-BERM	5¢ TOKEN
D100-25CTK-BERM	25¢ TOKEN
D100-50TOK-BERM	50¢ TOKEN
D100-$1TKN-BERM	$1 TOKEN
D100-$2TKN-BERM	$2 TOKEN
D100-$4TKN-BERM	$4 TOKEN
D100-$5TKN-BERM	$5 TOKEN
D100-$10TK-BERM	$10 TOKEN
D100-$20TK-BERM	$20 TOKEN
D100-$25TK-BERM	$25 TOKEN
D100-$1CTK-BERM	$100 TOKEN
D100-$5CTK-BERM	$500 TOKEN
D100-TK10c-BERM	TOKEN 10¢
D100-TK25c-BERM	TOKEN 25¢
D100-US$1T-BERM	US $1 TOKEN
D100-100WN-BERM	100 WON
D100-500WN-BERM	500 WON

©2003 Bally Gaming and Systems
| - Revised, || - New

ProSlant® 6000 / 6000E

Slant
Feature Glass
G679...Radial
G605...Standard

S6E
Top Box Door
G767...Radial
G771...Standard

Reel Glass
G606...Slant
G788...S6E

Denomination
Decal D100...
(page 3A-67)

Top Award Decal
D400...(page 3A-46)

Lockup Award Decal
D315...(page 3A-51)

Coin Play Decal
D310...(page 3A-49)

Bill Acceptor Bezel
Decal D310...
(page 3A-50)

Slant Feature Housings

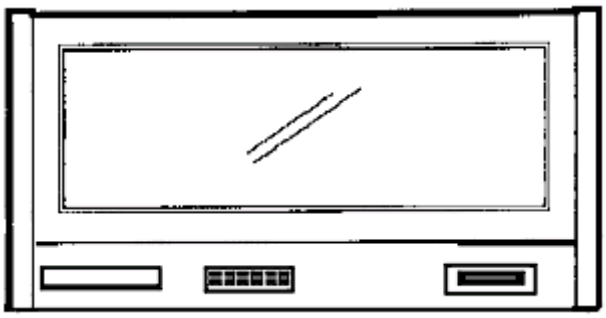

Standard Feature Housing

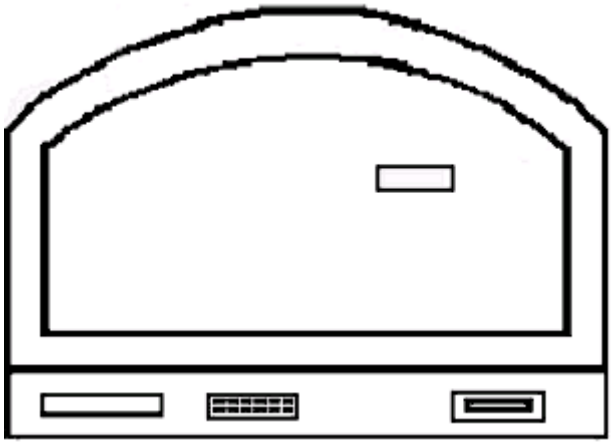

Radial Feature Housing

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

G605... Feature Glass, Standard

GLASS	ART FORM	DESCRIPTION
G605-00115-++++	APD-5007	Caesar's Coins, Custom Caesars Palace
G605-00035-++++	APN-5001	Hat Trick
G605-00180-++++	APT-5002	Wild Tigers
G605-00031-++++	APT-5014	Deuces Wild, Monte Carlo/International
G605-00056-++++	APT-5015	Deuces Wild
G605-00237-9DIG	APT-5017	Bank Of The Nile, Custom Caesar's Palace
G605-00114-++++	APT-5019	Bank Of The Nile
G605-00114-BANK	APT-5019	Bank Of The Nile, Custom Caesar's Palace
‖ G605-00031-++++	APT-5022	Deuces Wild
G605-00226-++++	APT-5023	Ball Of Fire
G605-00226-12MI	APT-5023	Ball Of Fire, English
G605-00216-++++	APT-5024	Ball Of Fire
G605-00293-++++	APT-5025	Win
G605-00287-++++	APT-5026	Win
G605-00274-++++	BAR-5004	Jackpot Bars
‖ G605-00138-++++	BAR-5006	Jackpot Bars
G605-00270-++++	BL2-5001	2nd Chance Blazing 7's
G605-00331-++++	BL3-5001	3's A Charm
‖ G605-00036-++++	BL7-0001	Reel Gems
‖ G605-00018-++++	BL7-0005	Blazing 7's
‖ G605-00018-++++	BL7-0011	Blazing 7's
‖ G605-00021-++++	BL7-0044	Reel Gems
‖ G605-00017-++++	BL7-0047	Reel Gems
‖ G605-00017-++++	BL7-0048	Reel Gems
G605-00036-++++	BL7-5007	Blazing 7's
G605-00036-12MI	BL7-5007	Blazing 7's, English
‖ G605-00036-$5++	BL7-5021	Blazing 7's, $5
G605-00141-++++	BL7-5026	Blazing 7's
G605-00141-PGMT	BL7-5026	Blazing 7's
G605-00021-$5++	BL7-5041	Reel Gems, $5
G605-00021-++++	BL7-5041	Reel Gems
G605-00017-++++	BL7-5052	Reel Gems
G605-00018-$5MI	BL7-5053	Blazing 7's, English, $5
G605-00018-++++	BL7-5053	Blazing 7's, English
G605-00018-SP++	BL7-5053	Blazing 7's, Spanish
G605-00150-++++	BL7-5056	Flaming 7's
G605-00150-FR++	BL7-5056	Flaming 7's, French
G605-00150-MINI	BL7-5056	Flaming 7's
G605-00036-$1++	BL7-5057	Blazing 7's, $1
‖ G605-00036-++++	BL7-5057	Blazing 7's
‖ G605-00021-++++	BL7-5058	Reel Gems
G605-00119-PGMT	BL7-5062	Blazing 7's
‖ G605-00219-PROG	BL7-5079	Worlds Of Cash
‖ G605-00262-12MI	BL7-5081	Roman Rewards, Custom Caesar's Palace
G605-00262-7DIG	BL7-5081	Roman Rewards, Custom Caesar's Palace
G605-00383-FRMI	BL7-5103	Fabulous Paris, French
‖ G605-00535-PROG	BLB-5002	Blazing 7's Betty Boop
‖ G605-00535-PROG	BLB-5003	Blazing 7's Betty Boop
‖ G605-00535-PROG	BLB-5004	Blazing 7's Betty Boop
G605-00380-12MI	BLD-5001	Blazing 7's Double Jackpot, English
‖ G605-00380-FR++	BLD-5001	Blazing 7's Double Jackpot, French
G605-00516-++++	BLD-5004	Double Blazing 7's Double Jackpot
‖ G605-00516-FR++	BLD-5004	Double Blazing 7's Double Jackpot, French
G605-00290-++++	BLF-5001	Trailblazer
G605-00290-SP++	BLF-5001	Trailblazer, Spanish
G605-00290-FR++	BLF-5002	Trailblazer, French
G605-00357-++++	BLF-5003	Blazing 7's Deluxe With Special Feature
G605-00357-FR++	BLF-5003	Blazing 7's Deluxe With Special Feature, French
‖ G605-00357-++++	BLF-5004	Blazing 7's Deluxe With Special Feature
G605-00116-++++	BM7-5008	Black Gold Red 7's
G605-00116-FR++	BM7-5008	Black Gold Red 7's, French
G605-00235-++++	BM7-5027	Red Hot 7's
G605-00282-++++	BM7-5036	UFO
G605-00282-SP++	BM7-5036	UFO, Spanish
G605-00407-$5++	BM7-5037	Caesar's Gold, English, $5
‖ G605-00282-++++	BM7-5039	UFO
G605-00382-FR++	BM7-5042	UFO, French
G605-00520-++++	BNT-5001	Bonus Times
‖ G605-00549-++++	BNT-5003	Bonus Times
‖ G605-00044-++++	BUB-0024	Balligator
‖ G605-00032-++++	BUB-5027	Plum Crazy, Monte Carlo/International
G605-00044-$5++	BUB-5028	Balligator, $5
G605-00044-++++	BUB-5028	Balligator
G605-00044-FR++	BUB-5028	Balligator, French
G605-00044-SP++	BUB-5028	Balligator, Spanish
G605-00055-++++	BUB-5029	Plum Crazy
G605-00055-FR++	BUB-5029	Plum Crazy, French
G605-00055-SP++	BUB-5029	Plum Crazy, Spanish
G605-00177-$5++	BUB-5031	Crazy Jokers, $5
G605-00177-++++	BUB-5031	Crazy Jokers
G605-00177-FR++	BUB-5031	Crazy Joker, French
G605-00377-SP++	BUB-5031	Crazy Joker, Spanish
G605-00242-FR++	BUB-5035	Happy Joker, French, Park Place
G605-00403-++++	BUB-5043	Plum Crazy
G605-00441-++++	BUB-5044	Frogs, English

GLASS	ART FORM	DESCRIPTION
G605-00441-FR++	BUB-5044	Frogs, French
G605-00463-FR++	BUB-5045	Cash Cow, French
‖ G605-00093-5C++	CB7-5001	Naughty Nickels
G605-00093-5C++	CB7-5005	Naughty Nickels
‖ G605-00093-5C++	CB7-5014	Naughty Nickels
G605-00075-FQ25	CB7-5023	French Quarters, 25¢
G605-00075-PROG	CB7-5023	French Quarters
G605-00075-SP++	CB7-5023	French Quarters, Spanish
G605-00117-5C++	CB7-5025	Naughty Nickels
G605-00098-5C++	CB7-5026	Naughty Nickels
G605-00094-FQ25	CB7-5027	French Quarters, 25¢, Monte Carlo
G605-00203-++++	CB7-5029	Naughty Nickels
G605-00151-++++	CB7-5030	French Quarters
G605-00215-5C++	CB7-5035	Naughty Nickels
‖ G605-00098-5C++	CB7-5037	Naughty Nickels
G605-00339-GATE	CLJ-5003	San Francisco Golden Gate, Custom Harrah's Reno
G605-00340-CHNA	CLJ-5004	San Francisco China Town, Custom Harrah's Reno
G605-00341-CABL	CLJ-5005	San Francisco Cable Car, Custom Harrah's Reno
‖ G605-00339-GATE	CLJ-5006	San Francisco Golden Gate, Custom
G605-00191-++++	CM7-5060	Cherry-Mixed Bars-7's
G605-00485-++++	DAP-5001	Pool Sharks, English
G605-00485-12MI	DAP-5001	Pool Sharks, English
G605-00533-FR++	DAP-5002	Pool Sharks, French
G605-00258-++++	DB5-5001	Double Trouble
G605-00412-++++	DB5-5003	Dionysus, Custom
G605-00264-++++	DBK-5002	Spin & Win
G605-00264-SP++	DBK-5002	Spin & Win, Spanish
G605-00417-++++	DC5-5001	Gimme 5 5 Times, English
G605-00418-++++	DC5-5002	Black & White 5 Times, English
G605-00418-12MI	DC5-5002	Black & White 5 Times, English
G605-00418-SP++	DC5-5002	Black & White 5 Times, Spanish
G605-00494-++++	DC5-5007	5 Times Joker, English
G605-00494-12MI	DC5-5007	5 Times Joker, English
G605-00038-$5++	DCM-5031	California Dreamin', $5
G605-00038-++++	DCM-5031	California Dreamin'
‖ G605-00038-12MI	DCM-5031	California Dreamin', English
G605-00030-++++	DCM-5032	California Dreamin', Monte Carlo
G605-00030-12MI	DCM-5032	California Dreamin'
G605-00030-FR++	DCM-5032	California Dreamin', French
G605-00121-++++	DCM-5034	California Dreamin', English
G605-00136-++++	DCM-5037	California Dreamin'
G605-00269-++++	DCM-5040	Double Time
G605-00269-SP++	DCM-5040	Double Time, Spanish
G605-00238-++++	DCM-5041	Double Time
G605-00286-++++	DCM-5043	Double Take
G605-00302-++++	DCM-5044	Double Gold
G605-00303-++++	DCM-5045	Double Gold
G605-00312-++++	DCM-5046	Double Take
G605-00312-9DIG	DCM-5046	Double Take
G605-00401-++++	DCM-5052	Blazing 7's Times Pay
G605-00402-++++	DCM-5053	Blazing 7's Times Pay
G605-00468-++++	DCM-5055	Black & White 10 Times Pays
G605-00454-++++	DCM-9057	5 & 10 Times, English
‖ G605-00465-++++	DCM-9058	5 & 10 Times, English
G605-00288-++++	DD7-5001	Golden Eye 007
G605-00288-FR++	DD7-5001	Golden Eye 007, French
G605-00288-SP++	DD7-5001	Golden Eye 007, Spanish
G605-00296-++++	DD7-5003	Gimme 5
G605-00296-SP++	DD7-5003	Gimme 5, Spanish
G605-00351-++++	DD7-5005	Golden Eye 007
G605-00360-++++	DD7-5006	5 Times Black & White
G605-00387-++++	DD7-5007	Gimme 5
‖ G605-00019-++++	DDD-0001	Triple Double
G605-00019-++++	DDD-5001	Triple Double
G605-00019-SP++	DDD-5001	Triple Double Jackpot, Spanish
G605-00101-++++	DIA-5001	Diamonds, Custom
G605-00101-FR++	DIA-5001	Diamond Winners, French
G605-00101-SP++	DIA-5001	Diamonds, Spanish
G605-00170-++++	DIA-5004	Diamonds
G605-00170-SP++	DIA-5004	Diamonds, Spanish
‖ G605-00101-++++	DIA-5008	Diamonds, Custom
G605-00172-++++	DIB-5001	Diamonds
G605-00193-++++	DIB-5002	Diamonds, English
‖ G605-00193-FR++	DIB-5002	Diamonds, Diamond Line, French
G605-00375-++++	DID-5001	Double Jackpot 7's, Diamond Line
G605-00376-++++	DID-5002	Diamond Line Double Jackpot Blazing 7's, English
G605-00414-++++	DID-5003	Black & White Diamond Line Doubler
G605-00483-++++	DIV-5001	Diamonds & Devils, English
G605-00173-++++	DL7-5001	Blazing 7's Diamond Line
G605-00173-12MI	DL7-5001	Blazing 7's Diamond Line, English
G605-00173-FR++	DL7-5001	Blazing 7's Diamond Line, French
G605-00175-++++	DL7-5002	Blazing 7's Diamond Line, IRS Special
G605-00182-++++	DLI-5002	Double Jackpot
G605-00209-$5++	DM7-5001	Blazing Triple 7's Double Symbol, $5
G605-00209-++++	DM7-5001	Blazing Triple 7's Double Symbol

©2003 Bally Gaming and Systems
| - Revised, || - New

ProSlant® 6000 / 6000E

G605... Feature Glass, Standard (cont.)

GLASS	ART FORM	DESCRIPTION
G605-00209-SP++	DM7-5001	Blazing Triple 7's Double Symbol, Spanish
G605-00228-12MI	DM7-5002	Blazing Triple 7's Double Symbol, English
G605-00228-SP++	DM7-5002	Blazing Triple 7's Double Symbol, Spanish
G605-00283-++++	DM7-5004	All American
G605-00283-SP++	DM7-5004	All American, Spanish
G605-00308-++++	DM7-5005	All American Double
G605-00308-SP++	DM7-5005	All American, Spanish
G605-00309-++++	DM7-5007	Blazing Triple 7's Double Symbol
G605-00304-++++	DM7-5008	Blazing Triple 7's Double Symbol, Custom
G605-00304-12MI	DM7-5008	Blazing Triple 7's, English
G605-00304-3PRG	DM7-5008	Blazing Triple 7's Double Symbol, Custom
G605-00304-3SPC	DM7-5008	Blazing Triple 7's Double Symbol, Custom
G605-00315-++++	DM7-5009	Blazing Triple 7's Double Symbol
G605-00327-$5++	DM7-5010	Black & White, English, $5
G605-00327-$5MI	DM7-5010	Black & White, $5
G605-00327-++++	DM7-5010	Black & White
G605-00327-MICR	DM7-5010	Black & White, 2 Coin
G605-00327-SP++	DM7-5010	Black & White, Spanish
G605-00328-++++	DM7-5011	Black & White
G605-00328-12MI	DM7-5011	Black & White, English
G605-00328-SP++	DM7-5011	Black & White, Spanish
G605-00452-++++	DM7-5012	Apache Gold, English
G605-00342-++++	DM7-5014	Black & White
G605-00343-++++	DM7-5015	Black & White
G605-00343-3PRG	DM7-5015	Black & White
G605-00343-3SPC	DM7-5015	Black & White
G605-00344-++++	DM7-5016	Black & White, English
G605-00361-++++	DM7-5020	All American, English
G605-00361-SP++	DM7-5020	All American, Spanish
G605-00366-++++	DM7-5023	Twist & Shout
G605-00366-SP++	DM7-5023	Twist & Shout, Spanish
G605-00367-++++	DM7-5024	Twist & Shout
G605-00367-12MI	DM7-5024	Twist & Shout
G605-00367-FR++	DM7-5024	Twist & Shout, French
G605-00413-++++	DM7-5032	Generic Lucky Lobster
G605-00427-FR++	DM7-5035	Black & White Double Jackpot, French
G605-00464-++++	DM7-5036	Blazing Triple 7's Double Jackpot Kilroy, English
G605-00464-SP++	DM7-5036	Blazing Triple 7's Double Jackpot Kilroy, Spanish
G605-00457-++++	DM7-5037	Blazing Triple 7's Double Jackpot Kilroy
G605-00457-SP++	DM7-5037	Blazing Triple 7's Double Jackpot, Kilroy, Spanish
G605-00462-SP++	DM7-5038	Black & White Double Nudge Kilroy, Spanish
G605-00450-++++	DM7-5039	Black & White Double Kilroy, English
G605-00450-FR++	DM7-5039	Black & White Double Kilroy, French
G605-00458-SP++	DM7-5039	Black & White Double Kilroy, Spanish
G605-00431-++++	DM7-5040	5 Times Black & White, English
G605-00442-FR++	DM7-5046	Silver & Double Gold, French
G605-00486-++++	DM7-5047	Cityscapes, New York, English
G605-00487-++++	DM7-5048	Cityscapes, San Francisco, English
G605-00514-FR++	DM7-5051	Black & White, French
G605-00467-FR++	DM7-5056	Twist & Shout, French
G605-00436-++++	DM7-5060	Blazing 7's Double Symbol
G605-00437-++++	DM7-5061	Black & White
|| G605-00077-++++	DMB-0056	Cherries Deluxe
|| G605-00109-++++	DMB-0057	Cherries Deluxe
G605-00194-++++	DMB-5004	Black Gold Mixed Jackpot Bars
G605-00208-++++	DMB-5012	Black Gold
G605-00122-++++	DMB-5019	Black Gold
G605-00255-++++	DMB-5020	Black Gold
G605-00178-++++	DMB-5025	Black Gold
G605-00112-$5++	DMB-5065	Black Gold , $5
G605-00112-$5SP	DMB-5065	Black Gold, Spanish, $5
|| G605-00241-++++	DRA-5001	Double Dragon
G605-00241-FR++	DRA-5001	Double Dragon, French
G605-00280-FR++	DRA-5002	Double Dragon, French
G605-00227-$5++	DT7-5001	Blazing Triple 7's Diamond Line, English, $5
G605-00227-++++	DT7-5001	Blazing Triple 7's Diamond Line, English
G605-00227-SP++	DT7-5001	Blazing Triple 7's Diamond Line, Spanish
G605-00306-++++	DT7-5002	Diamond Back 7's, English
G605-00306-SP++	DT7-5002	Diamond Back 7's, Spanish
G605-00336-++++	DT7-5003	Blazing Triple 7's Diamond Line
G605-00336-9DIG	DT7-5003	Blazing Triple 7's Diamond Line
|| G605-00107-$5++	DWA-0005	$50,000 Pyramid, $5
|| G605-00107-$1++	DWA-5001	$10,000 Pyramid, $1
|| G605-00107-++++	DWA-5004	$10,000 Pyramid
G605-00222-12MI	DWA-5009	Silver & Gold, English
G605-00222-FR++	DWA-5009	Silver & Gold, French
|| G605-00222-++++	DWA-5010	Silver & Gold
G605-00223-++++	DWA-5011	Bally Double-Wild-7's-Mixed Bars
G605-00385-++++	DWN-5001	Double Jackpot Smiley
G605-00385-SP++	DWN-5001	Double Jackpot Smiley, Spanish
G605-00388-++++	DWN-5002	Double Jackpot Smiley
G605-00299-++++	DWR-5001	Double Wild Rose
|| G605-00299-SP++	DWR-5001	Double Wild Rose, Spanish
G605-00320-$5++	DWR-5002	24 Karat, $5
G605-00320-$5SP	DWR-5002	24 Karat, Spanish, $5

GLASS	ART FORM	DESCRIPTION
G605-00321-$10+	DWR-5003	24 Karat, $10
| G605-00321-$25+	DWR-5004	24 Karat, $25
G605-00371-++++	DWR-5005	25 Karat
G605-00371-SP++	DWR-5005	24 Karat, Spanish
G605-00372-++++	DWR-5006	Double Jackpot Wild Rose
G605-00372-SP++	DWR-5006	Double Wild Rose, Spanish
G605-00373-++++	DWR-5007	Silver Lining
G605-00373-SP++	DWR-5007	Silver Lining, Spanish
G605-00249-++++	F17-5054	Fruit
G605-00352-++++	F17-5060	Fruit
G605-00218-++++	FAF-5001	Fame & Fortune
G605-00218-SP++	FAF-5001	Fame & Fortune, Spanish
G605-00234-++++	FAF-5002	Fame & Fortune
G605-00234-SP++	FAF-5002	Fame & Fortune, Spanish
|| G605-00234-SPEC	FAF-5002	Fame & Fortune, Special
|| G605-00245-++++	FAF-5003	Fame & Fortune, Hit Parade
G605-00246-++++	FAF-5004	Fame & Fortune, Country Gold
|| G605-00001-++++	FAI-0003	Fire & Ice, Black 7's
G605-00001-++++	FAI-5003	Fire & Ice, Black 7's
G605-00061-$5++	FAI-5004	Fire & Ice, Black 7's, $5
G605-00042-++++	FAI-5005	Fire & Ice, Black 7's
G605-00042-FR++	FAI-5005	Fire & Ice, Black 7's, French
G605-00089-++++	FBF-5002	Fireball
G605-00089-12MI	FBF-5002	Fireball
G605-00089-FR++	FBF-5002	Fireball, French
G605-00130-++++	FBF-5003	Fireball
|| G605-00130-12MI	FBF-5003	Fireball, English
G605-00176-++++	FBF-5008	Fireball
G605-00266-++++	FBF-5012	Texas 2 Step
G605-00273-++++	FBF-5013	Texas 2 Step
G605-00273-FR++	FBF-5013	Texas 2 Step, French
|| G605-00453-++++	FDM-5001	Five & Dime, English
G605-00489-++++	FDM-5002	Five & Dime, English
G605-00034-++++	FLB-5001	Flashback
|| G605-00267-++++	FLB-5002	Wacky Winners
|| G605-00267-SP++	FLB-5002	Wacky Winners, Spanish
G605-00534-++++	FLB-5003	Ride To Riches
G605-00481-$5++	FX7-5001	5 Times Pay With 7's, English, $5
G605-00481-++++	FX7-5001	5 Times Pay With 7's, English
|| G605-00538-++++	FX7-5002	5 Times Pay With 7's
G605-00003-++++	GJP-5010	Bermuda Fruit, Giant Jackpot
|| G605-00045-++++	GSL-0002	Grand Slam
|| G605-00013-++++	GSL-0013	Gold Rush
G605-00004-++++	GSL-5001	Grand Slam
G605-00045-++++	GSL-5002	Grand Slam
G605-00011-++++	GSL-5012	Gold Rush 7's
G605-00013-++++	GSL-5013	Gold Rush 7's
G605-00013-9DIG	GSL-5013	Gold Rush 7's
G605-00013-FR++	GSL-5013	Gold Rush 7's, French
|| G605-00020-++++	GSM-0001	Grand Slam
G605-00020-++++	GSM-5001	Grand Slam
|| G605-00054-++++	HAR-5001	Hit & Run
|| G605-00054-FR++	HAR-5001	Hit & Run, French
G605-00074-++++	HAR-5002	Sir Prize
G605-00190-++++	HAR-5004	Sir Prize
G605-00515-++++	ITM-5001	In The Money
G605-00515-FR++	ITM-5001	In The Money, French
|| G605-00578-++++	ITM-5003	In The Money
|| G605-00579-++++	ITM-5004	In The Money
G605-00041-++++	JQK-5003	Mini Royal
G605-00039-++++	JQK-5004	Mini Royal, English
G605-00076-++++	JQK-5005	Mini Royal
G605-00220-++++	JQK-5006	Mini Royal
|| G605-00041-++++	JQK-5008	Mini Royal
G605-00294-$5++	JQK-5010	7's, English, $5
G605-00294-++++	JQK-5010	7's, English
G605-00295-++++	JQK-5011	7's, English
G605-00037-$5++	JUJ-5001	Jumpin' Joker, $5
G605-00037-++++	JUJ-5001	Jumpin' Joker
G605-00188-++++	JUJ-5002	Bell Ringer
G605-00002-++++	LM7-5011	Blazing Triple 7's
G605-00002-FR++	LM7-5011	Blazing Triple 7's, French
G605-00120-BLUE	LM7-5011	Blazing Triple 7's, Blue
G605-00120-RED+	LM7-5011	Blazing Triple 7's, Red
G605-00134-$1++	LM7-5013	Blazing Triple 7's $1
G605-00134-++++	LM7-5013	Blazing Triple 7's
G605-00134-SP++	LM7-5013	Blazing Triple 7's, Spanish
G605-00133-++++	LM7-5014	Triple Lightning 7's
G605-00139-++++	LM7-5015	Triple Lightning 7's
|| G605-00002-++++	LM7-5018	Blazing Triple 7's
|| G605-00133-++++	LM7-5019	Triple Lightning 7's
|| G605-00002-++++	LM7-5025	Blazing Triple 7's
G605-00251-++++	LM7-5027	Triple Rose
G605-00251-SP++	LM7-5027	Triple Wild Rose, Spanish
G605-00250-++++	LM7-5028	Triple Rose

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlant® 6000 / 6000E

G605... Feature Glass, Standard (cont.)

GLASS	ART FORM	DESCRIPTION
G605-00250-FR++	LM7-5028	Triple Rose, French
G605-00217-$5++	LMN-5001	Blazing Triple 7's Nudge, English, $5
G605-00217-++++	LMN-5001	Blazing Triple 7's Nudge
G605-00217-12MI	LMN-5001	Blazing Triple 7's Nudge, English
G605-00229-++++	LMN-5002	Blazing Triple 7's Nudge
| G605-00229-SP++	LMN-5002	Blazing Triple 7's Nudge, Spanish
G605-00460-SP++	LMN-5005	Blazing Triple 7's Kilroy, Spanish
|| G605-00411-FR++	LMN-5007	Frogs, French
G605-00456-FR++	LMN-5010	Silver & Double Gold, French
G605-00184-$5++	LMS-5005	Lightning Mixed 7's, $5
G605-00113-$5++	MBV-5001	Black Velvet, $5
G605-00113-++++	MBV-5001	Black Velvet
G605-00129-++++	MBV-5003	Black Velvet
G605-00346-++++	MG7-5017	Blue Magnificent 7's
G605-00346-SP++	MG7-5017	Blue Magnificent 7's, Spanish
G605-00230-++++	MJ7-5003	Magnificent 7's
G605-00330-++++	MJ7-5005	Blue Magnificent 7's, English
G605-00330-FR++	MJ7-5005	Blue Magnificent 7's, French
G605-00358-++++	MJ7-5008	Blazing Magnificent 7's, English
G605-00529-++++	MNB-5001	Money Bars
G605-00100-++++	MNC-5001	Monte Carlo
G605-00127-++++	MNC-5002	Las Vegas
G605-00127-FR++	MNC-5002	Las Vegas, French
|| G605-00127-++++	MNC-5004	Las Vegas
|| G605-00337-++++	OTT-5001	Over The Top
G605-00317-++++	OV7-5001	Cherry Mixed Bars, Blue 7's
G605-00318-++++	OV7-5002	Cherry Mixed Bars, Blue 7's
G605-00052-++++	OVR-5001	Overload, English
G605-00128-$5++	RAF-5001	Rich & Famous, $5
G605-00128-++++	RAF-5001	Rich & Famous
G605-00128-FR++	RAF-5001	Rich & Famous, French
G605-00128-SP++	RAF-5001	Rich & Famous, Spanish
G605-00128-SPEC	RAF-5001	Rich & Famous, Special
G605-00384-$5SP	RAF-5002	Rich & Famous, Spanish $5
G605-00189-++++	RAF-5004	Rich & Famous
|| G605-00189-FR++	RAF-5004	Rich & Famous, French
G605-00189-SP++	RAF-5004	Rich & Famous, Spanish
|| G605-00128-++++	RAF-5007	Rich & Famous
| G605-00181-HDRK	RAF-5008	Rich & Famous, Hard Rock Indian Bars, Custom Hard Rock
G605-00207-++++	RAF-5012	Rich & Famous
G605-00247-++++	RAF-5017	Rich & Famous, Hit Parade
G605-00248-++++	RAF-5018	Rich & Famous, Country Gold
G605-00263-++++	RAF-5019	Rich & Famous, Born To Be Wild
G605-00268-++++	RAF-5020	Rich & Famous, Win A Mustang, Custom Bally's Las Vegas
G605-00316-++++	RAF-5024	Rich & Famous, 007's Wild
G605-00316-6DIG	RAF-5024	Rich & Famous, 007's Wild
G605-00316-SPEC	RAF-5024	Rich & Famous, 007's Wild
|| G605-00189-++++	RAF-5025	Rich & Famous
G605-00334-9DIG	RAF-5026	Rich & Famous, Silver & Gold
G605-00428-++++	RAF-5029	Rich & Famous, English
G605-00359-++++	RAF-5031	Black & White, Rich & Famous
|| G605-00359-++++	RAF-5032	Black & White, Rich & Famous
G605-00433-++++	RAF-5033	Rich & Famous, Kick & Win
|| G605-00316-++++	RAF-5037	Rich & Famous, 007's Wild
|| G605-00359-++++	RAF-5038	Rich & Famous, Black & White, English
G605-00404-++++	RAF-5040	Rich & Famous Pays, Finnish
G605-00421-++++	RAF-5043	Rich & Famous, 24 Karat Wild, English
G605-00434-++++	RAF-5047	Rich & Famous, Silver & Gold
|| G605-00128-++++	RAF-5048	Rich & Famous
G605-00517-++++	RAF-5050	Cityscapes, Chicago
G605-00518-++++	RAF-5052	Cityscapes, Miami
G605-00519-++++	RAF-5054	Cityscapes, New Orleans
|| G605-00461-++++	RAF-5055	Kewadin Magic Fortune, English
|| G605-00408-++++	RAF-5056	Rich & Famous Black & White
|| G605-00359-++++	RAF-5059	Rich & Famous, Black & White
|| G605-00359-++++	RAF-5060	Rich & Famous, Black & White
G605-00174-++++	RH7-5001	Red Hot 7's
G605-00174-SP++	RH7-5001	Red Hot 7's, Spanish
G605-00400-++++	RTW-5001	Roaring 20's
G605-00400-12MI	RTW-5001	Roaring 20's, English
G605-00400-FR++	RTW-5001	Roaring 20's, French
G605-00400-SP++	RTW-5001	Roaring 20's, Spanish
G605-00416-++++	RTW-5002	Question Mark Game
G605-00416-FR++	RTW-5002	Question Mark Game, French
G605-00416-SP++	RTW-5002	Question Mark Game, Spanish
|| G605-00469-FR++	RTW-5004	Swing Time, French
G605-00469-++++	RTW-5006	Swing Time, English, Custom
G605-00469-FR++	RTW-5006	Swing Time, French
|| G605-00469-SP++	RTW-5007	Swing Time, Spanish
|| G605-00469-++++	RTW-5008	Swing Time, Custom
G605-00484-++++	RTW-5009	Y2k Bug, English
G605-00484-12MI	RTW-5009	Y2k Bug, English
|| G605-00484-FR++	RTW-5009	Y2k Bug, French
|| G605-00400-FR++	RTW-5010	Roaring 20's, French
G605-00522-++++	RTW-5012	Krazy Kops

GLASS	ART FORM	DESCRIPTION
|| G605-00469-12MI	RTW-5016	Swing Time
|| G605-00016-++++	SAB-0005	Stars & Bars
G605-00016-++++	SAB-5005	Stars & Bars
G605-00014-++++	SAB-5006	Stars & Bars
G605-00014-SP++	SAB-5006	Stars & Bars, Spanish
|| G605-00012-++++	SAB-5009	Stars & Bars
G605-00053-++++	SAB-5017	Stars & Bars, English
G605-00338-++++	SAB-5018	Stars & Bars, Custom
G605-00123-++++	SAB-5019	Stars & Bars
G605-00199-++++	SAB-5020	Stars & Bars
G605-00199-SP++	SAB-5020	Stars & Bars, Spanish
G605-00063-++++	SAB-5021	Stars & Bars
G605-00059-++++	SAB-5022	Stars & Bars
G605-00298-++++	SAB-5024	Stars & Bars
G605-00187-++++	SAB-5026	Stars & Bars, Win A Car
G605-00210-++++	SBW-5001	Stars & Bars Wild Diamond
G605-00210-SP++	SBW-5001	Stars & Bars Diamond Line, Spanish
G605-00224-++++	SBW-5002	Stars & Bars Wild Diamond
G605-00224-SP++	SBW-5002	Stars & Bars Wild Diamond, Spanish
G605-00356-++++	STR-5001	Blue Streak
G605-00072-++++	SUC-5012	Super Continental Bermuda Fruit
G605-00149-++++	SVN-5001	7's
G605-00149-FR++	SVN-5001	7's, French
G605-00205-++++	SVN-5002	7's
G605-00284-++++	SVN-5003	Mixed Bars-7's
G605-00073-++++	SWB-5032	T-Rex
G605-00214-++++	SWB-5036	T-Rex
G605-00140-++++	SWR-5001	Triple Lightning 7's
G605-00261-++++	TGD-5001	Triple Gold-Black Gold Bars-7's
|| G605-00261-12MI	TGD-5001	Triple Gold, English
G605-00257-++++	TGD-5002	Triple Gold
|| G605-00257-FR++	TGD-5002	Triple Gold, French
G605-00281-++++	TGD-5003	Hat Trick, Hockey
G605-00443-FR++	TGD-5008	Silver & Triple Gold, French
G605-00169-++++	THB-5001	Thunderbolt
G605-00169-FR++	THB-5001	Thunderbolt, French
G605-00289-++++	TM7-5001	Triple Symbol Blazing Triple 7's
G605-00292-++++	TM7-5002	Blazing Triple 7's Triple Symbol
G605-00292-SP++	TM7-5002	Triple Symbol Blazing 7's, Spanish
G605-00206-++++	WB7-5005	Open Sesame, Harrah's
G605-00420-++++	WB7-5007	Blazing 7's, Tournament
G605-00319-++++	WBE-5001	Wild Bells, Custom Bally's Las Vegas
G605-00131-++++	WBS-5001	Wild Bells, Custom Bally's Las Vegas
|| G605-00243-JEEP	WBS-5002	Bally Wild, Custom Bally Las Vegas
G605-00015-++++	WFC-0001	Firecracker
|| G605-00015-$5++	WFC-5001	Firecracker, $5
G605-00015-FR++	WFC-5001	Firecracker, French
G605-00081-++++	WHL-5001	White Lightning
G605-00081-FR++	WHL-5001	White Lightning, French
G605-00152-$5++	WHL-5002	White Lightning, $5
G605-00135-PROG	WHL-5005	White Lightning
|| G605-00081-++++	WHL-5008	White Lightning
G605-00253-++++	WHL-5015	White Lightning
G605-00060-$5++	WLI-5027	White Gold, $5
G605-00060-++++	WLI-5027	White Gold
G605-00060-FR++	WLI-5027	White Gold, French
G605-00097-$5++	WLI-5028	Black Gold, $5
G605-00097-$5SP	WLI-5028	Black Gold, Spanish, $5
G605-00097-++++	WLI-5028	Black Gold
G605-00259-$5++	WLI-5034	Wild Rose Black Gold, $5
G605-00259-++++	WLI-5034	Wild Rose Black Gold
G605-00381-$5++	WLI-5038	Black Gold, English, $5
G605-00381-++++	WLI-5038	Black Gold, English
G605-00386-++++	WRN-5001	Wild Smiley
G605-00389-FR++	WRN-5002	Wild Smiley, French
G605-00183-$5++	WRO-5001	Wild Rose, $5
G605-00183-++++	WRO-5001	Wild Rose
|| G605-00183-12MI	WRO-5001	Wild Rose, English
G605-00183-9DIG	WRO-5001	Wild Rose
G605-00183-SP++	WRO-5001	Wild Rose, Spanish
|| G605-00240-++++	WRO-5002	Wild Rose
|| G605-00240-12MI	WRO-5002	Wild Rose
G605-00240-FR++	WRO-5002	Wild Rose, French
G605-00221-++++	WRO-5003	Black Gold
G605-00221-9DIG	WRO-5003	Black Gold
G605-00244-++++	WRO-5006	Black Velvet, Park Place
G605-00244-SP++	WRO-5006	Black Velvet, Spanish
G605-00213-++++	WRO-5007	Wild Rose
G605-00265-++++	WRO-5013	Silver & Gold
G605-00265-SP++	WRO-5013	Silver & Gold, Spanish, Park Place
G605-00256-++++	WRO-5014	Wild Rose
G605-00254-++++	WRO-5015	Silver & Gold Wild Rose
G605-00272-++++	WRO-5018	Black Gold-Bally 7's, Bally's Las Vegas
G605-00285-++++	WRO-5019	Sweet Heart
G605-00285-SP++	WRO-5019	Sweet Heart, Spanish

©2003 Bally Gaming and Systems

| - Revised, || - New

ProSlant® 6000 / 6000E

G605... Feature Glass, Standard (cont.)

GLASS	ART FORM	DESCRIPTION
G605-00305-++++	WRO-5021	Wild Rose
G605-00305-FR++	WRO-5021	Wild Rose, French
G605-00301-++++	WRO-5022	Wild Rose, Park Place
G605-00301-FR++	WRO-5022	Wild Rose, French
G605-00323-$5++	WRO-5026	24 Karat, $5
G605-00325-FR++	WRO-5028	24 Karat, French
G605-00326-$1C+	WRO-5029	24 Karat, $100
G605-00335-++++	WRO-5030	Sweet Heart
G605-00378-++++	WRO-5033	Wild 24 Karat English
G605-00405-++++	WRO-5034	Wild Rose
G605-00347-++++	WWB-5005	Diamonds & Roses
G605-00347-SP++	WWB-5005	Diamonds & Roses, Spanish
G605-00350-++++	WWB-5006	Diamonds & Roses
G605-00350-FR++	WWB-5006	Diamonds & Roses, French

G679... Feature Glass, Radial

GLASS	ART FORM	DESCRIPTION
G679-00136-SP++	APT-5014	Dueces Wild, Spanish
G679-00134-SP++	APT-5023	Wild Ball Of Fire, Spanish
G679-00135-SP++	APT-5026	Win, Spanish
G679-00082-++++	BL7-5021	Blazing 7's, English
G679-00087-++++	BL7-5053	Blazing 7's, English
G679-00145-PROG	BLM-5002	Betty Boop's Big Hit
G679-00003-++++	BLX-5004	Sevy/Blazing 7's, Custom Bally Las Vegas
G679-00011-25C+	BLX-5005	Mystery Space Quest, Las Vegas Hilton, 25¢
G679-00142-SP++	BM7-5008	Black Gold 7's, Spanish
G679-00157-++++	BNT-5003	Bonus Times
G679-00157-12MI	BNT-5003	Bonus Times
G679-00143-PROG	BRT-5002	Betty Boop, Roaring 20's Flapper
G679-00144-PROG	BRT-5013	Betty Boop, Born To Boop
G679-00034-PROG	DBB-5003	Payday Black & White, Custom
G679-00051-PROG	DBB-5005	Payday Black & White Generic, English
G679-00113-PROG	DBB-5006	Payday Black & White Double, 5¢
G679-00004-++++	DBX-5004	Sevy/Double Time, Custom Bally Las Vegas
G679-00008-25C+	DBX-5005	Mystery Space Quest, Las Vegas Hilton, 25¢
G679-00026-++++	DBX-5008	Sevy/Black & White Double, Custom Bally Las Vegas
G679-00026-++++	DBX-5009	Sevy/Black & White Double, Custom Bally Las Vegas
G679-00025-++++	DC5-5003	Sevy/5 Times Pay, Custom Bally Las Vegas
G679-00020-++++	DCM-5043	Double Take, English
G679-00022-++++	DCM-5044	Double Gold, English
G679-00086-$10+	DCM-5058	Five & Ten Times, $10
G679-00086-++++	DCM-5058	Five & Ten Times, English
G679-00018-++++	DD7-5001	Golden Eye 007, English
G679-00015-++++	DD7-5003	Gimme 5, English
G679-00133-SP++	DD7-5007	Gimme 5, Spanish
G679-00057-++++	DID-5002	Diamond Line Double Jackpot Blazing 7's, English
G679-00081-$10+	DM7-5001	Blazing 7's Double Symbol, $10
G679-00081-$2++	DM7-5001	Blazing 7's Double Symbol, $2
G679-00081-$5++	DM7-5001	Blazing 7's Double Symbol, $5
G679-00081-++++	DM7-5001	Blazing 7's Double Symbol
G679-00074-++++	DM7-5002	Blazing Triple 7's Double Symbol, English
G679-00017-++++	DM7-5004	All American Double, English
G679-00139-SP++	DM7-5005	All American, Spanish
G679-00041-++++	DM7-5007	Blazing Triple 7's Double Symbol
G679-00058-++++	DM7-5010	Black & White Triple 7's, English
G679-00071-++++	DM7-5011	Black & White, English
G679-00043-++++	DM7-5014	Black & White
G679-00040-++++	DM7-5020	All American, English
G679-00076-++++	DM7-5024	Twist & Shout, English
G679-00076-SP++	DM7-5024	Twist & Shout, Spanish
G679-00137-SP++	DM7-5037	Blazing Triple 7's Double Jackpot Kilroy, Spanish
G679-00138-SP++	DM7-5039	Black & White Double Kilroy, Spanish
G679-00141-SP++	DMB-5025	Black Gold, Spanish
G679-00083-++++	DMB-5071	Black Gold
G679-00084-$5++	DRA-5002	Double Dragon, English, $5
G679-00037-++++	DT7-5001	Blazing Triple 7's Diamond Line, English
G679-00072-++++	DT7-5003	Blazing Triple 7's Diamond Line, English
G679-00073-++++	DWR-5006	Double Wild Rose, English
G679-00073-SP++	DWR-5006	Double Wild Rose, Spanish
G679-00059-++++	DWR-5007	Silver Lining, English
G679-00059-SP++	DWR-5007	Silver Lining Spanish
G679-00150-$10+	FX7-5001	5 Times Pay With 7's, $10
G679-00150-$2++	FX7-5001	5 Times Pay With 7's, $2
G679-00150-++++	FX7-5001	5 Times Pay With 7's
G679-00164-++++	ITM-5001	In The Money
G679-00164-12MI	ITM-5001	In The Money
G679-00202-++++	ITM-5003	In The Money
G679-00044-++++	JQK-5006	Mini Royal
G679-00080-++++	JQK-5010	7's, English
G679-00042-++++	JQK-5011	7's
G679-00055-++++	LM7-5011	Blazing Triple 7's, English
G679-00002-++++	LMM-5001	Mixed Bars & 7's Sevy, Custom Bally Las Vegas
G679-00021-++++	LMN-5001	Blazing Triple 7's Nudge, English
G679-00006-++++	LMX-5001	Sevy/Bar 5, Custom Bally Las Vegas
G679-00010-25C+	LMX-5002	Mystery Space Quest, Las Vegas Hilton, 25¢
G679-00019-++++	MG7-5017	Blue Magnificent 7's, English
G679-00068-++++	RAF-5004	Rich & Famous, English
G679-00001-++++	RAF-5021	Win A Motorcycle, Custom Bally Las Vegas
G679-00046-++++	RAF-5022	Win A Mustang, Custom Bally Las Vegas
G679-00007-++++	RAF-5028	Win A Motorcycle, Custom Bally Las Vegas
G679-00007-++++	RAF-5044	Win A Motorcycle, Custom Bally Las Vegas
G679-00067-++++	RAF-5053	Win A Mustang Saleen, English
G679-00032-PROG	RBB-5003	Payday Black & Gold, Custom
G679-00116-PROG	RBB-5004	Payday Black & Gold, Generic, English
G679-00049-PROG	RBB-5005	Payday Black & Gold, Generic, English
G679-00115-PROG	RBB-5006	Payday Black & Gold, Generic, English
G679-00023-++++	RH7-5001	Red Hot 7's, English
G679-00045-++++	RTW-5001	Roaring 20's, English
G679-00132-++++	RTW-5005	Swing Time
G679-00162-++++	RTW-5012	Krazy Kops
G679-00031-PROG	SBB-5003	Payday Blazing 7's, Custom
G679-00065-PROG	SBB-5004	Payday Blazing 7's, Generic
G679-00052-PROG	SBB-5006	Payday Blazing 7's Generic, English
G679-00005-++++	SBX-5004	Sevy/Stars & Bars, Custom Bally Las Vegas
G679-00016-++++	SVN-5002	7's, English
G679-00033-PROG	TBB-5003	Payday Stars & Bars, Custom Bally Las Vegas
G679-00050-PROG	TBB-5005	Payday Stars & Bars, Generic, English
G679-00114-PROG	TBB-5006	Payday Stars & Bars, English
G679-00075-++++	TGD-5002	Triple Gold, English
G679-00056-++++	TM7-5001	Triple Symbol Blazing Triple 7's, English
G679-00012-BALY	WBS-5003	Win A Jaguar, Bally Las Vegas
G679-00013-FLAM	WBS-5004	Win A Jaguar, Flamingo
G679-00014-HILT	WBS-5005	Win A Jaguar, Hilton
G679-00047-++++	WBS-5006	Win A Sport Utility Vehicle, Bally Las Vegas
G679-00047-9DIG	WBS-5006	Win A Sport Utility Vehicle, Bally Las Vegas
G679-00079-++++	WLI-5038	Black & Gold, English
G679-00106-++++	WRO-5001	Wild Rose, English
G679-00039-++++	WRO-5007	Wild Rose
G679-00060-++++	WRO-5013	Silver & Gold, English

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

G606... Reel Glass

GLASS	ART FORM	DESCRIPTION
G606-55001-BLCK	APD-5007	9-Inch Reel, Caesar's Fountain, Custom Caesar's Palace
G606-55001-BLCK	APN-5001	9-Inch Reel, Hat Trick
G606-55001-RED+	APT-5014	9-Inch Reel, Deuces Wild
G606-55001-RED+	APT-5015	9-Inch Reel, Deuces Wild
G606-55001-BLCK	APT-5019	9-Inch Reel, Bank Of The Nile, Custom Caesar's Palace
G606-65001-BLCK	BAR-5006	9-Inch Reel, Jackpot Bars
G606-06006-BLCK	BFR-5011	Printer Reel, Andy Capp
G606-06006-BLCK	BL4-5001	Blazing 7's 4 Reel
G606-06006-BLCK	BL4-5001	Blazing 7's 4 Reel
G606-06006-BLCK	BL4-5002	Blazing 7's 4 Reel
G606-06006-FBLK	BL4-5003	Blazing 7's, 4 Reel, French
G606-65001-BLCK	BL7-0001	11-Inch Reel, Reel Gems
G606-55001-BLUE	BL7-0005	11-Inch Reel, Blazing 7's
G606-65001-BLUE	BL7-0011	11-Inch Reel, Blazing 7's
G606-65001-266+	BL7-0044	11-Inch Reel, Reel Gems
G606-65001-266+	BL7-0047	11-Inch Reel, Reel Gems
G606-65001-266+	BL7-0048	11-Inch Reel, Reel Gems
G606-55001-BLCK	BL7-5007	9-Inch Reel, Blazing 7's
G606-55001-266+	BL7-5041	9-Inch Reel, Reel Gems
G606-55001-266+	BL7-5052	9-Inch Reel, Reel Gems
G606-55001-BLCK	BL7-5057	9-Inch Reel, Blazing 7's
G606-55001-266+	BL7-5058	Reel Gems
G606-55001-BLCK	BM7-5008	9-Inch Reel, Black Gold, Black Gold 7's
G606-55001-BLUE	BUB-5027	9-Inch Reel, Plum Crazy
G606-55001-BLCK	BUB-5028	9-Inch Reel, Balligator
G606-55001-FBLK	BUB-5028	9-Inch Reel, Balligator, French
G606-55001-BLUE	BUB-5029	9-Inch Reel, Plum Crazy
G606-55001-FBLU	BUB-5035	Happy Joker/Crazy Reel, French, Park Place
G606-55001-GRN+	CB7-5005	9-Inch Reel, Naughty Nickels
G606-55001-GRN+	CB7-5014	9-Inch Reel, Naughty Nickels
G606-55001-GRN+	CB7-5023	9-Inch Reel, French Quarters
G606-55001-GRN+	CB7-5023	9-Inch Reel, French Quarters
G606-00006-55++	CB7-5027	9-Inch Reel, French Quarters
G606-00026-6000	CB7-5027	9-Inch Reel, French Quarters
G606-55003-BLUE	CM7-5060	9-Inch Reel, Cherry-Mixed Bars-7's
G606-55001-BLCK	DC5-5001	Gimme 5 5 Times, English
G606-06001-BLCK	DC5-5002	Black & White 5 Times All Reel
G606-55001-BLCK	DC5-5002	Black & White 5 Times All Reel, English
G606-55001-BLCK	DCM-5031	9-Inch Reel, California Dreamin'
G606-55001-BLCK	DCM-5032	9-Inch Reel, California Dreamin'
G606-55001-FBLK	DCM-5032	9-Inch Reel, California Dreamin', French
G606-55001-BLCK	DCM-5037	9-Inch Reel, California Dreamin'
G606-65001-BLUE	DDD-0001	11-Inch Reel, Triple Double
G606-55001-BLUE	DDD-5001	9-Inch Reel, Triple Double
G606-00009-55++	DIA-5001	Custom Reel, Diamonds
G606-00009-55++	DIA-5004	9-Inch Reel, Diamonds
G606-00009-55++	DIA-5008	Custom Reel, Diamonds
G606-55001-RED+	DLI-5002	9-Inch Reel, Double Jackpot
G606-06001-SBLK	DM7-5001	Blazing Triple 7's Double Symbol, Spanish
G606-00015-55++	DM7-5008	Custom Reel, Blazing Triple 7's Double Symbol
G606-00033-6000	DM7-5050	Custom Reel, Double Jackpot Blazing Triple 7's
G606-65001-266+	DMB-0056	11-Inch Reel, Cherries Deluxe
G606-55001-BLCK	DMB-5012	9-Inch Reel, Black Gold
G606-55001-BLCK	DMB-5065	9-Inch Reel, Black Gold
G606-65001-BLCK	DWA-0005	11-Inch Reel, $50,000 Pyramid
G606-65001-BLCK	DWA-5001	9-Inch Reel, Pyramid
G606-55001-BLCK	DWN-5001	Double Jackpot Smiley
G606-55001-SBLK	DWN-5001	Double Jackpot Smiley, Spanish
G606-65001-BLCK	FAI-0003	11-Inch Reel, Fire & Ice
G606-55001-BLCK	FAI-5003	9-Inch Reel, Fire & Ice
G606-55001-BLCK	FAI-5004	9-Inch Reel, Fire & Ice
G606-55001-BLCK	FAI-5005	9-Inch Reel, Fire & Ice
G606-55001-BLCK	FBF-5002	9-Inch Reel, Fireball
G606-55001-BLCK	FLB-5001	9-Inch Reel, Flashback
G606-55006-BLCK	GJP-5010	9-Inch Reel, Giant Jackpot
G606-65001-BLCK	GSL-0013	11-Inch Reel, Gold Rush
G606-55001-GRN+	GSL-5001	9-Inch Reel, Grand Slam
G606-55001-GRN+	GSL-5002	9-Inch Reel, Grand Slam
G606-55001-BLCK	GSL-5012	9-Inch Reel, Gold Rush
G606-55001-BLCK	GSL-5013	9-Inch Reel, Gold Rush
G606-55001-FBLK	GSL-5013	9-Inch Reel, Gold Rush, French
G606-65001-GRN+	GSM-0001	11-Inch Reel, Gold Rush
G606-55001-GRN+	GSM-5001	9-Inch Reel, Grand Slam
G606-55001-GRN+	HAR-5001	9-Inch Reel, Hit & Run
G606-55001-BLCK	HAR-5002	9-Inch Reel, Sir Prize
G606-55001-BLCK	HAR-5004	9-Inch Reel, Sir Prize
G606-00003-55++	JQK-5003	9-Inch Reel, Mini Royal
G606-00004-55++	JQK-5004	9-Inch Reel, Mini Royal
G606-55001-BLUE	JQK-5005	9-Inch Reel, Mini Royal
G606-55001-BLCK	JUJ-5001	9-Inch Reel, Jumpin' Joker
G606-55001-BLCK	JUJ-5002	9-Inch Reel, Bell Ringer
G606-55001-RED+	LM7-5011	9-Inch Reel, Blazing Triple 7's
G606-55001-RED+	LM7-5018	9-Inch Reel, Blazing Triple 7's
G606-55001-BLCK	LMS-5005	9-Inch Reel, Lightning Mixed 7's
G606-55001-BLCK	MBV-5001	9-Inch Reel, Black Velvet

GLASS	ART FORM	DESCRIPTION
G606-55003-BLUE	MJ7-5003	9-Inch Reel, Magnificent 7's
G606-55001-BLCK	MNC-5001	9-Inch Reel, Monte Carlo
G606-55001-BLCK	OVR-5001	9-Inch Reel, Overload
G606-55001-BLCK	RAF-5004	9-Inch Reel, Rich & Famous
G606-00022-6000	RTW-5006	Custom Reel, Swing Time
G606-06001-BLCK	RTW-5008	Custom Reel, Swing Time
G606-55001-BLUE	SAB-5005	9-Inch Reel, Stars & Bars
G606-55001-BLUE	SAB-5006	9-Inch Reel, Stars & Bars
G606-55001-BLUE	SAB-5009	9-Inch Reel, Stars & Bars
G606-00002-55++	SAB-5017	9-Inch Reel, Stars & Bars
G606-00020-55++	SAB-5018	9-Inch Reel, Stars & Bars
G606-55001-BLUE	SAB-5021	9-Inch Reel, Stars & Bars
G606-55001-BLUE	SAB-5022	9-Inch Reel, Stars & Bars
G606-55006-BLCK	SUC-5012	9-Inch Reel, Super Continental
G606-55001-BLCK	SWB-5032	9-Inch Reel, T-Rex
G606-00001-65++	WFC-0001	11-Inch Reel, Firecracker
G606-55001-BLCK	WFC-5001	9-Inch Reel, Firecracker
G606-55001-FRBK	WFC-5001	9-Inch Reel, Firecracker, French
G606-55001-BLCK	WHL-5001	9-Inch Reel, White Lightning
G606-55001-BLCK	WHL-5002	9-Inch Reel, White Lightning
G606-55001-BLCK	WHL-5008	9-Inch Reel, White Lightning
G606-00005-55++	WLI-5027	9-Inch Reel, White Gold
G606-06001-BLCK	WLI-5028	9-Inch Reel, Black Gold
G606-55001-BLCK	WLI-5028	9-Inch Reel, Black Gold
G606-55001-BLCK	WRN-5001	Wild Smiley
G606-55001-BLCK	WRO-5001	9-Inch Reel, Wild Rose

©2003 Bally Gaming and Systems

System Overlays

PART NUMBER	DESCRIPTION	UP	SL	S6E
M-R0617-0557	AGI MAGNETIC READER/DISPLAY			X
M-R0617-0665	AGI READER/16 X 2 DISPLAY/KEYPAD			X
M-R0617-0675	AGI, KEYPAD DISPLAY/16 X 2 DISPLAY/READER		X	
M-R0617-0668	AGI, KEYPAD DISPLAY/16 X 2 DISPLAY/READER		X	
M-R0617-0554	AGI, OPTICAL READER/DISPLAY, CTE/WTE	X		
M-R0617-0553	AGI, OPTICAL READER/DISPLAY, WRE	X		
M-R0617-0667	AGI, READER/16 X 2 DISPLAY/KEYPAD, WRE	X		
M-R0617-0528	AGI, READER/DISPLAY, CTE/WTE	X		
M-R0617-0527	AGI, READER/DISPLAY, WRE	X		
M-R0617-0052	AGI, READER/LED		X	
M-R0617-0643	AGI/IGS, KEYPAD		X	
M-R0617-0579	AGI/IGS, KEYPAD, 3-INCH		X	
M-R0617-0575	AGI/IGS, KEYPAD, CTE/WTE	X		
M-R0617-0622	AGI/IGS, KEYPAD, NO BUTTON		X	
M-R0617-0621	AGI/IGS, KEYPAD, NO BUTTON, CT/WT	X		
M-R0617-0623	AGI/IGS, KEYPAD, NO BUTTON, WRE	X		
M-R0617-0580	AGI/IGS, KEYPAD, WRE	X		
M-R0617-0540	AGI/IGS, MAGNETIC READER/DISPLAY, CTE/WTE	X		
M-R0617-0539	AGI/IGS, MAGNETIC READER/DISPLAY, WRE	X		
M-R0617-0546	AGI/IGS, MAGNETIC READER/DISPLAY/BUTTON, C/WTE	X		
M-R0617-0545	AGI/IGS, MAGNETIC READER/DISPLAY/BUTTON, WRE	X		
M-R0617-0624	AGI/IGS, MAGNETIC READER/DISPLAY/BUTTON/KEYPAD			X
M-R0617-0626	AGI/IGS, MAGNETIC READER/DISPLAY/BUTTON/KEYPAD	X		
M-R0617-0625	AGI/IGS, MAGNETIC READER/DISPLAY/BUTTON/KEYPAD, WRE	X		
M-R0617-0563	AGI/IGS, READER/DISPLAY, 3-INCH		X	
M-R0617-0562	AGI/IGS, READER/DISPLAY/BUTTON, 3-INCH		X	
M-R0617-0604	ARISTOCRAT	X		
M-R0617-0510	BLANK PANEL			X
M-R0617-0503	BLANK, CTE/WTE/WRE	X		
M-R0617-0113	CDS OSII, DISPLAY/KEYPAD		X	
M-R0617-0507	CDS OSII, MAGNETIC			X
M-R0617-0114	CDS OSII, MAGNETIC READER		X	
M-R0617-0520	CDS OSII, MAGNETIC, CT/WT	X		
M-R0617-0519	CDS OSII, MAGNETIC, WRE	X		
M-R0617-0115	CDS OSII, OPTICAL READER		X	
M-R0617-0522	CDS OSII, OPTICAL, CT/WT	X		
M-R0617-0521	CDS OSII, OPTICAL, WRE	X		

PART NUMBER	DESCRIPTION	UP	SL	S6E
M-R0617-0506	CDS SENII, MAGNETIC			X
M-R0617-0669	DACOM, DISPLAY/KEYPAD DISPLAY/READER	X		
M-R0617-0505	EDT PT-M400			X
M-R0617-0537	EDT PT-M400, CT/WT	X		
M-R0617-0536	EDT PT-M400, WRE	X		
M-R0617-2002	EDT, PT-M400		X	
M-R0617-0501	EPI, READER/KEYPAD, CTE/WTE	X		
M-R0617-0502	EPI, READER/KEYPAD, WRE	X		
M-R0617-0603	GRIPS	X		
M-R0617-0578	GRIPS, CTE/WTE	X		
M-R0617-0659	GRIPS, STD3	X		
M-R0617-0577	GRIPS, WRE	X		
M-R0617-0526	GSI, READER/DISPLAY, CTE/WTE	X		
M-R0617-0525	GSI, READER/DISPLAY, WRE	X		
M-R0617-0071	GSI, READER/LED		X	
M-R0617-0253	MGM, 2.5-INCH		X	
M-R0617-3002	MGM, 3-INCH		X	
M-R0617-0648	MGM, READER/DISPLAY, CTE/WTE	X		
M-R0617-0647	MGM, READER/SMALL DISPLAY WRE	X		
M-R0617-0549	MIKOHN READER/DISPLAY/KEYPAD			X
M-R0617-0195	MIKOHN, READER/DISPLAY/KEYPAD		X	
M-R0617-0524	MIKOHN, READER/DISPLAY/KEYPAD, CTE/WTE	X		
M-R0617-0523	MIKOHN, READER/DISPLAY/KEYPAD, WRE	X		
M-R0617-0611	MONTE CARLO, CT/WT	X		
M-R0617-0599	SANDS, SMS, CTE/WTE	X		
M-R0617-0600	SANDS, SMS, WRE	X		
M-R0617-0566	SDS COMPONENT			X
M-R0617-0504	SDS DMK, KEYPAD			X
M-R0617-0518	SDS DMK, READER/DISPLAY/KEYPAD, CTE/WTE	X		
M-R0617-0517	SDS DMK, READER/DISPLAY/KEYPAD, WRE	X		
M-R0617-0509	SDS EPI READER/DISPLAY/KEYPAD			X
M-R0617-0246	SDS EPI, LIT READER		X	
M-R0617-0243	SDS EPI, READER/2 X 6 KEYPAD		X	
M-R0617-0564	SDS, COMPONENT WRE	X		
M-R0617-0565	SDS, COMPONENT, CTE/WTE	X		
M-R0617-2004	SDS, KEYPAD		X	
M-R0617-0615	SMART CARD READER	X		

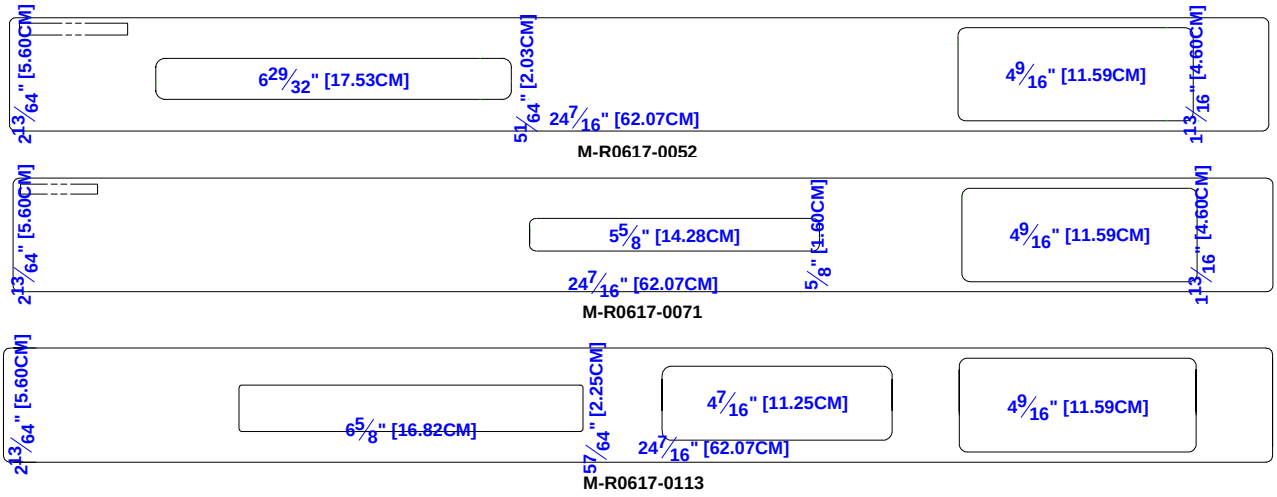

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

System Overlays

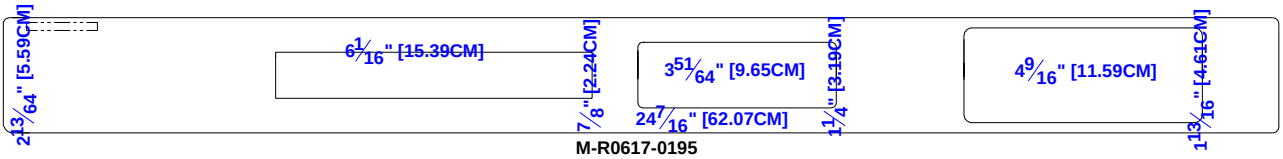

M-R0617-0195

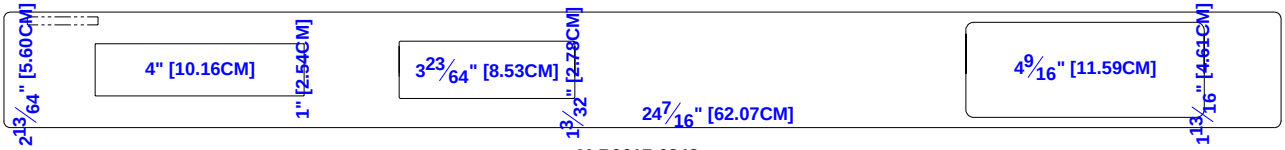

M-R0617-0243

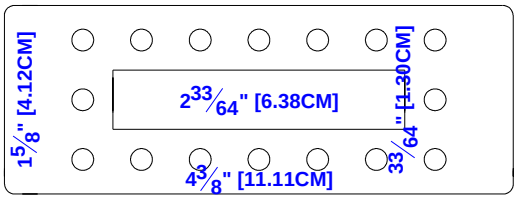

M-R0617-0246

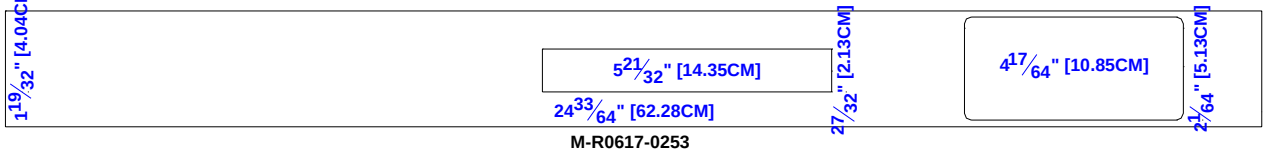

M-R0617-0253

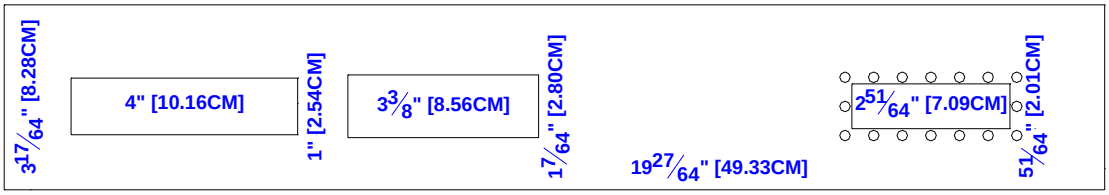

M-R0617-0501

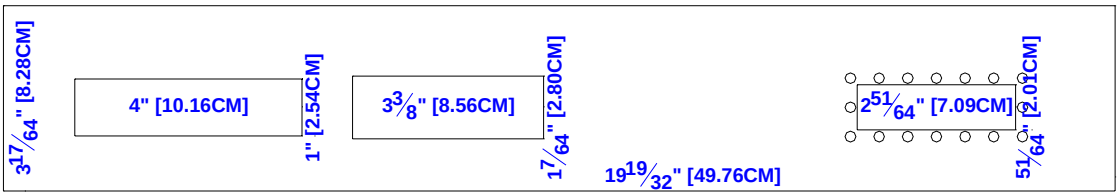

M-R0617-0502

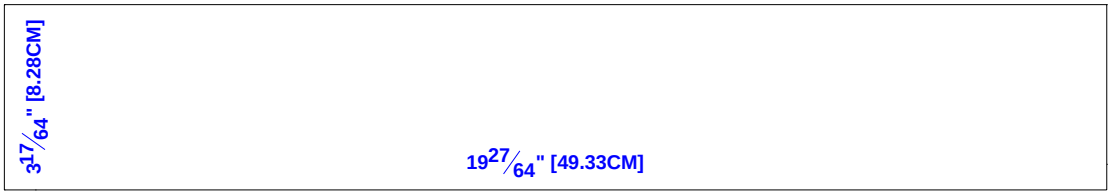

M-R0617-0503

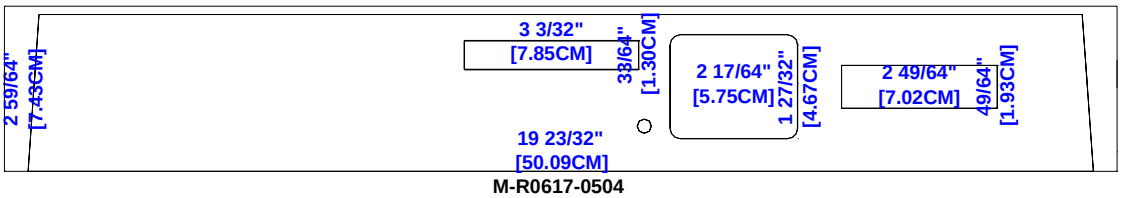

M-R0617-0504

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

| - Revised, || - New

System Overlays

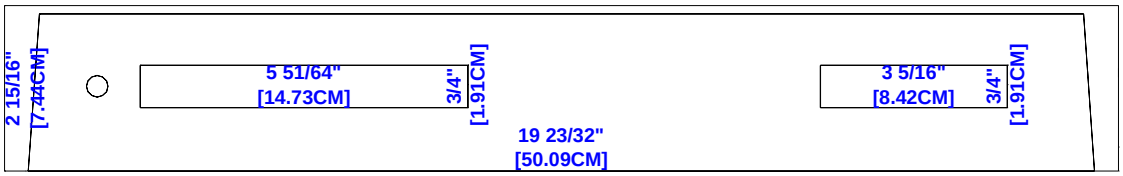

M-R0617-0505

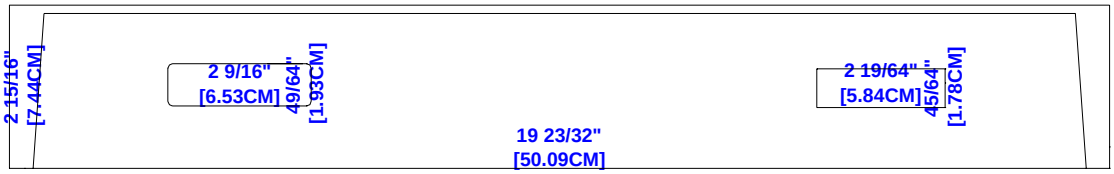

M-R0617-0506

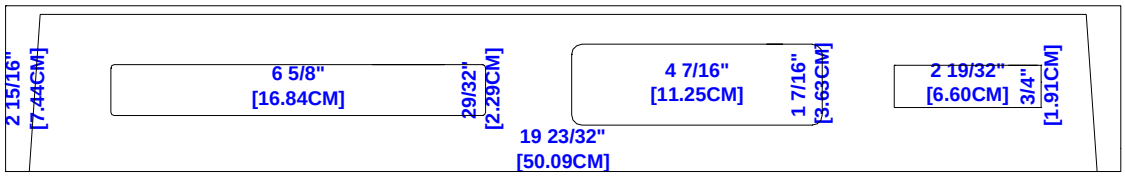

M-R0617-0507

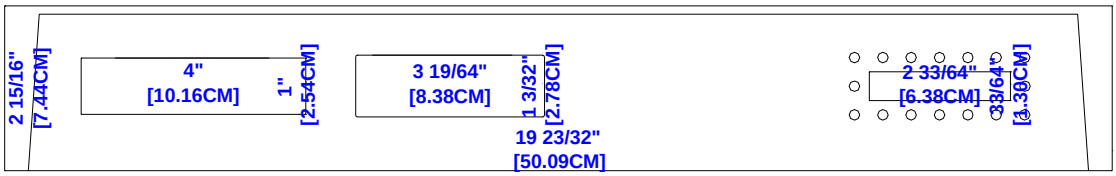

M-R0617-0509

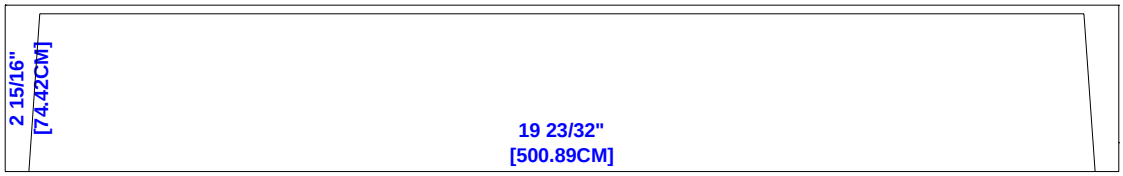

M-R0617-0510

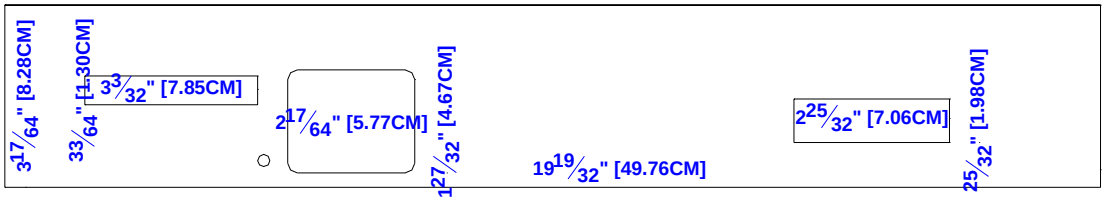

M-R0617-0517

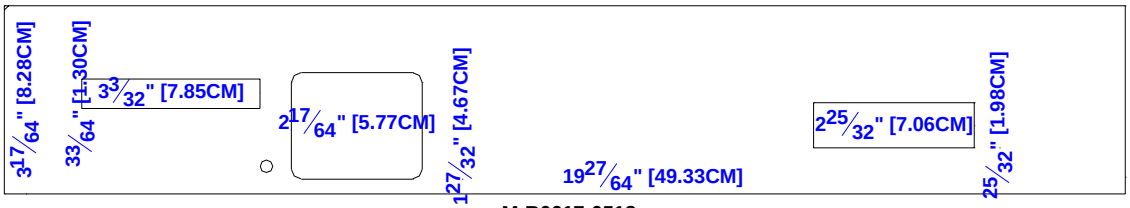

M-R0617-0518

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

System Overlays

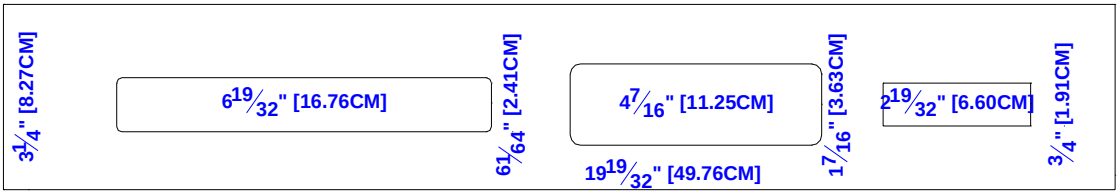

M-R0617-0519

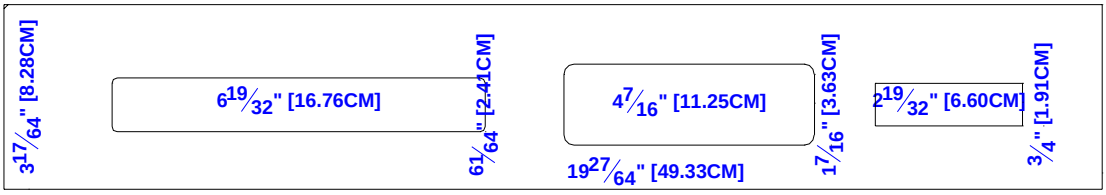

M-R0617-0520

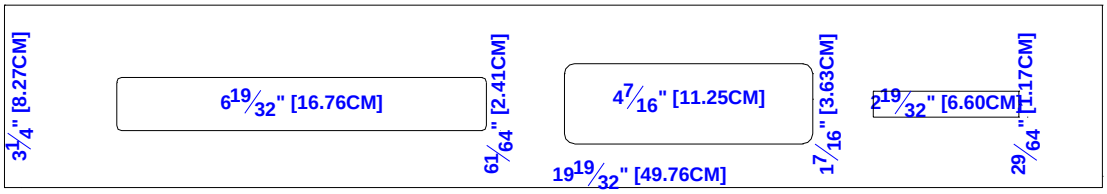

M-R0617-0521

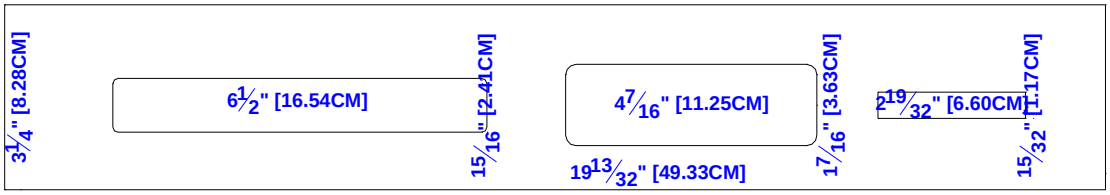

M-R0617-0522

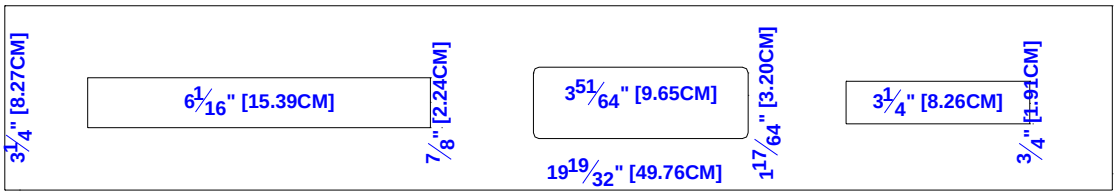

M-R0617-0523

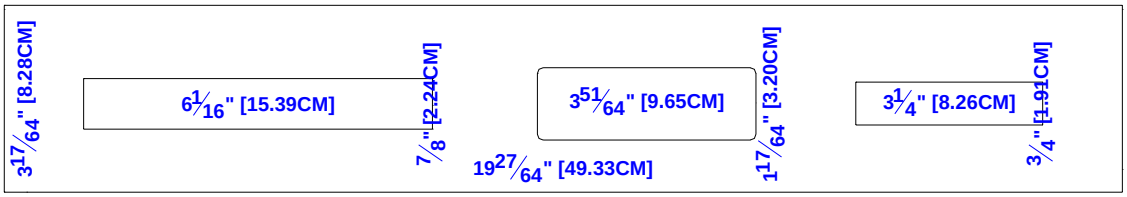

M-R0617-0524

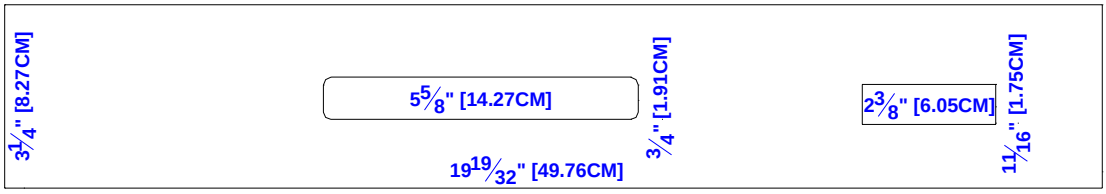

M-R0617-0525

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

System Overlays

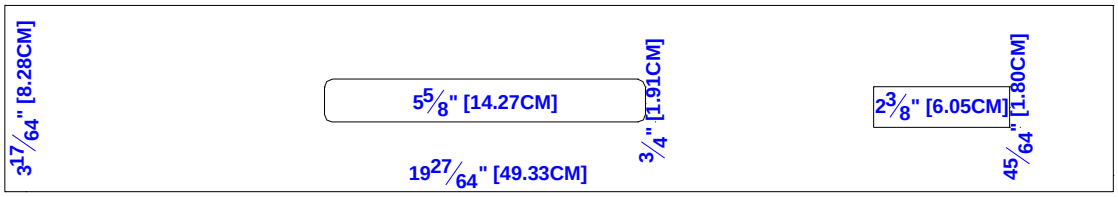

M-R0617-0526

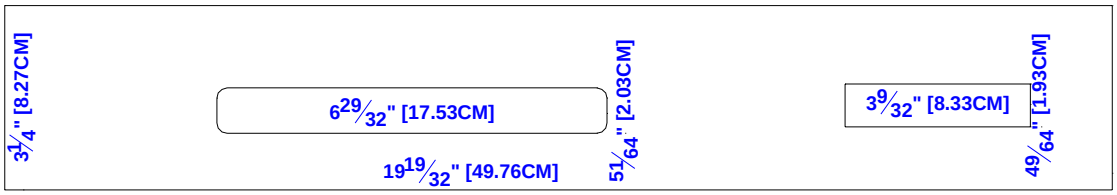

M-R0617-0527

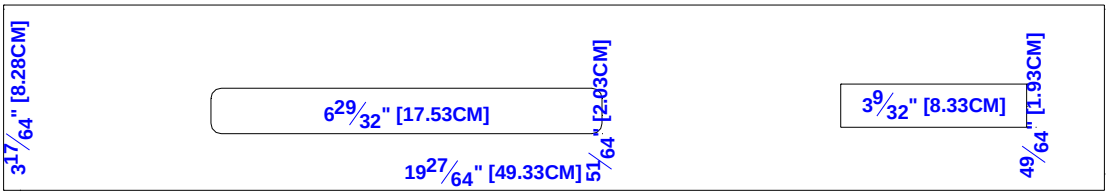

M-R0617-0528

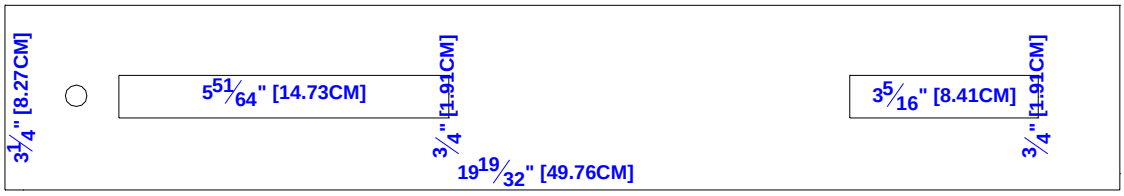

M-R0617-0536

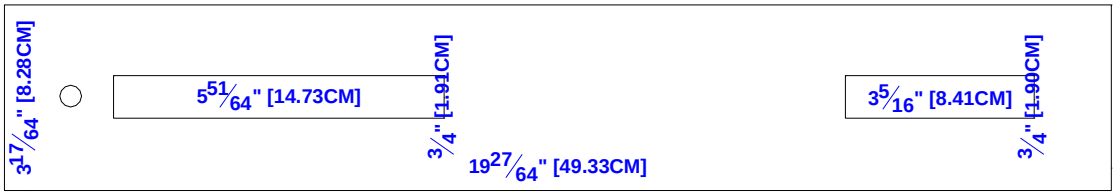

M-R0617-0537

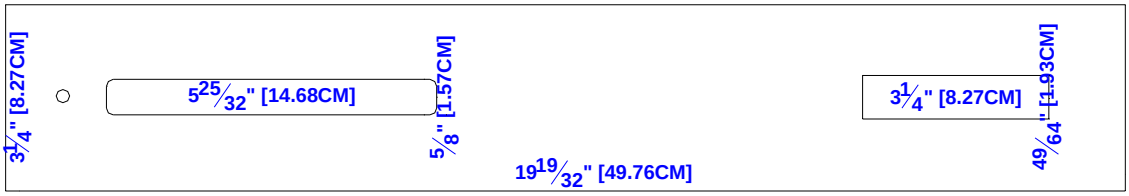

M-R0617-0539

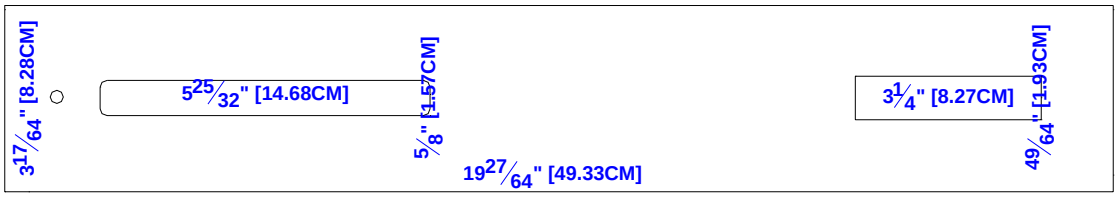

M-R0617-0540

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

System Overlays

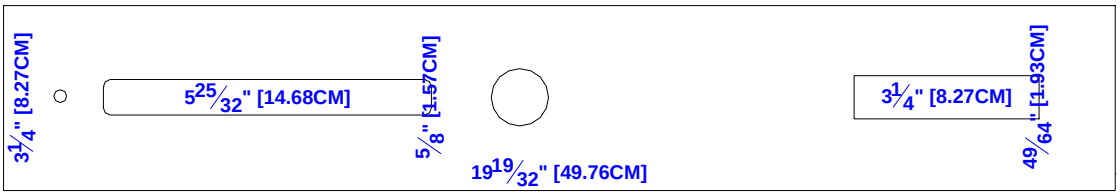

M-R0617-0545

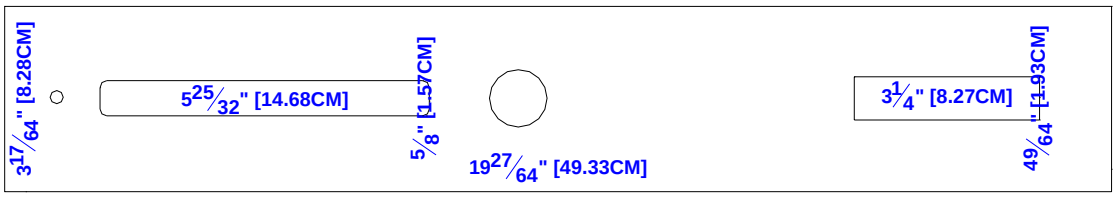

M-R0617-0546

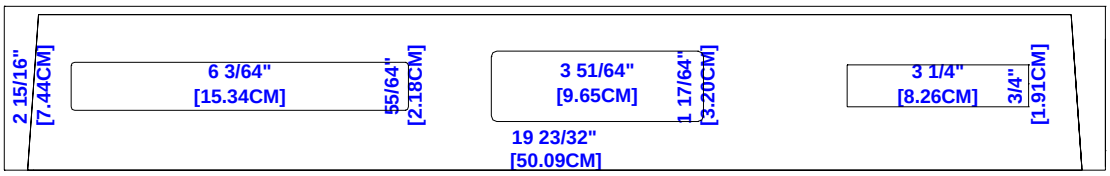

M-R0617-0549

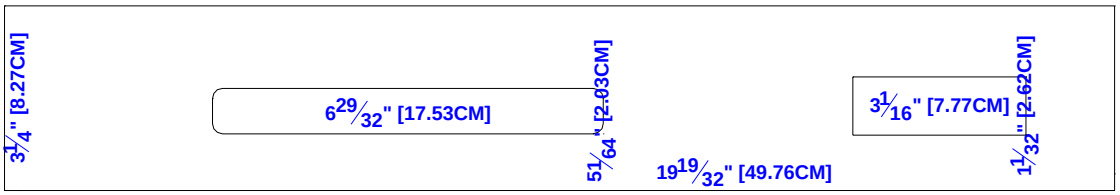

M-R0617-0553

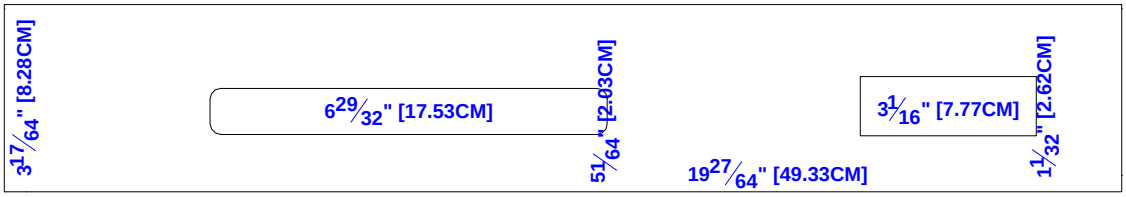

M-R0617-0554

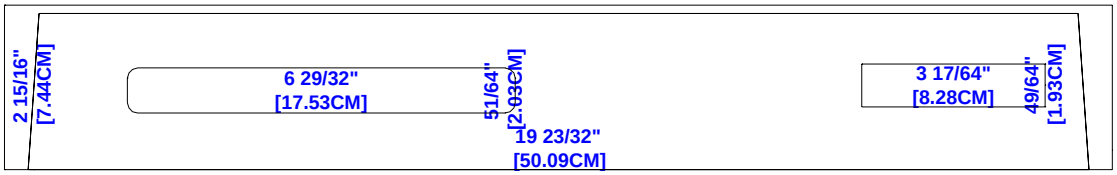

M-R0617-0557

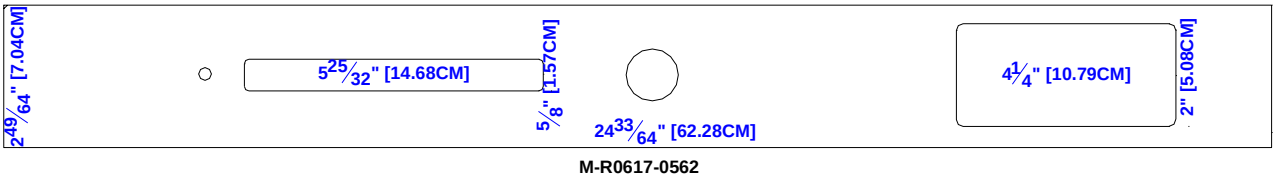

M-R0617-0562

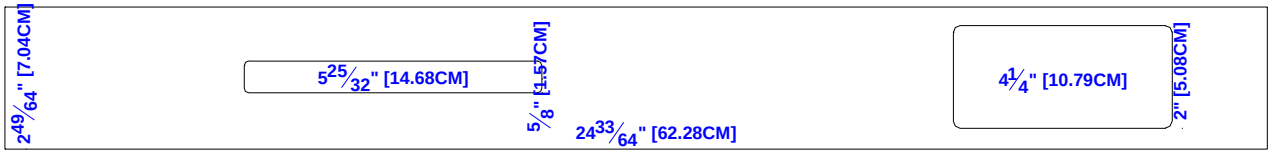

M-R0617-0563

Illustrations not to scale.

©2003 Bally Gaming and Systems

System Overlays

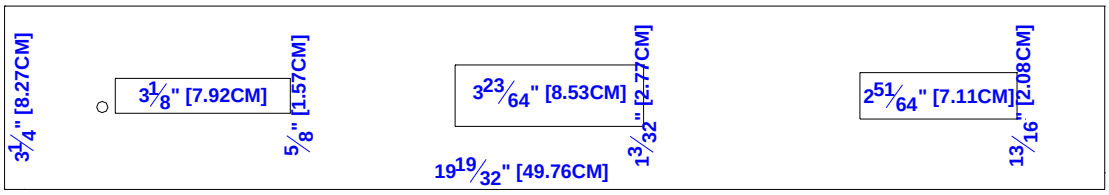

M-R0617-0564

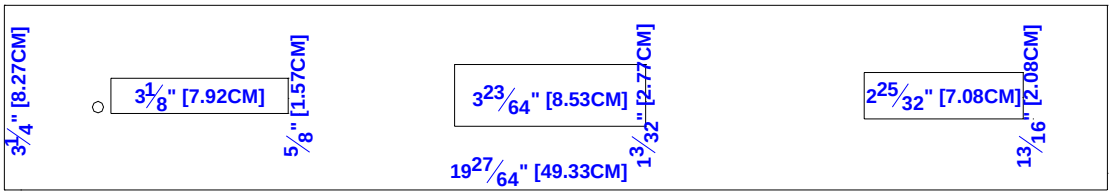

M-R0617-0565

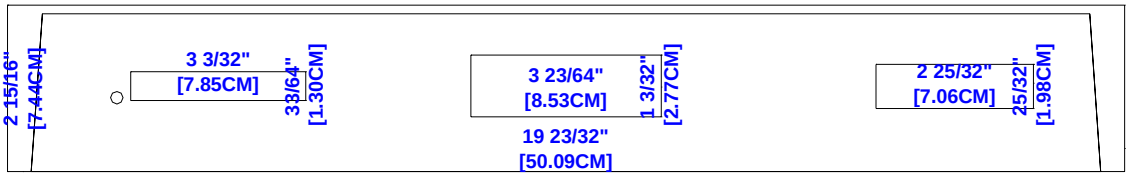

M-R0617-0566

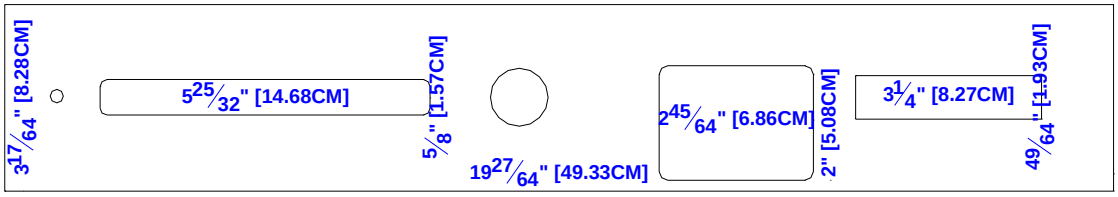

M-R0617-0575

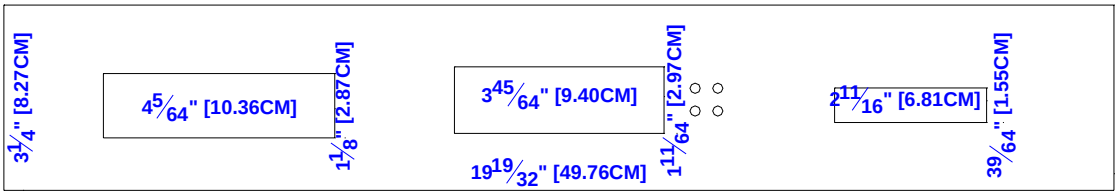

M-R0617-0577

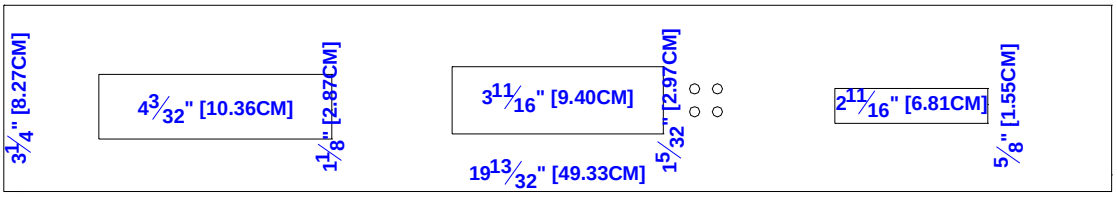

M-R0617-0578

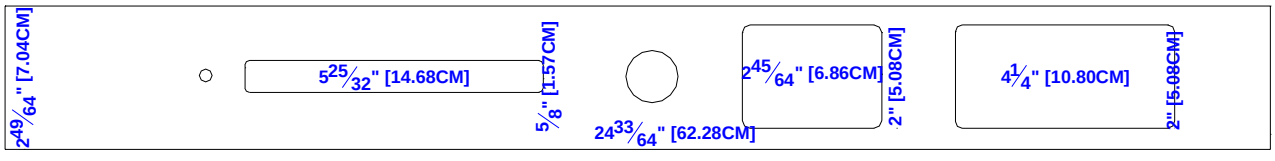

M-R0617-0579

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

System Overlays

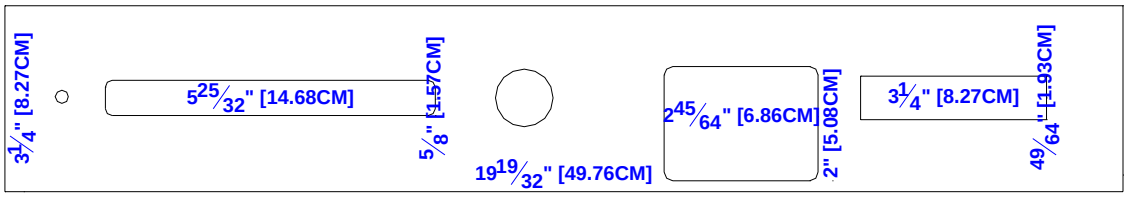

M-R0617-0580

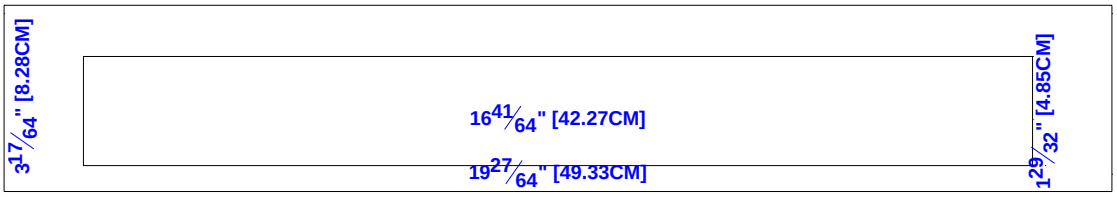

M-R0617-0599

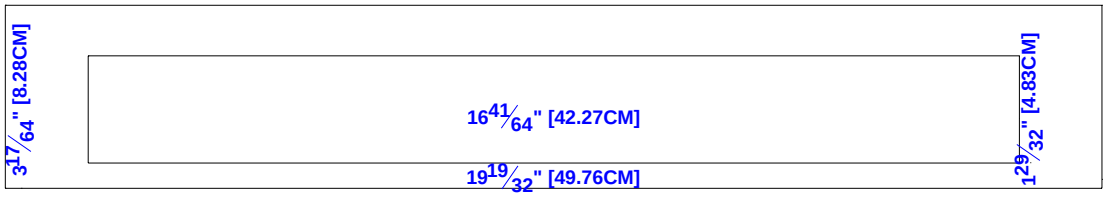

M-R0617-0600

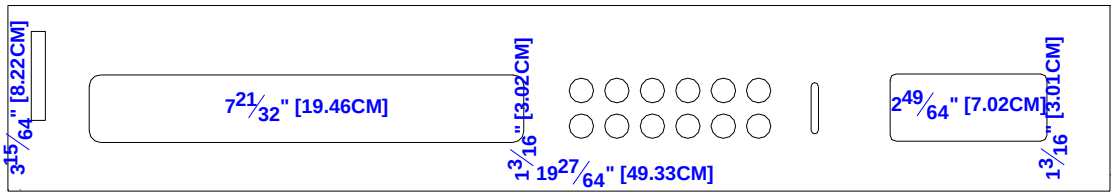

M-R0617-0603

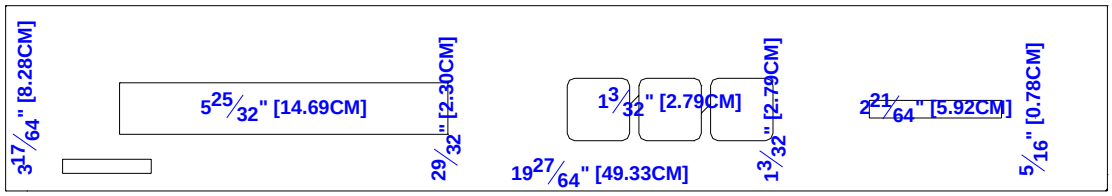

M-R0617-0604

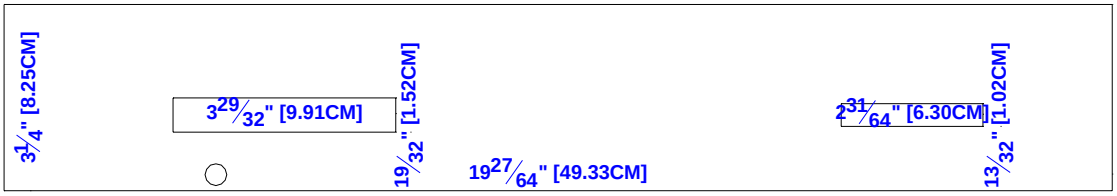

M-R0617-0611



M-R0617-0615

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

| - Revised, || - New

System Overlays

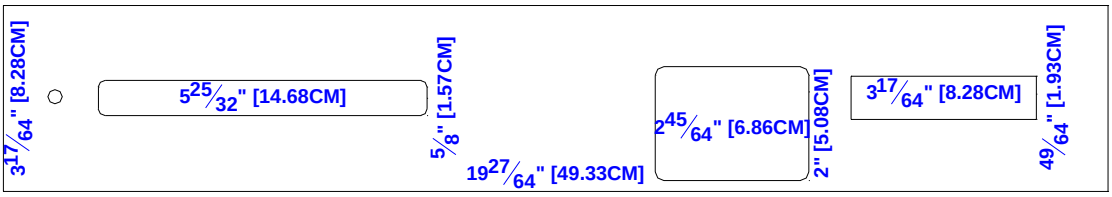

M-R0617-0621

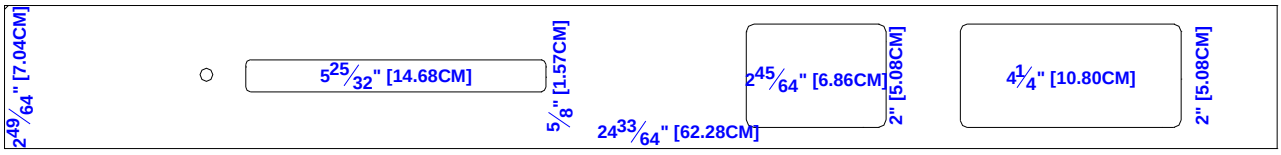

M-R0617-0622

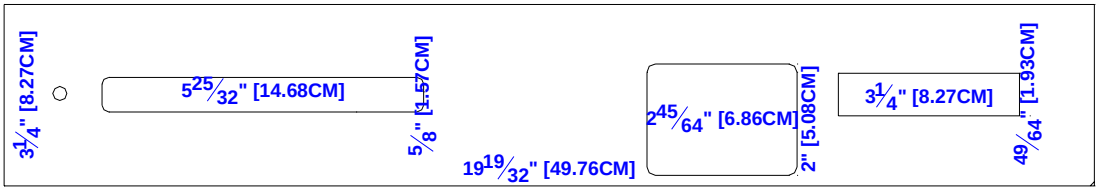

M-R0617-0623

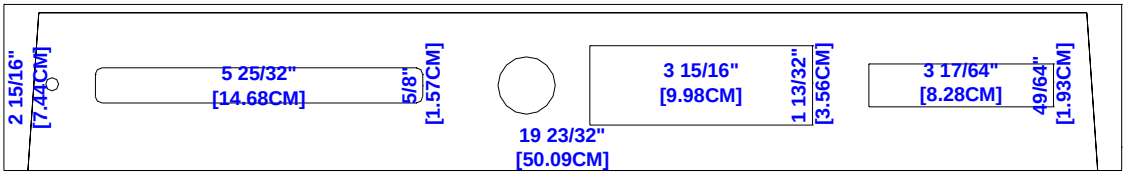

M-R0617-0624

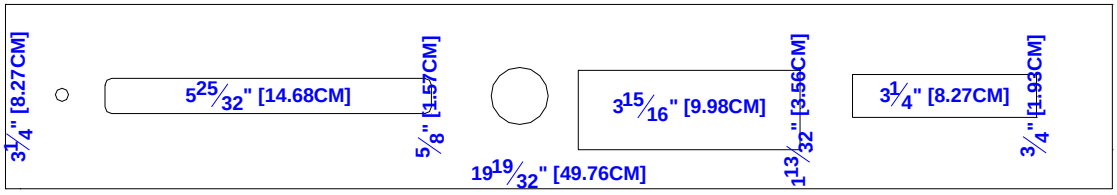

M-R0617-0625

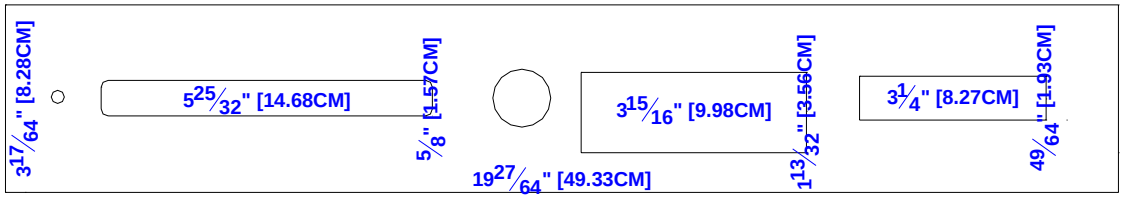

M-R0617-0626

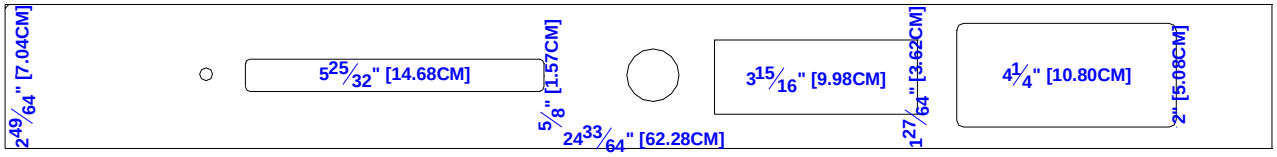

M-R0617-0643

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

System Overlays

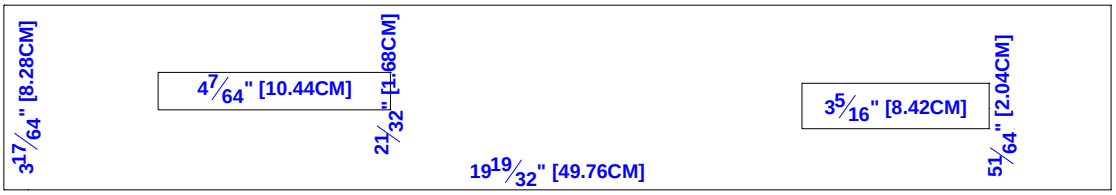

M-R0617-0647

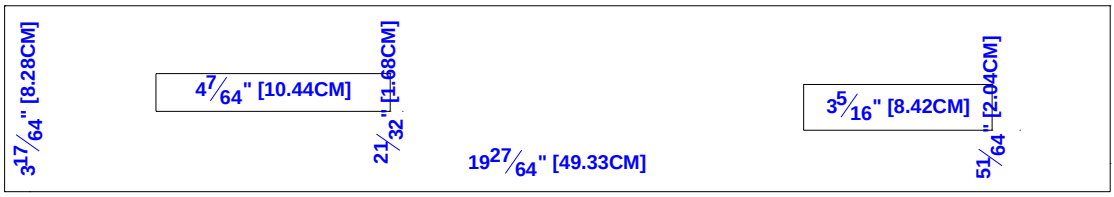

M-R0617-0648

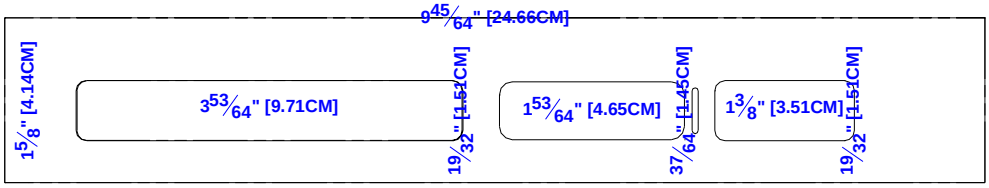

M-R0617-0659

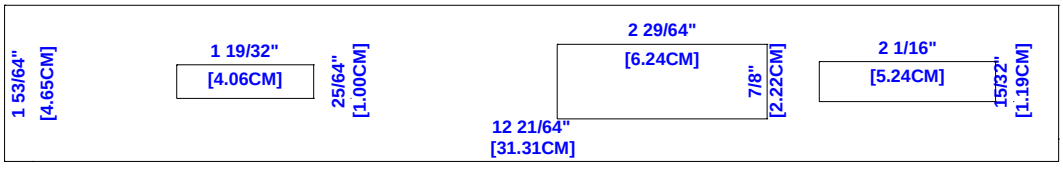

M-R0617-0665

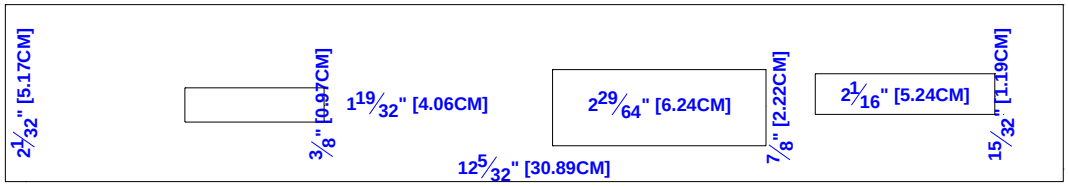

M-R0617-0667

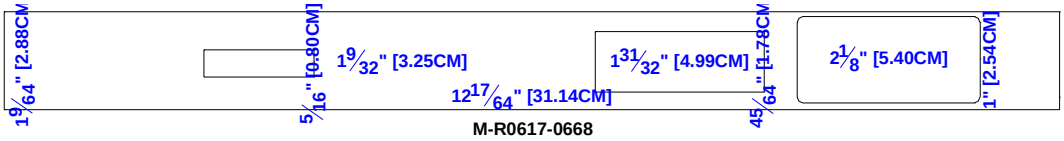

M-R0617-0668

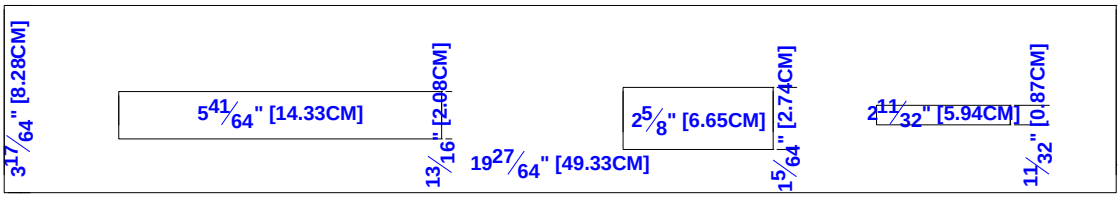

M-R0617-0669

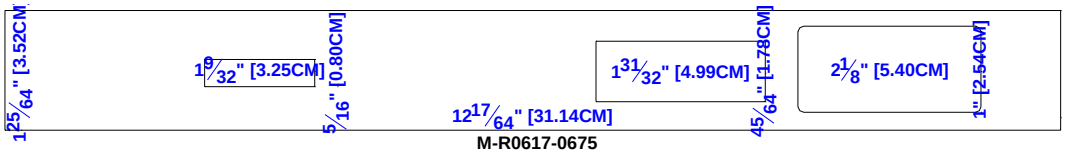

M-R0617-0675

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

| - Revised, || - New

System Overlays

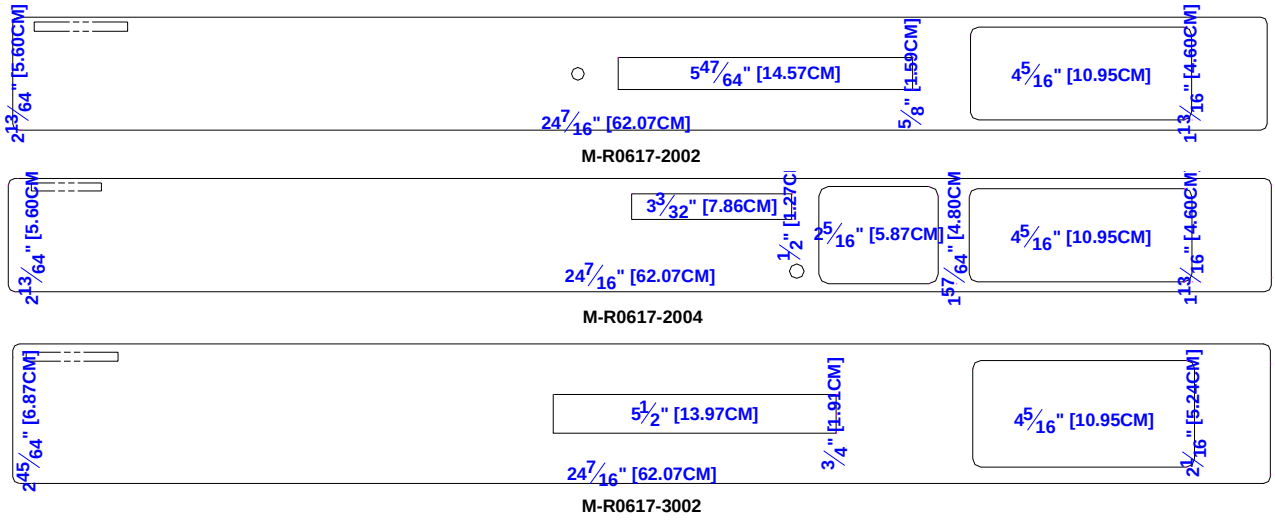

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

Bally GAMING • SYSTEMS®

ProSlot® 6000

MODULE 3B

MK3B-S6MOD-0001

Marquees

©2003 BALLY GAMING, INC. ALL RIGHTS RESERVED

Bally Gaming and Systems
6601 South Bermuda Road, Las Vegas, NV 89119

For Customer Service and information, call or FAX:
1-877-GO-BALLY (877-462-2559) in the U.S. and Canada
+1-702-896-7772 outside the U.S.
896-7772 in Las Vegas
FAX: +1-702-896-7710
or visit our website at http://www.ballygaming.com

Module 3B - Marquees
Table of Contents

Cash for Life AS-04934-(SERIES) 3B-5
Item 2 - Light Assembly, Dual Biax AS-03210-0112 ..... 3B-6
Item 3 - Light Assembly, Single 39W Biax with Ballast AS-03210-0114 ..... 3B-7
Item 4 - Light Assembly, Dual 27W Biax with Ballast AS-03210-0115 ..... 3B-8

Cash for Life, Non-Bonus AS-04955-(SERIES) 3B-9

Cash for Life, 3/4 Scale, Polished Chrome AS-02174-00P1 ..... 3B-11
Item 2 - Power Supply, 110VAC/14VAC, 700mA AS-02982-0049 ..... 3B-11
Item 3 - Ground Strap AS-03106-(SERIES) 3B-12
Item 4 - Light Bracket Assembly AS-04930-0001 ..... 3B-12
Item 5 - Bezel and Circuit Board Assembly AS-04954-(SERIES) 3B-13

Conehead AS-04946-00P1 ..... 3B-14

In the Money AS-08743-(SERIES) 3B-16
Item 5 - Light Assembly, LP, Single 39W Biax with Ballast AS-03210-0125 ..... 3B-17
Item 6 - Light Assembly, LP, 27W Dual Biax with Ballast AS-03210-0126 ..... 3B-18

To Tell the Truth AS-02170-(SERIES) 3B-19
Item 2 - Bezel/Lens Assembly AS-02171-(SERIES) 3B-20
Item 5 - Fluorescent Lamp Assembly, Dual, 12-Inch AS-03210-0109 ..... 3B-20

Oval AS-02172-(SERIES) 3B-21
Item 3 - Bezel Assembly AS-02173-(SERIES) 3B-22

Round AS-04942-(SERIES) 3B-23

Rectangle AS-04943-(SERIES) 3B-24
Item 6 - Light Assembly, Dual 39W Biax with Ballast AS-03210-0113 ..... 3B-25

Diamond AS-04952-(SERIES) 3B-26

Star AS-04932-(SERIES) 3B-27

| - Revised, || - New
©2003 Bally Gaming and Systems

ProSlot® 6000

Cash for Life AS-04934-(SERIES)

AVAILABILITY:

PART #	DESCRIPTON
AS-04934-00P1	Cash for Life, Chrome
AS-04934-00P4	Cash for Life, Gold

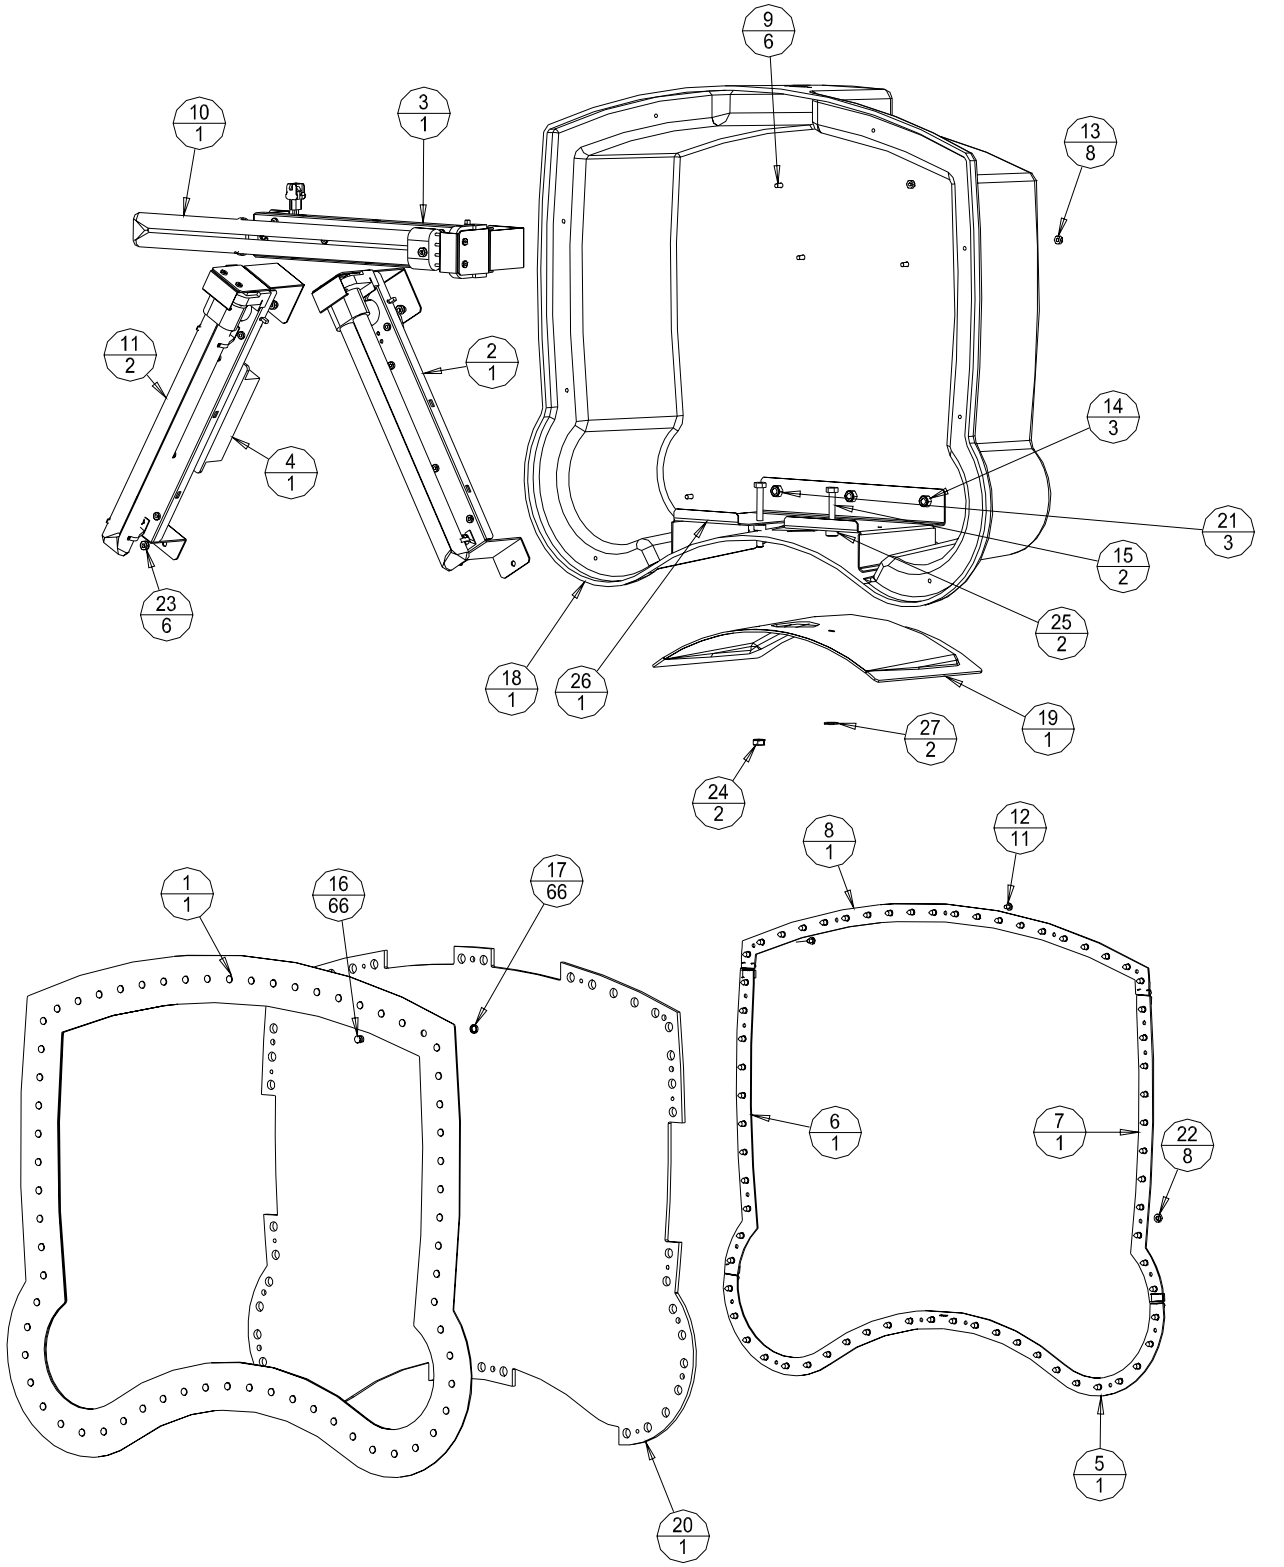

| - Revised, || - New

©2003 Bally Gaming and Systems

Cash for Life (Cont.) AS-04934-(SERIES)

REF	PART #	DESCRIPTION	QTY
1	A-04936-SERIES	Bezel Assembly	1
2	AS-03210-0112	Light Assembly, Dual Biax (page 3B-6)	1
3	AS-03210-0114	Light Assembly, Single 39W Biax with Ballast (page 3B-7)	1
4	AS-03210-0115	Light Assembly, Dual 27W Biax with Ballast (page 3B-8)	1
5	AS-03356-0630	Circuit Board, Bottom	1
6	AS-03356-0631	Circuit Board, Left	1
7	AS-03356-0632	Circuit Board, Right	1
8	AS-03356-0633	Circuit Board, Top	1
9	CBOR-00832-1808	#8 Carriage Bolt, 1/2-Inch Large	6
10	E-00128-0001	Lamp, Fluorescent, Twin	1
11	E-00128-0002	Lamp, Fluorescent, Twin	2
12	LSPP-00632-1104	Screw, Mach with Lock Phil Pan Hd.	11
13	M-00319-0006	Elastic Stop Nut (ESNA)	8

REF	PART #	DESCRIPTION	QTY
14	M-00319-0008	Elastic Stop Nut (ESNA)	3
15	M-01777-5644	Bolt, 1/4-20 x 2 1/2-Inch	2
16	M-02107-0002C	Lens, 5mm LED, Clear	66
17	M-02108-0001	Retainer, LED Lens, 5mm	66
18	M-03127-0001	Housing, VAC Formed	1
19	M-03128-0001	Mounting Base, VAC Formed	1
20	M-03139-SERIES	Plex, CFL 3-D (Ref)	1
21	MSOS-25020-1108	Screw, 1/4 x 1/2 Mach, Serrated Hex Hd.	3
22	NLS-00632-1112	Hex Nut	8
23	NLS-00832-1112	Hex Nut	6
24	NLS-25020-1112	Hex Nut	2
25	P-04615-0001	Peg, Monitor	2
26	P-09319-0684	Anti-Vibration Bracket	1
27	PW-00250-0012	Washer, Plain	2

Item 2 - Light Assembly, Dual Biax AS-03210-0112

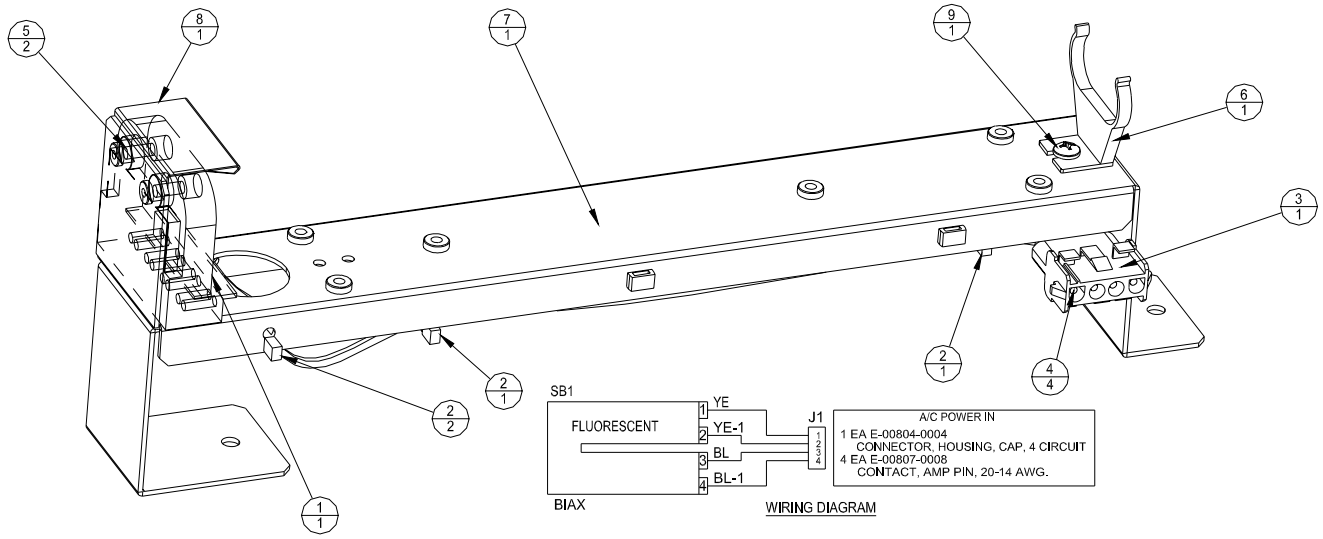

REF	PART #	DESCRIPTION	QTY
1	E-00120-0277	Base, Lamp, Twin	1
2	E-00647-0004	Tie Wrap	4
3	E-00804-0004	Connector Housing Cap	1
4	E-00807-0008	Contact Pin, Amp 20-14	4
5	LSPP-00632-1106	Screw, Mach with Lock Phil Pan Hd	2
6	M-06004-0001	Clip, Lamp Support, Twin	1

REF	PART #	DESCRIPTION	QTY
7	P-09319-0694	Light Bracket Assembly, Twin Lamp	1
8	P-09319-0752	Bulb Retainer	1
9	TFPP-00832-1104	Screw, 8-32 x 1/4 Tjd Form Phil Pan Hd	1
10	WIP-ES202-1820	PVC, Solid, 18 AWG Blue Type TEW	—
11	WIP-ES202-1830	PVC, Solid, 18 AWG, Yellow Type TEW	—

©2003 Bally Gaming and Systems

ProSlot® 6000

Cash for Life (Cont.) AS-04934-(SERIES)

Item 3 - Light Assembly, Single 39W Biax with Ballast
AS-03210-0114

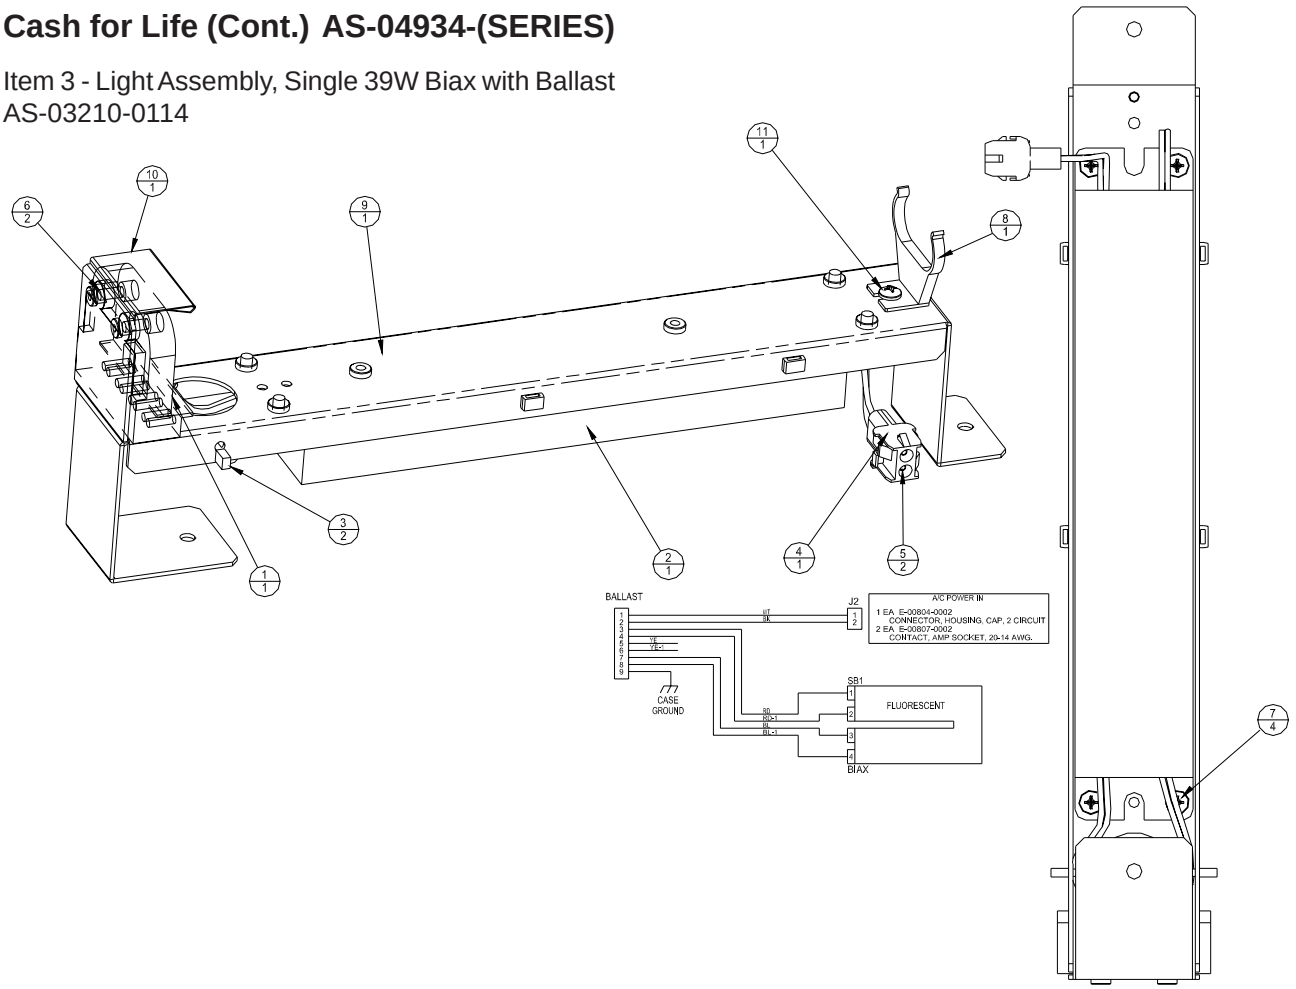

REF	PART #	DESCRIPTION	QTY
1	E-00120-0277	Base, Lamp, Twin	1
2	E-00409-0033	Ballast, Twin Lamp	1
3	E-00647-0004	Tie Wrap	2
4	E-00804-0002	Connector Housing Cap	1
5	E-00807-0002	Contact Socket, Amp 20-14 AWG	2
6	LSPP-00632-1106	Screw, Mach with Lock Phil Pan Hd	2

REF	PART #	DESCRIPTION	QTY
7	LSPP-00832-1106	Screw, Mach with Lock Phil Pan Hd	4
8	M-06004-0001	Clip, Lamp Support, Twin	1
9	P-09319-0694	Light Bracket Assembly, Twin Lamp	1
10	P-09319-0752	Bulb Retainer	1
11	TFPP-00832-1104	Screw, 8-32 x 1/4 Thd Form Phil Pan Hd	1

| - Revised, || - New
©2003 Bally Gaming and Systems

Cash for Life (Cont.) AS-04934-(SERIES)

Item 4 - Light Assembly, Dual 27W Biax with Ballast
AS-03210-0115

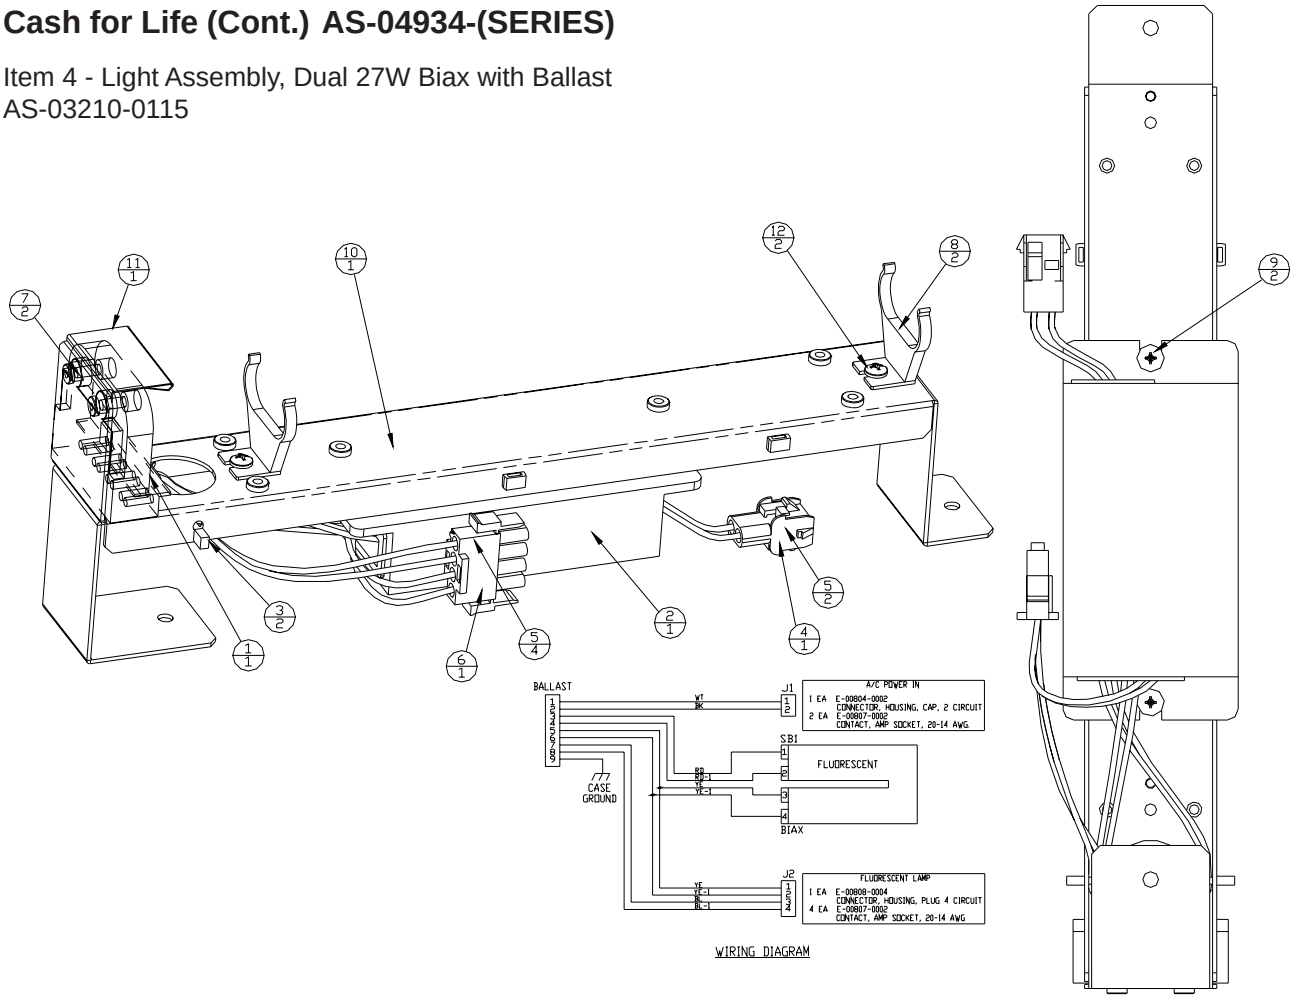

WIRING DIAGRAM

REF	PART #	DESCRIPTION	QTY
1	E-00120-0277	Base, Lamp, Twin	1
2	E-00409-0032	Ballast, Twin Lamp, 27W	1
3	E-00647-0004	Tie Wrap	2
4	E-00804-0002	Connector Housing Cap	1
5	E-00807-0002	Contact Socket, Amp 20-14 AWG	6
6	E-00808-0004	Connector Housing Plug	1
7	LSPP-00632-1106	Screw, Mach with Lock Phil Pan Hd	2
8	M-06004-0001	Clip, Lamp Support, Twin	2
9	MSPT-00832-1112	Screw, 8-32 x 3/4 Mach Phil Truss Hd	2

REF	PART #	DESCRIPTION	QTY
10	P-09319-0694	Light Bracket Assembly, Twin Lamp	1
11	P-09319-0752	Bulb Retainer	1
12	TFPP-00832-1104	Screw, 8-32 x 1/4 Thd Form Phil Pan Hd	2
13	WIP-ES202-1810	PVC, Solid, 18 AWG Red Type TEW	—
14	WIP-ES202-1830	PVC, Solid, 18 AWG Blue Type TEW	—
15	WIP-ES202-1830	PVC, Solid, 18 AWG Yellow Type TEW	—
16	WIP-ES202-1850	PVC, Solid, 18 AWG, White	—
17	WIP-ES202-1880	PVC, Solid, 18 AWG, Black	—

©2003 Bally Gaming and Systems

ProSlot® 6000

Cash for Life, Non-Bonus
AS-04955-(SERIES)

AVAILABILITY:

PART #	DESCRIPTON
AS-04955-00P1	Cash for Life, Non-Bonus, Monte Carlo Cabinet, 110V
AS-04955-01P1	Cash for Life, Non-Bonus, Monte Carlo Cabinet, 220V
AS-04955-10P1	Cash for Life, Non-Bonus, Round Top, 110V

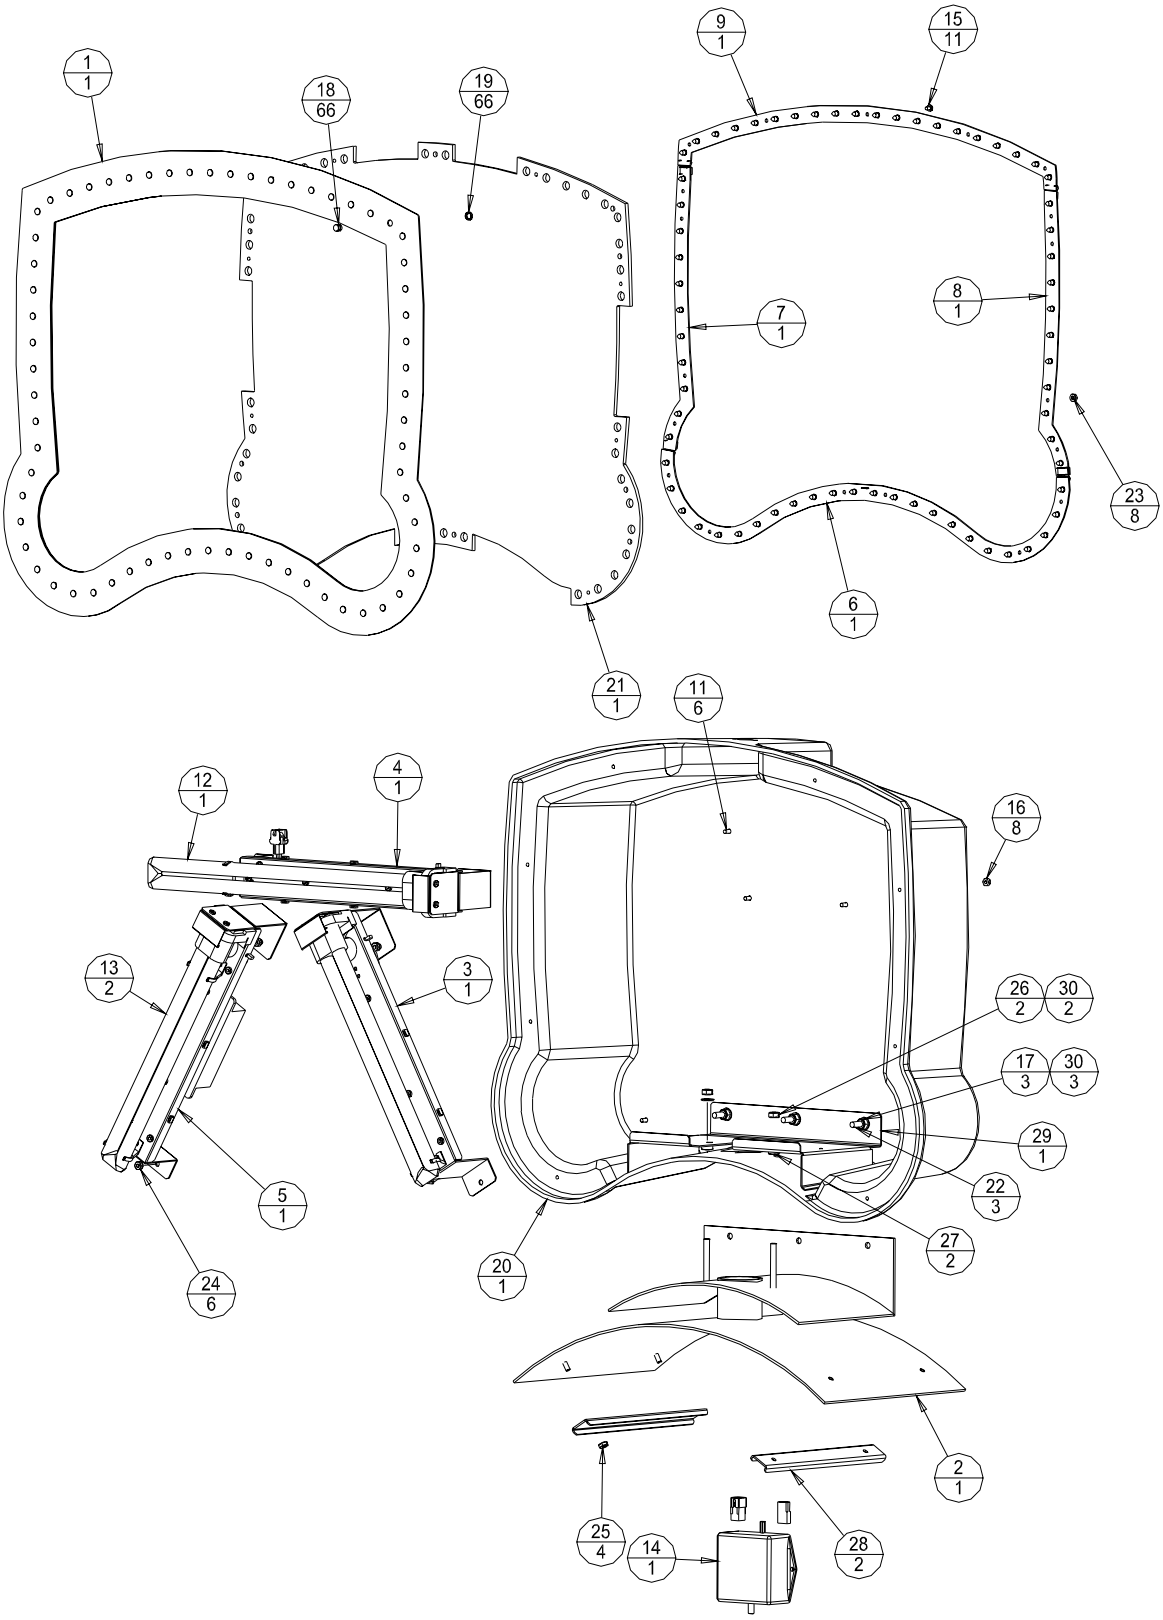

©2003 Bally Gaming and Systems

Cash for Life, Non-Bonus (Cont.)
AS-04955-(SERIES)

REF	PART #	DESCRIPTION	QTY
1	A-04936-SERIES	Bezel Assembly	1
2	A-04957-SERIES	Pedestal	1
3	AS-03210-0112	Light Assembly, Dual Biax (page 3B-6)	1
4	AS-03210-0114	Light Assembly, Single 39W Biax with Ballast (page 3B-7)	1
5	AS-03210-0115	Light Assembly, Dual 27W Biax with Ballast (page 3B-8)	1
6	AS-03356-0630	Circuit Board, Bottom	1
7	AS-03356-0631	Circuit Board, Left	1
8	AS-03356-0632	Circuit Board, Right	1
9	AS-03356-0633	Circuit Board, Top	1
10	CBL-30676-0001	LED Top Box Cable	1
11	CBOR-00832-1808	#8 Carriage Bolt, 1/2-Inch, Large	6
12	E-00128-0001	Lamp, Fluorescent, Twin	1
13	E-00128-0002	Lamp, Fluorescent, Twin	2
14	E-00664-0616	3 Lamp Sequencer	1

REF	PART #	DESCRIPTION	QTY
15	LSPP-00632-1104	Screw, Mach with Lock Phil Pan Hd.	11
16	M-00319-0006	Elastic Stop Nut (ESNA)	8
17	M-00319-0008	Elastic Stop Nut (ESNA)	3
18	M-02107-000C	Lens, 5MM LED, Clear	66
19	M-02108-0001	Retainer, LED Lens, 5MM	66
20	M-03127-0001	Housing, VAC Formed	1
21	M-03139-SERIES	Plex, CFL 3-D (Ref)	1
22	MSOH-25020-1120	Screw, 250-20 x 1 1/4, Mach Hex Hd.	3
23	NLS-00632-1112	Hex Nut	8
24	NLS-00832-1112	Hex Nut	6
25	NLS-01032-1112	Hex Nut	4
26	NLS-25020-1112	Hex Nut	2
27	P-04615-0001	Peg, Monitor	2
28	P-06714-0007	Mounting Bracket Support	2
29	P-09319-0684	Anti-Vibration Bracket	1
30	PW-00250-0012	Washer, Plain	5

©2003 Bally Gaming and Systems

ProSlot® 6000

Cash for Life, 3/4 Scale, Polished Chrome
AS-02174-00P1

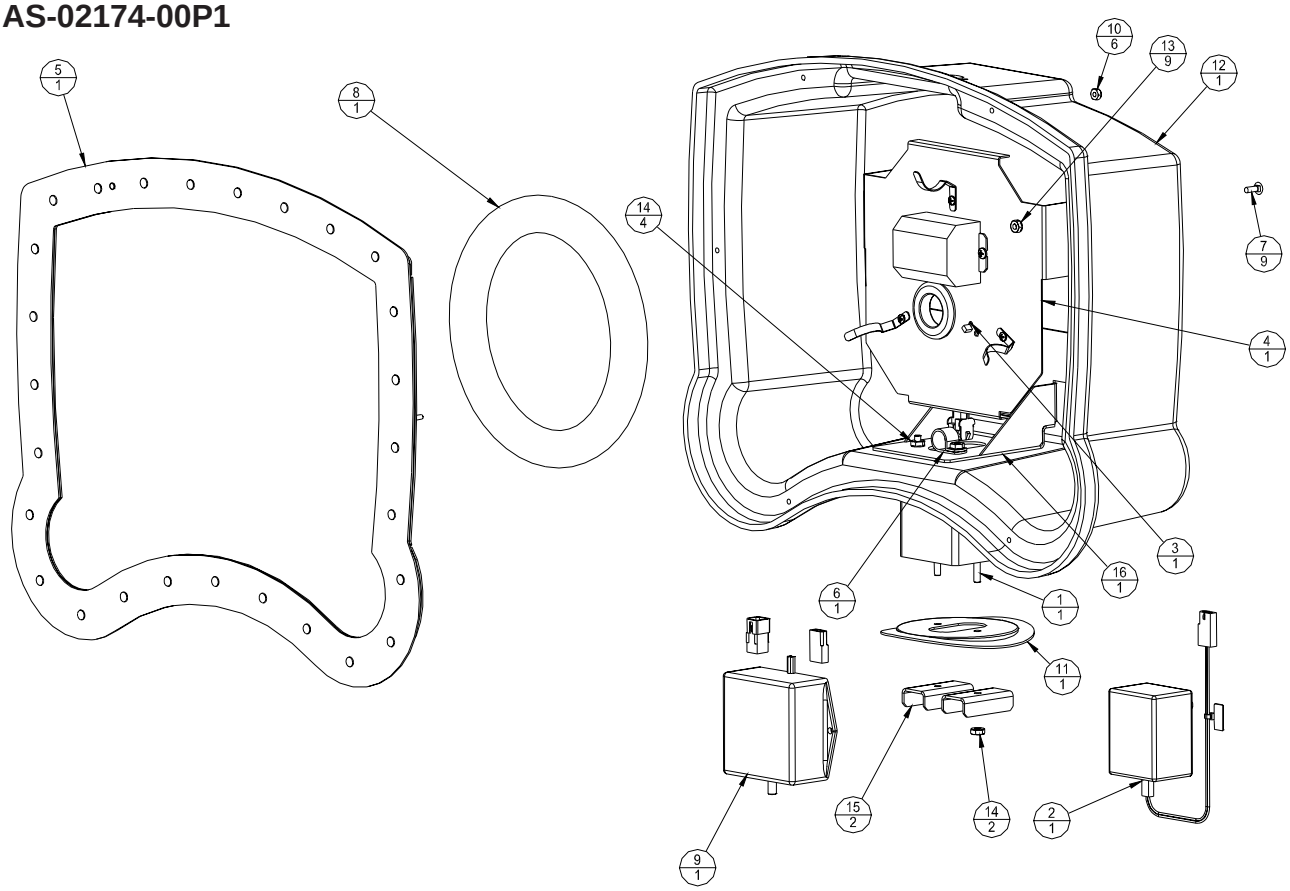

REF	PART #	DESCRIPTION	QTY
1	A-04933-0001	Mounting Bracket	1
2	AS-02982-0049	Power Supply, 110VAC/14VAC, 700mA (page 3B-11)	1
3	AS-03106-0004	Ground Strap, 12-Inch (page 3B-12)	1
4	AS-04930-0001	Light Bracket Assembly (page 3B-12)	1
5	AS-04954-SERIES	Bezel and Circuit Board Assembly (page 3B-13)	1
6	C-00271-0009	Clip	1
7	CBOR-00832-1808	#8 Carriage Bolt 1/2-Inch, Large	9
8	E-00412-0020	Lamp, Fluorescent, 8.25-Inch, Round	1

REF	PART #	DESCRIPTION	QTY
9	E-00664-0616	3 Lamp Sequencer	1
10	M-00319-0006	Elastic Stop Nut (ESNA)	6
11	M-03097-0009	Base, Tower Wide	1
12	M-03125-0004	Housing, VAC Formed	1
13	NLS-00832-1112	Hex Nut	9
14	NLS-01032-1112	Hex Nut	6
15	P-09319-0675	Washer, Ribbed	2
16	P-09319-0695	Anti-Vibration Bracket	1

Item 2 - Power Supply, 110VAC/14VAC, 700mA
AS-02982-0049

REF	PART #	DESCRIPTION	QTY
1	E-00662-0200	Connector, Molex Receptacle, .093, 2 Circuit	1
2	E-00663-0003	Contact, Molex Socket, .093, 18-22 AWG	2
3	E-00647-0020	Marker Tie	1

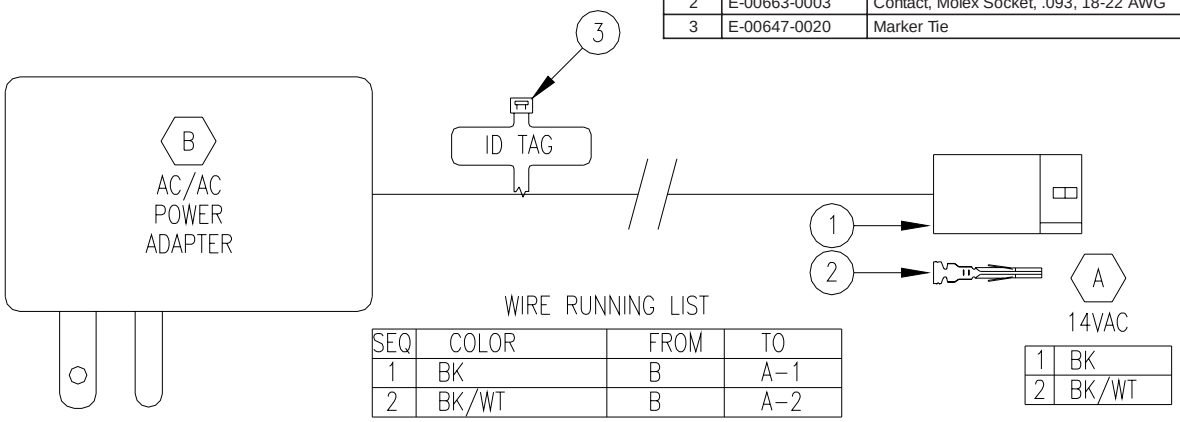

WIRE RUNNING LIST

SEQ	COLOR	FROM	TO
1	BK	B	A-1
2	BK/WT	B	A-2

| - Revised, || - New

©2003 Bally Gaming and Systems

Cash for Life, 3/4 Scale, Polished Chrome (Cont.) AS-02174-00P1

Item 3 - Ground Strap AS-03106-(SERIES)

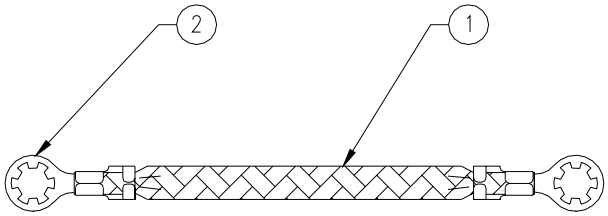

LEGEND

PART #	LENGTH (INCH)	DESCRIPTION
AS-03106	18-Inch	Tower Ground Strap
AS-03106-0001	24-Inch	Tower Ground Strap
AS-03106-0002	30-Inch	Tower Ground Strap
AS-03106-0004	12-Inch	Ground Strap
AS-03106-0006	6-Inch	Tower Ground Strap
AS-03106-0008	8-1/2-Inch	Tower Ground Strap
AS-03106-0010	4-Inch	Ground Strap
AS-03106-0012	17-Inch	Ground Strap (Earth Ground Australia)

REF	PART #	DESCRIPTION	QTY
1	E-00673-0003	Braided Ground Wire	A/R
2	P-00405-0001	Term Ring Non-Insulated #10, 12-10 AWG	2

Item 4 - Light Bracket Assembly AS-04930-0001

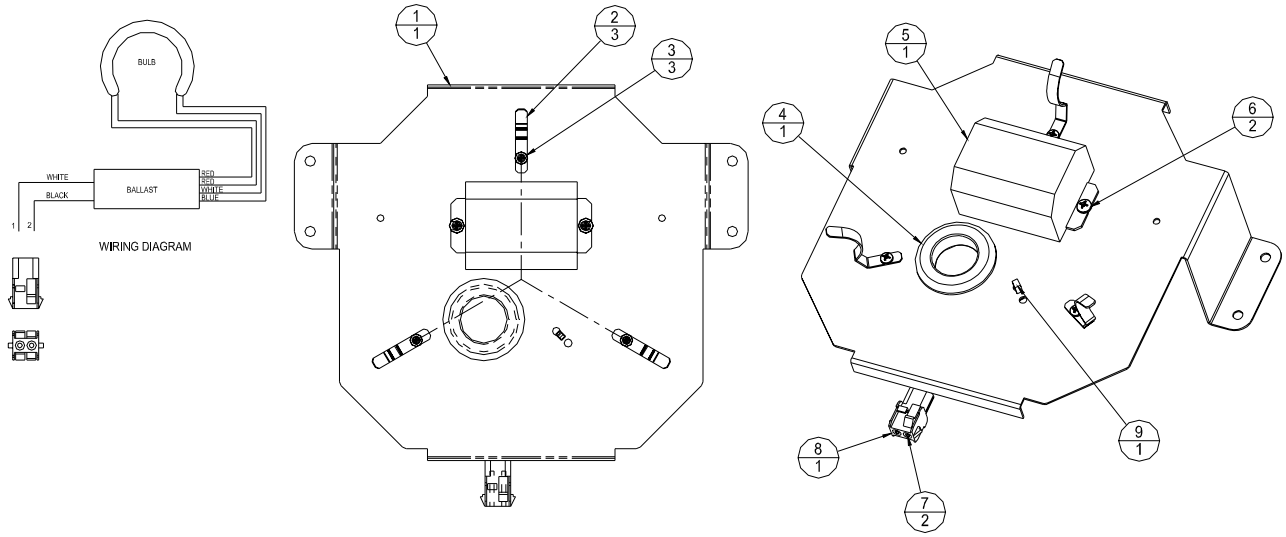

REF	PART #	DESCRIPTION	QTY
1	P-04930-0001	Light Bracket	1
2	P-04930-0002	Bulb Bracket	3
3	TFPP-00632-1104	Screw, 6-32 x 1/4 Thd Form Phil Pan Hd	3
4	R-00111-0061	Grommet, 1.00 ID	1
5	E-00409-0021	Ballast, 22W	1

REF	PART #	DESCRIPTION	QTY
6	TFPP-00832-1104	Screw, 8-32 x 1/4 Thd Form Phil Pan Hd	2
7	E-00807	Socket, Amp, 24-18	2
8	E-00804-0002	Connector Housing Cap	1
9	E-00647-0004	Tie Wrap	1

©2003 Bally Gaming and Systems

ProSlot® 6000

Cash for Life, 3/4 Scale, Polished Chrome (Cont.) AS-02174-00P1

Item 5 - Bezel and Circuit Board Assembly
AS-04954-(SERIES)

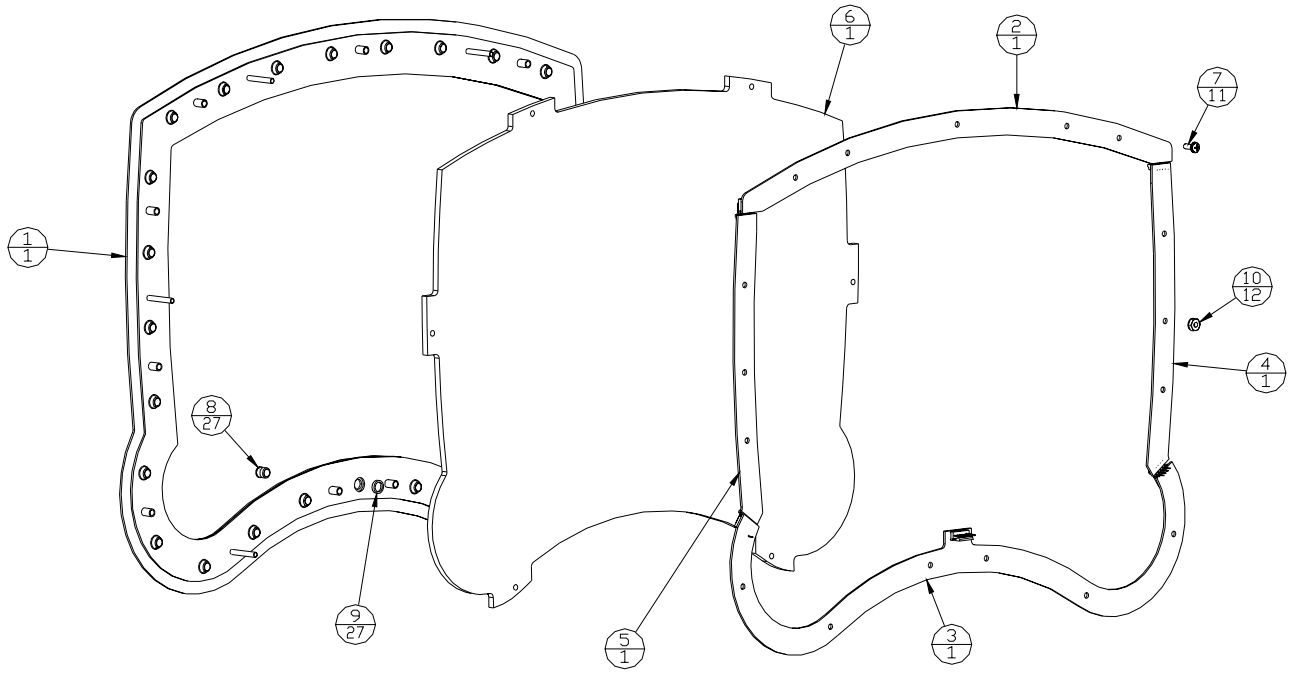

REF	PART #	DESCRIPTION	QTY
1	A-04954-SERIES	Bezel	1
2	AS-03356-0605	Circuit Board Assembly, Top	1
3	AS-03356-0606	Circuit Board Assembly, Bottom	1
4	AS-03356-0607	Circuit Board Assembly, Left	1
5	AS-03356-0608	Circuit Board Assembly, Right	1

REF	PART #	DESCRIPTION	QTY
6	G-R0777	Plex, Topper	1
7	LSPP-00632-1106	Screw, Mach with Lock Phil Pan Hd	11
8	M-02107-000C	Lens, 5MM LED, Clear	27
9	M-02108-0001	Retainer, LED Lens, 5MM	27
10	NLS-00632-1112	Hex Nut	12

©2003 Bally Gaming and Systems

Conehead AS-04946-00P1

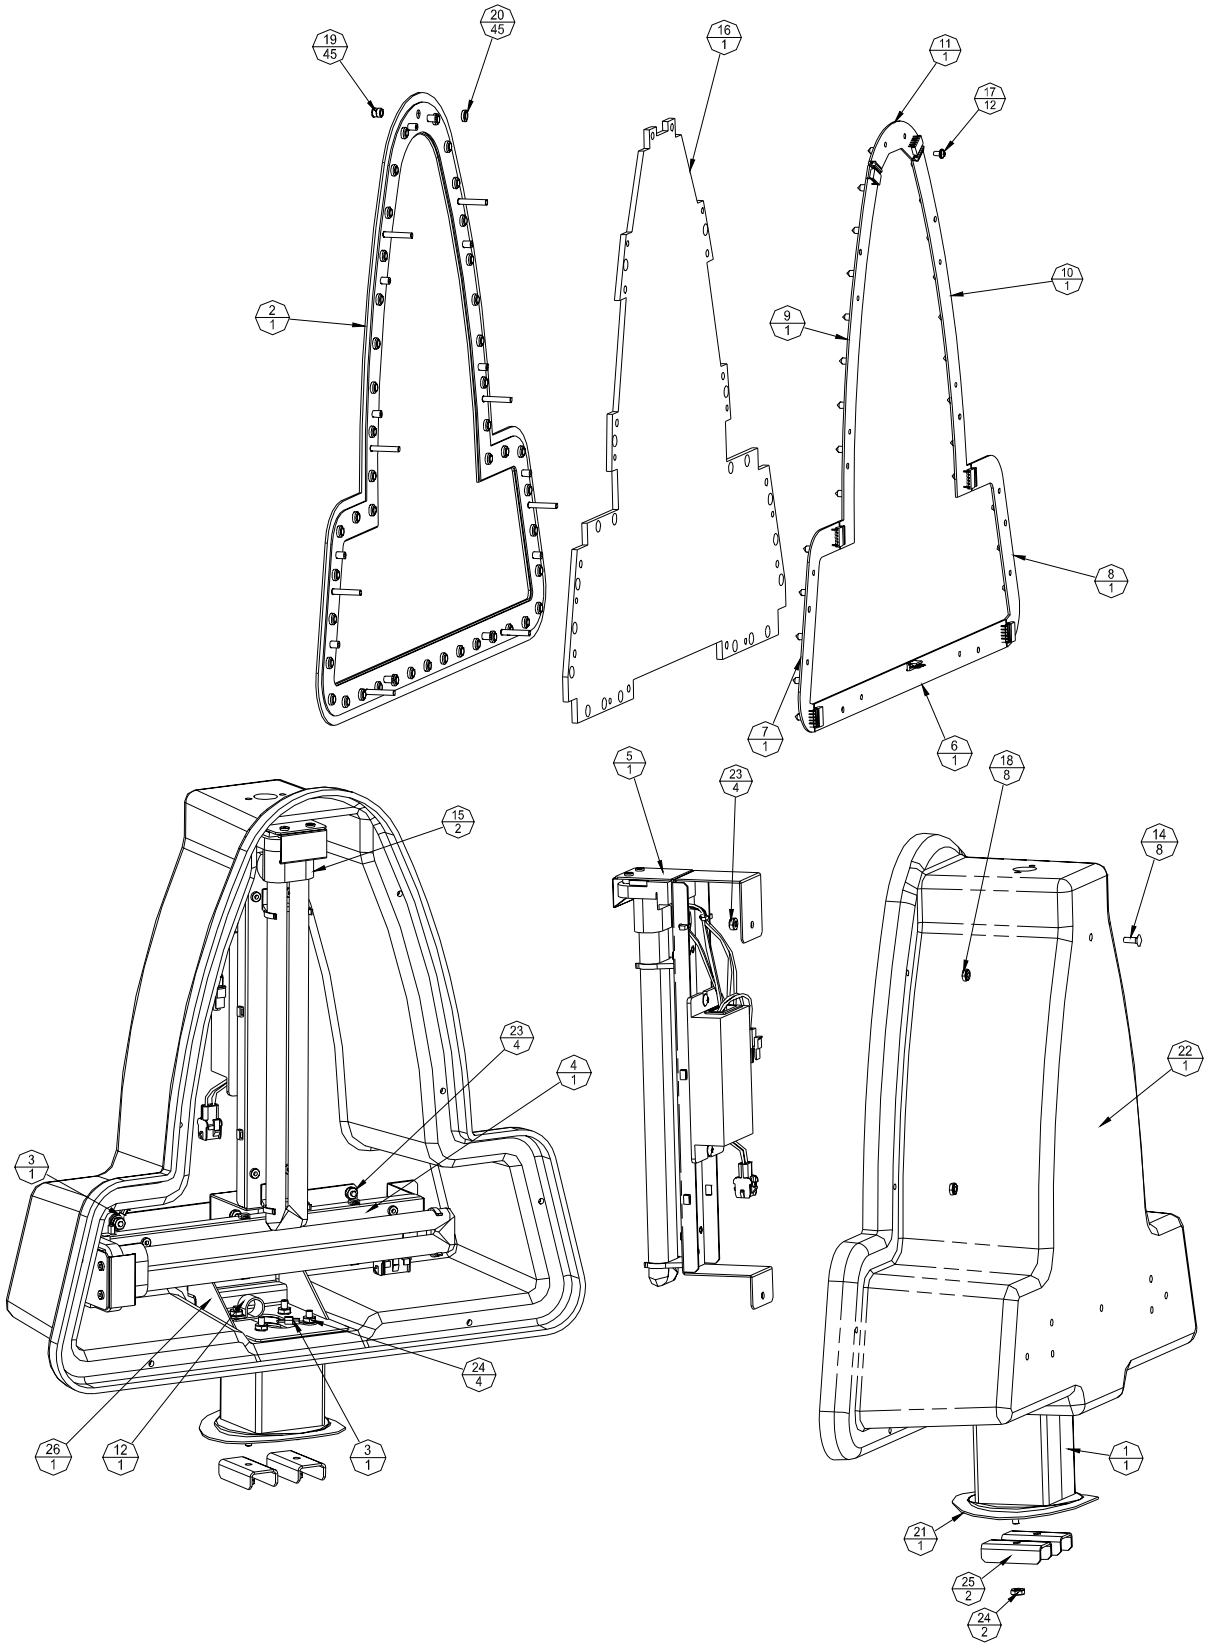

©2003 Bally Gaming and Systems

ProSlot® 6000

Conehead (Cont.) AS-04946-00P1

REF	PART #	DESCRIPTION	QTY
1	A-04933-0001	Mounting Bracket	1
2	A-04947-SERIES	Bezel Assembly	1
3	AS-03106	Ground Strap, 18-Inch (page 3B-12)	2
4	AS-03210-0112	Light Assembly, Dual Biax (page 3B-6)	1
5	AS-03210-0115	Light Assembly, Dual 27W Biax with Ballast (page 3B-8)	1
6	AS-03356-0584	Circuit Board Assembly	1
7	AS-03356-0585	Circuit Board Assembly	1
8	AS-03356-0586	Circuit Board Assembly	1
9	AS-03356-0587	Circuit Board Assembly	1
10	AS-03356-0588	Circuit Board Assembly	1
11	AS-03356-0589	Circuit Board Assembly	1
12	C-00271-0009	Clip	1
13	CBL-30651-0001	Cable (Not Shown)	1

REF	PART #	DESCRIPTION	QTY
14	CBOR-00832-1808	#8 Carriage Bolt, 1/2-Inch Large	8
15	E-00128-0002	Lamp, Fluorescent, Twin	2
16	G-R0770	Plex, Conehead	1
17	LSPP-00632-1104	Screw, Mach with Lock Phil Pan Hd.	12
18	M-00319-0002	Elastic Stop Nut (ESNA)	8
19	M-02107-000C	Lens, 5mm LED, Clear	45
20	M-02108-0001	Retainer, LED Lens, 5mm	45
21	M-03097-0009	Base, Tower Wide	1
22	M-03125-0003	Housing, Conehead Plastic	1
23	NLS-00832-1112	Hex Nut	8
24	NLS-01032-1112	Hex Nut	6
25	P-09319-0675	Washer, Ribbed	2
26	P-09319-0695	Anti-Vibration Bracket	1

| - Revised, || - New
©2003 Bally Gaming and Systems

ProSlot® 6000

In the Money AS-08743-(SERIES)

AVAILABILITY:

PART #	DESCRIPTON
AS-08743-00P1	In the Money, 110V
AS-08743-00P4	In the Money, 220V
AS-08743-01P1	In the Money, 220V

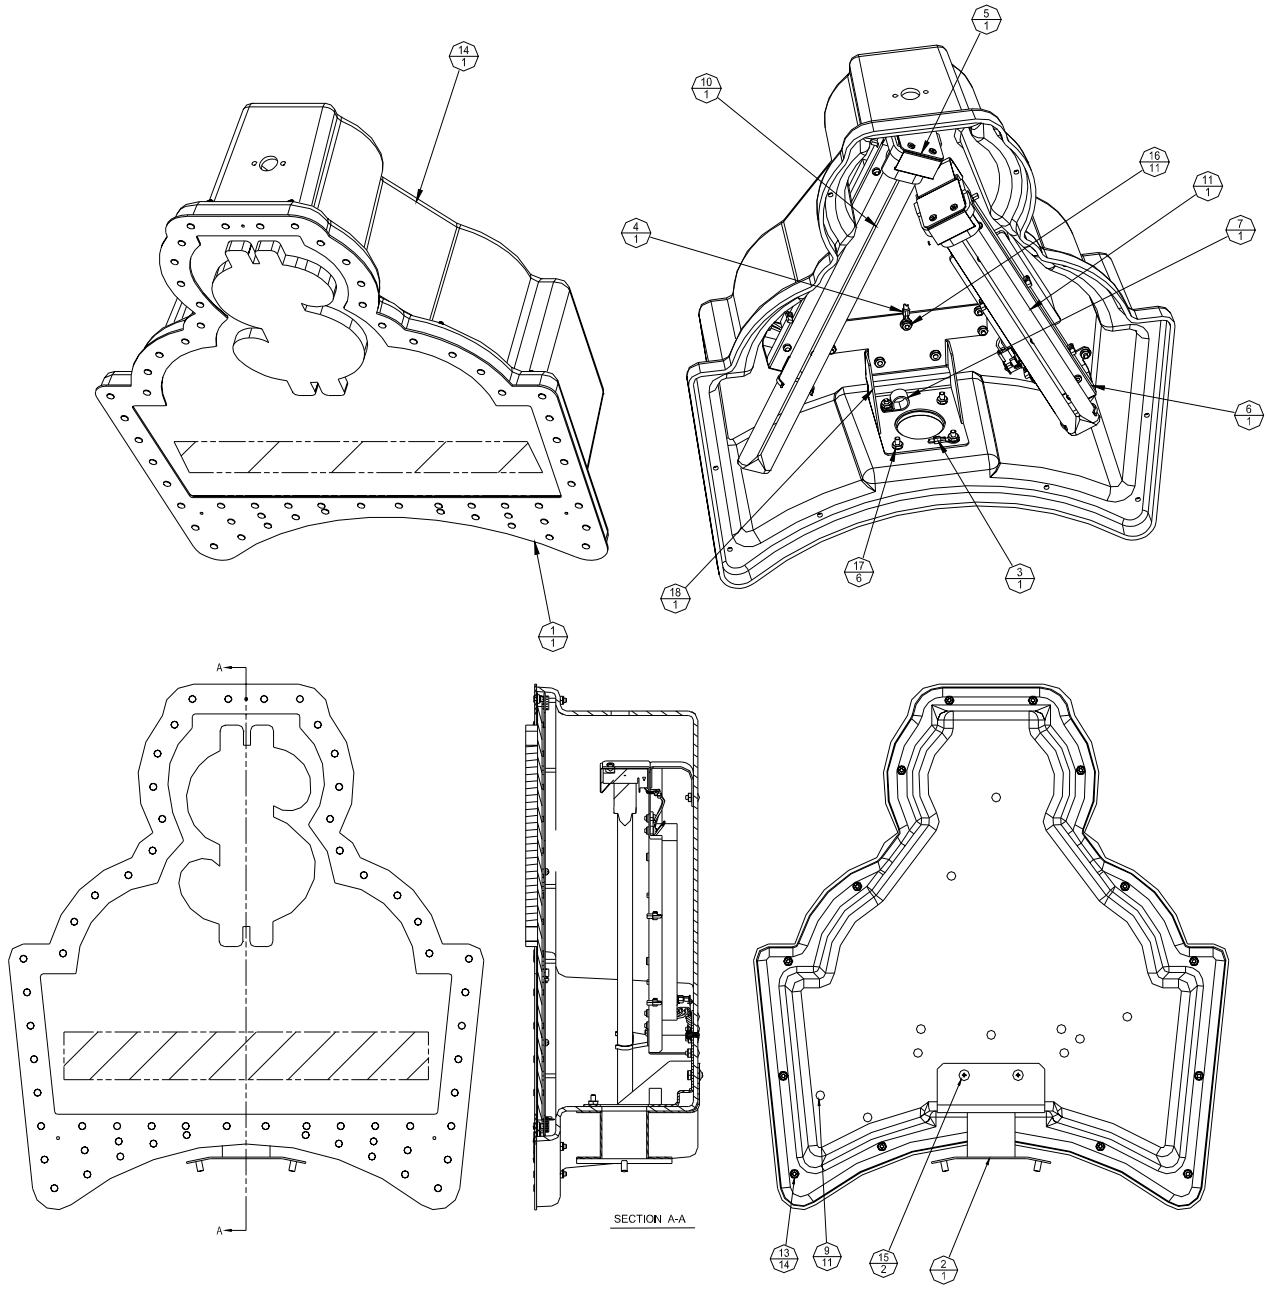

REF	PART #	DESCRIPTION	QTY
1	A-04967-SERIES	Bezel Assembly, Glass and PCB, Dollar Sign	1
2	A-04969-SERIES	Post, Mounting Bracket, Marquee	1
3	AS-03106-0001	Ground Strap, 24-Inch (page 3B-12)	1
4	AS-03106-0004	Ground Strap, 12-Inch (page 3B-12)	1
5	AS-03210-0125	Light Assembly, LP, Single 39W Biax with Ballast (page 3B-17)	1
6	AS-03210-0126	Light Assembly, LP, 24W Dual Biax with Ballast (page 3B-18)	1
7	C-00271-0009	Clip	1
8	CBL-20324-0001	Cable (Not Shown)	1

REF	PART #	DESCRIPTION	QTY
9	CBOR-00832-1808	#8 Carriage Bolt 1/2-Inch Large	11
10	E-00128-0001	Lamp, Fluorescent, Twin	1
11	E-00128-0002	Lamp, Fluorescent, Twin	1
12	E-01145-2312	Ground Cable (Not Shown)	1
13	M-00319-0002	Elastic Stop Nut (ESNA)	14
14	M-03141-0001	Housing, Topper ITM	1
15	MSPT-01032-1108	Screw, 10-32 x 1/2 Mach Phil Truss Hd.	2
16	NLS-00832-1112	Hex Nut	11
17	NLS-01032-1112	Hex Nut	6
18	P-09319-0755	Anti-Vibration Bracket	1

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

In the Money (Cont.) AS-08743-(SERIES)

Item 5 - Light Assembly, LP, Single 39W Biax with Ballast AS-03210-0125

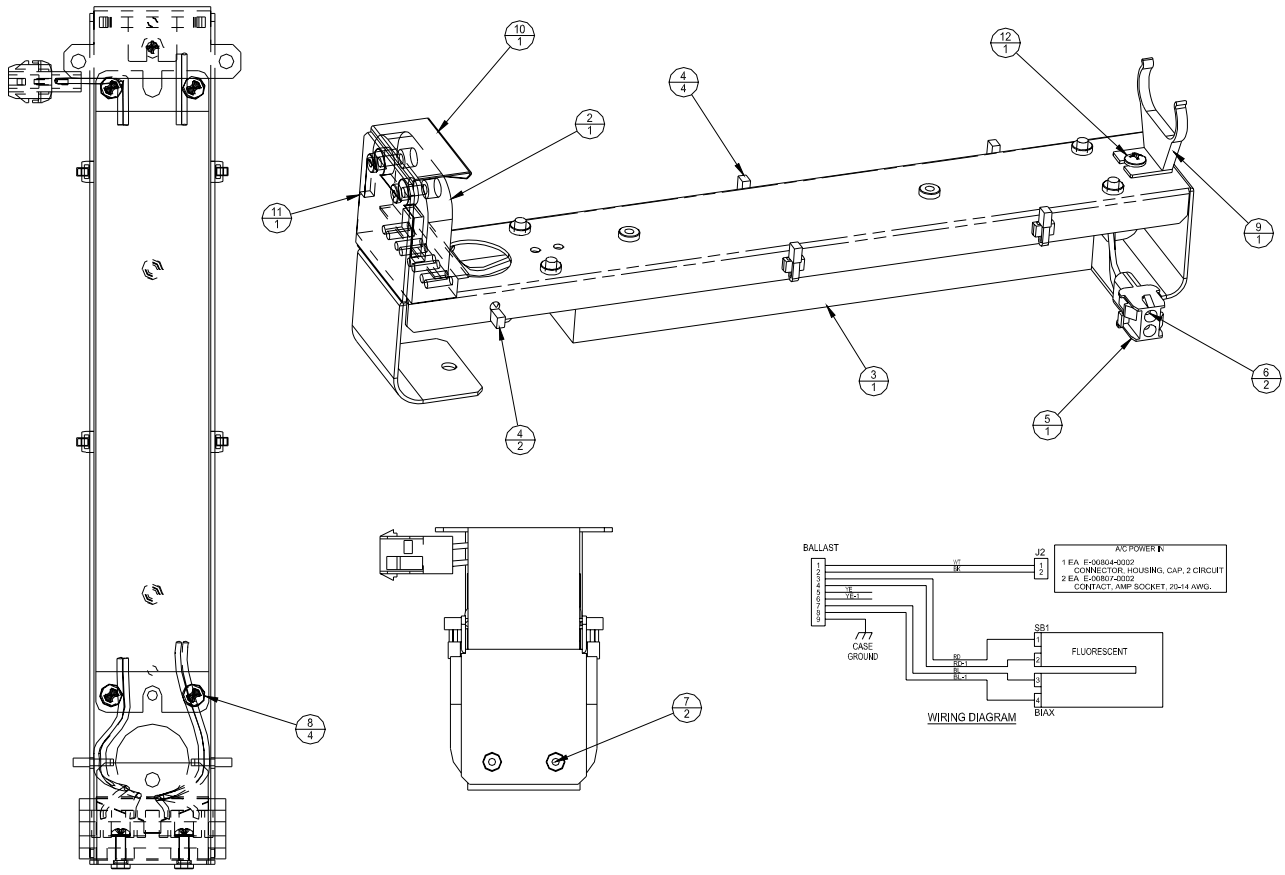

REF	PART #	DESCRIPTION	QTY
2	E-00120-0277	Base, Lamp, Twin	1
3	E-00409-0033	Ballast, Twin Lamp	1
4	E-00647-0004	Tie Wrap	6
5	E-00804-0002	Connector Housing Cap	1
6	E-00807-0002	Contact Socket, Amp 20-14 AWG	2
7	LSPP-00632-1106	Screw, Mach with Lock Phil Pan Hd	2

REF	PART #	DESCRIPTION	QTY
8	LSPP-00832-1106	Screw, Mach with Lock Phil Pan Hd	4
9	M-06004-0001	Clip, Lamp Support, Twin	1
10	P-09319-0752	Bulb Retainer	1
11	P-09319-0756	Light Bracket Assembly, Twin Lamp	1
12	TFPP-00832-1104	Screw, 8-32 x 1/4 Thd Form Phil Pan Hd	1

©2003 Bally Gaming and Systems

In the Money (Cont.) AS-08743-(SERIES)

Item 6 - Light Assembly, LP, 27W Dual Biax with Ballast AS-03210-0126

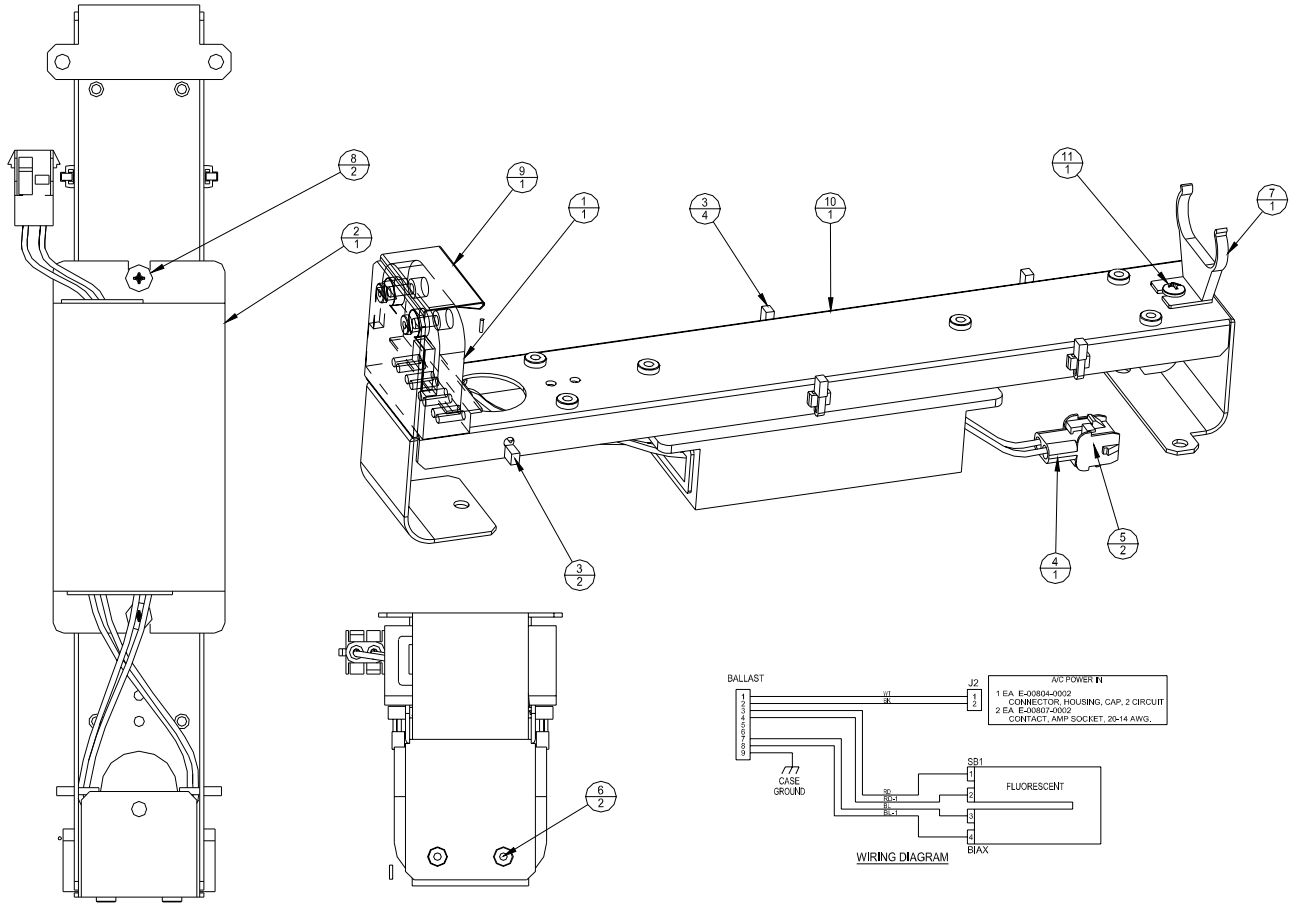

REF	PART #	DESCRIPTION	QTY
1	E-00120-0277	Base, Lamp, Twin	1
2	E-00409-0032	Ballast, Twin Lamp, 27W	1
3	E-00647-0004	Tie Wrap	6
4	E-00804-0002	Connector Housing Cap	1
5	E-00807-0002	Contact Socket, Amp 20-14 AWG	2
6	LSPP-00632-1106	Screw, Mach with Lock Phil Pan Hd	2
7	M-06004-0001	Clip, Lamp Support, Twin	1
8	MSPT-00832-1112	Screw, 8-32 x 3/4 Mach Phil Truss Hd	2

REF	PART #	DESCRIPTION	QTY
9	P-09319-0752	Bulb Retainer	1
10	P-09319-0756	Light Bracket Assembly, Twin Lamp	1
11	TFPP-00832-1104	Screw, 8-32 x 1/4 Thd Form Phil Pan Hd	1
12	WIP-ES202-1810	PVC, Solid, 18 AWG Red Type TEW	—
13	WIP-ES202-1820	PVC, Solid, 18 AWG, Blue Type TEW	—
14	WIP-ES202-1850	PVC, Solid, 18 AWG, White	—
15	WIP-ES202-1880	PVC, Solid, 18 AWG, Black	—

©2003 Bally Gaming and Systems

ProSlot® 6000

To Tell the Truth AS-02170-(SERIES)

AVAILABILITY:

PART #	DESCRIPTON
AS-02170-00P1	To Tell The Truth, Polished Chrome, 110V
AS-02170-01P1	To Tell The Truth, Polished Chrome, 220V

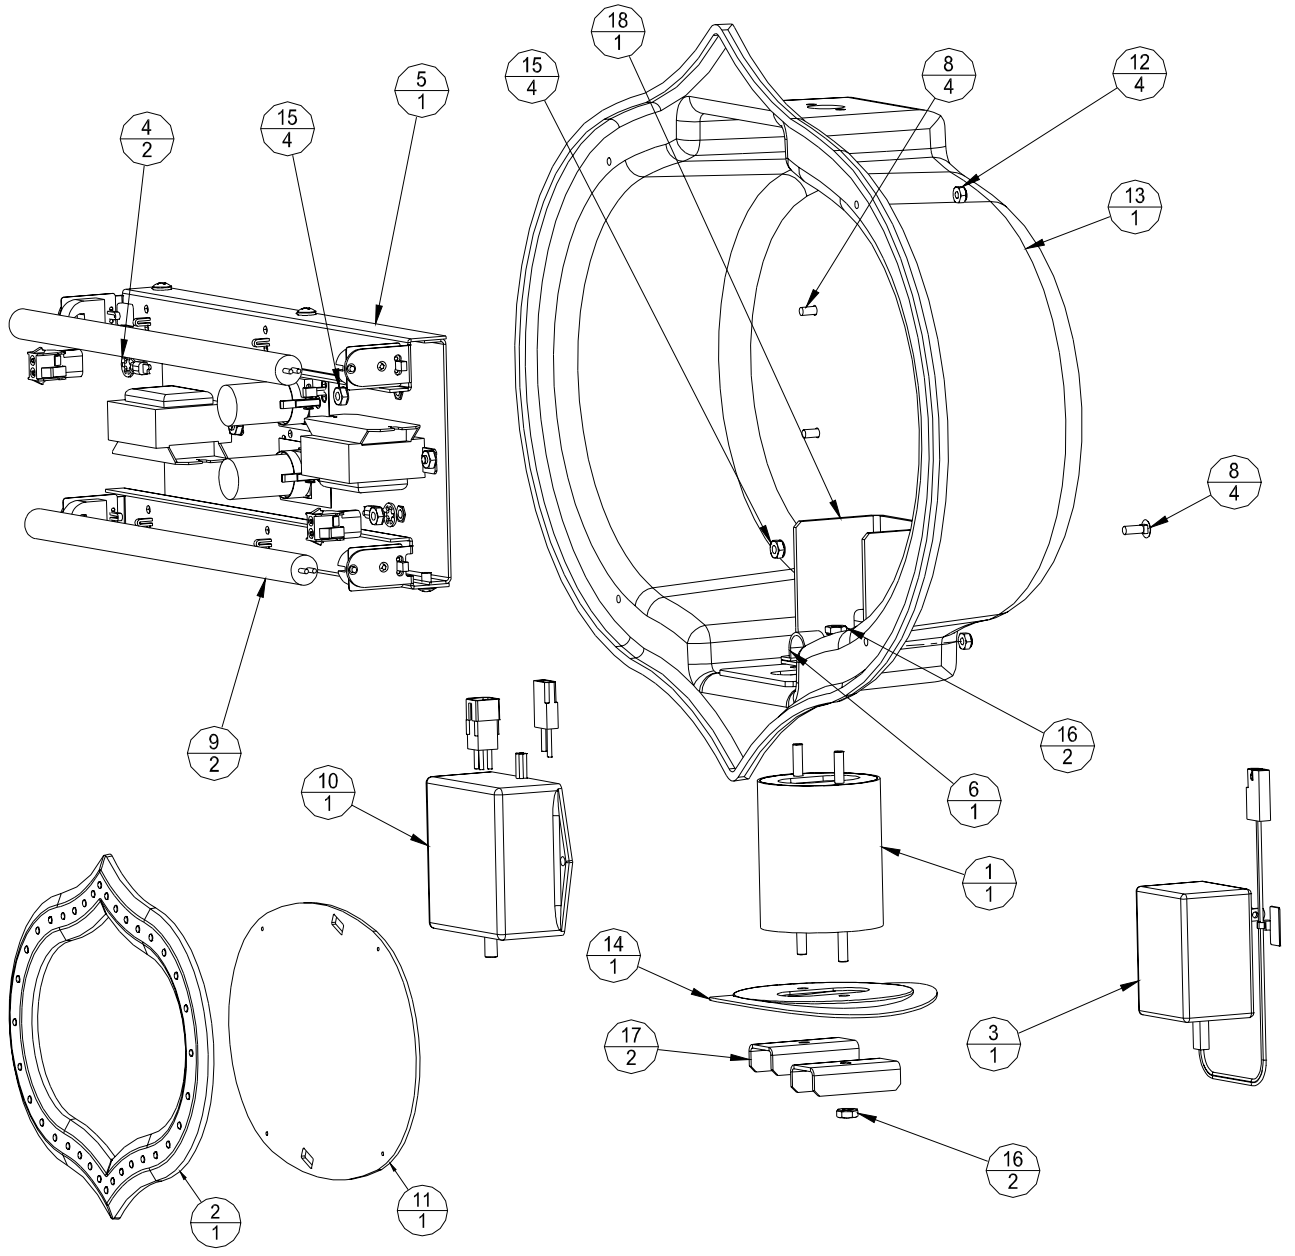

REF	PART #	DESCRIPTION	QTY
1	A-06727-0001	Mounting Bracket	1
2	AS-02171-SERIES	Bezel/Lens Assembly (page 3B-18)	1
3	AS-02982-0049	Power Assembly, 110VAC/14VAC, 700 mA (Page 3B-11)	1
4	AS-03106-0008	Ground Strap, 8 1/2-Inch (Page 3B-12)	2
5	AS-03210-0109	Fluorescent Lamp Assembly, Dual, 12-Inch (Page 3B-20)	1
6	C-00271-0009	Clip	1
7	CBL-30651-0001	Cable (Not Shown)	1
8	CBOR-00832-1808	#8 Carriage Bolt, 1/2-Inch Large	8

REF	PART #	DESCRIPTION	QTY
9	E-00412-0021	Lamp, Fluorescent, 11.5-Inch, 8W (Reference)	2
10	E-00664-0616	3 Lamp Sequencer	1
11	G-R0756	Glass, Marquee	1
12	M-00319-0006	Elastic Stop Nut (ESNA)	4
13	M-02109-0001	Housing, VAC Formed	1
14	M-03097-0009	Base, Tower Wide	1
15	NLS-00832-1112	Hex Nut	8
16	NLS-01032-1112	Hex Nut	4
17	P-09319-0675	Washer, Ribbed	2
18	P-09319-0676	Anti-Vibration Bracket	1

©2003 Bally Gaming and Systems

ProSlot® 6000

To Tell the Truth (Cont.)
AS-02170-(SERIES)

NOTE: See module 14, Schematics, for circuit board assemblies.

Item 2 - Bezel/Lens Assembly AS-02171-(SERIES)

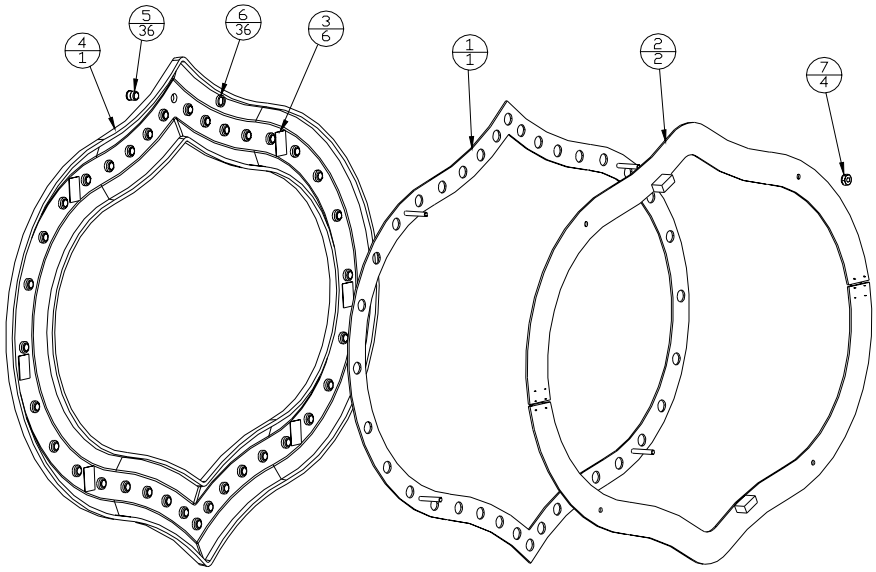

REF	PART #	DESCRIPTION	QTY
1	A-06726-0001	Plate, Bezel Attaching	1
2	AS-03356-0551	Circuit Board Assembly	2
3	M-01777-0314-1	Tape, VHB 4920, .5 W x .75 L	6
4	M-02106-SERIES	Bezel, Vac. Formed	1

REF	PART #	DESCRIPTION	QTY
5	M-02107-000C	Lens, 5MM LED, Clear	36
6	M-02108-0001	Retainer, LED Lens, 5MM	36
7	NLS-00632-1112	Hex Nut	4

Item 5 - Fluorescent Lamp Assembly, Dual, 12-Inch
AS-03210-0109

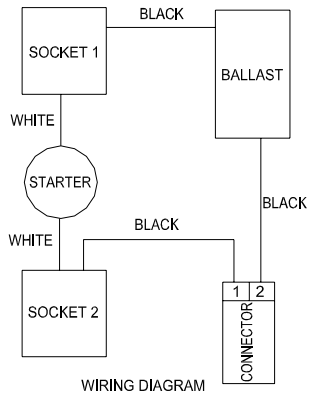

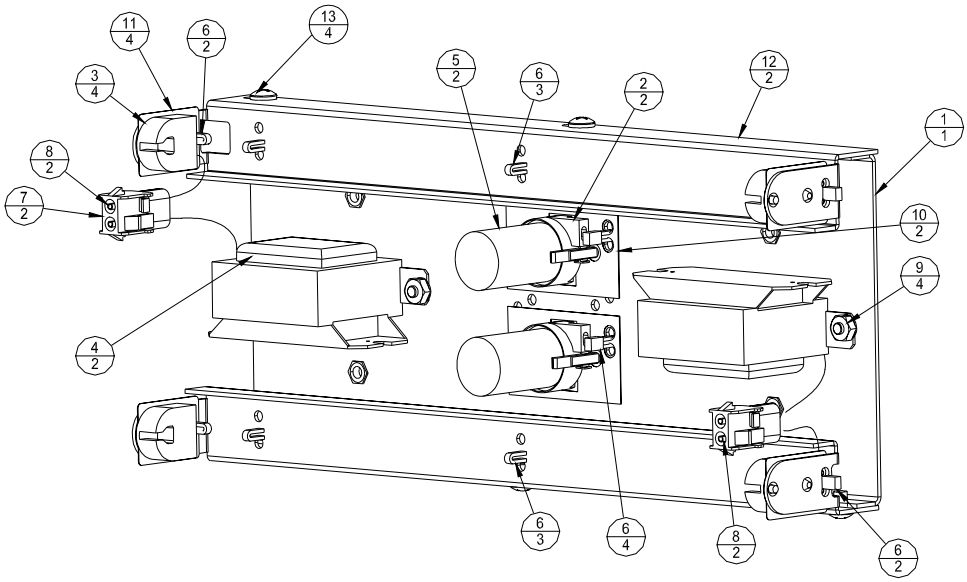

REF	PART #	DESCRIPTION	QTY
1	A-06728-0001	Lamp Mounting Bracket Assembly	1
2	E-00120-0265	Socket, Fluorescent Lamp Starter CE97	2
3	E-00120-0268	Socket, Fluorescent, 4V	4
4	E-00409-0022	Ballast, 120VAC, 8W, 60Hz	2
5	E-00411-0009	Starter, Fluorescent, FS-2	2
6	E-00647-0004	Tie Wrap	14
7	E-00804-0002	Connector Housing Cap	2
8	E-00807-0002	Contact Socket, Amp 20-14 Awg	4

REF	PART #	DESCRIPTION	QTY
9	NLS-00832-1112	Hex Nut	4
10	P-00150-0292	Insulator, Polycarbonate CE97	2
11	P-00150-0297	Insulator, 4W Socket	4
12	P-09322-0311	Reel Light Bracket, 12-Inch	2
13	TFPP-01032-1104	Screw, 10-32 1/4 Thd Form Phil Pan Hd	4
14	WIP-ES202-1850	PVC, Solid, 18 AWG, White	1
15	WIP-ES202-1880	PVC, Solid, 18 AWG, Black	1

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Oval AS-02172-(SERIES)

AVAILABILITY:

PART #	DESCRIPTON
AS-02172-00P1	Oval, Polished Chrome, 110V
AS-02172-01P1	Oval, Polished Chrome, 220V

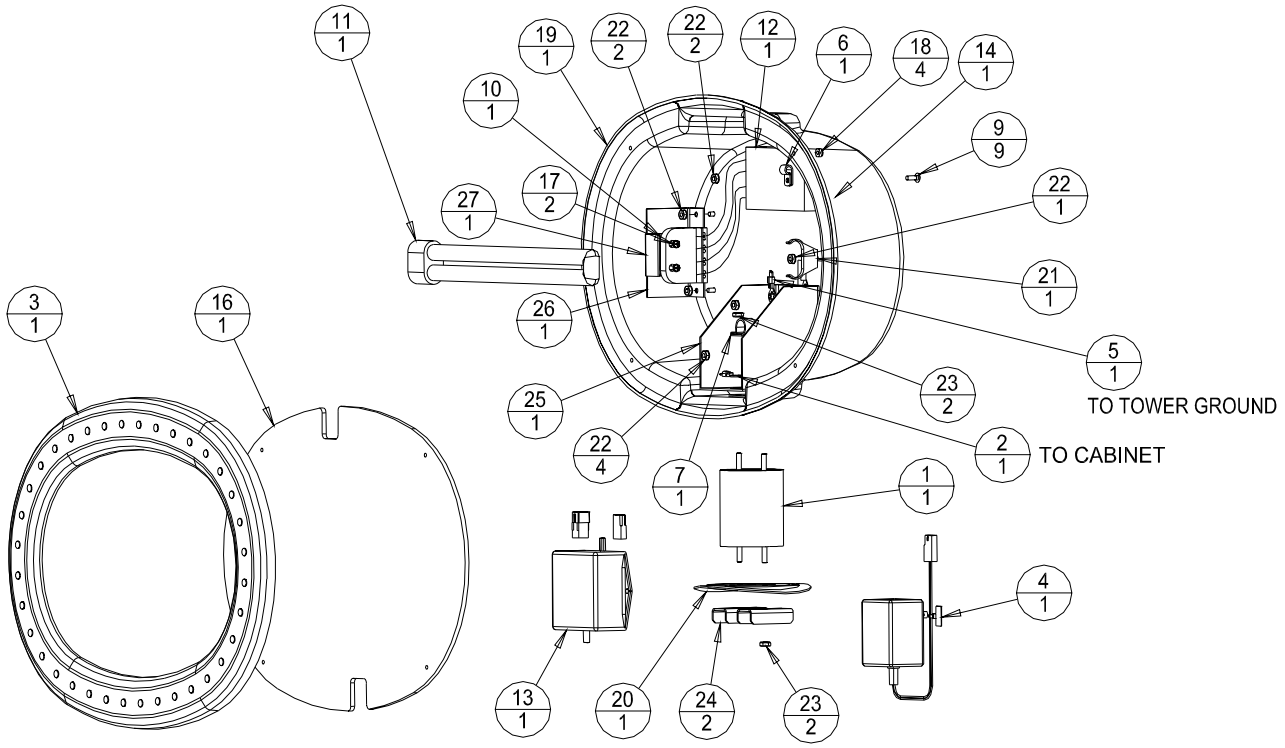

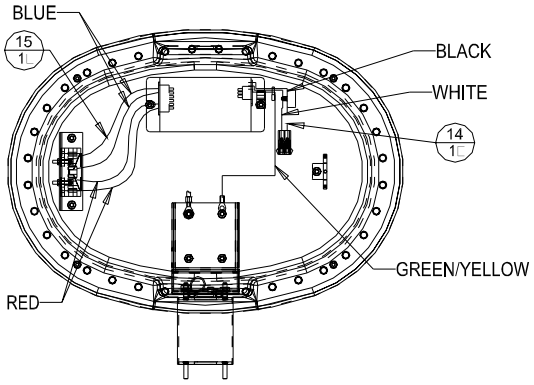

WIRING LAYOUT

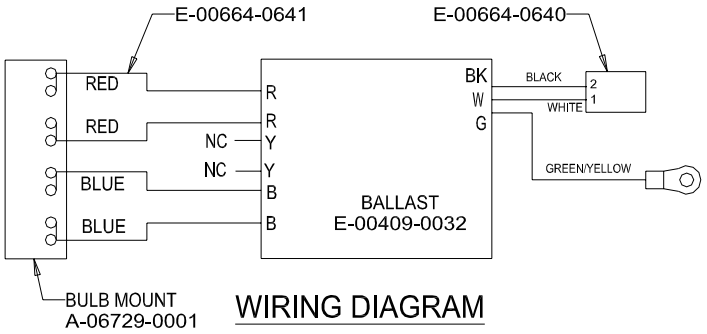

WIRING DIAGRAM

REF	PART #	DESCRIPTION	QTY
1	A-06727-0001	Mounting Bracket	1
2	AS-03106	Ground Strap, 18-Inch (page 3B-12)	1
3	AS-02173-SERIES	Bezel Assembly (page 3B-22)	1
4	AS-02982-0049	Power Supply, 110VAC/14VAC, 700mA (page 3B-11)	1
5	AS-03106-0004	Ground Strap, 12-Inch (page 3B-12)	1
6	C-00271-0004	Clip	1
7	C-00271-0009	Clip	1
8	CBL-30651-0001	Cable (Not Shown)	1
9	CBOR-00832-1808	#8 Carriage Bolt, 1/2-Inch Large	9
10	E-00120-0277	Base, Lamp, Twin	1
11	E-00128-0002	Lamp, Fluorescent, Twin	1
12	E-00409-0032	Ballast, Twin Lamp, 24W	1
13	E-00664-0616	3 Lamp Sequencer	1

REF	PART #	DESCRIPTION	QTY
14	E-00664-0640	Ballast Power Connector Assembly	1
15	E-00664-0641	Ballast/Lamp Cable Assembly	1
16	G-R0765	Plex, Oval	1
17	LSPP-00632-1112	Screw, Mach with Lock Phil Pan Hd.	2
18	M-00319-0006	Elastic Stop Nut (ESNA)	4
19	M-02109-0002	Housing, VAC Formed	1
20	M-03097-0009	Base, Tower Wide	1
21	M-06004-0001	Clip, Lamp Support, Twin	1
22	NLS-00832-1112	Hex Nut	9
23	NLS-01032-1112	Hex Nut	4
24	P-09319-0675	Washer, Ribbed	2
25	P-09319-0715	Bracket, Anti-Vibration	1
26	P-09319-0716	Lamp Base Mounting Plate	1
27	P-09319-0752	Bulb Retainer	1

| - Revised, || - New

©2003 Bally Gaming and Systems

Oval (Cont.) AS-02172-(SERIES)

Item 3 - Bezel Assembly AS-02173-(SERIES)

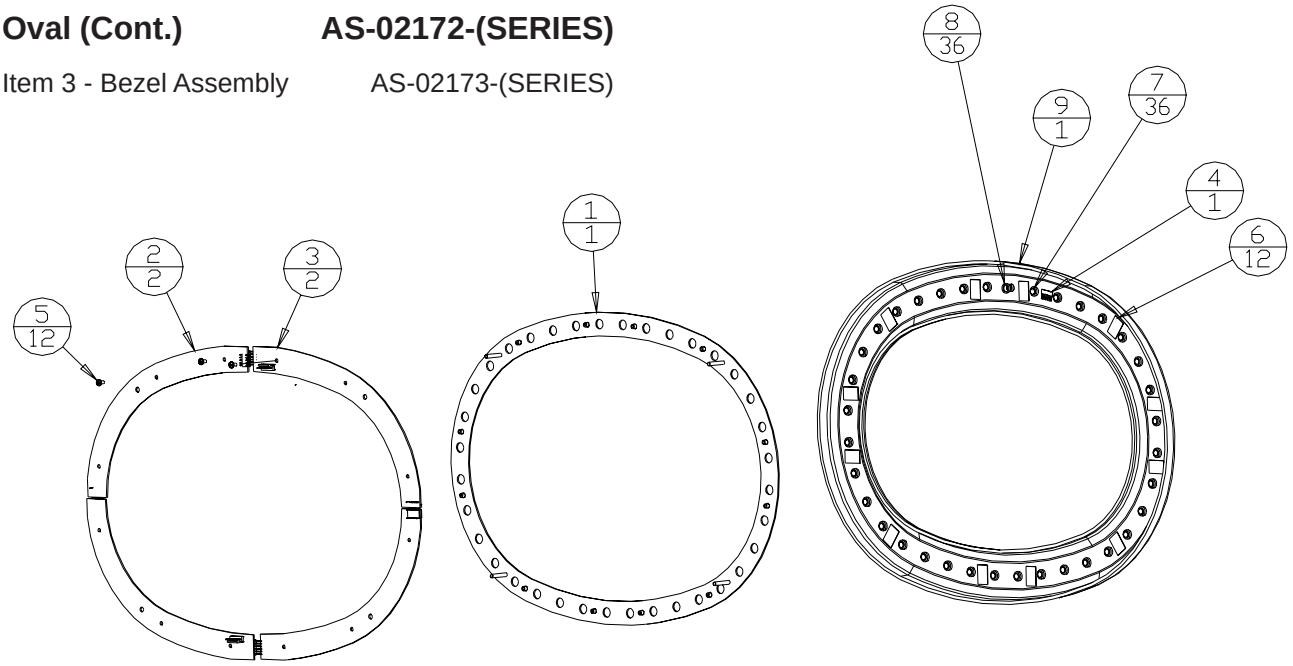

REF	PART #	DESCRIPTION	QTY
1	A-06733-0001	Bezel Attaching Plate	1
2	AS-03356-0592	Circuit Board Assembly	2
3	AS-03356-0593	Circuit Board Assembly	2
4	E-01143-0001	Anti-Static Strip	1
5	LSPP-00440-1104	Screw, Mach with Lock Phil Pan Hd	12

REF	PART #	DESCRIPTION	QTY
6	M-01777-0314-1	Tape, VHB 4920, .5 W x .75 L	12
7	M-02107-000C	Lens, 5 MM LED, Clear	36
8	M-02108-0001	Retainer, LED Lens, 5 MM	36
9	M-02113-SERIES	Bezel, Moled	1

NOTE: See module 14, Schematics, for circuit board assemblies.

©2003 Bally Gaming and Systems

ProSlot® 6000

Round AS-04942-(SERIES)

AVAILABILITY:

PART #	DESCRIPTON
AS-04942-00P1	Round, 110V
AS-04942-01P1	Round, 220V

NOTE: See module 14, Schematics, for circuit board assemblies.

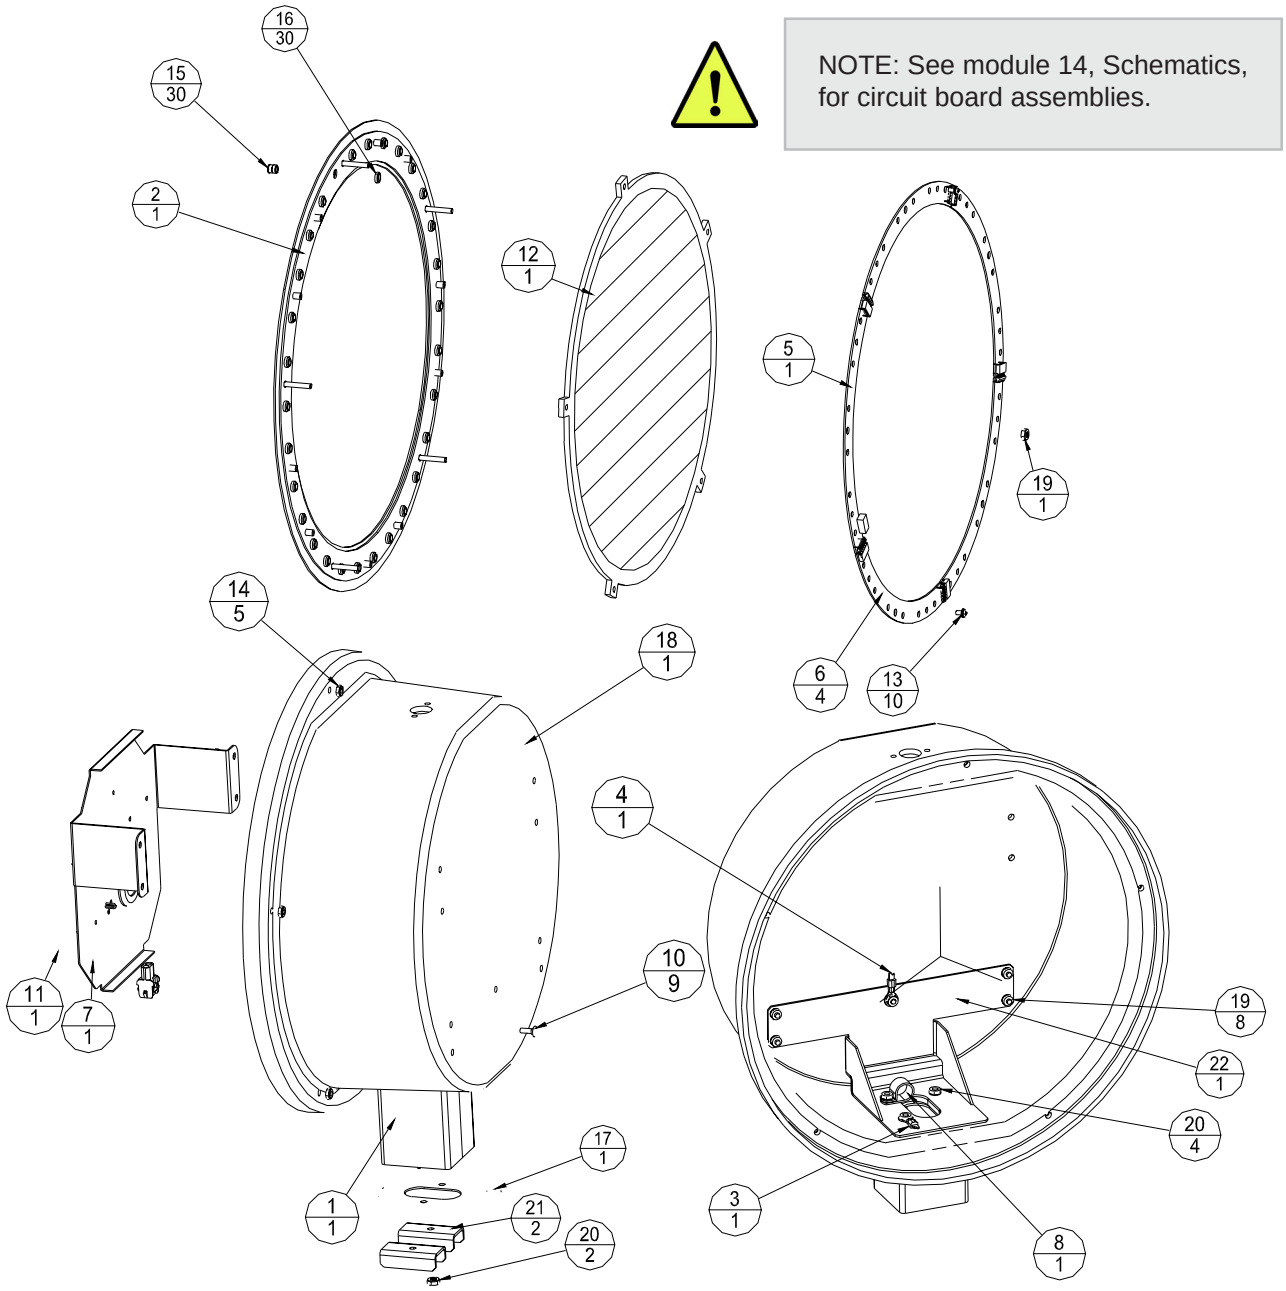

REF	PART #	DESCRIPTION	QTY
1	A-04933-0001	Mounting Bracket	1
2	A-04941-SERIES	Trim, Decorative	1
3	AS-03106	Ground Strap, 18-Inch (page 3B-12)	1
4	AS-03106-0004	Ground Strap, 12-Inch (page 3B-12)	1
5	AS-03356-0577	Power Printed Circuit Board Assembly, Round	1
6	AS-03356-0578	Printed Circuit Board Assembly, Round	4
7	AS-04930-0001	Light Bracket Assembly (page 3B-12)	1
8	C-00271-0009	Clip	1
9	CBL-30651-0001	Cable (Not Shown)	1
10	CBOR-00832-1808	#8 Carriage Bolt, 1/2-Inch Large	9
11	E-00412-0020	Lamp, Fluorescent, 8.25-Inch, Round	1

REF	PART #	DESCRIPTION	QTY
12	G-R0768	Glass, Raw	1
13	LSP-00632-1104	Screw, Mach with Lock Phil Pan Hd.	10
14	M-00319-0002	Elastic Stop Nut (ESNA)	5
15	M-02107-000C	Lens, 5mm LED, Clear	30
16	M-02108-0001	Retainer, LED Lens, 5mm	30
17	M-03097-0009	Base, Tower Wide	1
18	M-03125-0002	Housing, Raw	1
19	NLS-00832-1112	Hex Nut	9
20	NLS-01032-1112	Hex Nut	6
21	P-09319-0675	Washer, Ribbed	2
22	P-09319-0695	Anti-Vibration Bracket	1

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Rectangle AS-04943-(SERIES)

AVAILABILITY:

PART #	DESCRIPTON
AS-04943-00P1	Rectangle
AS-04943-20P4	Rectangle, Monte Carlo

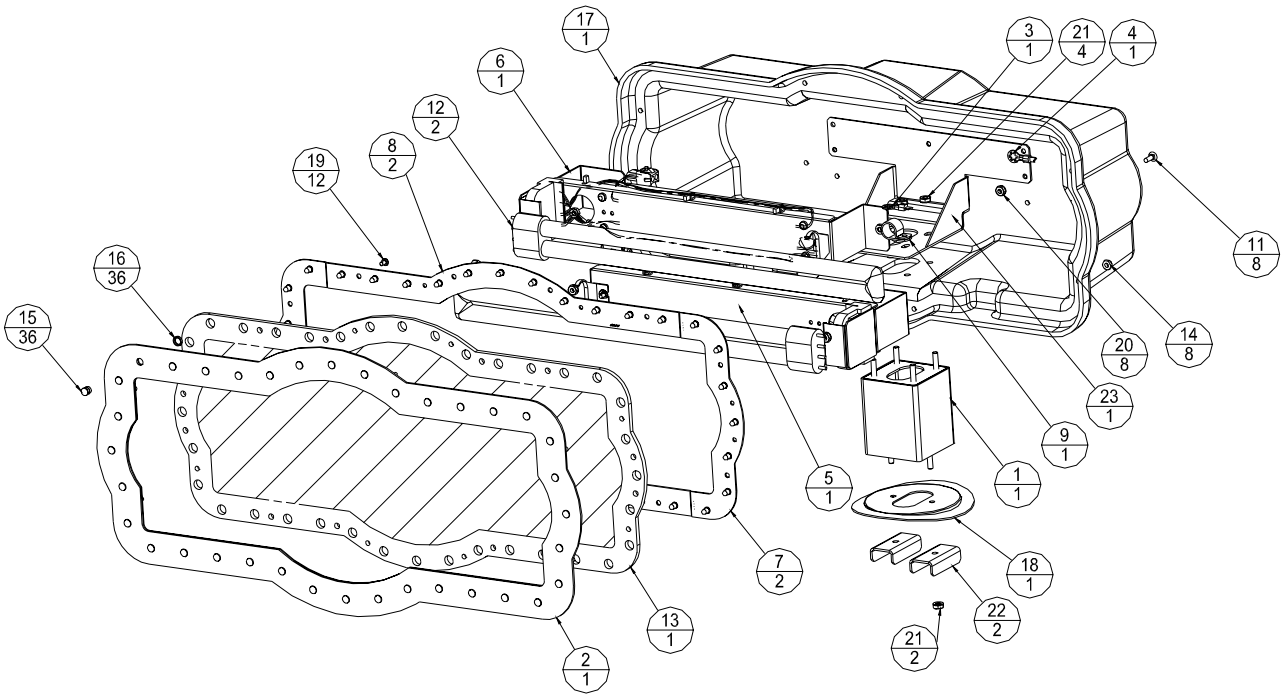

REF	PART #	DESCRIPTION	QTY
1	AS-04933-0001	Mounting Bracket	1
2	A-04943-SERIES	Trim Housing Assembly	1
3	AS-03106-0001	Ground Strap, 24-Inch (page 3B-12)	1
4	AS-03106-0008	Ground Strap, 8 1/2-Inch (page 3B-12)	1
5	AS-03210-0112	Light Assembly, Dual Biax, No Ballast (page 3B-6)	1
6	AS-03210-0113	Light Assembly, Dual 39W Biax with Ballast (page 3B-25)	1
7	AS-03356-0580	Printed Circuit Board, Long	2
8	AS-03356-0581	Printed Circuit Board, Short	2
9	C-00271-0009	Clip	1
10	CBL-30651-0001	Cable (Not Shown)	1
11	CBOR-00832-1808	#8 Carriage Bolt, 1/2-Inch Large	8
12	E-00128-0001	Lamp, Fluorescent, Twin	2

REF	PART #	DESCRIPTION	QTY
13	G-R0766	Glass, Raw	1
14	M-00319-0002	Elastic Stop Nut (ESNA)	8
15	M-02107-000B	Lens, 5mm LED, Blue	36
16	M-02108-0001	Retainer, LED Lens, 5mm	36
17	M-02109-0003	Housing, Marquee	1
18	M-03097-0009	Base, Tower Wide	1
19	MSPP-00632-1104	Screw, Mach Phil Pan Hd.	12
20	NLS-00832-1112	Hex Nut	8
21	NLS-01032-1112	Hex Nut	6
22	P-09319-0675	Washer, Ribbed	2
23	P-09319-0695	Anti-Vibration Bracket	1

©2003 Bally Gaming and Systems

ProSlot® 6000

Rectangle (Cont.) AS-04943-(SERIES)

Item 6 - Light Assembly, Dual 39W Biax with Ballast
AS-03210-0113

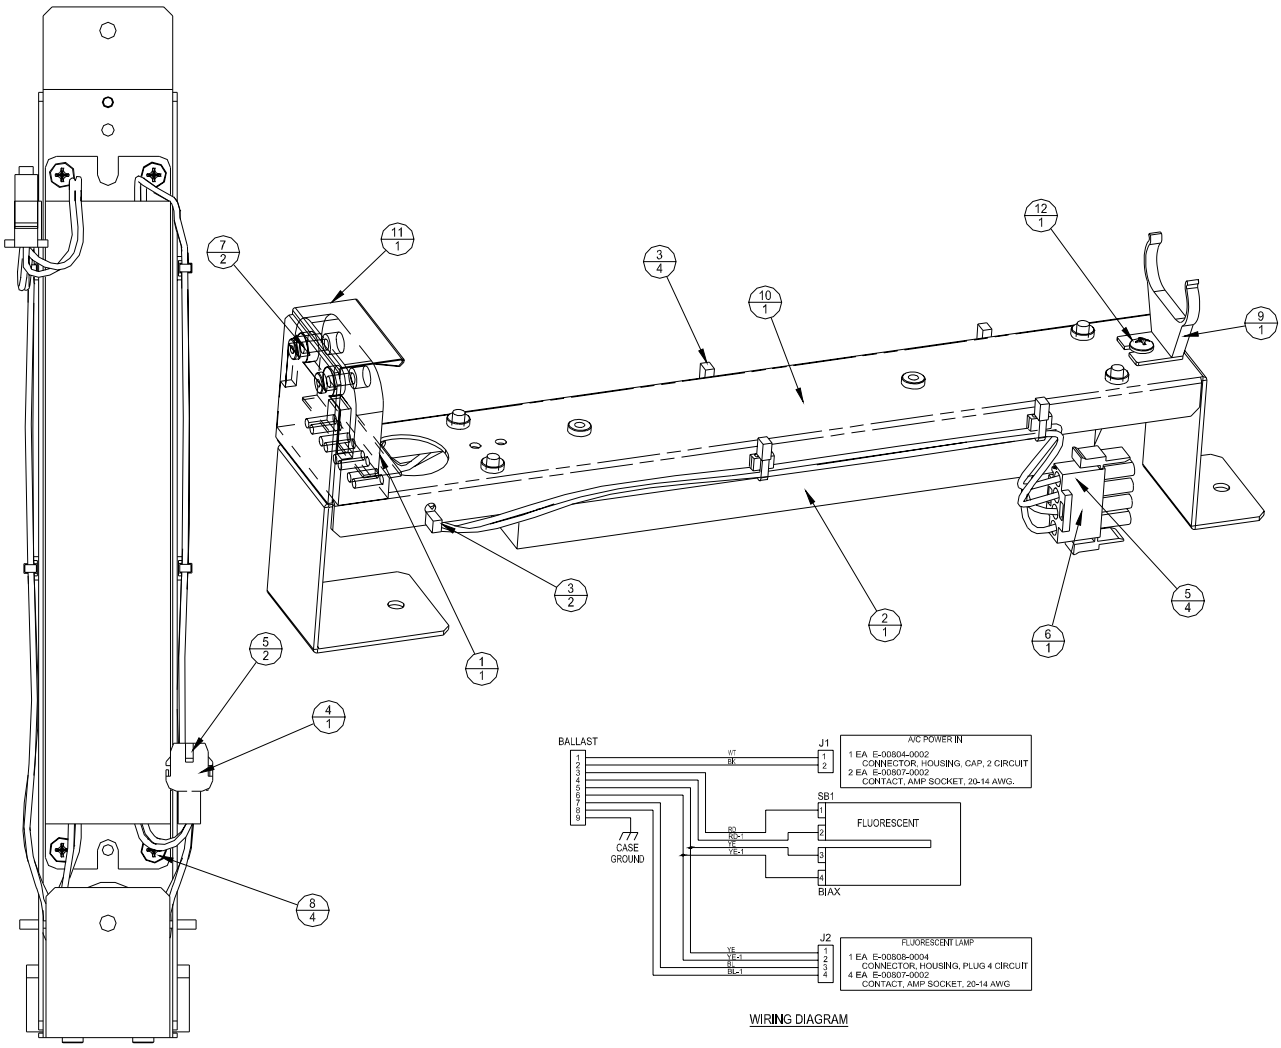

WIRING DIAGRAM

REF	PART #	DESCRIPTION	QTY
1	E-00120-0277	Lamp Base, Twin	1
2	E-00409-0033	Ballast, Twin Lamp	1
3	E-00647-0004	Tie Wrap	6
4	E-00804-0002	Connector Housing Cap	1
5	E-00807-0002	Contact Socket, Amp 20-14 AWG	6
6	E-00808-0004	Connector Housing Plug	1

REF	PART #	DESCRIPTION	QTY
7	LSPP-00632-1106	Screw, Mach with Lock Phil Pan Hd	2
8	LSPP-00832-1106	Screw, Mach with Lock Phil Pan Hd	4
9	M-06004-0001	Clip, Lamp Support, Twin	1
10	P-09319-0694	Light Bracket Assembly, Twin Lamp	1
11	P-09319-0752	Bulb Retainer	1
12	TFPP-00832-1104	Screw, 8-32 x 1/4 Thd Form Phil Pan Hd	1

©2003 Bally Gaming and Systems

ProSlot® 6000

Diamond AS-04952-(SERIES)

AVAILABILITY:

PART #	DESCRIPTON
AS-04952-00P1	Diamond, 110V
AS-04952-01P1	Diamond, 220V

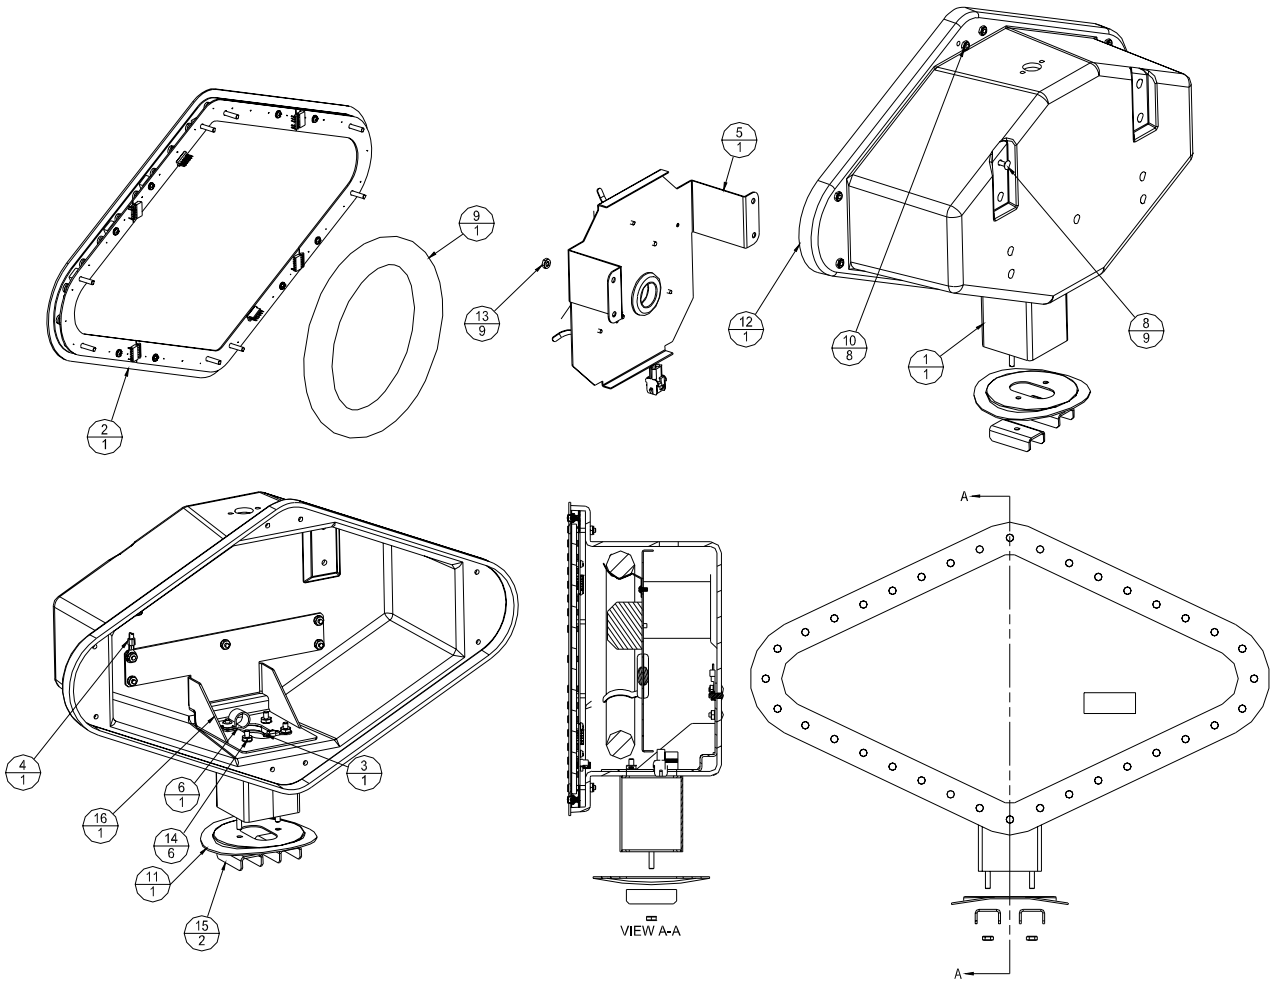

REF	PART #	DESCRIPTION	QTY
1	A-04933-0001	Mounting Bracket	1
2	A-04955-SERIES	Glass Bezel Assembly, PCB Diamond	1
3	AS-03106-0001	Ground Strap, 24-Inch (page 3B-12)	1
4	AS-03106-0004	Ground Strap, 12-Inch (page 3B-12)	1
5	AS-04930-0001	Light Bracket Assembly (page 3B-12)	1
6	C-00271-0008	Clip	1
7	CBL-30651-0001	Cable (Not Shown)	1
8	CBOR-00832-1808	#8 Carriage Bolt, 1/2-Inch Large	9

REF	PART #	DESCRIPTION	QTY
9	E-00412-0020	Lamp, Fluorescent, 8-25-Inch Round	1
10	M-00319-0002	Elastic, Stop Nut (ESNA)	8
11	M-03097-0009	Base, Tower Wide	1
12	M-03125-0005	Housing, Diamond Shape	1
13	NLS-00832-1112	Hex Nut	9
14	NLS-01032-1112	Hex Nut	6
15	P-09319-0675	Washer, Ribbed	2
16	[-09319-0695	Anti-Vibration Bracket	1

©2003 Bally Gaming and Systems

ProSlot® 6000

Star AS-04932-(SERIES)

AVAILABILITY:

PART #	DESCRIPTON
AS-04932-00P1	Star, Polished Chrome, 110V
AS-04932-00P4	Star, Polished Gold, 110V
AS-04932-01P1	Star, Polished Chrome, 220V

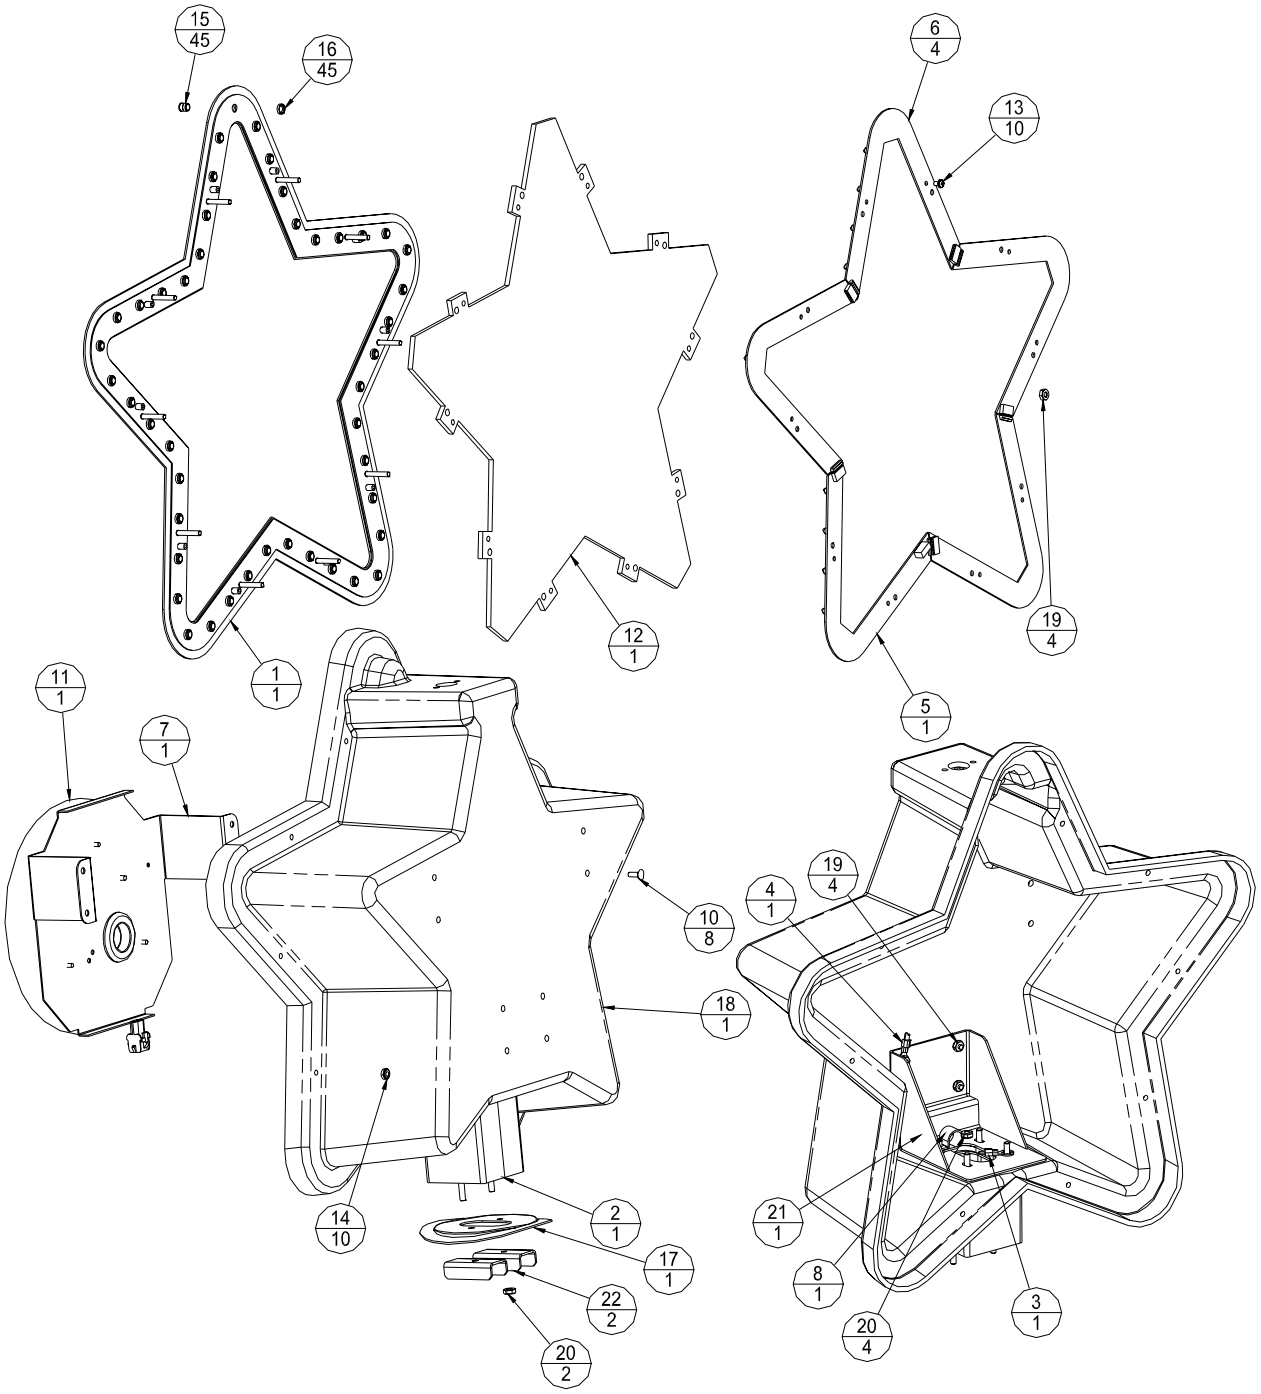

| - Revised, || - New

©2003 Bally Gaming and Systems

Star (Cont.) AS-04932-(SERIES)

NOTE: See module 14, Schematics, for circuit board assemblies.

REF	PART #	DESCRIPTION	QTY
1	A-04931-SERIES	Star Housing Trim Assembly	1
2	A-04933-0001	Mounting Bracket	1
3	AS-03106-0001	Ground Strap, 24-Inch (page 3B-12)	1
4	AS-03106-0004	Ground Strap, 12-Inch (page 3B-12)	1
5	AS-03356-0557	Star Power Circuit Board Assembly	1
6	AS-03356-0558	Star Circuit Board Assembly	4
7	AS-04930-0001	Light Bracket Assembly (page 3B-12)	1
8	C-00271-0009	Clip	1
9	CBL-30651-0001	Cable (Not Shown)	1
10	CBOR-00832-1808	#8 Carriage Bolt, 1/2-Inch Large	8
11	E-00412-0020	Lamp, Fluorescent, 8.25-Inch, Round	1

REF	PART #	DESCRIPTION	QTY
12	G-R0759	Glass, Marquee	1
13	LSPP-00632-1104	Screw, Mach with Lock Phil Pan Hd.	10
14	M-00319-0002	Elastic Stop Nut (ESNA)	10
15	M-02107-000C	Lens, 5mm LED, Clear	45
16	M-02108-0001	Retainer, LED Lens, 5mm	45
17	M-03097-0009	Base, Tower Wide	1
18	M-03125-0001	Star Plastic Housing	1
19	NLS-00832-1112	Hex Nut	8
20	NLS-01032-1112	Hex Nut	6
21	P-04932-0002	Anti-Vibration Bracket	1
22	P-09319-0675	Washer, Ribbed	2

LEGEND		
PART NUMBER	ITEM 1 STAR TRIM	ITEM 7 LIGHT ASSY
AS-04932-00P1	A-04931-00P1	AS-04930-0001
AS-04932-00P4	A-04931-00P4	AS-04930-0001
AS-04932-01P1	A-04931-00P1	AS-04930-0003
AS-04932-01P4	A-04931-00P4	AS-04930-0003

©2003 Bally Gaming and Systems

Bally GAMING • SYSTEMS®

ProSlot® 6000

MODULE 3

MK3-S6MOD-0004

ASSEMBLIES, PARTS AND HARDWARE

Bally Gaming and Systems

©2003 BALLY GAMING, INC. ALL RIGHTS RESERVED

6601 South Bermuda Road, Las Vegas, NV 89119

For Customer Service and information, call or FAX:
1-877-GO-BALLY (877-462-2559) in the U.S. and Canada
+1-702-896-7772 outside the U.S.
896-7772 in Las Vegas
FAX: +1-702-896-7710
or visit our website at http://www.ballygaming.com

Module 3 - Assemblies, Parts and Hardware
Table of Contents

ProSlot® 6000 3-6

Locks and Cams 3-6
Second Key Switch/Shipping Locks M-00281-(SERIES) 3-6
Lock Requirements P-00758-(SERIES) 3-6
Circuit Boards AS-03356-(SERIES) 3-6
Programmable Devices and Batteries 3-7
Cables 3-7
Coin Head Back Plates C-0411X-(SERIES) 3-8
Optic Board Mounting Block M-01755-(SERIES) 3-8
Denomination Change Kits K-00811-(SERIES) 3-9
XS1200 Hopper Coin-Specific Parts 3-9
Asahi Seiko Hopper Coin-Specific Parts 3-9
Coin Acceptor Selections E-00887-(SERIES) 3-10
Coin Mechanisms, Inc. RFI CC-16 E-00887-02XX 3-10
Coin Mechanisms, Inc. IC-16 E-00887-1XXX 3-10
Coin Controls, Inc. Condor E-00887-2XXX 3-11
Coin Mechanisms, Inc. MC-16 E-00887-6XXX 3-12
IDX E-X(SERIES) 3-12
Bill Acceptor Selections E-011XX-(SERIES) 3-13
JCM WBA E-01100-(SERIES) 3-13
GPT E-01120-(SERIES) 3-13
ARDAC E-01124-(SERIES) 3-13
MARS E-21100-(SERIES) 3-14
Coin Acceptor Kit K-00674-(SERIES) 3-14
Backplate with Coin Tray AS-05998-(SERIES) 3-15
Backplate No Coin Tray, Stainless Steel AS-06610-0001 3-16
Cabinet Assembly 3-17
Feature Glass Retaining Bracket, Non Extended C-06001-0001 3-17
Cabinet Power Cable AS-03025-0152 3-18
Hopper Cable AS-03025-0153 3-19
Starter/Ballast Assembly, 60HZ. AS-02335-(SERIES) 3-19
Starter/Ballast, 50HZ., CE97 AS-03335-0012 3-20
Card Rack/Backplane AS-06604-(SERIES) 3-20
Card Rack Door/MPU Board AS-06605-(SERIES) 3-21
MPU Board/Power Supply/PDU AS-04238-(SERIES) 3-22
Feature Glass Spring Stop Bracket P-06004-0026 3-22
Feature Glass Retainer Spring P-06005-0001 3-22
Transformer E-00122-(SERIES) 3-23
Convenience Outlet AS-03268-(SERIES) 3-25
Line Cord Assembly E-00126-(SERIES) 3-26
Bell and Receptacle E-00664-0466 3-26
Speaker E-00281-(SERIES) 3-27
Illumination E-00125-(SERIES) / E-0041X-(SERIES) 3-27
Tower Lens Cover Selection M-02100-(SERIES) 3-27
Tower Selections TWRX-(SERIES) 3-28
Meter Assembly AS-04225-(SERIES) 3-30

©2003 Bally Gaming and Systems

Module 3 - Assemblies, Parts and Hardware
Table of Contents (cont.)

Hopper Assembly AS-06793-(SERIES) 3-31
Handle Assembly AS-02303-(SERIES) 3-31
Handle Mechanism Assembly AS-02301-0028 3-31
Reel Mechanism AS-04716-(SERIES) 3-33
Reel Drive/Motor AS-04235-(SERIES) 3-33
Reel Support, Cable and Bracket AS-04703-(SERIES) 3-34

Door Assembly 3-35

Door AS-06607-(SERIES) 3-35
Belly Door Assembly A-36510-(SERIES) 3-37
Door Lock Assembly A-16510-(SERIES) 3-37
Door Deck P-06510-(SERIES) 3-38
Door Stop Cable, 14 3/4” Large M-01777-5410 3-39
Happ Switch, Large, Round AS-04753-0016 3-39
Happ Switch, No Legend BH-04XXX-(SERIES) 3-39
Legend Plate Kit K-01500-(SERIES) 3-40
Coin Panel Assembly AS-03210-(SERIES) 3-41
Coin Exit Chute P-09382-(SERIES) 3-43
Bill Acceptor Cover Plate Kit K-00694-(SERIES) 3-43
Coin Glide P-09327-0001 3-43
Bill Acceptor Housing JCM/MARS/ARDAC AS-06602-0005 3-44
Win Meter Lower Display AS-03360-0029 3-44
Win Meter Light Shield M-06001-0003 3-44
Display Board with Hit/Run Connector AS-03356-0525 3-45
Light Assembly AS-03361-(SERIES) 3-45

System Panels P-08600-(SERIES) 3-47

ProSlant® 6000 / 6000E 6-59

Hopper Escalator, Seiko AS-031XX-(SERIES) 3-59

Coin Acceptor Assembly AS-05035-(SERIES) 3-61

Coin Acceptor Assembly AS-05189-(SERIES) 3-62

Drop Chute A-04380-(SERIES) 3-63

Bill Acceptor Housing/Frame AS-06603-(SERIES) 3-63

Coin Bucket NDC2060 M-03107-0001 3-63

Cabinet Assembly 3-69

Cabinet Assembly ASXX-X79XX-XXXX 3-70
Cabinet Assembly AS-08752-(SERIES) 3-71
Arm Rest CA-03407-(SERIES) 3-72
Arm Rest A-05201-0001 3-73
Cabinet Cable Power AS-03025-(SERIES) 3-73
Starter/Ballast Assembly AS-03335-(SERIES) 3-75
Card Rack/Backplane AS-06604-(SERIES) 3-77
MPU Board/Tray AS-06605-(SERIES) 3-78
Transformer, 220 VAC, 50/60 Hz. E-00122-0246 3-79
Speaker Panel AS-05031-(SERIES) 3-80
Speaker E-00281-(SERIES) 3-80
Meter Assembly AS-04225-(SERIES) 3-81
Reel Mechanism Assembly AS-04716-(SERIES) 3-82
Reel Support, Cable and Bracket AS-04703-(SERIES) 3-83

Module 3 - Assemblies, Parts and Hardware
Table of Contents (cont.)

Door Assembly **3-84**
Front Door Assembly AS-04189-(SERIES) 3-84
Front Door Assembly AS-08750-0002 3-84
Door Switch E-00108-(SERIES) 3-85
Deck/Hatch AS-07920-(SERIES) 3-85
Deck/Hatch AS-08759-(SERIES) 3-85
Five Button Deck (Player Panel) AS-08757-05XX 3-86
Happ Switch, Square AS-0457X-(SERIES) 3-86
Light Assembly AS-02360-(SERIES) 3-87
System Panels A-044XX-(SERIES) / P-08600-FFXX **3-90**
Part Number Structure **3-94**
ProSlot® 6000 and ProSlant® 6000 / 6000E Model Number **3-95**
Appendix A Lock and Cams **3-96**

| - Revised, || - New
©2003 Bally Gaming and Systems

Locks and Cams

Key switches, MPU and feature (slant) locks are installed at the factory. Cams are provided for the other locks that the Operator must purchase.

Single or dual lock configurations are possible.

All lock openings are $^{5}/_{8}$" (1.59cm) by $^{3}/_{4}$" (1.91cm). The locks are 90 degree rotation. The keys should be removable only in the locked position.

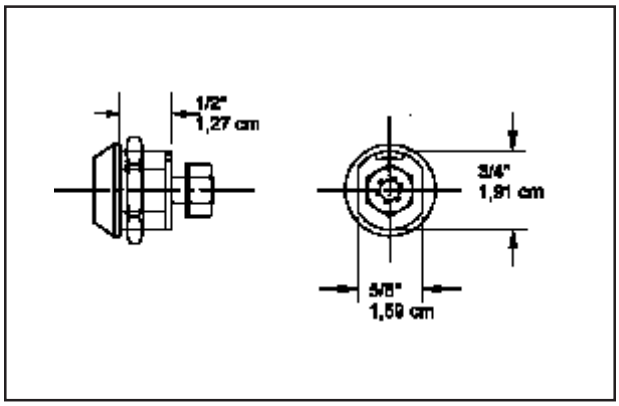

Locks $1^{1}/_{8}$" (2.86cm) long can be used with spacers to maintain the $^{1}/_{2}$" (1.27cm) lock length.

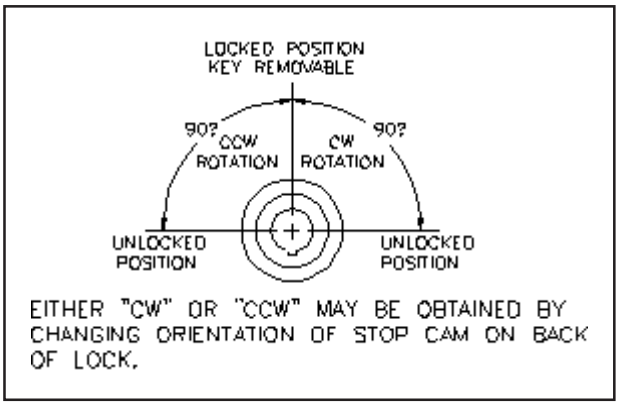

Second Key Switch/Shipping Locks M-00281-(SERIES)

☑Upright / ☑Slant / ☑S6E

PART #	DESCRIPTION	WHERE USED	UP	SL	S6E
M-00281-0040	Lock, Door, Random Key	Shipping Lock	X	X	X
M-00281-0171	Switch, Locking Reset (#2341)	Second Key Switch or Audit	X	X	X
M-00281-0172	Switch, Locking Reset (#X000010)	Second Key Switch or Audit	X	X	X
M-00281-158C	Switch, Locking Reset (#X000001)	Audit key switch	X	X	X

NOTE: Illustrations of cams are provided in Appendix A.

Lock Requirements P-00758-(SERIES)

☑Upright / ☑Slant / ☑S6E

LOCATION	HARDWARE	PART #	UP	SL	S6E
Main Door	Single Lock Cam	P-00758-0093	X		X
	Single Lock Cam (Puerto Rico)	P00758-0173 Best®	X		
	Dual Locks	QTY 2	X		
	Single Lock Cam	P-00758-0116		X	
		P-00758-0117		X	
	Dual locks add	P-00758-0118		X	
Belly Door	Single Lock Cam	P-00758-0151	X		
	Single Lock Cam (Puerto Rico)	P-00758-0162 Best®	X		
	Dual Locks	P-00758-0157	X		
Drop Door	Single Lock Cam	P-00758-0181		X	X
	Dual Locks	QTY 2		X	X
Stacker Access Door	Single Lock Cam	P-00758-0094		X	
		P-00758-0155	X		X
	Single Lock Cam (Puerto Rico)	P-00758-0161 Best®	X		
	Dual Locks	P-00758-0094	X	X	
Bill Acceptor Hatch	Cam	P-00758-0189		X	
	Cam	P-00758-0202			X
Bill Acceptor Stacker	Lock, No Cam	M-00281-162A		X	X
	Two cams provided by JCM #0943PT0504	P-00758-0152	X		
	(Puerto Rico)	P-00758-0163 Best®	X		
	Two cams provided by JCM #0943PT0504	P-00758-0180		X	
MPU Board/Tray*	Lock, key 52593	M-00281-162A		X	X
	Cam	P-00758-0094	X		
	Cam	P-00758-0183		X	X
Audit Key Switch* (Jackpot)	Key Switch, Key X000001	M-00281-158C	X	X	X
	Key Switch, Key H2341	M-00281-162A	X	X	X
Data Tracking System*	Lock, Key 52593	M-00281-162A	X	X	X
	Cam	P-06434-0001	X		
	Cam	P-00758-0137		X	X
Roll the Dice Door	Cam	P-00758-0164		X	
Feature Glass	Cam	P-00758-0101		X	
Top Box	Cam (OLGC)	P-00758-0188		X	
	Cam	P-00758-0201			X
Top Box Radial, Inner*	Cam	P-00758-0143		X	
Top Box Radial, Outer*	Cam	P-00758-0144		X	

Items marked with an asteric (*) indicate factory installed parts.

Circuit Boards AS-03356-(SERIES)

☑Upright / ☑Slant / ☑S6E

PART #	DESCRIPTION	LOCATION	UP	SL	S6E
AS-03356-0454	Bill Exit Light Board	Bill Acceptor		X	X
AS-03356-0431	Led Board, JCM WBA		X	X	X
AS-03356-0423	Backplane Board	Cabinet		X	
AS-03356-0445	Backplane Board		X		
AS-03356-0643	Backplane Board				X
AS-03356-0428	Door Optic Detector Board		X	X	X
AS-03356-0609	Meter Detect Board, 5 Meter		X	X	
AS-03356-0438	MPU Board	Card Rack / MPU	X	X	
AS-03356-0424	MPU Board		X	X	X
AS-03356-0478	MPU Board Data Vault™ (France)		X	X	
AS-03356-0303	Coin Optic Decoder 2 Board	Coin Acceptor	X	X	X
AS-03356-0525	Display Board with Hit & Run Connector	Door	X	X	
AS-03356-0623	Display Board with Hit & Run Connector, Left		X		X
AS-03356-0427	Door Optic Emitter Board		X	X	X
AS-03356-0624	Auxiliary 4-Digit Display Board	Feature Light	X		
AS-03356-0368	Hopper Controller Board FET, Dual Optic	Hopper	X	X	
AS-03356-0466	Data Vault™ Memory Board (France)	Logic	X	X	
AS-03356-0205	Reel Drive Board	Reel Mechanism	X	X	X
AS-03356-0362	Deluxe Sound Board	Sound Board	X	X	
AS-03356-0512	Pro Sound 2 Board		X	X	X
AS-03356-0108	Communication Interface Board (Delaware)	Systems / Communication	X	X	
AS-03356-0197	EPROM UIB with Piggyback Board		X	X	
AS-03356-0463	Flash UIB with Piggyback Board		X	X	
AS-03356-0185	LSAMS Fiber Optic Board			X	
AS-03356-0465	Message Center VFD, 16-Digit, 4-Inch		X	X	

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Circuit Boards (Cont.) AS-03356-(SERIES)

☑Upright / ☑Slant / ☑S6E

PART #	DESCRIPTION	LOCATION	UP	SL	S6E
AS-03356-0524	Display Board, Horse Play	Top Box	X		
AS-03356-0584	Board #1, Conehead Topper	Topper	X		
AS-03356-0585	Board #2, Conehead Topper		X		
AS-03356-0586	Board #3, Conehead Topper		X		
AS-03356-0587	Board #4, Conehead Topper		X		
AS-03356-0588	Board #5, Conehead Topper		X		
AS-03356-0589	Board #6, Conehead Topper		X		
AS-03356-0621	LED Board with Power Connector, Diamond		X		
AS-03356-0622	LED Board, Diamond		X		
AS-03356-0578	LED Board, Round Topper		X		
AS-03356-0577	LED Power Board, Round Topper		X		
AS-03356-0580	Long Board, Rectangle Topper		X		
AS-03356-0551	Marquee Board, To Tell The Truth		X		
AS-03356-0592	PCB-A, Generic Oval Topper		X		
AS-03356-0593	PCB-B, Generic Oval Topper		X		
AS-03356-0557	Power Board, Movie Star Marquee		X		
AS-03356-0581	Short Board, Rectangle Topper		X		
AS-03356-0558	Star Board, Movie Star Marquee		X		

Programmable Devices and Batteries

☑Upright / ☑Slant / ☑S6E

PART #	DESCRIPTION	WHERE USED	UP	SL	S6E
E-00867-0035	(BLANK) EPROM, IC, 32K X 8, 120NS	Personality	X	X	X
E-00867-0037	(Blank) EPROM, IC, 1meg, 128K X 8, 80NS	JCM WBA Bill Acceptor	X	X	X
E-00867-0038	(Blank) EPROM, IC, 1 Meg, 128K, 120NS	Personality	X	X	X
E-00867-0039	(Blank) EPROM, IC, 2 Meg, 256K X 8, 220NS	Personality	X	X	X
E-00867-0042	(Blank) EPROM, CMOS, 64K X 8, 120NS	Personality			X
E-00867-0045	(Blank) EPROM, IC, 4 Meg, 512K X 8, 120NS	Mains	X	X	X
E-00867-0046	(Blank) EPROM, IC, 8 Meg, 1M X 8, 120NS	AS-03356-0362 Deluxe Sound Board	X	X	X
S6S1000CLE04-03	SafeRAM™ Clear	U28, U43	X	X	X
E-01056-0015	Programmed Controller, 16F84, PRF-001	AS -03356-0339 Hopper Controller Board*		X	X
E-01056-0018	Programmed Controller, 16F84, FET-003	AS -03356-0368 Hopper Controller Board	X	X	X
E-01056-0022	Programmed Controller, 16F84, PRF-001	AS -03356-0339 Hopper Controller Board*	X		
E-01091-0004	Programmed Cod Micro-Controller, PIC16C54, V5.1	AS -03356-0303 COD Board	X	X	X
E-00628-0023	Battery, Lithium (3.6V @ 1800 MAH)	Batt1	X	X	X
E-00882	Jumper	Jwxx	X	X	X
E-00620-0673	IC, Dallas Smart Socket DS1213D	U30, U45	X	X	X
*Items marked with an asteric indicate obsolete items.					

Cables

☑Upright / ☑Slant / ☑S6E

PART #	DESCRIPTION	LOCATION	UP	SL	S6E
CBL-20214-0001	Bill Acceptor Door	Bill Acceptor	X		X
CBL-30244-0001	Bill Acceptor Door Switch			X	
CBL-30349-0001	Bill Acceptor Switches, GPT			X	
CBL-30380-0001	Bill Acceptor, Ardac			X	
CBL-30381-0001	Bill Acceptor, Ardac		X		
CBL-20187-0001	Bill Acceptor, GPT		X		
CBL-30238-0001	Bill Acceptor, GPT		X		
CBL-30235-0001	Bill Acceptor, JCM WBA-10/20		X		
CBL-30302-0001	Bill Acceptor, Mars		X		
CBL-30305-0001	Bill Acceptor, Mars			X	X
CBL-30637-0001	Bill Acceptor, WBA -12/13/23/25		X		
CBL-30638-0001	Bill Acceptor, WBA -12/13/23/25			X	
CBL-30638-0002	Bill Acceptor, WBA -12/13/23/25				X
CBL-20188-0001	Bill Box Connector, GPT		X	X	
CBL-30420-0001	Diode Isolation Bill Acceptor Door, WBA /Ardac		X	X	
CBL-30405-0001	Diode Isolation Bill Doors, GPT		X	X	

WARNING: Attempting to recharge Lithium batteries can cause them to explode. Replace failed batteries with Bally part E-00628-0023 or its equivalent.

PART #	DESCRIPTION	LOCATION	UP	SL	S6E
CBL-30350-0001	GPT Bill Acceptor	Bill Acceptor		X	
CBL-30252-0001	JCM WBA -10/20			X	
CBL-30406-0001	Universal System Signals		X		
CBL-30431-0001	Universal System Signals			X	
CBL-20292-0001	120v Adapter	Cabinet		X	
CBL-30532-0001	Auxiliary A/C Adaptor, 3way		X	X	X
CBL-20249-0001	Backplane Interconnect		X	X	X
CBL-30255-0001	Cabinet Power			X	
CBL-30475-0001	Cabinet Power		X		
CBL-30712-0001	Cabinet Power				X
CBL-30234-0001	Cabinet Signal		X		
CBL-30478-0001	Cabinet Signal			X	
CBL-30713-0001	Cabinet Signal				X
CBL-30669-0001	Cabinet Signal (Switzerland)			X	
CBL-30668-0001	Cabinet, Signal (Switzerland)		X		
CBL-30680-0001	Door, With Removable Deck		X		
CBL-30377-0001	Light Panel Feature Round			X	
CBL-20386-0001	Meter Detect Board (Switzerland)		X	X	
CBL-20275-0001	MPU Door Switch (South Africa)		X	X	
CBL-30469-0001	PDU, CE97, Fused		X	X	
CBL-30180-0001	Power Supply CE97		X	X	X
CBL-30471-0001	COD/CC-16	Coin Acceptor	X		
CBL-20410-0001	Coin Acceptor Defender			X	X
CBL-20295-0001	Coin Acceptor Interface MC-16		X		
CBL-20211-0001	Coin Acceptor, Condor/IDX			X	
CBL-30472-0001	Coin I/O			X	X
CBL-30471-0002	Coin I/O, COD/ IDX /Condor		X		
CBL-20307-0001	MC-16 Interface			X	
CBL-30735-0001	3x3 Coin/Line Led Board	Feature Light	X		
CBL-30348-0001	8-Coin Multiplier Lamps		X	X	
CBL-30691-0001	9/10 Coin/Line Led Board		X		
CBL-20138-0001	Blazing 7's, 2nd Chance		X	X	
CBL-20139-0001	Blazing 7's, 2nd Chance, 3-Coin		X	X	
CBL-30182-0001	Bonus Savvy		X	X	
CBL-20042-0001	Coin Light, 2b		X	X	
CBL-20013-0001	Coin Light, 2b Or 2m		X	X	
CBL-30230-0001	Coin Light, 2-Button, 3's A Charm		X	X	
CBL-20016-0001	Coin Light, 2m		X	X	
CBL-20014-0001	Coin Light, 3b		X		
CBL-20170-0001	Coin Light, 3b, Trailblazer		X	X	
CBL-20134-0001	Coin Light, 3cb		X	X	
CBL-20012-0001	Coin Light, 3m		X	X	
CBL-20015-0001	Coin Light, 3m/3b		X	X	
CBL-20017-0001	Coin Light, 3u		X	X	
CBL-20033-0001	Coin Light, 3u, Fire & Ice		X	X	
CBL-20037-0001	Coin Light, 6m		X	X	
CBL-20179-0001	Coin Light, 7m		X		
CBL-20259-0001	Deck, 7.5v, Retrofit		X		
CBL-20048-0001	Feature Light, 3u		X	X	
CBL-20082-0001	Feature Light, 5cm		X	X	
CBL-20278-0001	Feature Light, 6m		X		
CBL-30002-0001	Feature Light, Jumping Joker		X	X	
CBL-20000-0001	Firecracker Extension		X	X	
CBL-20287-0001	Game Controlled Savvy		X		
CBL-20195-0001	Over The Top Special		X	X	
CBL-20058-0001	Reg.14, Mikohn		X	X	
CBL-20339-0001	Vertical Led Display		X		
CBL-30476-0001	Hopper	Hopper	X		
CBL-30476-0002	Hopper			X	X
CBL-20065-0001	Hopper, Dual Probe		X	X	
CBL-30100-0001	Hopper, Super/Standard		X		
CBL-30019-0001	Seiko Hopper			X	
CBL-20277-0001	Data Vault™ (France)	Logic	X	X	
CBL-30473-0001	Deck Button	Player Panel		X	
CBL-30715-0001	Deck				X
CBL-30719-0001	Deck, 5-Button				X

| - Revised, || - New

©2003 Bally Gaming and Systems

Cables (Cont.)

☑Upright / ☑Slant / ☑S6E

	PART #	DESCRIPTION	LOCATION	UP	SL	S6E
‖	CBL-30710-0001	Deck, 5-Button (United Kingdom)	Player Panel	X		
‖	CBL-30775-0001	Deck, 6-Button (United Kingdom)		X		
‖	CBL-30681-0001	Deck, 7-Button (United Kingdom)		X		
‖	CBL-30250-0001	Upper Reel Light			X	
‖	CBL-30201-0001	3-Reel	Reel Mechanism	X		
‖	CBL-30253-0001	3-Reel			X	
‖	CBL-30709-0001	3-Reel				X
‖	CBL-30387-0001	4-Reel			X	
‖	CBL-30202-0001	4-Reel		X		
	CBL-20189-0001	Reel Control Board		X	X	X
	CBL-30531-0001	Deluxe Pro Sound 2	Sound Board	X	X	
	CBL-30347-0001	Deluxe Sound		X	X	
‖	CBL-20397-0001	Pro Sound 2				X
‖	CBL-30375-0001	Sound Board Feature Round			X	
	CBL-906616	4-Pole Lock-Out Assembly, J1	Systems / Communication	X	X	
	CBL-205378	4-Pole Lock-Out, J3, Game		X	X	
	CBL-20274-0001	Belly Door Switch (OLGC)		X		
‖	CBL-30631-0001	Card Reader, SCI		X		
‖	CBL-30047-0001	Door Bell (USAF)		X		
‖	CBL-30470-0001	Door Button		X		
‖	CBL-30356-0001	Door Buzzer (Delaware)		X		
‖	CBL-30357-0001	Door Buzzer (Delaware)			X	
	CBL-20077-0001	Door Open Meter (Puerto Rico)		X		
	CBL-20299-0001	Door Panel Light		X		
‖	CBL-30309-0001	Feature Housing Light			X	
	CBL-20227-0001	Knock-Down		X	X	X
	CBL-205521	Loss Limit To 4-Pole		X	X	
	CBL-20284-0046	LSAMS Power			X	
	CBL-20283-0046	LSAMS, 46-Inch			X	
‖	CBL-20050-0046	LSAMS, 46-Inch Large		X		
	CBL-20047-0001	Meter Detect Jumper (France)		X	X	
	CBL-00426-0060	Ribbon Assembly, 26 Cir.60-Inch		X		
‖	CBL-00426-0070	Ribbon Assembly, 26 Cir.70-Inch			X	
	CBL-30583-0001	Rs232 PC Communication Data Vault™			X	
	CBL-20261-0001	Rs422 Interface			X	
	CBL-20273-0001	Second Key Switch Extension (OLGC)		X		
	CBL-20271-0001	Serial Link (Detroit)		X	X	
‖	CBL-30311-0001	Signal, Feature Housing			X	
	CBL-20234-0001	System Interface		X	X	
	CBL-20095-0001	Tower Extension		X	X	
‖	CBL-20020-0001	Tower Extension		X	X	
‖	CBL-30267-0001	UIB Communication		X		
‖	CBL-30386-0001	UIB Communication			X	
	CBL-20257-0001	Door Panel Light With Printer	Ticket Printer		X	
‖	CBL-30249-0001	Lower Reel Light			X	
	CBL-20302-0001	Seiko Printer			X	
‖	CBL-20398-0001	Seiko Printer				X
‖	CBL-30720-0001	10x2 Lamp, SNL	Top Box	X		
‖	CBL-30530-0001	Betty Boop World Tour Top Box		X		
‖	CBL-30393-0001	Extended Top, 2 Light		X		
‖	CBL-30651-0001	Led Top Box		X		
‖	CBL-20404-0001	Playboy Bunny X Frenzy		X		
‖	CBL-20361-0001	Power Lamps & Fan, Playboy		X		
‖	CBL-20415-0001	SNL, Multi-Lamp		X		
‖	CBL-20368-0001	Top Box Fluorescent				X
‖	CBL-30643-0001	Top Box Light				X
‖	CBL-30507-0001	Top Box Power Adapter, 110V To 220V		X		
	CBL-20045-0001	4-Tier Tower	Tower	X		
‖	CBL-20153-0001	4-Tier Tower Interface			X	X
‖	CBL-20290-0001	Tower 4-Tier, BB/BR			X	
‖	CBL-20151-0001	Tower Lamp Interface			X	X
‖	CBL-20152-0001	Tower Lamp Selector			X	X

Coin Head Back Plates C-0411X-(SERIES)

☑Upright / ☑Slant / ☑S6E

CHROME	GOLD	WIDTH		DEPTH		UP	SL	S6E
		IN	MM	IN	MM			
C-04110-1001	C-04110-4001	0.740	18.796	0.065	1.651	X		
C-04110-1002	C-04110-4002	0.780	19.812	0.090	2.286	X	X	
C-04110-1003	C-04110-4003	0.800	20.320	0.090	2.286	X	X	X
C-04110-1004	C-04110-4004	0.830	21.082	0.090	2.286	X	X	X
C-04110-1005	C-04110-4005	0.860	21.844	0.090	2.286	X	X	X
C-04110-1006	C-04110-4006	0.890	22.606	0.090	2.286	X	X	X
C-04110-1007	C-04110-4007	0.940	23.876	0.090	2.286	X	X	X
C-04110-1008	C-04110-4008	0.980	24.892	0.090	2.286	X	X	X
C-04110-1009	C-04110-4009	1.020	25.908	0.090	2.286	X	X	X
C-04110-1010	C-04110-4010	1.050	26.670	0.090	2.286	X	X	X
C-04110-1011	C-04110-4011	1.070	27.178	0.090	2.286	X	X	X
C-04110-1012	C-04110-4012	1.090	27.686	0.090	2.286	X	X	X
C-04110-1017	C-04110-4017	1.120	28.448	0.090	2.286	X		X
C-04110-1013	C-04110-4013	1.140	28.956	0.090	2.286	X	X	X
C-04110-1014	C-04110-4014	1.180	29.972	0.090	2.286	X	X	X
C-04110-1015	C-04110-4015	1.210	30.734	0.090	2.286	X	X	X
C-04110-1016	C-04110-4016	1.240	31.496	0.090	2.286	X	X	X
‖ C-04110-1018	C-04110-4018	1.290	32.766	0.090	2.286	X	X	

CHROME	GOLD	WIDTH		DEPTH		UP	SL	S6E
		IN	MM	IN	MM			
‖ C-04111-1001	C-04111-4001	1.290	32.766	0.160	4.064	X		
‖ C-04111-1002	C-04111-4002	1.330	33.782	0.160	4.064	X		
‖ C-04111-1003	C-04111-4003	1.370	34.798	0.160	4.064	X	X	X
‖ C-04111-1004	C-04111-4004	1.410	35.814	0.160	4.064	X	X	X
‖ C-04111-1005	C-04111-4005	1.500	38.100	0.160	4.064	X		
‖ C-04111-1006	C-04111-4006	1.530	38.862	0.160	4.064	X	X	X
‖ C-04111-1007	C-04111-4007	1.570	39.878	0.160	4.064	X	X	
‖ C-04111-1008	C-04111-4008	1.630	41.402	0.160	4.064	X		
‖ C-04111-1009	C-04111-4009	1.680	42.672	0.160	4.064	X	X	X
‖ C-04111-1010	C-04111-4010	1.740	44.196	0.160	4.064	X	X	
‖ C-04111-1011	C-04111-4011	1.790	45.466	0.160	4.064	X	X	X
‖ C-04111-1012	C-04111-4012	1.900	48.260	0.160	4.064	X	X	X

CHROME	GOLD	WIDTH		DEPTH		UP	SL	S6E
		IN	MM	IN	MM			
‖ C-04112-1001	C-04112-4001	0.840	21.336	0.150	3.810		X	X
‖ C-04112-1002	C-04112-4002	0.930	23.622	0.150	3.810		X	X
‖ C-04112-1003	C-04112-4003	0.940	23.876	0.150	3.810	X		
‖ C-04112-1013	C-04112-4013	0.980	24.892	0.150	3.810	X	X	X
‖ C-04112-1004	C-04112-4004	1.020	25.908	0.150	3.810	X	X	X
‖ C-04112-1005	C-04112-4005	1.040	26.416	0.150	3.810		X	X
‖ C-04112-1007	C-04112-4007	1.080	27.432	0.150	3.810		X	X
‖ C-04112-1008	C-04112-4008	1.100	27.940	0.150	3.810	X		
‖ C-04112-1009	C-04112-4009	1.140	28.956	0.150	3.810	X	X	X
‖ C-04112-1010	C-04112-4010	1.160	29.464	0.150	3.810	X		
‖ C-04112-1011	C-04112-4011	1.240	31.496	0.150	3.810	X	X	X
‖ C-04112-1012	C-04112-4012	1.260	32.004	0.150	3.810		X	

Optic Board Mounting Block M-01755-(SERIES)

☑Upright / ☑Slant / ☑S6E

PART #	DESCRIPTION	DIAMETER		THICKNESS		UP	SL	S6E
		IN	MM	IN	MM			
| M-01755-0952	5¢, 10FF	1.075	24.892	0.120	3.048		X	X
M-01755-0946	5¢, 10FF	1.075	27.305	0.120	3.048	X		
‖ M-01755-0983	10¢, 1R	0.980	24.892	0.120	3.048			X
| M-01755-0978	10¢	0.980	24.892	0.120	3.048		X	X
M-01755-0965	10¢	0.980	24.892	0.120	3.048	X		
| M-01755-0949	25¢	1.187	30.150	0.120	3.048		X	X
M-01755-0945	25¢	1.187	30.150	0.120	3.048	X		
| M-01755-0950	50¢, 2/5F	1.320	33.528	0.120	3.048		X	X
M-01755-0947	50¢, 2/5FF	1.320	33.528	0.120	3.048	X		
M-01755-0963	$1(Australia)	1.187	30.150	0.165	4.191	X		
M-01755-0943	$1, 50FF	1.610	40.894	0.165	4.191	X		
| M-01755-0951	$1, 50FF	1.610	40.894	0.165	4.191		X	X
M-01755-0989	$5, Condor	1.880	47.752	0.165	4.191	X		
M-01755-0944	$5/$10/$100	1.850	46.990	0.165	4.191	X		
| M-01755-0953	$5/$10/$100	1.850	46.990	0.165	4.191		X	X
M-01755-0948	$25 Token	2.000	50.800	0.165	4.191	X		
| M-01755-0954	$25 Token	2.000	50.800	0.165	4.191		X	X
‖ M-01755-0979	$25, IDX	1.875	47.625	0.125	3.175	X		

| - Revised, ‖ - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Denomination Change Kits K-00811-(SERIES)

☑Upright / ☑Slant / ☑S6E

Parts needed to change the coin denomination accepted by the ProSlot® 6000 and the ProSlant® 6000 are available in kits. Each kit contains the necessary coin entry and hopper parts for the XS1200 hopper. Kits for slant machines using the Asahi Seiko hopper include a replacement hopper configured for the correct coin. Refer to the following matrix for kit numbers:

Upright		TO			
		5¢	25¢	$1	$5
From	5¢		K-00811-0041	K-00811-0043	K-00811-0047
	25¢	K-00811-0042		K-00811-0043	K-00811-0047
	$1	K-00811-0046	K-00811-0044		K-00811-0048
	$5	K-00811-0049	K-00811-0050	K-00811-0051	

Slant		TO			
		5¢	25¢	50¢	$1
From	5¢		K-00811-0141	K-00811-0149	K-00811-0143
	25¢	K-00811-0142			K-00811-0143
	$1	K-00811-0146	K-00811-0144		

XS1200 Hopper Coin-Specific Parts

☑Upright

DIMENSIONS			HOPPER	HOPPER WITH MIXER	BACK PLATE	BRACKET, COIN HEAD CLAMP	COIN GUIDE	OPTIC BOARD MOUNTING BLOCK	COIN ACCEPTOR	MOUNTING BRACKET	COIN KNIFE
COIN	DIAMETER	THICKNESS									
10¢	0.705" (17.90 MM)	0.053" (1.35 MM)	None	None	C-04110-1001	P-09319-0299	P-09319-0200	M-01755-0965	E-00887-0209	P-06004-0037	M-03068-0006
1¢	0.750" (19.05 MM)	0.062" (1.57 MM)	None	None	C-04110-1003	P-09319-0299	P-09319-0200	M-01755-0965	E-00887-0209	P-06004-0037	M-03068-0006
5¢	0.825" (20.96 MM)	0.078" (1.98 MM)	AS-06793-0008	AS-06793-1008	C-04110-1005	P-09319-0299	P-09319-0200	M-01755-0946	E-00887-0201	P-06004-0037	M-03068-0006
25¢ Token	0.865" (21.97 MM)	0.067" (1.70 MM)	AS-06793-0001	AS-06793-1001	C-04110-1005	P-09319-0299	P-09319-0200	M-01755-0945	E-00887-0201	P-06004-0037	M-03068-0006
25¢	0.955" (24.26 MM)	0.067" (1.70 MM)	AS-06793-0001	AS-06793-1001	C-04110-1008	P-09319-0299	P-09319-0200	M-01755-0945	E-00887-0201	P-06004-0037	M-03068-0006
50¢	1.205" (30.61 MM)	0.086" (2.18 MM)	AS-06793-0005	AS-06793-1005	C-04110-1016	P-09319-0299	P-09322-0211	M-01755-0947	E-00887-0205	P-06004-0037	M-03068-0006
$1	1.500" (38.10 MM)	0.100" (2.54 MM)	AS-06793-0002	AS-06793-1002	C-04111-1006	P-09319-0300	P-09322-0211	M-01755-0943	E-00887-0203	P-06004-0037	M-03068-0006
$100	1.595" (40.51 MM)	0.090" (2.29 MM)	AS-06793-0010	AS-06793-1010	C-04111-1008	P-09319-0300	P-09322-0211	M-01755-0944	E-00887-0208	P-06004-0037	M-03068-0006
$10	1.740" (44.20 MM)	0.125" (3.18 MM)	None	None	C-04111-1011	P-09319-0300	P-09322-0211	M-01755-0944	E-00887-0204	P-06004-0036	M-03068-0007
$5	1.750" (44.45 MM)	0.125" (3.18 MM)	AS-06793-0006	AS-06793-1006	C-04111-1011	P-09319-0300	P-09322-0211	M-01755-0944	E-00887-0202	P-06004-0036	M-03068-0007
$25	1.875" (47.63 MM)	0.125" (3.18 MM)	AS-06793-0007	AS-06793-1007	C-04111-1012	P-09319-0300	P-09322-0211	M-01755-0948	E-00887-0202	P-06004-0036	M-03068-0007

COIN	DENOMINATION DECAL	TOWER LENS	TOWER COLOR	PIN WHEEL	SHELF WHEEL	SHELF WHEEL SPACER	COVER COIN OUTLET	COIN DEFLECTOR	AGITATION	HOPPER BOWL SPACER
10¢	D100-10C++-BERM	M-02100-0205	Green	P-00842-009B	P-00847-0001	None	P-00838-0011	P-00839	R-00526-0003	S-00231-1028
1¢	D100-1CENT-BERM	M-02100-0202	Red	P-00842-009B	P-00847-0001	None	P-00838-0011	P-00839	R-00526-0003	S-00231-1028
5¢	D100-.05++-BERM	M-02100-0202	Red	P-00842-009B	P-00847-0028	None	P-00838-0011	P-00839	R-00526-0003	None
25¢ Token	D100-TOK25-BERM	M-02100-0204	Yellow	P-00842-010B	P-00847-0002	None	P-00838-0011	P-00839	R-00526-0003	None
25¢	D100-.25++-BERM	M-02100-0204	Yellow	P-00842-010B	P-00847-0002	None	P-00838-0011	P-00839	R-00526-0003	None
50¢	D100-50C++-BERM	M-02100-0206	Coral	P-00842-010B	P-00847-0003	None	P-00838-0011	P-00839	R-00526-0003	None
$1	D100-$1+++-BERM	M-02100-0203	Blue	P-00842-011B	P-00847-0006	None	P-00838-0011	P-00839	R-00526-0003	None
$100	D100-$100+-BERM	M-02100-0201	White	P-00842-013A	P-00847-0014	None	P-00838-0012	P-00839	R-00526-0001	None
$10	D100-$10++-BERM	M-02100-0207	Purple	A-04308-001A	P-00847-0023	P-00847-0024	P-00838-0012	P-00839-0004	R-00526-0001	None
$5	D100-$5+++-BERM	M-02100-0207	Purple	A-04308-001A	P-00847-0023	P-00847-0024	P-00838-0012	P-00839-0004	R-00526-0001	None
$25	D100-$25++-BERM	M-02100-0207	Purple	A-04308-001A	P-00847-0016	P-00847-0022	P-00838-0012	P-00839-0004	R-00526-0001	None

| Asahi Seiko Hopper Coin-Specific Parts

☑Slant / ☑S6E

DIMENSIONS			HOPPER		BACK PLATE	COIN ACCEPTOR	MOUNTING BRACKET	TOWER LENS	TOWER COLOR	DENOMINATION DECAL
COIN	DIAMETER	THICKNESS	SLANT	SLANT "E"						
5¢	0.825" (20.96 MM)	0.078" (1.98 MM)	AS-03105-0339	AS-03117-0001	C-04110-1005	E-00887-0201	A-04361-0045	M-02100-0202	Red	D100-.05++-BERM
25¢	0.955" (24.26 MM)	0.067" (1.70 MM)	AS-03105-0333	AS-03117-0005	C-04110-1008	E-00887-0201	A-04361-0045	M-02100-0204	Yellow	D100-.25++-BERM
25¢ Token	0.865" (21.97 MM)	0.067" (1.70 MM)	AS-03105-0333	AS-03117-0005	C-04110-1008	E-00887-0201	A-04361-0045	M-02100-0204	Yellow	D100-TOK25-BERM
50¢	1.205" (30.61 MM)	0.086" (2.18 MM)	AS-03105-0335	AS-03117-0006	C-04110-1016	E-00887-0205	A-04361-0045	M-02100-0206	Coral	D100-50C++-BERM
$1	1.500" (38.10 MM)	0.100" (2.54 MM)	AS-03105-0337	AS-03117-0004	C-04111-1006	E-00887-0203	A-04361-0045	M-02100-0203	Blue	D100-$1+++-BERM
$100	1.595" (40.51 MM)	0.090" (2.29 MM)	AS-03105-0431	None	C-04111-1008	E-00887-0208	A-04361-0018	M-02100-0201	White	D100-$100+-BERM
$10	1.740" (44.20 MM)	0.125" (3.18 MM)	AS-03105-0429	None	C-04111-1011	E-00887-0204	A-04361-0018	M-02100-0207	Purple	D100-$10++-BERM
$5	1.750" (44.45 MM)	0.125" (3.18 MM)	AS-03105-0341	None	C-04111-1011	E-00887-0202	A-04361-0018	M-02100-0207	Purple	D100-$5+++-BERM
$25	1.875" (47.63 MM)	0.125" (3.18 MM)	AS-03105-0343	None	C-04111-1012	E-00887-0202	A-04361-0018	M-02100-0207	Purple	D100-$25++-BERM

©2003 Bally Gaming and Systems

ProSlot® 6000

Coin Acceptor Selections E-00887-(SERIES)

☑Upright / ☑Slant / ☑S6E

Coin Mechanisms, Inc. RFI CC-16 E-00887-02XX

☑Upright / ☑Slant / ☑S6E

PART #	DENOMINATION(S)	STYLE	WEIGHT (GRAMS)	UP	SL	S6E
E-00887-0201	5¢ / 25¢ US	S	4.4 - 6.8	X	X	X
E-00887-0202	$5 / $25 Token	WB	19.7+	X	X	
E-00887-0203	$1 US	S	19.7+	X	X	
E-00887-0204	$10 Token	WB	19.7+	X	X	
E-00887-0205	50¢ US / 5FF	S	4.4 - 6.8	X	X	
E-00887-0207	$4 Token	S		X	X	
E-00887-0208	$100 Token	WB	19.7+	X	X	
E-00887-0209	10¢US	S		X	X	
E-00887-0210	50¢ Esc Token	S	5.5 - 7.4	X	X	

PART #	DIAMETER		THICKNESS (MAXIMUM)		UP	SL	S6E
	IN	MM	IN	MM			
E-00887-0201	.700 - 1.250	17.78 - 31.75	.085	2.159	X	X	X
E-00887-0202	1.550 - 1.950	39.37 - 49.53	.130	3.302	X	X	
E-00887-0203	.700 - 1.550	17.78 - 39.37	.115	2.921	X	X	
E-00887-0204	1.550 - 1.950	39.37 - 49.53	.140	3.556	X	X	
E-00887-0205	.770 - 1.550	19.558 - 39.37	.085	2.159	X	X	
E-00887-0207					X	X	
E-00887-0208			.130	3.302	X	X	
E-00887-0209					X	X	
E-00887-0210	.700 - 1.250	17.78 - 31.75	.140	3.556	X	X	

Coin Mechanisms, Inc. IC-16 E-00887-1XXX

☑Upright / ☑Slant

PART #	DENOM	STYLE	DIAMETER		THICKNESS		UP	SL	S6E
			IN	MM	IN	MM			
E-00887-1016	$5	Wide	1.750	44.450	0.120	3.048	X		
E-00887-1017	$5	Wide	1.750	44.450	0.120	3.048	X		
E-00887-1018	$10	Wide	1.700	43.180	0.135	3.429	X		
E-00887-1019	$20	Wide	1.654	42.012	0.096	2.438	X		
E-00887-1020	$100	Wide	1.600	40.640	0.080	2.032	X		
E-00887-1021	$5	Wide	1.750	44.450	0.120	3.048	X		
E-00887-1022	$10	Wide	1.700	43.180	0.135	3.429	X		
E-00887-1023	$25	Wide	1.850	46.990	0.105	2.667	X		
E-00887-1024	$100	Wide	1.600	40.640	0.080	2.032	X		
E-00887-1025	$500	Wide	1.549	39.345	0.090	2.286	X		
E-00887-1026	$1,000	Wide	1.850	46.990	0.108	2.743	X		
E-00887-1027	$5	Wide	1.750	44.450	0.120	3.048	X	X	
E-00887-1028	$5	Wide	1.755	44.577	0.122	3.099	X		
E-00887-1029	$10	Wide	1.700	43.180	0.136	3.454	X		
E-00887-1030	$25	Wide	1.650	41.910	0.100	2.540	X		
E-00887-1031	$50	Wide	1.812	46.025	0.115	2.921	X		
E-00887-1032	$100	Wide	1.600	40.640	0.080	2.032	X		
E-00887-1034	$25	Wide	1.875	47.625	0.101	2.565	X		
E-00887-1035	$100	Wide	1.600	40.640	0.080	2.032	X		
E-00887-1036	$5	Wide	1.750	44.450	0.125	3.175	X		
E-00887-1037	$10	Wide	1.700	43.180	0.120	3.048	X		
E-00887-1038	$25	Wide	1.875	47.625	0.105	2.667	X		
E-00887-1039	$5	Wide	1.750	44.450	0.120	3.048	X		
E-00887-1040	$500	Wide	1.550	39.370	0.090	2.286	X		
E-00887-1041	$1,000	Wide	1.845	46.863	0.108	2.743	X		
E-00887-1060	$1	Narrow	1.470	37.338	0.101	2.565	X	X	
E-00887-1061	$1	Narrow	1.470	37.338	0.101	2.565	X		
E-00887-1062	$2	Narrow	1.340	34.036	0.100	2.540	X		
E-00887-1063	$1	Narrow	1.470	37.338	0.101	2.565	X		
E-00887-1064	$1	Narrow	1.469	37.313	0.101	2.565	X		
E-00887-1065	$2	Narrow	1.340	34.036	0.100	2.540	X		
E-00887-1066	$1	Narrow	1.469	37.313	0.101	2.565	X		
E-00887-1067	$2	Narrow	1.340	34.036	0.100	2.540	X		
E-00887-1068	$1	Narrow	1.469	37.313	0.101	2.565	X	X	
E-00887-1069	$2	Narrow	1.340	34.036	0.100	2.540	X	X	
E-00887-1071	50¢	Narrow	1.170	29.718	0.075	1.905	X		
E-00887-1072	$1	Narrow	1.000	25.400	0.075	1.905	X		
E-00887-1073	$2	Narrow	1.125	28.575	0.101	2.565	X		
E-00887-1074	$1	Narrow	1.469	37.313	0.101	2.565	X		
E-00887-1075	$2	Narrow	1.340	34.036	0.100	2.540	X		
E-00887-1086	1Euro	Narrow	1.006	25.552	0.089	2.261	X		

S STYLE

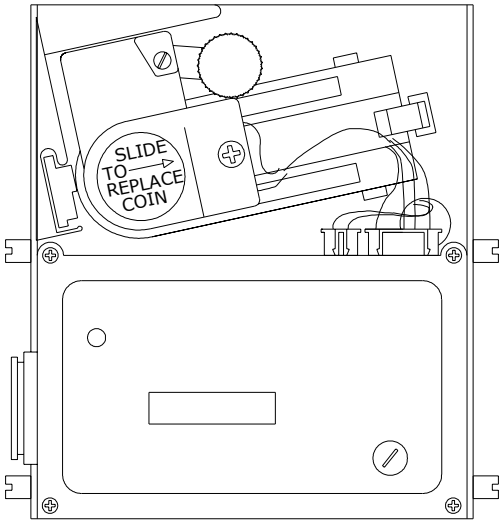

WB STYLE

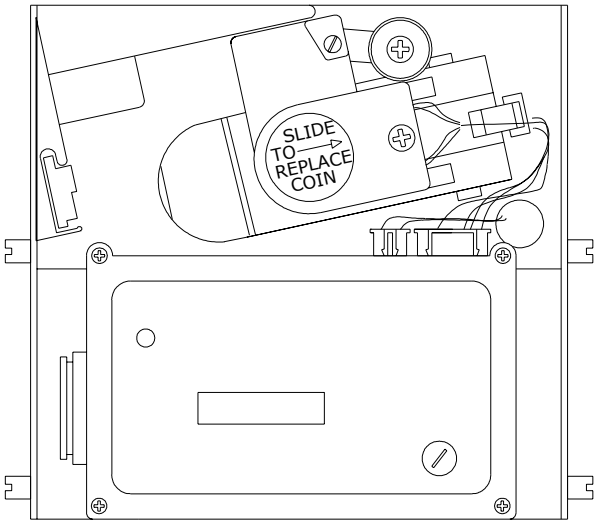

Coin Mechanisms, Inc. RFI CC-16

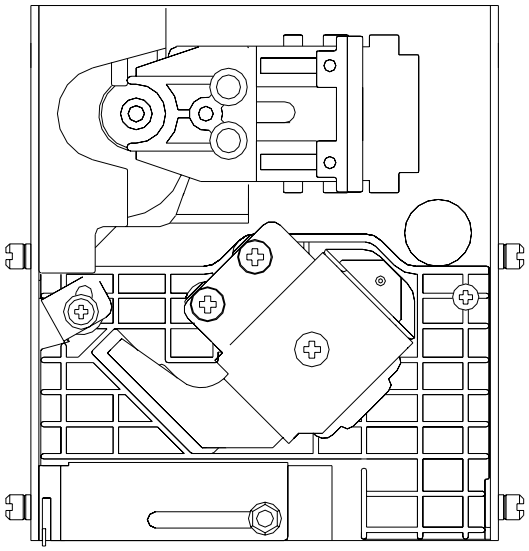

Coin Mechanisms, Inc. IC-16

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Coin Acceptor Selections E-00887-(SERIES)

☑*Upright* / ☑*Slant* / ☑*S6E*

Coin Controls, Inc. Condor E-00887-2XXX

☑*Upright* / ☑*Slant*

PART #	DENOMINATION	DIAMETER		THICKNESS		COMPAT.
		IN	MM	IN	MM	
E-00887-2001	50¢ Token	0.866	22.0	0.079	2.00	CC16
E-00887-2002	25¢	0.787	20.0	0.067	1.70	CC16
E-00887-2003	50¢ Token	0.866	22.0	0.074	1.87	CC16
E-00887-2004	1 Rand Token	1.096	27.8	0.089	2.27	CC16
E-00887-2005	1 Rand	0.945	24.0	0.079	2.00	CC16
E-00887-2006	2 Rand	0.906	23.0	0.102	2.60	CC16
E-00887-2007	ANY	1.260	> 32.0	0.110	> 2.80	CC16
E-00227-2010	5 Rand Token	1.024	26.0	0.071	1.80	CC16
E-00887-2012	ANY	1.496	> 38.0	0.110	> 2.80	CC16
E-00887-2013	Monte Carlo 50C	0.866	22.0	0.073	1.85	CC16
E-00887-2014	Monte Carlo 1 Rand	0.945	724.0	0.079	2.00	CC16
E-00887-2015	Monte Carlo 2 Rand	0.906	23.0	0.102	2.60	CC16
E-00887-2016	Monte Carlo 5 Rand	1.024	26.0	0.094	2.40	CC16
E-00887-2017	Monte Carlo 10 Rand	1.122	28.5	0.094	2.40	CC16
E-00887-2023	$5 Token	1.756	44.6	0.122	3.10	CC16
‖ E-00887-2024	25¢	0.787	20.0	0.067	1.70	CC 16

PART #	DENOMINATION	PROGRAM	COUNTRY	UP	SL	S6E
E-00887-2001	50¢ Token	Fixed	S Africa	X	X	
E-00887-2002	25¢	Fixed	S Africa	X	X	
E-00887-2003	50¢ Token	Fixed	S Africa	X	X	
E-00887-2004	1 Rand Token	Fixed	S Africa	X	X	
E-00887-2005	1 Rand	Fixed	S Africa	X	X	
E-00887-2006	2 Rand	Fixed	S Africa	X	X	
E-00887-2007	ANY	Programmable	Any	X	X	
E-00227-2010	5 Rand Token	Fixed	S Africa	X	X	
E-00887-2012	ANY	Programmable	Any	X		
E-00887-2013	Monte Carlo 50C	Fixed	S Africa	X	X	
E-00887-2014	Monte Carlo 1 Rand	Fixed	S Africa	X	X	
E-00887-2015	Monte Carlo 2 Rand	Fixed	S Africa	X	X	
E-00887-2016	Monte Carlo 5 Rand	Fixed	S Africa	X	X	
E-00887-2017	Monte Carlo 10 Rand	Fixed	S Africa	X	X	
E-00887-2023	$5 Token	Programmable	Any	X		
‖ E-00887-2024	25¢	Fixed	S Africa	X	X	

National Rejectors, Inc. E-00887-45XX

☑*Upright*

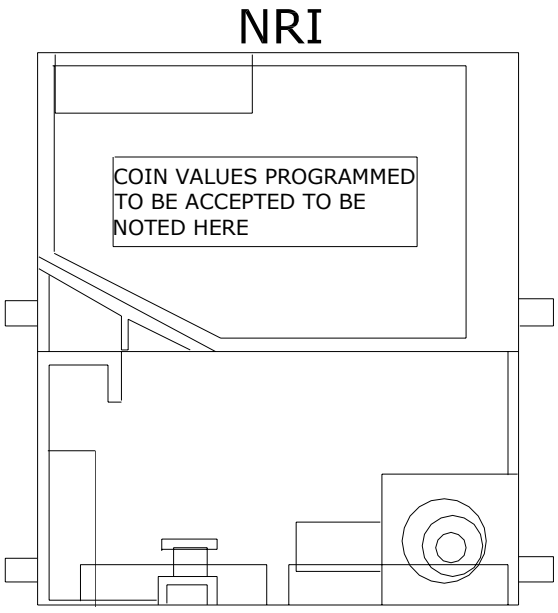

PART #	CN = Canadian DM = German Mark F = French Franc SwK = Swedish Kronor SwF = Swiss Franc HG = Holland Guilder FM = Finland Markka EU = Euro DK = Denmark Droner P = Philippines Pesco CF = Chile Ficha UF = Uruguay Ficha								
	CH1	CH2	CH3	CH4	CH5	CH6	UP	SL	S6E
E-00887-4501	.05 US						X		
E-00887-4502	.10 US						X		
E-00887-4503	.50 US						X		
E-00887-4504	1.00 US						X		
E-00887-4505	.05 CA						X		
E-00887-4506	.25 CA						X		
E-00887-4507	1.00 CA						X		
E-00887-4508	2.00 CA						X		
E-00887-4509	2 DM						X		
E-00887-4510	5 DM						X		
E-00887-4511	1 FF						X		
E-00887-4512	2 FF						X		
E-00887-4513	5 FF						X		
E-00887-4514	1 SwK						X		
E-00887-4515	.25 HG						X		
E-00887-4516	1 HG						X		
E-00887-4517	1 DK						X		
E-00887-4518	2 P						X		
E-00887-4519	1 CF						X		
E-00887-4520	2 CF						X		
E-00887-4521	1 UF						X		
E-00887-4522	3 UF						X		
‖ E-00887-4523	50SwF						X		
‖ E-00887-4524	1SwF						X		
‖ E-00887-4525	50EU						X		
‖ E-00887-4526	1EU						X		
‖ E-00887-4527	2EU						X		

©2003 Bally Gaming and Systems

ProSlot® 6000

Coin Acceptor Selections E-00887-(SERIES)

☑Upright / ☑Slant / ☑S6E

Coin Mechanisms, Inc. MC-16 E-00887-6XXX

☑Upright / ☑Slant

	PART #	WEIGHT (GRAMS)	DENOM	DESCRIPTION	UP	SL	S6E
	E-00887-6001	0.70	1¢	MC-160E,24VDC, INH HI, PR 15	X	X	
	E-00887-6002	2.60	5¢	MC-160E,24VDC, INH HI, PR 15	X	X	
	E-00887-6003	0.70	10¢	MC-160E,24VDC, INH HI, PR 15	X	X	
	E-00887-6004	6.00	25¢	MC-160E,24VDC, INH HI, PR 15	X	X	
	E-00887-6005	14.2	50¢ / $1 Token	MC-160E,24VDC, INH HI, PR 15	X	X	
	E-00887-6008	9.00	50¢ Token	MC-160E, 24VDC, INH HI, PR 15	X	X	

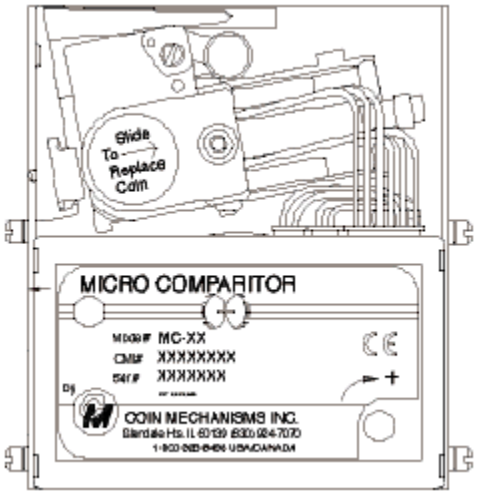

Coin Mechanisms, Inc. MC-16

IDX E-X(SERIES)

☑Upright / ☑Slant / ☑S6E

	P/N	DESCRIPTON	UP	SL	S6E
	E-X10C-C040236	IDX X10, 1.18/1.25D, .087T, CC-16	X		
	E-X10C-C040336	IDX X10, 1.05/1.125, X3, CC-16 (OLGC)	X	X	
	E-X10C-C040436	IDX X10, .928/.998D, .087T, CC-16	X		
	E-X10C-C040636	IDX X10, .800/.870, X3, CC-16 (OLGC)	X	X	
	E-X10C-C041236	IDX X10, 1.18/1.25D, .097T, CC-16	X		
	E-X10C-C043036	IDX X10, 1.40/1.47, X3, CC-16 (OLGC)	X	X	
	E-X10C-C043136	IDX X10, 1.28/1.35, X3, CC-16 (OLGC)	X	X	
	E-X10C-C043A36	IDX X10, 1.118/1.18, X3, CC-16 (OLGC)	X	X	
	E-X10C-C044A36	IDX X10, 1.118/1.18, X3, CC-16 (OLGC)	X	X	
	E-X10C-C170336	IDX X10, 1.05/1.125, X4, PP-16 (OLGC)	X	X	
	E-X10C-C170436	IDX X10, .928/.998D, X4, CC-16 (OLGC)	X	X	
	E-X10C-C170636	IDX X10, .800/.870, X4, PP-16 (OLGC)	X	X	
	E-X10C-C171236	IDX X10, 1.18/1.25, X4, CC-16 (OLGC)	X	X	
	E-X10C-C171736	IDX X10, 1.035/1.105X4, CC-16 (OLGC)	X	X	
	E-X10C-C173036	IDX X10, 1.40/1.47, X4, PP-16 (OLGC)	X	X	
	E-X10C-C173136	IDX X10, 1.28/1.35, X4, PP-16 (OLGC)	X	X	
	E-X10C-C173A36	IDX X10, 1.118/1.18, X4, PP-16, (OLGC)	X	X	
	E-X10C-C174636	IDX X10, .800/.870, X4, CC-16 (OLGC)	X	X	
	E-X10C-C373036	IDX X10, 1.4/1.47, Grand Victoria	X	X	
	E-X10C-C480136	IDX X10, 1.28/1.35D, .087T, CC-16	X		
	E-X10C-C480536	IDX X10, .84/.910D, .087T, CC-16	X	X	
	E-X10C-C480636	IDX X10, .80/.870D, .087T, CC-16	X	X	
	E-X10C-C481231	IDX X10, 1.18/1.25D, .097T, CC-62	X		
	E-X10C-C481236	IDX X10, 1.18/1.25D, .097T, CC-16	X		
	E-X10C-C481731	IDX X10, 1.035/1.105, .097, CC-62	X	X	
	E-X10C-C8B1436	IDX X10, .928/.998, .097T, CC-16			X
	E-X12C-C480436	IDX X10, .928/.998D, .087T, CC-16	X		
	E-X12C-C484636	IDX X10, .800/.870D, .092T, CC-16	X		
	E-X14C-C040436	IDX X10, .75/1.0D, CC-16, 0/60	X	X	
	E-X14C-C040531	IDX X10, .840/.910, X3, CC-62 (OLGC)	X		
	E-X14C-C040536	IDX X10, .840/.910, X3, CC-16 (OLGC)	X	X	
	E-X14C-C170536	IDX X10, .840/.910, X4, PP-16 (OLGC)	X	X	
	E-X14C-C480436	IDX X10, .928/.998D, .087T, CC-16	X		
	E-X14C-C7B0436	IDX X10, .928/.998, CC16, 105/165	X	X	
	E-X14C-C7B0536	IDX X10, .840/.910, X2, CC-16 (OLGC)	X	X	
	E-X14C-C8B0436	IDX X10, .928/.998, CC16, 30/142	X	X	
	E-X14C-C8B0536	IDX X10, .840/.910, X1, CC-16 (OLGC)	X	X	
	E-X20DBCNN77341	IDX X20D, 1.035/1.105D, 1#/10P (United Kingdom)	X		
	E-X20DBCNN77342	IDX X20D, 1.035/1.105D, 1#/20P (United Kingdom)	X		
	E-X20DBCNN77345	IDX X20D, 1.035/1.105D, 1#/50P (United Kingdom)	X		
	E-X70A-C371236	IDX X70, 1.7/1.87, Grand Victoria	X	X	
	E-X70A-C480036	IDX X70, 1.34/1.55D, .110T, CC-16	X	X	
	E-X70A-C8B0236	IDX X70, 1.7/1.87D, .110T, CC-16W	X		
	E-X70A-C8B1236	IDX X70, 1.7/1.87D, .130T, CC-16W	X		
	E-X70A-C8B2136	IDX X70, 1.55/1.7D, .150T, CC-16W	X		
	E-X70A-C8B2236	IDX X70, 1.7/1.87D, .150T, CC-16W	X		
	E-X72A-C8B0136	IDX X70, 1.55/1.7D, .110T, CC-16W	X		
	E-X74A-C8B0136	IDX X70, 1.55/1.7D, .110T, CC-16W	X		

©2003 Bally Gaming and Systems

ProSlot® 6000

Bill Acceptor SelectionsE-011XX-(SERIES)

☑Upright / ☑Slant / ☑S6E

JCM WBA E-01100-(SERIES)

☑Upright / ☑Slant / ☑S6E

PART #	DESCRIPTION	GUIDE P/N	UP	SL	S6E
E-01100-0001	JCM WBA-10-SS/XXX-501-03	GJ-04000-0001	X	X	
E-01100-0002	JCM WBA-11-SS/XXX-501-03	GJ-04000-0001	X	X	
E-01100-0003	JCM WBA-20-SS/XXX-502-03	GJ-04000-0002	X	X	
E-01100-0004	JCM WBA-21-SS/XXX-502-03	GJ-04000-0002	X	X	
| E-01100-0005	JCM WBA-12-SS/XXX-501-03	GJ-04000-0001	X	X	X
| E-01100-0006	JCM WBA-13-SS/XXX-501-03	GJ-04000-0001	X	X	X
| E-01100-0007	JCM WBA-25-SS/XXX-501-03	N/A	X	X	X
E-01100-0008	JCM WBA-22-SS/CAN-502-03	GJ-04000-0002	X	X	
| E-01100-0009	JCM WBA-23-SS/CAN-502-03	GJ-04000-0002	X	X	X
|| E-01100-0010	JCM WBA-24-SSA/EUR-505-03-015	N/A	X	X	X
|| E-01100-0011	JCM WBA-12-SS-XXX-501I-03-015	GJ-04000-0001		X	X
|| E-01100-0012	JCM WBA-13-SS-XXX-501I-03-015	GJ-04000-0001		X	X

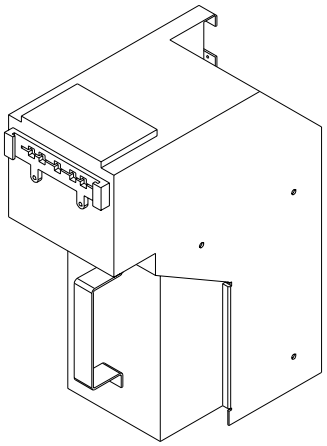

GPT E-01120-(SERIES)

☑Upright / ☑Slant

PART #	DESCRIPTION	COUNTRY	UP	SL	S6E
E-01120-0001	Wide	Malaysia	X	X	
E-01120-0002	Wide	Austria	X	X	
E-01120-0003	Narrow	Usa	X	X	
E-01120-0005	Wide	Germany	X	X	
E-01120-0006	Narrow	Russia	X	X	
E-01120-0007	Wide	Finland	X	X	
E-01120-0008	Wide	Belgium	X	X	
E-01120-0010	Narrow	South Africa	X	X	
E-01120-0011	Wide	Greece	X	X	
E-01120-0012	Wide	Malta with Barcode	X	X	
E-01120-0013	Wide	Uruguay	X	X	
E-01120-0014	Wide	Slovenia	X	X	
E-01120-0015	Narrow	Philippines	X	X	
E-01120-0018	Narrow	Venezuela	X	X	
|| E-01120-0020	Narrow (Argus)	Worldwide	X	X	
|| E-01120-0021	Wide (Argus)	Worldwide	X		



GPT Bill Acceptor Bezel
A-04361-0062
☑Upright

ARDAC E-01124-(SERIES)

☑Upright / ☑Slant

PART #	COUNTRY	UP	SL	S6E
E-01124-0001	Malaysia	X	X	
E-01124-0002	Austria	X	X	
E-01124-0003	United States	X	X	
E-01124-0005	Germany	X	X	
E-01124-0007	Finland	X	X	
E-01124-0008	Belgium	X	X	
E-01124-0010	South Africa	X	X	
E-01124-0011	Zimbabwe	X	X	

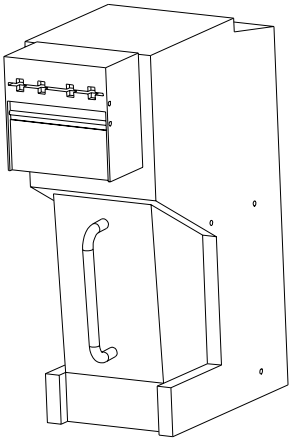



ARDAC Bill Acceptor
Bezel P-A4000-6001
☑Upright

NOTE: ARDAC bill acceptors ship with one extra bill box for a total of two.

| - Revised, || - New

©2003 Bally Gaming and Systems

Bill Acceptor SelectionsE-011XX-(SERIES)

☑*Upright* / ☑*Slant* / ☑*S6E*

MARS E-21100-(SERIES)

☑*Upright* / ☑*Slant* / ☑*S6E*

PART #	DESCRIPTION	VERSION	UP	SL	S6E
E-21100-0001	ZT1105-US 67-71MM	Flash	X	X	X
E-21100-0002	ZT1204-US 67-71MM	Flash	X	X	X
E-21100-0003	ZT1105P-US 67-71MM	EPROM	X	X	X
E-21100-0004	ZT1204P-US 67-71MM	EPROM	X	X	X

NOTE: MARS bill acceptors include one cash box (Part # E-00983-0041).

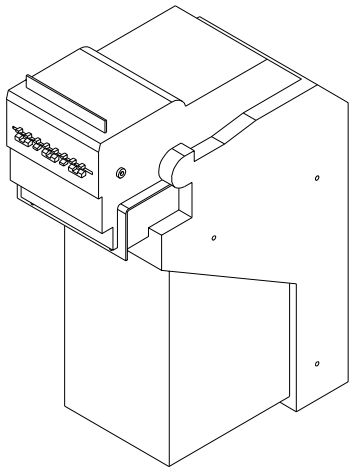



Mars Bill Acceptor Bezel
MB-M4000-6011
☑*Upright*

Coin Acceptor Kit K-00674-(SERIES)

☑*Upright*

ITEM	QTY	P/N	DESCRIPTION
1	2	LSPP-00632-1104	SCREW
2	1	AS-03356-0303	COIN OPTIC DECODER 2 BOARD
3	1	E-01091-0004	PROGRAMMED COD51, PIC16C54
4	1	P-00150-0288	COD FISHPAPER
5	2	LSPP-00832-1106	SCREW
6	1	P-09384-0001	PLATE, FRONT OPTIC BLOCK
7	1	PAGE 9	OPTIC BOARD MOUNTING BLOCK
8	1	P-06004-0186	BRACKET, COIN ACCEPTOR, NARROW
		P-06004-0036	BRACKET, COIN ACCEPTOR, WIDE
		P-06004-0187	BRACKET, COIN ACCEPTOR, IDX X70
9	2	M-06002-0002	CLIP, COIN ACCEPTOR MOUNTING
10	1	M-01755-0942	PRISM, COIN OPTIC
11	1	P-09322-0196	BRACKET, PRISM MOUNTING
12	1	NLS-00440-1112	NUT
13	1	NLS-00632-1112	NUT

AVAILABILITY:

PART #	DESCRIPTON
K-00674-0236	Coin Acceptor Kit, Narrow (0.70-1.50)
K-00674-0237	Coin Acceptor Kit, Wide (1.50-2.0)
K-00674-0262	Coin Acceptor Kit, Narrow, No COD (0.70-1.5)
K-00674-0264	Coin Acceptor Kit, Wide, No COD (1.50-2.0)
K-00674-0266	Coin Acceptor Kit, Narrow, NR
K-00674-3009	Coin Acceptor Kit, IDX X70

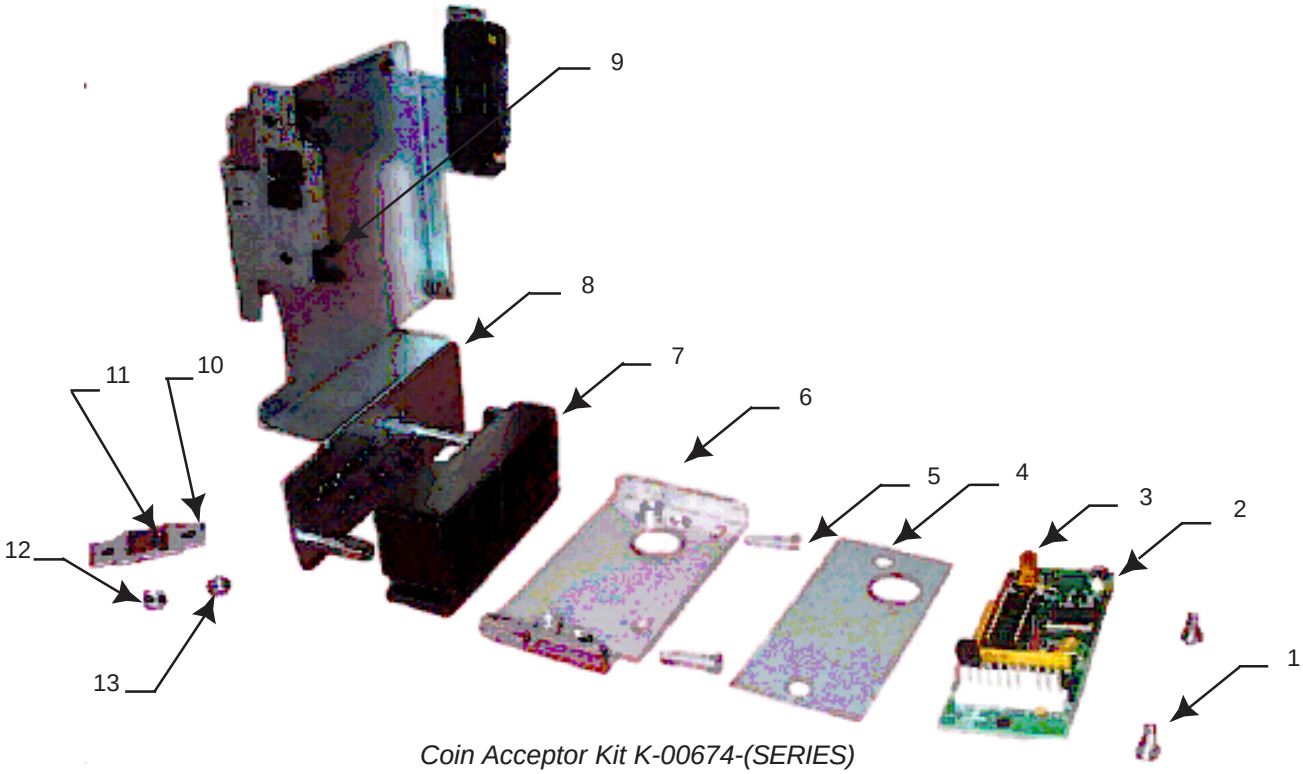

Coin Acceptor Kit K-00674-(SERIES)

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Backplate with Coin Tray
AS-05998-(SERIES)

☑*Upright*

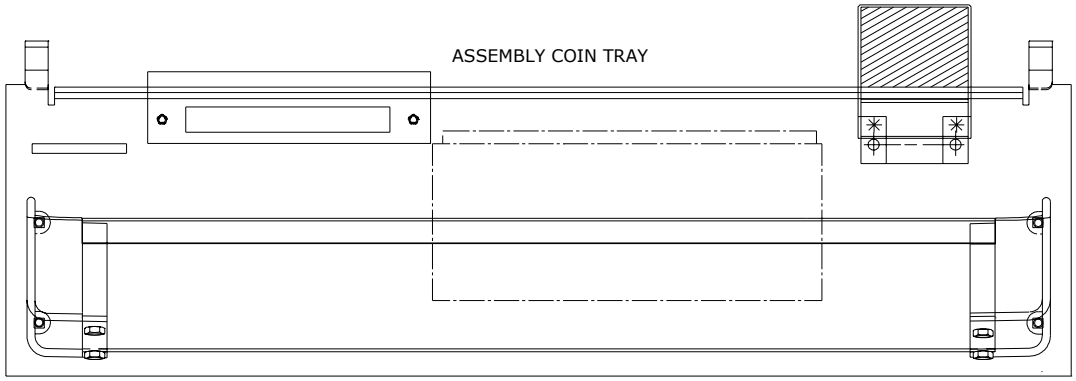

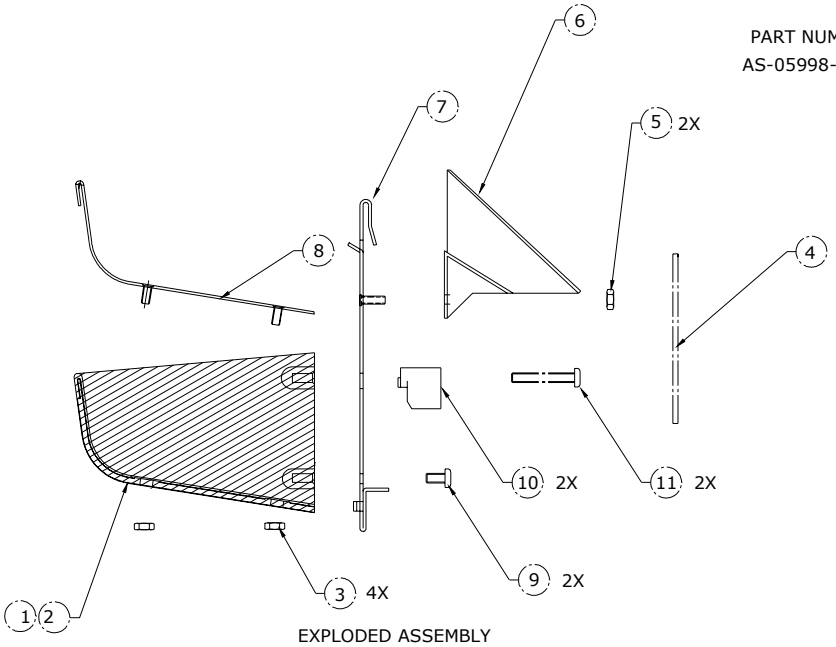

EXPLODED ASSEMBLY

PART NUMBER LEGEND
AS-05998-0X XX

FINISH
-01 CHROME END CAP, S.S. BACKPLATE
-02 BRASS END CAP, S.S. BACKPLATE
-03 GOLD END CAP, S.S. BACKPLATE
-04 GOLD END CAP, GOLD BACKPLATE

CONFIGURATION
-01 WIDE S55/V7S
-02 NARROW S55/V7S
-03 WIDE FBA S55
-04 WIDE FBA V7S
-05 WIDE V8000
-06 WIDE S6000
-07 WIDE S6000, WITH PRINTER
-08 30" WIDE S6000

REF	PART #	DESCRIPTION	QTY
1	See Legend	End Cap, Coin Cup, Right	1
2	See Legend	End Cap, Coin Cup, Left	1
3	M-00319-0003	Elastic, Stop Nut (Esna)	4
4	M-01777-5415	Envelope, Plastic, 7 3/4 X 3	1
5	NLS-00832-11121	Nut, 8-32 Hex	2
6	P-09189-0017	Chute, Drop	1

REF	PART #	DESCRIPTION	QTY
7	See Legend	Back Plate, Coin Tray	1
8	P-09319-076A	Tray, Coin, Stainless Steel	1
9	LSPP-01032-1106	Screw, 10-32 X 3/8 Thd Form Phil Pan Hd	2
10	M-03099-0004	Catch, Coin Tray	2
11	See Legend	Screw, 10-32 X Legend Phil Pan Hd	2

Legend

PART #	DESCRIPTION	ITEM 1 - END CAP	ITEM 2 - END CAP	ITEM 7 - BACK PLATE	ITEM 11 - SCREW
AS-05998-0601	Coin Tray, Wide Chrome/Stainless Steel Plate	C-04710-0101	C-04710-0102	P-06001-0002	LSPP-01032-1112
AS-05998-0603	Coin Tray, Wide Gold/Stainless Steel Plate	C-04710-0109	C-04710-0110	P-06001-0002	LSPP-01032-1120
AS-05998-0604	Coin Tray, Wide Gold/Gold Plate.	C-04710-0113	C-04710-0114	P-06001-0004	LSPP-01032-1120
AS-05998-0701	Coin Tray, Wide Chr/Stainless Steel Plate, Printer	C-04710-0101	C-04710-0102	P-06011-00P6	LSPP-01032-1112
AS-05998-0703	Coin Tray, Wide Gold/Stainless Steel Plate, Printer	C-04710-0109	C-04710-0110	P-06011-00P6	LSPP-01032-1120
AS-05998-0704	Coin Tray, Wide Gold/Gold Plate, Printer	C-04710-0113	C-04710-0114	P-06011-00P7	LSPP-01032-1120
AS-05998-0901	Coin Tray, Wide, Polished Chrome/Stainless Steel Plate (Ontario)	C-04710-0101	C-04710-0102	P-06011-00P6	LSPP-01032-1112
AS-05998-0903	Coin Tray, Wide, Polished Gold/Stainless Steel Plate (Ontario)	C-04710-0101	C-04710-0102	P-06011-00P6	LSPP-01032-1112
AS-05998-0904	Coin Tray, Titanium Gold/Gold Plate (Ontario)	C-04710-0109	C-04710-0110	P-06011-00P6	LSPP-01032-1120

| - Revised, || - New

©2003 Bally Gaming and Systems

Backplate No Coin Tray, Stainless Steel
AS-06610-0001

☑*Upright*

REF	PART #	DESCRIPTION	QTY
1	M-01777-5415	Envelope, Plastic, 7.5 x 3.0	1
2	NLS-00832-1112	Hex Nut	2
3	P-06001-0003	Plate, Back, No Coin Tray	1
4	P-09189-0017	Chute, Drop	1

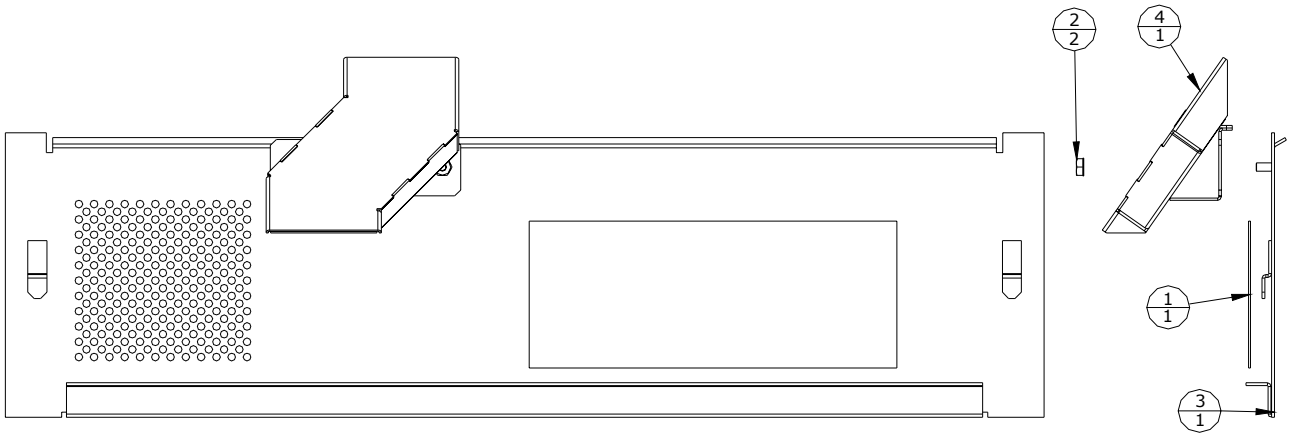

©2003 Bally Gaming and Systems

ProSlot® 6000

Cabinet Assembly

FEATURE GLASS CHANNEL				
CHROME	BRASS	DIM A	WHERE USED	MATERIAL
M-03100-0001	M-03100-0007	14 11/16"	W6 & W6E	Extruded Plastic ABS Mylar
M-03100-0002	M-03100-0008	9 3/16"	C6 & C6E	
|| M-03100-0033	M-03100-0035	14 11/16"	W6E (Speaker)	
|| M-03100-0030	M-03100-0032	9 3/16"	C6 & C6E (Speaker)	

Feature Glass Retaining Bracket, Non Extended
C-06001-0001
☑*Upright*

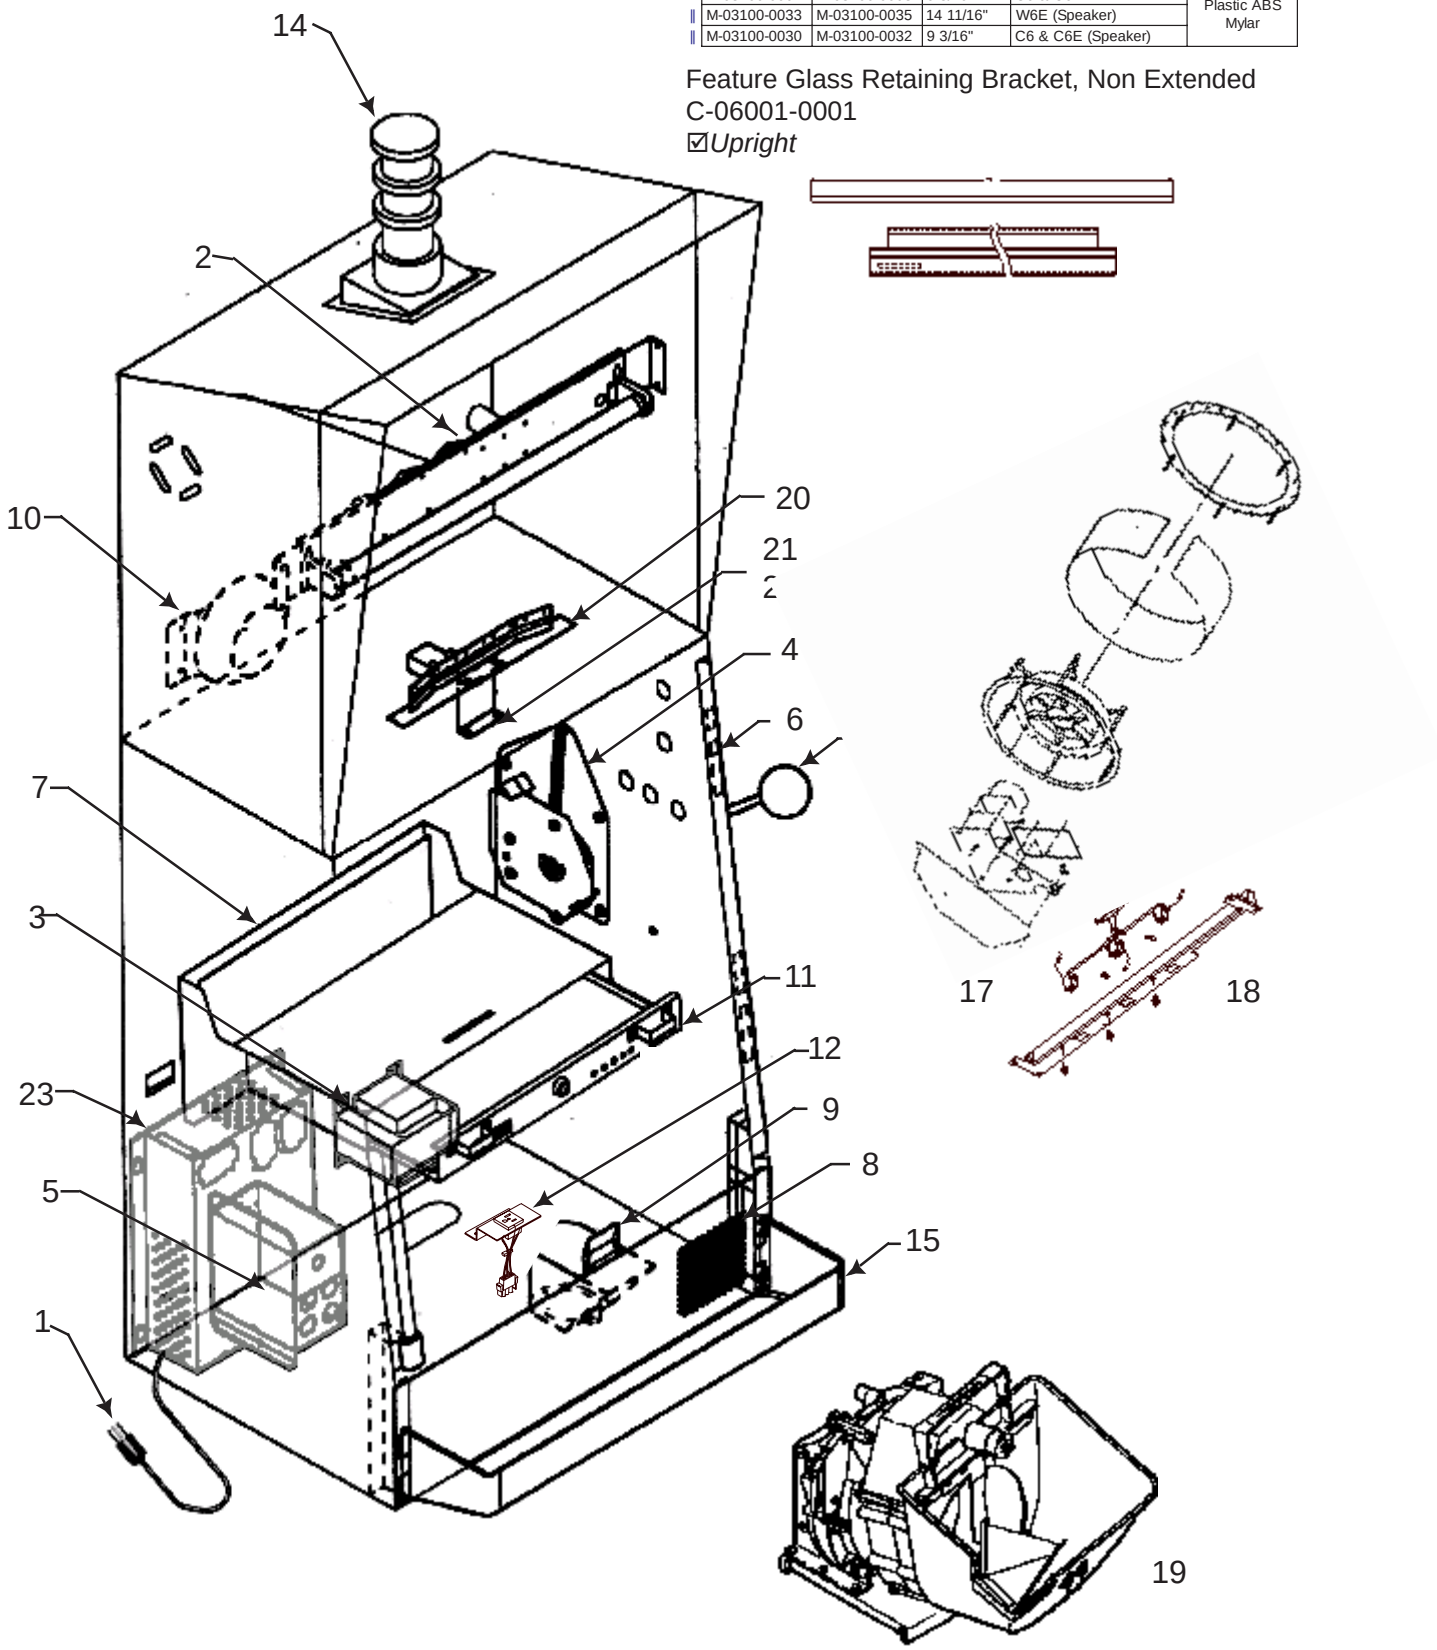

©2003 Bally Gaming and Systems

Cabinet Assembly

ITEM	PART #	DESCRIPTION	PAGE
1	E-00126-(SERIES)	Line Cord Assembly	26
2	AS-0X335-(SERIES)	Starter/Ballast Assembly	20
3	E-00122-(SERIES)	Transformer	23
4	AS-02301-0028	Handle Mechanism Assembly	31
5	AS-03025-0152	Cabinet Power Cable	18
	AS-03025-0153	Hopper Cable	19
6	AS-03356-0428	Door Optic Detector Board	—
7	AS-06604-(SERIES)	Card Rack/Backplane	20
8	E-00281-(SERIES)	Speaker	27
9	M-03110-0001	Drop Chute Cup	—
10	E-00664-0466	Bell and Receptacle	26
11	AS-06605-0001	Card Rack Door/MPU Board For MPU Board Selection	21
12	AS-03268-(SERIES)	Convenience Outlet	25

ITEM	PART #	DESCRIPTION	PAGE
13	AS-02303-(SERIES)	Handle Assembly	31
14	P-09323-(SERIES)	Tower Hole Cover	—
	M-03097-0005	Tower Base	28
	TWRX-(SERIES)	Tower Selections	
15	AS-05998-(SERIES)	Back Plate With Coin Tray	15
	AS-06610-0001	Back Plate No Coin Tray	16
17	AS-04716-(SERIES)	Reel Mechanism	33
	AS-04235-(SERIES)	Reel Drive / Motor	33
18	AS-04703-(SERIES)	Reel Support, Cable And Bracket	34
19	AS-06793-(SERIES)	Hopper	31
20	AS-04225-(SERIES)	Meter Assembly	30
21	P-06004-0026	Feature Glass Spring Stop Bracket	22
22	P-06005-0001	Feature Glass Retainer Spring	22
23	AS-04238-(SERIES)	MPU Board/Power Supply	22

Cabinet Power Cable AS-03025-0152
☑*Upright*

NOTE: For Feature Glass selections, see Module 3A, Glass and Decals.

For more bracket selections, see Module 10, SDS® Parts Reference.

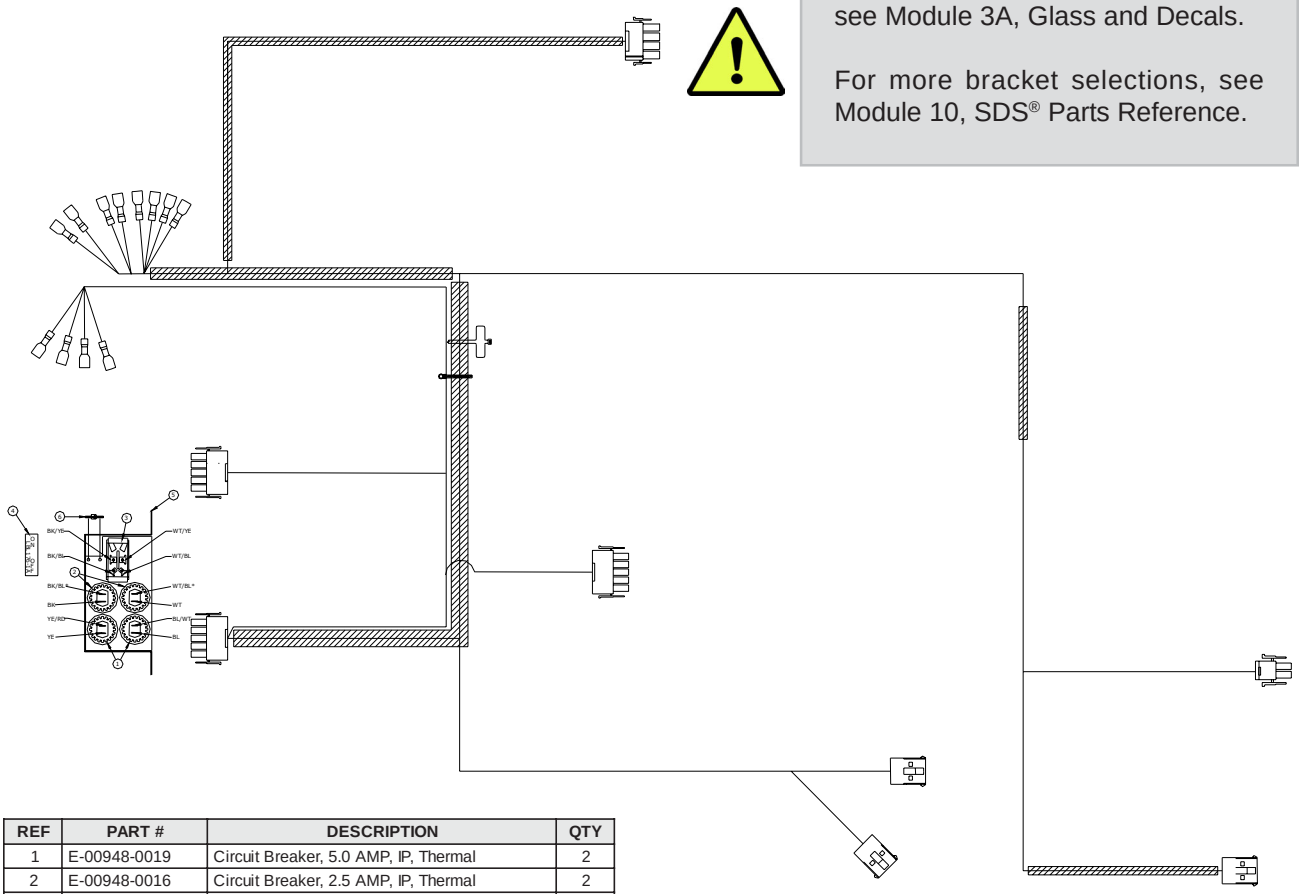

REF	PART #	DESCRIPTION	QTY
1	E-00948-0019	Circuit Breaker, 5.0 AMP, IP, Thermal	2
2	E-00948-0016	Circuit Breaker, 2.5 AMP, IP, Thermal	2
3	E-00108-0365	Switch, Toggle, DPST, 0.25 Tabs	1
4	LBL-00176-001A	Label, On/Off	1
5	P-06004-0005	Switch, Fuse Bracket	1
6	E-00647-0004	4-Inch Cable Tie	1
7	CBL-30475-0001	Cable, Cabinet Power	1

©2003 Bally Gaming and Systems

ProSlot® 6000

Cabinet Assembly

Hopper Cable AS-03025-0153
☑*Upright*

REF	PART #	DESCRIPTION	QTY
1	CBL-30476-0001	Cable, Hopper	1
2	P-09264-001A	Bracket, Hopper Plug	1
3	M-03063-001A	Screw, Shoulder	2
4	M-03064-001A	NUT, HEX, METRIC, M4 X 0.7, ZINC	2
5	E-00647-0020	CABLE MARKER TIE, "CABINET"	1

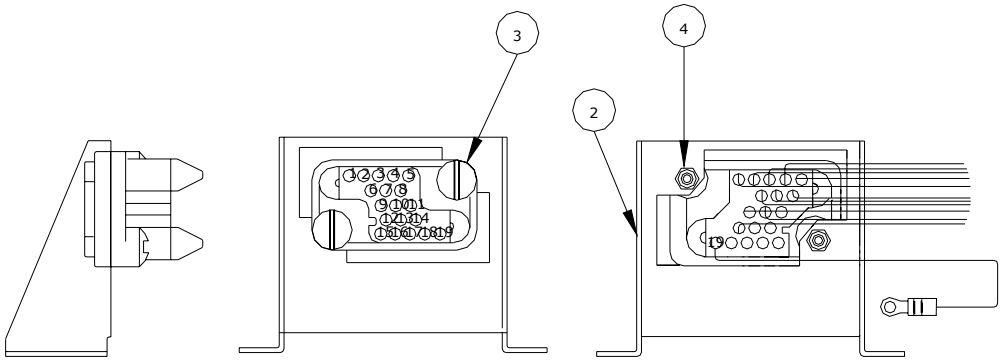

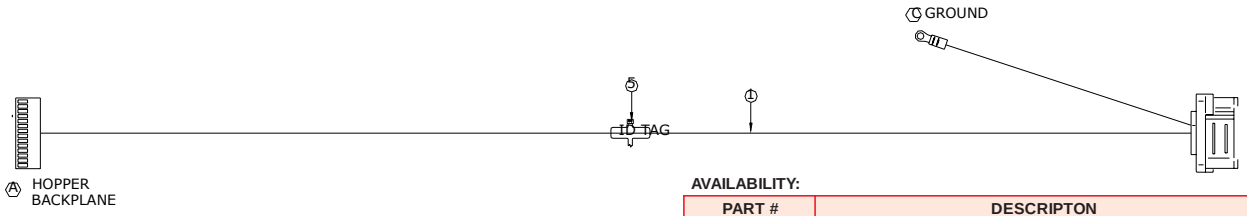

AVAILABILITY:

PART #	DESCRIPTON
AS-02335-0080	**Starter/Ballast Assembly**
AS-02335-0086	**Starter/Ballast Assembly (Oval Top)**

Starter/Ballast Assembly, 60HZ. AS-02335-(SERIES)
☑*Upright*

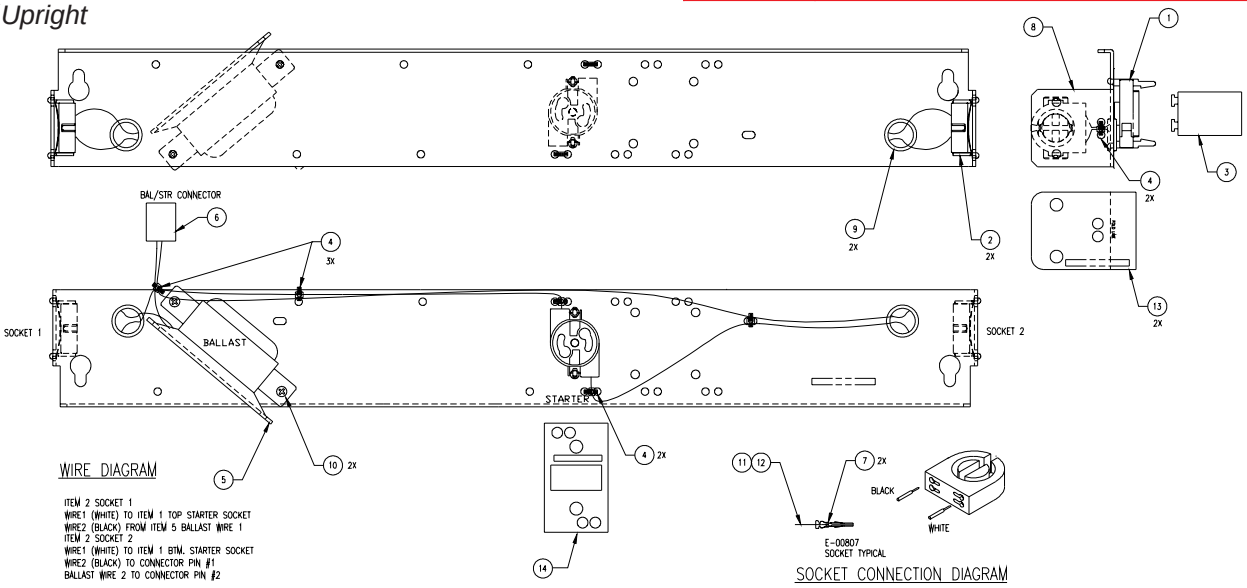

REF	PART #	DESCRIPTION	QTY	PART #
1	E-00120-0285	Socket, Fluorescent Lamp Starter	1	0080
	E-00120-0265	Socket, Fluorescent Lamp Starter, CE97	1	0086
2	E-00120-0266	Socket, Fluorescent Lamp	2	0080
				0086
3	E-00411-0008	Starter, Fluorescent, FS-2	1	0080
	E-00411-0010	Starter, Fluorescent, FS-2	1	0086
4	E-00647-0004	Cable Tie	7	0080
				0086
5	E-00409-0010	Ballast Assembly	1	0080
				0086
6	E-00804-0002	Connector Housing Cap	1	0080
				0086
7	E-00807	Socket, Amp 24-18, Strip	2	0080
	E-00807-0002	Contact Socket, Amp 20-14 AWG	2	0086

REF	PART #	DESCRIPTION	QTY	PART #
8	P-09082-0003	Ballast/Starter Fluorescent Tube Bracket	1	0080
	P-09082-0008	Fluorescent Tube Mounting Bracket	1	0086
9	R-00111-0008	Grommet	2	0080
				0086
10	TFPP-00832-1104	Screw, 8-32 X 1/4 Thd Form Phil Pan Hd	2	0080
				0086
11	WIP-ES202-1880	PVC, Solid, 18 AWG Black Type TEW	A/R	0080
				0086
12	WIP-ES202-1850	PVC, Solid, 18 AWG White Type TEW	A/R	0080
				0086
13	P-00150-0291	Insulator, Polycarbonate, CE97	2	0080
				0086
14	P-00150-0292	Insulator, Polycarbonate, CE97	1	0080
				0086

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Cabinet Assembly

Starter/Ballast, 50HZ., CE97 AS-03335-0012

☑*Upright*

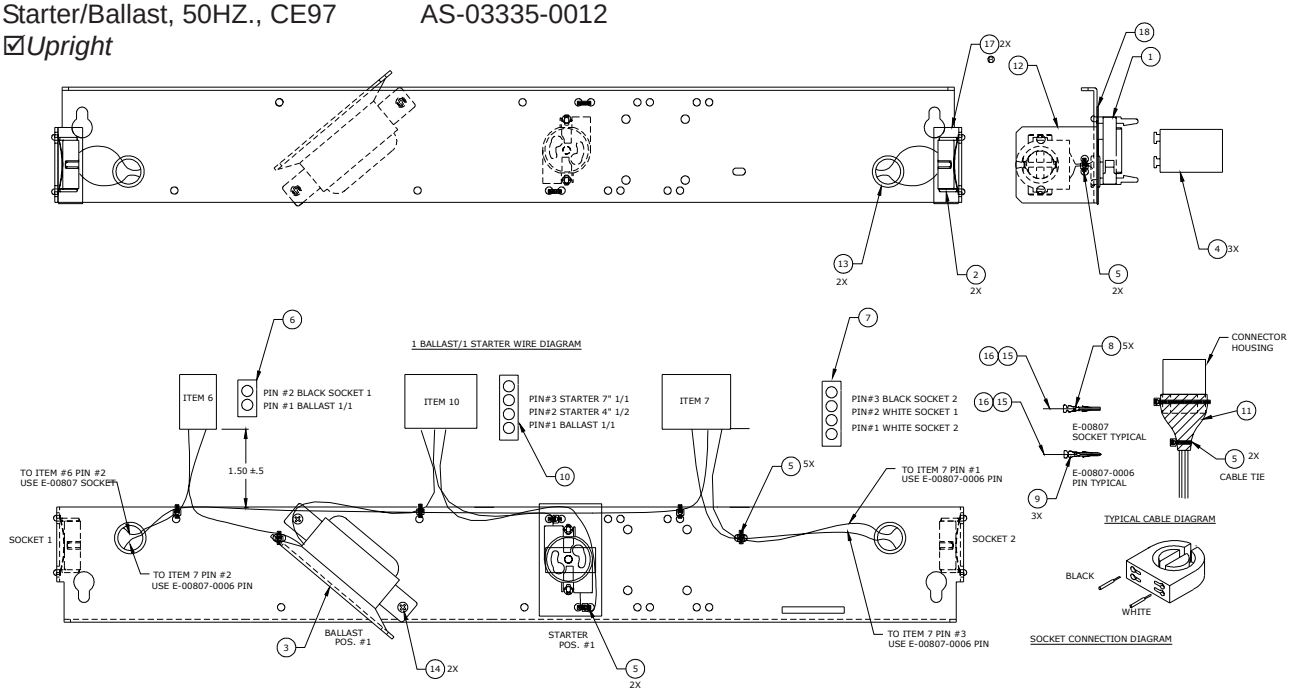

REF	PART #	DESCRIPTION	QTY
1	E-00120-0265	Socket, Fluorescent Lamp Starter CE97	1
2	E-00120-0266	Socket, Fluorescent Lamp CE97	2
3	E-00409-0025	Ballast, F15T8, 50 Hz CE97	1
4	E-00411-0009	Starter, Fluorescent, FS-2 CE97	1
5	E-00647-0004	Cable Tie	15
6	E-00804-0002	Connector Housing Cap	1
7	E-00804-0004	Connector Housing Cap	1
8	E-00807	Socket, Amp 24-18, Strip	5
9	E-00807-0006	Pin, Amp 24-18, Strip	3

REF	PART #	DESCRIPTION	QTY
10	E-00808-0004	Connector Housing Plug	1
11	M-01777-5635	Shrink Tubing 1 1/2"	A/R
12	P-09082-0003	Ballast/Starter Fluorescent Tube Bracket	1
13	R-00111-0008	Grommet	2
14	TFPP-00832-1104	Screw, 8-32 X 1/4 Thd Form Phil Pan Hd	2
15	WIP-ES202-1880	PVC, Solid 18 AWG Black Type TEW	A/R
16	WIP-ES202-1850	PVC, Solid 18 AWG White Type TEW	A/R
17	P-00150-0291	Insulator, Polycarbonate CE97	2
18	P-00150-0292	Insulator, Polycarbonate CE97	1

Card Rack/Backplane AS-06604-(SERIES)

☑*Upright*

REF	PART #	DESCRIPTION	QTY	PART #
1	A-06803-0001	MPU Wrap	1	0001
				0004
2	AS-03356-0445	Backplane Board Assembly	1	0001
				0004
3	C-00760	Clip, Tension, Nylon	1	0001
				0004
4	CBL-20275-0001	MPU Door Switch Cable	1	0004
5	E-00108-0387	Bill Acceptor Door Switch	1	0004
6	E-00647-0004	Tie Wrap	2	0004
7	LSPP-00440-1108	Screw, Mach with Lock Phil Pan Hd	2	0004
8	LSPP-00632-1106	Screw, Mach with Lock Phil Pan Hd	12	0001
				0004
9	M-03001-0001	Grounding Strip	1	0001
				0004
10	P-06006-0004	MPU Housing Cover	1	0001
				0004
11	TFPP-00832-1104	Screw, 8-32 X 1/4 Thd Form Phil Pan Hd	6	0001
				0004

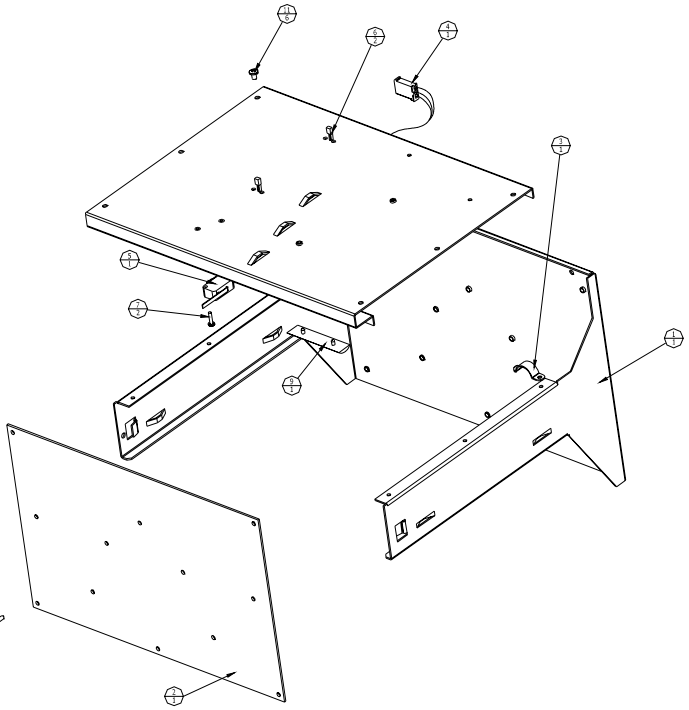

AVAILABILITY:

P/N	DESCRIPTON
AS-06604-0001	**Card Rack/Backplane**
AS-06604-0004	**Card Rack/Backplane (South Africa)**

©2003 Bally Gaming and Systems

ProSlot® 6000

Cabinet Assembly

Card Rack Door/MPU Board AS-06605-(SERIES)
☑*Upright*

AVAILABILITY:

P/N	DESCRIPTON
AS-06605-0001	Card Rack Door/MPU Board
‖ AS-06605-0003	Card Rack Door/MPU Board
‖ AS-06605-0005	Card Rack Door/MPU Board, DataVault™ (France)
‖ AS-06605-0007	Card Rack Door/MPU Board (South Africa)
‖ AS-06605-0014	MPU Board/Tray, 2 Lock

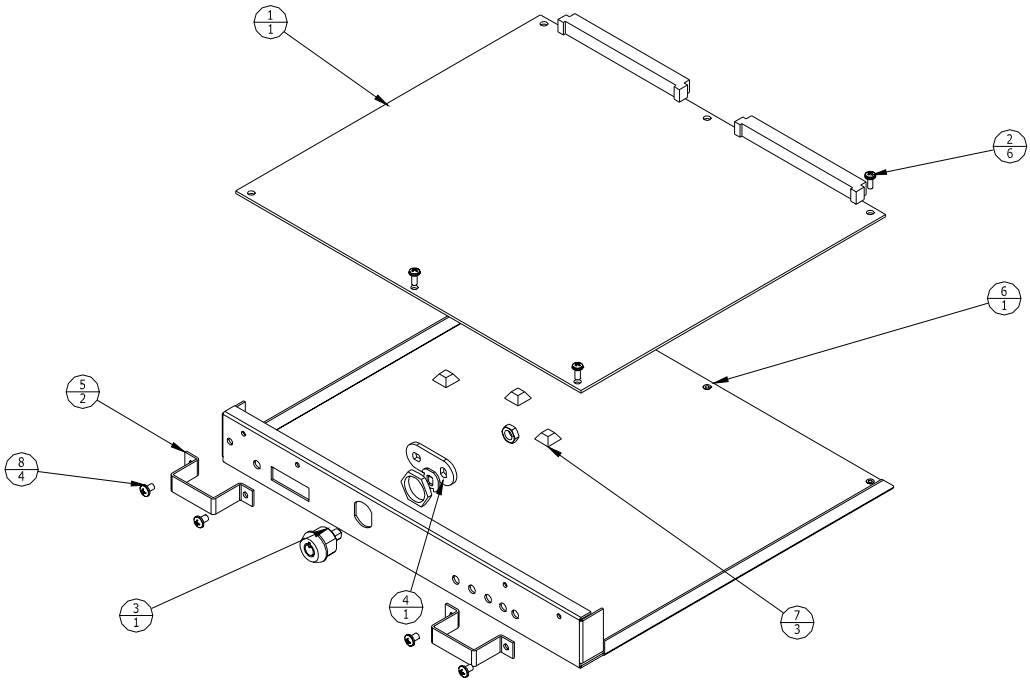

REF	PART #	DESCRIPTION	QTY	PART #
1	AS-03356-0424	MPU Board Assembly	1	-0001
				-0007
				-0014
	AS-03356-0438	MPU Board Assembly	1	-0003
	AS-03356-0478	MPU Board Assembly	1	-0005
2	LSPP-00632-1106	Screw, Mach with Lock Phil Pan Hd	6	-0001
				-0003
				-0005
				-0007
				-0014
3	M-00281-162A	Lock, No Cam, Door/Bill Acceptor	1	-0001
				-0003
				-0005
				-0014
	M-00281-0173	Lock, Thumb-Turn, Door, No Key	1	-0007
4	P-00758-0094	Cam, Bill Acceptor Stacker, MO281-0132	1	-0001
				-0003
				-0005
				-0007
				-0014
	S-00231-1003	Spacer, Door Lock (Not Shown)	1	-0009

REF	PART #	DESCRIPTION	QTY	PART #
5	P-06264-0332	Card Rack Door Handle	2	-0001
				-0003
				-0005
				-0007
				-0014
6	P-06802-0001	MPU Board Tray	1	-0001
				-0003
				-0005
				-0007
	P-06802-0005	MPU Board Tray	1	-0014
7	R-00409	Bumper	3	-0001
				-0003
				-0005
				-0007
				-0014
8	TFPP-00832-1104	Screw, 8-32 X 1/4 Thd Form Phil Pan Hd	4	-0001
				-0003
				-0005
				-0007
				-0014
	S-00231-1035	Spacer, .87OD X .76ID X .125 THK (Not Shown)	1	-0014

©2003 Bally Gaming and Systems

ProSlot® 6000

Cabinet Assembly

AVAILABILITY:

PART #	DESCRIPTON	UP	SL	S6E
‖ AS-04238-0055	Power Supply, Low Leakage	X	X	X
AS-04238-0065	Power Supply, CSA	X	X	

MPU Board/Power Supply/PDU AS-04238-(SERIES)
☑*Upright* / ☑*Slant* / ☑*S6E*

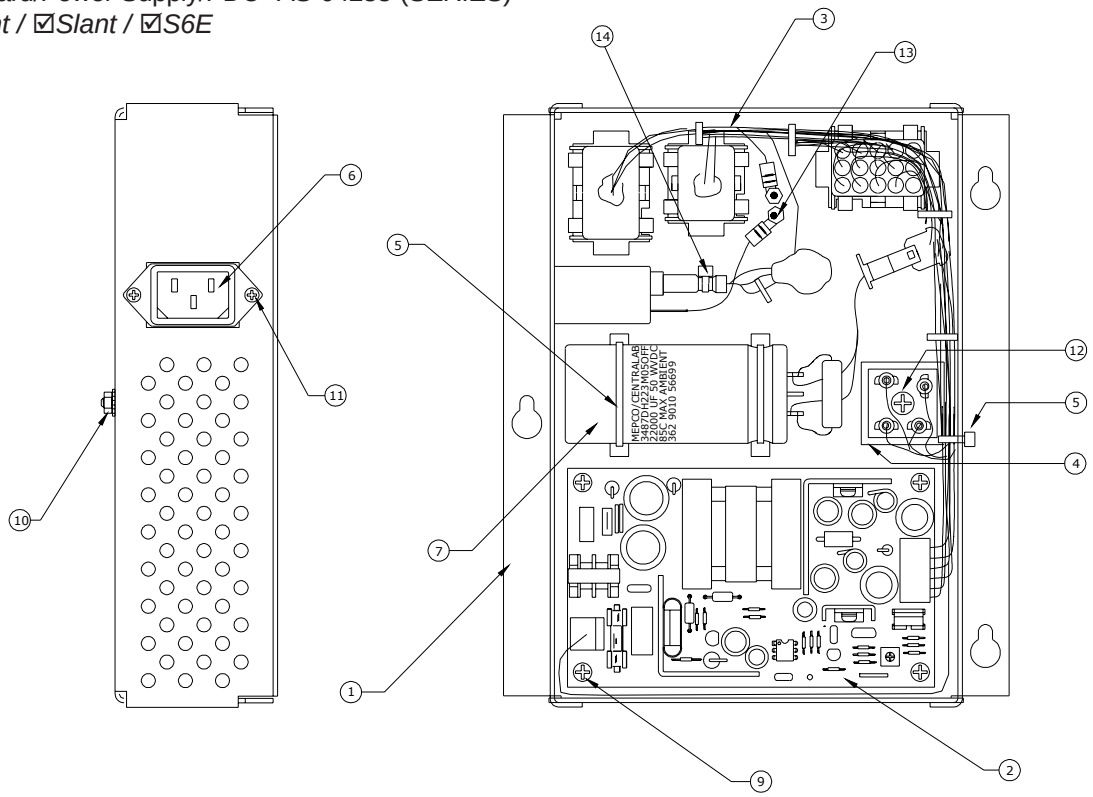

REF	PART #	DESCRIPTION	QTY	PART #
1	A-04345-0003	Assembly, Power Supply Case	1	0055
				0065
2	AS-02982-0035	Assembly, Power Supply PCB, CE97	1	0055
	AS-02982-0030	Assembly, Power Supply Board	1	0065
3	CBL-30180-0001	Cable, Power Supply, CE97	1	0055
				0065
4	E-00602-0016	Rectifier, Bridge	1	0055
				0065
5	E-00647-0005	Cable Tie	3	0055
				0065
6	E-00664-0558	Assembly, Line Filter, Low Leakage	1	0055
	E-00664-0594	Assembly, EMI Line Filter, Standard/CSA	1	0065
7	E-00664-0545	Assembly, Capacitor with Connector, CE97	1	0055
				0065
8	LBL-00183-0003	Label, Power Supply, 105-260VAC (Not Shown)	1	0055
				0065

REF	PART #	DESCRIPTION	QTY	PART #
9	LSPP-00632-1104	Screw	4	0055
				0065
10	NLS-00832-1112	Nut	1	0055
				0065
11	TFPP-00440-1106	Screw	2	0055
				0065
12	TFPP-00832-1112	Screw	1	0055
				0065
13	NLS-00832-2112	Nut	2	0055
				0065
14	E-00647-0004	Cable Tie	1	0055
				0065
15	LBL-00245-0001	Label, Ground Safety (Not Shown)	1	0055
				0065
16	LBL-00246-0004	Label, Low Leakage (Not Shown)	1	0055

Feature Glass Spring Stop Bracket P-06004-0026
☑*Upright*

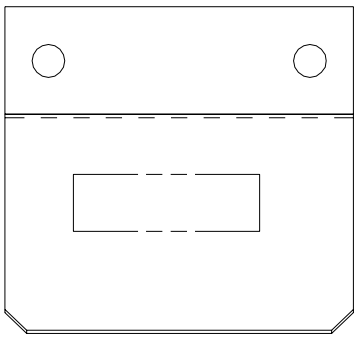

Feature Glass Retainer Spring P-06005-0001
☑*Upright*

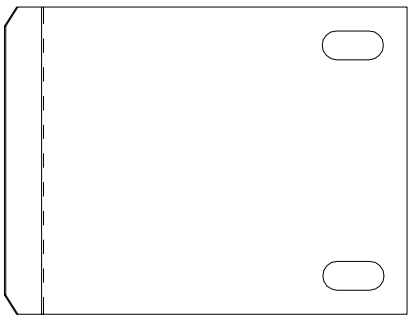

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Cabinet Assembly

Transformer E-00122-(SERIES)
☑*Upright* / ☑*Slant* / ☑*S6E*

Transformer, 120VAC, 60HZ
E-00122-0217 ☑*Upright* / ☑*Slant* / ☑*S6E*

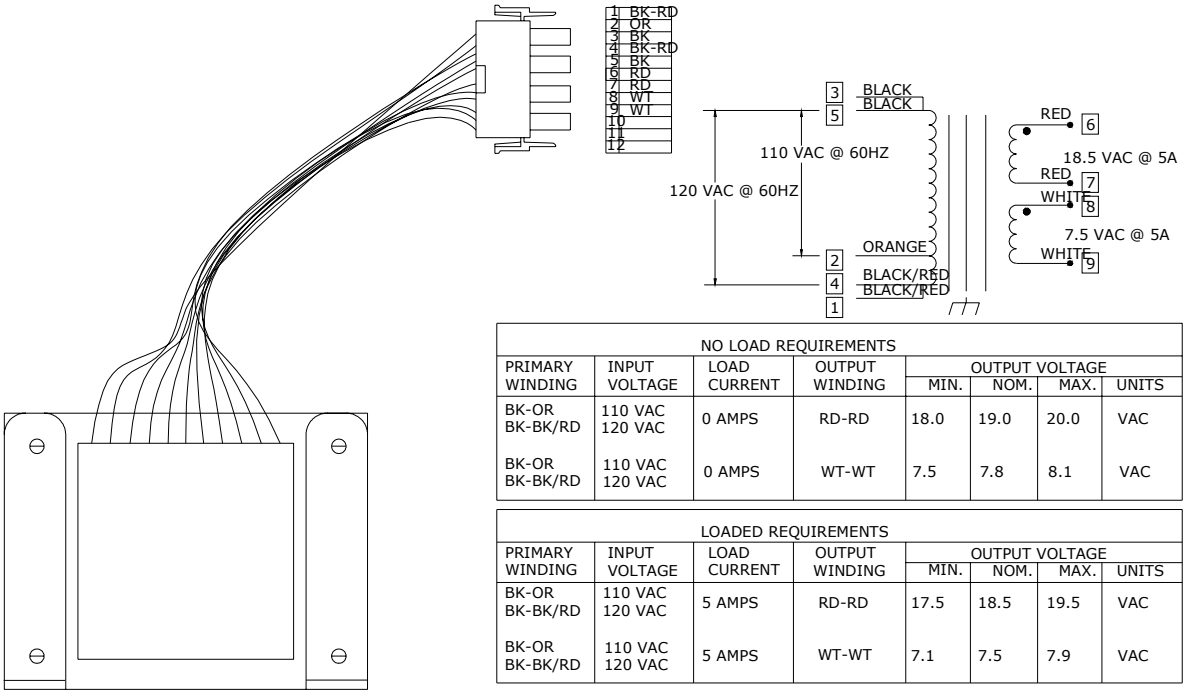

NO LOAD REQUIREMENTS							
PRIMARY WINDING	INPUT VOLTAGE	LOAD CURRENT	OUTPUT WINDING	OUTPUT VOLTAGE MIN.	NOM.	MAX.	UNITS
BK-OR BK-BK/RD	110 VAC 120 VAC	0 AMPS	RD-RD	18.0	19.0	20.0	VAC
BK-OR BK-BK/RD	110 VAC 120 VAC	0 AMPS	WT-WT	7.5	7.8	8.1	VAC

LOADED REQUIREMENTS							
PRIMARY WINDING	INPUT VOLTAGE	LOAD CURRENT	OUTPUT WINDING	OUTPUT VOLTAGE MIN.	NOM.	MAX.	UNITS
BK-OR BK-BK/RD	110 VAC 120 VAC	5 AMPS	RD-RD	17.5	18.5	19.5	VAC
BK-OR BK-BK/RD	110 VAC 120 VAC	5 AMPS	WT-WT	7.1	7.5	7.9	VAC

Transformer, 220VAC, 50/60HZ.
E-00122-0218 ☑*Upright* / ☑*Slant* / ☑*S6E*

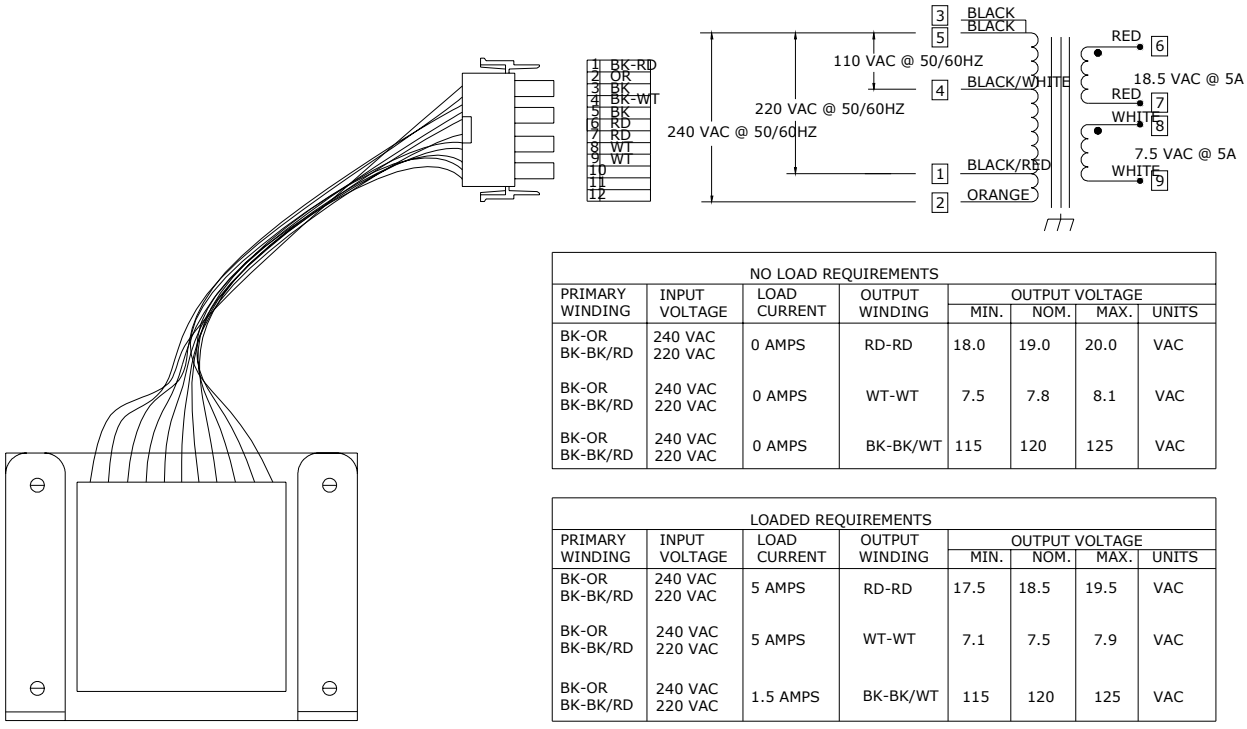

NO LOAD REQUIREMENTS							
PRIMARY WINDING	INPUT VOLTAGE	LOAD CURRENT	OUTPUT WINDING	OUTPUT VOLTAGE MIN.	NOM.	MAX.	UNITS
BK-OR BK-BK/RD	240 VAC 220 VAC	0 AMPS	RD-RD	18.0	19.0	20.0	VAC
BK-OR BK-BK/RD	240 VAC 220 VAC	0 AMPS	WT-WT	7.5	7.8	8.1	VAC
BK-OR BK-BK/RD	240 VAC 220 VAC	0 AMPS	BK-BK/WT	115	120	125	VAC

LOADED REQUIREMENTS							
PRIMARY WINDING	INPUT VOLTAGE	LOAD CURRENT	OUTPUT WINDING	OUTPUT VOLTAGE MIN.	NOM.	MAX.	UNITS
BK-OR BK-BK/RD	240 VAC 220 VAC	5 AMPS	RD-RD	17.5	18.5	19.5	VAC
BK-OR BK-BK/RD	240 VAC 220 VAC	5 AMPS	WT-WT	7.1	7.5	7.9	VAC
BK-OR BK-BK/RD	240 VAC 220 VAC	1.5 AMPS	BK-BK/WT	115	120	125	VAC

| - Revised, || - New

©2003 Bally Gaming and Systems

Cabinet Assembly

Transformer E-00122-(SERIES)

☑*Upright* / ☑*Slant* / ☑*S6E*

Transformer, 100-240VAC, 50/60 Universal Input
E-00122-0229 ☑*Upright*

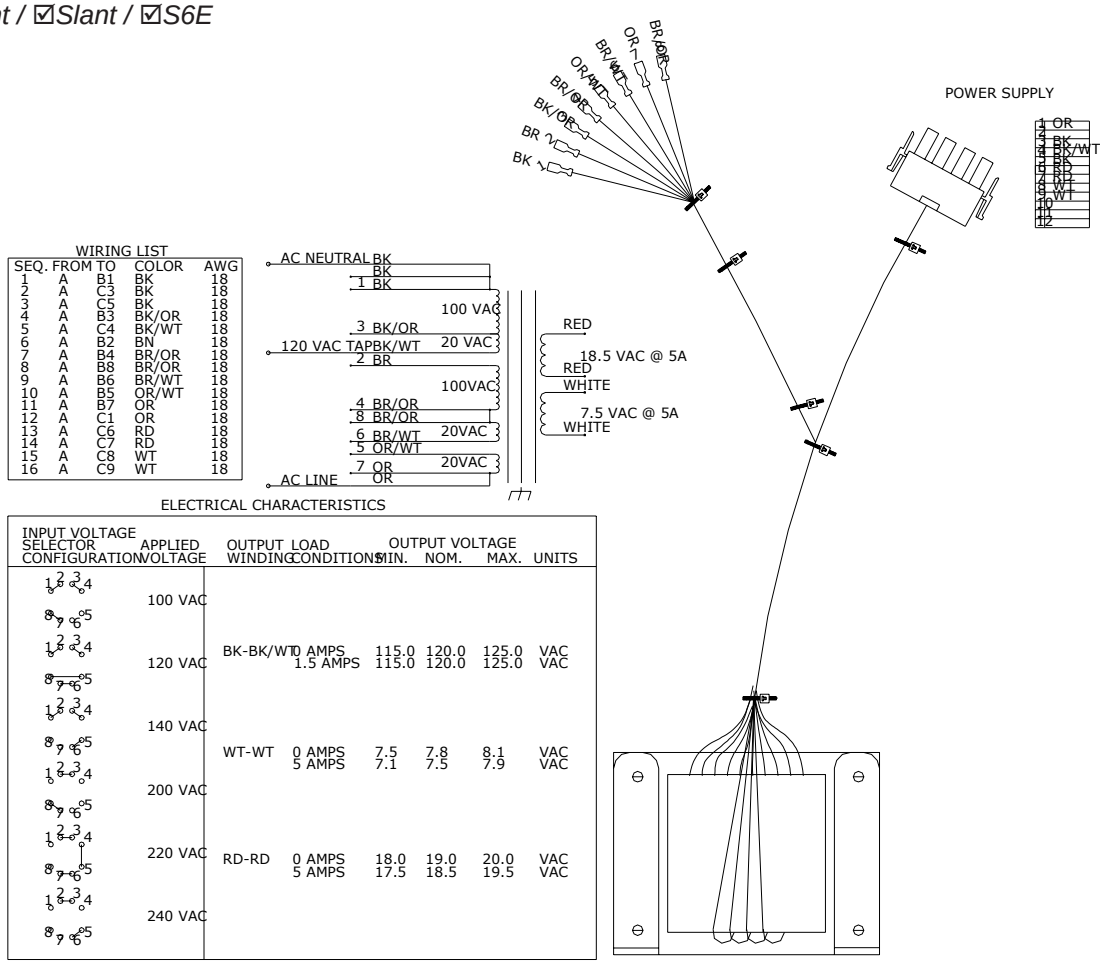

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE SELECTOR CONFIGURATION	APPLIED VOLTAGE	OUTPUT WINDING	LOAD CONDITIONS	OUTPUT VOLTAGE MIN.	NOM.	MAX.	UNITS
1 2 3 4 / 8 7 6 5	100 VAC						
1 2 3 4 / 8 7 6 5	120 VAC	BK-BK/WT	0 AMPS	115.0	120.0	125.0	VAC
			1.5 AMPS	115.0	120.0	125.0	VAC
1 2 3 4 / 8 7 6 5	140 VAC						
1 2 3 4 / 8 7 6 5	200 VAC	WT-WT	0 AMPS	7.5	7.8	8.1	VAC
			5 AMPS	7.1	7.5	7.9	VAC
1 2 3 4 / 8 7 6 5	220 VAC	RD-RD	0 AMPS	18.0	19.0	20.0	VAC
			5 AMPS	17.5	18.5	19.5	VAC
1 2 3 4 / 8 7 6 5	240 VAC						

Transformer, 115/230-6VAC, 50/60HZ (Air Force)
E-00122-0231 ☑*Upright*

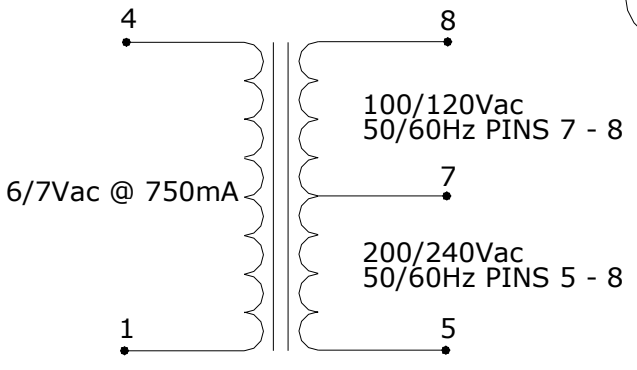

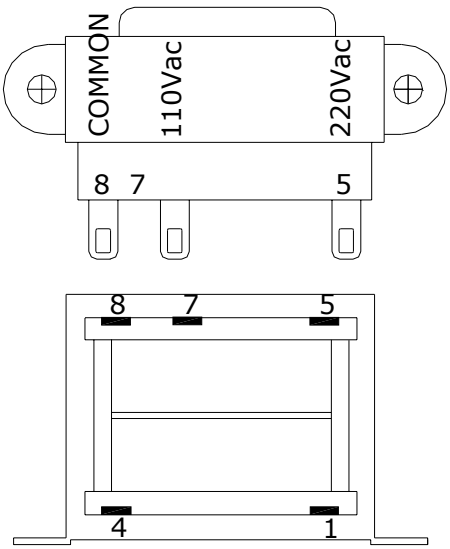

| - Revised, || - New

ProSlot® 6000

Cabinet Assembly

Transformer E-00122-(SERIES)
☑*Upright* / ☑*Slant* / ☑*S6E*



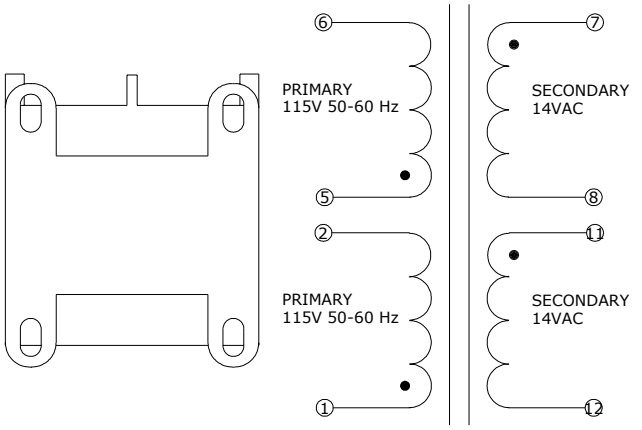

Transformer, 14/28VAC, 130VAC
E-00122-0249 ☑*Upright*

Convenience Outlet AS-03268-(SERIES)
☑*Upright* / ☑*Slant* / ☑*S6E*

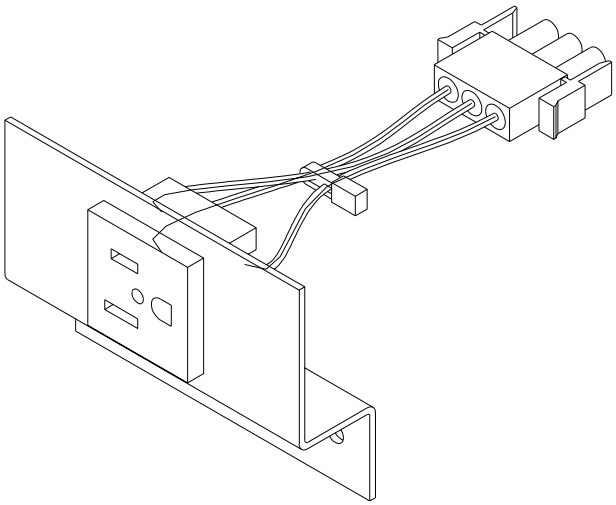

Convenience Outlet (United States)
AS-03268-0004

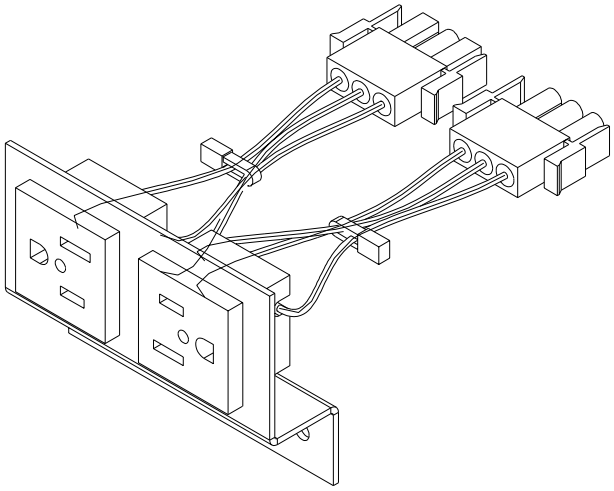

Convenience Outlet, Dual, 120VAC
AS-03268-0007

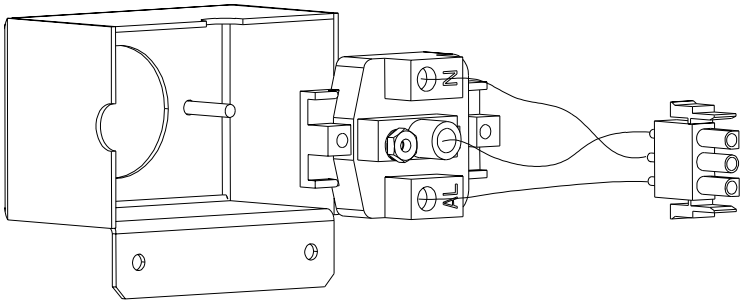

Convenience Outlet (Argentina/Australia)
AS-03268-0013

AVAILABILITY:

	PART #	DESCRIPTON	UP	SL	S6E
‖	AS-03268-0003	Convenience Outlet (Italy)	X	X	X
‖	AS-03268-0008	Convenience Outlet (United Kingdom)	X	X	X
‖	AS-03268-0011	Convenience Outlet (United States)	X	X	X

©2003 Bally Gaming and Systems

ProSlot® 6000

Cabinet Assembly

|| Line Cord Assembly E-00126-(SERIES)
☑*Upright* / ☑*Slant* / ☑*S6E*

UP	SL	S6E	PART #	DESCRIPTION	VOLTS	PLUG	ARGENTINA	AUSTRALIA	AUSTRIA	BELGIUM	CANADA	DENMARK	FINLAND	FRANCE	GERMANY	HOLLAND	IRELAND	ITALY	JAPAN	NETHERLANDS	NEW ZEALAND	NORWAY	SWEDEN	UNITED KINGDOM	UNITED STATES	SOUTH AFRICA	SWITZERLAND
	X		E-00126-0116	Line Cord, Modular, 3' (Domestic)	120	E & H					X														X		
X	X	X	E-00126-0120	Line Cord, 8'	220	D & H												X									
X	X	X	E-00126-0121	Line Cord, 8' (Domestic)	120	E & H					X														X		
X	X	X	E-00126-0122	Line Cord, 2.5M (Europe)	220	N & H			X	X			X	X	X					X		X	X				
X	X	X	E-00126-0123	Line Cord, 8'2"	240	C & H											X							X			
X	X	X	E-00126-0132	Cordset, 8' NEMA 6-15P & IEC 320	230	F & H					X														X		
X	X	X	E-00126-0143	Cordset, 8.2'	240	B & H		X													X						
X	X	X	E-00126-0157	Cordset, 8.2', Old British (BS 546 & IEC 320/C13)	250	U & H																				X	
X	X	X	E-00126-0167	Line Cord, 8', IRAM 2073	250	V & H	X																				
X	X	X	E-00126-0173	Line Cord, 6'	250	X & H																					X

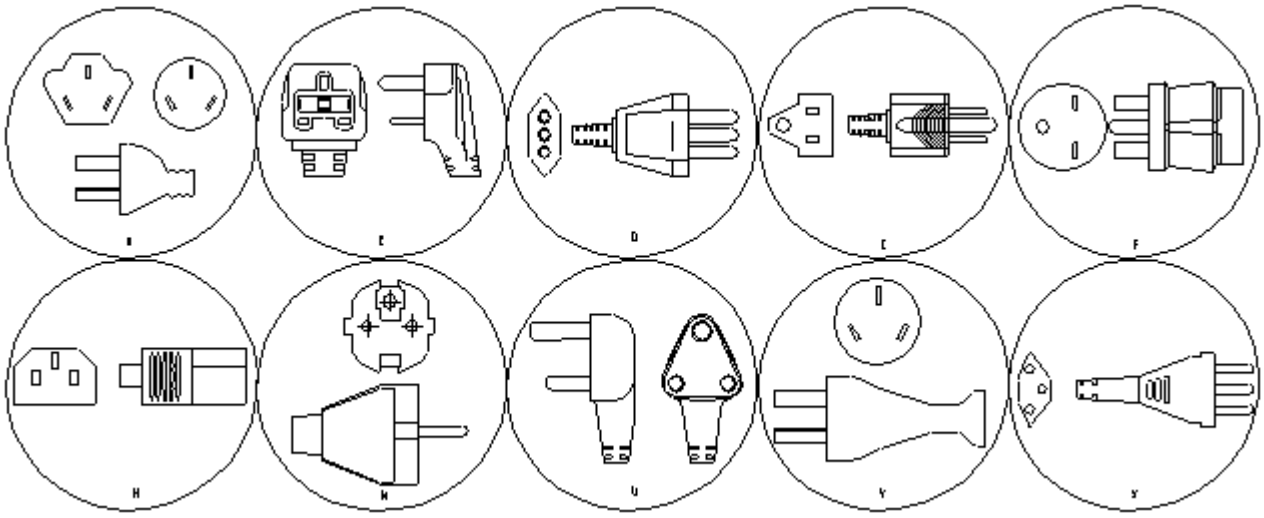

Bell and Receptacle E-00664-0466
☑*Upright* / ☑*Slant* / ☑*S6E*

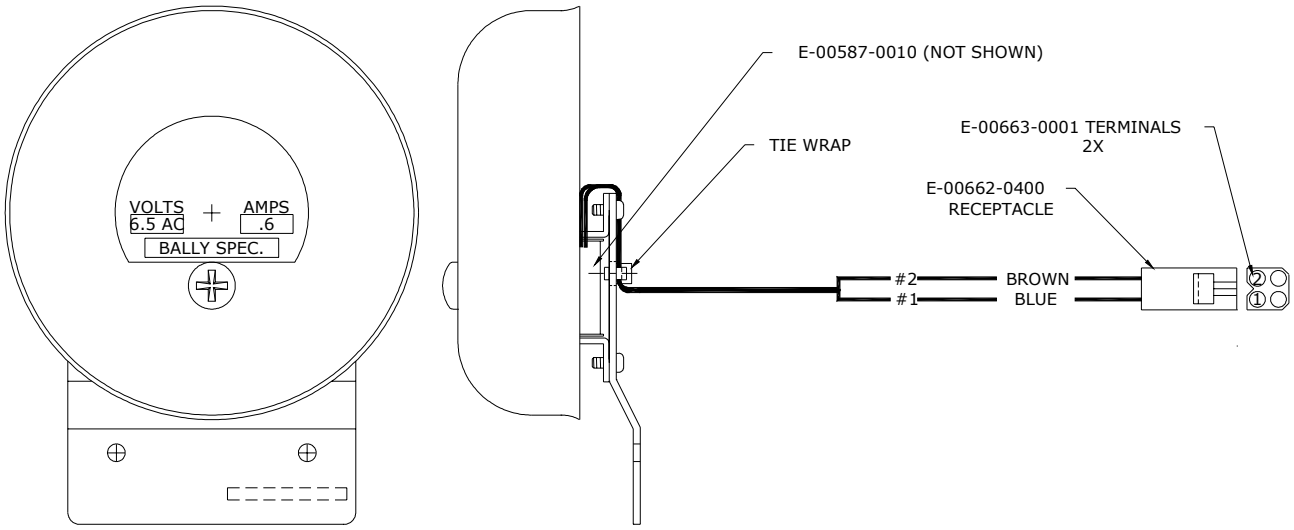

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Cabinet Assembly

Speaker E-00281-(SERIES)
☑*Upright* / ☑*Slant*

4-Inch Round Speaker, 4-OHM
E-00281-0027 ☑*Upright* / ☑*Slant*

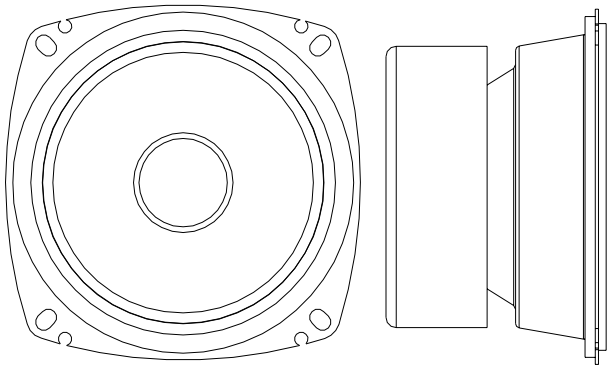

‖ *3-Inch Speaker, Oval Top*
E-00281-0031 ☑*Upright*

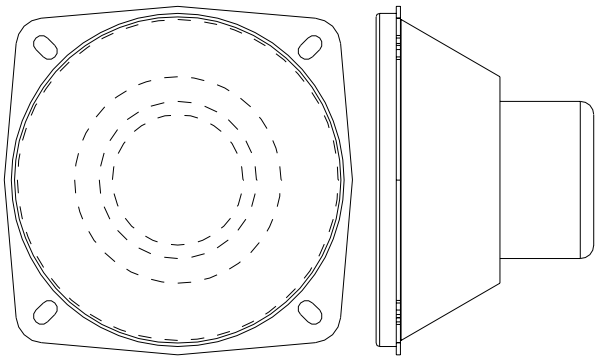

Illumination E-00125-(SERIES) / E-0041X-(SERIES)
☑*Upright* / ☑*Slant* / ☑*S6E*

PART #	DESCRIPTION	UP	SL	S6E
E-00411-0008	Fluorescent Starter, FS-2	X		X
E-00411-0009	Fluorescent Starter 110/220V, 4-22W	X	X	X
E-00411-0010	Fluorescent Starter FS-2 CE97	X	X	X
E-00412-0013	Lamp, Fluorescent, F15T8/CW	X		
‖ E-00412-0014	Lamp, Fluorescent, F14T8/ CW		X	
E-00412-0019	Lamp, Fluorescent, 24-Inch		X	X
‖ E-00412-0020	Lamp, Fluorescent, 8-Inch Round	X		
E-00412-0021	lamp, Lamp, Fluorescent, 11.5-Inch, 8W, 11.5-Inch, 8W	X		
‖ E-00412-0025	Lamp, Fluorescent, F4T5/ CW	X		
E-00125-0084	Lamp, #86, 6.3V, T1-3/4, Wedge Base (Insert Coin)	X	X	X
‖ E-00125-0089	Lamp, Incandescent, #159	X	X	X
E-00125-0099	Lamp, #74, 4, 14V, T1-3/4, Wedge Base (Denomination)	X	X	X
‖ E-00125-0113	Lamp, 5MM, #PL37	X		
‖ E-00125-0114	Lamp, 10MM, #CM3504	X		
‖ E-00125-0115	Lamp, Fluorescent, 16-Inch, Round, #703-0008	X		
‖ E-00125-0121	Lamp, JKL 112, 12V, Xenon	X		
‖ E-00125-0123	Lamp, #658, T3-1/4, 14V, Wedge Base	X		

Tower Lens Cover Selection M-02100-(SERIES)
☑*Upright* / ☑*Slant* / ☑*S6E*

COLOR	TOWER LENS COVER, SMALL				
	TOP PART #	BOTTOM PART #	UP	SL	S6E
White	M-02100-0301	M-02100-0401	X	X	X
Red	M-02100-0302	M-02100-0402	X	X	X
Blue	M-02100-0303	M-02100-0403	X	X	X
Yellow	M-02100-0304	M-02100-0404	X	X	X
Green	M-02100-0305	M-02100-0405	X	X	X
Coral	M-02100-0306	M-02100-0406	X	X	X
Purple	M-02100-0307	M-02100-0407	X	X	X
Orange	M-02100-0308	M-02100-0408	X	X	X
Blue	M-02100-0309	M-02100-0409	X	X	X
Teal	M-02100-0310	M-02100-0410	X	X	X
Powder Blue	M-02100-0311	M-02100-0411	X	X	X
Pink	M-02100-0312	M-02100-0412	X	X	X
Amber	M-02100-0313	M-02100-0413	X	X	X
Grey	M-02100-0314	M-02100-0414	X	X	X

COLOR	TOWER LENS COVER, LARGE				
	TOP PART #	BOTTOM PART #	UP	SL	S6E
White	M-02100-0101	M-02100-0201	X	X	X
Red	M-02100-0102	M-02100-0202	X	X	X
Blue	M-02100-0103	M-02100-0203	X	X	X
Yellow	M-02100-0104	M-02100-0204	X	X	X
Green	M-02100-0105	M-02100-0205	X	X	X
Coral	M-02100-0106	M-02100-0206	X	X	X
Purple	M-02100-0107	M-02100-0207	X	X	X
Orange	M-02100-0108	M-02100-0208	X	X	X
Blue	M-02100-0109	M-02100-0209	X	X	X
Teal	M-02100-0110	M-02100-0210	X	X	X
Powder Blue	M-02100-0111	M-02100-0211	X	X	X
Pink	M-02100-0112	M-02100-0212	X	X	X
Amber	M-02100-0113	M-02100-0213	X	X	X
Grey	M-02100-0114	M-02100-0214	X	X	X

©2003 Bally Gaming and Systems

ProSlot® 6000

Cabinet Assembly

Tower Selections TWRX-(SERIES)

☑*Upright* / ☑*Slant* / ☑*S6E*

AVAILABILITY:

P/N	DESCRIPTON	UP	SL	S6E
M-03097-0001	Tower Base, Wide, Round	X		X
M-03097-0007	Tower Base, Brass	X		
M-03097-0008	Tower Base, Wide, Round, Brass	X	X	X
M-03097-0009	Tower Base, To Tell The Truth	X		

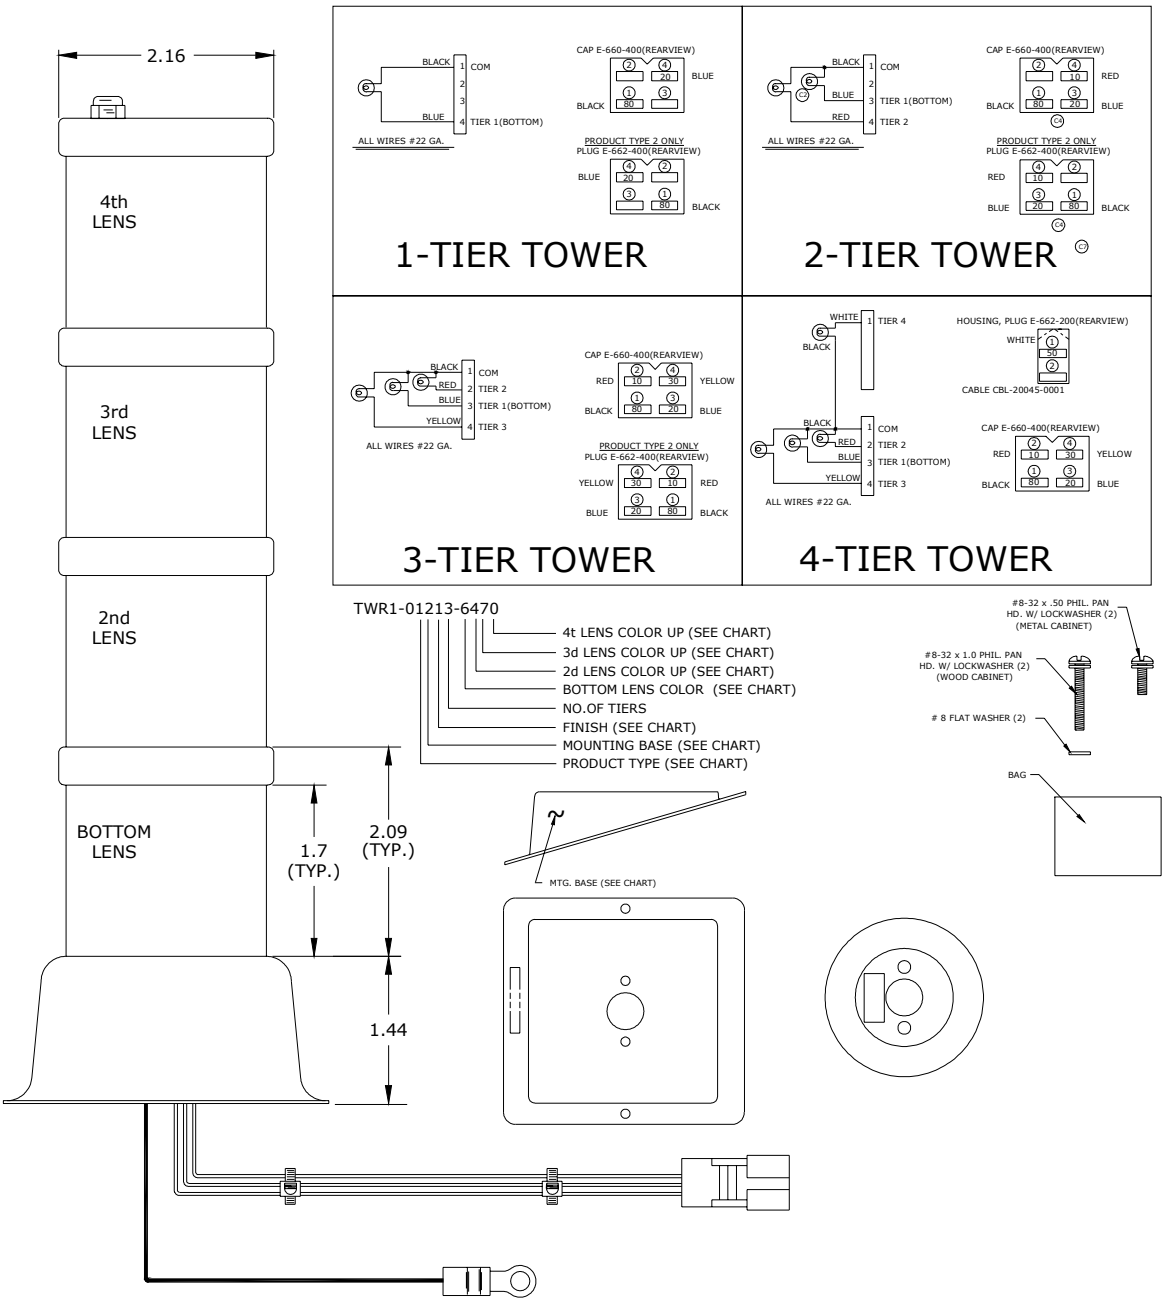

PRODUCT TYPE			PART #	MTG BASE	FINISH	LENS COLOR	DENOM
(1) TWR2	S5000 (6V) V5500 S5500	Use Molex Cap # 03-09-2049 Use Molex Pin # 02-09-2101 Use Lamp # 55 (6-8V) 0.4 Amp	E-00660-0400 E-00661-0001	0-No Base Flat Top 1-With Base Angled Top *-Round Top See Cabinet Assembly	1-Chrome 2-Brass	0-No Lens 1-White 2-Red 3-Blue 4-Yellow 5-Green 6-Coral 7-Purple 8-Orange 9-SapphireBlue	 $100 1¢/5¢ $1 25¢/Token 25¢ 10¢ 50¢ $10/$5/$25 Obsolete-See #6 #383
(2) TWR2	V5000 (24V) Poker 2ND Chance Black Jack Keno	Use Molex Plug No 03-09-1049 Use Molex Pin # 02-09-1102 Use Lamp No 313 (28V) .17 Amp	E-00662-0400 E-00663-0001				
(3) TWR2	Oasis V72	Use Molex Cap # 03-09-2049 Use Molex Pin # 02-09-2101 Use Lamp # 73 (14V) Or Elec Equiv	E-00660-0400 E-00661-0001 E-00120-0108				

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Cabinet Assembly

Tower Selections (Cont.) TWRX-(SERIES)
☑*Upright* / ☑*Slant* / ☑*S6E*

AVAILABILITY:

P/N	DESCRIPTON	UP	SL	S6E
M-03097-0001	Tower Base, Wide, Round	X		X
M-03097-0007	Tower Base, Brass	X		
M-03097-0008	Tower Base, Wide, Round, Brass	X	X	X
M-03097-0009	Tower Base, To Tell The Truth	X		

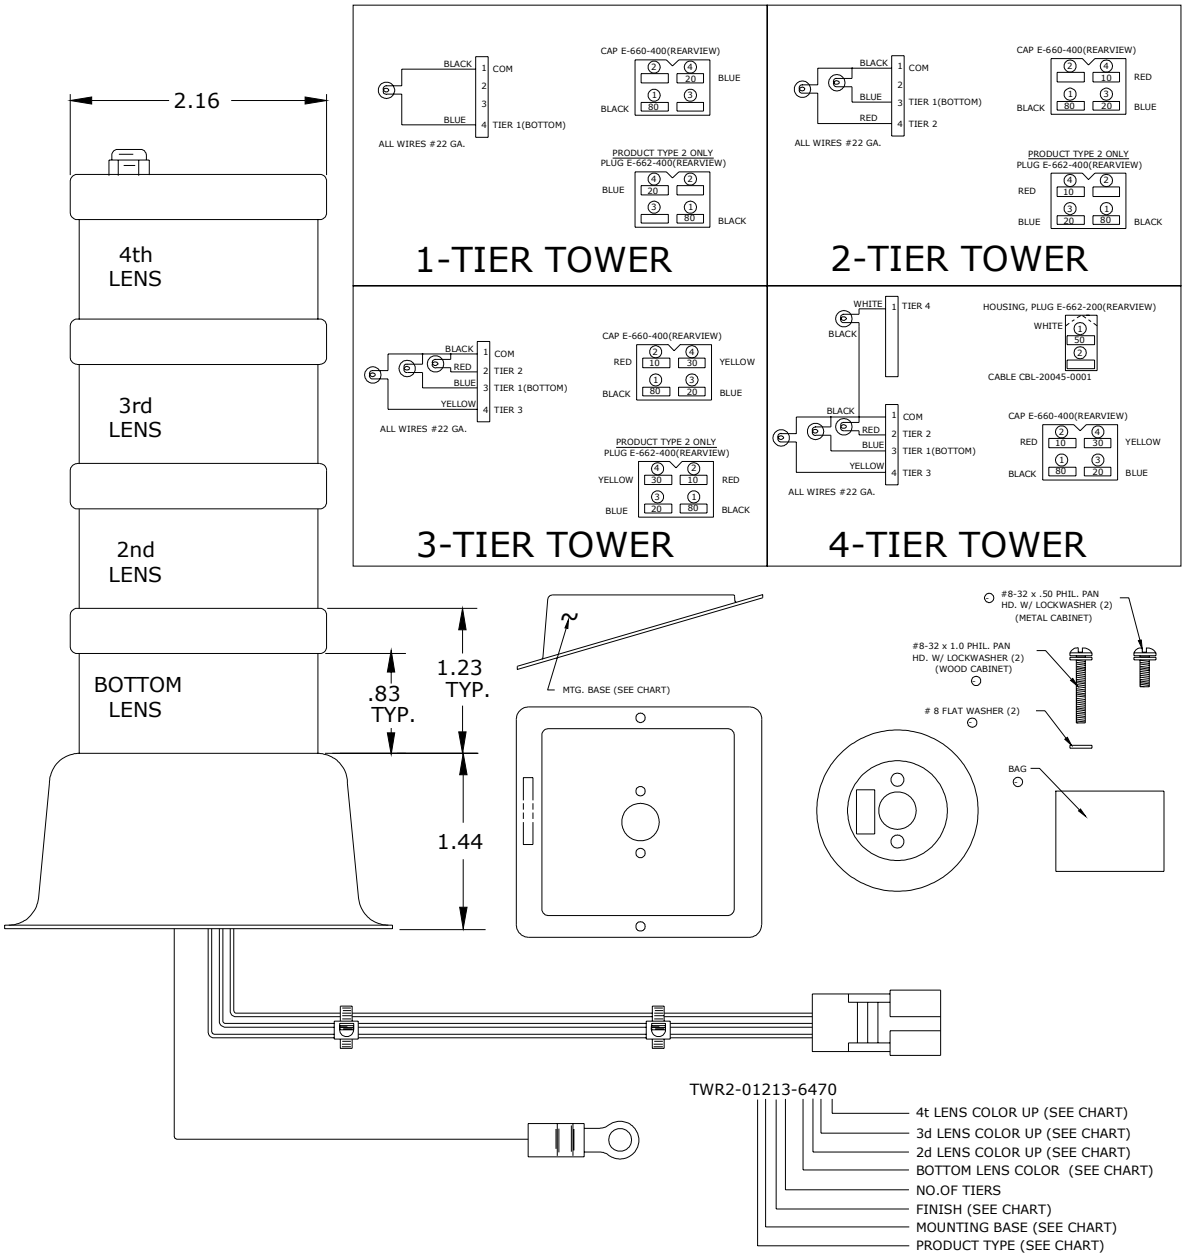

PRODUCT TYPE			PART #	MTG BASE	FINISH	LENS COLOR	DENOM
(1) TWR2	S5000 (6V) V5500 S5500	Use Molex Cap # 03-09-2049 Use Molex Pin # 02-09-2101 Use Lamp # 55 (6-8V) 0.4 Amp	E-00660-0400 E-00661-0001	0-No Base Flat Top 1-With Base Angled Top *-Round Top See Cabinet Assembly	1-Chrome 2-Brass	0-No Lens 1-White 2-Red 3-Blue 4-Yellow 5-Green 6-Coral 7-Purple 8-Orange 9-SapphireBlue	 $100 1¢/5¢ $1 25¢/Token 25¢ 10¢ 50¢ $10/$5/$25 Obsolete-See #6 #383
(2) TWR2	V5000 (24V) Poker 2ND Chance Black Jack Keno	Use Molex Plug No 03-09-1049 Use Molex Pin # 02-09-1102 Use Lamp No 313 (28V) .17 Amp	E-00662-0400 E-00663-0001				
(3) TWR2	Oasis V72	Use Molex Cap # 03-09-2049 Use Molex Pin # 02-09-2101 Use Lamp # 73 (14V) Or Elec Equiv	E-00660-0400 E-00661-0001 E-00120-0108				

| - Revised, || - New

©2003 Bally Gaming and Systems

Cabinet Assembly

Meter Assembly AS-04225-(SERIES)
☑*Upright*

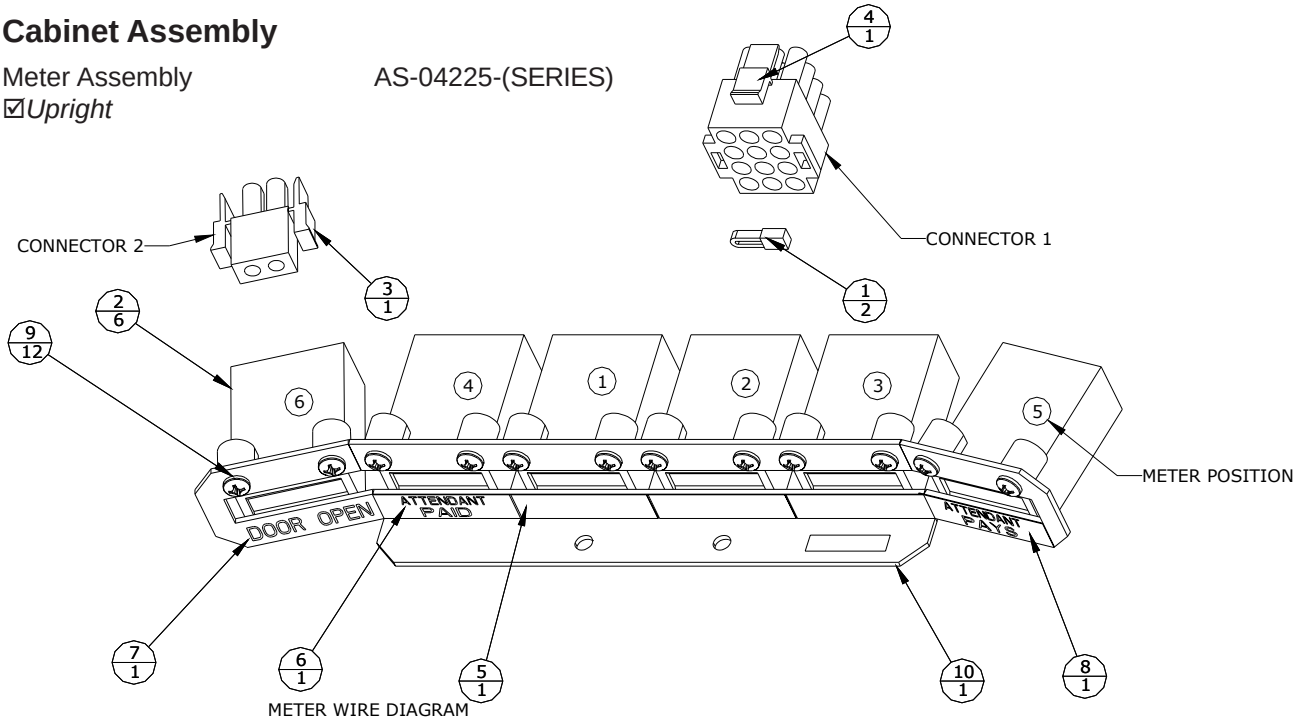

METER WIRE DIAGRAM

METER 1 WIRE 1, TO CONNECTOR 1 PIN 1
WIRE 2, TO CONNECTOR 1 PIN 2
METER 2 WIRE 1, TO CONNECTOR 1 PIN 4
WIRE 2, TO CONNECTOR 1 PIN 5
METER 3 WIRE 1, TO CONNECTOR 1 PIN 7
WIRE 2, TO CONNECTOR 1 PIN 8
METER 4 WIRE 1, TO CONNECTOR 1 PIN 10
WIRE 2, TO CONNECTOR 1 PIN 11
METER 5 WIRE 1, TO CONNECTOR 1 PIN 9
WIRE 2, TO CONNECTOR 1 PIN 12
METER 6 WIRE 1, TO CONNECTOR 2 PIN 1
WIRE 2, TO CONNECTOR 2 PIN 2

REF	PART #	DESCRIPTION	QTY	PART #
1	E-00647-0004	Tie Wrap	2	0020
			1	0064
			2	0068
			1	0089
2	E-00664-0491	Assembly, Meter/Terminal Panel Mount	3	0020
		Assembly, 7-Digit Meter with 8-Inch Lead	3	0064
			6	0068
			5	0089
3	E-00808-0002	Connector Housing Plug	1	0068
4	E-00808-0012	Connector Housing Plug	1	0020
				0064
				0068
				0089

REF	PART #	DESCRIPTION	QTY	PART #
5	LBL-00180-0003	Label, 3-Meter, Ticket In/Ticket Out/Drop	1	0020
				0068
6	LBL-00180-0004	Label, 4th Meter Attendant Paid	1	0068
7	LBL-00217-0001	Label, Meter, Door Open	1	0068
8	LBL-00219-0001	Label, Meter, Attendant Pays	1	0068
9	LSPP-M0350-1104	Screw, Metric Mach with Lock Phil Pan Hd	6	0020
			6	0064
			12	0068
			10	0089
10	P-06665-1180	Bracket, Meter Mounting	1	0020
	P-06004-0019	Bracket, Meter Mounting	1	0064
	P-06004-0035	Bracket, Meter Mounting	1	0068
	P-06004-0192	Bracket, Meter Mounting	1	0089

AVAILABILITY:

P/N	DESCRIPTON
AS-04225-0020	**3-Meter, Ticket In/Ticket Out/Drop**
AS-04225-0064	**3-Meter**
AS-04225-0068	**6-Meter (Puerto Rico)**
AS-04225-0089	**5-Meter (Switzerland)**

©2003 Bally Gaming and Systems

ProSlot® 6000

Cabinet Assembly

|| Hopper Assembly AS-06793-(SERIES)
☑*Upright*

P/N	DESCRIPTION	DIMENSIONS			
		INCH	MM	INCH	MM
AS-06793-0001	Hopper, No Mixer	0.903	22.936	1.011	25.679
AS-06793-0002	Hopper, No Mixer	1.398	35.509	1.500	38.100
AS-06793-0003	Hopper, No Mixer	1.012	25.705	1.131	28.727
AS-06793-0004	Hopper, No Mixer	0.836	21.234	0.902	22.911
AS-06793-0005	Hopper, No Mixer	1.132	28.753	1.231	31.267
AS-06793-0006	Hopper, No Mixer	1.686	42.824	1.783	45.288
AS-06793-0007	Hopper, No Mixer	1.784	45.314	1.875	47.625
AS-06793-0008	Hopper, No Mixer	0.748	18.999	0.835	21.209
AS-06793-0009	Hopper, No Mixer	1.232	31.293	1.303	33.096
AS-06793-0010	Hopper, No Mixer	1.581	40.157	1.648	41.859
AS-06793-0011	Hopper, No Mixer	1.501	38.125	1.580	40.132
AS-06793-0012	Hopper, No Mixer	1.304	33.122	1.348	34.239
AS-06793-0013	Hopper, No Mixer	1.649	41.885	1.685	42.799
AS-06793-0014	Hopper, No Mixer	1.349	34.265	1.397	35.484
AS-06793-0015	Hopper, No Mixer	0.658	16.713	0.747	18.974

P/N	DESCRIPTION	DIMENSIONS			
		INCH	MM	INCH	MM
AS-06793-1001	Hopper with Mixer	0.903	22.936	1.011	25.679
AS-06793-1002	Hopper with Mixer	1.398	35.509	1.500	38.100
AS-06793-1003	Hopper with Mixer	1.012	25.705	1.131	28.727
AS-06793-1004	Hopper with Mixer	0.836	21.234	0.902	22.911
AS-06793-1005	Hopper with Mixer	1.132	28.753	1.231	31.267
AS-06793-1006	Hopper with Mixer	1.686	42.824	1.783	45.288
AS-06793-1007	Hopper with Mixer	1.784	45.314	1.875	47.625
AS-06793-1008	Hopper with Mixer	0.748	18.999	0.835	21.209
AS-06793-1009	Hopper with Mixer	1.232	31.293	1.303	33.096
AS-06793-1010	Hopper with Mixer	1.581	40.157	1.648	41.859
AS-06793-1011	Hopper with Mixer	1.501	38.125	1.580	40.132
AS-06793-1012	Hopper with Mixer	1.304	33.122	1.348	34.239
AS-06793-1013	Hopper with Mixer	1.649	41.885	1.685	42.799
AS-06793-1014	Hopper with Mixer	1.349	34.265	1.397	35.484
AS-06793-1015	Hopper with Mixer	0.658	16.713	0.747	18.974

Handle Assembly AS-02303-(SERIES)
☑*Upright*

PART #	DESCRIPTION
AS-02303-0091	Handle, Bent Chrome/Black Knob
AS-02303-0093	Handle, Bent Chrome/Chrome Potero Knob
AS-02303-0095	Handle, Bent Gold/Shiny Brass Potero Knob
AS-02303-0096	Handle, Bent Gold/Gold Potero Knob
AS-02303-0097	Handle, Bent Chrome/Black Potero Knob
AS-02303-0098	Handle, Extended Chrome/Black Knob
AS-02303-0099	Handle, Extended, Gold/Gold Potero Knob
AS-02303-0100	Handle, Bent Gold/Black Knob

PART #	DESCRIPTION
AS-02303-0101	Handle, Extended Chrome/Chrome Potero Knob
AS-02303-0102	Handle, Bent Chrome/Brass Potero Knob
AS-02303-0103	Handle, Bent Chrome/Yellow Round Knob
AS-02303-0104	Handle, Bent Chrome/Orange Round Knob
AS-02303-0105	Handle, Bent Chrome/Green Round Knob
AS-02303-0106	Handle, Bent Chrome/Pink & Red Round Knob
AS-02303-0107	Handle, Bent Chrome/Neutral Round Knob
M-03095-0001	Hub, Handle, Plastic, Chrome

Handle Mechanism Assembly AS-02301-0028
☑*Upright*

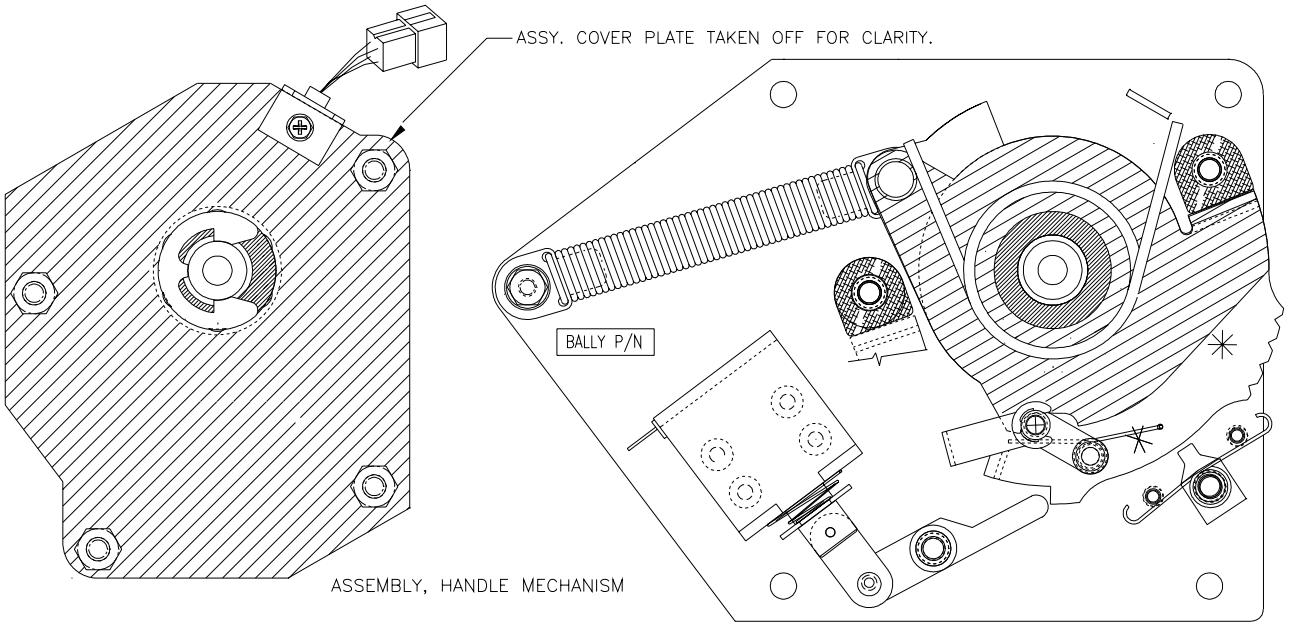

©2003 Bally Gaming and Systems

Cabinet Assembly

Handle Mechanism Assembly (Cont.) AS-02301-0028
☑*Upright*

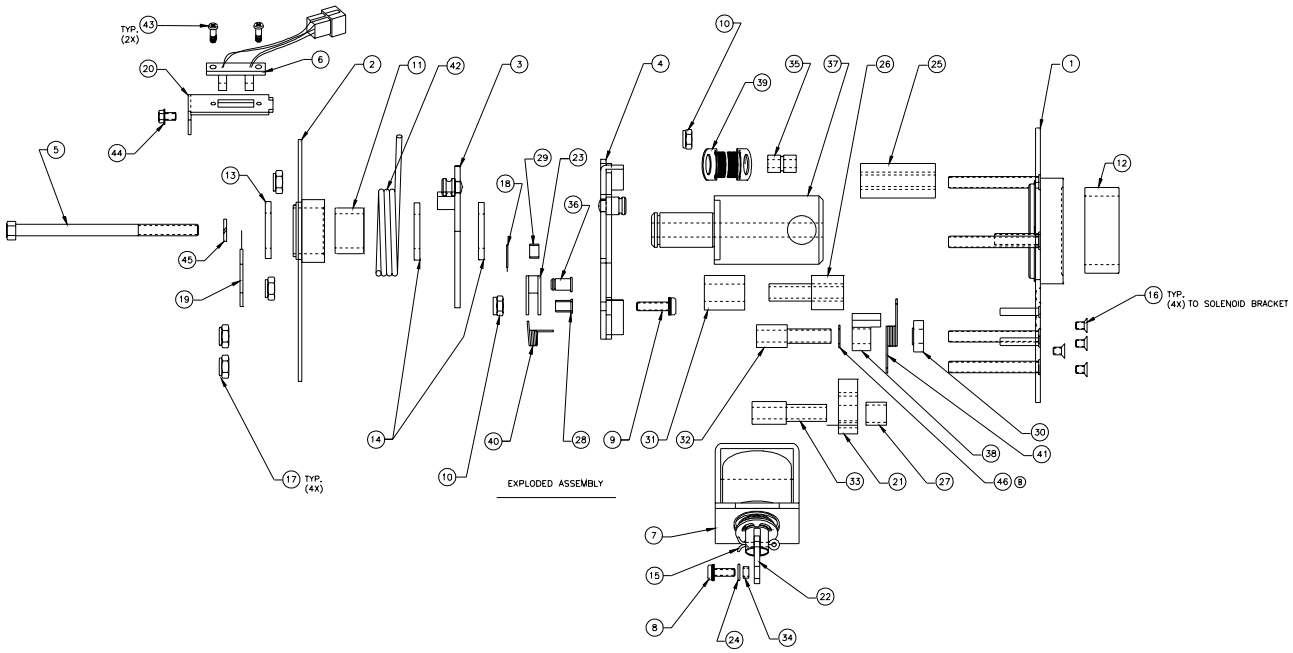

REF	PART #	DESCRIPTION	QTY
1	A-02214-056A	Assembly, Base Plate, Handle Mechanism	1
2	A-03207-031A	Assembly, Cover Plate	1
3	A-04181-064A	Assembly, Drop Cam	1
4	A-04390-001A	Assembly, Ratchet Cam	1
5	CSOH-31224-1160	Screw, Cap Hex Head	1
6	E-00664-0453	Assembly, Optic, Handle Mechanism	1
7	E-00947-0010	Solenoid, Handle Lock Out	1
8	LSPP-00832-1108	Screw, 8-32 X 1/2 Mach with Lock Phil Pan	1
9	LSPP-01032-1112	Screw, 10-32 X 3/4 Mach with Lock Phil Pan Hd	1
10	M-00319-0001	Stop Nut, Elastic 10-32 Tap	2
11	M-00404-0007	Bearing, Torrington #J-1210	1
12	M-00404-0008	Bearing, Torrington #J-2412	1
13	M-00404-0009	Bearing, Thrust #Tb1220	1
14	M-00404-0010	Bearing, Thrust #Tb1222	2
15	M-01721-0007	Cotter Pin, 3/32d X 3/4 Large	1
16	MSPF-00832-1104	Screw, 8-32 X 1/4 Mach Screw Phil Flat Hd	4
17	M-00319-0014	Nut, Stop Elastic	4
18	P-02891-0006	Retaining Ring, .281 Shaft X .025t	1
19	P-02891-0012	Retaining Ring, .750 Shaft X .050t	1
20	P-06665-1186	Bracket, Opto Sensor, Handle Mechanism	1
21	P-07461-008A	Lockout Lever, Handle Mechanism	1
22	P-09319-097A	Link, Solenoid	1
23	P-09351-001A	Lever, Drop Release	1

REF	PART #	DESCRIPTION	QTY
24	PW-00008-0012	Washer, Plain	1
25	R-00521-001A	Bumper, Double, Handle Mechanism	1
26	R-00521-002A	Bumper, Single, Handle Mechanism	1
27	S-00231-988A	Bushing, Lockout Lever	1
28	S-00231-989A	Bushing, Pivot, Trip Lever	1
29	S-00231-990A	Bushing, Latch, Trip Lever	1
30	S-00231-1029	Bushing, Pawl, Handle Mechanism	1
31	S-00231-993A	Sleeve, Wear, Handle Mechanism	1
32	S-00231-1030	Spacer, Pawl, Handle Mechanism	1
33	S-00231-995A	Spacer, Lockout Lever	1
34	S-00231-996A	Bushing, Link, Handle Mechanism	1
35	S-00458-039A	Post, Dual Spring, Handle Mechanism	1
36	S-00458-041A	Pin, Latch, Trip Lever	1
37	S-00736-0025	Shaft, Handle	1
38	S-02100-0004	Pawl, Full Stroke	1
39	SP-00100-0403	Spring Tension, Handle Mechanism	1
40	SP-00399-0055	Spring, Torsion, Handle Mechanism	1
41	SP-00399-0061	Spring, Torsion, Pawl, Handle	1
42	SP-00399-0059	Spring, Torsion, Drop Cam	1
43	TFPP-00440-1104	Screw, 4-40 X 1/4 Thd Form Phil Pan Hd	2
44	TFSS-00832-1104	Screw, 8-32 X 1/4 Thd Form Washer Hd	1
45	M-01705-0014	Lock washer, Split	1
46	S-00231-1037	Shim, Brass Wear, Ratchet Pawl	1

©2003 Bally Gaming and Systems

ProSlot® 6000

Cabinet Assembly

Reel Mechanism AS-04716-(SERIES)
☑*Upright*

AVAILABILITY:

P/N	DESCRIPTON
AS-04716-0004	Reel Mechanism, 3-Wide
AS-04716-0005	Reel Mechanism, 4-Narrow

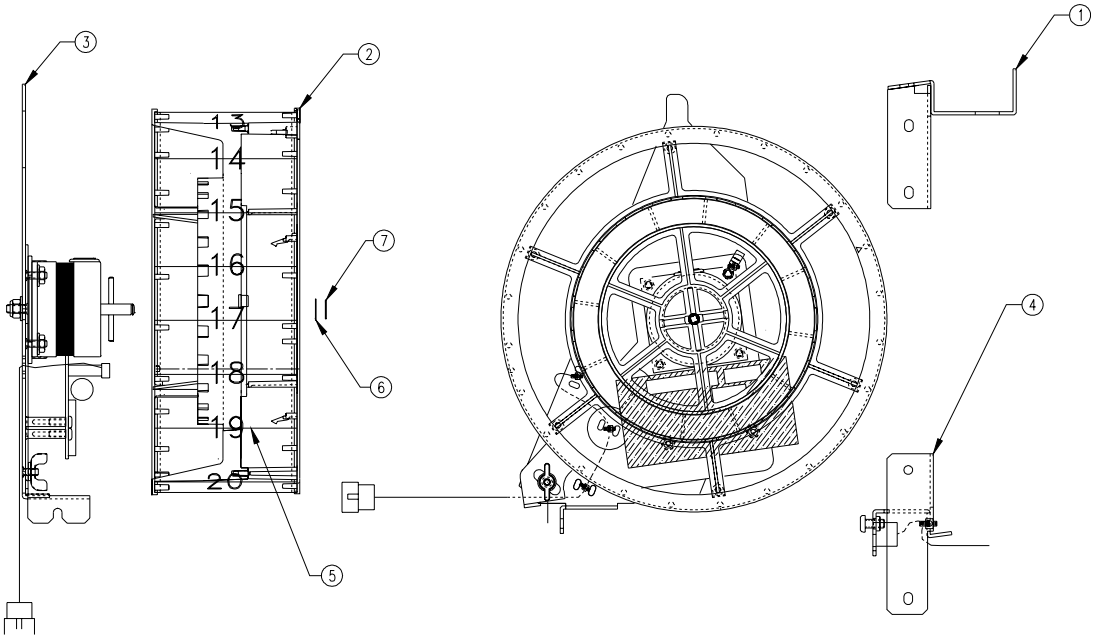

REF	PART #	DESCRIPTION	QTY	PART #
1	A-04703-0006	Bracket, 3-Wide Reel Support, Upper	1	0004
2	AS-04234-0004	Assembly, Reel, 9-Inch	3	0004
				0005
3	AS-04235-0009	Assembly, Reel Drive, 9-Inch	3	0004
				0005
4	AS-04703-0003	Assembly, 3-Wide Reel Support, Lower	1	0004
	AS-04703-0007	Assembly, 4 Reel Support, Lower	1	0005
5	M-01777-5617	Adhesive, Double-Sided Tape, 1/4W	A/R	0004
				0005
6	P-00801-0676	Washer, .255ID X .500D X .007 Thk	3	0004
				0005
7	P-02891-0006	Retaining Ring, .281 Shaft X .025 Thk	3	0004
				0005
8	P-06004-0006	Bracket, Support, 3 Reels, Upper (Not Shown)	1	0004
	P-06004-0003	Bracket, Support, 4 Reels, Upper (Not Shown)	1	0005

Reel Drive/Motor AS-04235-(SERIES)
☑*Upright* / ☑*Slant* / ☑*S6E*

AVAILABILITY:

P/N	DESCRIPTON	UPRIGHT	SL/S6E
AS-04235-0009	REEL DRIVE, 9-INCH	X	X
AS-04235-0010	REEL MOTOR	X	

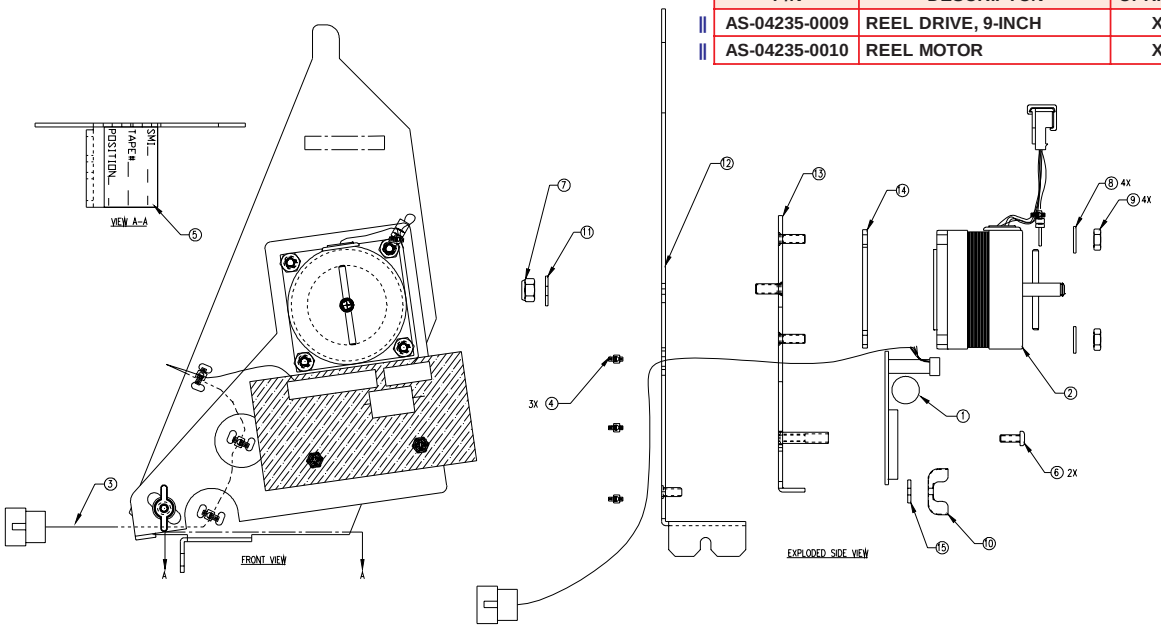

©2003 Bally Gaming and Systems

Cabinet Assembly

Reel Drive/Motor (Cont.) AS-04235-(SERIES)
☑*Upright* / ☑*Slant* / ☑*S6E*

AVAILABILITY:

P/N	DESCRIPTON	UPRIGHT	SL/S6E
AS-04235-0009	REEL DRIVE, 9-INCH	X	X
AS-04235-0010	REEL MOTOR	X	

REF	PART #	DESCRIPTION	QTY	PART #
1	AS-03356-0205	Assembly, Reel Drive Board	1	-0009
				-0010
2	AS-04236-0003	Assembly, Motor/Coupler, 9-Inch Reel	1	-0009
				-0010
3	CBL-20189-0001	Cable, Reel Sensor Board	1	-0009
				-0010
4	E-00647-0004	Cable Tie	3	-0009
5	LBL-00210-0001	Label, Reel	1	-0009
6	LSPP-00632-1106	Screw, 6-32 X 3/8 Mach with Lock Phil Pan Hd	2	-0009
				-0010
7	M-00319-0001	Stop Nut, Elastic 10-32 Tap	1	-0009
				-0010

REF	PART #	DESCRIPTION	QTY	PART #
8	M-01701-0008	Lock Washer, Int Tooth	4	-0009
				-0010
9	M-01757-0003	Nut, 8-32 X 1/4 Flat Hex	4	-0009
				-0010
10	M-01757-0011	Nut, Wing #8-32	1	-0009
11	P-00801-0672	Washer, .200ID X .450OD X .048Thk	1	-0009
				-0010
12	P-09316-0347	Bracket, Reel Mounting	1	-0009
13	P-09319-0392	Bracket, Reel Adjusting	1	-0009
				-0010
14	P-09319-084A	Spacer, Motor	1	-0009
				-0010
15	PW-00010-0012		1	-0009

Reel Support, Cable and Bracket AS-04703-(SERIES)

☑*Upright*

AVAILABILITY:

P/N	DESCRIPTON
AS-04703-0006	Reel Support, Cable and Bracket, 3-Reel
AS-04703-0007	Reel Support, Cable and Bracket, 4-Reel

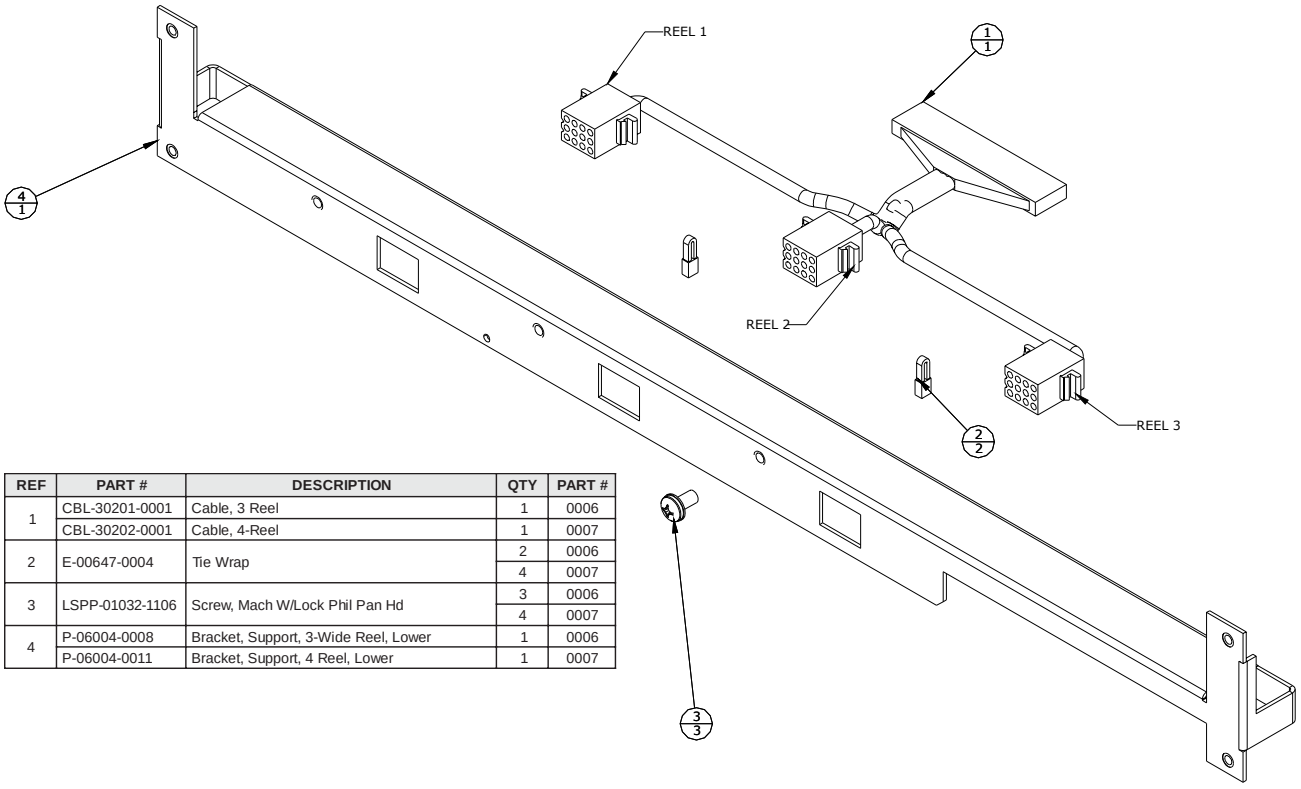

REF	PART #	DESCRIPTION	QTY	PART #
1	CBL-30201-0001	Cable, 3 Reel	1	0006
	CBL-30202-0001	Cable, 4-Reel	1	0007
2	E-00647-0004	Tie Wrap	2	0006
			4	0007
3	LSPP-01032-1106	Screw, Mach W/Lock Phil Pan Hd	3	0006
			4	0007
4	P-06004-0008	Bracket, Support, 3-Wide Reel, Lower	1	0006
	P-06004-0011	Bracket, Support, 4 Reel, Lower	1	0007

©2003 Bally Gaming and Systems

ProSlot® 6000

Door Assembly

See Module 3A, Glass and Decals, for reel glass and decal selections.

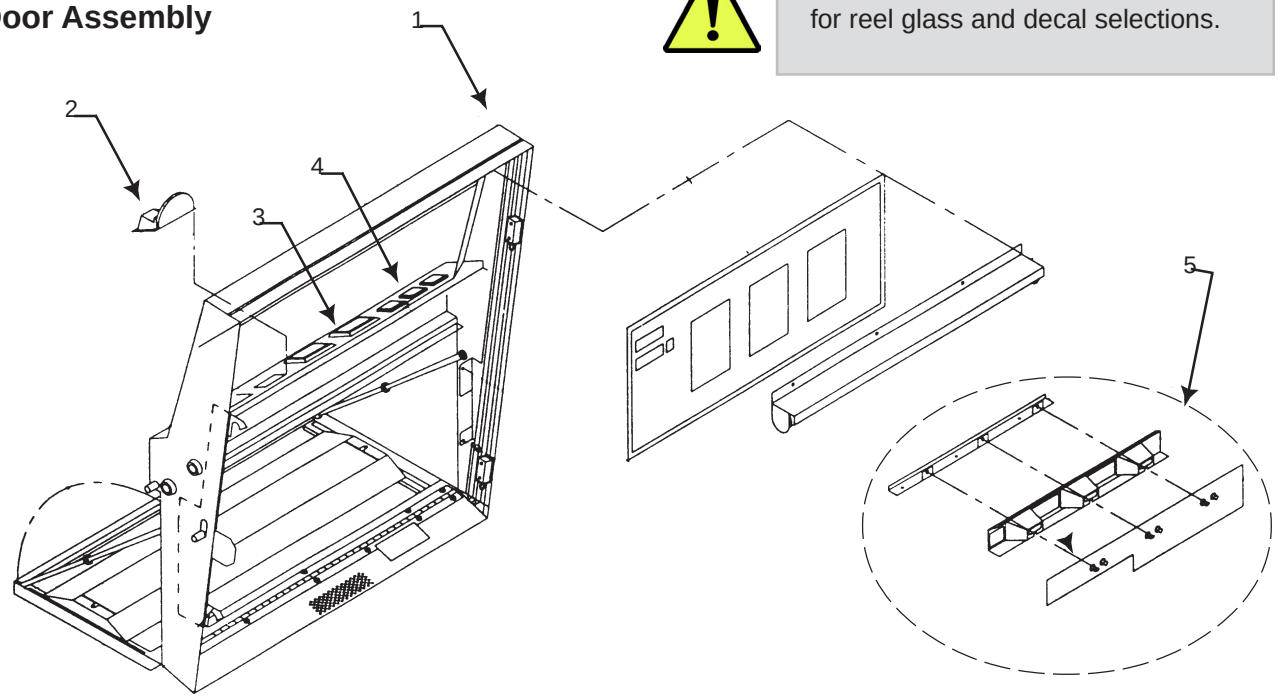

ITEM	PART #	DESCRIPTION	PAGE
1	AS-06607-(SERIES)	Door	35
2	BH-04XXX-(SERIES	Switch, Happ, Black, No Legend	39
3	K-01500-(SERIES)	Kit, Legend Plate	40
4	C-04711-00XA	Base, Coin Head	--
5	AS-03360-0029	Win Meter Lower Display	44

PARTS NOT SHOWN			
ITEM	PART #	DESCRIPTION	PAGE
6	M-01777-5410	Door (Restraint) Stop Cable	39
7	K-00694-(SERIES)	Kit, Bill Acceptor Cover Plate	43

Door AS-06607-(SERIES)

☑*Upright*

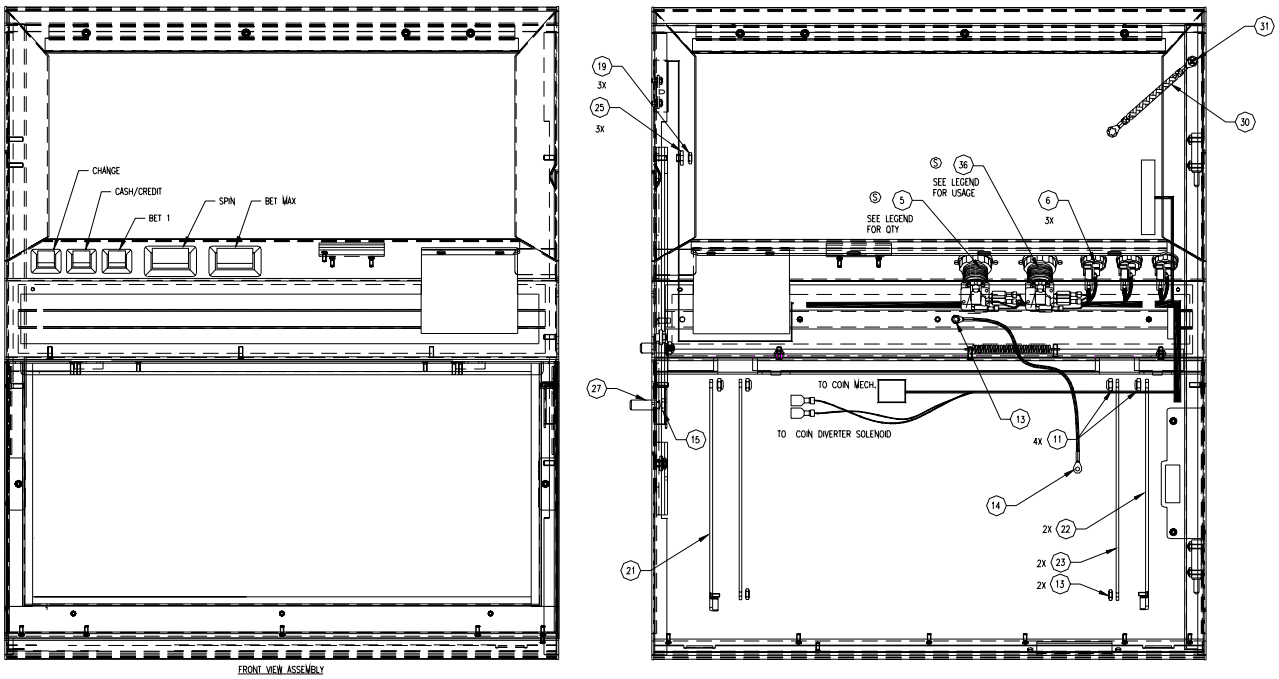

©2003 Bally Gaming and Systems

ProSlot® 6000

Door Assembly

Door (cont.) AS-06607-(SERIES)

☑*Upright*

Option "A"

REF	PART #	DESCRIPTION	QTY
1	NLS-00632-1112	Nut, 6-32 Keps	9
2	P-06009-0003	Latch, Hook, Belly Door	2
3	P-09319-0377	Bracket, Glass Retainer, Belly Door	1
4	P-09319-0378	Bracket, Glass Retainer, Belly Door	1
5	R-00553-0044	Gasket, 1/8 X 1/4 X 12 2-Sided	1
6	R-00553-0045	Gasket, 1/8 X 1/4 X 17 2-Sided	1

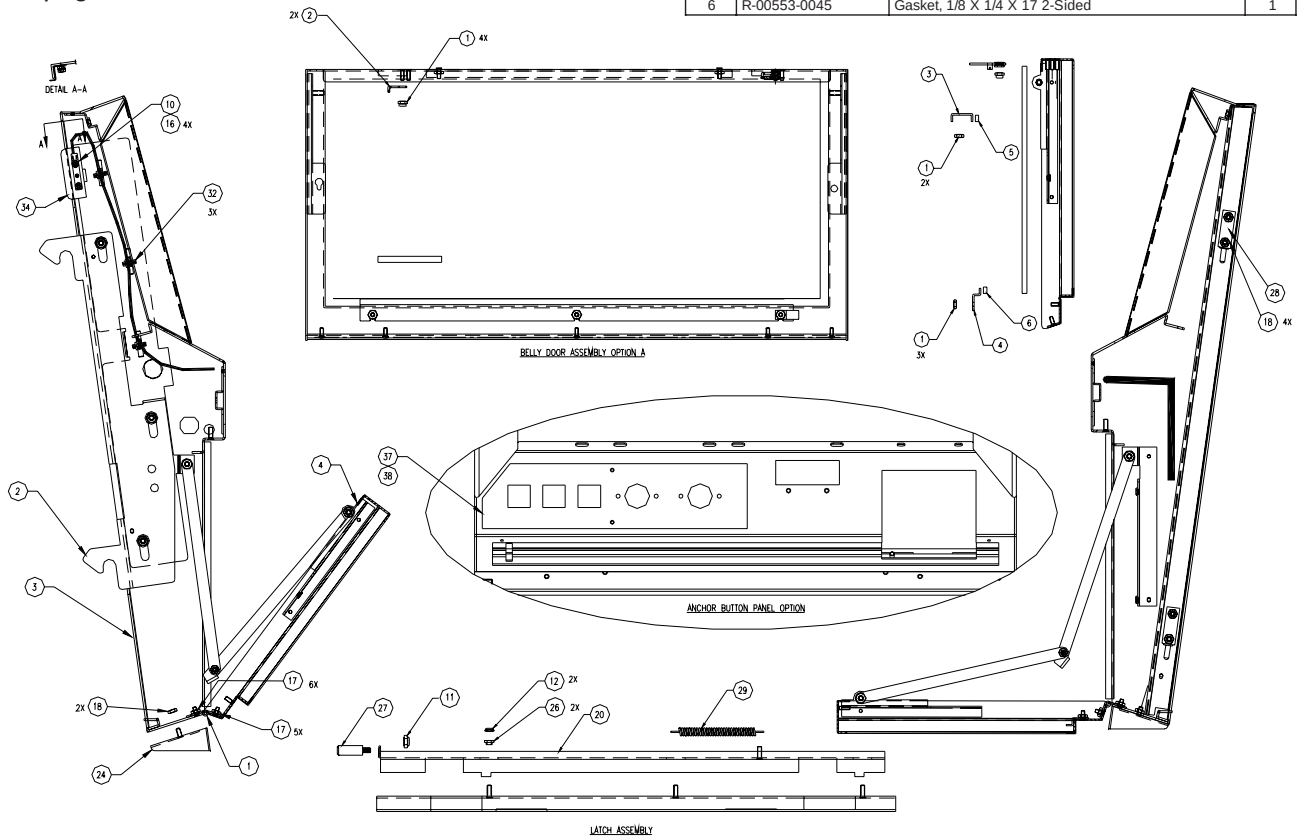

REF	PART #	DESCRIPTION	QTY
1	A-04270-0032	Hinge, Belly Door	1
2	P-18526-0007	Assembly, Door Latch	1
3	SEE LEGEND	Assembly, Door	1
4	P-06009-0003	Assembly, Belly Door (Option A)	1
5	BH-04571-0001	Switch, Rectangle, Black, No Legend (Bonus Games: LH-04573-0001)	A/R
6	BH-04738-0001	Switch (Happ), Square, Black, No Legend (Bonus Games: LH-04738-0001)	3
7			
8			
9	CBL-30470-0001	Cable, Door Button	1
10	AS-03356-0427	Assembly, Door Optic, Door Emitter	1
11	M-00319-0001	Lock Nut, 10-32	5
12	M-00319-0002	Lock Nut, 8-32	2
13	M-00319-0006	Lock Nut, 6-32	3
14	M-01777-5410	Cable, Door Stop, 14.75-Inch	1
15	NLS-01032-1112	Nut, 10-32 Keps	1
16	NLS-00440-1112	Nut, 4-40 Keps	4
17	NLS-00632-1112	Nut, 6-32 Keps	11
18	NLS-00832-1112	Nut, 8-32 Keps	6

REF	PART #	DESCRIPTION	QTY
19	M-00319-0015	Stop Nut, Elastic, 10-32 Thin Profile	3
20	P-06004-0016	Bracket, Slide Latch	1
21	P-06004-0022	Bracket, Door Prop-A Left	1
22	P-06004-0023	Bracket, Door Prop-A Right	1
23	P-09319-0352	Bracket, Door Prop-B	2
24	SEE LEGEND	Coin Chute	1
25	S-00231-1022	Bushing, Shoulder, Door Latch	3
26	S-00231-1033	Bushing, Shoulder, Door Slide	2
27	S-00458-0044	Pin, Latch Slide	2
28	S-00700-0001	Hinge, Bracket, Door Side	2
29	SP-00100-0412	Spring Slide	1
30	AS-03106-0010	Assembly, Ground Strap, 4-Inch	1
31	TFPP-00832-1106	Screw, 8-32 X 3/8 Thd Form Phil Pan Hd	1
32	E-00647-0004	Tie Wrap	3
33			
34	P-06004-0136	Bracket, Shield, Door Optic	1
35			
36	LS-04753-0016	Switch (Happ), Round With Legend	A/R
37	P-06510-0118	Panel, Button, Anchor	A/R
38	P-06510-0119	Plate, Retainer, Button, Anchor	A/R

PART #	DESCRIPTION	ITEM 4	ITEM 24	ITEM 5 (QTY)	ITEM 36
AS-06607-0101	Brushed Chrome, 1 Lock	A-16510-01P1	P-09382-0001	2	—
AS-06607-0104	Gold, 1 Lock	A-16510-01P4	P-09382-0004	2	—
AS-06607-0201	Brushed Chrome, 2 Locks	A-16510-02P1	P-09382-0001	2	—
AS-06607-0204	Gold, 2 Locks	A-16510-02P4	P-09382-0004	2	—
AS-06607-0301	Brushed Chrome, 3 Locks	A-16510-03P1	P-09382-0001	2	—
AS-06607-0401	Brushed Chrome, 1 Lock, Anchor	A-16510-04P1	P-09382-0001	2	—
AS-06607-0404	Gold, 1 Lock, Anchor	A-16510-04P4	P-09382-0004	2	—

PART #	DESCRIPTION	ITEM 4	ITEM 24	ITEM 5 (QTY)	ITEM 36
AS-06607-0501	Brushed Chrome, 2 Locks, Anchor	A-16510-05P1	P-09382-0001	2	—
AS-06607-0601	Brushed Chrome, 3 Locks, Anchor	A-16510-06P1	P-09382-0001	2	—
AS-06607-1101	Chrome, 1 Lock	A-16510-01P1	P-09382-0001	1	1
AS-06607-1104	Gold, 1 Lock	A-16510-01P4	P-09382-0004	1	1
AS-06607-1201	Chrome, 2 Locks	A-16510-02P1	P-09382-0001	1	1
AS-06607-1204	Gold, 2 Locks	A-16510-02P4	P-09382-0004	1	1
AS-06607-1301	Chrome, 3 Locks	A-16510-03P1	P-09382-0001	1	1

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Door Assembly

AVAILABILITY:

PART #	DESCRIPTON
A-36510-0100	Belly Door Assembly
‖ A-36510-0200	Belly Door Assembly

Belly Door Assembly A-36510-(SERIES)
☑*Upright*

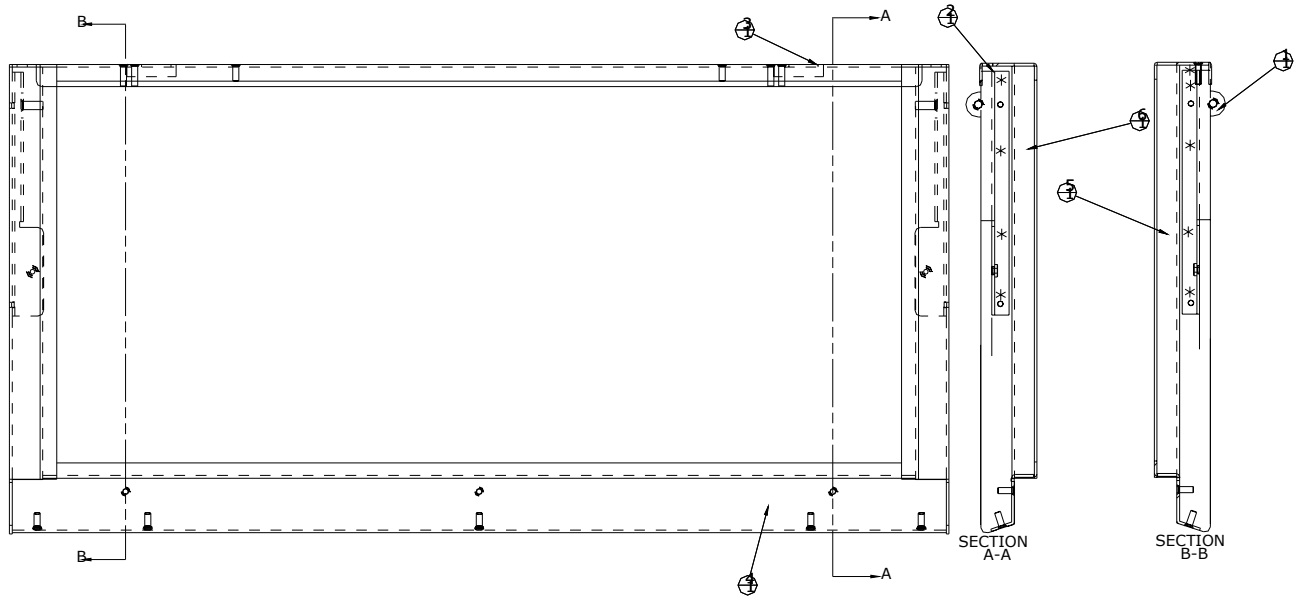

REF	PART #	DESCRIPTION	QTY	P/N
1	P-06510-0111	Bracket, Belly Door Mounting, Left	1	0100
				0200
2	P-06510-0112	Bracket, Belly Door Mounting, Right	1	0100
				0200
3	P-06510-0113	Belly Door, Top	1	0100
	P-06510-0128	Door, Belly	1	0200

REF	PART #	DESCRIPTION	QTY	P/N
4	P-06510-0114	Belly Door, Bottom	1	0100
5	P-06510-0115	Belly Door, Right Sde	1	0100
6	P-06510-0116	Belly Door, Left Side	1	0100

Door Lock Assembly A-16510-(SERIES)
☑*Upright*

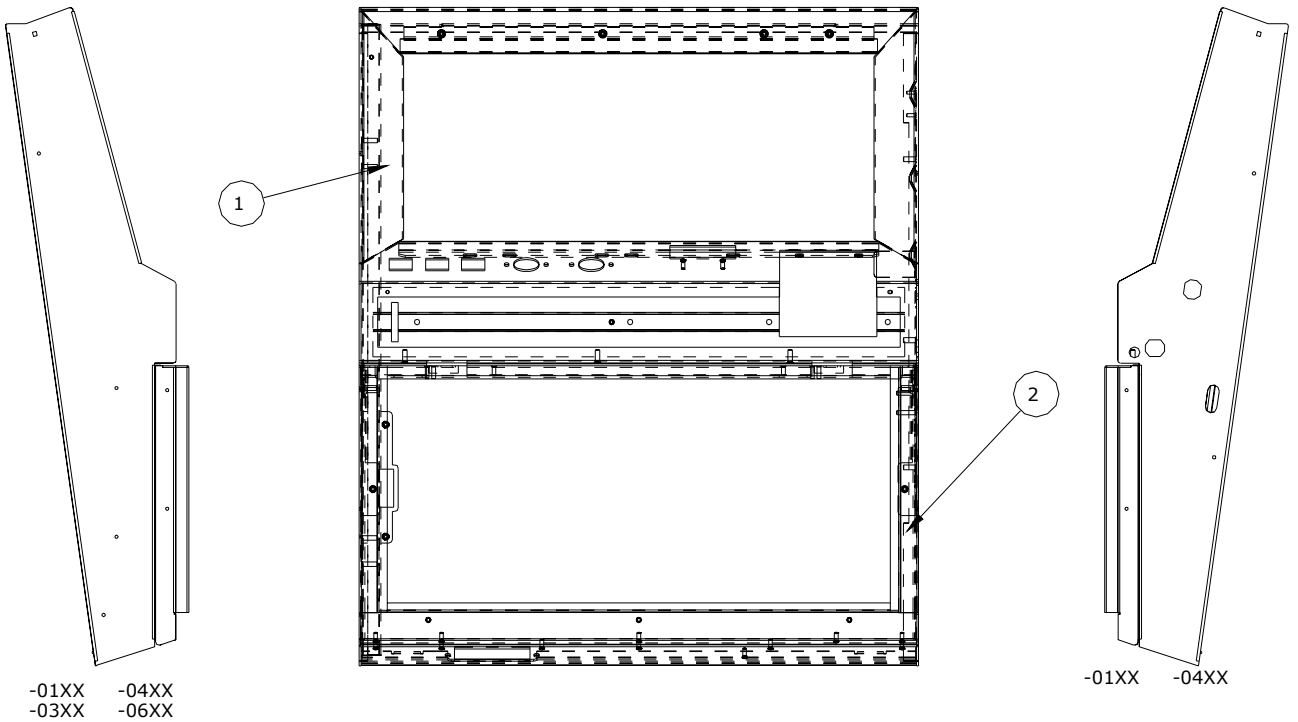

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Door Assembly

REF	P/N	DESCRIPTION	QTY
1	A-26510-0100	ASSY, DOOR	1
2	A-36510-0100	ASSY, BELLY DOOR	1

Door Lock Assembly (Cont.) A-16510-(SERIES)
☑*Upright*

PART NUMBER BREAKDOWN
A-16510* * **

- FINISH OPTION
  - 00 THRU 99 OPTION 1: POWDER COATED ASSY. (PER DWG. PC-SPEC-0001, TABLE "A").
  - P1 THRU P5 OPTION 2: POLISHED & PLATED ASSY. (PER DWG. MET-SPEC-0002).
  - P6 OPTION 3: POLISHED STAINLESS STEEL ASSY
  - B1 THRU B5 OPTION 4: BRUSHED & PLATED ASSY. (PER DWG. PC-SPEC-0001, TABLE "A").
  - B6 OPTION 5: BRUSHED STAINLESS STEEL ASSY
- 1 = SINGLE LOCK (LOCK HOLES 1 & 2) (5 BUTTON DECK)
- 2 = DUAL LOCKS (LOCK HOLES 1,2,3,&4) (5 BUTTON DECK)
- 3 = 3 LOCKS, 1 SIDE (LOCK HOLES 1. 2. & 3. (5 BUTTON DECK)
- 4 = ANCHOR BUTTON DECK, SINGLE LOCK (LOCK HOLES 1 & 2)
- 5 = ANCHOR BUTTON DECK, DUAL LOCK (LOCK HOLES 1, 2, 3 & 4)
- 6 = ANCHOR BUTTON DECK, 3 LOCKS LOCK HOLES 1, 2, & 3)
- FINISH, SIDES: 0 = BRUSHED, 1 = POLISHED
- DOOR SERIES

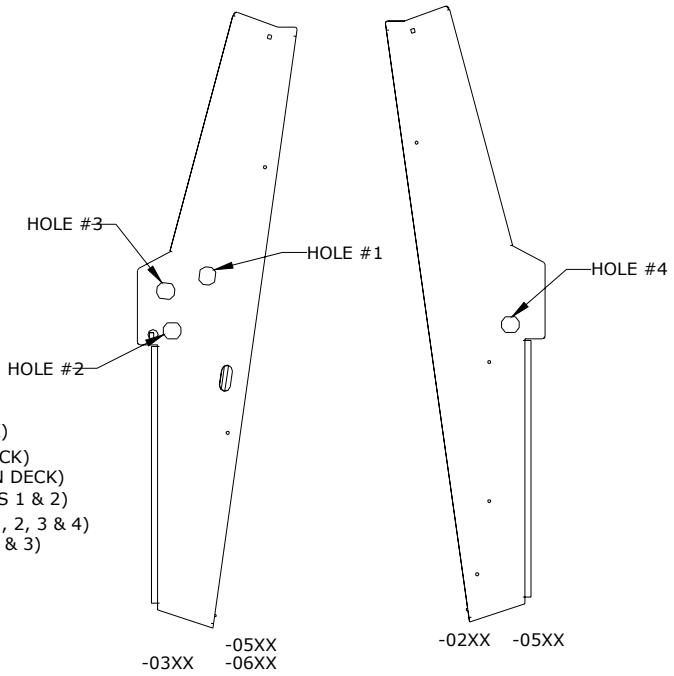

PART #	DESCRIPTION	BELLY	MAIN
A-16510-01P1	Chrome	1 Lock	1 Lock
A-16510-01P4	Gold	1 Lock	1 Lock
A-16510-02P1	Chrome	2 Locks	2 Locks
A-16510-02P4	Gold	2 Locks	2 Locks
A-16510-03P1	Chrome	1 Lock	2 Locks

PART #	DESCRIPTION	BELLY	MAIN
A-16510-04P1	Anchor, Chrome	1 Lock	1 Lock
A-16510-04P4	Anchor, Gold	1 Lock	1 Lock
A-16510-05P1	Anchor, Chrome	2 Locks	2 Locks
A-16510-06P1	Anchor, Chrome	1 Lock	2 Locks

Door Deck P-06510-(SERIES)
☑*Upright*

Door Deck
P-06510-0103 ☑*Upright*

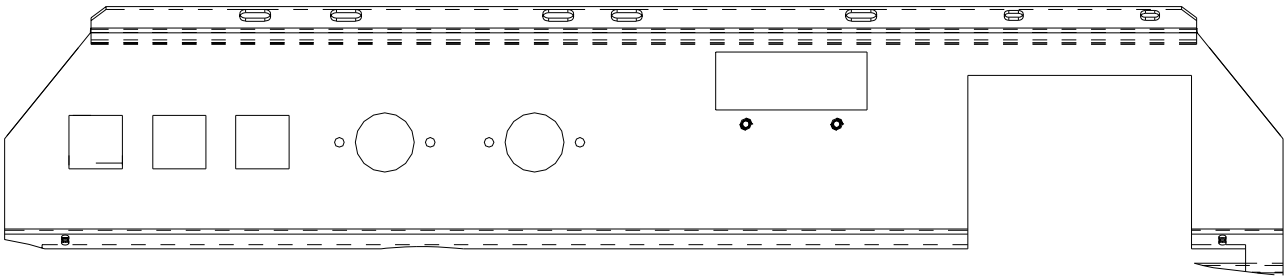

Door Deck, Anchor
P-06510-0117 ☑*Upright*

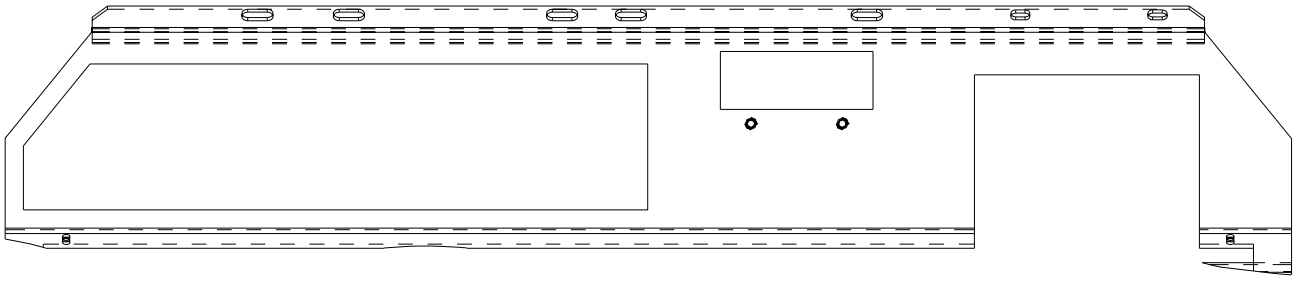

ProSlot® 6000

Door Assembly

Door Deck (Cont.) P-06510-(SERIES)
☑*Upright*

Button Panel, Anchor
P-06510-0118 ☑*Upright*

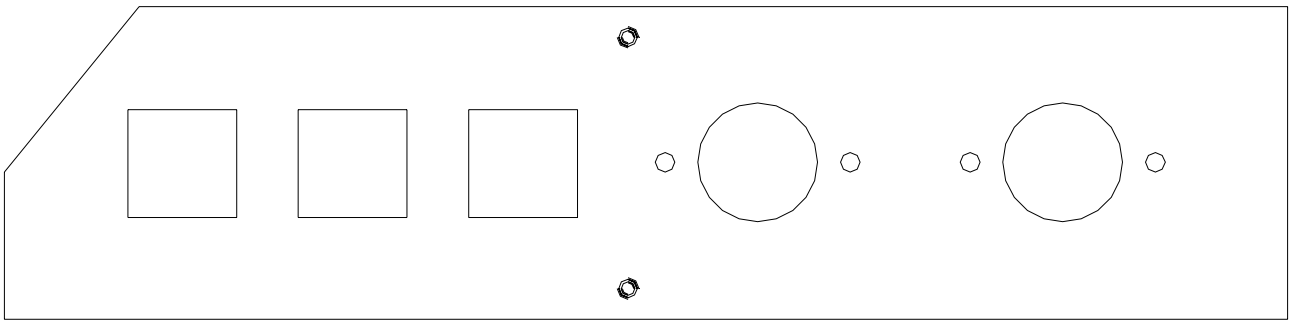

Door Stop Cable, 14 3/4" Large M-01777-5410
☑*Upright*

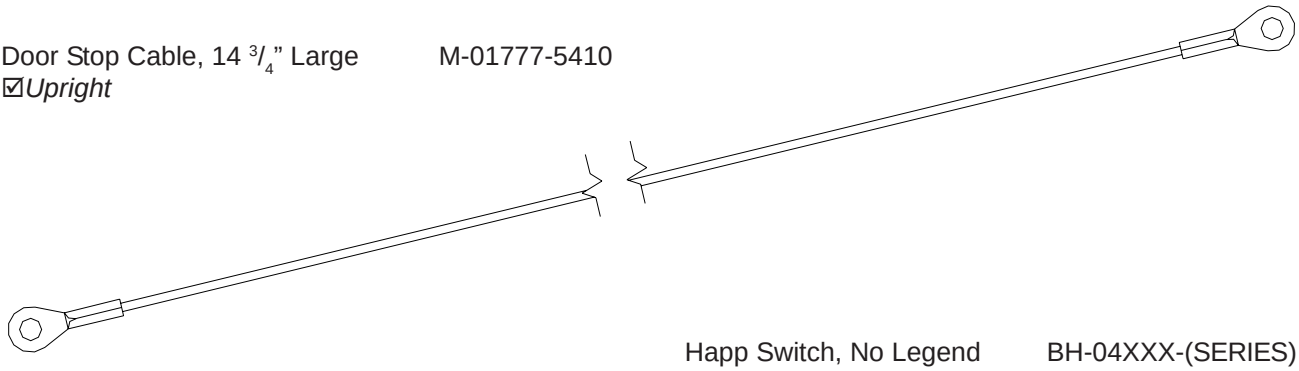

Happ Switch, No Legend BH-04XXX-(SERIES)
☑*Upright*

Happ Switch, Large, Round AS-04753-0016
☑*Upright*

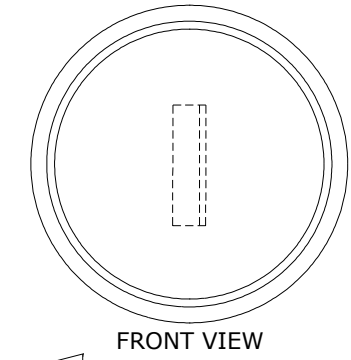

Happ Switch, Rectangle, No Legend
BH-04571-0001 ☑*Upright*

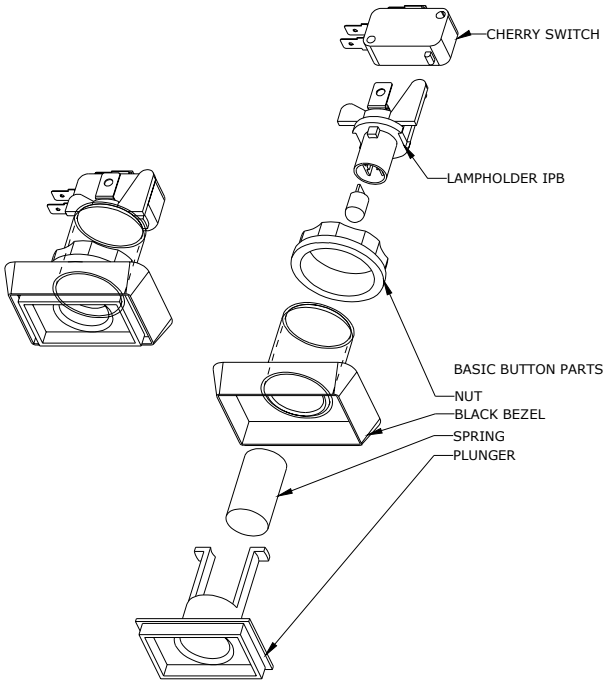

| - Revised, || - New

©2003 Bally Gaming and Systems

Door Assembly

Happ Switch, No Legend (Cont.) BH-04XXX-(SERIES)
☑*Upright*

|| *Happ Switch, 2-Inch Square, No Legend*
BH-04573-0001 ☑*Upright* / ☑*S6E*

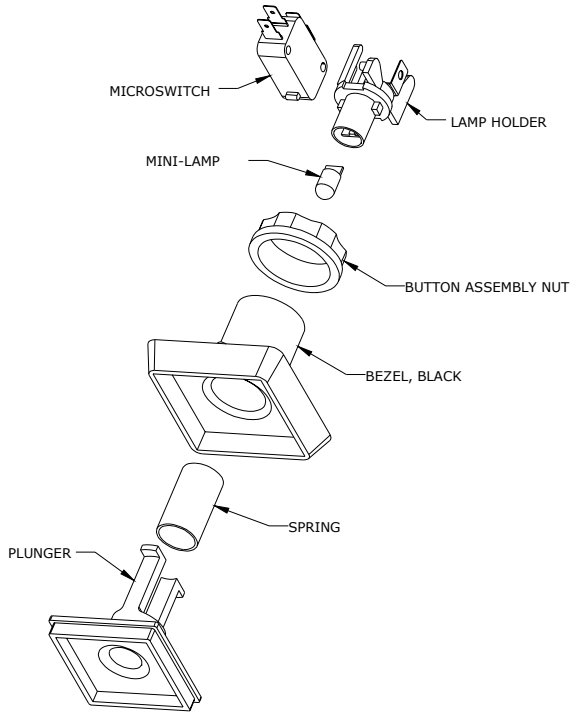

Happ Switch, Square, No Legend *BH-04738-0001*
☑*Upright*

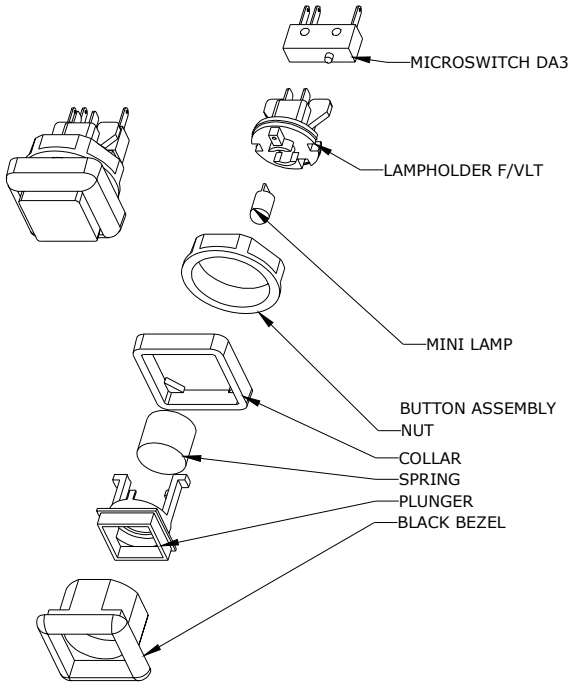

|| Legend Plate Kit K-01500-(SERIES)
☑*Upright* / ☑*Slant*

	PART #	DESCRIPTION	SPIN	BET MAX	BET ONE	CHANGE	CASH/CREDIT	UP	SL	S6E
	K-01500-0001	English	BL-04571-0007	BL-04571-0008	BL-04738-0005	BL-04738-0007	BL-04738-0015	X		
	K-01500-0081	English	BL-04573-0001	BL-04573-0013	BL-04738-0005	BL-04738-0007	BL-04738-0015	X		
	K-01500-0082	French	BL-04573-0003	BL-04573-0004	BL-04738-0018	BK-04738-0019	BL-04738-0021	X		
	K-01500-0083	French/English (Quebec)	BL-04573-0008	BL-04573-0007	BL-04738-0029	BL-04738-0030	BL-04738-0031	X		
	K-01500-0084	Spanish	BL-04573-0009	BL-04573-0010	BL-04738-0060	BL-04738-0062	BL-04738-0063	X		
|	K-01500-0085	Portuguese	BL-04573-0014	BL-04573-0015	BL-04738-0067	BL-04738-0065	BL-04738-0066	X		
	K-01500-0086	English/French (Ontario)	BL-04573-0016	BL-04573-0017	BL-04738-0103	BL-04738-0104	BL-04738-0106	X		
	K-01500-0087	English (New Jersey)	BL-04573-0001	BL-04573-0013	BL-04738-0005	BL-04738-0007	BL-04738-0006	X		
	K-01500-0088	French/English (Quebec)	BL-04573-0008	BL-04573-0007	BL-04738-0029	BL-04738-0092	BL-04738-0031	X		
|	K-01500-0096	Russian	BL-04573-0011	BL-04573-0012	BL-04738-0181	BL-04738-0182	BL-04738-0183	X		
|	K-01500-0103	English, 3-Button, 1-Coin (United Kingdom)	BL-04573-0001	BL-04573-0013	BL-04738-0005	BL-04738-0007	BL-04738-0015	X		
	K-01500-0104	English, 5-Button, 2-Coin (United Kingdom)	BL-04571-0038	BL-04571-0039	BL-04571-0046	BL-04738-0117 (Call Atten)	BL-04738-0188 (Auto Play)	X		
||	K-01500-0120	English	BL-04571-0007	BL-04571-0008	BL-04738-0005	BL-04738-0007	BL-04738-0015	X		
||	K-01500-0121	English, 5-Button (United Kingdom)	BL-04573-0027 (Start)	BL-04738-0215 (Transfer Max)	BL-04738-0050 (Collect)	BL-04738-0218 (Call Atten)	BL-04738-0216 (Auto Play)	X		
	K-01500-1001	English	AS-04573-0001	AS-04573-0002	AS-04572-0003	AS-04572-0001	AS-04572-0007		X	
	K-01500-1002	Spanish	AS-04573-0009	AS-04573-0010	AS-04572-0030	AS-04572-0029	AS-04572-0032		X	
	K-01500-1003	French	AS-04573-0003	AS-04573-0004	AS-04572-0010	AS-04572-0009	AS-04572-0011		X	
	K-01500-1004	English, Bellringer	AS-04573-0001	AS-04573-0002	AS-04572-0003	AS-04572-0001	AS-04572-0007		X	
	K-01500-1005	French/English (Quebec)	AS-04573-0008	AS-04573-0007	AS-04572-0026	AS-04572-0027	AS-04572-0028		X	
	K-01500-1006	English (New Jersey)	AS-04573-0001	AS-04573-0002	AS-04572-0003	AS-04572-0001	AS-04572-0002		X	
	K-01500-1007	English, Bellringer (New Jersey)	AS-04573-0001	AS-04573-0002	AS-04572-0003	AS-04572-0001	AS-04572-0002		X	
	K-01500-1008	English, Betty Boop	AS-04573-0001	AS-04572-0002	AS-04572-0003	AS-04572-0001	AS-04572-0007		X	
	K-01500-1009	Finland, Bellringer	AS-04573-0003	AS-04573-0004	AS-04572-0010	AS-04572-0009	AS-04572-0011		X	
	K-01500-1010	Spanish, Bellringer	AS-04573-0009	AS-04573-0010	AS-04572-0030	AS-04572-0029	AS-04572-0032		X	
	K-01500-1011	Spanish, Bellringer	AS-04573-0009	AS-04573-0010	AS-04572-0030	AS-04572-0029	AS-04572-0032		X	
	K-01500-0012	English	AS-04573-0001	AS-04573-0002	AS-04572-0003	AS-04572-0001	AS-04572-0007		X	
	K-01500-1013	English, Betty Boop (New Jersey)	AS-04573-0001	AS-04573-0002	AS-04572-0003	AS-04572-0001	AS-04572-0002		X	

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

Door Assembly

Coin Panel Assembly AS-03210-(SERIES) *Coin Panel Assembly*
☑*Upright* *AS-03210-0094* ☑*Upright*

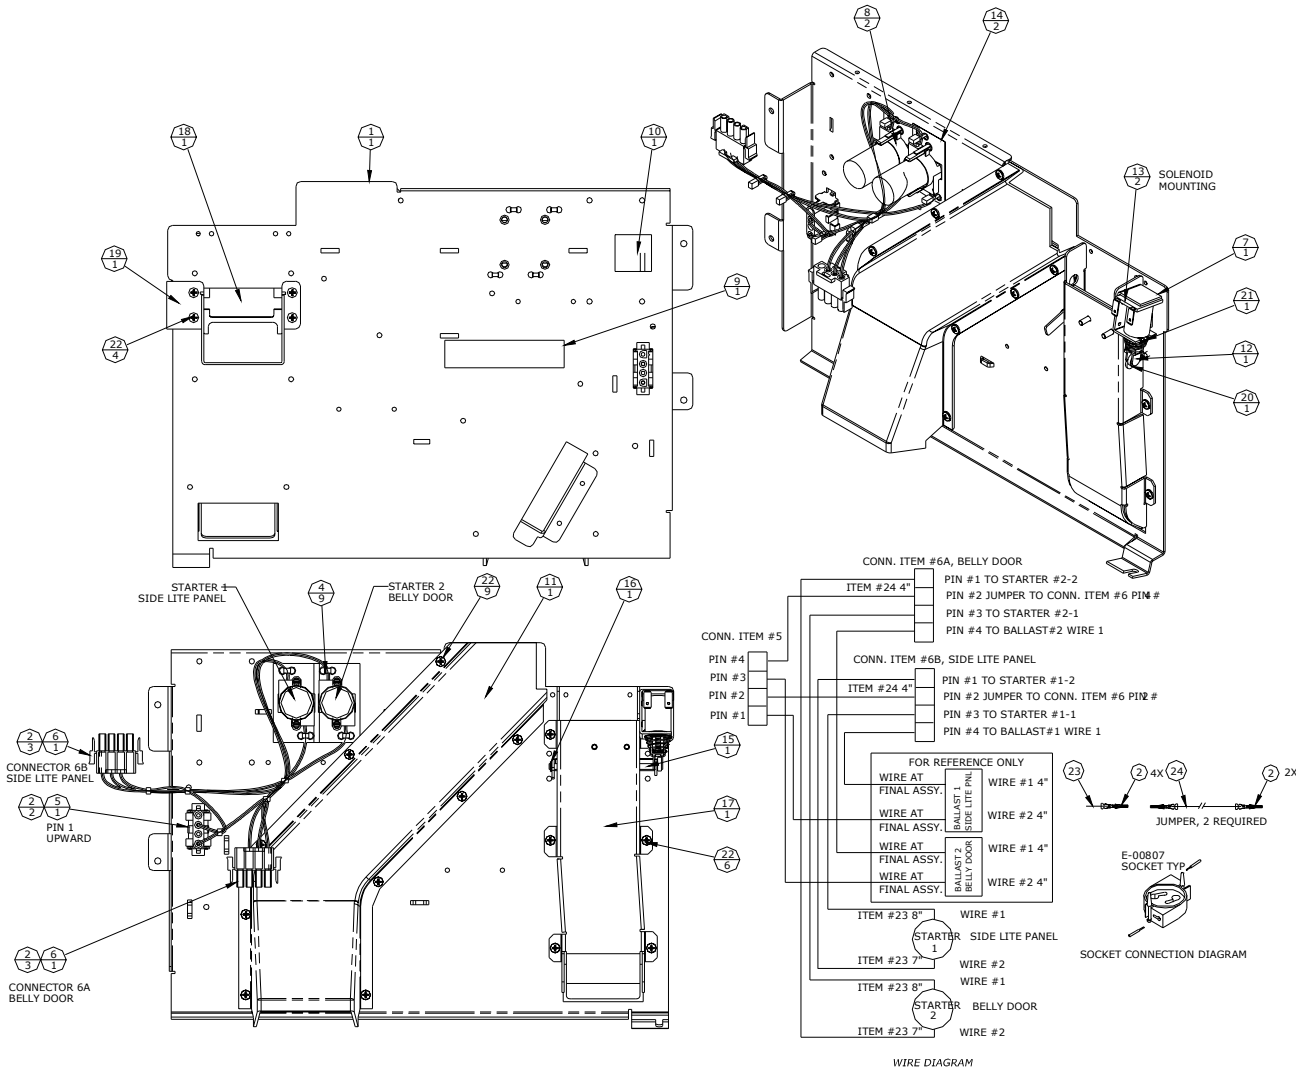

WIRE DIAGRAM

REF	PART #	DESCRIPTION	QTY
1	A-06505-0008	Assembly, Coin Panel, Ballast/Starter	1
2	E-00807	Socket, Amp, 24-18	8
3	E-00411-0010	Starter, Fluorescent, FS-2	2
4	E-00647-0004	Tie Wrap	9
5	E-00804-0004	Connector Housing Cap	1
6	E-00808-0004	Connector Housing Plug	2
7	E-00947-0019	Coil, Diverter	1
8	E-00120-0265	Socket, Fluorescent Lamp Starter, CE97	2
9	LBL-00109-001A	Label, Power Off	1
10	LBL-00113-001A	Label, High Voltage	1
11	M-03093-0022	Chute, Coin Reject	1
12	M-03104-0001	Link, Plastic, Coin Diverter	1

REF	PART #	DESCRIPTION	QTY
13	MSPX-00632-1102	Screw, Machine Phil Flat Hd 82 DEG	2
14	P-00150-0292	Insulator, Polycarbonate, CE97	2
15	P-01638-0003	Pin, Pivot	1
16	P-02891-0004	Retaining Ring, .156 Shaft X .025 Thk	1
17	P-06804-0004	Chute, Coin Diverter	1
18	P-09319-0519	Diverter, Coin	1
19	P-09319-0527	Ramp, Coin Hopper	1
20	S-00231-1031	Spacer, Plastic, Diverter Link	1
21	SP-00200-0246	Spring, Compression	1
22	TFPP-00632-1104	Screw, 6-32 X 1/4 Thd Form Phil Pan Hd	19
23	WIP-ES202-1850-0094	PVC, Solid 18 AWG White Type TEW	1
24	WIP-ES202-1880-0094	PVC, Solid 18 AWG Black Type TEW	1

©2003 Bally Gaming and Systems

Door Assembly

Coin Panel Assembly (Cont.) AS-03210-(SERIES) ☑*Upright*

Coin Panel Assembly with Printer AS-03210-0105 ☑*Upright*

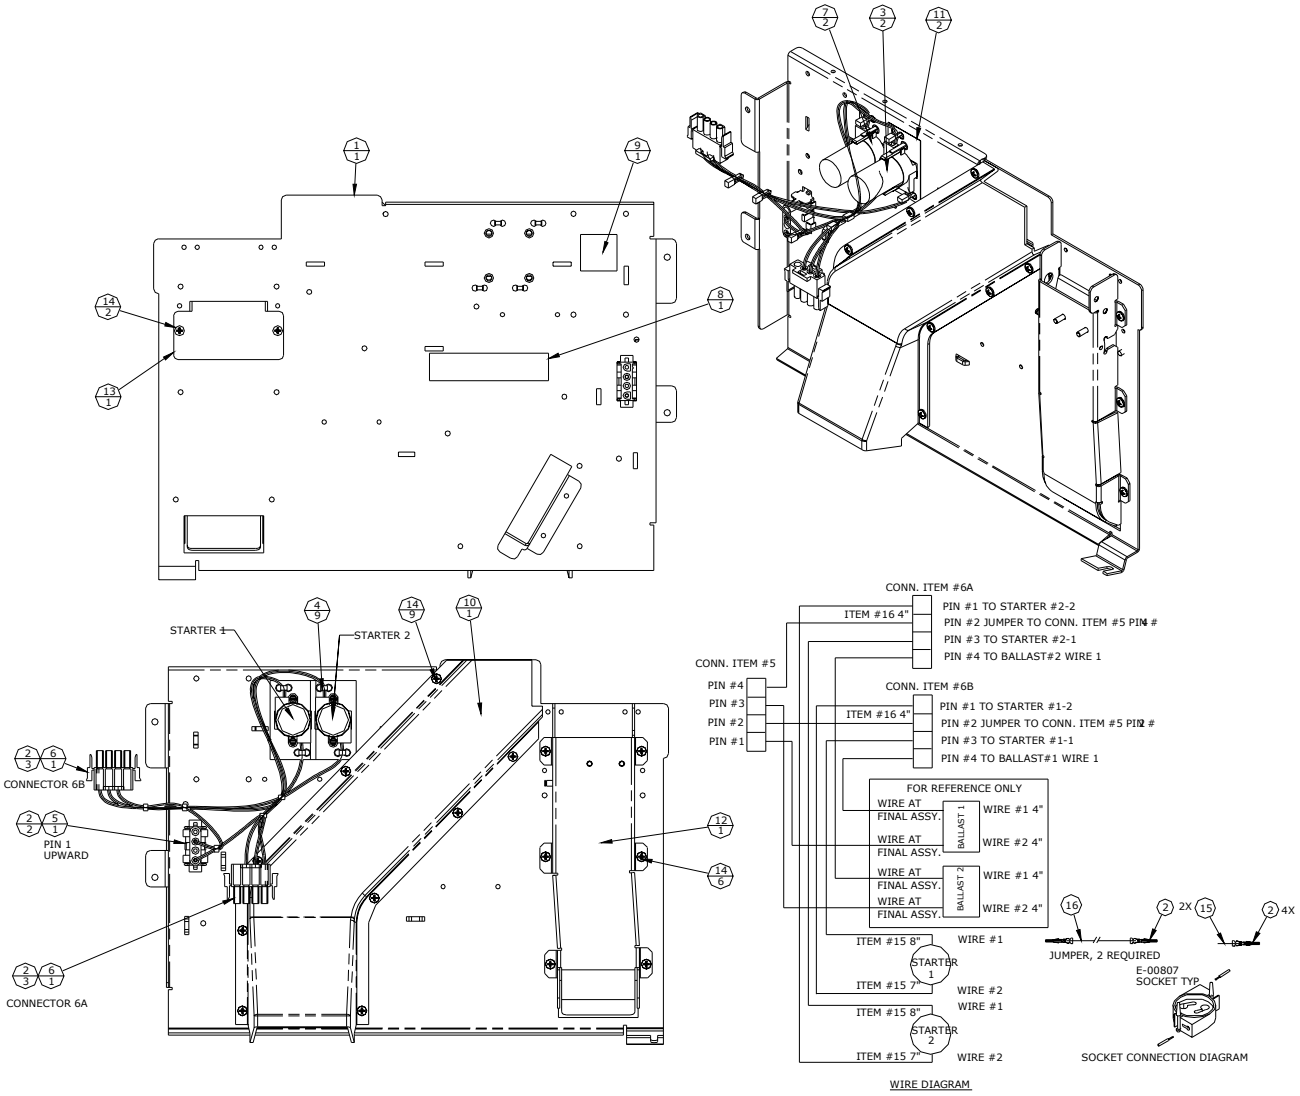

REF	PART #	DESCRIPTION	QTY
1	A-06505-0008	Assembly, Coin Panel, Ballast/Starter	1
2	E-00807	Socket, Amp, 24-18	8
3	E-00411-0008	Starter, Fluorescent, FS-2	2
4	E-00647-0004	Tie Wrap	9
5	E-00804-0004	Connector Housing Cap	1
6	E-00808-0004	Connector Housing Plug	2
7	E-00120-0265	Socket, Fluorescent Lamp Starter, CE97	2
8	LBL-00109-001A	Label, Power Off	1

REF	PART #	DESCRIPTION	QTY
9	LBL-00113-001A	Label, High Voltage	1
10	M-03093-0022	Chute, Coin Reject	1
11	P-00150-0292	Insulator, Polycarbonate, Ce97	2
12	P-06804-0004	Chute, Coin Diverter	1
13	P-09327-0001	Glide, Coin	1
14	TFPP-00632-1104	Screw, 6-32 X 1/4 Thd Form Phil Pan Hd	17
15	WIP-ES202-1850-0094	PVC, Solid 18 AWG White Type TEW	1
16	WIP-ES202-1880-0094	PVC, Solid 18 AWG Black Type TEW	1

©2003 Bally Gaming and Systems

ProSlot® 6000

Door Assembly

Coin Exit Chute P-09382-(SERIES)
☑*Upright*

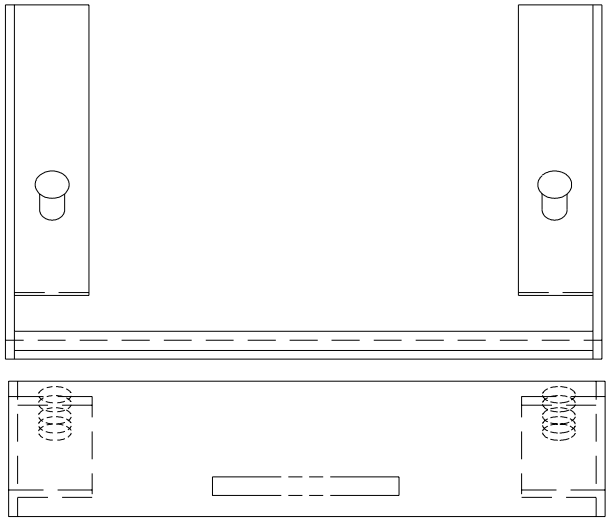

AVAILABILITY:

PART #	DESCRIPTON
P-09382-0001	Coin Exit Chute, Chrome
P-09382-0004	Coin Exit Chute, Gold

Coin Glide P-09327-0001
☑*Upright*

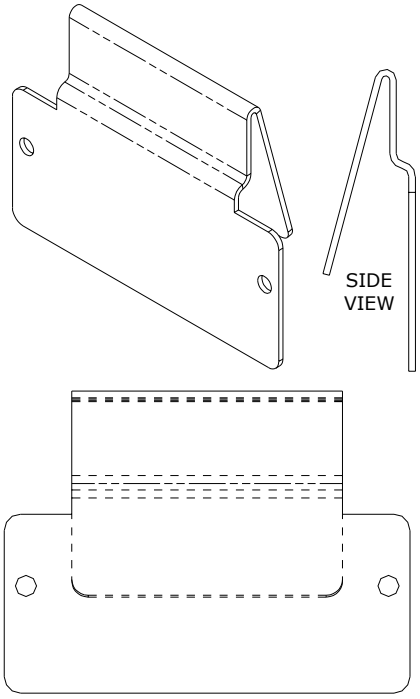

FRONT VIEW

AVAILABILITY:

PART #	DESCRIPTON
K-00694-0595	Bill Acceptor Cover Plate, Chrome
K-00694-0606	Bill Acceptor Cover Plate, Gold

Bill Acceptor Cover Plate Kit K-00694-(SERIES)
☑*Upright*

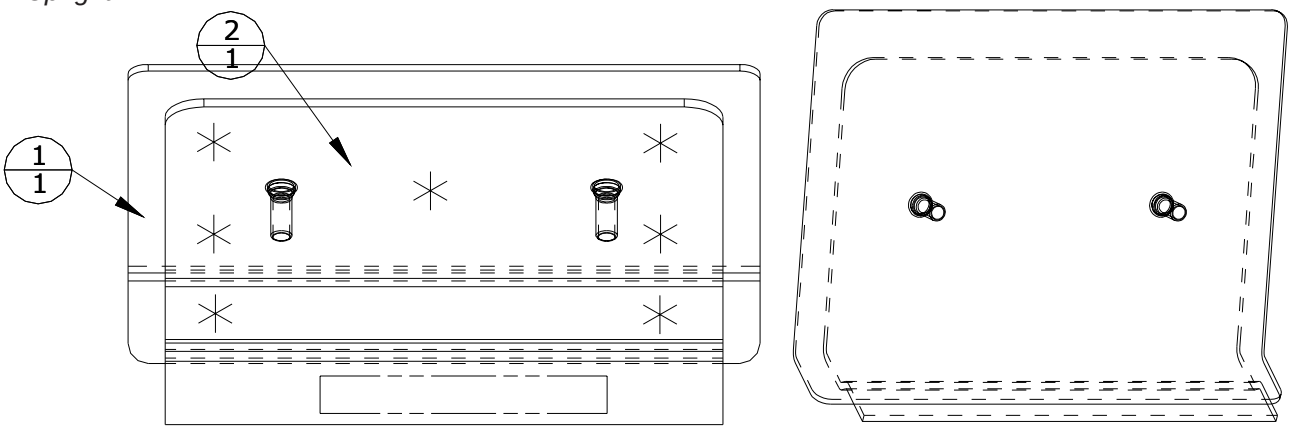

REF	PART #	DESCRIPTION	QTY	PART #
1	P-03207-0001	Cover, Bill Acceptor	1	0595
				0606
2	P-03207-0002	Liner, Bill Acceptor Cover	1	0595
				0606
3	A-03207-1001	Assembly, Bill Acceptor Cover Plate, Chrome	1	0595
	A-03207-1004	Assembly, Bill Acceptor Cover Plate, Gold	1	0606
4	C-04703-014A	Trim, Door, Chrome With Brass Groove	1	0595
				0606

REF	PART #	DESCRIPTION	QTY	PART #
5	NLS-00632-1112	Nut	2	0595
				0606
6	NLS-00832-1112	Nut	4	0595
7	P-09322-0281	Bracket, Bill Acceptor Clamp	1	0595
				0606
8	P-09322-0282	Clamp, Strip, Door Trim	1	0595
				0606

| - Revised, || - New

©2003 Bally Gaming and Systems

Door Assembly

| Bill Acceptor Housing JCM/MARS/ARDAC
AS-06602-0005
☑*Upright*

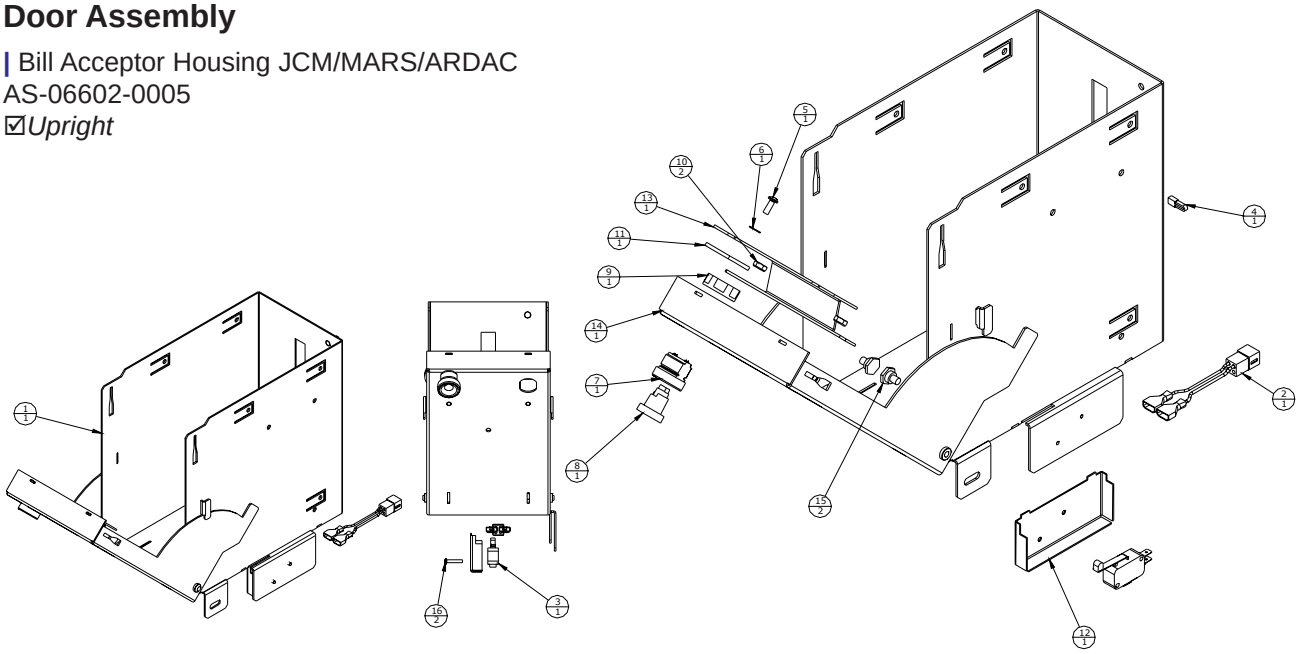

REF	PART #	DESCRIPTION	QTY
1	A-06511-0008	Housing, Bill Acceptor, JCM/Mars/Ardac	1
2	CBL-20214-0001	Cable, Bill Acceptor Switch	1
3	E-00108-367A	Switch, Snap Action, E21-50k	1
4	E-00647-0004	Tie Wrap	1
5	HLPP-00600-1106	Screw, Hi-Lo, Phil Pan Hd	1
6	M-01700-0006	Lock Washer, External Tooth	1
7	M-01757-0014	Housing, Lock, Plastic	1
8	M-01757-0015	Cylinder, Lock, Plastic	1

REF	PART #	DESCRIPTION	QTY
9	M-01757-0016	Nut, Lock Housing, Plastic	1
10	NLS-00632-1112	Hex Nut	2
11	P-00758-0155	Cam, Bill Acceptor Door Lock, JCM/Mars/Ardac	1
12	P-06006-0001	Cover, Door Switch	1
13	P-06006-0002	Cover, Lock, JCM/Mars/Ardac	1
14	P-06008-0001	Housing, Cover	1
15	S-02028-0001	Screw, Shoulder, Front Door CBV	2
16	TFPP-00440-1110	Screw, 4-40 X 5/8 Thd Form Phil Pan Hd	2

Win Meter Lower Display AS-03360-0029
☑*Upright*

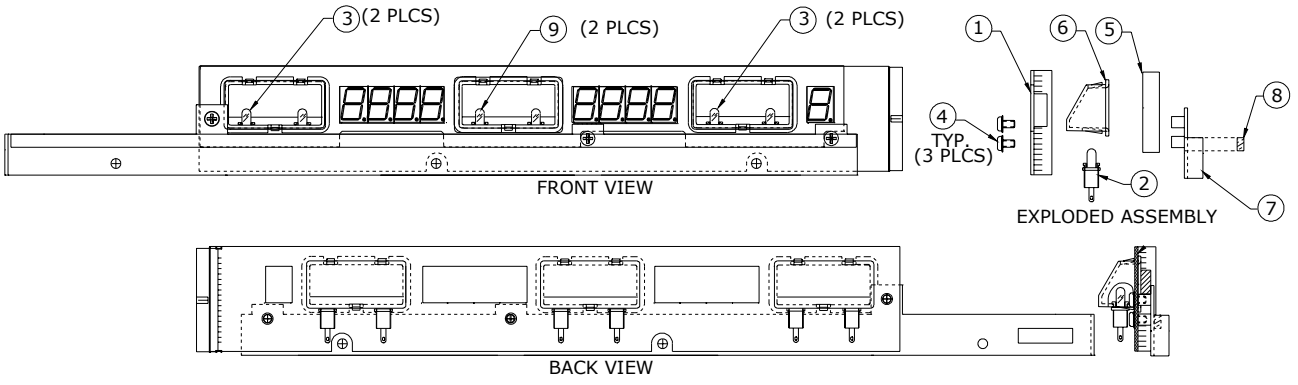

REF	PART #	DESCRIPTION	QTY
1	AS-03356-0525	Display Board W/Hit & Run Connector	1
	AS-03356-0623	Display Board W/Hit & Run Connector (Left)	1
2	E-00120-0264	Socket, Lamp, Wedge Base, T-1 3/4	6
3	E-00125-0084	Lamp, 6.3v, .2amp, Wedge Base Incan, T 1-3/4	4
4	LSPP-00632-1104	Screw, 6-32 X 1/4 Mach W/Lock Phil Pan Hd.	3
5	R-00553-0042	Gasket, 1/8 X 3/16 X 12.25, 1-Sided	1
6	M-06001-0003	Shield, Light, Win Meter	1
7	P-09319-0426	Bracket, Mounting, Win Meter	1
8	NLS-00632-1112	Nut	3
9	E-00125-0099	Lamp, 14v .1 Amp, Wedge Base Incan, T 1-3/4	2

Win Meter Light Shield M-06001-0003
☑*Upright* / ☑*Slant* / ☑*S6E*

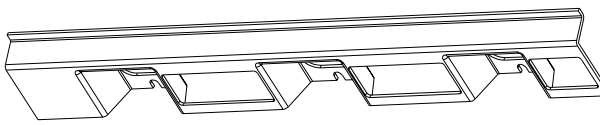

©2003 Bally Gaming and Systems

ProSlot® 6000

Door Assembly

Display Board with Hit/Run Connector AS-03356-0525
☑*Upright* / ☑*Slant* / ☑*S6E*

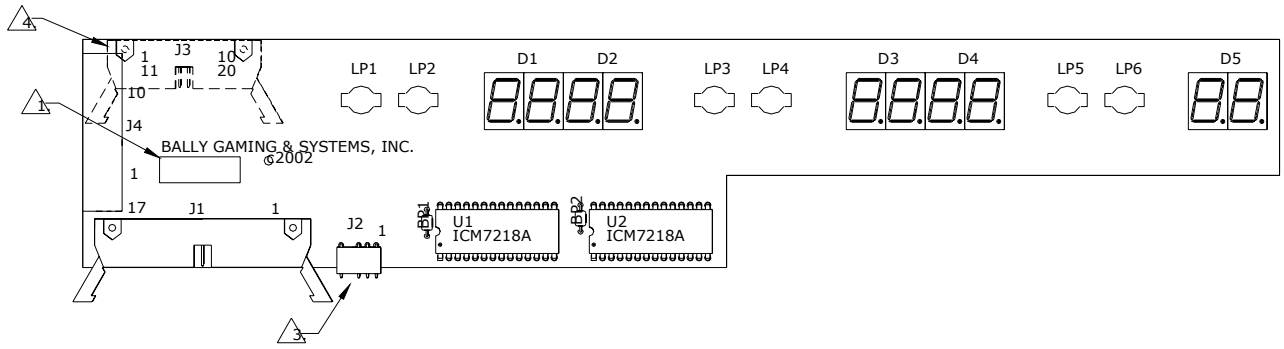

REF	LOCATION	PART #	DESCRIPTION	QTY
1		P-09018-0623	PC Board, Using M-02045-0623 Rev A	1
2	BP1, BP2	CCP-A3+50-0104	CER/CAP, Axial, X7r, 50v, 0. 1 Mf	2
3	D1 - D5	E-00680-0029	Display, 7 SEG, Dual	5
4	J1	E-01086-0134	Header, R/A, 34 Pos With Latch	1
5	J2	E-00989-0005	Header, Str, 5 Pos Mta-100, Fric. Loc	1

REF	LOCATION	PART #	DESCRIPTION	QTY
6	J3	E-01086-0120	Header, R/A, 20 Pos W/Latch	1
7	J4	Not Stuffed		
8	U1, U2	E-00620-0596	IC, Display Driver, 8-Char, ICM7218A	2
9	D1 - 4	E-01104-0019	Socket, IC, Single Row, Elevated, 19-Pin	4
10	D5	E-01104-0009	Socket, IC, Single Row, Elevated, 9-Pin	2

Light Assembly AS-03361-(SERIES)
☑*Upright*

Belly Glass Light Assembly
AS-03361-0026 ☑*Upright*

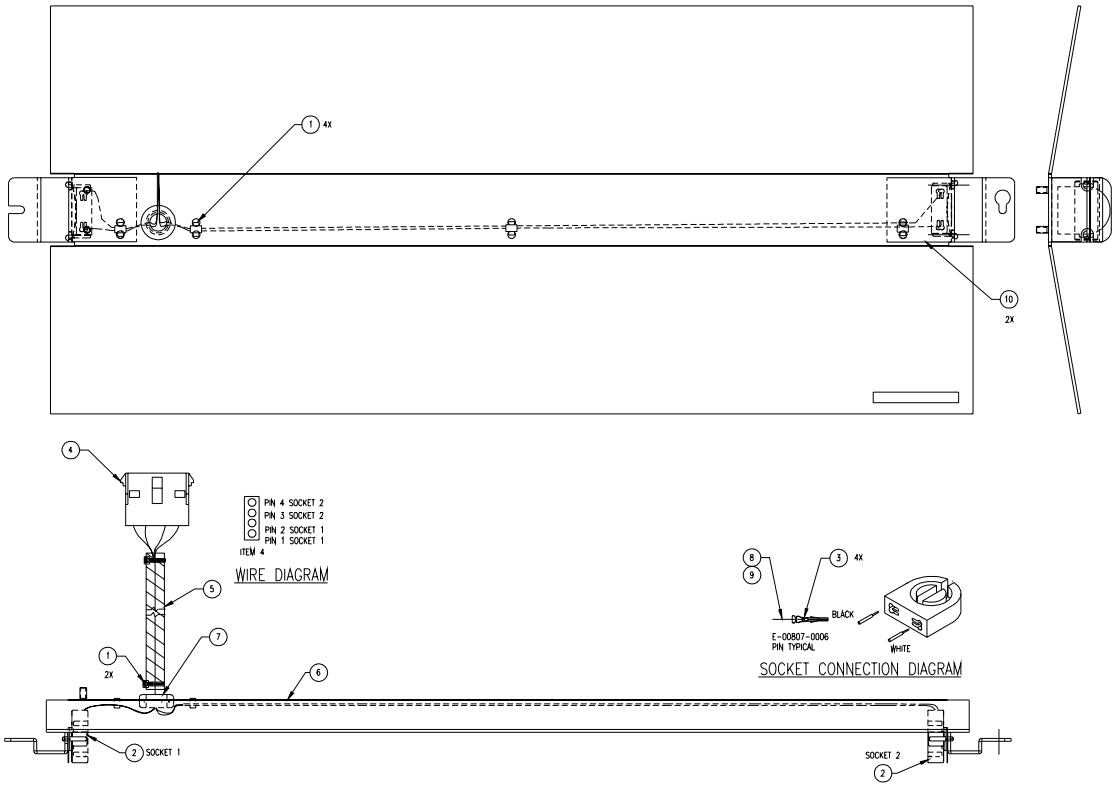

REF	PART #	DESCRIPTION	QTY
1	E-00647-0004	Tie Wrap	6
2	E-00120-0266	Socket, Fluorescent Lamp	2
3	E-00807-0006	Pin, Amp 24-18 AWG	4
4	E-00804-0004	Connector Housing Plug	1
5	M-01777-5602	Spiral Wrap 3/8 Diameter	A/R

REF	PART #	DESCRIPTION	QTY
6	P-06004-0021	Bracket, Light, Door Mounting	1
7	R-00111-0060	Grommet, 3/4	1
8	WIP-ES203-1850	PVC, Stranded, 18 AWG White Type TEW	A/R
9	WIP-ES203-1880	PVC, Stranded, 18 AWG Black Type TEW	A/R
10	P-00150-0290	Insulator	2

| - Revised, || - New

©2003 Bally Gaming and Systems

Door Assembly

Light Assembly (Cont.) AS-03361-(SERIES) *Reel Glass Retainer with Printer*
☑*Upright* *AS-03361-0024* ☑*Upright*

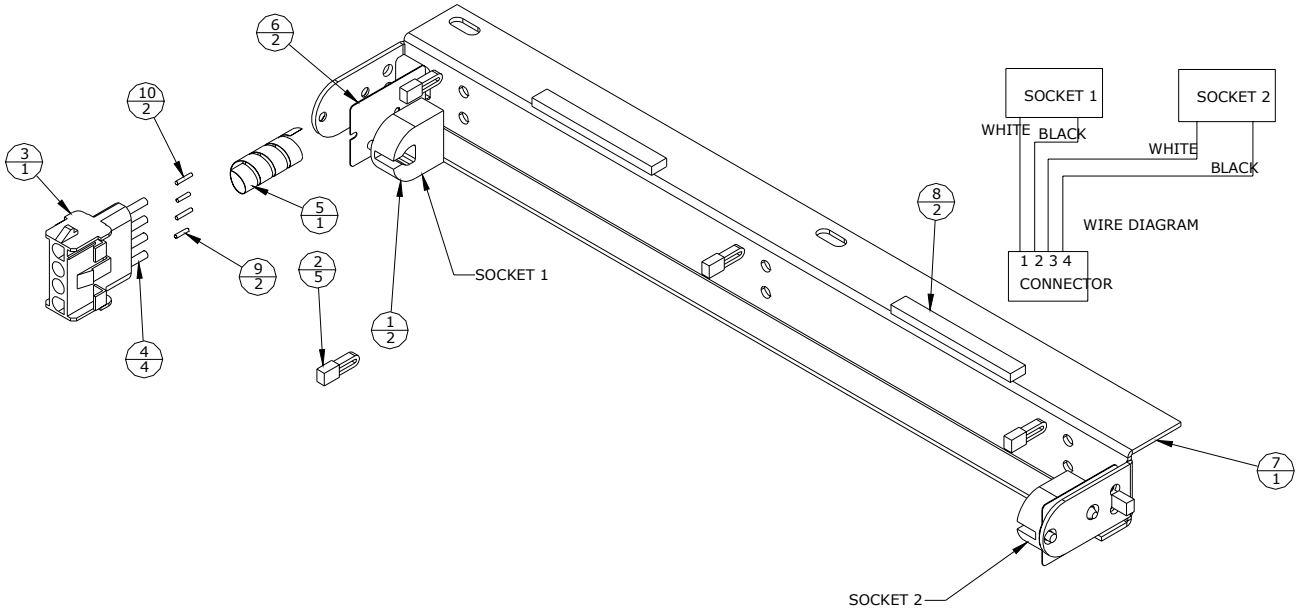

REF	PART #	DESCRIPTION	QTY
1	E-00120-0268	Socket, Fluorescent, 4W	2
2	E-00647-0004	Tie Wrap	5
3	E-00804-0004	Connector Housing Cap	1
4	E-00807-0006	Contact Pin, Amp 24-18	4
5	M-01777-5602	Spiral Wrap	1

REF	PART #	DESCRIPTION	QTY
6	P-00150-0297	Insulator, 4W Socket	2
7	P-09322-0311	Bracket, Reel Light, 12-Inch	1
8	R-00553-0011	Gasket, 1/8 X 1/4 X 2 Inch, 2-Sided	2
9	WIP-ES202-1850	PVC, Solid, 18 AWG White Type TEW	2
10	WIP-ES202-1880	PVC, Solid, 18 AWG Black Type TEW	2

|| *Reel Glass Retainer*
AS-03361-0046 ☑*Upright*

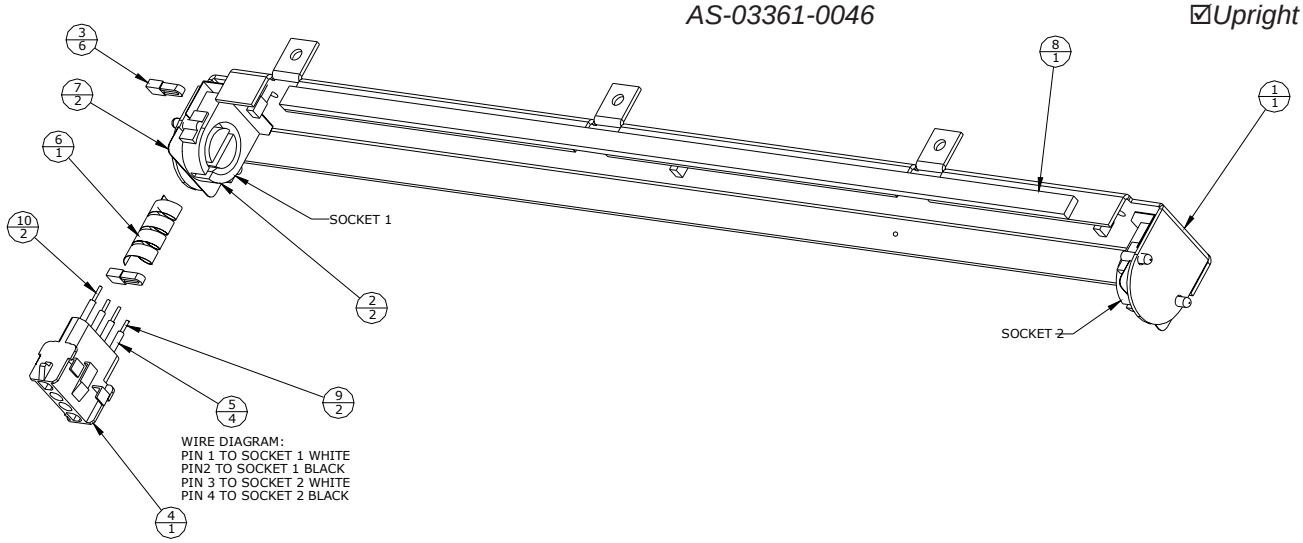

REF	PART #	DESCRIPTION	QTY
1	A-06503-0003	Bracket, Mounting, Glass Retainer, Wide	1
2	E-00120-0266	Socket, Fluorescent Lamp, CE97	2
3	E-00647-0004	Tie Wrap	3
4	E-00804-0004	Connector Housing Cap	1
5	E-00807-0006	Contact Pin, Amp 24-18	4

REF	PART #	DESCRIPTION	QTY
6	M-01777-5602	Spiral Wrap	1
7	P-00150-0295	Insulator, Polycarbonate, CE97	2
8	R-00553-0033	Gasket, 1/8 X 5/16 X 14.94 Inch, 2-Sided	1
9	WIP-ES202-1850	PVC, Solid, 18awg White Type TEW	2
10	WIP-ES202-1880	PVC, Solid, 18awg Black Type TEW	2

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000

System Panels P-08600-(SERIES)

☑*Upright*

PART #	DESCRIPTION
P-08600-S676	AGI TS Mounting Bracket, Magnetic Reader, Oval Top
P-08600-S622	AGI, Magnetic Reader, CTE/WTE
P-08600-S621	AGI, Magnetic Reader, WRE
P-08600-S669	AGI, Mounting Bracket, Magnetic Reader/16 X 2 Display/Keypad
P-08600-S632	AGI, Mounting Bracket, Optic Reader
P-08600-S623	AGI, Mounting bracket, Magnetic Reader
P-08600-S631	AGI, Optical Reader, CTE/WTE
P-08600-S630	AGI, Optical Reader, WRE
P-08600-S668	AGI, Reader/16 X 2 Display/Keypad, WRE
P-08600-S638	AGI/IGS, Keypad, CTE/WTE
P-08600-S637	AGI/IGS, Keypad, WRE
P-08600-S628	AGI/IGS, Magnetic Reader/Display/Button, CTE/WTE
P-08600-S660	AGI/IGS, Magnetic Reader/Display/Button/Keypad, CTE/WTE
P-08600-S659	AGI/IGS, Magnetic Reader/Display/Button/Keypad, WRE
P-08600-S627	AGI/IGS, Magnetic Reader/Display/Button, WRE
P-08600-S636	AGI/IGS, Mounting Bracket, Keypad
P-08600-S629	AGI/IGS, Mounting Bracket, Magnetic Reader/Display/Button
P-08600-S661	AGI/IGS, Mounting Bracket, Magnetic Reader/Display/Button/Keypad
P-08600-S667	AGI/IGS, Reader/16 X 2 Display/Keypad, CTE/WTE
P-08600-S649	Aristocrat, Overlay
P-08600-S650	Aristocrat, Player Tracking
P-08600-S651	Aristocrat, Player Tracking, WRE
P-08600-S602	Blank CTE WRE
P-08600-S601	Blank WRE
P-08600-S613	CDS, OSII, Magnetic/Optical Reader, CTE/WTE
P-08600-S612	CDS, OSII, Magnetic/Optical Reader, WRE
P-08600-S614	CDS, OSII, Mounting Board, Magnetic/Optical Reader
P-08600-S670	DACOM Mounting Bracket, Display/Keypad/Reader
P-08600-S671	DACOM Player Tracking, Display/Keypad/Reader, WRE
P-08600-S672	DACOM Player Tracking, Display/Keypad/Reader, CTE/WTE
P-08600-S610	DMK Reader, Display/Keypad, CTE/WTE
P-08600-S611	DMK, Mounting Bracket, Reader/Display/Keypad
P-08600-S626	EDT PT-M400, CTE/WTE
P-08600-S624	EDT PT-M400, Magnetic/Optical Reader
P-08600-S625	EDT PT-M400, Mounting Bracket, Magnetic/Optical Reader
P-08600-S604	EPI Reader/3-Button/Keypad, CTE/WTE

PART #	DESCRIPTION
P-08600-S603	EPI Reader, 3-Button/Keypad, WRE
P-08600-S605	EPI Reader, Mounting Board, 3-Button/Keypad
P-08600-S648	GRIPS
P-08600-S641	GRIPS CTE/WRE
P-08600-S639	GRIPS Mounting Bracket
P-08600-S647	GRIPS Mounting Bracket
P-08600-S640	GRIPS WRE
P-08600-S652	GRIPS WRE
P-08600-S663	GRIPS, STD3 Mounting Panel
P-08600-S664	GRIPS, STD3 Mounting Panel, CTE/WTE
P-08600-S665	GRIPS, STD3 Reader
P-08600-S620	GSI Reader Mounting Bracket, Reader/Display
P-08600-S618	GSI Reader WRE
P-08600-S619	GSI Reader CTE/WTE
P-08600-S658	MGM Mounting Bracket, Reader/Display
P-08600-S657	MGM Reader, Mounting Bracket, Reader/Display
P-08600-S656	MGM Reader/Display, WRE
P-08600-S616	MIKOHN Reader/Display/Keypad, CTE/WTE
P-08600-S615	MIKOHN Reader/Display/Keypad, WRE
P-08600-S617	MIKOHN Reader, Mounting Bracket, Display/Keypad
P-08600-S654	Monte Carlo Mounting Bracket, Magnetic Reader/Display
P-08600-S655	Monte Carlo, CTE/WTE
P-08600-S644	Sands, Back Plate
P-08600-S702	Sands, SMS, Bar Panel Mounting Bracket, Black, CTE/WTE
P-08600-S802	Sands, SMS, Bar Panel Mounting Bracket, Black, WRE
P-08600-S645	Sands, SMS, Bar Panel Mounting Bracket, CTE/WTE
P-08600-S646	Sands, SMS, Bar Panel Mounting Bracket, WRE
P-08600-S7XX	Sands, SMS, Mounting Bracket, C/WTE
P-08600-S8P4	Sands, SMS, Mounting Bracket, Gold, WRE
P-08600-S7P4	Sands, SMS, Mounting Bracket, Gold, CTE/WTE
P-08600-S8XX	Sands, SMS, Mounting Bracket, WRE
P-08600-S635	SDS Component, CTE/WTE
P-08600-S634	SDS Component, WRE
P-08600-S609	SDS DMK Reader/Display/Keypad, WRE
P-08600-S633	SDS Mounting Component

P-08600-S601

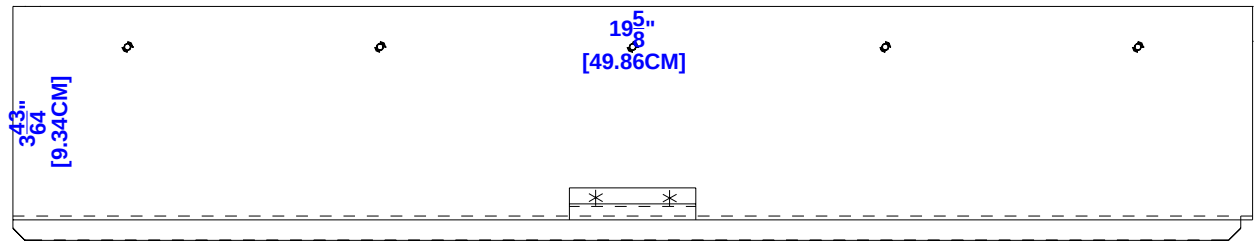

P-08600-S602

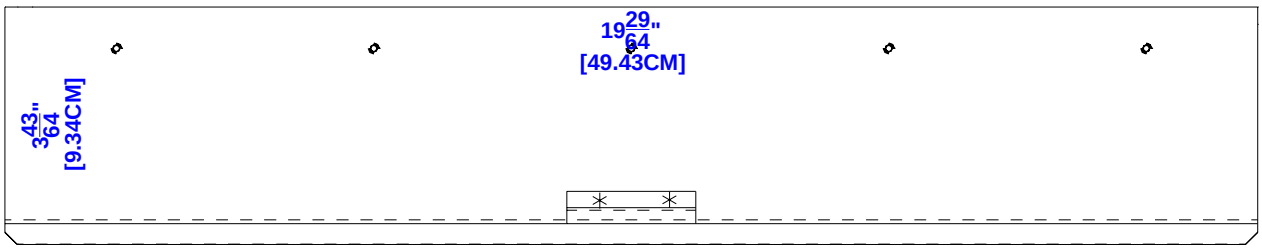

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

System Panels P-08600-(SERIES)

☑*Upright*

P-08600-S603

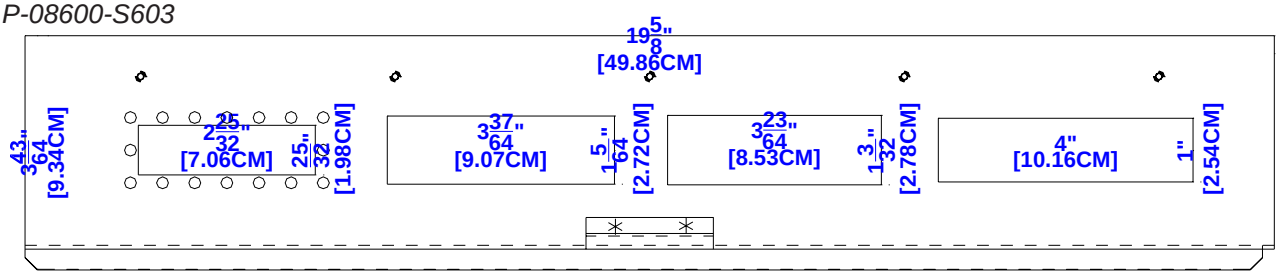

P-08600-S604

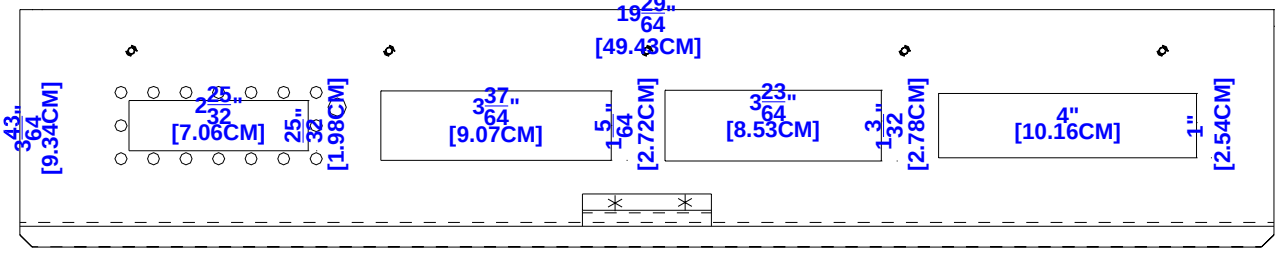

P-08600-S605

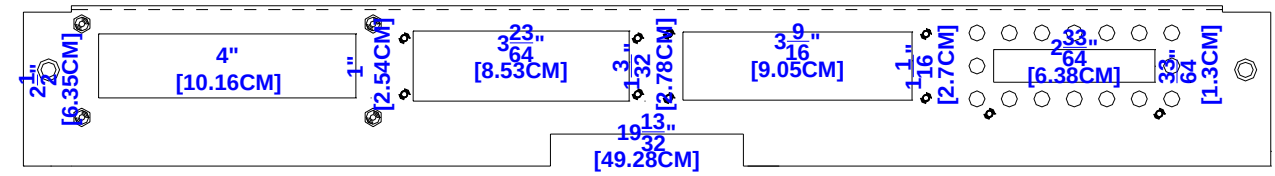

P-08600-S609

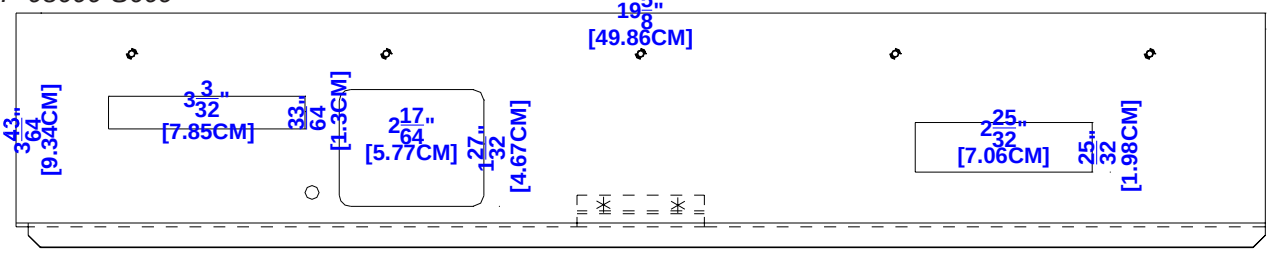

P-08600-S610

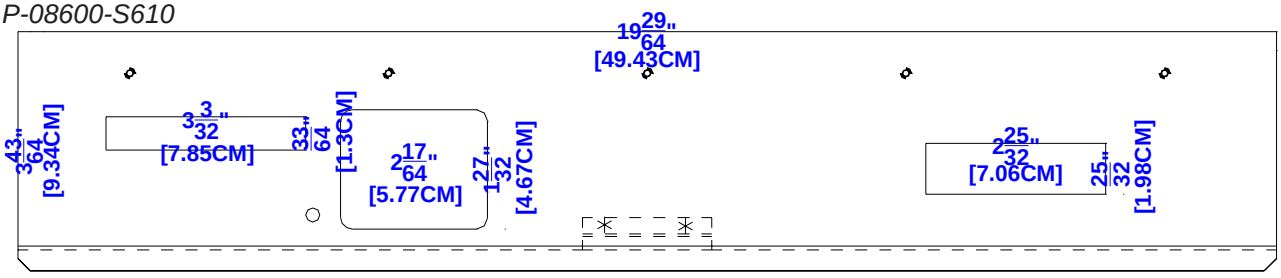

P-08600-S611

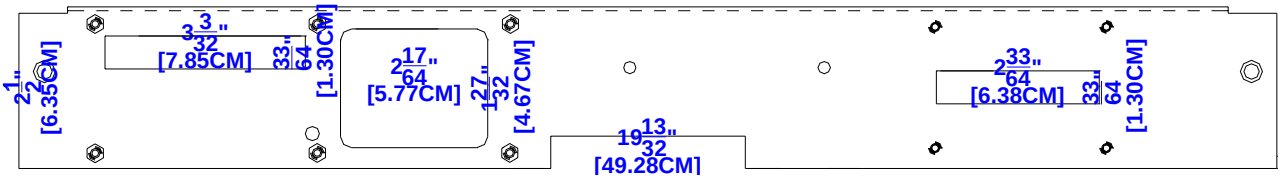

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

ProSlot® 6000

System Panels P-08600-(SERIES)

☑*Upright*

P-08600-S612

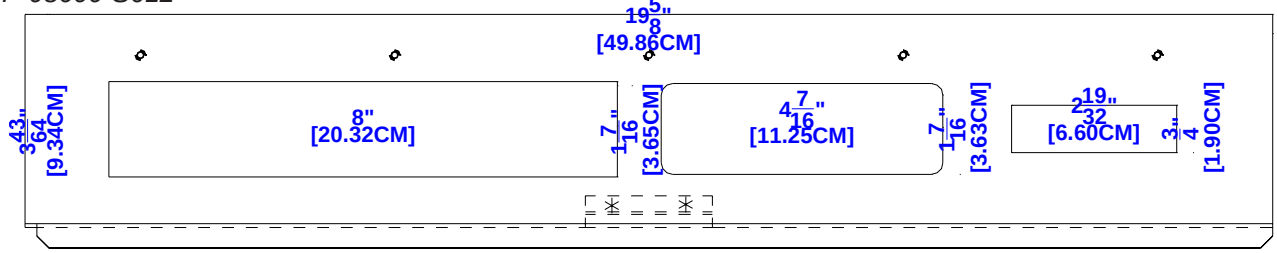

P-08600-S613

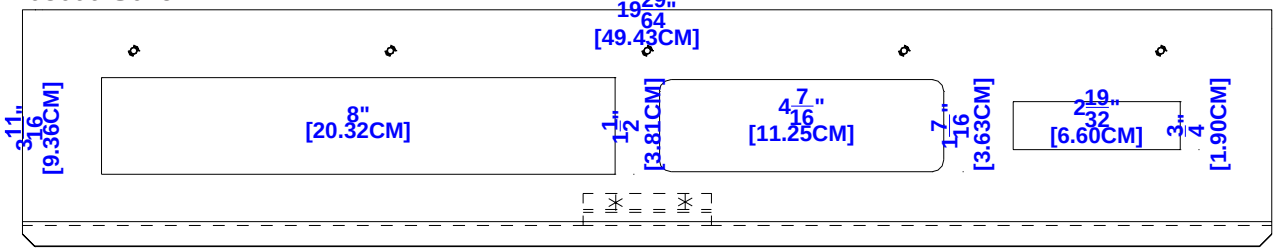

P-08600-S614

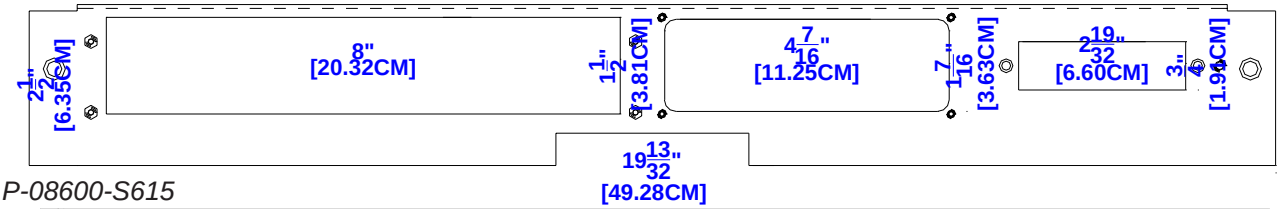

P-08600-S615

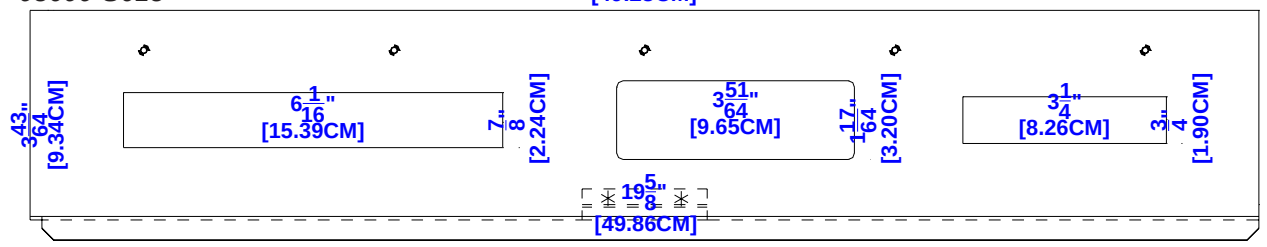

P-08600-S616

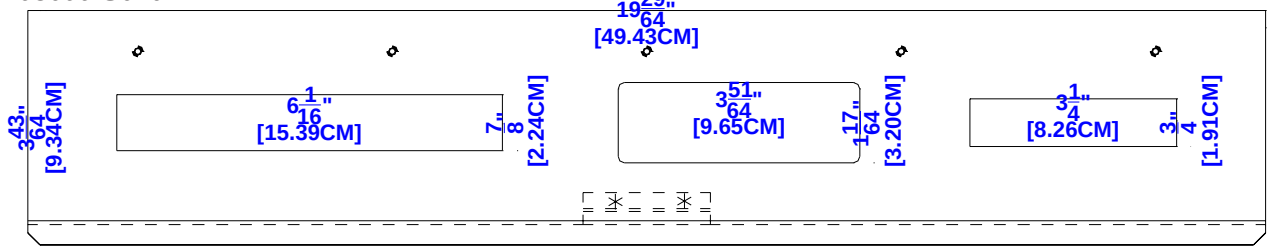

P-08600-S617

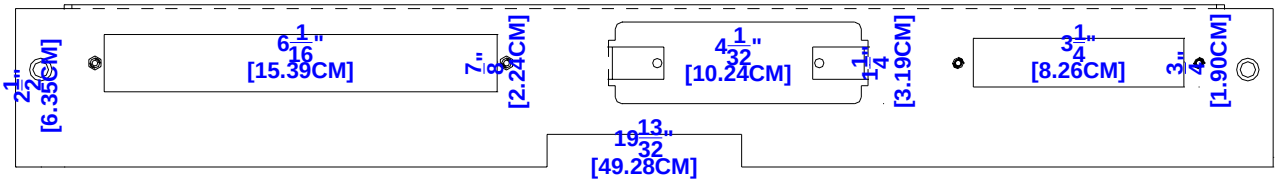

***Illustrations not to scale.**

| - Revised, || - New

©2003 Bally Gaming and Systems

System Panels P-08600-(SERIES)

☑*Upright*

P-08600-S618

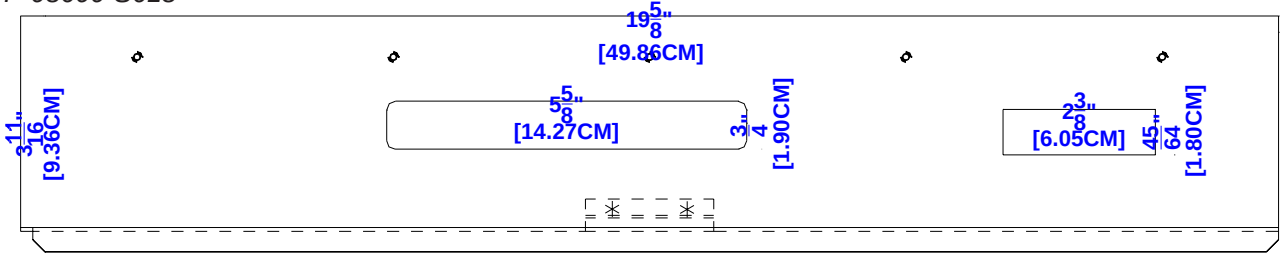

P-08600-S619

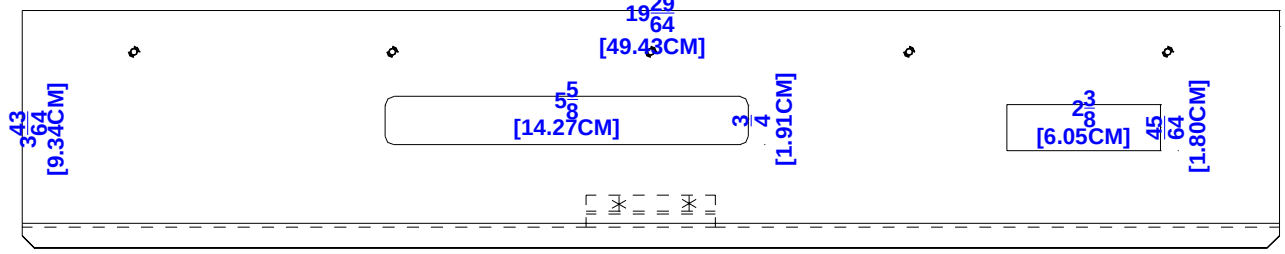

P-08600-S620

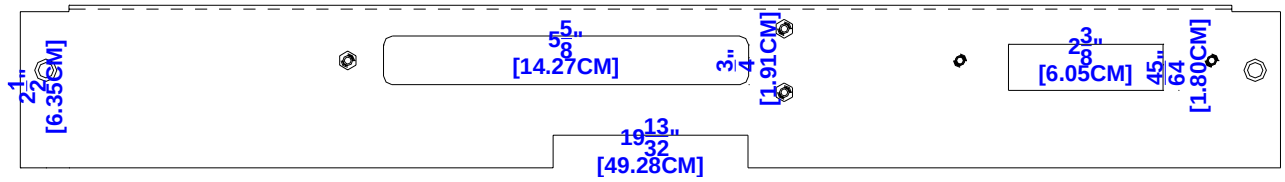

P-08600-S621

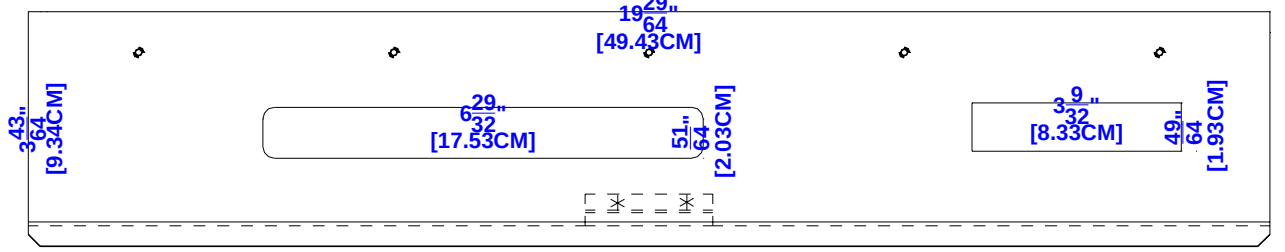

P-08600-S622

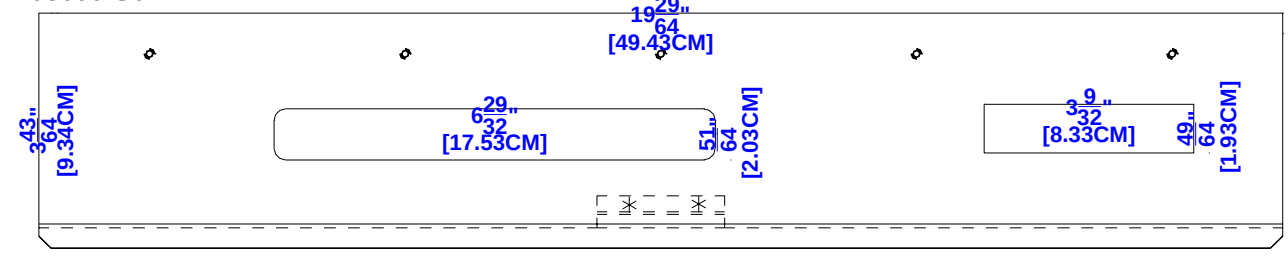

P-08600-S623

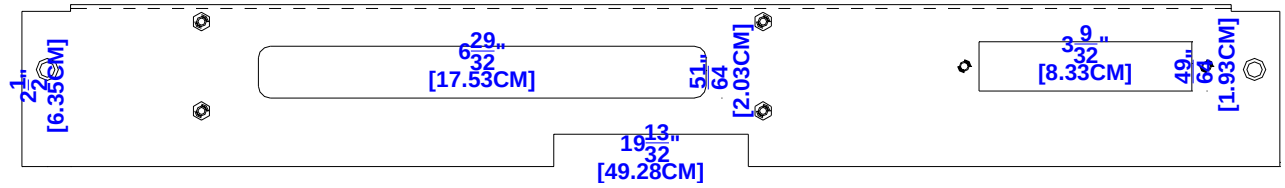

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

ProSlot® 6000

System Panels P-08600-(SERIES)

☑*Upright*

P-08600-S624

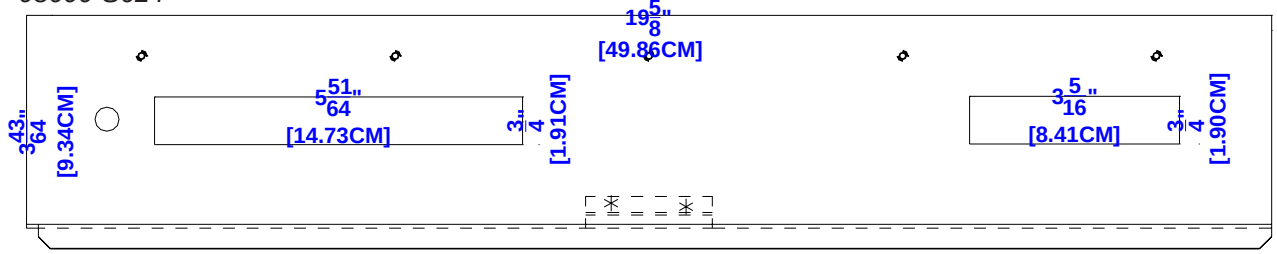

P-08600-S625

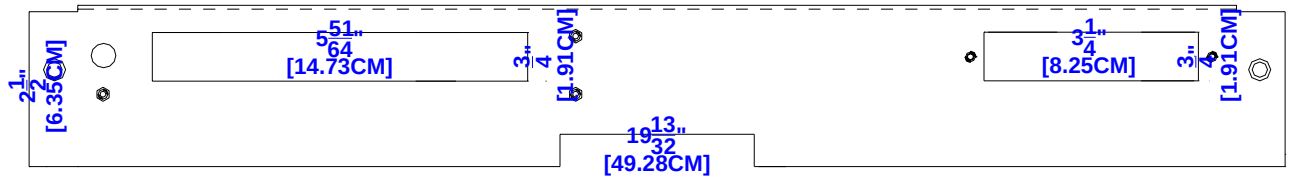

P-08600-S626

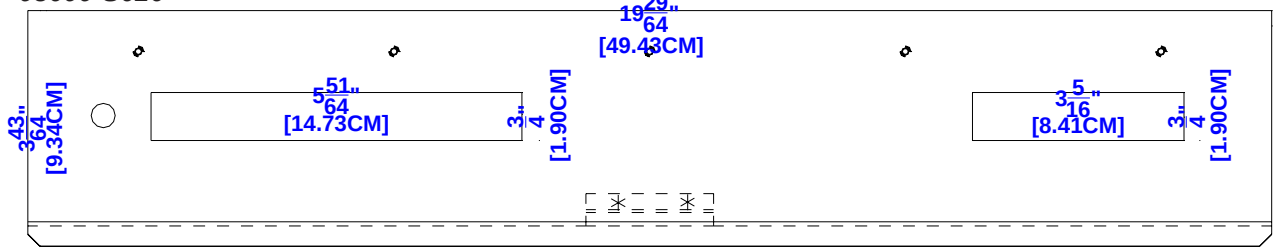

P-08600-S627

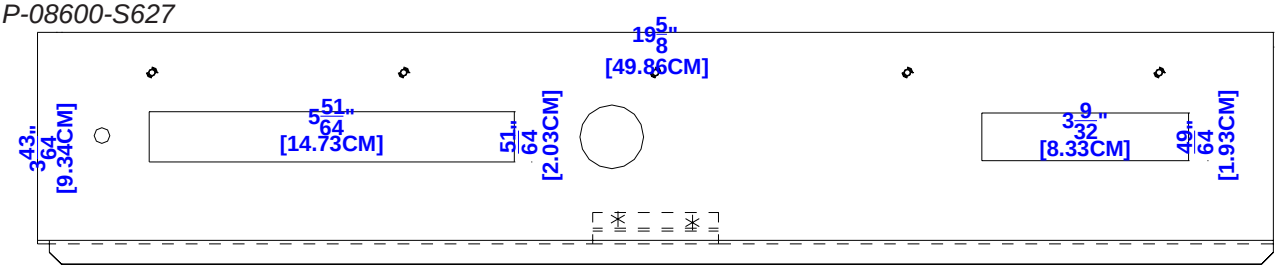

P-08600-S628

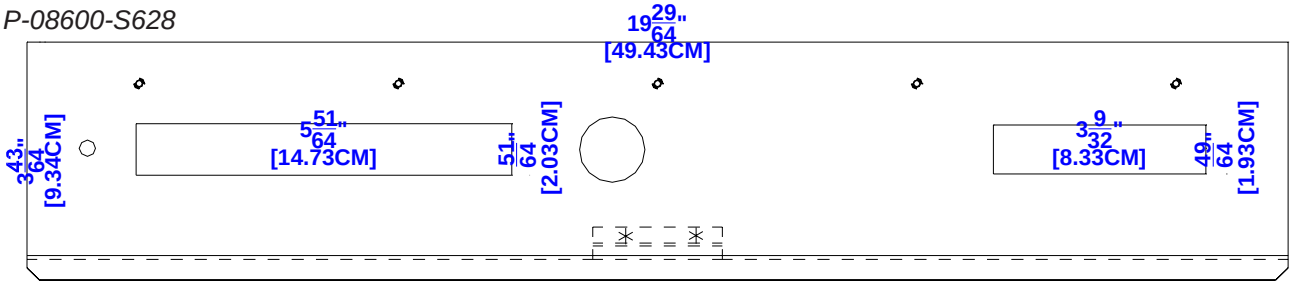

P-08600-S629

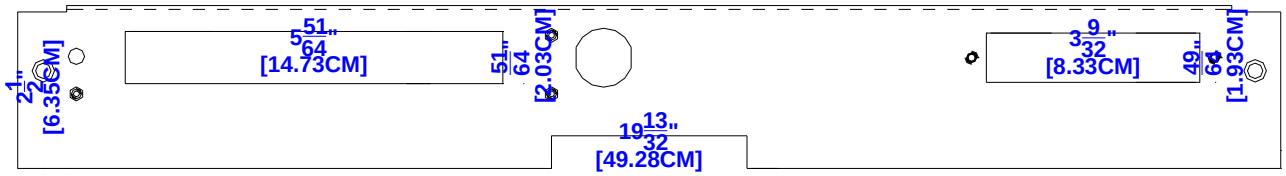

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

System Panels P-08600-(SERIES)

☑*Upright*

P-08600-S630

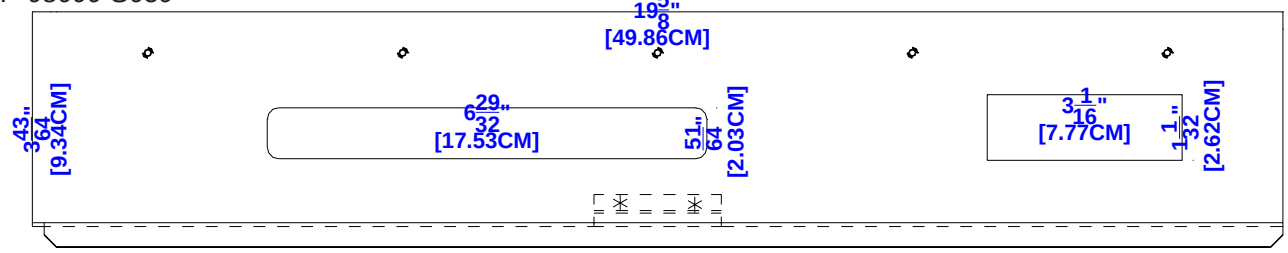

P-08600-S631

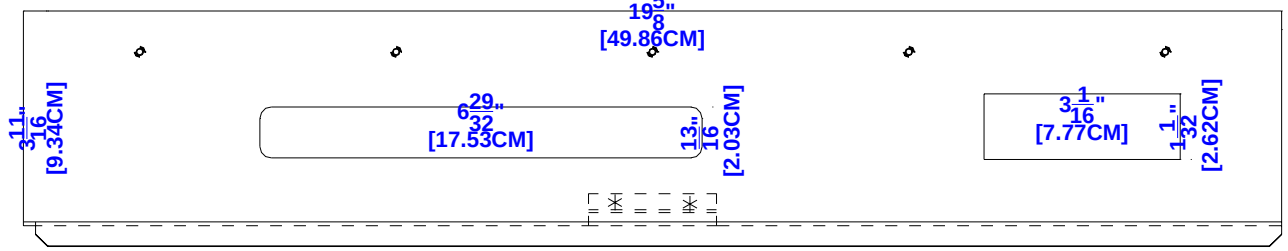

P-08600-S632

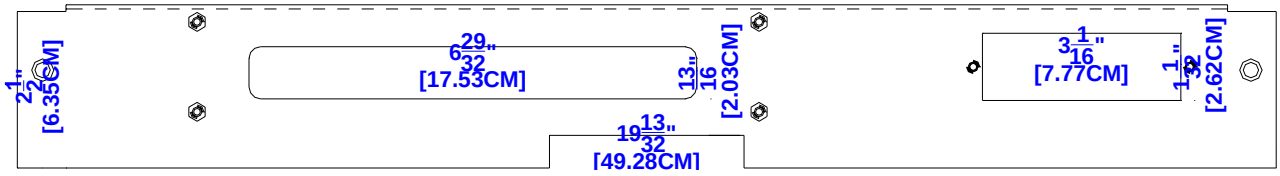

P-08600-S633

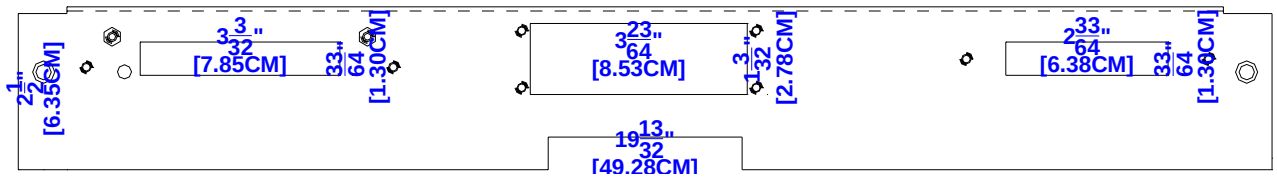

P-08600-S634

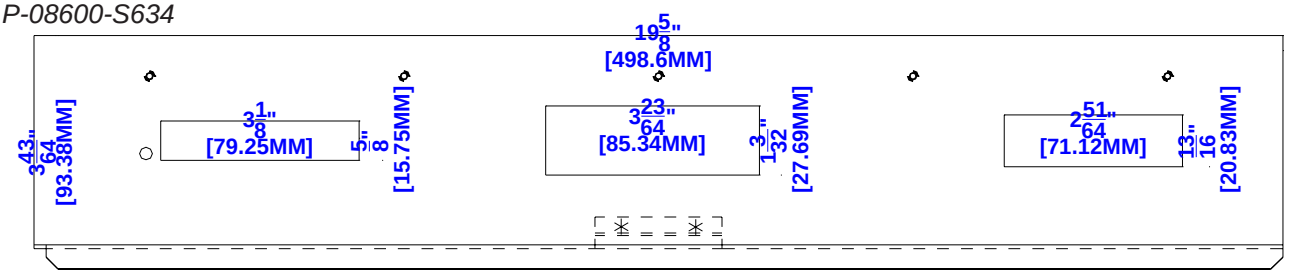

P-08600-S635

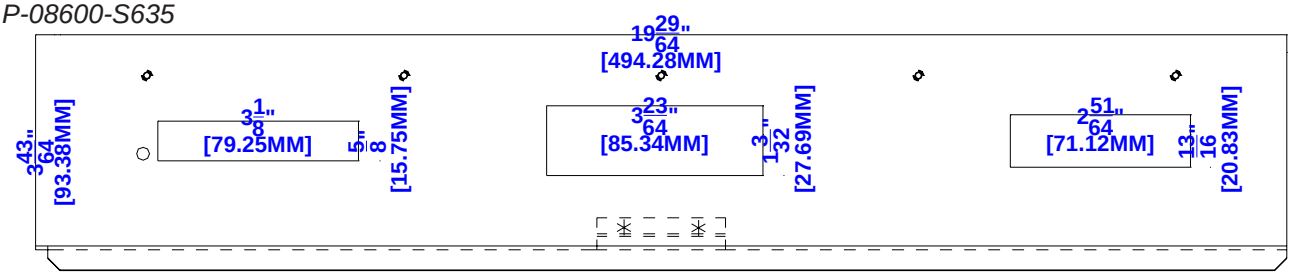

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

ProSlot® 6000

System Panels P-08600-(SERIES)

☑*Upright*

P-08600-S636

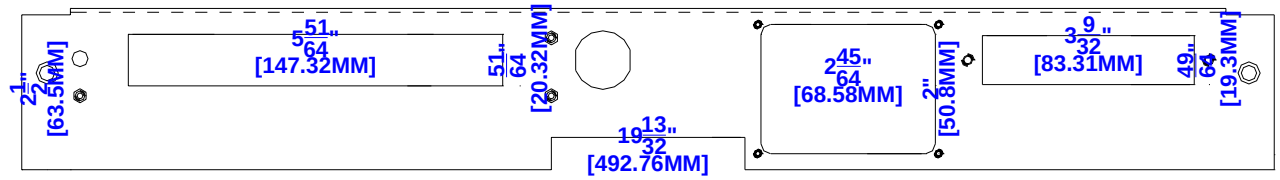

P-08600-S637

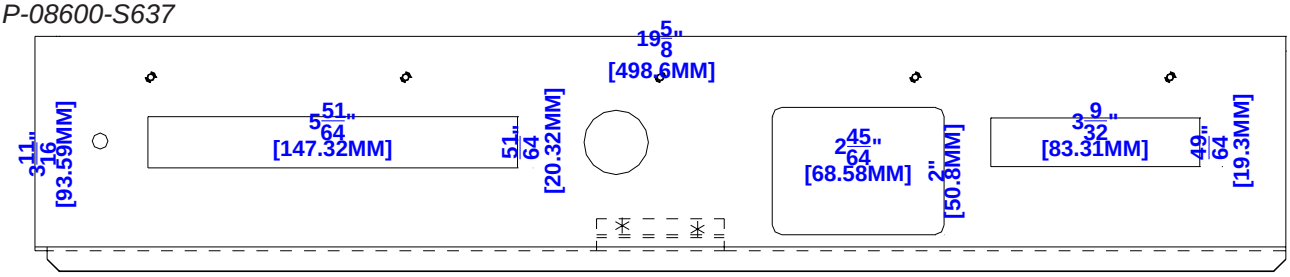

P-08600-S638

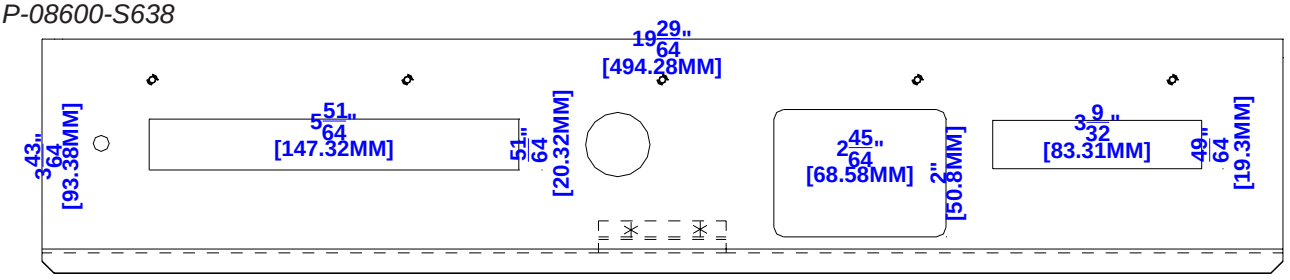

P-08600-S639

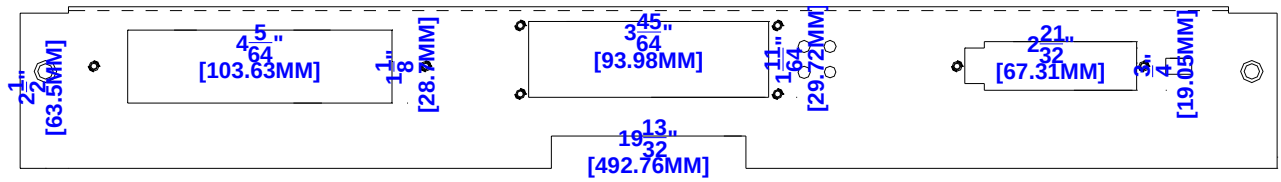

P-08600-S640

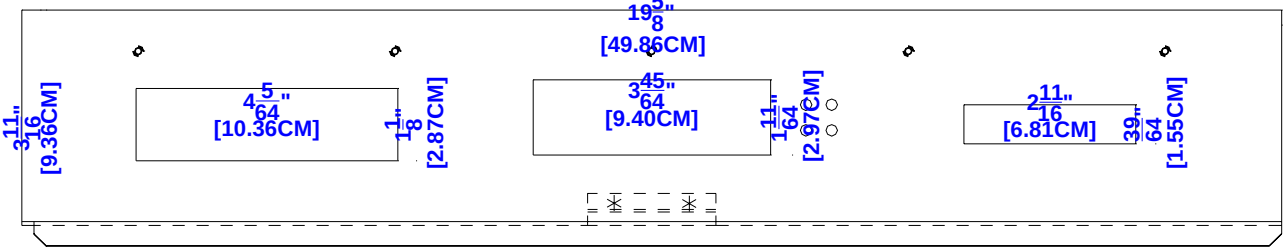

P-08600-S641

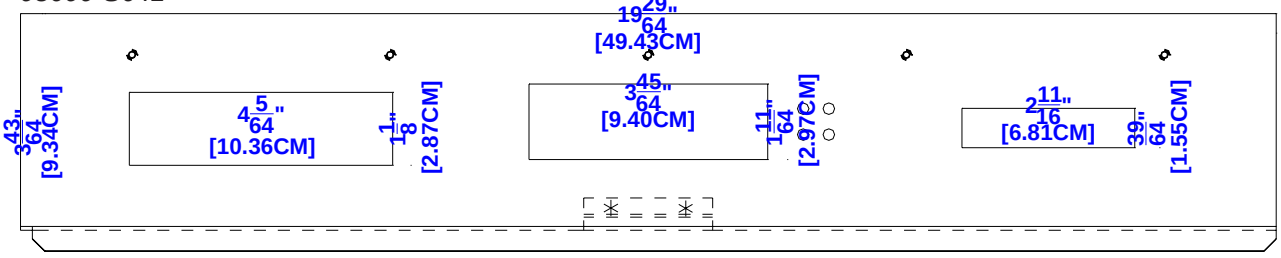

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

System Panels P-08600-(SERIES)

☑*Upright*

|| *P-08600-S644*

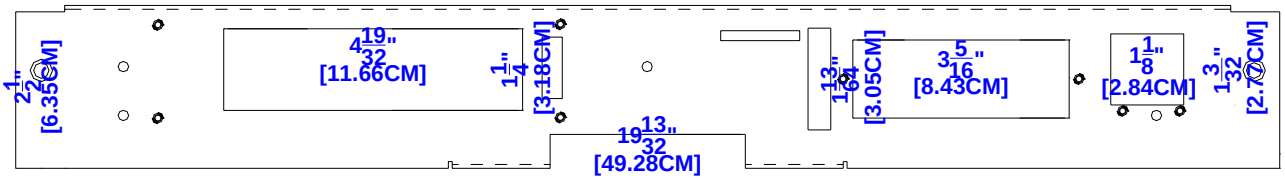

P-08600-S645



P-08600-S646



P-08600-S647

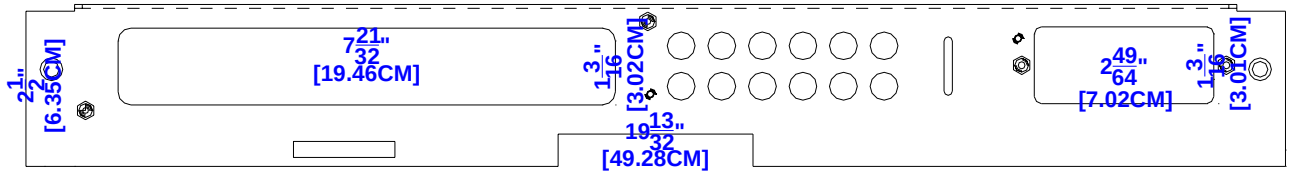

|| *P-08600-S648*

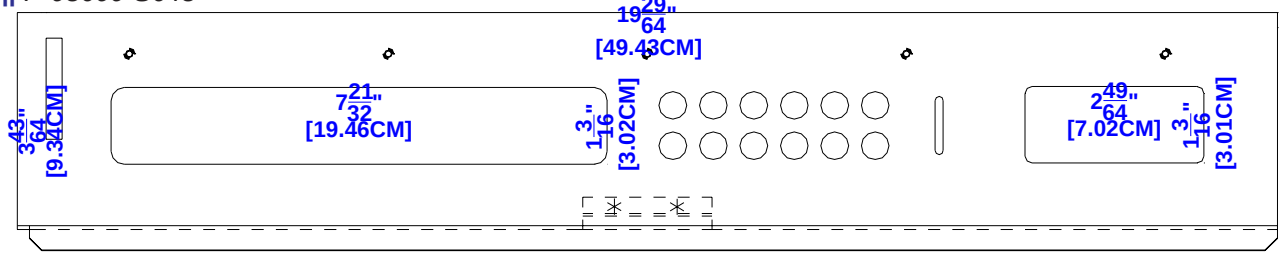

P-08600-S649

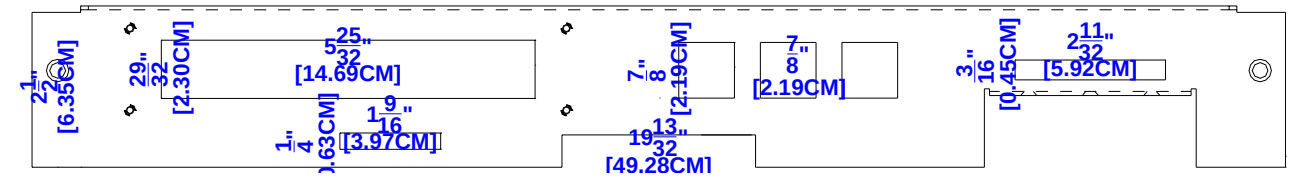

P-08600-S650

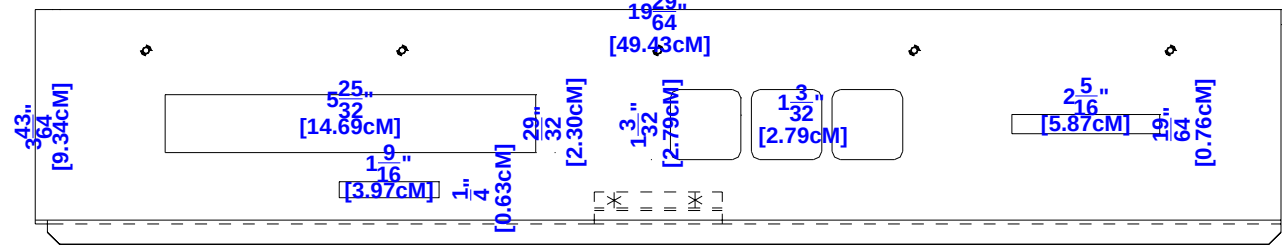

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

ProSlot® 6000

System Panels P-08600-(SERIES)

☑*Upright*

P-08600-S651

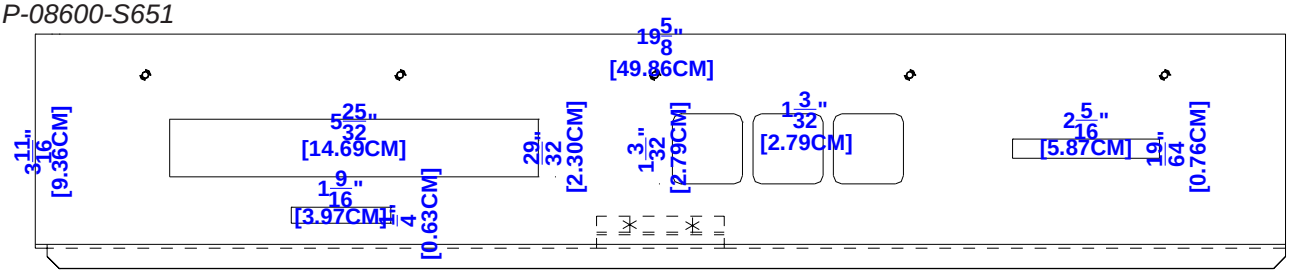

P-08600-S652

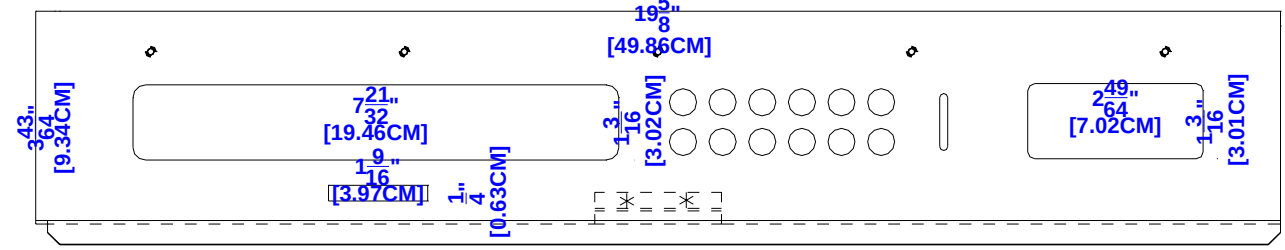

P-08600-S654

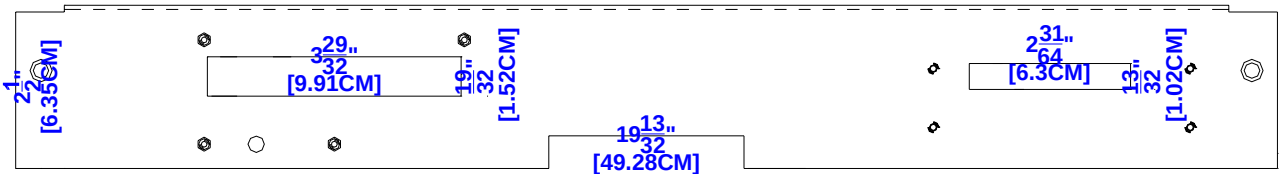

|| *P-08600-S655*

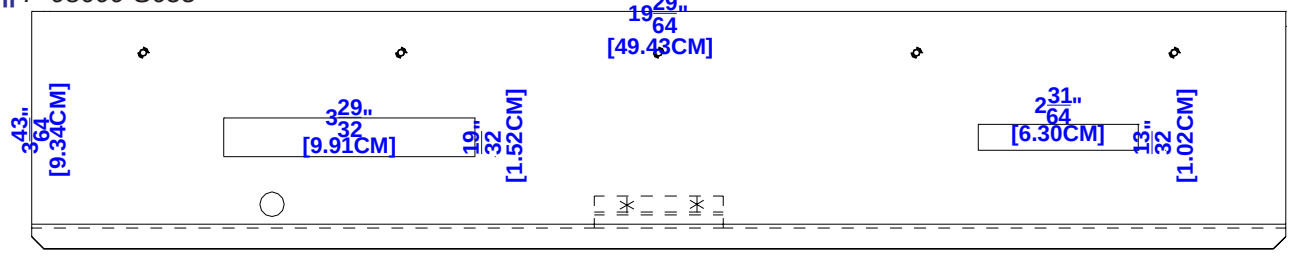

P-08600-S656

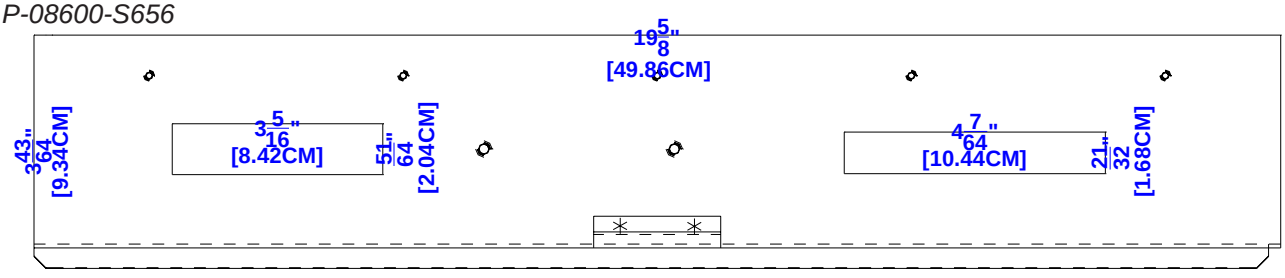

P-08600-S657

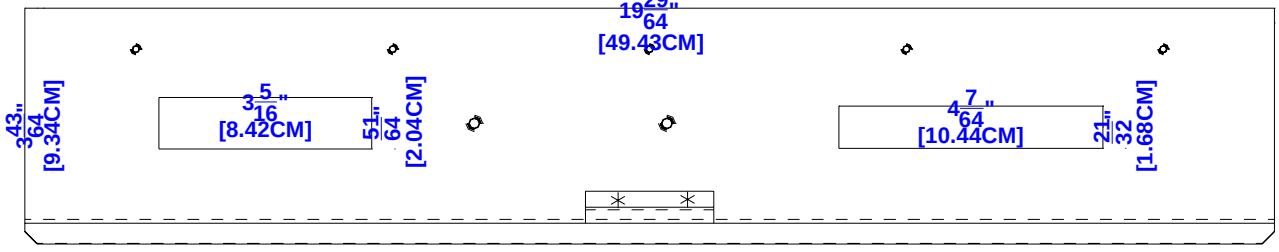

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

System Panels P-08600-(SERIES)

☑*Upright*

|| *P-08600-S658*

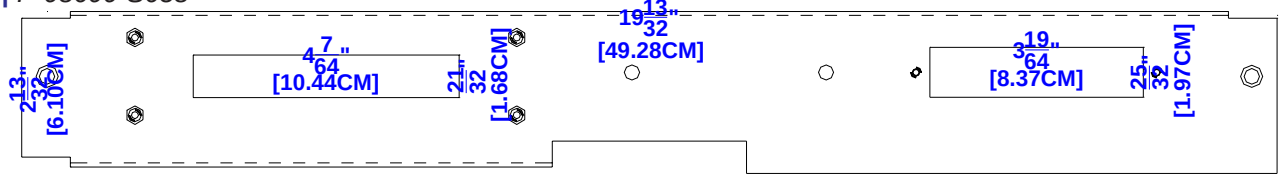

P-08600-S659

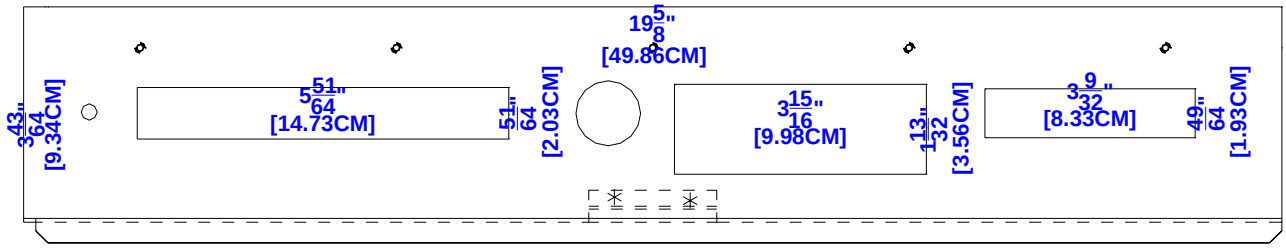

P-08600-S660

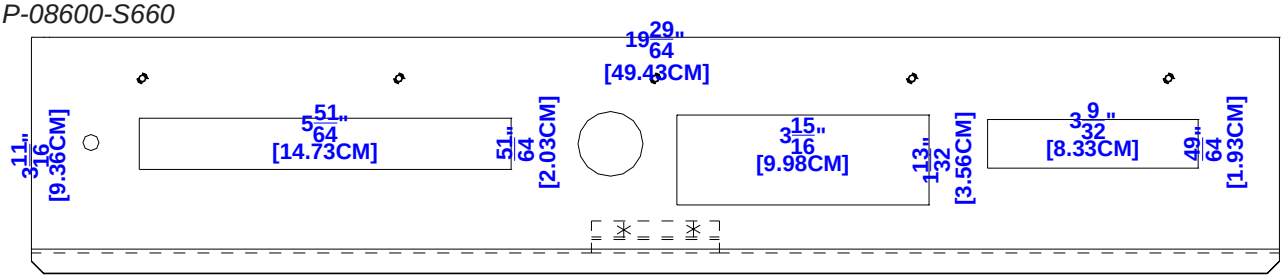

P-08600-S661

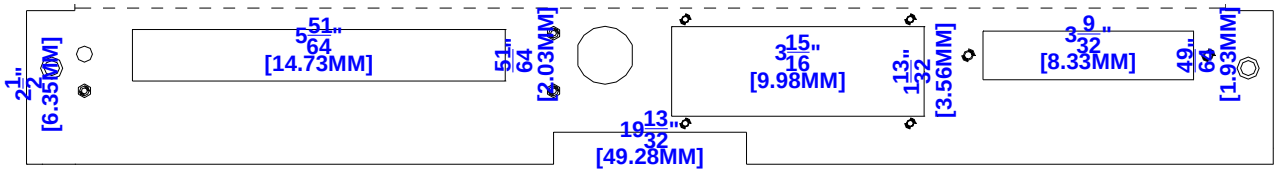

|| *P-08600-S663*

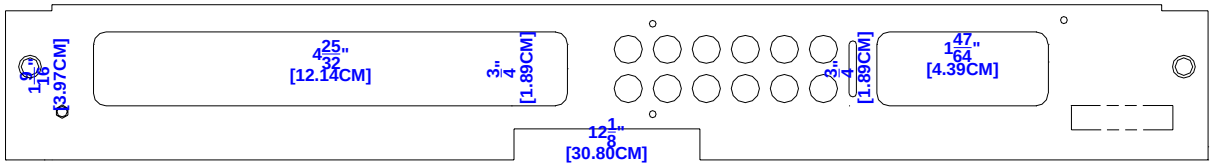

|| *P-08600-S664*

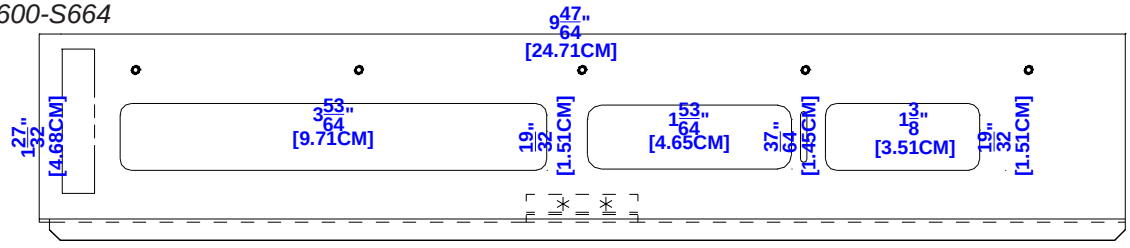

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

ProSlot® 6000

System Panels P-08600-(SERIES)

☑*Upright*

|| *P-08600-S665*

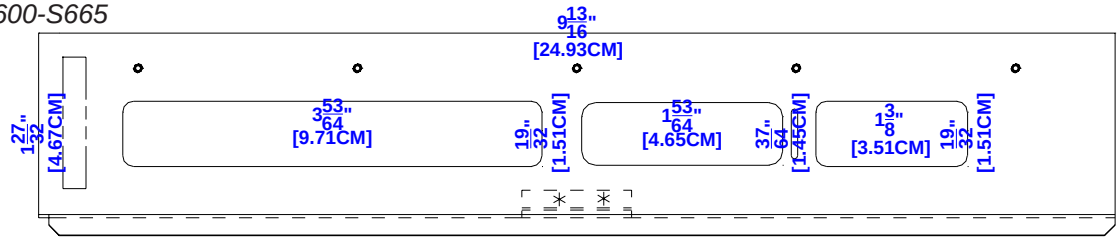

|| *P-08600-S667*

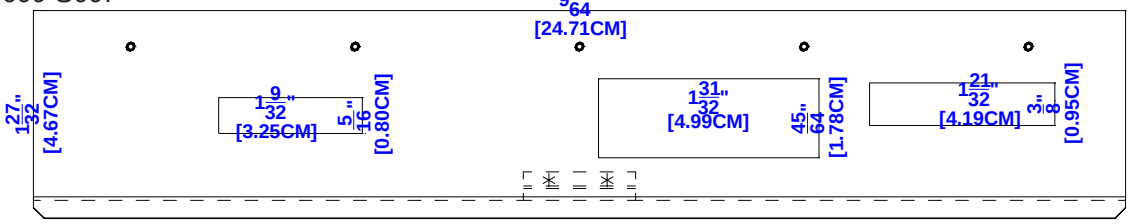

|| *P-08600-S668*

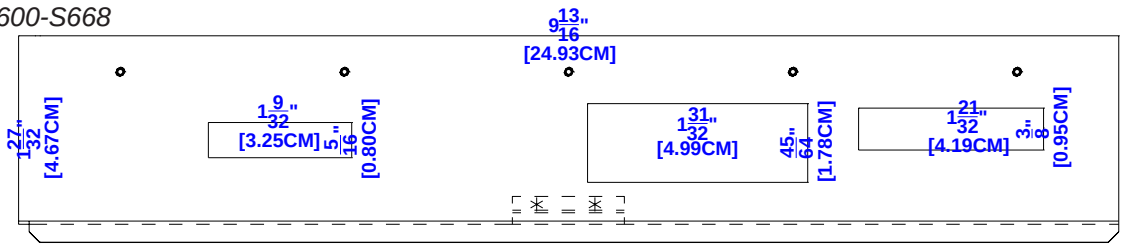

|| *P-08600-S669*

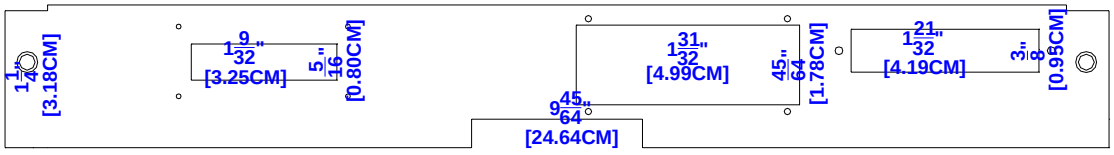

|| *P-08600-S670*

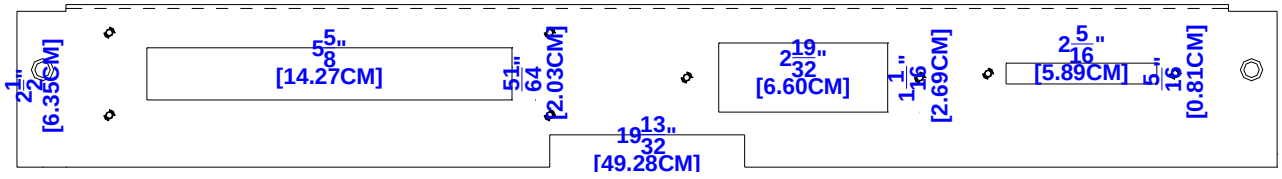

|| *P-08600-S671*

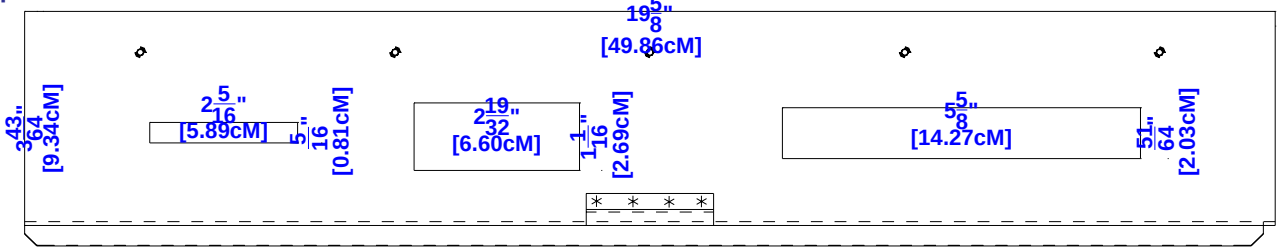

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

ProSlot® 6000

System Panels P-08600-(SERIES)

☑*Upright*

|| *P-08600-S672*

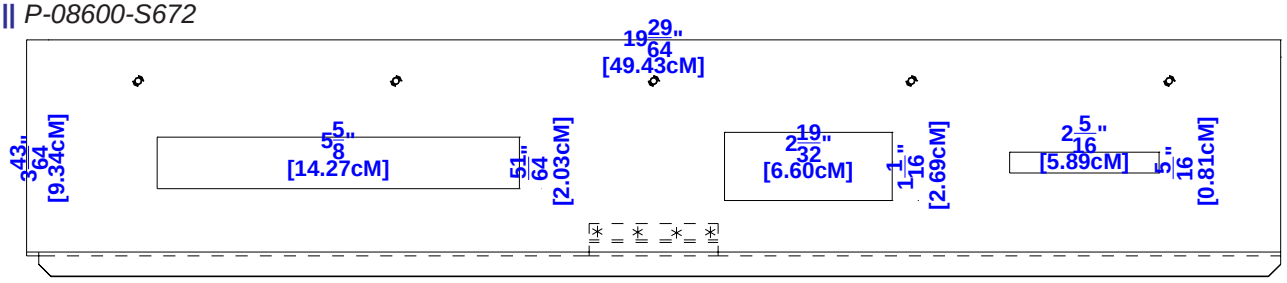

|| *P-08600-S676*

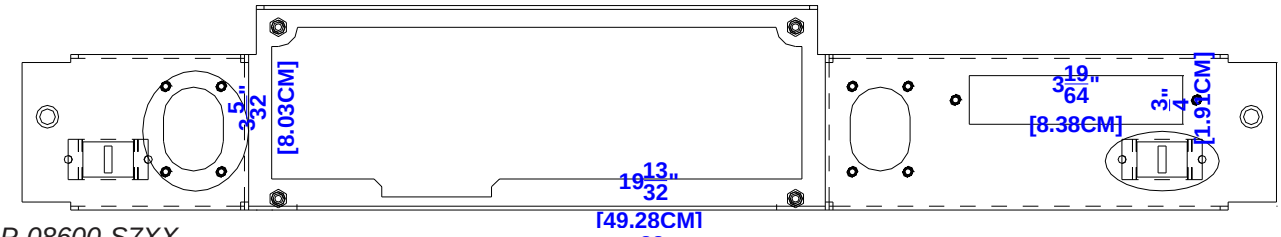

P-08600-S7XX

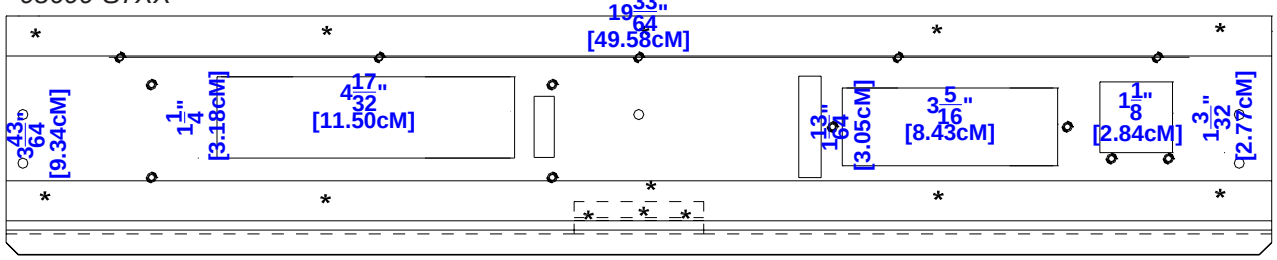

P-08600-S8XX

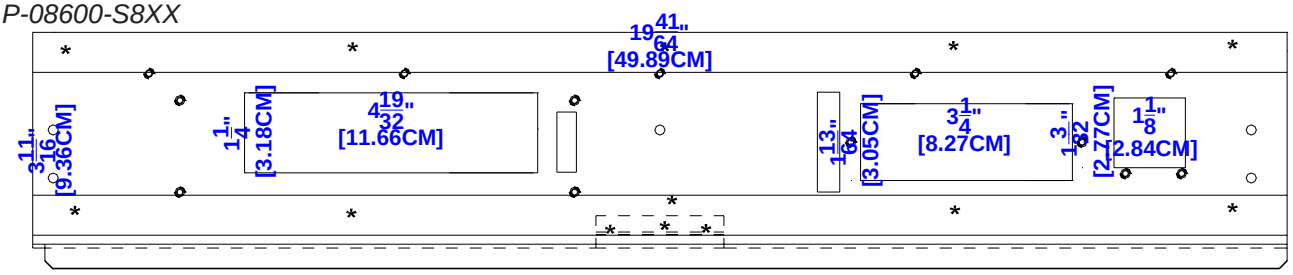

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Hopper Escalator, Seiko
AS-031XX-(SERIES)

☑Slant / ☑S6E

Hopper Escalator, Seiko
AS-03105-(SERIES)

☑Slant

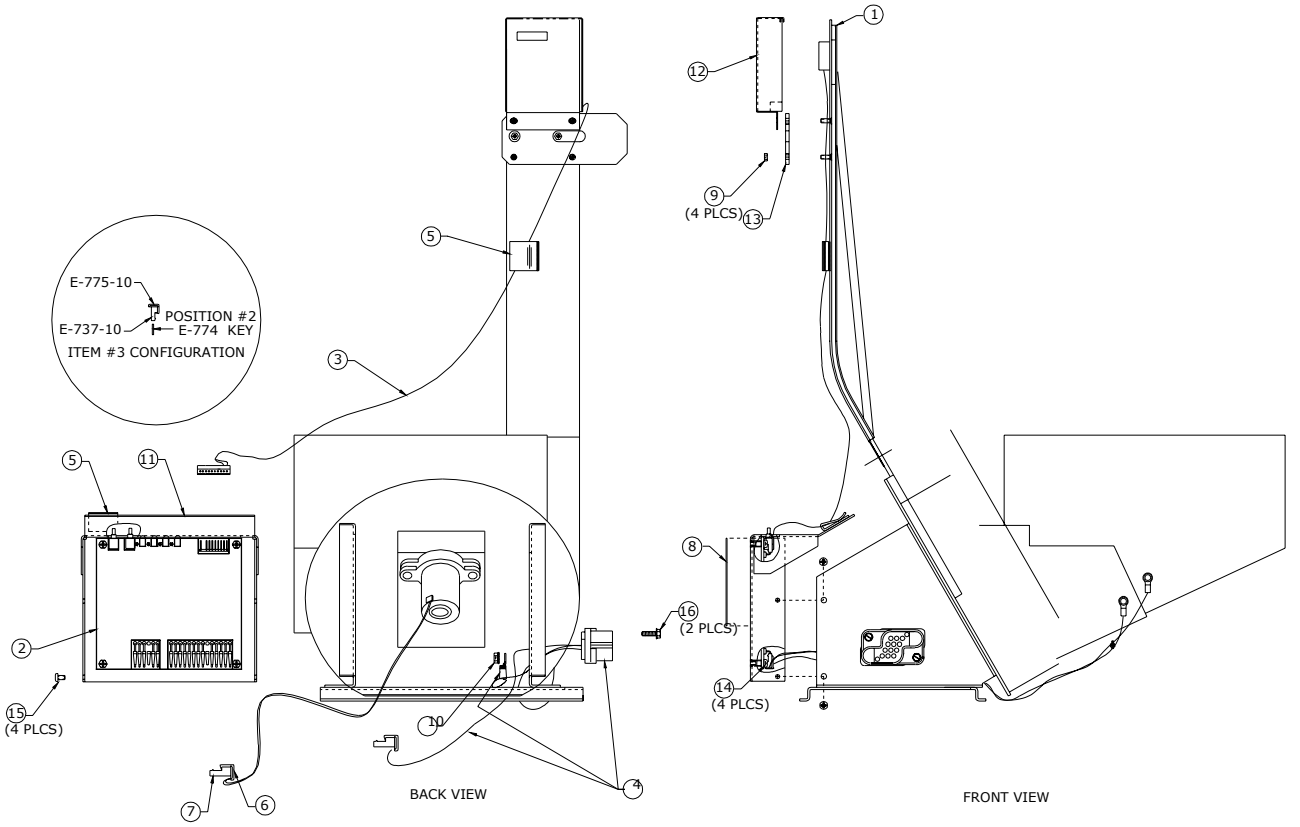

Legend

PART #	DENOM	COUNTRY	HOPPER P/N	DIMENSIONS (MM)
AS-03105-0333	25¢	US	AS-03105-0332	.957 X .067
AS-03105-0335	50¢	US	AS-03105-0334	1.205 X .083
AS-03105-0337	$1 Token		AS-03105-0336	1.465 X .098
| AS-03105-0339	US 5¢ / 1 LAT	US	AS-03105-0338	.835 X .075
AS-03105-0341			AS-03105-0340	1.750 X .114
AS-03105-0343	$25 Token	US	AS-03105-0342	1.874 X .100
AS-03105-0351	1 DM	Germany	AS-03105-0350	.925 X .071
AS-03105-0355	2 FF	France	AS-03105-0354	1.043 X .067
AS-03105-0357	5 FF	France	AS-03105-0356	1.043 X .067
AS-03105-0359	10 FF	France	AS-03105-0358	.902 X .087
|| AS-03105-0360	$1 Loonie	Canada	AS-03105-0361	1.043 X .079
AS-03105-0375	10 Rand	South Africa	AS-03105-0374	1.126 X .079
AS-03105-0379	2 DM	Germany	AS-03105-0378	1.055 X .071
AS-03105-0381	20 BF		AS-03105-0380	1.012 X .094
| AS-03105-0386	Cas Bled		AS-03105-0385	1.102 X .079
|| AS-03105-0390	1000 Lira		AS-03105-0389	1.024 X .075
AS-03105-0401	1 Rand	South Africa	AS-03105-0400	.787 X .083
|| AS-03105-0408	50¢	GDC	AS-03105-0407	1.244 X .079
AS-03105-0411	$1	Canada	AS-03105-0412	1.343 X .098
AS-03105-0413	25¢	Canada	AS-03105-0414	.933 X .063
AS-03105-0429	10 Token		AS-03105-0428	7.700 X .138
AS-03105-0431	$5 Token		AS-03105-0430	1.550 X .100
AS-03105-0433	1 DM Token	Germany	AS-03105-0432	.956 X .098
AS-03105-0435	Lit 5000		AS-03105-0434	1.375 X .094
AS-03105-0437	Esc50		AS-03105-0436	.984 X .119
AS-03105-0439	25 Rand Token	South Africa	AS-03105-0438	1.205 X .095
AS-03105-0441	$25 B Token		AS-03105-0440	1.65 X .095
AS-03105-0449	100 BS Token	Venezuela	AS-03105-0448	1.124 X .065
| AS-03105-0551		OLGC	AS-03105-0450	.800 X .072

PART #	DENOM	COUNTRY	HOPPER P/N	DIMENSIONS (MM)
AS-03105-0453	$1	Australia	AS-03105-0352	.985 X .103
AS-03105-0455	$2	Australia	AS-03105-0354	.807 X .111
AS-03105-0457	500 CN	Venezuela	AS-03105-0456	1.121 X .084
AS-03105-0459	2 Rand Token	South Africa	AS-03105-0458	.906 X .103
AS-03105-0461	5 Rand Token	South Africa	AS-03105-0460	1.025 X .097
AS-03105-0463	10 Rand Token	South Africa	AS-03105-0462	1.12 X .094
AS-03105-0465	100 BS	Venezuela	AS-03105-0464	.98 X .085
AS-03105-0469	1 Rand Token	Monaco	AS-03105-0468	.944 X .078
AS-03105-0471	50 Centavo Token		AS-03105-0470	1.06 X .068
AS-03105-0473	25 Centavo Token		AS-03105-0472	.966 X .067
AS-03105-0475	25¢	OLGC	AS-03105-0474	.900 X .067
AS-03105-0477	$1	OLGC	AS-03105-0476	1.125 X .101
AS-03105-0481	$1	Canada	AS-03105-0480	1.175 X .075
AS-03105-0483		Germany	AS-03105-0482	.911 X .066
AS-03105-0485		Chiapas, Mexico	AS-03105-0484	.802 X .062
AS-03105-0487	Token	Russia	AS-03105-0486	1.064 X .099
AS-03105-0489	50¢	OLGC	AS-03105-0488	1.065 X .06
AS-03105-0493		Lithuania	AS-03105-0492	.957 X .064
|| AS-03105-0495	20E	Euro	AS-03105-0494	.877 X .084
|| AS-03105-0497	50E	Euro	AS-03105-0496	.955 X .094
|| AS-03105-0499	1E	Euro	AS-03105-0498	.916 X .092
|| AS-03105-0501	2E	Euro	AS-03105-0500	1.015 X .087
|| AS-03105-0505	.02E	Euro	AS-03105-0504	.739 X .066
|| AS-03105-0507	.05E	Euro	AS-0310-0506	.837 X .066
|| AS-03105-0509	10E	Euro	AS-03105-0508	.778 X .076
|| AS-03105-0511	$2 Token	Ontario, Canada	AS-03105-0510	1.25 X .101
|| AS-03105-0513	Token	Latvia	AS-03105-0512	.952 X .068
|| AS-03105-0515	100 Won	Korea	AS-03105-0514	.94 X .064
|| AS-03105-0517	$10 Token		AS-03105-0516	1.706 X .122

| - Revised, || - New

©2003 Bally Gaming and Systems

Hopper Escalator, Seiko (Cont.)
AS-031XX-(SERIES)

☑Slant / ☑S6E

REF	PART #	DESCRIPTION	QTY
1	AS-03105-XXXX	Hopper, Seiko (See Legend)	1
2	AS-03356-0338	Controller Board, Dual Optic Hopper	1
3	E-00537-7766	Cable, Coin Switch, Hopper	1
4	CBL-30019-0001	Cable, Seiko Hopper	1
5	E-00718	Cable, Holder, Flat	2
6	E-00749-0006	MTA-156 Ins Disp Standard Cover	1
7	E-00761-0006	MTA -156, Disp Connector 22g	1
8	LBL-00178-0003	Label, Instructions, Hopper	1

Hopper Escalator, Seiko (Cont.)
AS-03105-(SERIES) *☑Slant*

REF	PART #	DESCRIPTION	QTY
9	M-03064-0002	Nut, Keps Metric M3 X .5 Zinc	4
10	NLS-00832-1112	Nut, 8-32	1
11	P-09319-0360	Bracket, Controller Board Mounting	1
12	P-09319-0191	Cover, Hopper Coin Switch	1
13	P-09322-0058	Plate, Escalator Alignment	1
14	LSPP-M0470-1106	Screw, M4 X 10mm Mach W/Lock Ph Pan Hd	4
15	LSPP-M0470-1104	Screw, M4 X 6mm Mach W/Lock Ph Pan Hd	4
16	TFSS-00832-1108	Screw, 8-32 X 1/2 Thd Form Serrated Hex Hd	2

|| *Hopper Escalator, Seiko*
AS-03117-(SERIES) *☑S6E*

PART #	DENOM	SEIKO PART #	DIMENSIONS (MM)
AS-03117-0001	United States 5¢	DH70W4M005000	3835 X .075
AS-03117-0002	Russian 5 Ruble	DH70W4M523000	.984 X .078
AS-03117-0003	Cirsa 25 Centavo Token	DH70W4MCTS000	.966 X .067
AS-03117-0004	$1 Token	DH70W4M10T000	1.469 X .101
AS-03117-0005	United States 25¢	DH70W4M025000	.955 X .069
AS-03117-0006	.50 Euro	DH70W4M466000	.955 X .069
AS-03117-0007	100 Won (Korean)	DH70W4M10K000	.940 X .064
AS-03117-0008	25¢ OLGC Token	DH70W4M551000	.902 X .067
AS-03117-0009	Bally Germany Token	DH70W4M395000	.909 X .067
AS-03117-0010	Uruguay Token	DH70W4M552000	.955 X .080

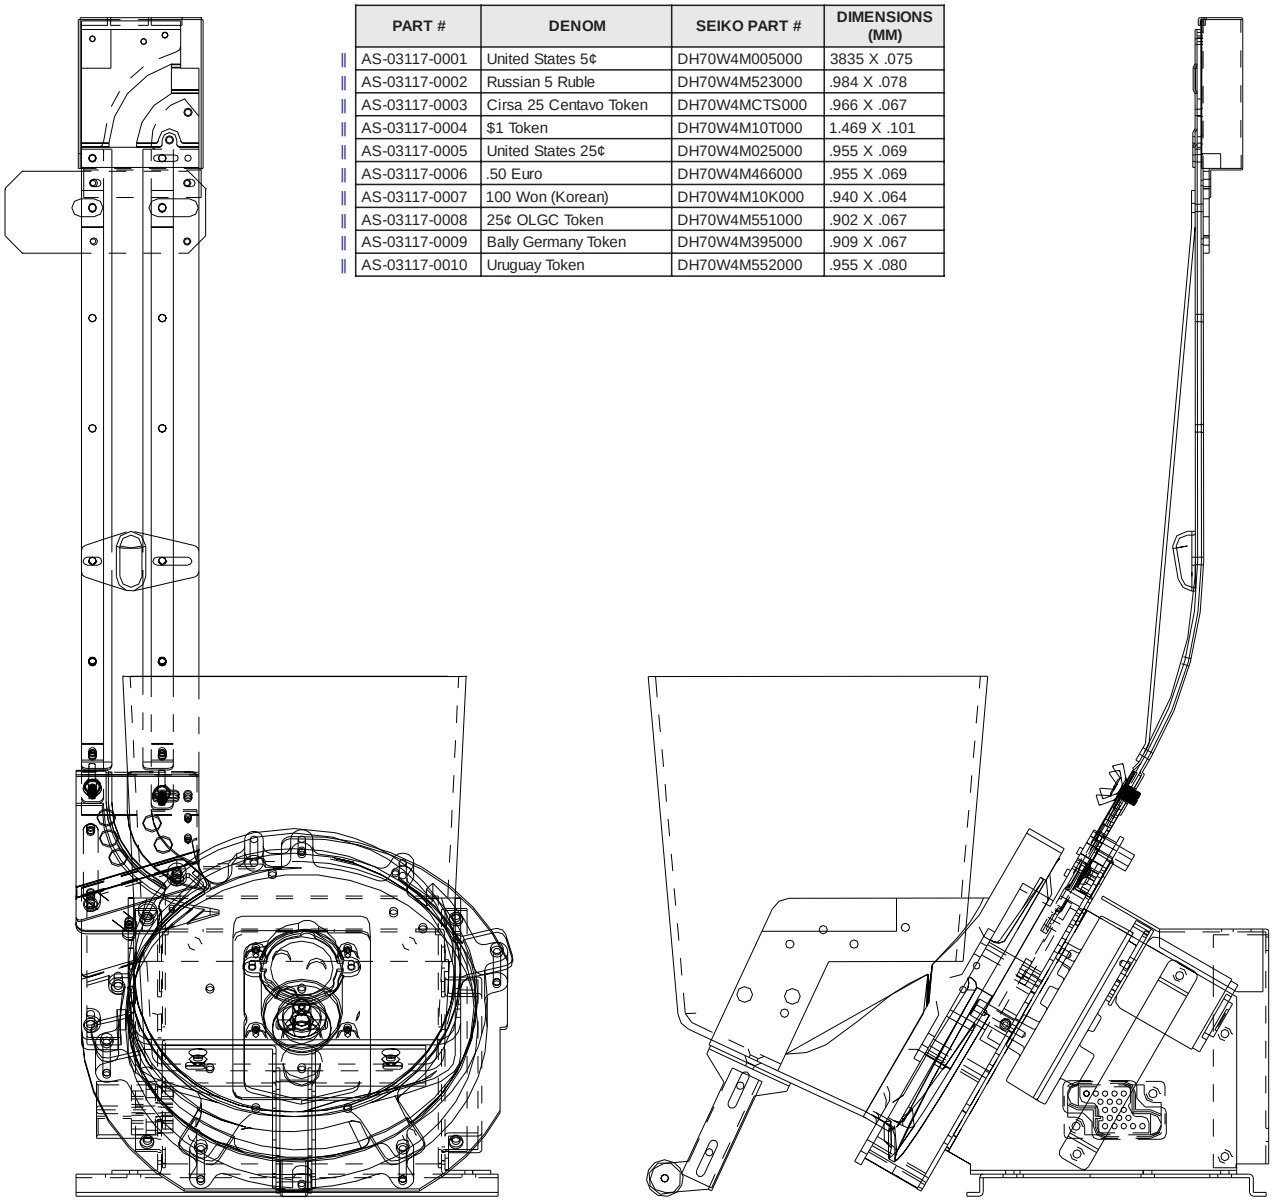

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Coin Acceptor Assembly
AS-05035-(SERIES)

☑*Slant*

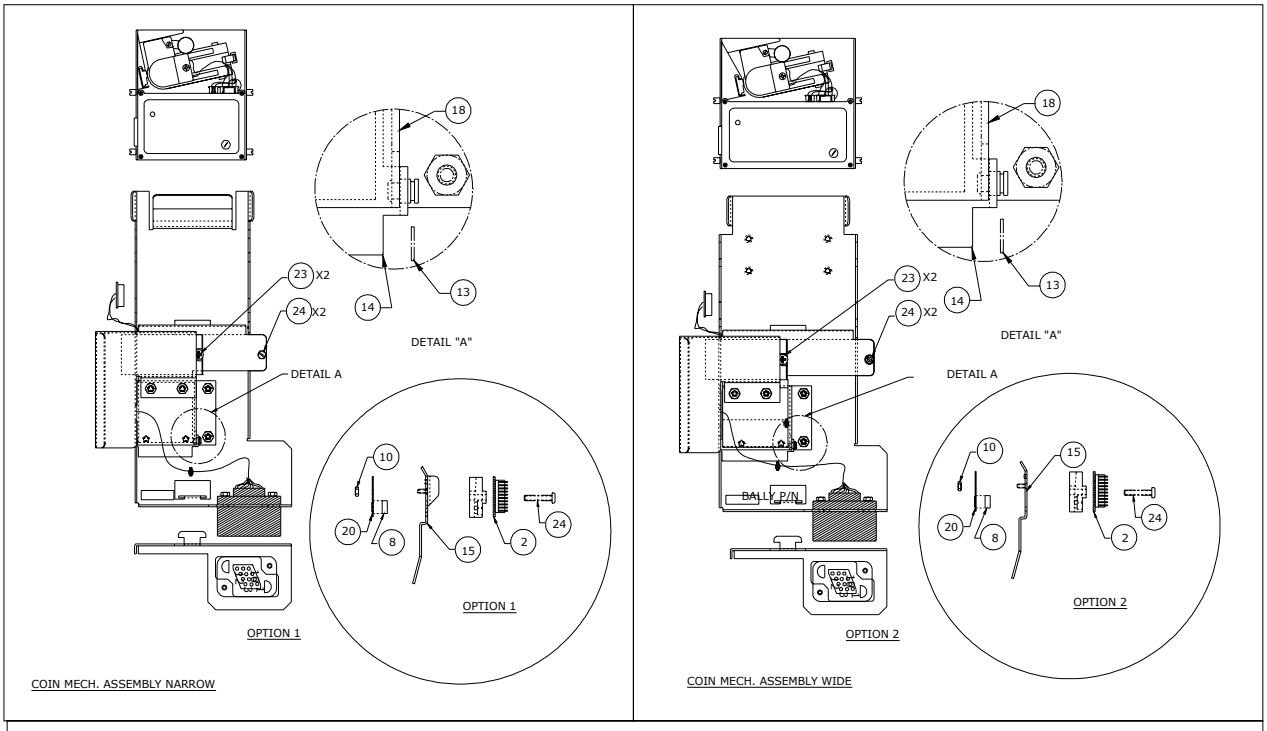

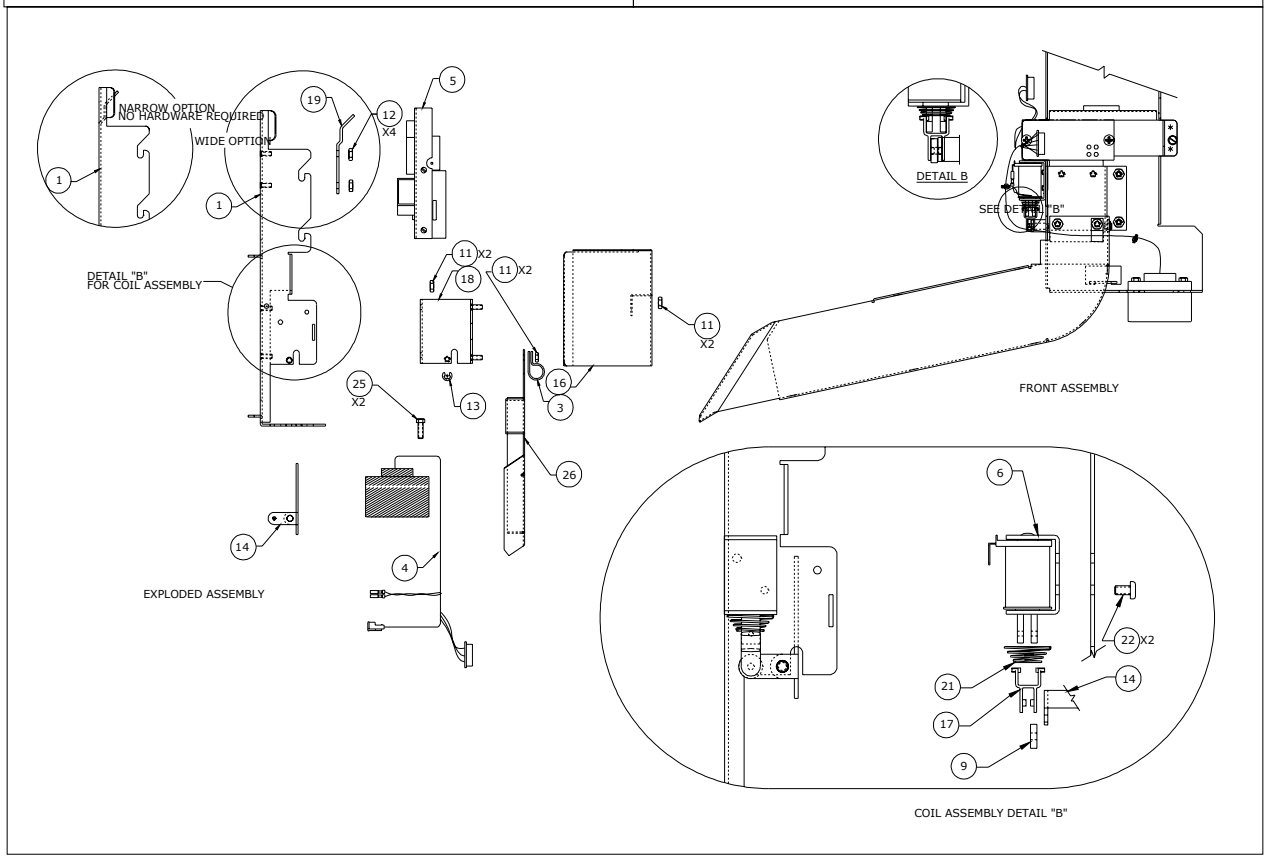

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Coin Acceptor Assembly (Cont.)
AS-05035-(SERIES)

☑Slant

REF	PART #	DESCRIPTION	QTY
1	SEE LEGEND	Assembly, Coin Acceptor Bracket	1
2	AS-03356-0303	Assembly, Coin Optic Decoder Board	1
3	C-00271-0004	Clip, 1/40 X 3/8 X 11/64	1
4	SEE LEGEND	Cable, Coin I/O	1
5	SEE LEGEND	Coin Acceptor	1
6	E-00947-0018	Diverter Coin	1
8	M-01755-0942	Coin Optic Prism	1
9	S-00231-1031	Spacer	1
10	NLS-00440-1112	Nut, 4-40 Keps	1
11	NLS-00632-1112	Nut, 6-32 Keps	6
13	P-02891-0005	Retaining Ring, .219 Shaft X .025 Thick	1
14	SEE LEGEND	Coin Acceptor Diverter	1
15	SEE LEGEND	Bracket, Opto Block Mounting	1
16	P-09319-0170	Cover, Opto Board	1
17	M-03104-0001	Diverter Link	1
18	SEE LEGEND	Diverter Side Plate	1
19	SEE LEGEND	Acceptor Alignment Plate	1
20	P-09322-048A	Bracket, Prism Mounting Light Panel	1
21	SP-00200-0246	Compression Spring	1
22	TFPP-00632-1103	Screw, 6-32 X 3/16 Thd Form Phil Pan Hd	2
23	TFSC-00832-1114	Screw, 8-32 X 7/8 Thd Form Slotted Hex Hd	2
24	TFSS-00832-1104	Screw, 8-32 X 1/4 Slotted Serrated Hex	1
25	TFSS-00832-1108	Screw, 8-32 X 1/2 Slotted Serrated Hex	2
26	A-04380-0011	Hopper Drop Chute	1
27	SEE LEGEND	IC, PIC 16c54xt/P, 18-Pin, Std	1

Legend

PART #	DESCRIPTION	ITEM 1	ITEM 4	ITEM 14	ITEM 15	ITEM 18	ITEM 19	ITEM 27
AS-05035-0020	Coin Acceptor, Narrow (0.7-1.5)	A-04361-0078	CBL-30472-0001	P-09319-0125	P-09319-0458	P-09322-0209	--	E-00620-0670
AS-05035-0021	Coin Acceptor, Wide (1.5-2.0)	A-04361-0018	CBL-30472-0001	P-09319-0196	P-09319-0457	P-09322-0210	P-09322-0107	E-00620-0670
AS-05035-0023	Coin Acceptor, Narrow (0.7-1.5)	A-04361-0078	CBL-30472-0001	P-09319-0125	P-09319-0458	P-09322-0209	--	E-00620-0670
AS-05035-0024	Coin Acceptor, Wide (1.5-2.0)	A-04361-0018	CBL-30472-0001	P-09319-0196	P-09319-0457	P-09322-0210	P-09322-0107	E-00620-0670
AS-05035-0025	Coin Acceptor, With Printer, Narrow (0.7-1.5)	A-04361-0078	CBL-30472-0001	P-09319-0125	P-09319-0458	P-09322-0209	--	E-00620-0670
AS-05035-0026	Coin Acceptor, With Printer, Wide (1.5-2.0)	A-04361-0018	CBL-30472-0001	P-09319-0196	P-09319-0457	P-09322-0210	P-09322-0107	E-00620-0670
AS-05035-0027	Coin Acceptor, Condor, Narrow (0.7-1.5)	A-04361-0073	CBL-20211-0001	P-09319-0125	P-09319-0439	P-09322-0209	--	E-00620-0670
AS-05035-0028	Coin Acceptor, IDX X10	A-04361-0077	CBL-20211-0001	P-09319-0196	P-09319-0505	P-09322-0210	--	E-00620-0670
AS-05035-0029	Coin Acceptor, IDX X70	A-04361-0077	CBL-20211-0001	P-09319-0196	P-09319-0505	P-09322-0210	--	E-00620-0670
AS-05035-0040	Coin Acceptor, MC-16, Narrow (0.7-1.5)	A-04361-0078	CBL-20307-0001	P-09319-0125	P-09319-0439	P-09322-0209	--	--
AS-05035-0042	Coin Acceptor, MC-16, Wide (1.5-2.5)	A-04361-0018	CBL-20307-0001	P-09319-0196	P-09319-0457	P-09322-0210	--	--

Coin Acceptor Assembly
AS-05189-(SERIES)

☑S6E

Coin Acceptor, Narrow (0.7 - 1.5)
A-05189-0001 *☑S6E*

REF	PART #	DESCRIPTION	QTY
1	A-04380-0011	Assembly, Hopper Chute	1
2	A-04380-0034	Assembly, Coin Acceptor Bracket, Narrow	1
3	AS-03356-0303	Assembly, Coin Optic Decoder 2 Board	1
4	CBL-30472-0001	Cable, Coin I/O	1
5	E-00620-0670	IC, PIC16C54XT/P, 18-Pin, Standard	1
6	E-00947-0018	Coil, Diverter	1
7	M-01755-0942	Prism, Coin Optic	1
8	M-03104-0001	Link, Plastic, Coin Diverter	1
9	NLS-00440-1112	Nut	1
10	NLS-00632-1112	Nut	6
11	P-02891-0005	Retaining Ring, .219 Shaft x .025 T	1
12	P-06004-0054	Cover, Optic Board	1
13	P-09319-0125	Diverter, Coin Acceptor	1
14	P-09319-0458	Bracket, Opto Block, Narrow	1
15	P-09322-0209	Side Plate, Diverter, Narrow	1
16	P-09322-048A	Bracket, Prism Mounting Light Panel	1
17	S-00231-1031	Spacer, Plastic, Diverter Link	1
18	SP-00200-0246	Spring, Compression	1
19	TFPP-00632-1103	Screw	1
20	TFSC-00832-1106	Screw	2
21	TFSS-00832-1104	Screw	1
22	TFSS-00832-1108	Screw	2

Coin Acceptor, IDX (0.7 - 1.5)
A-05189-0002 *☑S6E*

REF	PART #	DESCRIPTION	QTY
1	A-04380-0011	Assembly, Hopper Chute	1
2	A-04380-0036	Assembly, Coin Acceptor Bracket, IDX	1
3	AS-03356-0303	Assembly, Coin Optic Decoder 2 Board	1
4	CBL-30472-0001	Cable, Coin I/O	1
5	E-00620-0670	IC, PIC16C54XT/P, 18-Pin, Standard	1
6	E-00947-0018	Coil, Diverter	1
7	M-01755-0942	Prism, Coin Optic	1
8	M-03104-0001	Link, Plastic, Coin Diverter	1
9	NLS-00440-1112	Nut	1
10	NLS-00632-1112	Nut	6
11	P-02891-0005	Retaining Ring, .219 Shaft x .025 T	1
12	P-06004-0054	Cover, Optic Board	1
13	P-09319-0125	Diverter, Coin Acceptor	1
14	P-09319-0439	Bracket, Opto Block Mounting, Condor	1
15	P-09319-0785	Guide, Coin, 0.7 - 1.5, IDX	4
16	P-09322-0209	Side Plate, Diverter, Narrow	1
17	P-09322-048A	Bracket, Prism Mounting Light Panel	1
18	S-00231-1031	Spacer, Plastic, Diverter Link	1
19	SP-00200-0246	Spring, Compression	1
20	TFPP-00632-1103	Screw	1
21	TFSC-00832-1116	Screw	2
22	TFSS-00832-1104	Screw	1
23	TFSS-00832-1108	Screw	2

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Drop Chute A-04380-(SERIES)

☑Slant / ☑S6E

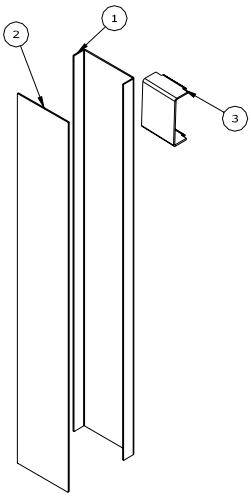

Drop Chute
A-04380-0014 ☑Slant

REF	PART #	DESCRIPTION	QTY
1	A-04380-0014-1	18 GA (.048) CRS	1
2	A-04380-0014-2	18 GA (.048) CRS	1
3	A-04380-0014-3	16 GA (.059) CRS	1

|| *Drop Chute*
A-04380-0033 ☑S6E

REF	P/N	DESCRIPTION	QTY
1	A-04380-0033-1	Chute, Coin Drop	1
2	A-04380-0033-2	Cover, Drop Chute	1
3	A-04380-0033-3	Chute Mounting Bracket	1

Coin Bucket NDC2060 M-03107-0001

☑Slant / ☑S6E

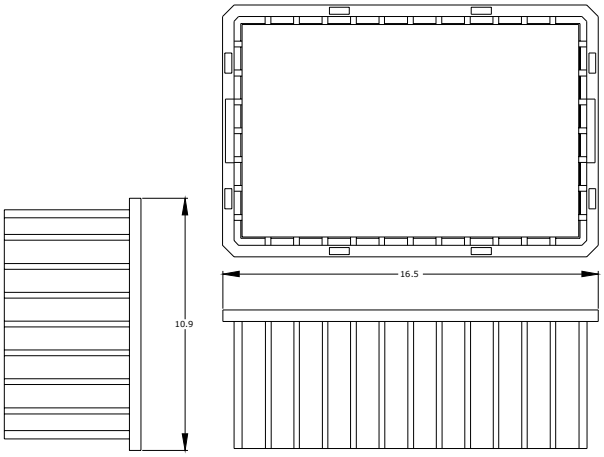

Bill Acceptor Housing/Frame AS-06603-(SERIES)

☑Slant / ☑S6E

Frame Assembly, No Bill Acceptor
AS-06603-0007 ☑Slant

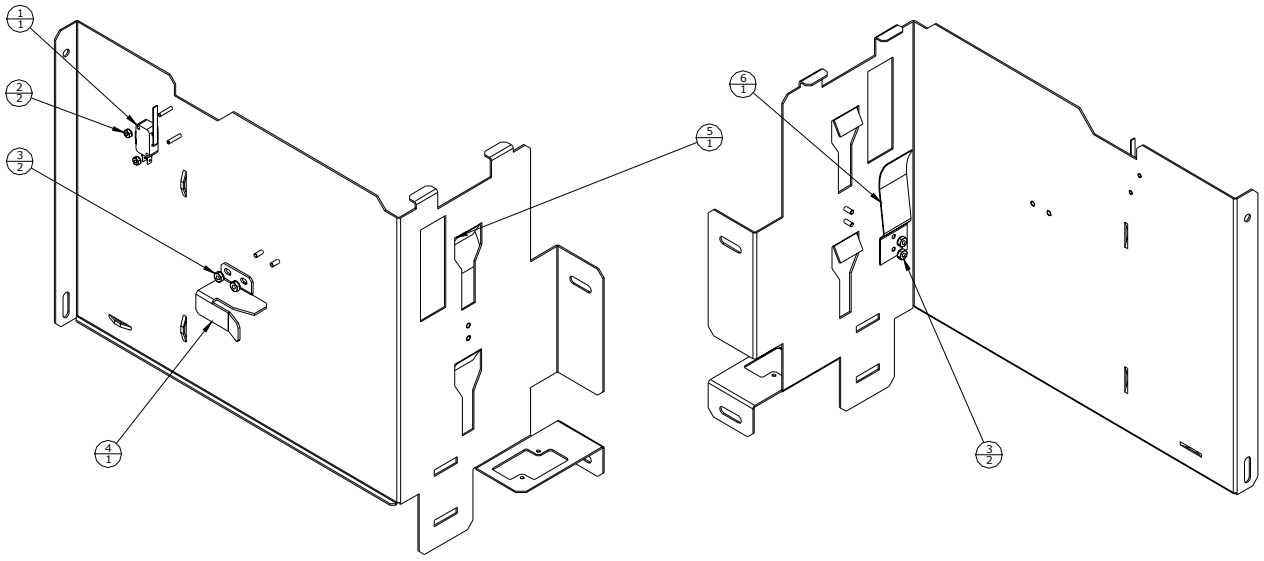

REF	PART #	DESCRIPTION	QTY
1	E-00108-0376	Switch, SPDT	1
2	NLS-00440-1112	Hex Nut	2
3	NLS-00632-1112	Hex Nut	4
4	P-06004-0059	Bracket, Hopper Alignment	1
5	P-06004-0098	Bracket, Mounting, Coin Assembly	1
6	SP-00400-0001	Spring, Comparator Bias	1

©2003 Bally Gaming and Systems

Bill Acceptor Housing/Frame (Cont.)
AS-06603-(SERIES)
☑Slant / ☑S6E

Bill Acceptor Housing/Frame, JCM/MARS/ARDAC
AS-06603-000X ☑Slant

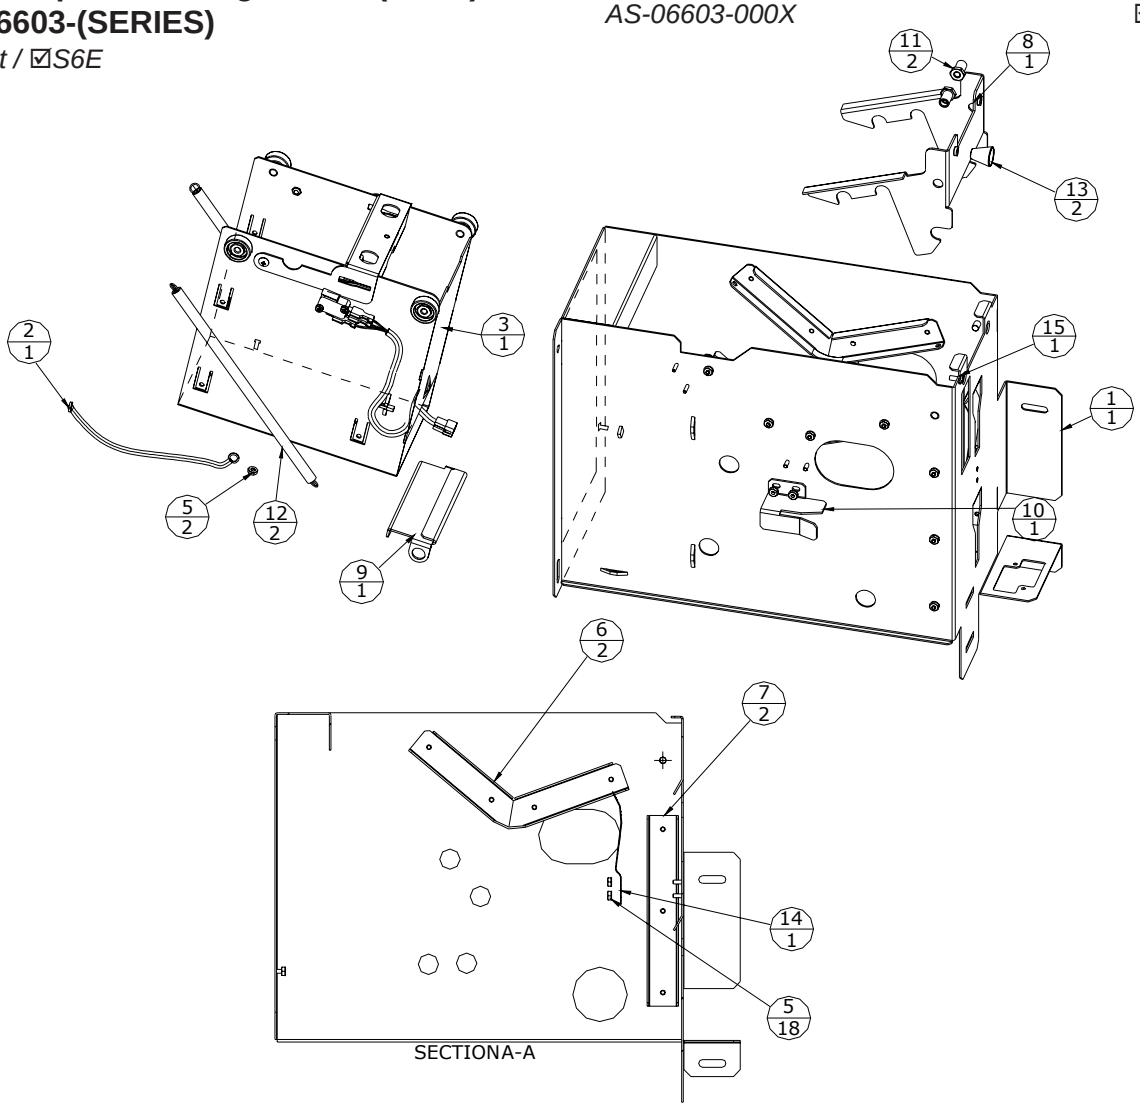

REF	PART #	DESCRIPTION	QTY	PART #
1	A-06511-0003	Frame, Bill Acceptor, JCM/Mars/Ardac	1	0001
				0009
2	AS-03106-0006-S6	Assembly, Ground Strap	1	0001
				0009
3	AS-06603-0002	Assembly, Housing, Bill Acceptor, JCM/Mars/Ardac	1	0001
	AS-06603-0008	Assembly, Housing, Bill Acceptor, JCM/Mars/Ardac, With Mikohn Switch	1	0009
4	M-01777-5735	Loctite, #242, Blue	A/R	0001
				0009
5	NLS-00440-1112	Hex Nut	2	0009
	NLS-00632-1112	Hex Nut	20	0001
				0009
6	P-06004-0049	Channel, Guide, Upper Roller	2	0001
				0009
7	P-06004-0050	Channel, Guide, Lower Roller	2	0001
				0009

REF	PART #	DESCRIPTION	QTY	PART #
8	P-06004-0051	Latch, Bill Acceptor, JCM/Mars/Ardac	1	0001
				0009
9	P-06004-0052	Bracket, Spring Anchor, Bill Acceptor	1	0001
				0009
10	P-06004-0059	Bracket, Hopper Alignment	1	0001
				0009
11	S-00231-1039	Bushing, Release Lever	2	0001
				0009
12	SP-00100-0415	Bill Acceptor Spring	2	0001
				0009
13	SP-00200-0252	Spring, Compression, Bill Acceptor Latch	2	0001
				0009
14	SP-00400-0001	Spring, Comparator Bias	1	0001
				0009
15	TFPP-00832-1106	Screw, 8-32 X 3/8 Thd Form Phil Pan Hd	1	0001
				0009
16	E-00108-0376	Switch, Spdt (Not Shown)	1	0009

AVAILABILITY:

PART #	DESCRIPTON
AS-06603-0001	Bill Acceptor Housing/Frame, JCM/Mars/Ardac
AS-06603-0009	Bill Acceptor Housing/Frame, JCM/Mars/Ardac (OLGC)

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Bill Acceptor Housing/Frame (Cont.)
AS-06603-(SERIES)

☑*Slant* / ☑*S6E*

Bill Acceptor Housing, JCM/MARS/ARDAC
AS-06603-000X ☑*Slant*

AVAILABILITY:

PART #	DESCRIPTON
AS-06603-0002	Bill Acceptor Housing, JCM/Mars/Ardac
AS-06603-0008	Bill Acceptor Housing, JCM/Mars/Ardac (OLGC)

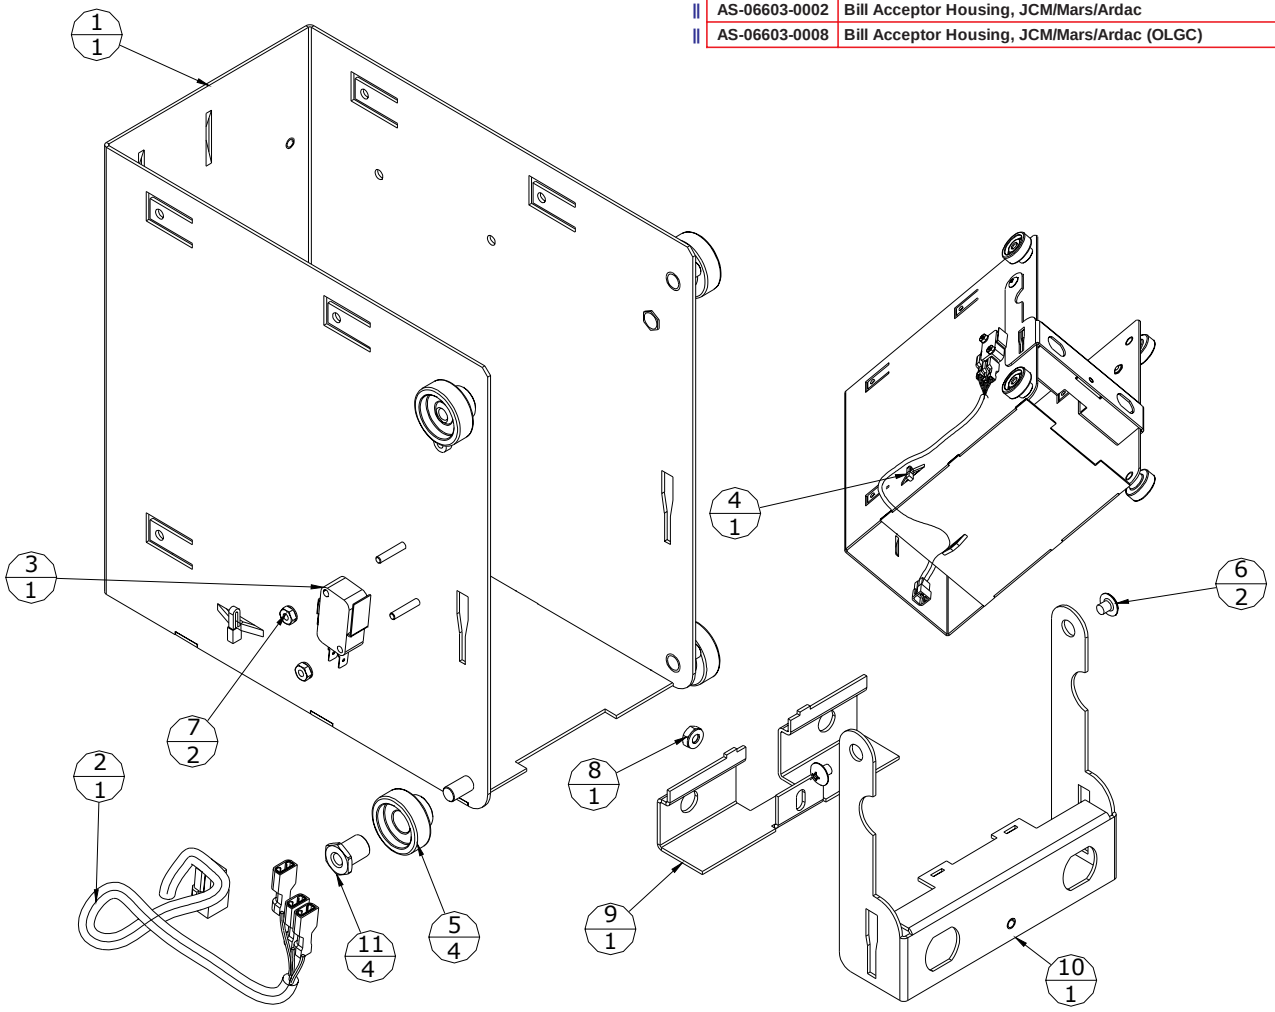

REF	PART #	DESCRIPTION	QTY	PART #
1	A-06511-0007	Housing, Bill Acceptor, JCM/Mars/Ardac, With Mikohn Switch	1	0002
				0008
2	CBL-30244-0001	Cable, Bill Acceptor Door Switch	1	0002
				0008
3	E-00108-0399	Switch, Bill Acceptor Door	1	0002
				0008
	E-00108-0385	Switch, Door Push	1	0008
4	E-00647-0004	Tie Wrap	1	0002
				0008
5	M-03009-0002	Roller, Bill Acceptor	4	0002
				0008
6	MSPT-00832-1103	Screw, 8-32 X 3/16 Mach Phil Truss Hd	2	0002
				0008

REF	PART #	DESCRIPTION	QTY	PART #
7	NLS-00440-1112	Hex Nut	2	0002
				0008
8	NLS-00632-1112	Hex Nut	1	0002
				0008
9	P-06004-0102	Cover, Locking Bar, Bill Acceptor	1	0002
				0008
10	P-06004-0103	Locking Bar, Bill Acceptor	1	0002
				0008
11	S-00231-1040	Bushing, Roller	4	0002
				0008

©2003 Bally Gaming and Systems

Bill Acceptor Housing/Frame (Cont.)
AS-06603-(SERIES)

☑Slant / ☑S6E

Bill Acceptor Housing/Frame, Wide, GPT
AS-06603-000X *☑Slant*

AVAILABILITY:

P/N	DESCRIPTON
‖ AS-06603-0003	Bill Acceptor Housing/Frame, Wide, GPT
‖ AS-06603-0005	Bill Acceptor Housing/Frame, Standard, GPT

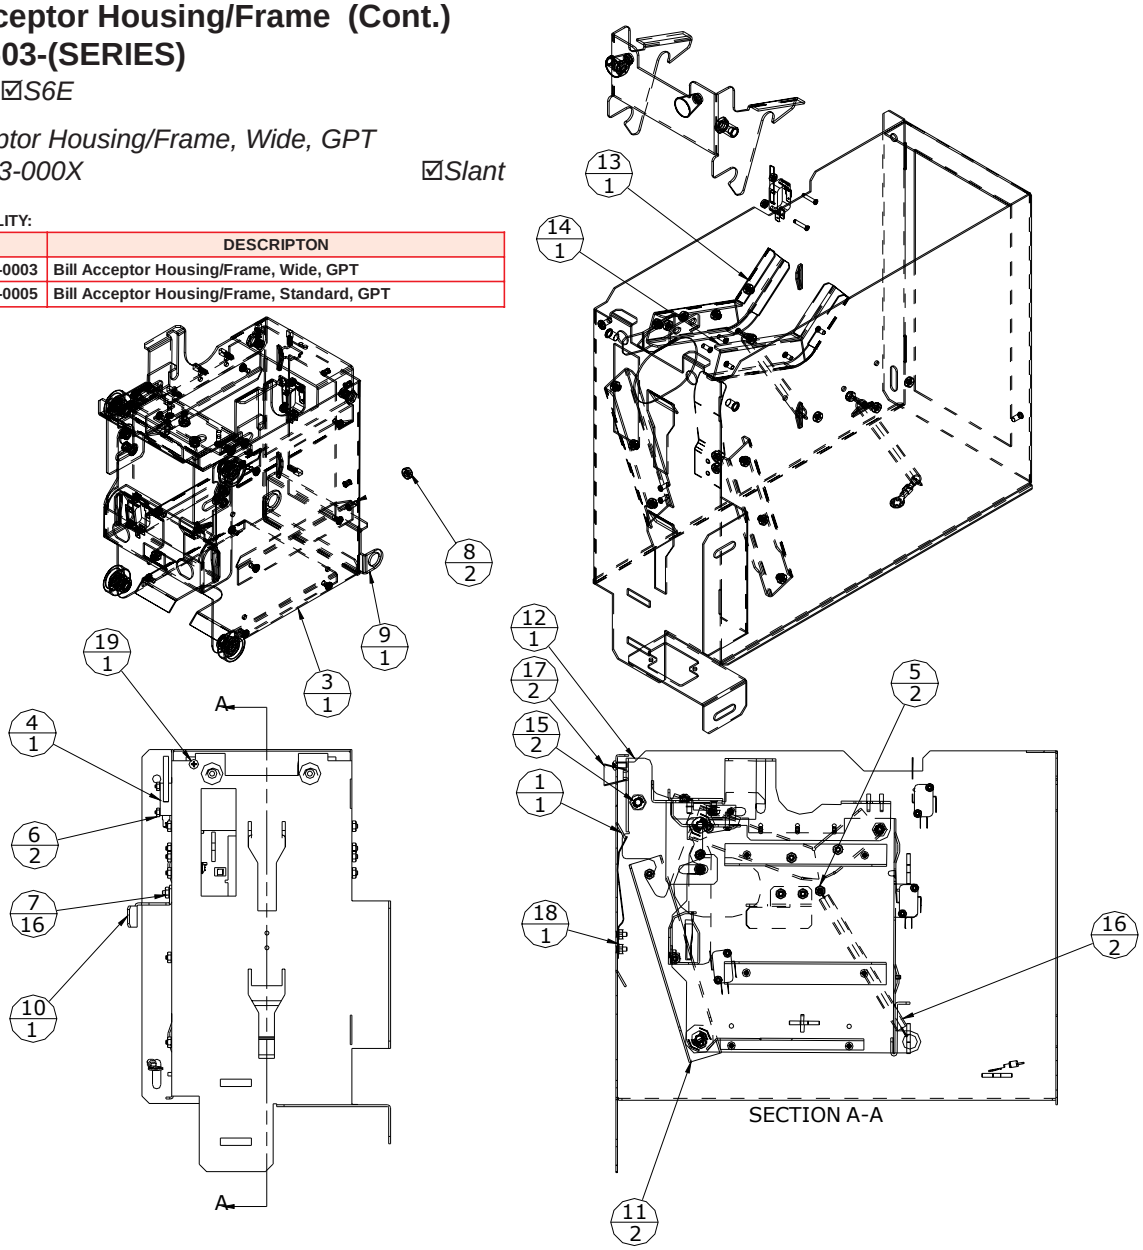

REF	PART #	DESCRIPTION	QTY	PART #
1	A-06511-0004	Assembly, Frame, GPT Bill Acceptor	1	0003
				0005
2	AS-03106-0008	Ground Strap, 8.5-Inch Length	1	0003
				0005
3	AS-06603-0004	Assembly, Housing, Bill Acceptor, GPT, Wide	1	0003
	AS-06603-0006	Assembly, Housing, Bill Acceptor, GPT, Standard	1	0005
4	E-00108-0376	Switch, SPDT	1	0003
				0005
5	M-00319-0006	Elastic, Stop Nut (ESNA)	2	0003
				0005
6	NLS-00440-1112	Hex Nut	2	0003
				0005
7	NLS-00632-1112	Hex Nut	16	0003
				0005
8	NLS-00832-1112	Hex Nut	2	0003
				0005
9	P-06004-0052	Bracket, Spring Anchor, Bill Acceptor	1	0003
				0005
10	P-06004-0059	Bracket, Hopper Alignment, Bill Acceptor	1	0003
				0005

REF	PART #	DESCRIPTION	QTY	PART #
11	P-06004-0086	Channel, Guide, Lower Roller, GPT	2	0003
				0005
12	P-06004-0087	Latch, Bill Acceptor, GPT	1	0003
				0005
13	P-06004-0104	Channel, Guide, Left, Upper Roller	1	0003
				0005
14	P-06004-0105	Channel, Guide, Right, Upper Roller	1	0003
				0005
15	S-00231-1039	Bushing, Release Lever	2	0003
				0005
16	SP-00100-0418	Bill Acceptor Spring, GPT	2	0003
				0005
17	SP-00200-0252	Spring, Compression, Bill Acceptor Latch	2	0003
				0005
18	SP-00400-0001	Spring, Comparator Bias	1	0003
				0005
19	TFPP-00832-1106	Screw, 8-32 X 3/8 Thd Form Phil Pan Hd	1	0003
				0005

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Bill Acceptor Housing, Wide, GPT
AS-06603-000X
☑Slant

Bill Acceptor Housing/Frame (Cont.)
AS-06603-(SERIES)
☑Slant / ☑S6E

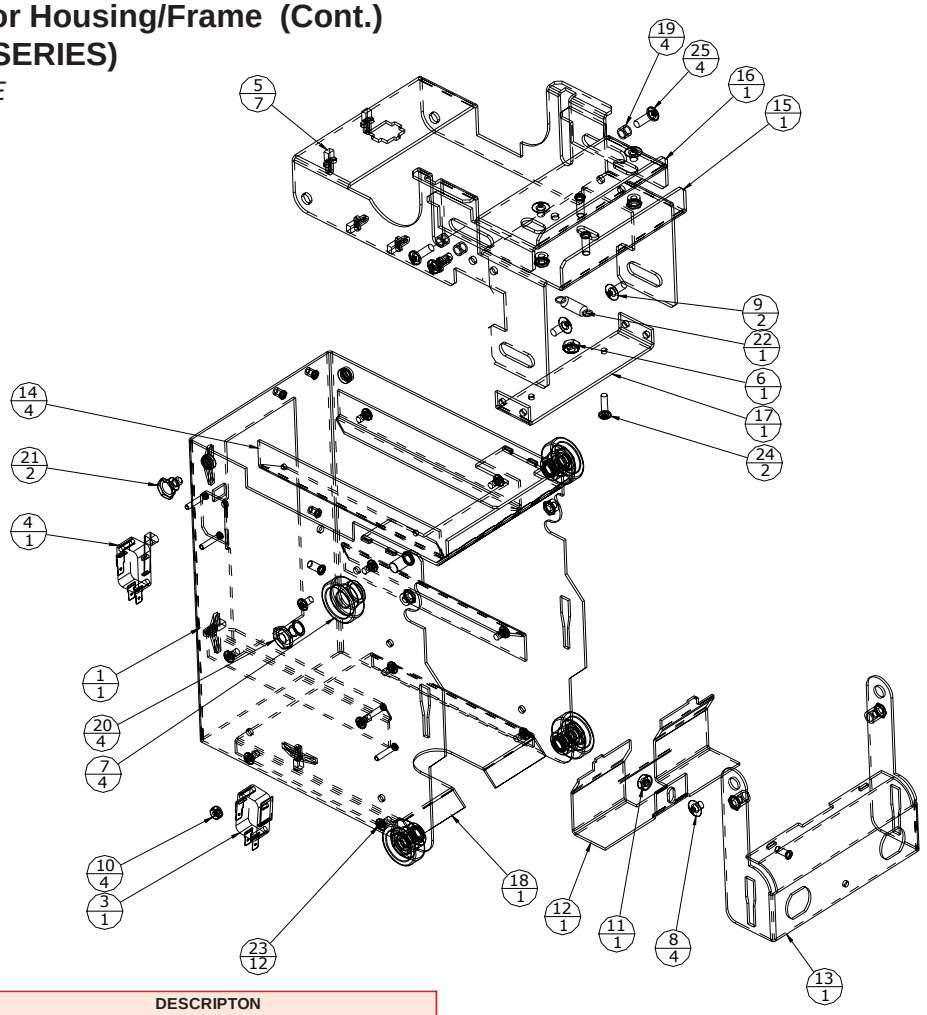

AVAILABILITY:

PART #	DESCRIPTON
AS-06603-0004	Bill Acceptor Housing, Wide, GPT
AS-06603-0006	Bill Acceptor Housing, Standard, GPT

REF	PART #	DESCRIPTION	QTY	PART #
1	A-06511-0005	Housing, Bill Acceptor, GPT	1	0004 0006
2	CBL-20188-0001	Cable, GPT Bill Acceptor	1	0004 0006
3	E-00108-0399	Switch, Bill Acceptor Door	1	0004 0006
4	E-00108-367A	Switch, Snap Action, E21-50k	1	0004 0006
5	E-00647-0004	Tie Wrap	7	0004 0006
6	M-00319-0002	Elastic, Stop Nut (ESNA)	1	0004 0006
7	M-03009-0002	Roller, Bill Acceptor	4	0004 0006
8	MSPT-00832-1103	Screw, 8-32 X 3/16 Mach Phil Truss Hd	4	0004 0006
9	MSPT-00832-1106	Screw, 8-32 X 3/8 Mach Phil Truss Hd	2	0004 0006
10	NLS-00440-1112	Hex Nut	4	0004 0006
11	NLS-00632-1112	Hex Nut	1	0004 0006
12	P-06004-0063	Cover, Locking Bar, Bill Acceptor	1	0004 0006
13	P-06004-0088	Locking Bar, GPT, Bill Acceptor	1	0004 0006

REF	PART #	DESCRIPTION	QTY	PART #
14	P-06004-0089	Guide, Cash Box, GPT, Wide	4	0004
	P-06004-0090	Guide, Cash Box, GPT, Std	4	0006
15	P-06004-0091	Bracket, Head Mounting, GPT	1	0004 0006
16	P-06004-0092	Bracket, Latch, Head, GPT	1	0004 0006
17	P-06004-0093	Bracket, Connector Mounting, GPT	1	0004 0006
18	P-06004-0094	Floor, Bill Acceptor Housing, GPT	1	0004 0006
19	S-00231-1012	Bushing, Ratchet Pawl, Deck Latch	4	0004 0006
20	S-00231-1040	Bushing, Roller	4	0004 0006
21	S-00231-1044	Bolt, Shoulder, CBV Head Bracket	2	0004 0006
22	SP-00100-0409	Spring, Latch, Bill Acceptor	1	0004 0006
23	TFPP-00632-1104	Screw, 6-32 X 1/4 Thd Form Phil Pan Hd	12	0004 0006
24	TFPP-00632-1108	Screw, 6-32 X 1/2 Thd Form Phil Pan Hd	2	0004 0006
25	TFPP-00832-1108	Screw, 8-32 X 1/2 Thd Form Phil Pan Hd	4	0004 0006
26	CBL-30349-0001	Cable, Bill Acceptor Switch, GPT	1	0004 0006

| - Revised, || - New

©2003 Bally Gaming and Systems

Bill Acceptor Housing/Frame (Cont.)
AS-06603-(SERIES)
☑Slant / ☑S6E

|| Bill Acceptor Housing, JCM/MARS/ARDAC
AS-06603-0014 *☑S6E*

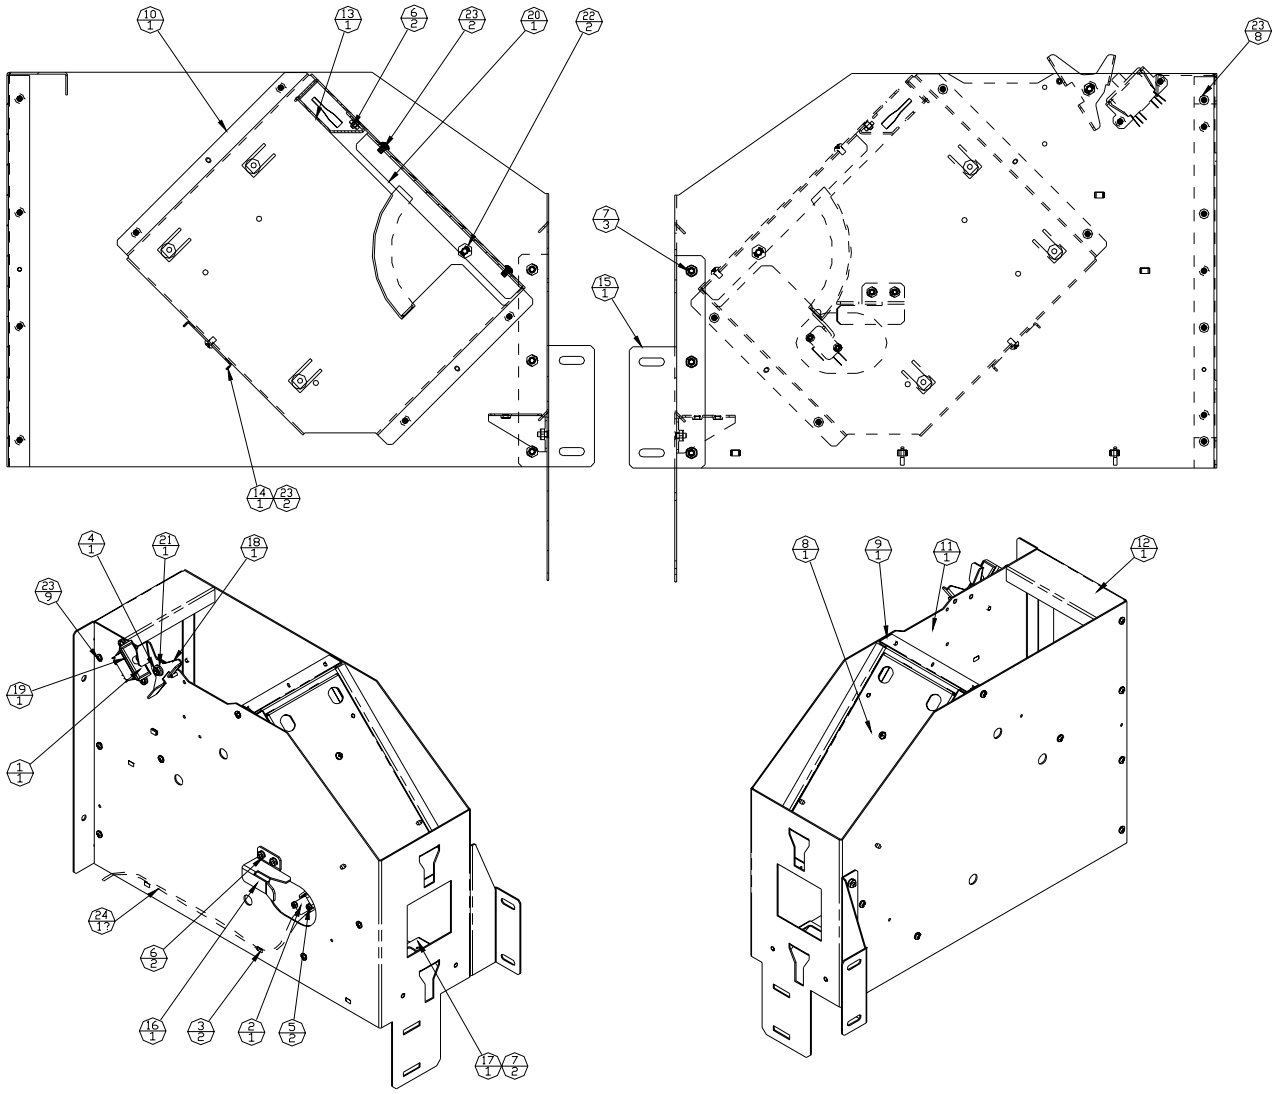

REF	PART #	DESCRIPTION	QTY
1	E-00108-0385	Switch, Door Push	1
2	E-00108-0411	Switch, Snap Action, E-21-90N	1
3	E-00647-0004	Tie Wrap	2
4	M-00319-0002	Elastic, Stop Nut (ESNA)	1
5	NLS-00440-1112	Hex Nut	2
6	NLS-00632-1112	Hex Nut	2
7	NLS-00832-1112	Hex Nut	5
8	P-06603-0001	Door, Bill Box	1
9	P-06603-0002	Bill Acceptor Mounting Bracket, Left	1
10	P-06603-0003	Bill Acceptor Mounting Bracket, Right	1
11	P-06603-0004	Bill Acceptor Housing	1
12	P-06603-0005	Bill Acceptor Housing Bracket	1

REF	PART #	DESCRIPTION	QTY
13	P-06603-0006	Bill Box Lock Cover	1
14	P-06603-0007	Switch Mounting Bracket	1
15	P-06603-0008	Bill Acceptor Housing Mounting Bracket	1
16	P-06603-0009	Hopper Align Bracket	1
17	P-06003-0010	Drawer Plug Bracket	1
18	P-06603-0011	Actuator, Switch	1
19	P-06603-0012	Switch Mounting Bracket	1
20	P-06603-0013	Bill Box Guide	1
21	S-00231-1033	Shoulder Washer	1
22	S-02028-0001	Screw, Shoulder, Front Door CBV	2
23	TFPP-00832-1104	Screw, 8-32 X 1/4 Thd Form Phil Pan Hd	21
24	CBL-20214-0001	Cable, Bill Acceptor Door	1

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Cabinet Assembly

NOTE: For Feature Glass selections, see Module 3A, Glass and Decals.

For more bracket selections, see Module 10, SDS® Parts Reference.

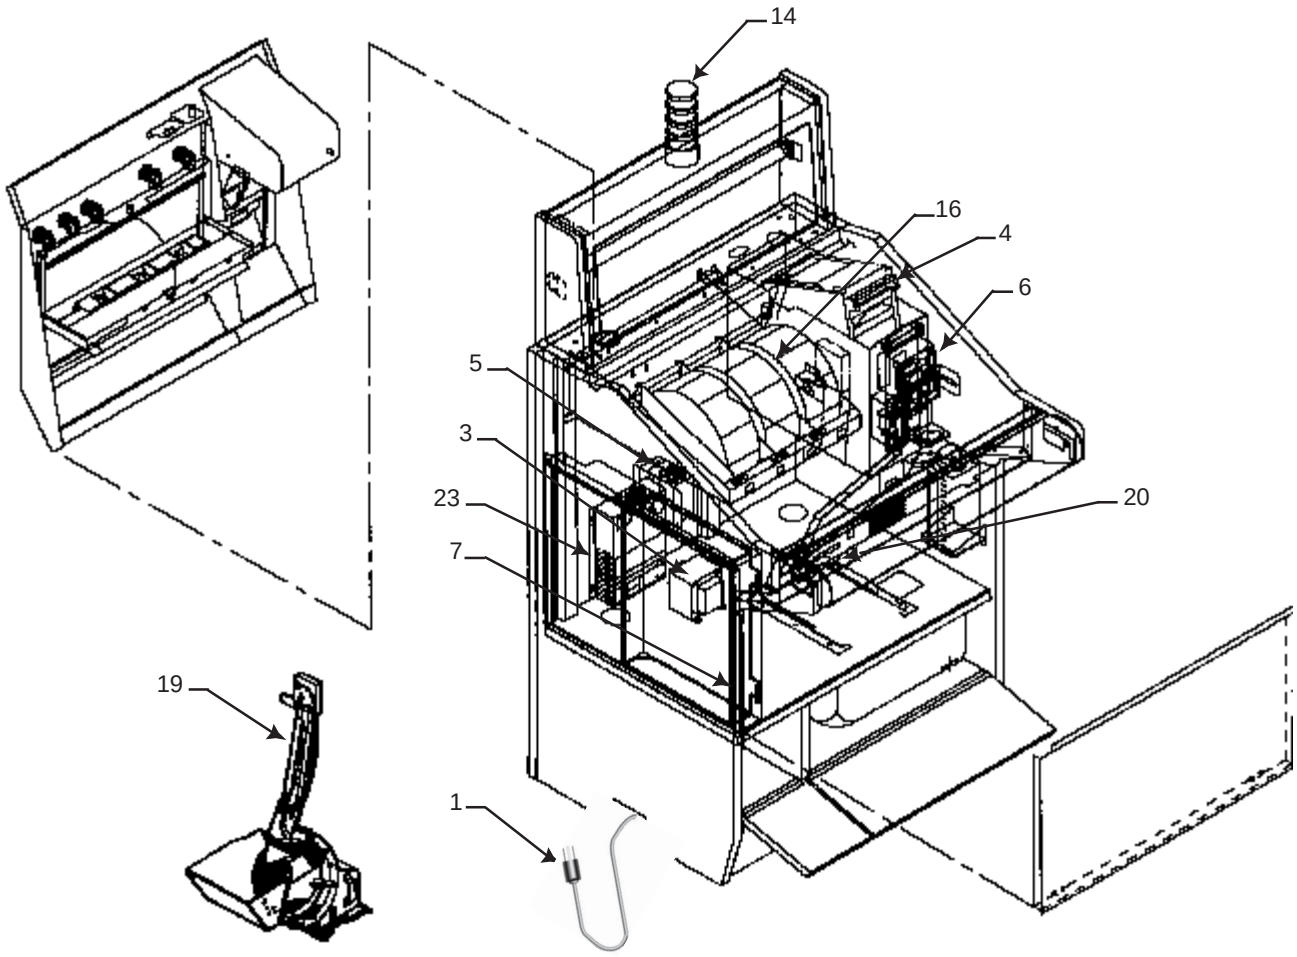

ITEM	PART #	DESCRIPTION	PAGE
1	E-00126-(SERIES)	Line Cord Assembly	26
2	AS-03335-0132	Starter/Ballast Assembly	75
3	E-00122-(SERIES)	Transformer	23
4	E-X11XX-(SERIES)	Bill Accceptor	13
5	AS-03025-(SERIES)	Cabinet Cable Power Assembly	73
6	AS-05035-(SERIES)	Coin Acceptor (Slant)	61
	AS-05189-(SERIES)	Coin Acceptor (S6E)	62
7	AS-06604-(SERIES)	Card Rack/Backplane Assembly	77
8	E-00281-(SERIES)	Speaker, 4" Round, 4 OHM	27/80
	AS-05031-(SERIES)	Speaker Panel	80
11	AS-06605-(SERIES)	MPU board/Tray	78

ITEM	PART #	DESCRIPTION	PAGE
12	AS-03268-(SERIES)	Convenience Outlet	25
14	P-09323-0001	Cover, Tower Hole, Flat Cabinet	--
	TWRX-(SERIES)	Tower Selections	28
15	M-03107-0001	Coin Bucket	63
16	AS-04716-(SERIES)	Reel Mechanism Assembly	82
17	AS-04235-0009	Reel Drive Assembly, 9" Reel	33
18	AS-04703-(SERIES)	Reel Support, Cable and Bracket	83
19	AS-031XX-(SERIES)	Hopper Assembly	59
20	AS-04225-(SERIES)	Meter Assembly	81
23	AS-04238-(SERIES)	MPU Board/Power Supply/PDU	22

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Cabinet Assembly

Cabinet Assembly ASXX-X79XX-XXXX

☑*Slant*

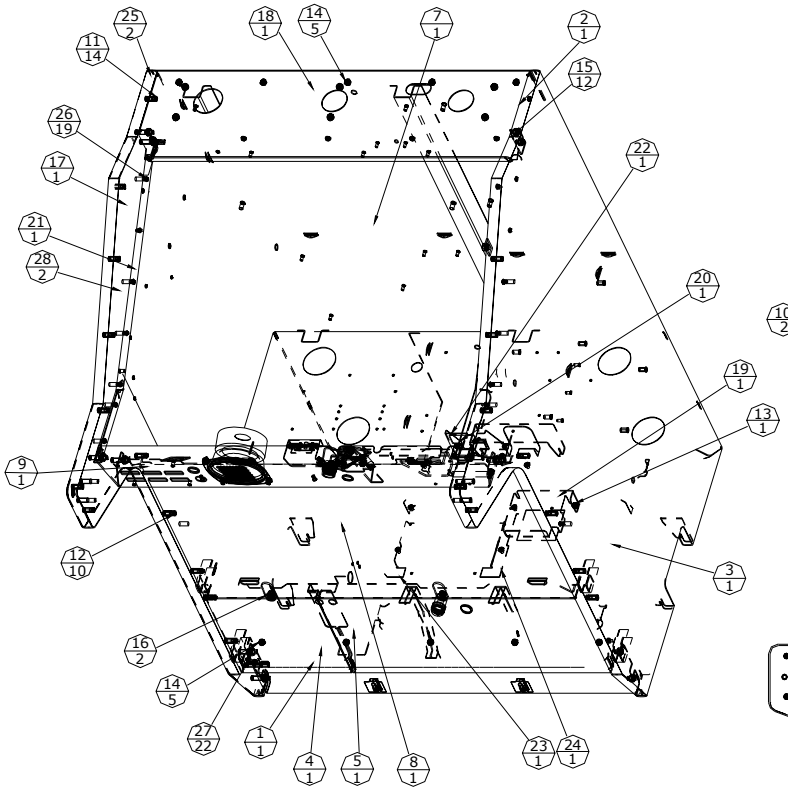

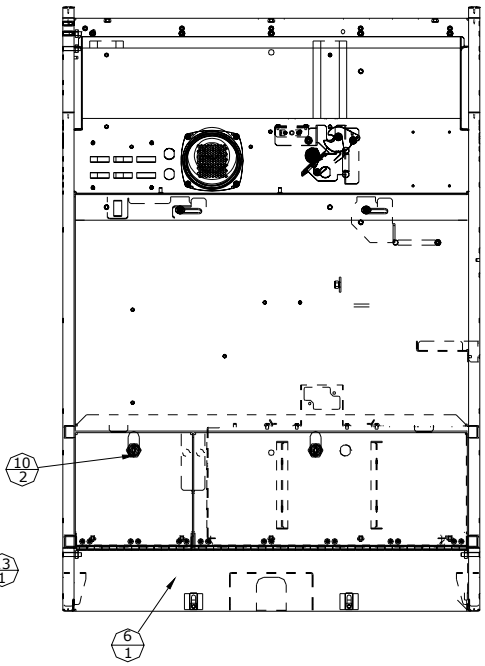

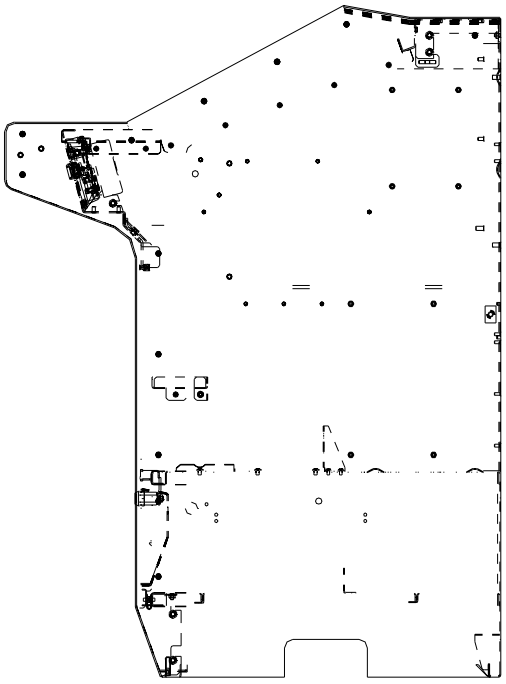

PART NUMBER DESCRIPTION

ASXX - X79XX - X X XX

- ITEM 8. FRONT LAMINATE
- 0-NO PRINTER
- 1-W/PRINTER
- SERIES
  - SLANT TOP
  - CABINET
- ITEM 4 & 5. FRONT LAMINATE
- RIGHT DOOR LOCK CONFIGURATION
  - 0 - "SINGLE" LOCK DESIGN
  - 1 - "DUAL" LOCK DESIGN
- CABINET TRIM (EDGE MOULDING)
- CABINET LAMINATE

REF	PART #	DESCRIPTION	QTY
1	A-04270-0039_180	Cabinet, Drop Hinge	1
2	A-07901-0001	Cabinet, Right Liner Assembly	1
3	A-07901-0002	Cabinet, Drop Panel Assembly	1
4	A-07901-0003	Cabinet, Left Door Assembly	1
5	A-07901-0004	Cabinet, Right Door Assembly	1
6	A-07901-0007	Cabinet, Toe Kick Assembly	1
7	A-07902-0002	Cabinet, Main Weldment	1
8	AS-04189-0001	Assembly, Front Door (-0001 No Printer/-0002 Printer)	1
9	AS-05031-0101	Assembly, Speaker Panel, 1/2 Lock, 1/2 Switch	1
10	M-00281-0181	Lock, 1-1/8, Large	2
11	MSPF-00832-1105	Screw, Machine Phil Flat Hd	14
12	MSPP-00832-1105	Screw, Machine Phil Pan Hd	10
13	NLS-00832-1112	Hex Nut	1
14	NLS-01032-1112	Hex Nut	10

REF	PART #	DESCRIPTION	QTY
15	NLS-25020-1112	Hex Nut	12
16	P-00758-0181	Lock Cam, Drop Door	2
17	P-07900-0005	Cabinet, Left Liner	1
18	P-07900-0020	Cabinet, Feature Bracket Assembly	1
19	P-07900-0024	Cabinet, Drain Bottle Bracket	1
20	P-07900-0025	Cabinet, Right Drain Rail	1
21	P-07900-0026	Cabinet, Left Drain Rail	1
22	P-09264-001A	Bkt, Hopper Beau Plug	1
23	P-09319-0155	Guide, Left Hopper	1
24	P-09319-0156	Guide, Right Hopper	1
25	T-MOULDING_750	T-Moulding, .75 Wide	2
26	TFPP-00832-1104	Screw, 8-32 X 1/4 Thd Form Phil Pan Hd	19
27	TFPP-01032-1104	Screw, 10-32 X 1/4 Thd Form Phil Pan Hd	22
28	W-07900-0001	Cabinet, Wood Spacer	2

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Cabinet Assembly

|| Cabinet Assembly AS-08752-(SERIES)
☑*S6E*

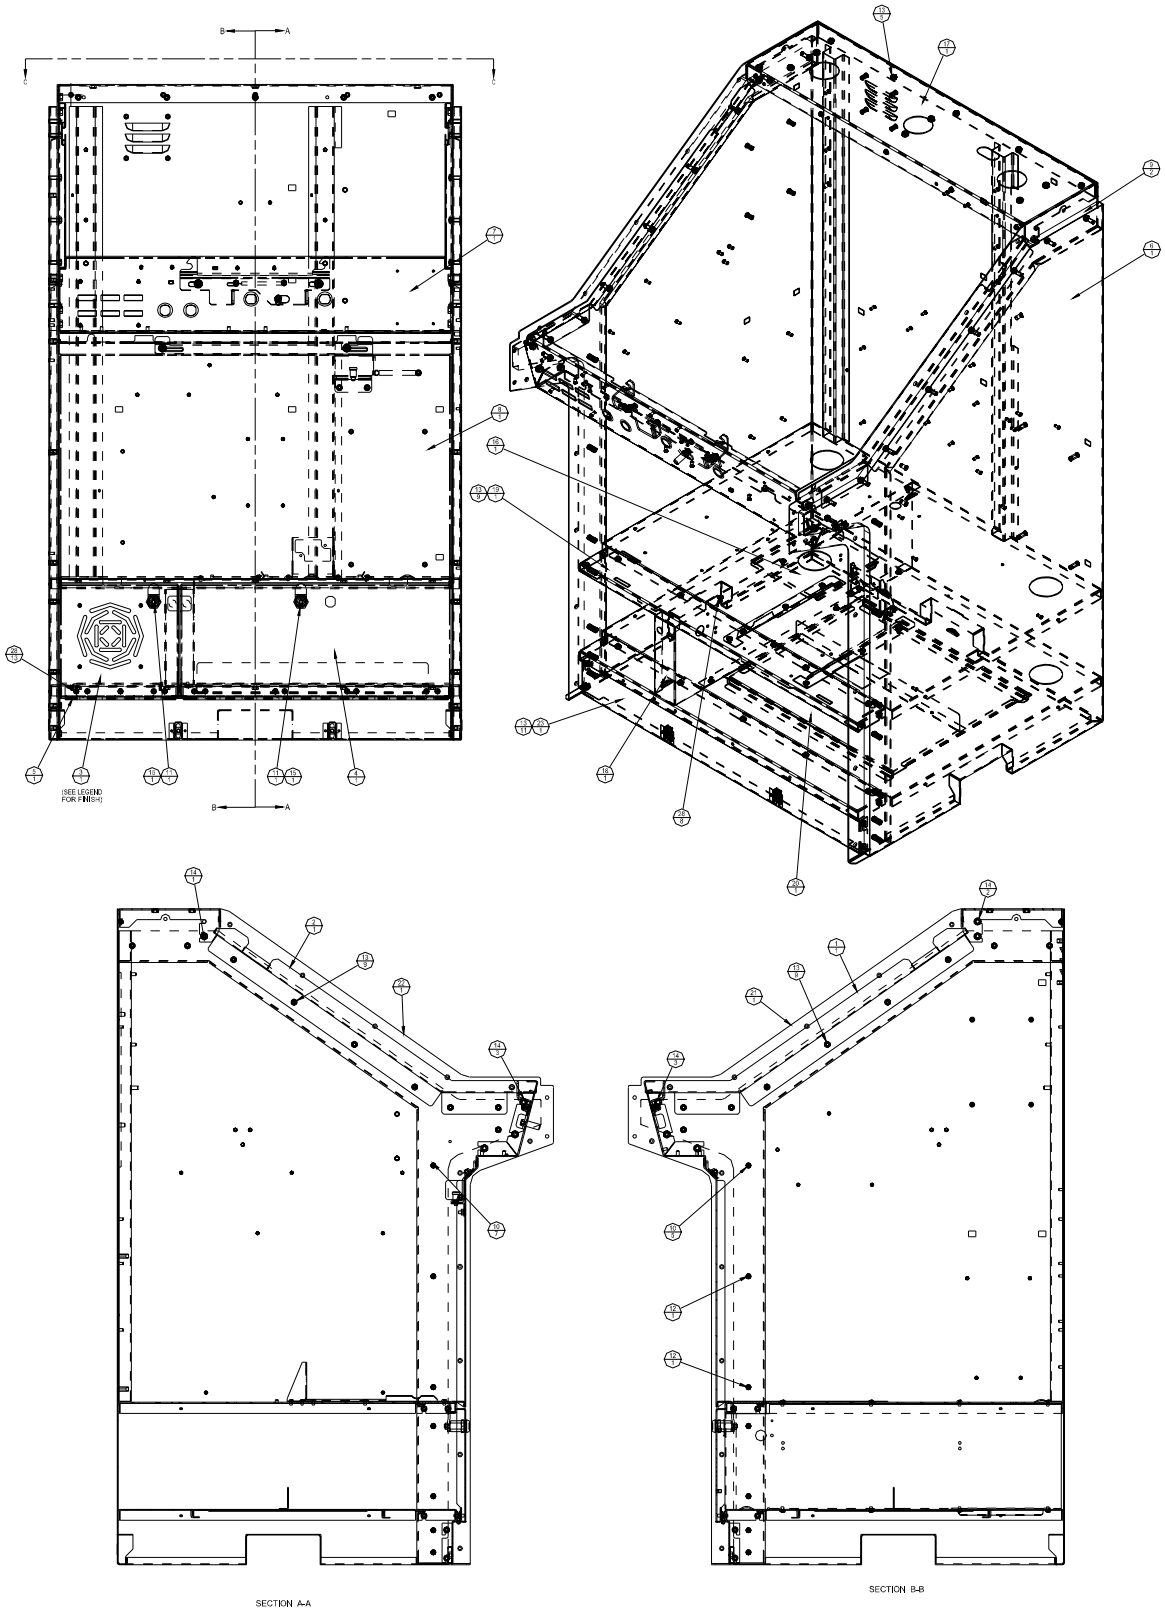

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Cabinet Assembly

|| Cabinet Assembly (Cont.) AS-08752-(SERIES)
☑*S6E*

AVAILABILITY:

PART #	DESCRIPTON (COLOR)
AS-08752-0030	Black #12-7001
AS-08752-00AV	Black Gloss
AS-08752-00KQ	#D934
AS-08752-00SV	#WA-0002-N
AS-08752-00SY	#P110-VL
AS-08752-00TA	#7289-58
AS-08752-00TB	#7109-58
AS-08752-30CH	Black #N3C
AS-08752-30LR	Black #6255-P418
AS-08752-30SJ	Black #N2C

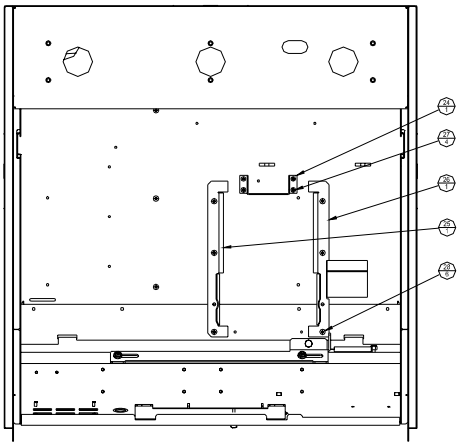

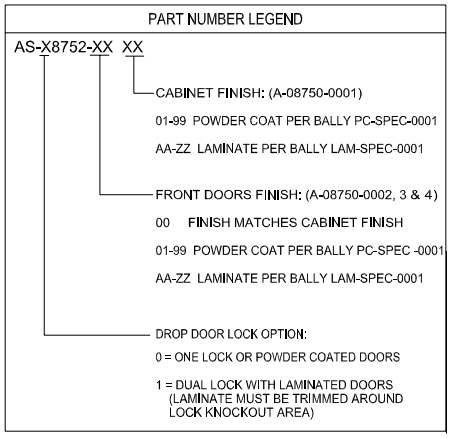

REF	PART #	DESCRIPTION	QTY
1	A-04950-0001	Rail, Left Drain	1
2	A-04950-0002	Rail, Right Drain	1
3	A-08750-0002	Door, Lower Left Cabinet	1
4	A-08750-0003	Door, Lower Right Cabinet	1
5	A-08750-0005-F	Hinge, Lower Door	1
6	A-08751-0001	Assembly, Cabinet Weld	1
7	AS-08750-0001	Assembly, Front Panel	1
8	AS-08750-0002	Assembly, Front Door	1
9	CA-08751-0001	Spacer, Cabinet Trim	2
10	LSPP-00832-1106	Screw, Mach With Lock Phil Pan Hd	12
11	M-00281-0181	Lock, 1-1/8 Large	2
12	MSPX-00832-1106	Screw, Machine Phil Flat Hd, 82 Deg	2
13	NLS-01032-1112	Hex Nut	43
14	NLS-25020-1112	Hex Nut	9

REF	PART #	DESCRIPTION	QTY
15	P-00758-0181	Lock Cam, Drop Door	2
16	P-06004-0193	Cover, Wire Access	1
17	P-08750-0007	Top, Cabinet	1
18	P-08750-0008	Divider, Lower Shelf	1
19	P-08750-0009	Front, Upper Shelf	1
20	P-08750-0015	Panel, Lower Access	1
21	P-08751-0010	Support, Lower Cabinet Side	1
22	P-08751-0011	Support, Right Cabinet Side	1
23	P-08751-0012	Front, Lower Shelf	1
24	P-09264-001A	Bracket, Hopper Beau Plug	1
25	P-09319-0668	Guide, Left Hopper	1
26	P-09319-0669	Guide, Right Hopper	1
27	TFPP-00832-1104	Screw, 8-32 X 1/4 Thd Form Phil Pan Hd	4
28	TFPP-01032-1104	Screw, 10-32 1/4 Thd Form Phil Pan Hd	27

Arm Rest CA-03407-(SERIES)
☑*Slant*

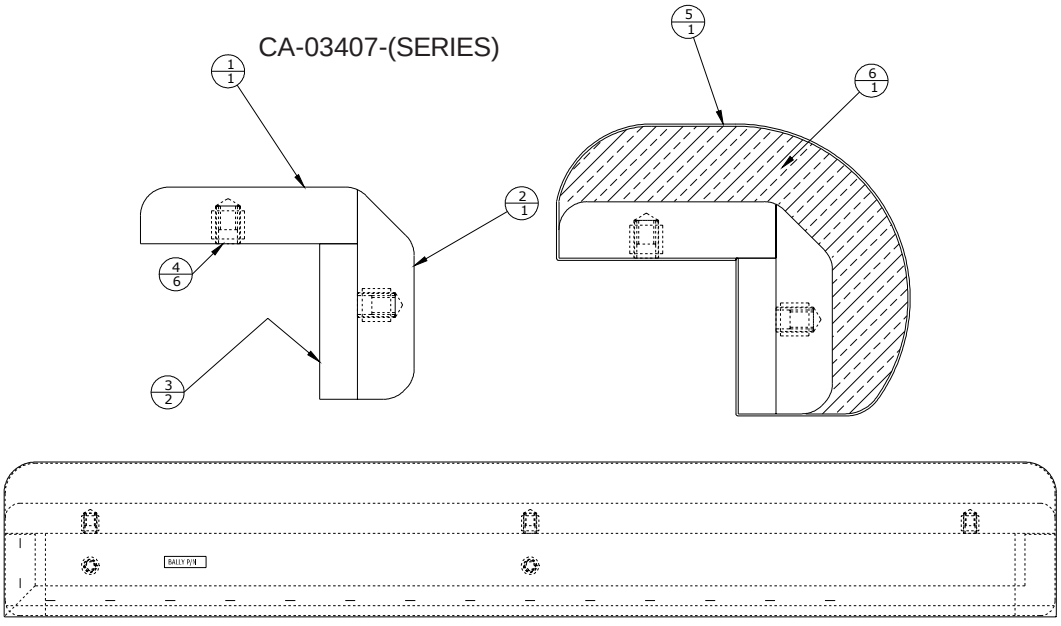

| - Revised, || - New

ProSlant® 6000 / 6000E

Cabinet Assembly

Arm Rest (Cont.) CA-03407-(SERIES)
☑*Slant*

REF	PART #	DESCRIPTION	QTY
1	Item 1	.75 Thk Medium Density Fiberboard	1
2	Item 2	.75 Thk Medium Density Fiberboard	1
3	Item 3	.50 Thk Medium Density Fiberboard	2
4	Item 4	1/4-20 Insert	6
5	Item 5	2-inch Thk Medium Density Closed Cell Foam	1
6	FAB-SPEC-0001	Vinyl Covering	1

AVAILABILITY:

PART #	DESCRIPTON (COLOR)
CA-03407-0001	#ANO-6707 White
CA-03407-0002	#ANO-6730
CA-03407-0017	#PAT-8532
CA-03407-0031	#US-393 Black
CA-03407-0032	Desert Rose
CA-03407-0040	#US364 Burgandy
CA-03407-0041	#SR-308 Fire
CA-03407-0043	#PAT-8528
CA-03407-0062	#SR-105/363500
CA-03407-0085	#416 Faux
CA-03407-0086	#J1U5 Bright Gold
CA-03407-0087	#JHD4 Butter
CA-03407-0088	#BB-56 Copperwood
CA-03407-0089	#BRK-20A Ivory
CA-03407-0090	#J1A1 Black
CA-03407-0091	#EX266 Persimmon
CA-03407-0092	#EX239 Green
CA-03407-0093	#RU-750 Indian Red
CA-03407-0094	#455 Port
CA-03407-0095	#1999-604
CA-03407-0096	#363495
CA-03407-0097	Biscuit
CA-03407-0098	Saddle

|| Arm Rest A-05201-0001
☑*S6E*

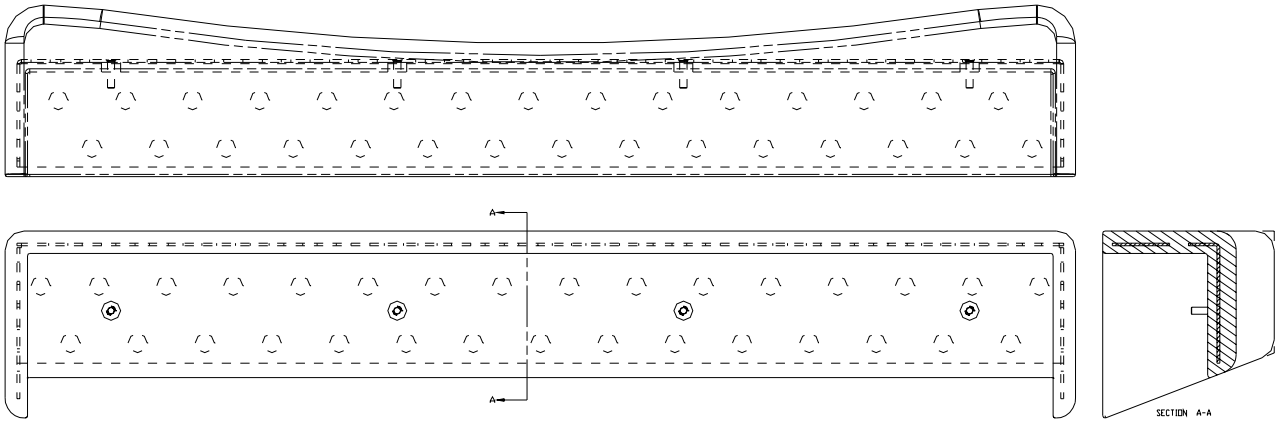

Cabinet Cable Power AS-03025-(SERIES)
☑*Slant* / ☑*S6E*

Cabinet Cable Power
AS-03025-0137 ☑*Slant*

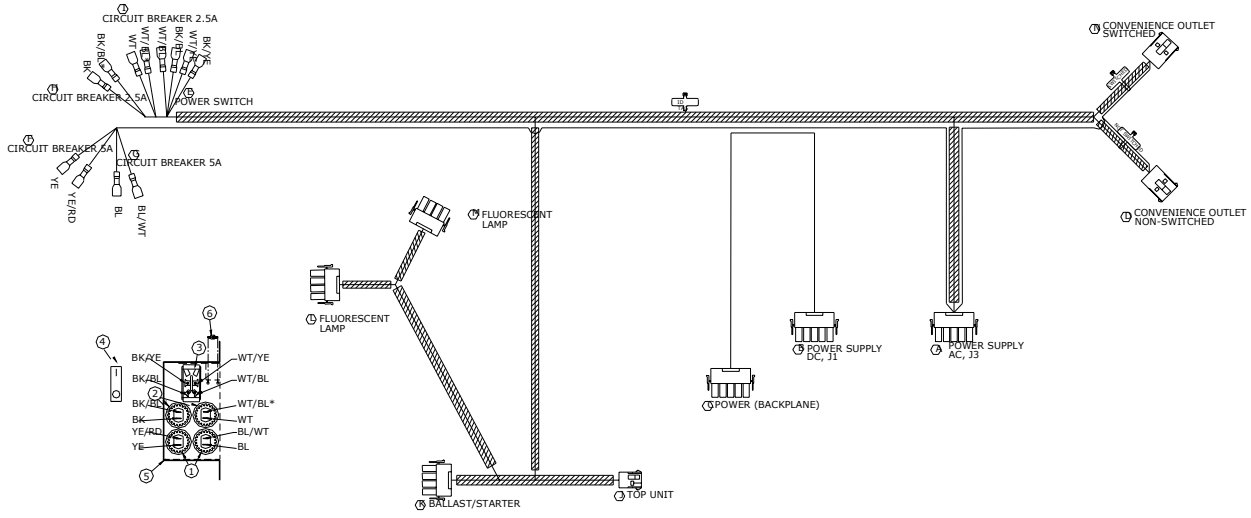

REF	PART #	DESCRIPTION	QTY
1	E-00948-0016	Circuit Breaker, 5.0 Amp, IP, Thermal	2
2	E-00948-0019	Circuit Breaker, 2.5 Amp, IP, Thermal	2
3	E-00108-0395	Switch, Toggle, CE97	1
4	LBL-00248-0001	Label, On/Off	1

REF	PART #	DESCRIPTION	QTY
5	P-06004-0005	Switch, Fuse Bracket	1
6	E-00647-0004	Cable Tie, 4-Inch	1
7	CBL-30255-0001	Cabinet Power Cable	1
8	E-00647-0020	Marker Tie, ID Tag	1

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Cabinet Assembly

Cabinet Cable Power (Cont.) AS-03025-(SERIES) || *Cabinet Cable Power*
☑*Slant / ☑S6E* *AS-03025-0178* ☑*S6E*

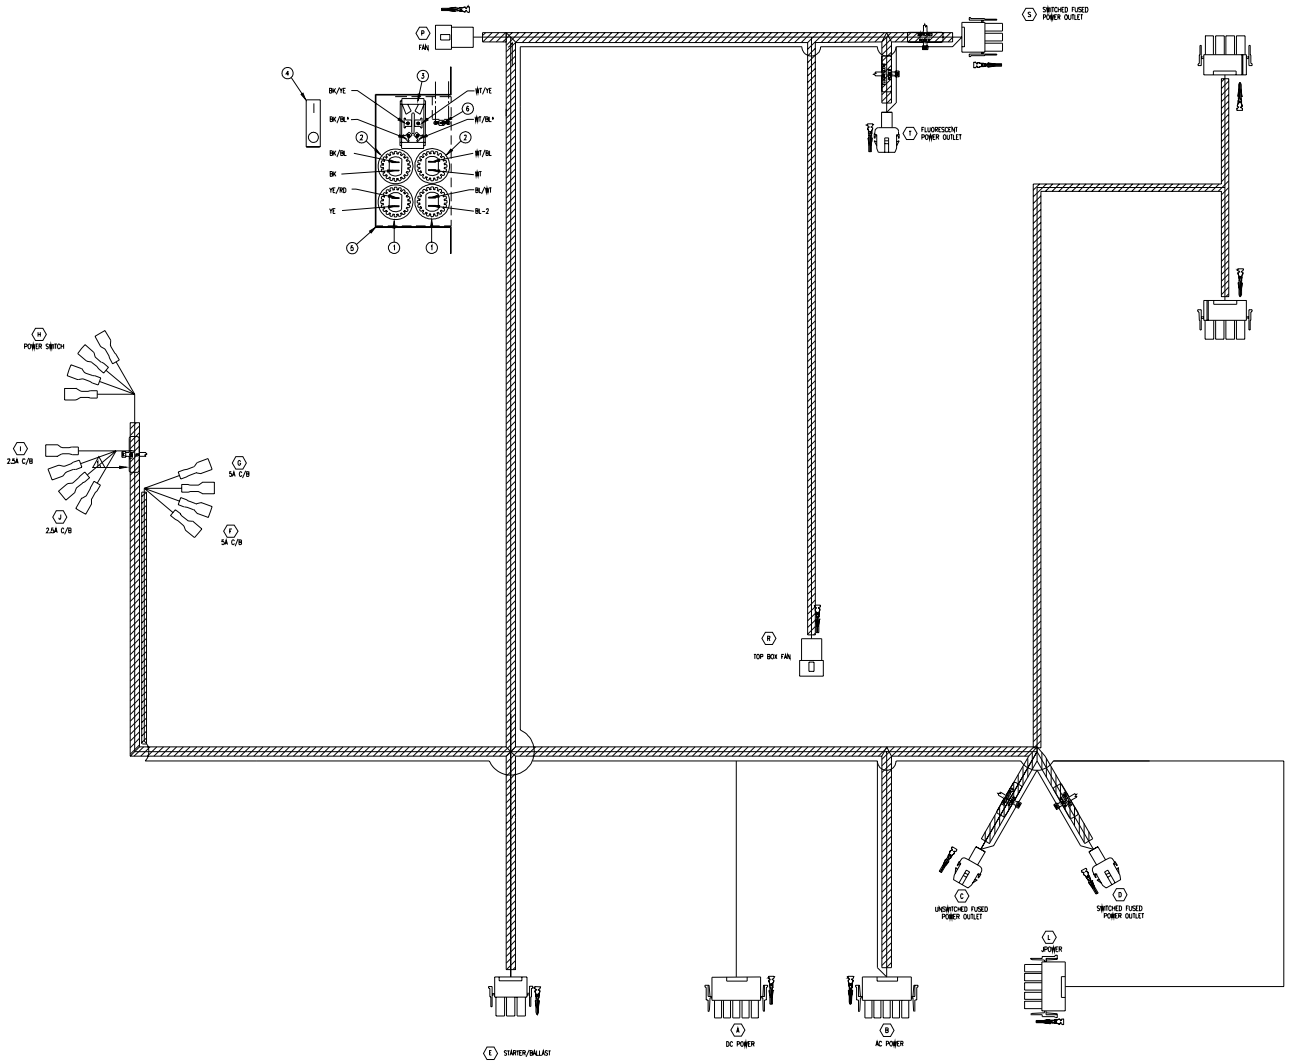

REF	PART #	DESCRIPTION	QTY
1	E-00948-0016	Circuit Breaker, 5.0 Amp, IP, Thermal	2
2	E-00948-0019	Circuit Breaker, 2.5 Amp, IP, Thermal	2
3	E-00108-0395	Switch, Toggle, Main Power, CE97	1
4	LBL-00248-0001	Label, On/Off	1

REF	PART #	DESCRIPTION	QTY
5	P-09319-0696	Bkt, Switch/Fuse	1
6	E-00647-0004	4-Inch Cable Tie	1
7	CBL-30712-0001	Cable, Cabinet Power, S6E Slant	1
8	E-00647-0020	Marker Tie, ID Tag	1

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Cabinet Assembly

Starter/Ballast Assembly AS-03335-(SERIES) *Starter/Ballast Assembly*
☑*Slant* / ☑*S6E* *AS-03335-0132* ☑*Slant*

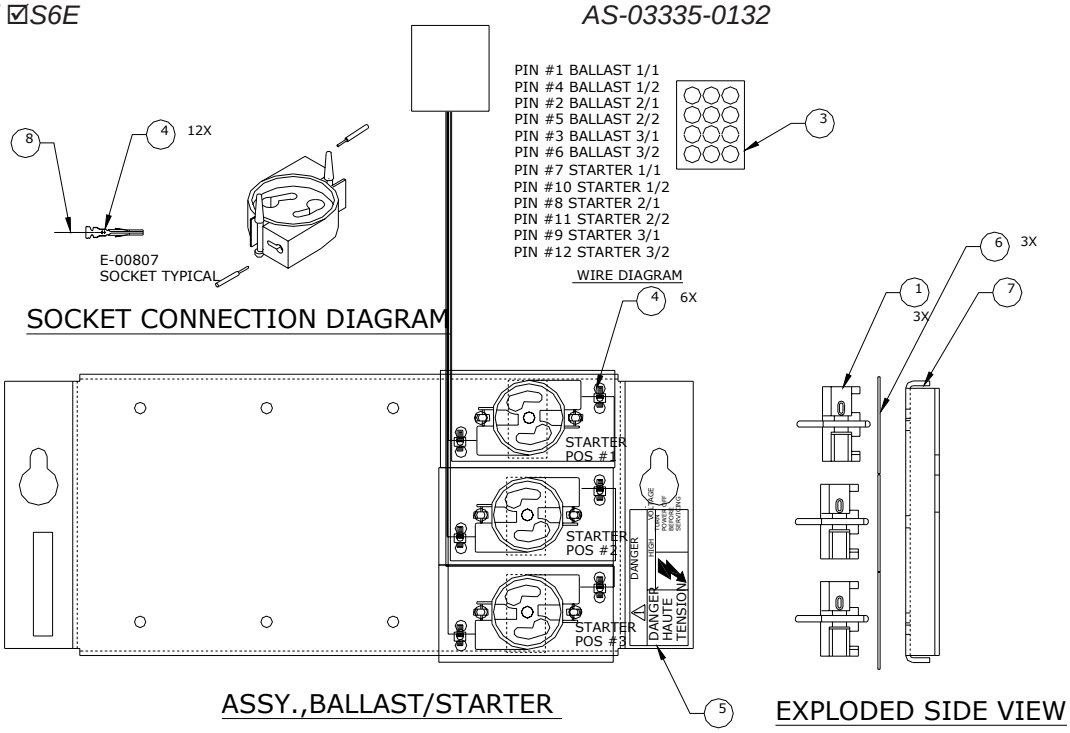

REF	PART #	DESCRIPTION	QTY
1	E-00120-0265	Socket, Fluorescent Lamp Starter, CE97	3
2	E-00647-0004	Cable Tie	6
3	E-00804-0012	Connector Housing Cap	1
4	E-00807	Socket, Amp 24-18 AWG	6

REF	PART #	DESCRIPTION	QTY
5	LBL-00253-0101	Label, High Voltage (French/English)	1
6	P-00150-0292	Insulator, Polycarbonate, CE97	3
7	P-09082-0004	Bracket, Ballast/Starter	1
8	WIP-ES202-1850	PVC, Solid 18 AWG White Type TEW	A/R

|| *Starter/Ballast Assembly, 120V, 60Hz.*
AS-03335-0404 ☑*S6E*

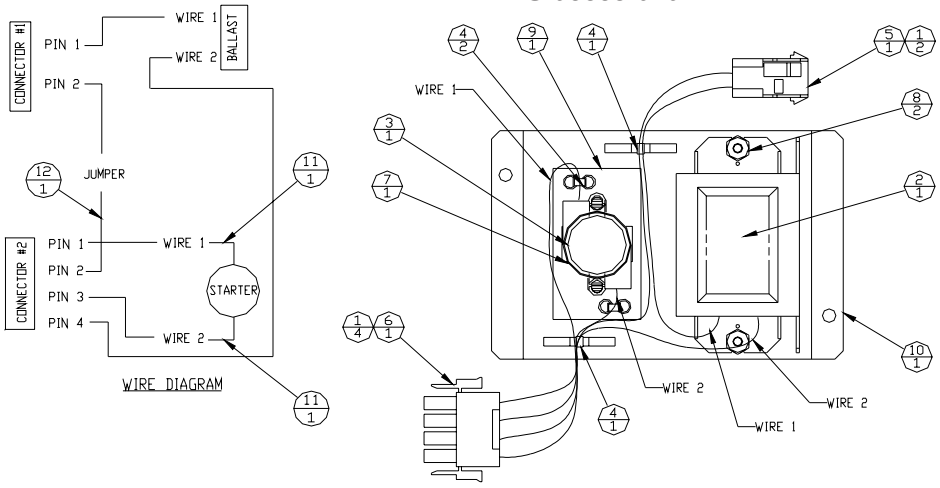

REF	PART #	DESCRIPTION	QTY
1	E-00807	Socket, Amp, 24-18	6
2	E-00409-0010	Ballast, For F15T8 Tube, 60 Hz	1
3	E-00411-0008	Starter, Fluorescent, FS-2	1
4	E-00647-0004	Tie Wrap	4
5	E-00804-0002	Connector Housing Cap	1
6	E-00808-0004	Connector Housing Plug	1

REF	PART #	DESCRIPTION	QTY
7	E-00120-0265	Socket, Fluorescent Lamp Starter CE97	1
8	NLS-00632-1112	Hex Nut	2
9	P-00150-0292	Insulator, Polycarbonate Ce97	1
10	P-09319-0574	Starter/Ballast Mounting Bracket	1
11	WIP-ES202-1850-B	PVC, Solid 18 AWG White, Type TEW	1
12	WIP-ES202-1880-B	PVC, Solid 18 AWG Black, Type TEW	1

| - Revised, || - New

©2003 Bally Gaming and Systems

Starter/Ballast Assembly (Cont.) AS-03335-(SERIES)
☑*Slant* / ☑*S6E*

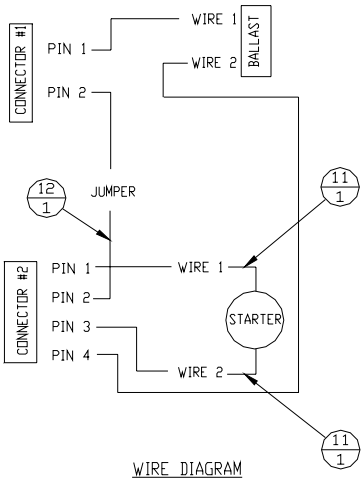

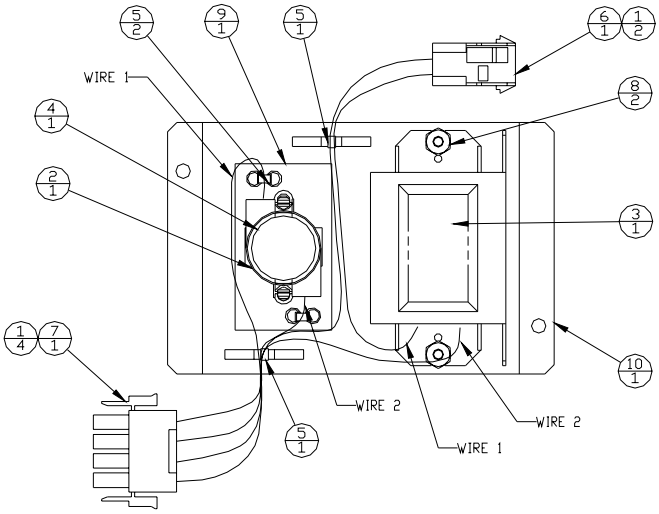

|| *Starter/Ballast Assembly, 220V, 50Hz.*
AS-03335-0405 ☑*S6E*

REF	PART #	DESCRIPTION	QTY
1	E-00807	Socket, Amp, 24-18	6
2	E-00120-0265	Socket, Fluorescent Lamp Starter CE97	1
3	E-00409-0025	Ballast, For F15T8 Tube, 50 Hz	1
4	E-00411-0009	Starter, Fluorescent, FS-2	1
5	E-00647-0004	Tie Wrap	4
5	E-00804-0002	Connector Housing Cap	1

REF	PART #	DESCRIPTION	QTY
7	E-00808-0004	Connector Housing Plug	1
8	NLS-00632-1112	Hex Nut	2
9	P-00150-0292	Insulator, Polycarbonate Ce97	1
10	P-09319-0574	Starter/Ballast Mounting Bracket	1
11	WIP-ES202-1850-B	PVC, Solid 18awg White, Type TEW	1
12	WIP-ES202-1880-B	PVC, Solid 18awg Black, Type TEW	1

|| *Starter/Ballast Assembly, 120V, 60Hz.*
AS-03335-0601 ☑*S6E*

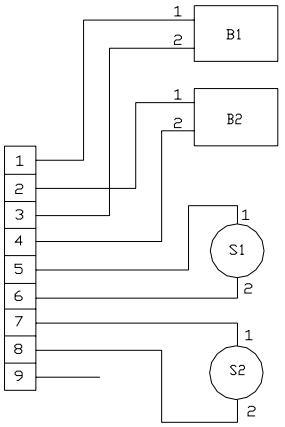

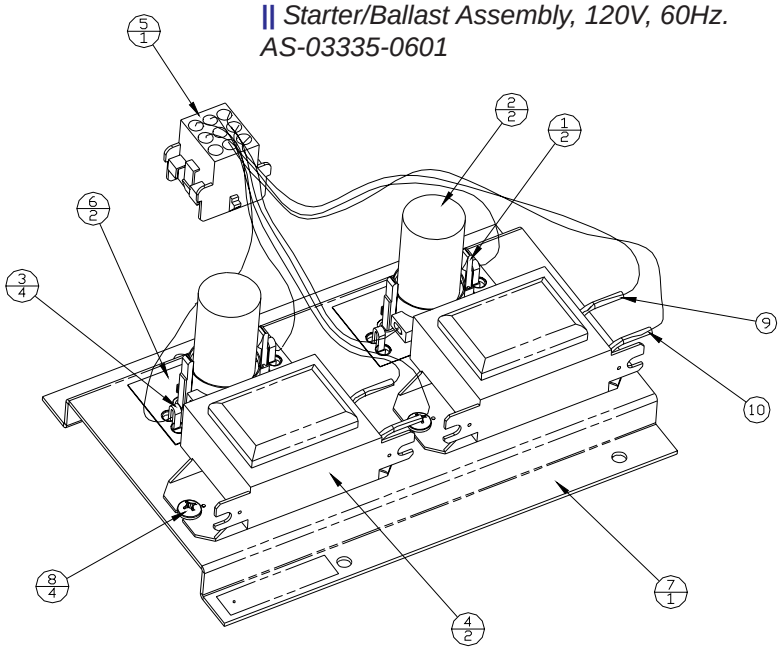

REF	PART #	DESCRIPTION	QTY
1	E-00120-0265	Socket, Fluorescent, Lamp Starter CE97	2
2	E-00411-0010	Starter, Fluorescent, FS-2	2
3	E-00647-0004	Tie Wrap	4
4	E-00664-0239	Assembly, Ballast/Terminal	2
5	E-00804-0009	Connector Housing Cap	1

REF	PART #	DESCRIPTION	QTY
6	P-00150-0292	Insulator, Polycarbonate CE97	2
7	P-09319-0738	Assembly, Starter/Ballast, 120V/60HZ	1
8	TFPP-00832-1104	Screw, 8-32 X 1/4 Thd Form Phil Pan Hd	4
9	WIP-ES202-1850	PVC, Solid, 18 AWG, White	--
10	WIP-ES202-1880	PVC, Solid, 18 AWG, Black	--

AVAILABILITY:

PART #	DESCRIPTON (COLOR)
AS-03335-0602	**Assembly, Starter/Ballast, 220V/60HZ**

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Cabinet Assembly

Card Rack/Backplane AS-06604-(SERIES)
☑*Slant* / ☑*S6E*

Card Rack/Backplane
AS-06604-000X ☑*Slant*

AVAILABILITY:

PART #	DESCRIPTON
AS-06604-0002	Card Rack/Backplane
AS-06604-0005	Card Rack/Backplane (South Africa)
AS-06604-0007	Card Rack/Backplane (France)

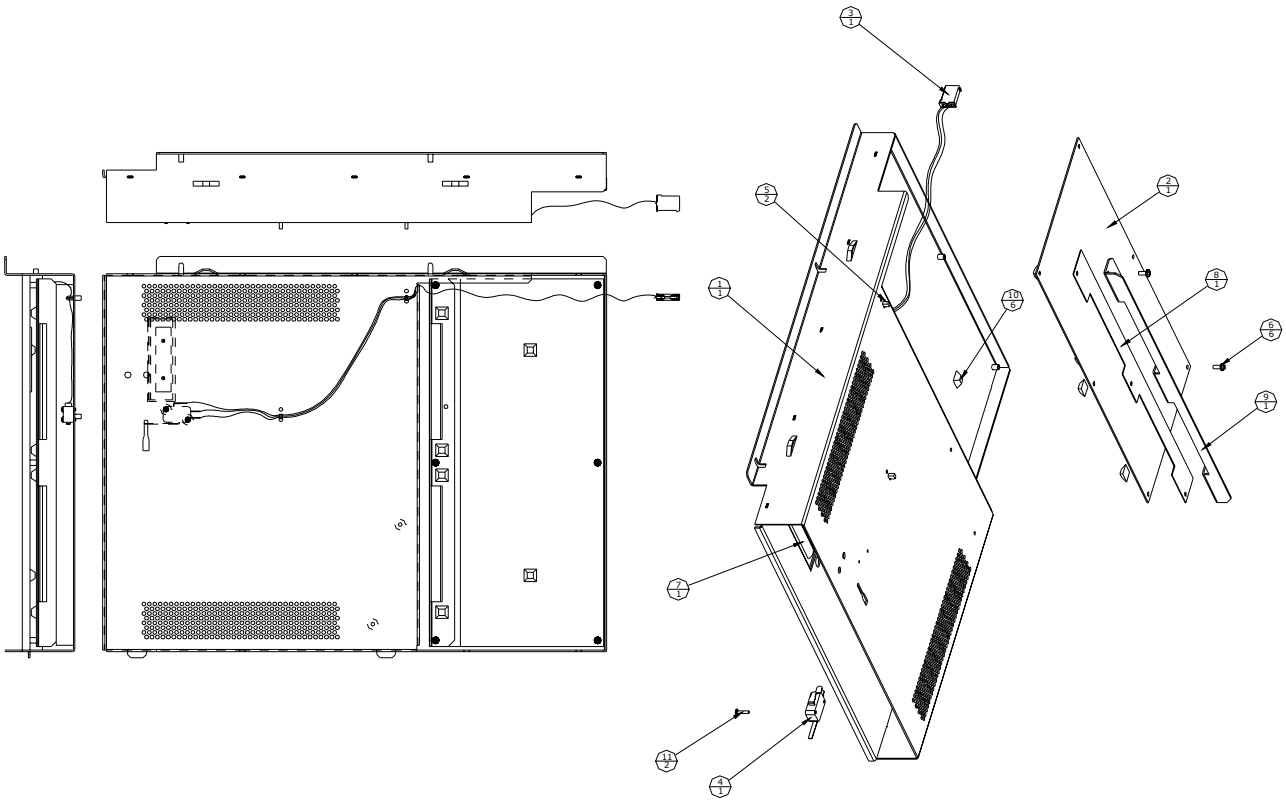

REF	PART #	DESCRIPTION	QTY	PART #
1	A-06803-0002	Housing, MPU	1	0002 0005 0007
2	AS-03356-0423	PC Board, Backplane, Slot MPU	1	0002 0005 0007
3	CBL-20275-0001	Cable, MPU Door Switch	1	0005
	CBL-20277-0001	Cable, Data Vault™	1	0007
4	E-00108-0387	Switch, Bill Acceptor Door	1	0005
5	E-00647-0004	Tie Wrap	2	0005
6	LSPP-00632-1106	Screw, Mach W/ Lock Phil Pan Hd	6	0002 0005 0007
7	M-03001-0001	Strip, Gounding	1	0002 0005 0007

REF	PART #	DESCRIPTION	QTY	PART #
8	P-00150-0303	Insulator, Backplane	1	0002 0005 0007
9	P-09322-0309	Bracket, Backplane Support	1	0002 0005 0007
10	R-00409	Bumper	6	0002 0005 0007
11	TFPP-00440-1108	Screw, 4-40 X 1/2 Thd Form Phil Pan Hd	2	0005 0007
12	AS-06620-0001	Assembly, Data Vault™ Plate/Cover/Board (Not Shown)	1	0007

| - Revised, || - New
©2003 Bally Gaming and Systems

Card Rack/Backplane (Cont.) AS-06604-(SERIES)
☑*Slant* / ☑*S6E*

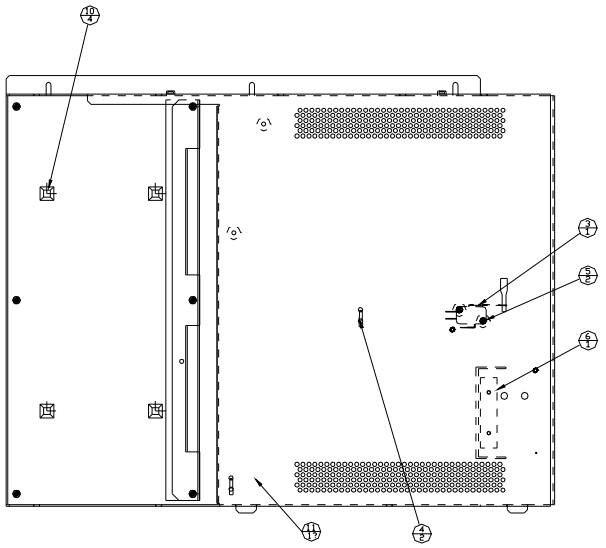

|| *Card Rack/Backplane*
AS-06604-0013 ☑*S6E*

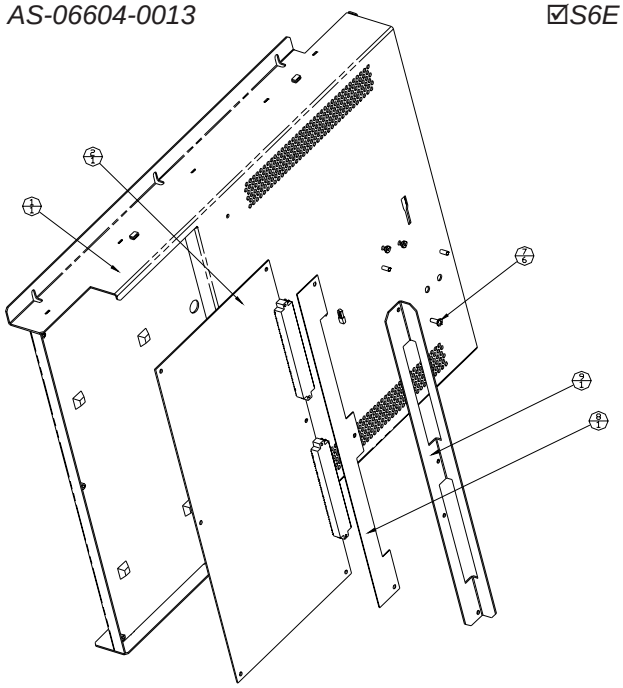

REF	PART #	DESCRIPTION	QTY
1	A-06803-0006	Assembly, IOP Housing	1
2	AS-03356-0643	PCB, IOP Blackplane	1
3	E-00108-0387	Switch, Bill Acceptor Door	1
4	E-00647-0004	Tie Wrap	2
5	LSPP-00440-1110	Screw, Mach With Lock Phil Pan Hd	2
6	M-03001-0001	Strip, Grounding	1

REF	PART #	DESCRIPTION	QTY
7	MSPP-00632-1106	Screw, Machine Phil Pan Hd	6
8	P-00150-0303	Insulator, Backplane	1
9	P-09322-0309	Backplane Support Bracket	1
10	R-00409	Bumper	4
11	CBL-20319-0002	Cable, IOP Door Switch	1

MPU Board/Tray AS-06605-(SERIES)
☑*Slant* / ☑*S6E*

MPU Board/Tray
AS-06605-00XX ☑*Slant*

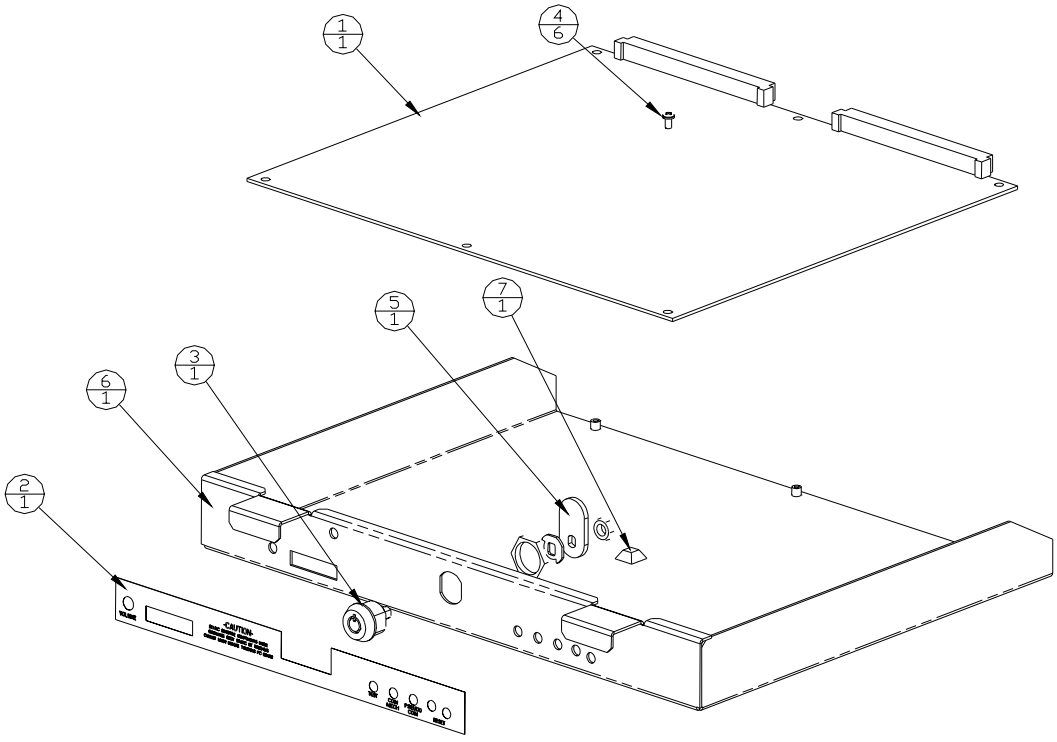

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Cabinet Assembly

MPU Board/Tray (Cont.) AS-06605-(SERIES)
☑*Slant* / ☑*S6E*

REF	PART #	DESCRIPTION	QTY	P/N
1	AS-03356-0438	PC Board, MPU	1	0004
	AS-03356-0478	PC Board, MPU	1	0006
	AS-03356-0424	PC Board, MPU	1	0002
				0010
2	LSPP-00632-1104	Screw, Mach W/ Lock Phil Pan Hd	6	0002
				0004
				0006
				0010
3	M-00281-162A	Lock, No Cam, Door/Bill Acceptor	1	0002
				0004
				0006
	M-00281-0173	Lock, Thumb-Turn, Door, No Key	1	0010
4	P-00758-0183	Cam, MPU Tray	1	0002
				0004
				0006
	P-00758-0094	Cam, Bill Acceptor Stacker, M-00281-0132	1	0010

MPU Board/Tray
AS-06605-00XX ☑*Slant*

REF	PART #	DESCRIPTION	QTY	P/N
5	P-06802-0002	MPU Tray	1	0002
				0004
				0006
				0010
6	R-00409	Bumper	1	0002
				0004
				0006
				0010
7	S-00231-1003	Spacer, Door Lock Used With 1 1/8 Lock	1	0010

AVAILABILITY:

PART #	DESCRIPTON
AS-06605-0002	**MPU Board/Tray**
AS-06605-0004	**MPU Board/Tray (South Africa)**
AS-06605-0006	**MPU Board/Tray, DataVault™ (France)**
AS-06605-0010	**MPU Board/Tray (South Africa)**

REF	PART #	DESCRIPTION	QTY
1	AS-03356-0424	Assembly, MPU Board	1
2	LBL-00272-0006	Label, IOP Tray	1
3	M-00281-162A	Lock, No Cam, Door/Bill Acceptor	1
4	MSPP-00632-1104	Screw, Machine Phil Pan Hd	6

MPU Board/Tray
AS-06605-1009 ☑*S6E*

REF	PART #	DESCRIPTION	QTY
5	P-00758-0168	Cam, MPU Tray	1
6	P-06802-0009	Tray, IOP	1
7	R-00409	Bumper	1

Transformer, 220 VAC, 50/60 Hz. E-00122-0246
☑*Slant*

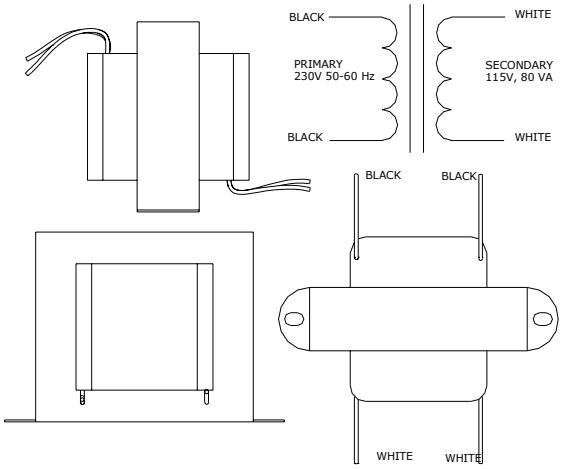

FIGURE 1

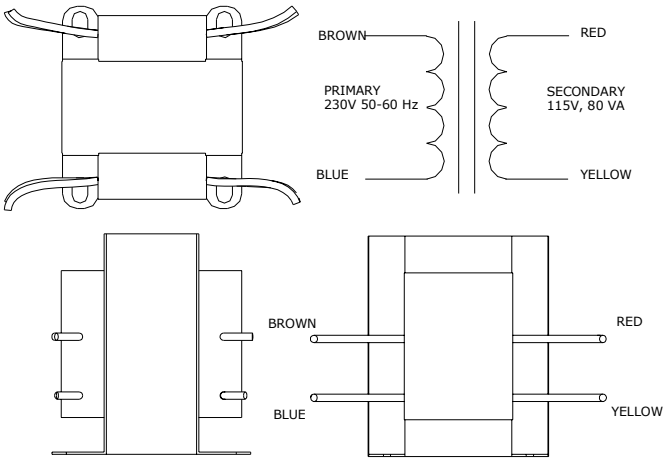

FIGURE 2

NOTE: See page 23 for additional transformer selections.

| - Revised, || - New
©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Cabinet Assembly

Speaker Panel AS-05031-(SERIES)
☑*Slant*

AVAILABILITY:

	PART #	DESCRIPTON
‖	AS-05031-0101	Speaker Panel
	AS-05031-0102	Speaker Panel

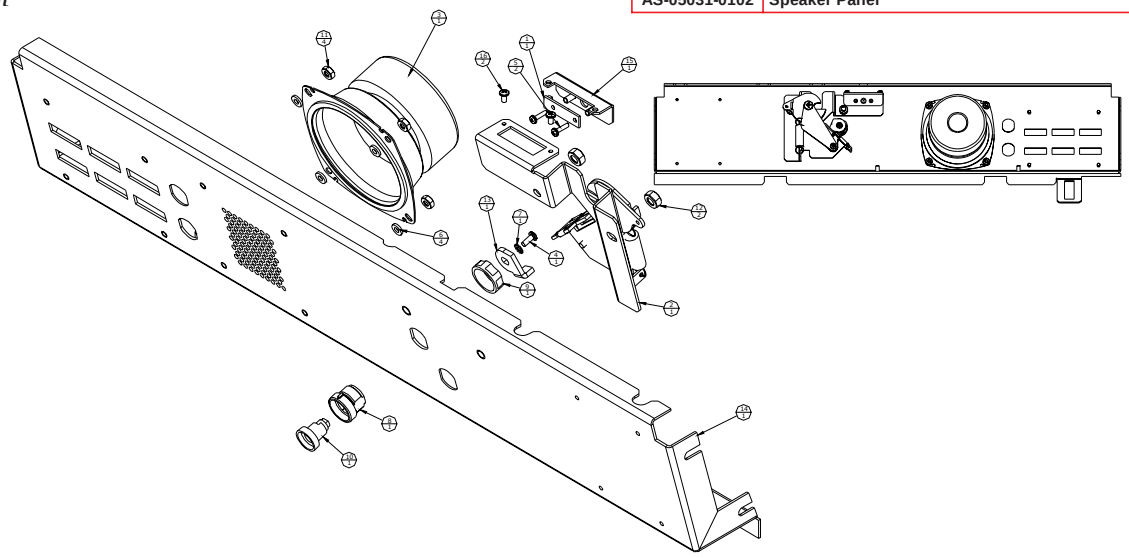

REF	PART #	DESCRIPTION	QTY	PART #
1	AS-03356-0428	Assembly, Door Optic Emitter	1	0101
2	AS-04332-0002	Assembly, Deck Latch	1	0101
				0102
3	E-00281-0027	Speaker, 4-Inch Round	1	0101
			2	0102
4	HLPP-00600-1106	Screw, Hi-Lo, Phil Pan Hd	1	0101
				0102
5	LSPP-00440-1108	Screw, Mach With Lock Phil Pan Hd	2	0101
6	M-01514-0049	Spacer, .37OD X .171ID X .062LG	4	0101
			8	0102
7	M-01700-0006	Lock Washer, External Tooth	1	0101
				0102
8	M-01757-0014	Housing, Lock, Plastic	1	0101
				0102

REF	PART #	DESCRIPTION	QTY	PART #
9	M-01757-0016	Nut, Lock Housing, Plastic	1	0101
				0102
10	M-01757-0017	Cylinder, Lock Plastic	1	0101
				0102
11	NLS-00832-1112	Hex Nut	4	0101
			8	0102
12	NLS-25020-1112	Hex Nut	2	0101
				0102
13	P-00758-0117	Cam, Lock, Single Deck	1	0101
				0102
14	P-07900-0030	Assembly, Speaker Panel	1	0101
	P-07900-0034	Assembly, Speaker Panel	1	0102
15	P-09319-0450	Bracket, Door Optic	1	0101
16	TFPP-00632-1104	Screw, 6-32 X 1/4 Thd Form Phil Pan Hd	2	0101

‖ Speaker E-00281-(SERIES)
☑*S6E*

AVAILABILITY:

	PART #	DESCRIPTON
‖	E-00281-0036	Speaker, 2 3/4 Inch, 4 OHM, 10W
‖	E-00281-0037	Speaker, 6-Inch, 8 OHM, 50W

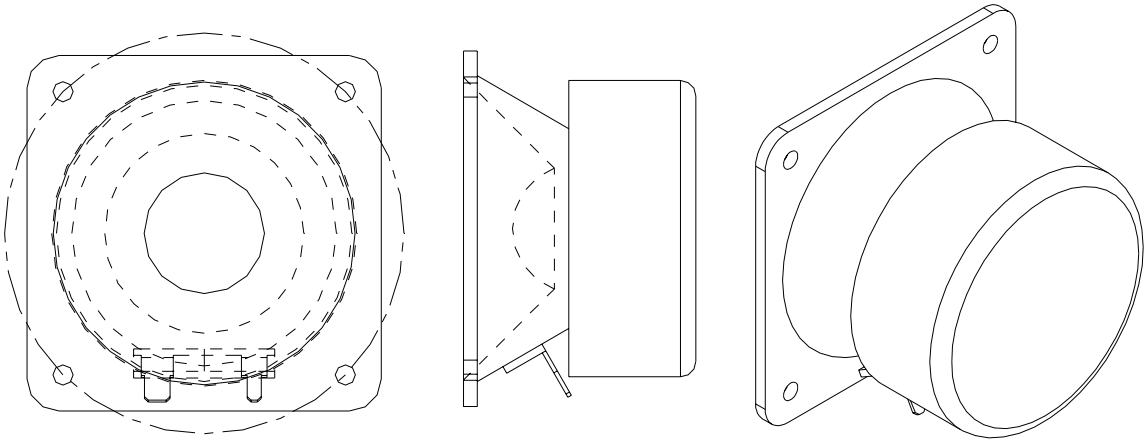

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Cabinet Assembly

Meter Assembly AS-04225-(SERIES)
☑*Slant* / ☑*S6E*

AVAILABILITY:

PART #	DESCRIPTON	SL	S6E
AS-04225-0071	Assembly, 3 Meter	X	X
AS-04225-0088	Assembly, 3 Meter	X	

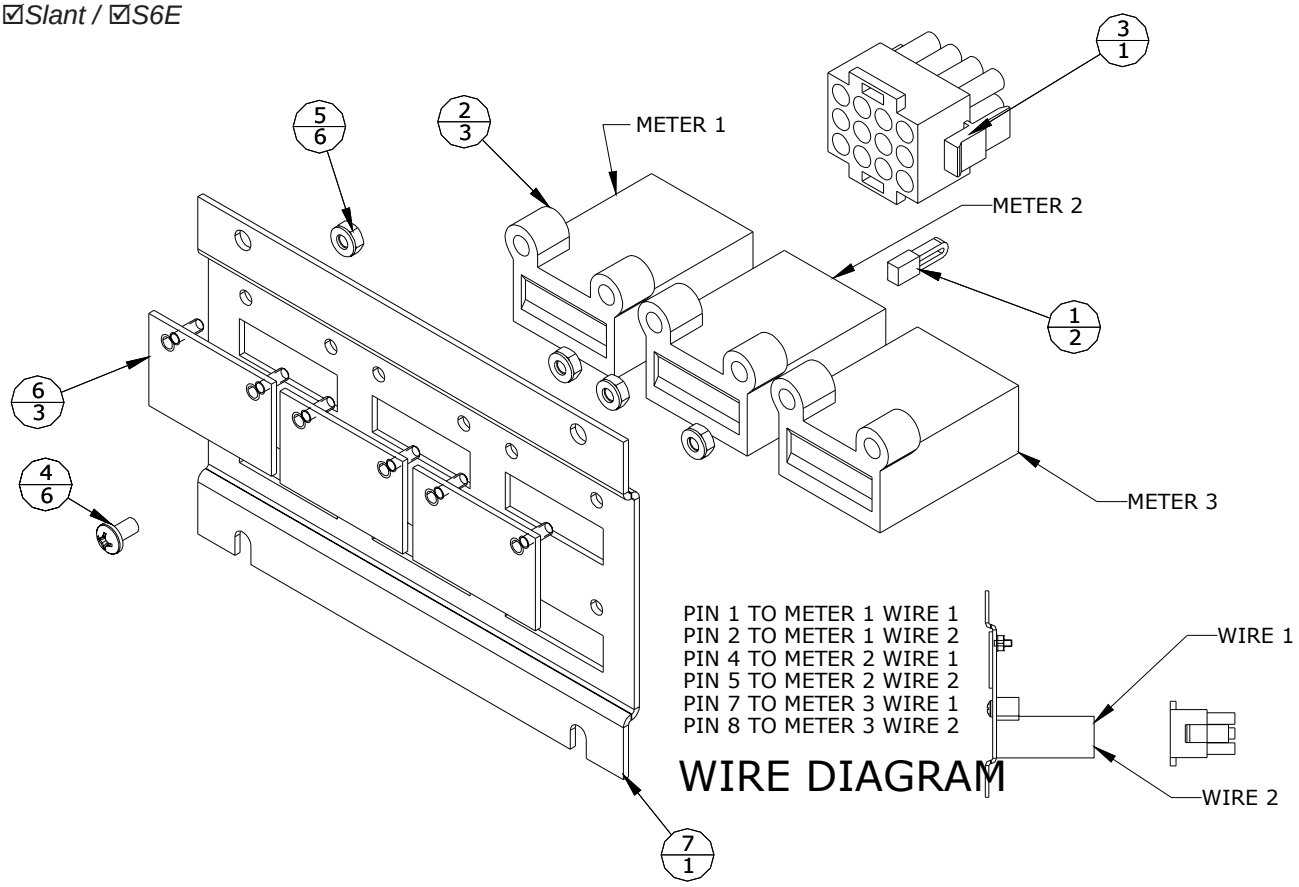

REF	PART #	DESCRIPTION	QTY	PART #
1	E-00647-0004	Tie Wrap	2	0071
				0088
2	E-00664-0491	Assembly, 7-Digit Meter With 80-Inch Lead	3	0071
			5	0088
3	E-00808-0012	Connector Housing Plug	1	0071
				0088
4	LSPP-M0350-1104	Screw, Metric Mach With Lock Phil Pan Hd	6	0071
			10	0088

REF	PART #	DESCRIPTION	QTY	PART #
5	NLS-00440-1112	Hex Nut	6	0071
			2	0088
6	P-04474-0004	Guard, Meter, Black	3	0071
			1	0088
7	P-09319-0236	Bracket, Meter Mounting	1	0071
				0088

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Cabinet Assembly

Reel Mechanism Assembly AS-04716-(SERIES)
☑*Slant* / ☑*S6E*

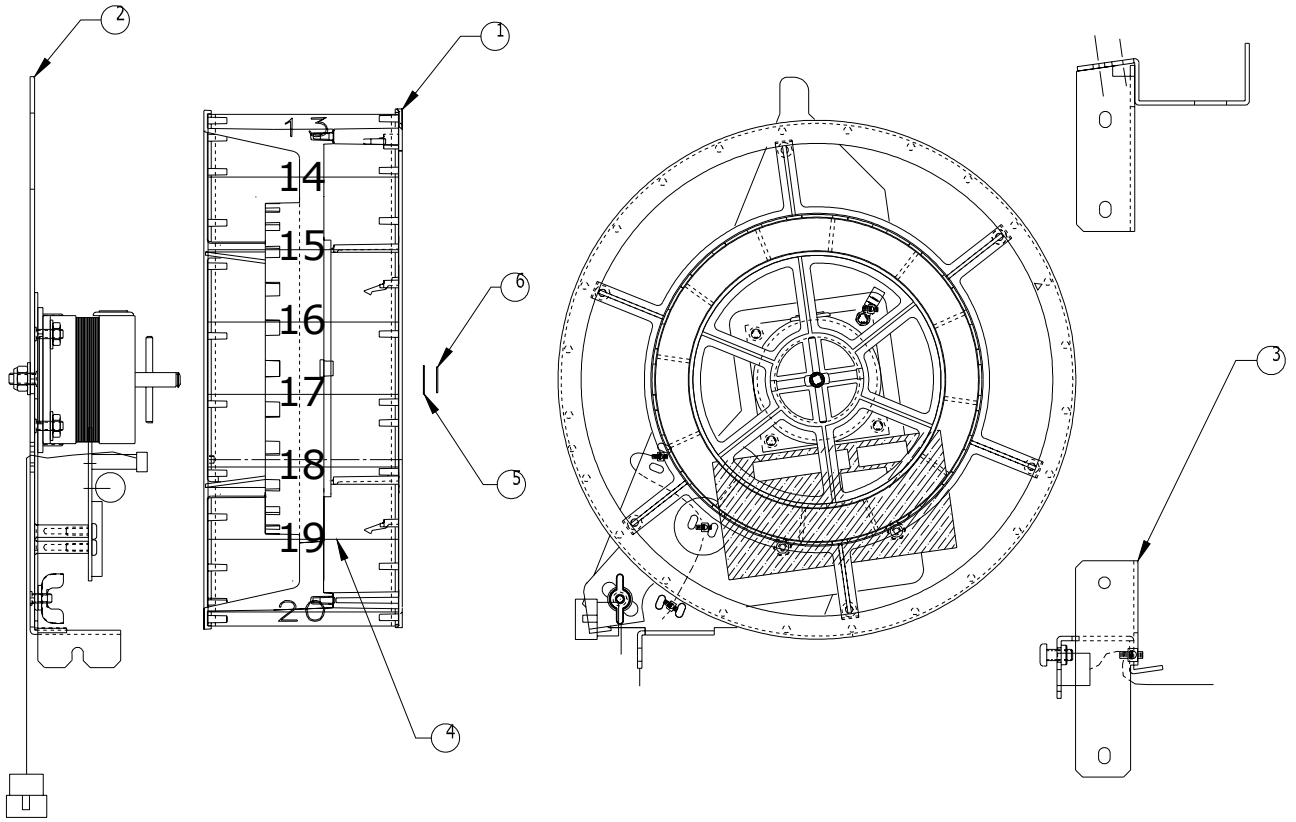

REF	PART #	DESCRIPTION	QTY	PART #
1	AS-04234-0004	Assembly, Reel, 9-Inch	3	0006
				0009
2	AS-04235-0009	Assembly, Reel Drive, 9-Inch	3	0006
				0009
3	AS-04703-0009	Assembly, 4 Reel Support, Lower	1	0009
4	M-01777-5617	Adhesive, Double-Sided Tape, 1/4W	A/R	0006
				0009

REF	PART #	DESCRIPTION	QTY
1	AS-04234-0004	Assembly, Reel, 9-Inch	3
2	AS-04235-0009	Assembly, Reel Drive, 9-Inch	3
3	AS-04703-0014	Assembly, 3 Reel Bracket/Cable	1
4	M-01777-5617	Adhesive, Double-Sided Tape, 1/4W	A/R

Reel Mechanism Assembly *AS-04716-000X*
☑*Slant*

AVAILABILITY:

P/N	DESCRIPTON
AS-04716-0006	3-Reel Mechanism
AS-04716-0009	4-Reel Mechanism

REF	PART #	DESCRIPTION	QTY	PART #
5	P-00801-0676	Washer, .255ID x .500D x .007 Thk	3	0006
				0009
6	P-02891-0006	Retaining Ring, .281 shaft x .025 Thk	3	0006
				0009

Reel Mechanism Assembly *AS-04716-0011*
☑*S6E*

REF	PART #	DESCRIPTION	QTY
5	M-03092-0006	Reel Drive, 9-Inch Wide	3
6	P-00801-0676	Washer, .255ID x .500D x .007 Thk	3
7	P-02891-0006	Retaining Ring, .281 shaft x .025 Thk	3

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Reel Support, Cable and Bracket AS-04703-(SERIES)
☑*Slant* / ☑*S6E*

Reel Support, Cable and Bracket
AS-04703-000X ☑*Slant*

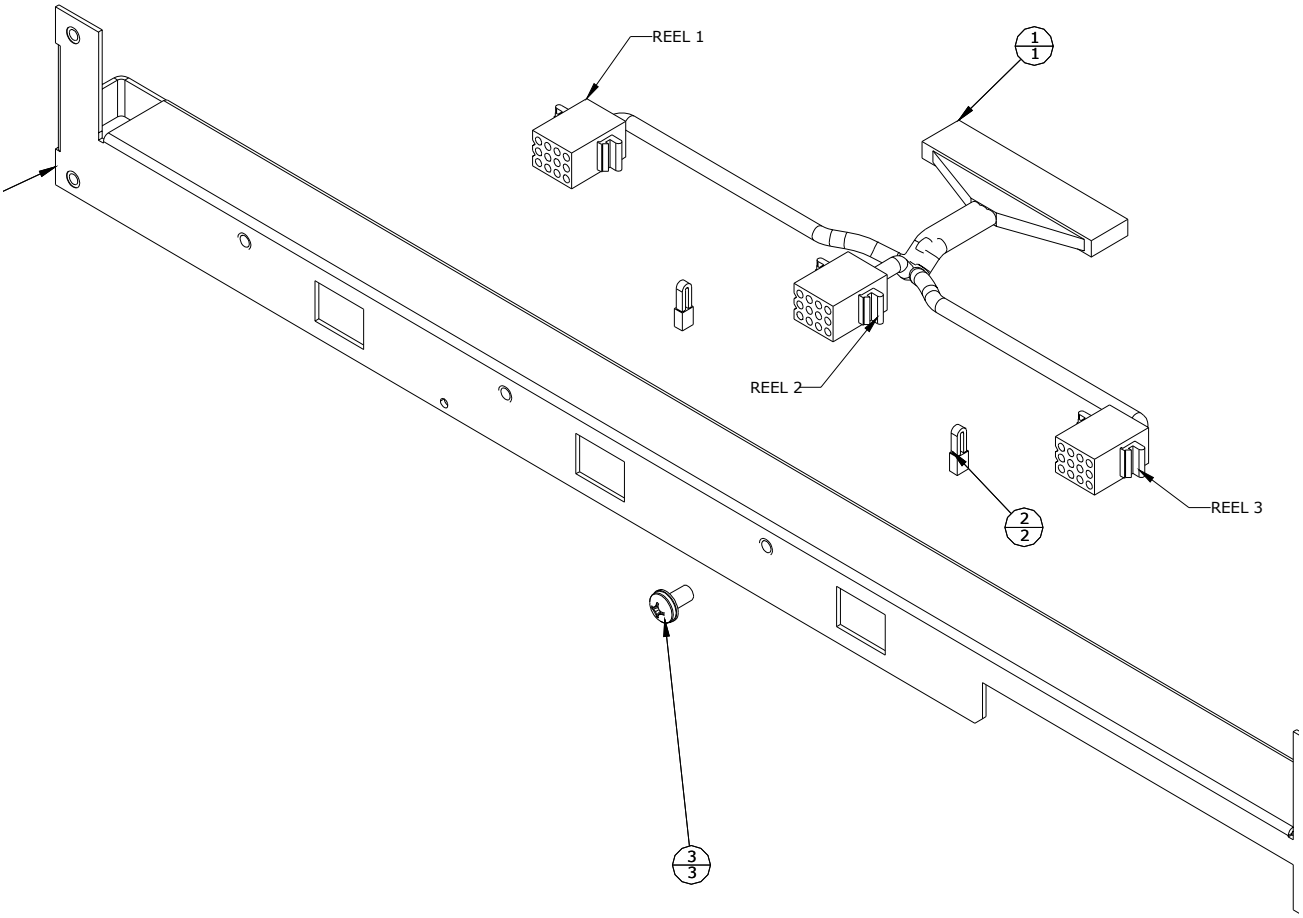

REF	PART #	DESCRIPTION	QTY	PART #
1	AS-04234-0004	Assembly, Reel, 9-Inch	3	0006
				0009
2	AS-04235-0009	Assembly, Reel Drive, 9-Inch	3	0006
				0009
3	AS-04703-0009	Assembly, 4 Reel Support, Lower	1	0009
4	M-01777-5617	Adhesive, Double-Sided Tape, 1/4W	A/R	0006
				0009

REF	PART #	DESCRIPTION	QTY	PART #
5	P-00801-0676	Washer, .255ID x .500D x .007 Thk	3	0006
				0009
6	P-02891-0006	Retaining Ring, .281 Shaft x .025 Thk	3	0006
				0009

AVAILABILITY:

PART #	DESCRIPTON
AS-04703-0008	**Reel Support, Cable and Bracket, 3-Reel**
AS-04703-0009	**Reel Support, Cable and Bracket, 4-Reel**

Reel Support, Cable and Bracket
AS-04703-0014 ☑*S6E*

REF	PART #	DESCRIPTION	QTY
1	CBL-30709-0001	Cable, 3 Reel	1
2	E-00108-0363	Switch, Push Button Momentary	2
3	E-00647-0004	Tie Wrap	6

REF	PART #	DESCRIPTION	QTY
4	LBL-00246-0006	Label, Test/Pseudo Coin	1
5	MSPP-01032-1106	Screw, Machine Phil Pan Hd	3
6	P-06004-0198	Reel Shelf	1

| - Revised, || - New
©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Door Assembly

Front Door Assembly AS-04189-(SERIES)
☑*Slant*

AVAILABILITY:

PART #	DESCRIPTON
AS-04189-0001	Front Door Assembly
AS-04189-0002	Front Door Assembly, With Printer

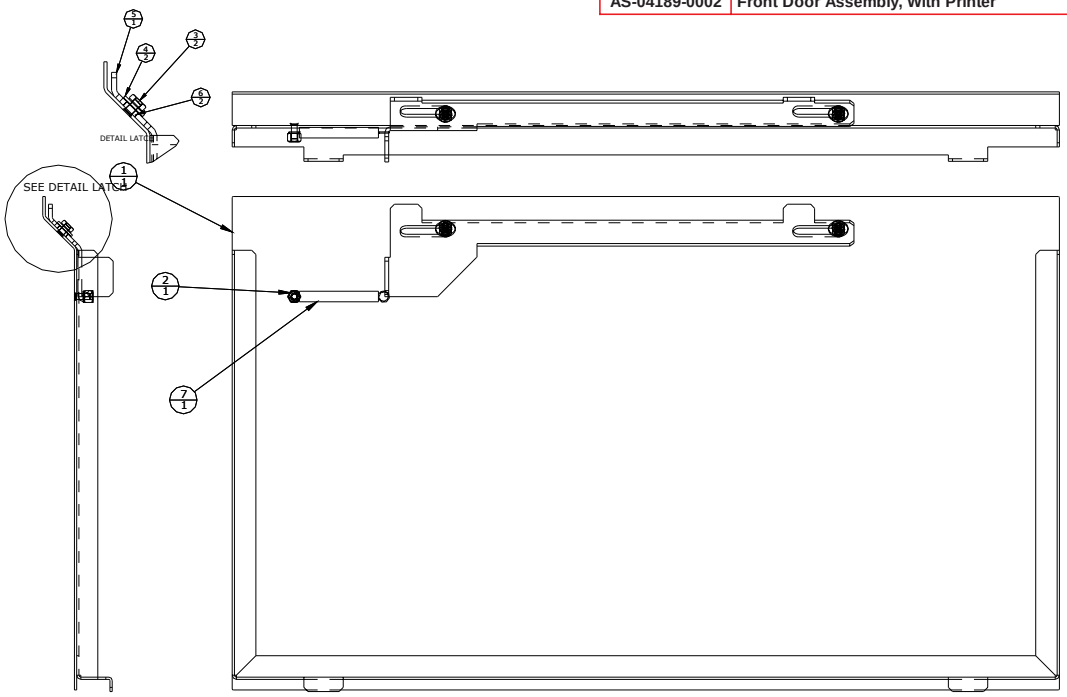

REF	PART #	DESCRIPTION	QTY	PART #
1	A-07901-0005	Cabinet, Front Door Assembly	1	0001
	A-07901-0006	Cabinet, Front Door Assembly	1	0002
2	M-00319-0001	Elastic, Stop Nut (ESNA)	1	0001
				0002
3	NLS-01032-1112	Hex Nut	2	0001
				0002
4	P-00800-0006	Spacer	2	0001
				0002

REF	PART #	DESCRIPTION	QTY	PART #
5	P-06004-0039	Bar, Front Door Latch	1	0001
				0002
6	S-00231-1002	Spacer	2	0001
				0002
7	SP-00100-0021	Spring, Extension	1	0001
				0002

Front Door Assembly AS-08750-0002
☑*S6E*

REF	PART #	DESCRIPTION	QTY
1	A-04995-0001	Exhaust Duct	1
2	A-08750-0004	Door, Front Cabinet	1
3	M-00319-0001	Elastic, Stop Nut (ESNA)	1
4	NLS-01032-1112	Hex Nut	8
5	P-08750-0016	Lock Bar, Front Door	1
6	P-08750-0017	Bracket, Lock Pin	1
7	S-00231-1022	Shoulder Washer	2
8	SP-00100-0021	Spring, Extension	8

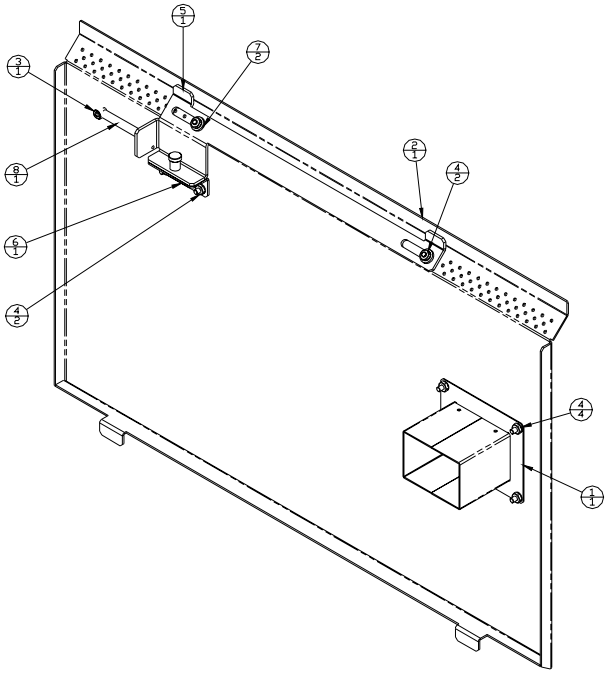

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Door Switch E-00108-(SERIES)
☑*Slant* / ☑*S6E*

Door Switch, Push/Pull
| *E-00108-0384* ☑*Slant* / ☑*S6E*



RATINGS:
10 AMPS 125/250 VAC
1/3 H.P. 125/250 VAC



Door Switch, Push
| *E-00108-0385* ☑*Slant* / ☑*S6E*



RATINGS:
10 AMPS 125/250 VAC
1/3 H.P. 125/250 VAC



Deck/Hatch AS-07920-(SERIES)
☑*Slant*

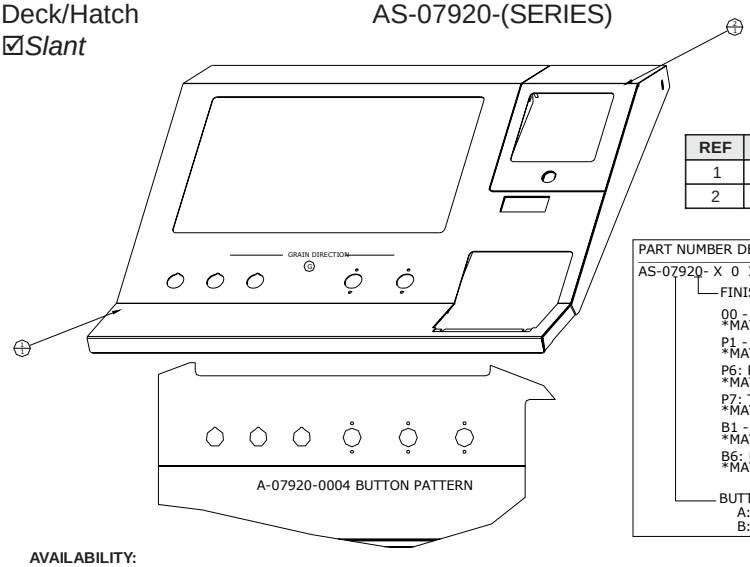

REF	PART #	DESCRIPTION	QTY
1	A-07920-0001	Assembly, Deck, Slot (or A-07920-0004)	1
2	A-07920-0002	Assembly, Deck Hatch	1

PART NUMBER DESCRIPTION

AS-07920- X 0 XX

FINISH OPTION (*APPLIES TO SKINS ONLY)

00 - 99: POWDER COATED (PER DWG. PC-SPEC-0001, TABLE "A").
*MATERIAL TYPE: CRS PER CURRENT INDUSTRY STANDARDS

P1 - P5: POLISHED AND PLATED (PER DWG. MET-SPEC-0002).
*MATERIAL TYPE: CRS PER CURRENT INDUSTRY STANDARDS, BRIGHT POLISHED.

P6: POLISHED STAINLESS STEEL
*MATERIAL TYPE: CLARK METALS #10 T-304 S.S.

P7: TITANIUM GOLD
*MATERIAL TYPE: MIRROR POLISH PVC T304 TITANIUM GOLD, .039 THK.

B1 - B5: BRUSHED AND PLATED (PER DWG. MET-SPEC-0002).
*MATERIAL TYPE: CRS PER CURRENT INDUSTRY STANDARDS, #4 FINISH.

B6: BRUSHED STAINLESS STEEL
*MATERIAL TYPE: 304 SS, #4 FINISH.

BUTTON PATTERN
A: STANDARD SLOT
B: RING THE BELL

AVAILABILITY:

PART #	DESCRIPTON
AS-07920-A000	No Finish
AS-07920-A001	White
AS-07920-A002	Black
AS-07920-A005	Gold Vein
AS-07920-A006	Sun Gold
AS-07920-A007	Black River
AS-07920-A009	Gold Rush
AS-07920-A013	Black
AS-07920-A014	Penny Vein

PART #	DESCRIPTON
AS-07920-A033	ELW505S9
AS-07920-A073	Copper Vein
AS-07920-A079	Silver Vein
AS-07920-A0B2	Brushed Brass/Stainless Steel
AS-07920-A0B6	Brushed Stainless Steel
AS-07920-A0P6	Polished Stainless Steel
AS-07920-A0P7	Titanium Gold
AS-07920-B001	White, Bell Ringer
AS-07920-B005	Gold Vein, Bell Ringer

PART #	DESCRIPTON
AS-07920-B006	Sun Gold, Bell Ringer
AS-07920-B007	Black, Bell Ringer
AS-07920-B033	White, Bell Ringer
AS-07920-B073	Copper Vein, Bell Ringer
AS-07920-B079	Silver Vein, Bell Ringer
AS-07920-B0P6	Polished Stainless Steel, Bell Ringer
AS-07920-B0P7	Gold, Bell Ringer

Deck/Hatch AS-08759-(SERIES)
☑*S6E*

REF	PART #	DESCRIPTION	QTY
1	A-08759-0001	Assembly, Deck Weld	1
2	A-8740-0002	Assembly, Bill Acceptor Hatch	1

AVAILABILITY:

PART #	DESCRIPTON
AS-08759-0005	Assembly, Deck/Bill Acceptor Hatch
AS-08759-00P1	Assembly, Deck/Bill Acceptor Hatch
AS-08759-00P4	Assembly, Deck/Bill Acceptor Hatch

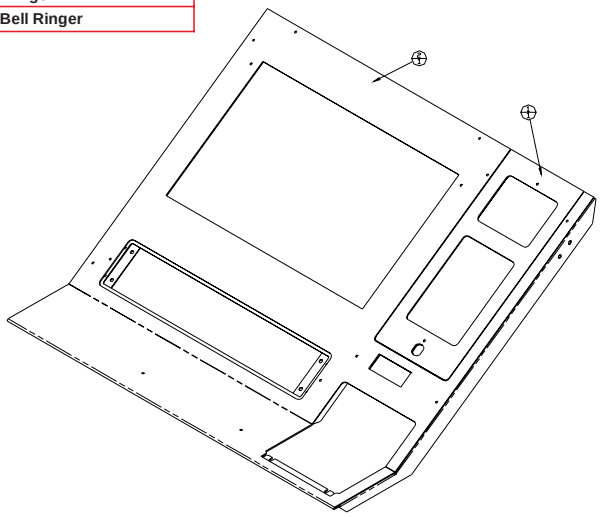

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Door Assembly

REF	PART #	DESCRIPTION	QTY
1	A-08757-SERIES	Plate, Deck 5 Button	1
2	BH-04572-0001	Switch, Push Button, 1-Inch Square	3
3	BH-04573-0001	Switch, Push Button, 2-Inch Square	2
4	CBL-30719-0001	Cable, Upper Reel Light	1

Five Button Deck (Player Panel) AS-08757-05XX
☑*S6E*

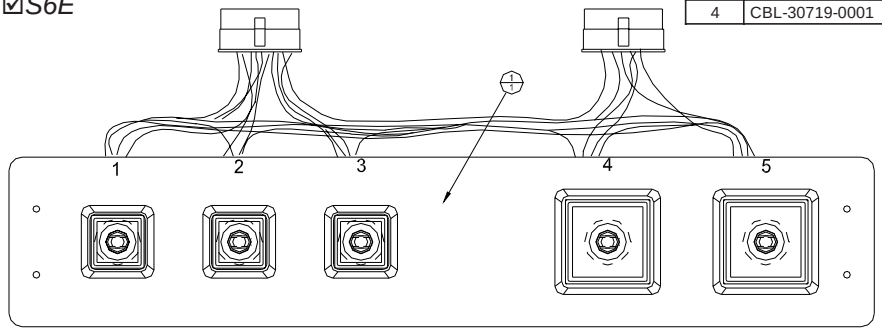

BUTTON WIRING (ITEM 4)		
BUTTON 1 CHANGE	BL-1 WT GY/RD-1 BK	LAMP LAMP SW COM SW N/O
BUTTON 2 CASH CREDIT	BL-1 WT/GY GY/RD-1 BK/GY	LAMP LAMP SW COM SW N/O
BUTTON 3 BET ONE	BL-1 WT/BR GY/RD-1 BK/BR	LAMP LAMP SW COM SW N/O
BUTTON 4 SPIN	BL-1 WT/BL GY/RD-1 BK/BL	LAMP LAMP SW COM SW N/O
BUTTON 5 BET MAX	BL-1 WT/RD GY/RD-1 BK/RD	LAMP LAMP SW COM SW N/O

PART NUMBER LEGEND
AS-08757-00 XX
FINISH OPTION
P1 THRU P5
POLISHED & PLATED ASY (PERDRAWING MET-SPEC-0002)
B1 THRU B5
BRUSHED & PLATED ASY (PER DRAWING MET-SPEC-0002, #4 FINISH)
01 THRU 99
POWDER COAT PER DRAWING PC-SPEC-0001

‖ Happ Switch, Square AS-0457X-(SERIES)
☑*Slant*

‖ *Happ Switch, Square*
AS-04572-(SERIES) ☑*Slant*

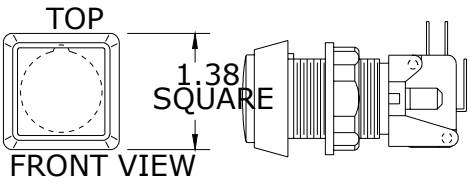

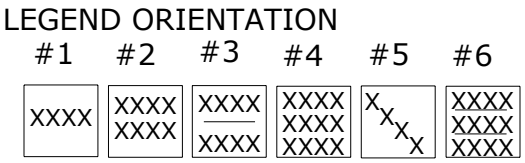

PART #	LENS CAP COLOR (TRANSPARENT)	LEGEND MESSAGE	ENGLISH TRANSLATION	LEGEND ORIENTATION	LANGUAGE	LEGEND PLATE COLOR
AS-04572-0001	Clear	Change		1	English	Red
AS-04572-0002	Clear	Cash Out		2	English	White
AS-04572-0003	Clear	Bet One		2	English	White
AS-04572-0007	Clear	Cash/Credit		3	English	White
AS-04572-0009	Clear	Service	Change	1	English/French	Red
AS-04572-0010	Clear	Misez/1	Bet One	2	English/French	White
AS-04572-0011	Clear	Caisse	Cash/Credit	1	English/French	White
AS-04572-0026	Clear	Mise/1/Bet	Bet One	4	Canadian French/English	White
AS-04572-0027	Clear	Monnaie/Change	Change	2	Canadian French/English	Red
AS-04572-0028	Clear	Paiement/Credit	Cash/Credit	2	Canadian French/English	White
AS-04572-0029	Clear	Cambio	Change	1	English/Spanish	Red
AS-04572-0030	Clear	Apueste Uno	Bet One	2	English/Spanish	White
AS-04572-0032	Clear	Pago/Credito	Cash/Credit	3	English/Spanish	White

Happ Switch, Square, 2-Inch
‖ *AS-04573-(SERIES)* ☑*Slant*



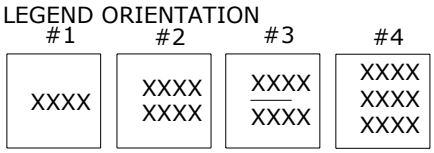

PART #	LENS CAP COLOR (TRANSPARENT)	LEGEND MESSAGE	ENGLISH TRANSLATION	LEGEND ORIENTATION	LANGUAGE	LEGEND PLATE COLOR
AS-04573-0001	Clear	Spin		1	English	White
AS-04573-0002	Clear	Bet Max		2	English	White
AS-04573-0003	Clear	Jouez	Spin	1	English/French	White
AS-04573-0004	Clear	Pari/Max	Bet Max	2	English/French	White
AS-04573-0007	Clear	Mise Max/Bet Max	Bet Max	4	East Canadian French/English	White
AS-04573-0008	Clear	Jouez/Spin	Spin	2	East Canadian French/English	White
AS-04573-0009	Clear	Girar	Spin	1	English/Spanish	White
AS-04573-0010	Clear	Apuesta Maxima	Betmax	2	English/Spanish	White

| - Revised, ‖ - New

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Door Assembly

Light Assembly AS-02360-(SERIES)
☑Slant / ☑S6E

|| *Upper Reel Light Assembly*
AS-02360-0001 ☑Slant

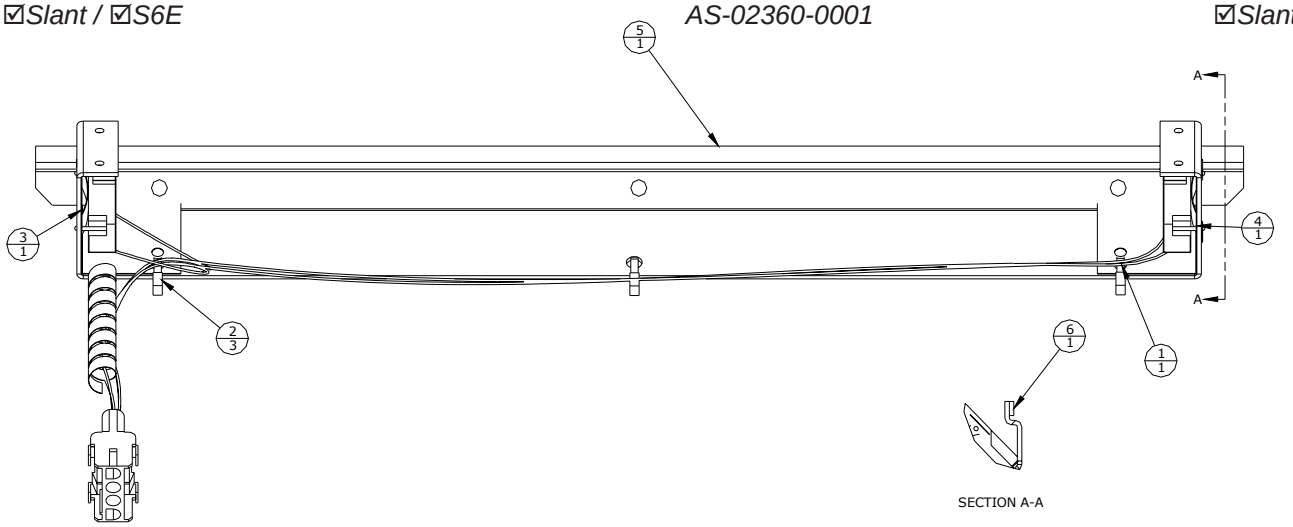

REF	PART #	DESCRIPTION	QTY
1	CBL-30250-0001	Cable, Upper Reel Light	1
2	E-00647-0004	Tie Wrap	3
3	P-00150-0290-1	Insulator, Part # P-00150-0290	1

REF	PART #	DESCRIPTION	QTY
4	P-00150-0290-2	Insulator, Part # P-00150-0290	1
5	P-06004-0045	Bracket, Slot Upper Lamp	1
6	R-00553-0037	Gasket, 1/16 x 3/16 x 16.375, 1-Sided	1

|| *Upper Reel Light Assembly*
AS-02360-0003 ☑Slant

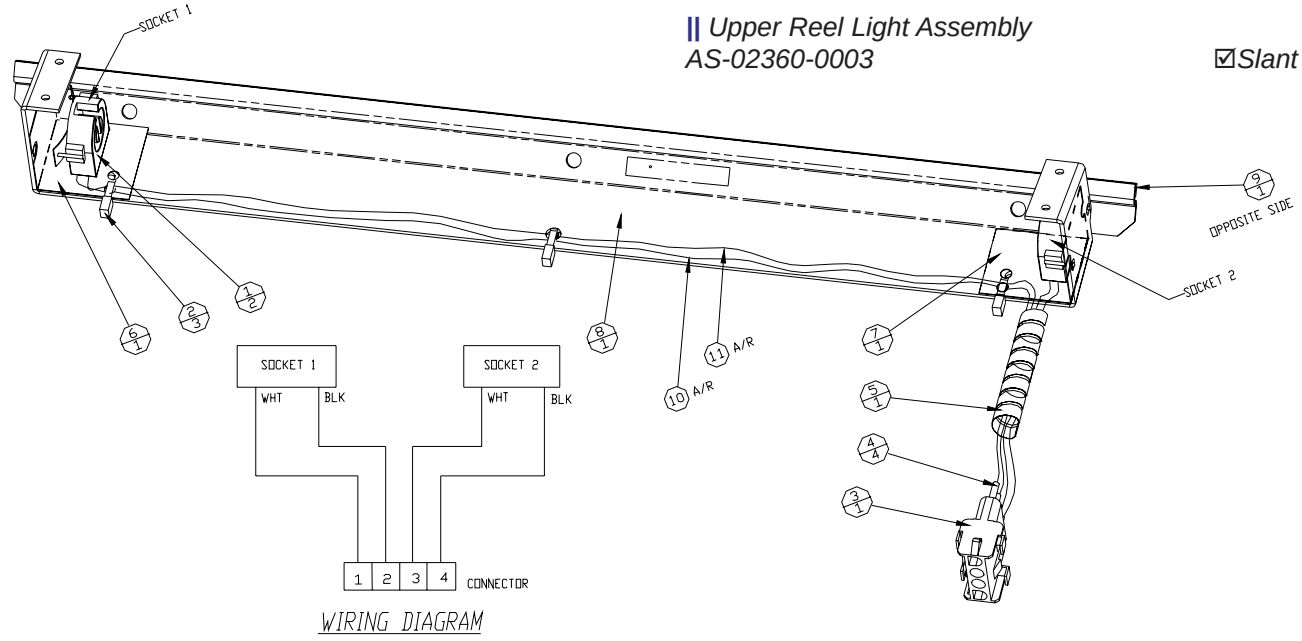

WIRING DIAGRAM

REF	PART #	DESCRIPTION	QTY
1	E-00120-0266-1	Socket, Fluorescent Lamp CE97	2
2	E-00647-0004	Tie Wrap	3
3	E-00804-0004	Connector Housing Cap	1
4	E-00807-0006	Contact Pin, Amp 24-18	4
5	M-01777-5602-2	Spiral Wrap	1
6	P-00150-0290-1	Insulator, Part # P-00150-0290	1

REF	PART #	DESCRIPTION	QTY
7	P-00150-0290-2	Insulator, Part # P-00150-0290	1
8	P-06004-0045	Bracket, Slot Upper Lamp	1
9	R-00553-0037	Gasket, 1/16 X 3/16 X 16.375 1-Sided	1
10	WIP-ES202-1850	PVC, Solid 18 AWG, White	--
11	WIP-ES202-1880	PVC, Solid, 18 AWG, Black	--

©2003 Bally Gaming and Systems

Door Assembly

Light Assembly (Cont.) AS-02360-(SERIES)
☑*Slant* / ☑*S6E*

Win Meter / Reel Light Assembly
AS-02360-0002 ☑*Slant*

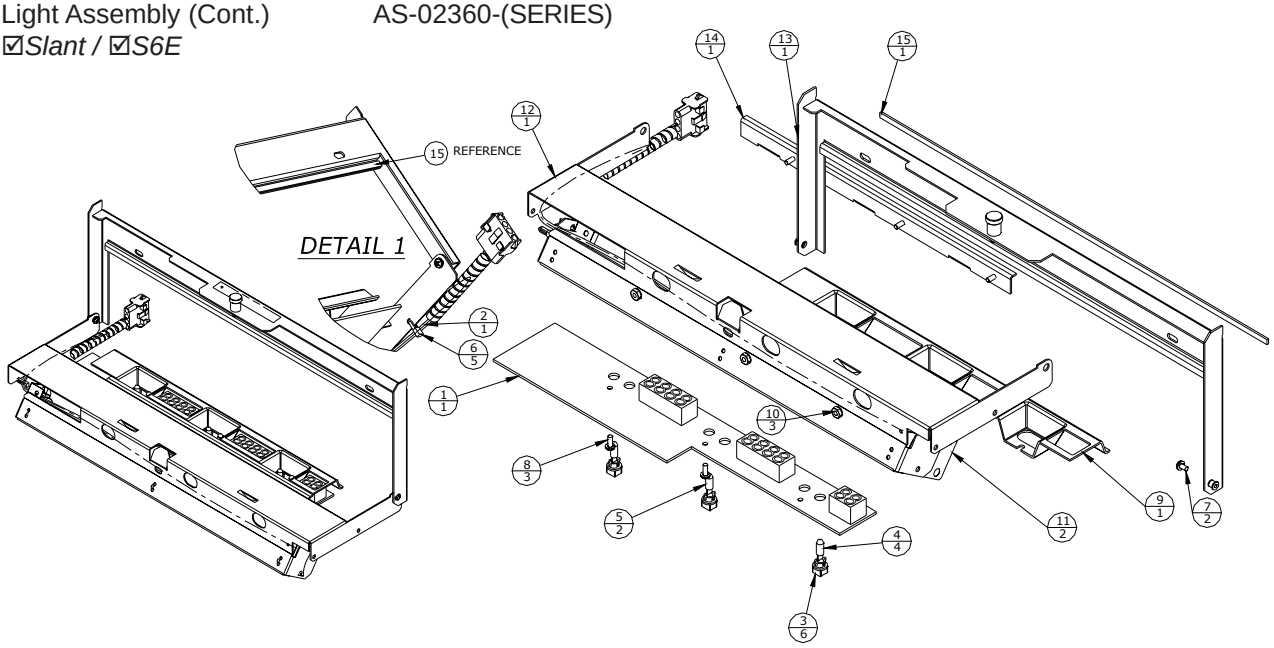

REF	PART #	DESCRIPTION	QTY
1	AS-03356-0525	Assembly, Display Board	1
2	CBL-30249-0001	Cable, Upper Reel Light	1
3	E-00120-0264	Socket, Lamp, Wedge Base, 1-1 3/4	6
4	E-00125-0084	Lamp, Incandescent, #86, 6.3V	4
5	E-00125-0099	Lamp, Incandescent, #74, 14V	2
6	E-00647-0004	Tie Wrap	5
7	LSPP-00632-1104	Screw, Mach With Lock Phil Pan Hd	2
8	LSPP-00632-1106	Screw, Mach With Lock Phil Pan Hd	3

REF	PART #	DESCRIPTION	QTY
9	M-06001-0003	Light Shield, Win Meter	1
10	NLS-00632-1112	Hex Nut	3
11	P-00150-0302	Insulator, Polycarbonate, CE97	2
12	P-06004-0046	Bracket, Win Meter/Light	1
13	P-06004-0065	Bracket, Reel Glass, Lower	1
14	P-09319-0426	Bracket, Win Meter Mounting	1
15	R-00553-0037	Gasket, 1/16 X 3/16 X 16.375, 1-Sided	1

|| *Win Meter / Reel Light Assembly*
AS-02360-0004 ☑*S6E*

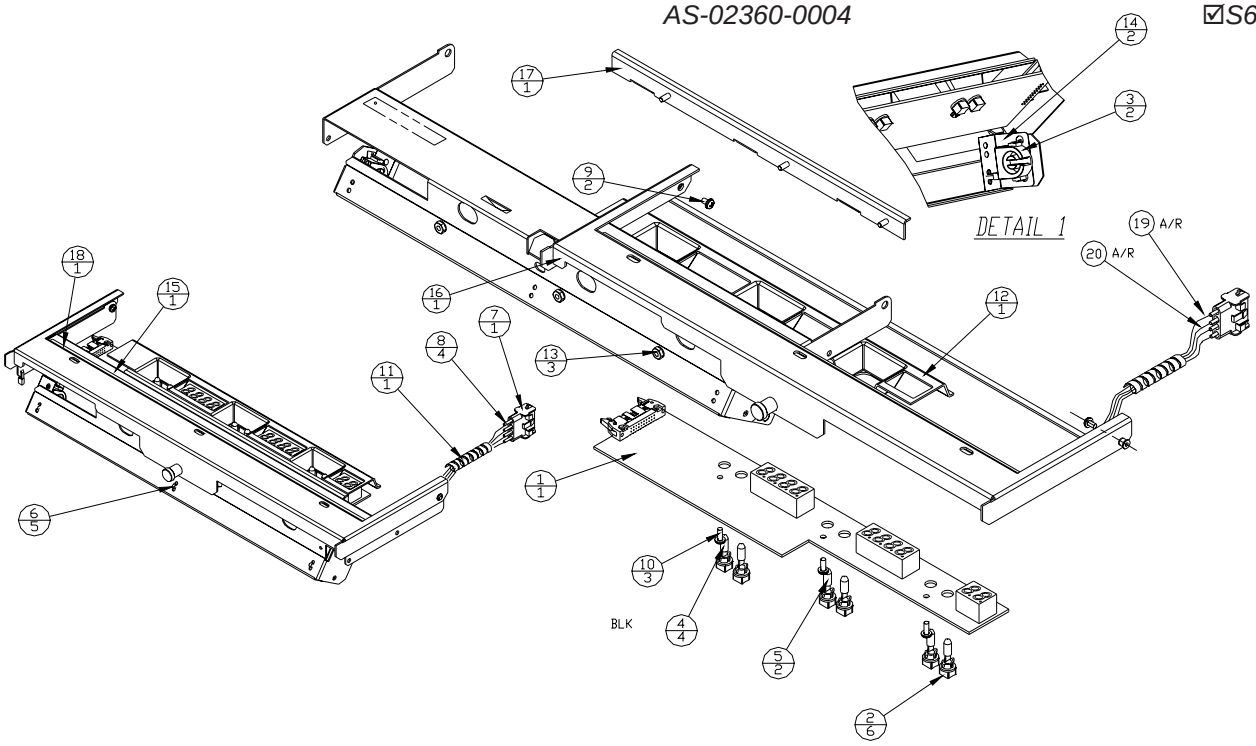

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

Door Assembly

Light Assembly (Cont.) AS-02360-(SERIES)
☑*Slant* / ☑*S6E*

REF	PART #	DESCRIPTION	QTY
1	AS-03356-0623	Display Board Assembly	1
2	E-00120-0264	Socket, Lamp, Wedge Base, 1-1 3/4	6
3	E-00120-0266-1	Socket, Fluorescent Lamp CE97	2
4	E-00125-0084	Lamp, Incandescent, #86, 6.3V	4
5	E-00125-0099	Lamp, Incandescent, #74, 14V	2
6	E-00647-0004	Tie Wrap	5
7	E-00804-0004	Connector Housing Cap	1
8	E-00807-0006	Contact Pin, Amp 24-18	2
9	LSPP-00632-1104	Screw, Mach With Lock Phil Pan Hd	2
10	LSPP-00632-1106	Screw, Mach With Lock Phil Pan Hd	3

|| *Win Meter / Reel Light Assembly*
AS-02360-0004 ☑*S6E*

REF	PART #	DESCRIPTION	QTY
11	M-01777-5602-2	Spiral Wrap	1
12	M-06001-0003	Light Shield, Win Meter	1
13	NLS-00632-1112	Hex Nut	3
14	P-00150-0302	Insulator, Polycarbonate CE97	2
15	P-06004-0046	Win Meter/Light Bracket	1
16	P-06004-0065	Reel Glass, Lower Bracket	1
17	P-09319-0426	Win Meter Mounting Bracket	1
18	R-00553-0037	Gasket, 1/16 X 3/16 X 16.375 1-Sided	1
19	WIP-ES202-1850	PVC, Solid, 18 AWG, White	--
20	WIP-ES202-1880	PVC, Solid, 18 AWG, Black	--

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

System Panels

|| A-044XX-(SERIES) / P-08600-FFXX

☑Slant / ☑S6E

PART #	DESCRIPTION	SL	S6E
A-04454-0002	AGI Reader/Display	X	
P-08600-FF14	AGI, Magnetic Reader/Display		X
P-08600-FF24	AGI, Reader/16x2 Display/Keypad		X
A-04412-0005	AGI, Reader/Keypad/16 X 2 Display	X	
A-04412-0007	AGI, Reader/Keypad/16 X 2 Display (Not Shown)	X	
A-04412-0003	AGI/IGS, 3-Inch Keypad	X	
P-08600-FF19	AGI/IGS, Magnetic Reader/Display/Button/Keypad		X
A-04412-0004	AGI/IGS, New Keypad	X	
A-04412-0002	AGI/IGS, Reader/Display/Button Panel	X	
A-04456-0002	Blank	X	
P-08600-FF07	Blank		X
A-04472-0002	Blank, 3-Inch	X	
A-04451-0002	CDS Optical/Magnetic OSII	X	
P-08600-FF04	CDS, OSII, Magnetic Reader		X
P-08600-FF03	CDS, SENII, Magnetic Reader		X

PART #	DESCRIPTION	SL	S6E
A-04415-0002	EDT PT-M400	X	
P-08600-FF02	EDT PT -M400		X
A-04468-0002	GSI Reader/16-Digit LED	X	
A-04486-0002	MGM 2.5-Inch	X	
P-08600-FF10	Mikohn Reader/Display/Keypad		X
A-04483-0002	Mikohn, Reader/Display/Keypad	X	
P-08600-FF12	Sands Reader/Display/Keypad		X
P-08600-FF16	SDS Component		X
P-08600-FF01	SDS DMK Keypad		X
P-08600-FF06	SDS EPI Reader/Display/Keypad		X
A-04420-0002	SDS, Keypad	X	
A-04487-0002	SDS/EPI, Reader/Display/3-Button/2 X 6 Keypad	X	
A-04490-0002	SMS Systems Panel	X	
A-04490-00P4	SMS Systems Panel	X	

A-04412-0002

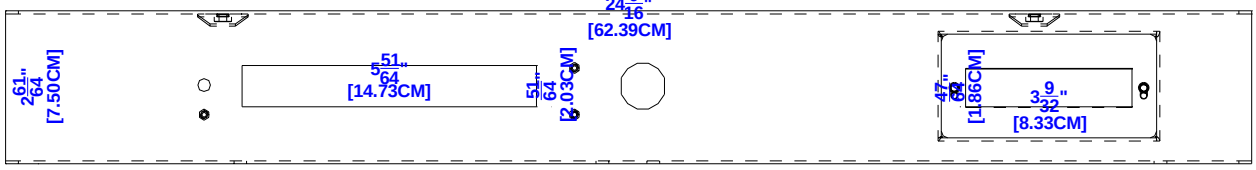

A-04412-0003

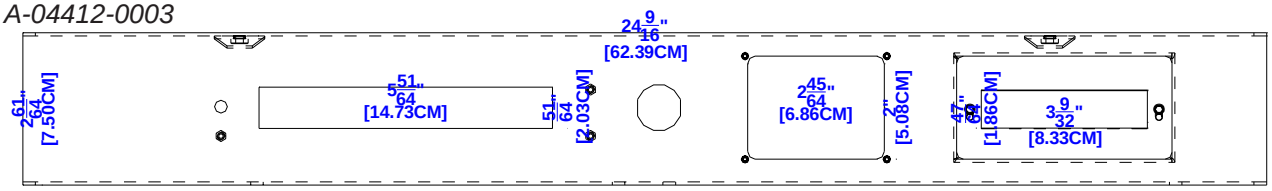

A-04412-0004

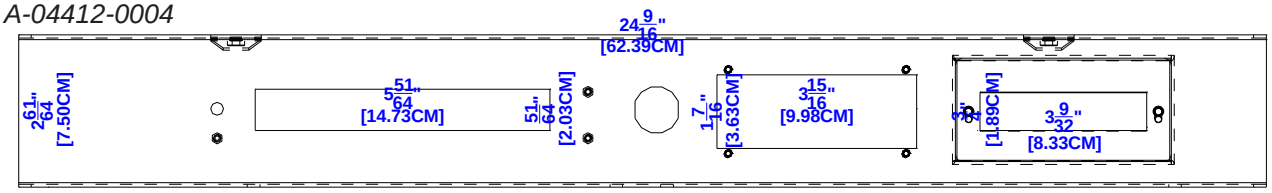

A-04412-0005

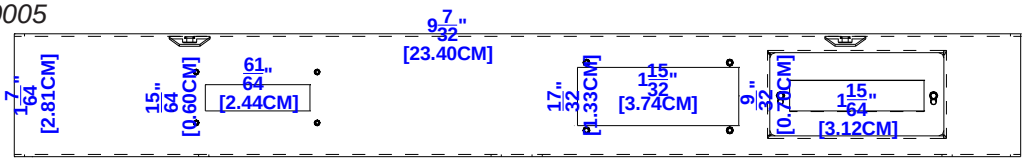

A-04415-0002

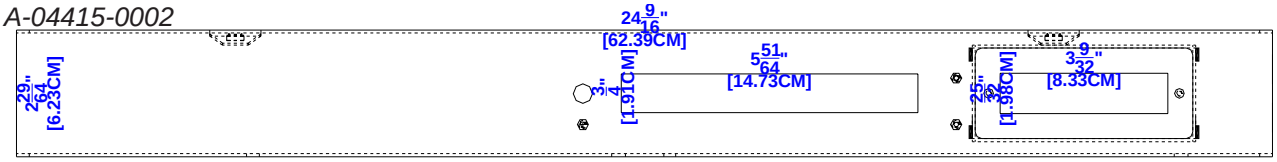

A-04420-0002

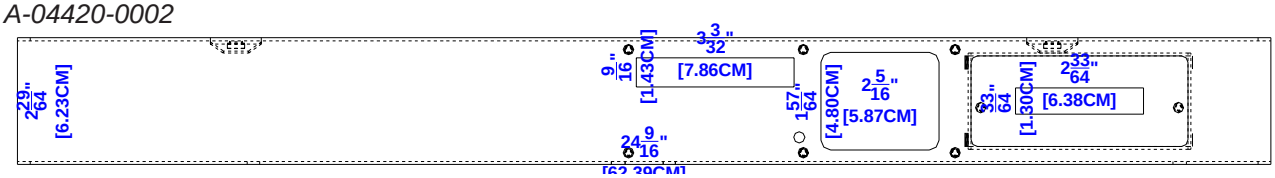

***Illustrations not to scale.**

ProSlant® 6000 / 6000E

System Panels (Cont.)

|| A-044XX-(SERIES) / P-08600-FFXX

☑Slant / ☑S6E

A-04451-0002

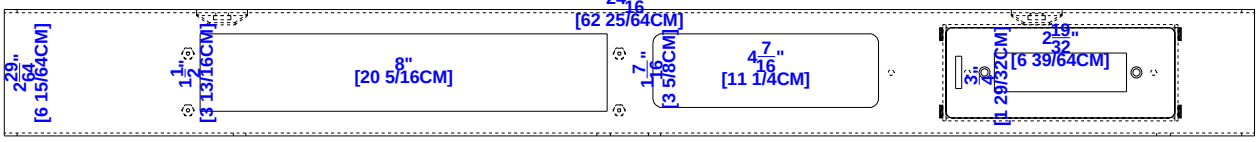

A-04454-0002

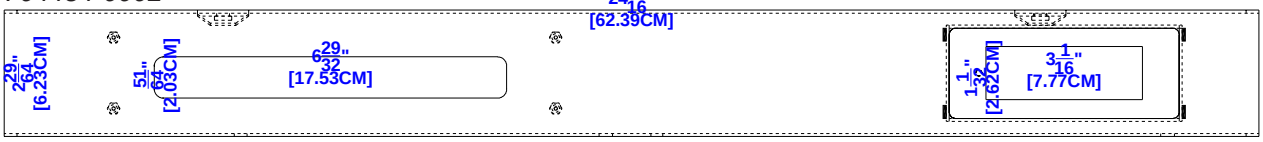

A-04456-0002

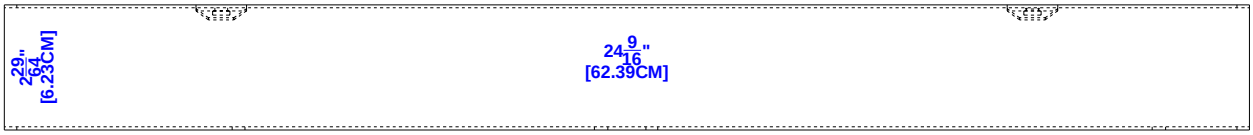

A-04468-0002

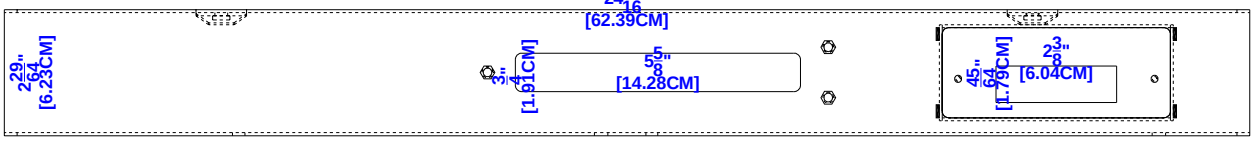

A-04472-0002

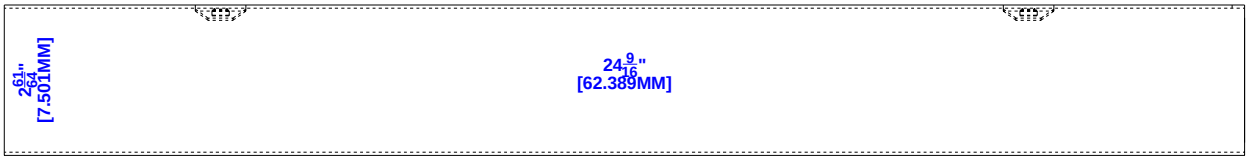

A-04483-0002

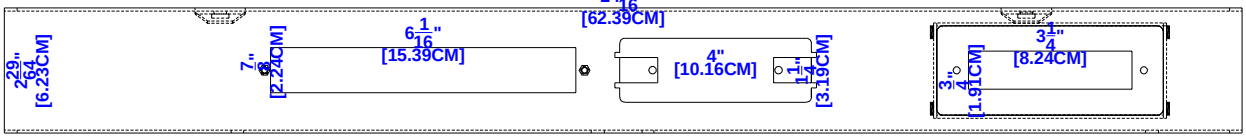

A-04486-0002

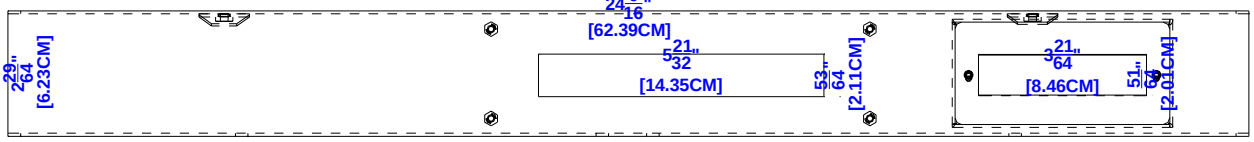

A-04487-0002

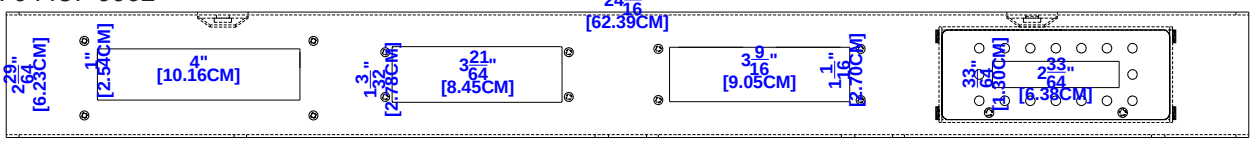

A-04490-0002

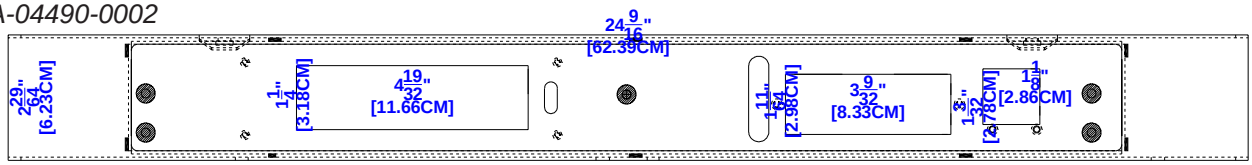

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

System Panels (Cont.)

|| A-044XX-(SERIES) / P-08600-FFXX

☑Slant / ☑S6E

A-04490-00P4

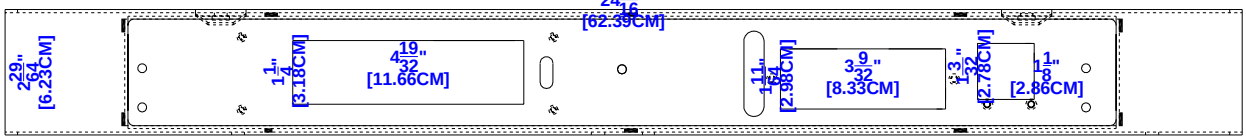

P-08600-FF01

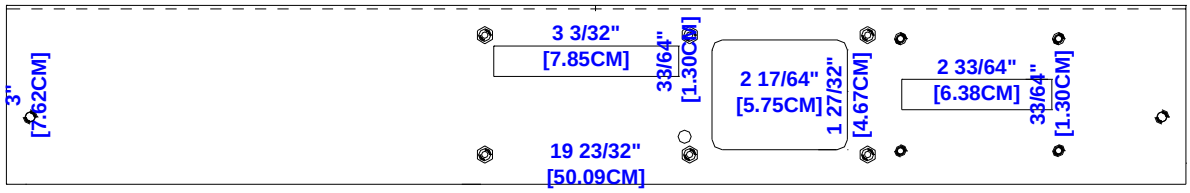

P-08600-FF02

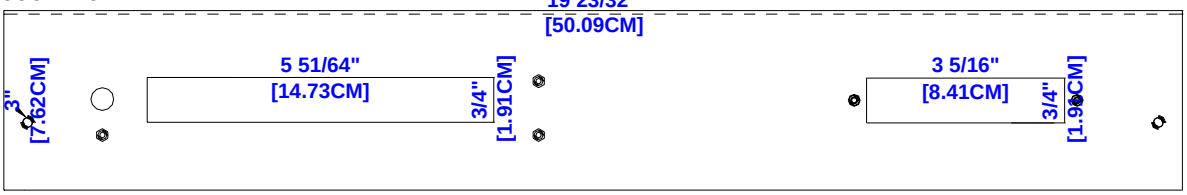

P-08600-FF03

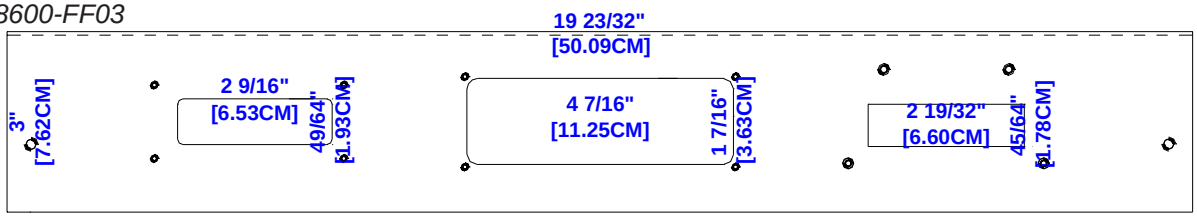

P-08600-FF04

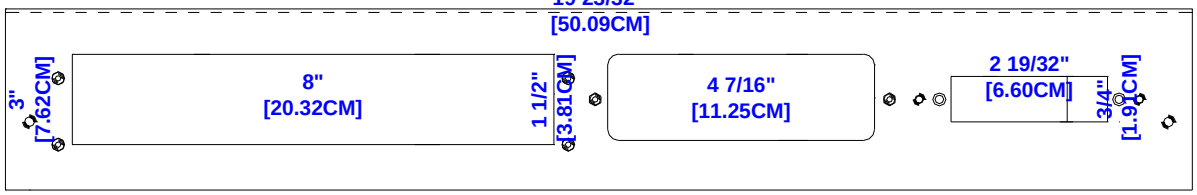

P-08600-FF06

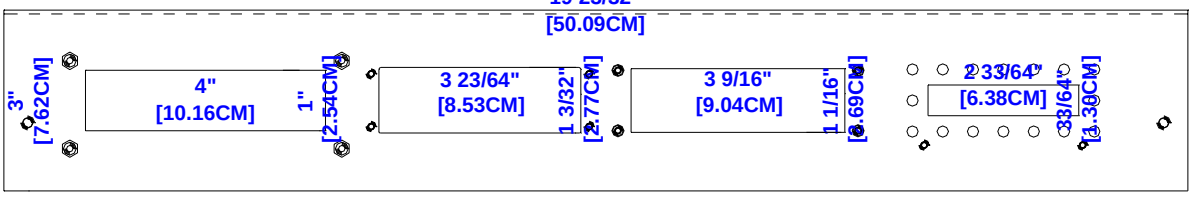

P-08600-FF07

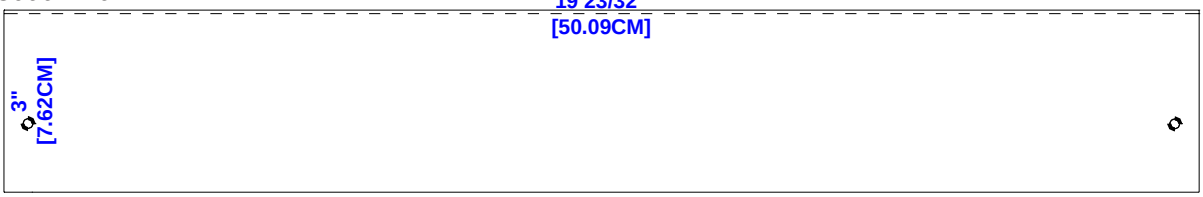

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

ProSlant® 6000 / 6000E

System Panels (Cont.)

|| A-044XX-(SERIES) / P-08600-FFXX

☑Slant / ☑S6E

P-08600-FF10

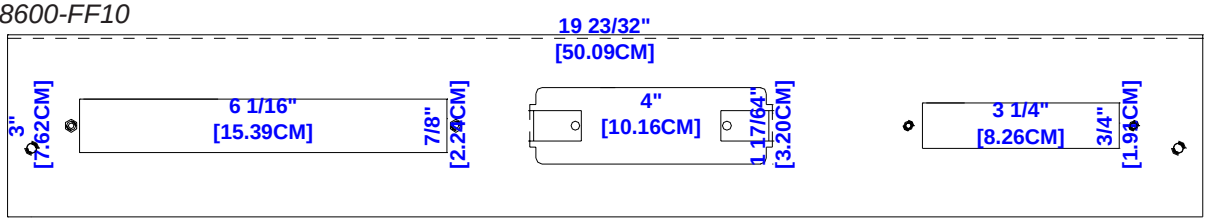

P-08600-FF12

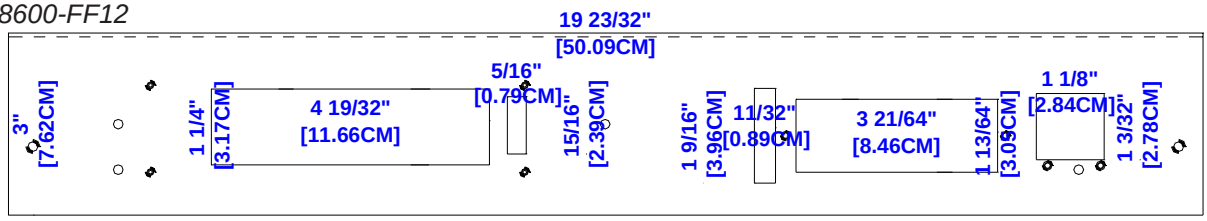

P-08600-FF14

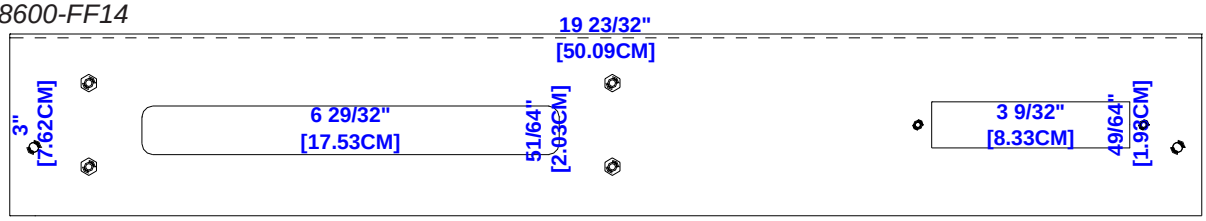

P-08600-FF16

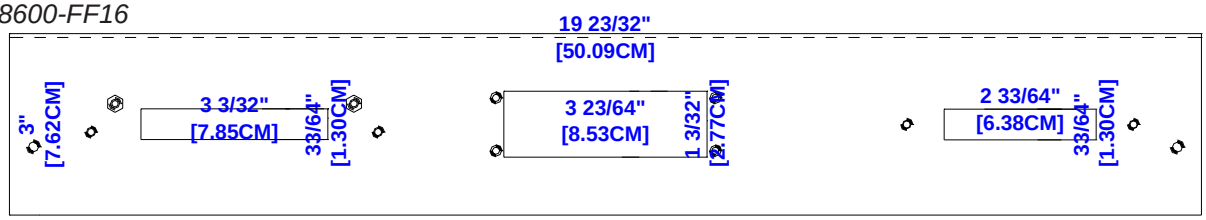

P-08600-FF19

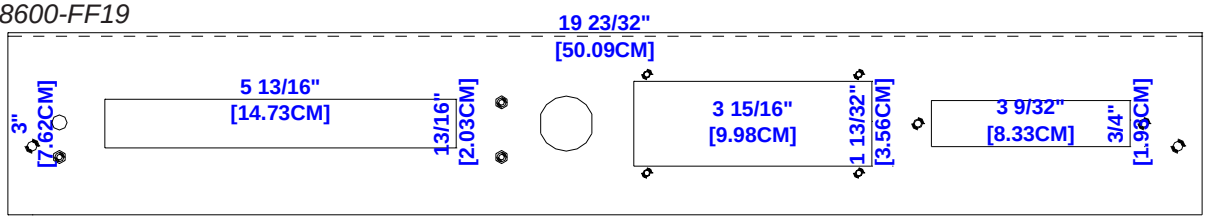

P-08600-FF24

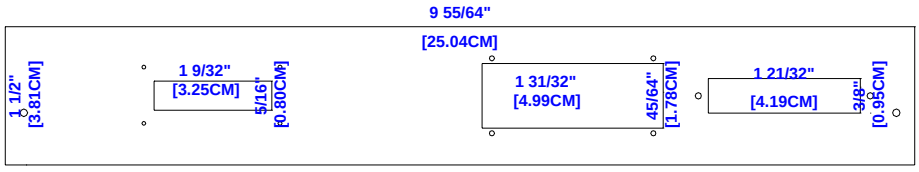

***Illustrations not to scale.**

©2003 Bally Gaming and Systems

Part Number Structure

Parts used in Bally Gaming, Inc., equipment are identified with PART #s stamped into, or physically attached. The PART #s are usually 15 characters including the dashes in the pattern:

1 2 3 4 – 1 2 3 4 5 – 1 2 3 4

The following PART # prefixes serve to classify the parts:

PREFIX	DESCRIPTION
A	PARTS ASSEMBLED BY STAKING, RIVETING, OR WELDING
AS	PARTS ASSEMBLED WITHOUT MACHINING OPERATIONS
C	CASTINGS, FORGING, EXTRUSIONS, MOLDED PARTS, COILS
CA	CABINET AND WOOD PARTS
CBL	CABLES
E	ELECTRICAL COMPONENT
G	RAW AND SCREENED GLASS PARTS
K	KITS
M	MISCELLANEOUS
N	NUT
P	FABRICATED PARTS
R	RUBBER PARTS
S	SCREW MACHINE PARTS
SP	SPRINGS
WIP	WIRE

Fasteners follow the following convention:

PP D H - SSS TT - M F LL

PP

PP	FASTENER DESCRIPTION	PP	FASTENER DESCRIPTION
AB	SHEET METAL TYPE AB	PC	SET SCREW CONE POINT
CB	CARRIAGE BOLT	PT	CAMCAR "FASTITE" THREAD
CP	SET SCEW CUP POINT		
CS	CAP SCREW	RL	ROLOX SCREW
DS	DRILL SCREW	SA	SHEET METAL TYPE A
FP	SET SCREW FLAT POINT	SB	SHEET METAL TYPE B
HL	HILO THREAD FOR PLASTIC	SF	SWAGE FORM
KP	SET SCREW KNURLED	SL	SHEET METAL TYPE L
LS	MACHINE SCREW WITH LOCK WASHER	SM	SEEMBLEX THREAD FORM
		SW	MACHINE SCREW TYPE 23
LT	MACHINE SCREW WITH INTERNAL LOCK WASHER	SX	SQUARE FLO
		SY	MACHINE SCREW TYPE 25
MF	MACHINE SCREW TYPE F	SZ	SHEET METAL TYPE Z
MS	MACHINE SCREW	TC	THREAD FORM TYPE C
NL	MACHINE SCREW WITH EXTERNAL LOCK WASHER	TF	THREAD FORM RL, TT, SF, C
		TT	"CAMCAR TAPTITE" THREAD
NM	MACHINE SCREW WITH THREADED PATCH		
		WO	SET SCREW W POINT
NS	"NYLOK" MACHINE SCREW	WS	WOOD SCREW

D

D	DRIVE	D	DRIVE	D	DRIVE
O	NONE	B	BUTTON	S	SLOTTED
A	ALLEN	P	PHILLIPS	H	HOLT

H

H	HEAD		
A	WASHER HEAD ROUND	N	HEX HEAD, PIN-IN SOCKET
B	BINDING HEAD		
C	WASHER HEAD HEX	O	NONE
D	HEX HEAD INDENTED	P	PAN HEAD
E	KNURLED HEAD CAP	R	ROUND HEAD
F	FLAT HEAD	S	WASHER SERRATED HEX
G	FLAT HEAD (METRIC)		
H	HEX HEAD	T	TRUSS HEAD
J	WASHER REVERSED SERRATED HEX	U	BINDING HEAD UNDERCUT
K	FLAT HEAD, 100^0	X	UNDERCUT FLAT HEAD
L	FILLSTER HEAD	Z	OVAL HEAD

SSS

SSS	SIZE	SSS	SIZE	SSS	SIZE
002	2	010	10	500	1/2
003	3	012	12	M02	2MM
004	4	250	1/4	M03	3MM
005	5	312	5/16	M04	4MM
006	6	375	3/8	M25	2.5MM
0008	8	437	7/16		

TT

TT	THREADS PER UNIT	TT	THREADS PER UNIT	TT	THREADS PER UNIT
00	0-WS	24	24 TPI	48	48 TPI
13	13 TPI	28	28 TPI	50	.5 TPMM
14	14 TPI	32	32 TPI	56	56 TPI
16	16 TPI	36	36 TPI	70	.7 TPMM
18	18 TPI	40	40 TPI		
20	20 TPI	45	.45MM		

M

M	MATERIAL	M	MATERIAL	M	MATERIAL
1	STEEL	3	STAINLESS	5	PLASTIC
2	BRASS	4	ALUMINUM	6	NYLON

F

F	FINISH	F	FINISH
0	NONE	5	ZINC, WAXED
1	ZINC	6	NICKEL, WAXED
2	ZINC, GOLD	7	BLUED
3	NICKEL	8	BLACK OXIDE
4	CHROMIUM	9	BLACK OXIDE, WAXED

LL

LL	LENGTH	LL	LENGTH	LL	LENGTH
02	1/8"	10	5/8"	20	1 1/4"
03	3/16"	11	11/16"	22	1 3/8"
04	1/4"	12	3/4"	24	1 1/2"
05	5/16"	13	13/16"	28	1 3/4"
06	3/8"	14	7/8"	32	2"
07	7/16"	15	15/16"	48	3 1/4"
08	1/2"	16	1"	60	3 3/4"
09	9/16"	18	1 1/8"		

| - Revised, || - New

©2003 Bally Gaming and Systems

ProSlot® 6000 and ProSlant® 6000 / 6000E Model Number

Bally Gaming Machines have an Identification Plate attached to the outside of the cabinet. Upright machines will have the plate in the lower left corner of the player's right-hand side. Slant top and bar top machines have it mounted under the arm rest in the upper right portion of the machine's Identification Platefront.

The Model Number consists of nine digits with the following convention:

Digit	Selection	Reference	Description
1	S	Product	Slot Product
2	6	Reel Software Series	Non-Uniform Symbol Distribution
3 & 4	2M 3M 3L 5L 2B 3B 4U	Game Theme	2 Coin Multiplier 3 Coin Multiplier 3 Pay Lines 5 Pay Lines 2 Coin Buy 3 Coin Buy Multiplier with Buy
5	3 4 5	Number of Reels	3 Reels 4 Reels 5 Reels
6 & 7	W6 C6 R6 BS B6 D6 M6 C6 R6 B0 D0 C0 R0 00	Cabinet Style	WT Style Upright Cabinet CT Style Upright Cabinet WR Style Upright Cabinet Anchor Big Slot® Slant Top with Standard Top Box Slant Top with Round Top Box MAPS® Top Box S6 Roll the Dice® S6 Bell Ringer® S55 S.T. with Standard Top Box S55 S.T. with Round Top Box Roll the Dice® Bell Ringer® No Top Box
8	F C P B E N 0 1 2	Peripherals (Bill Acceptor, Cash Cage™, Progressive)	Bill Acceptor Cash Cage™ Bill Acceptor & Progressive Bill Acceptor & Cash Cage™ Bill Acceptor, Cash Cage™, Prog. No B.A., No C. Cage™, No Prog. No Bill Acceptor, No Progressive S55 Bill Acceptor S55 Bill Acceptor & Progressive
9	0 1 2 3 4 5 6 7 8	Door, Deck, Top Box Finish	Chrome Polished Brass Chrome & Brass Black Nickel Polished Gold Powder Coating Polished Stainless Brushed Stainless Brushed Brass

©2003 Bally Gaming and Systems

Appendix A

Lock and Cams

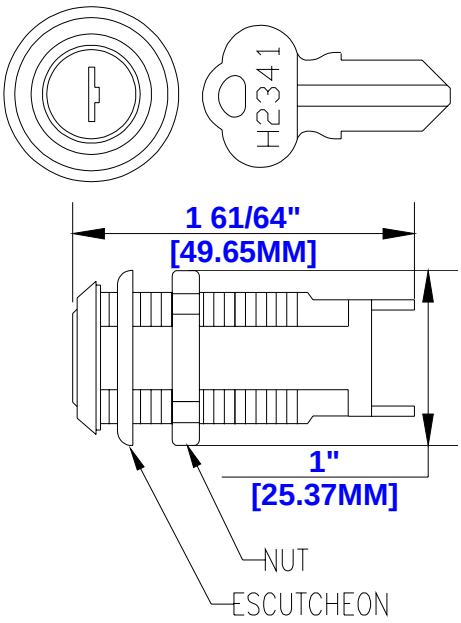

M-00281-0171

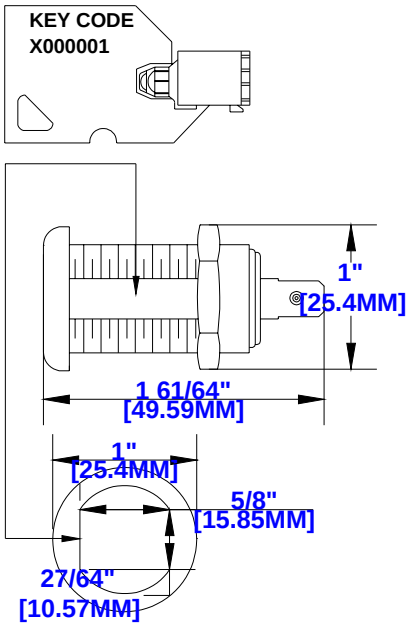

M-00281-158C

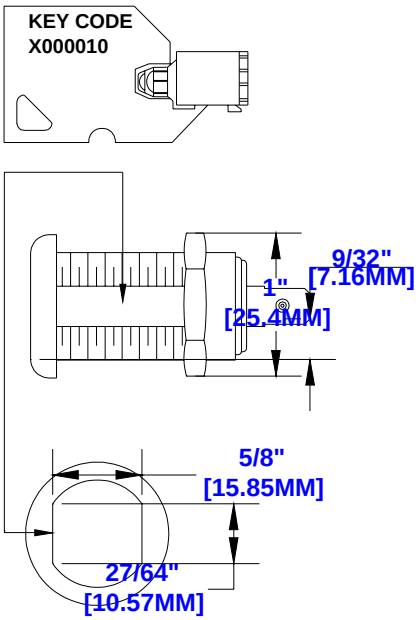

M-00281-0172

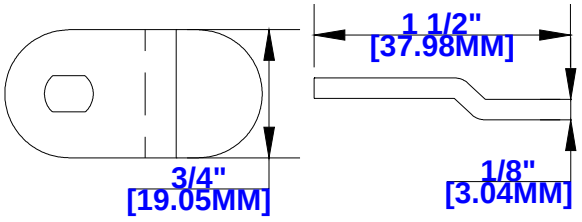

P-00758-0093

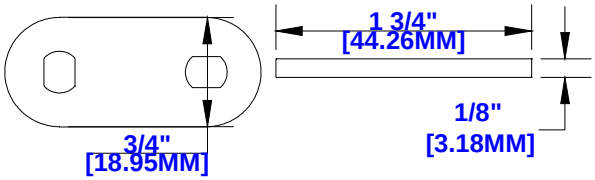

|| *P-00758-0094*

| - Revised, || - New

Appendix A

Lock and Cams (Cont.)

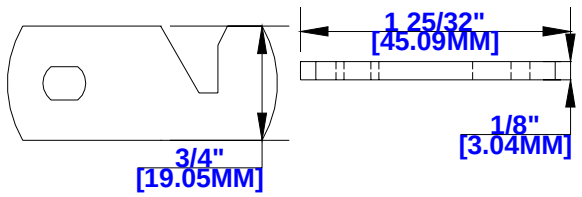

P-00758-0101

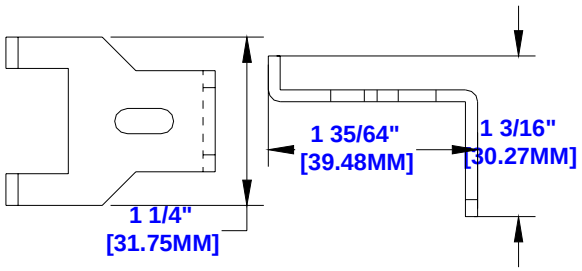

P-00758-0144

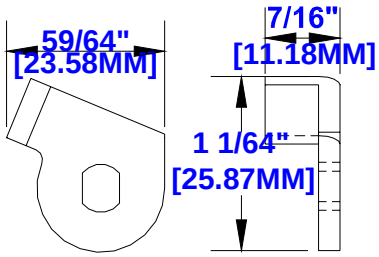

P-00758-0117

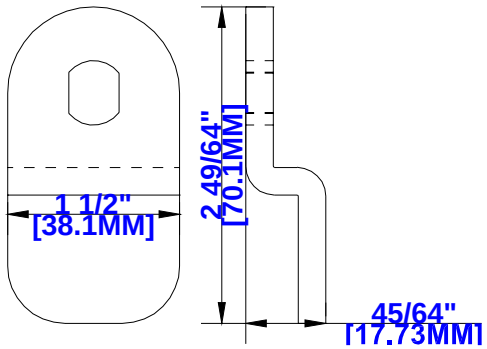

P-00758-0151



P-00758-0137

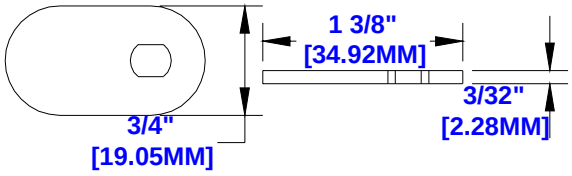

P-00758-0152

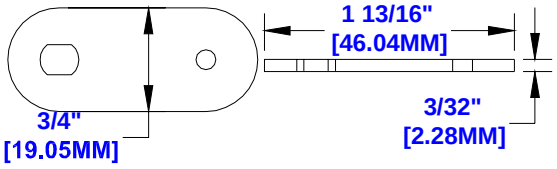

P-00758-0143

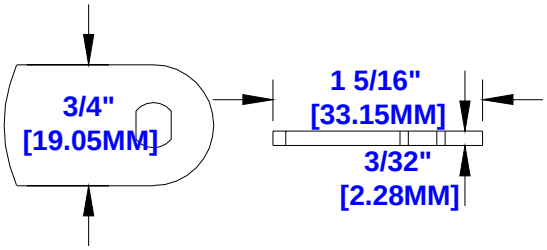

|| P-00758-0155

©2003 Bally Gaming and Systems

Appendix A

Lock and Cams (Cont.)

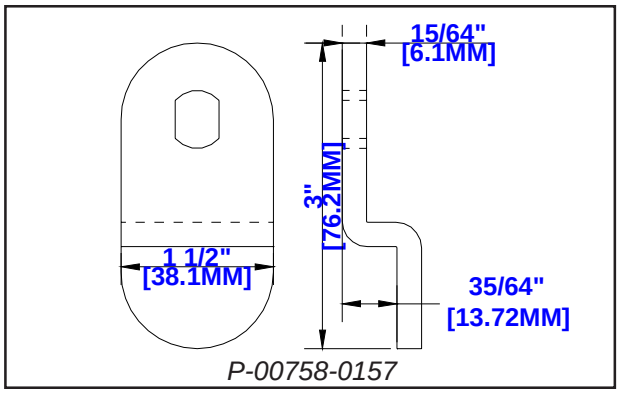

P-00758-0157

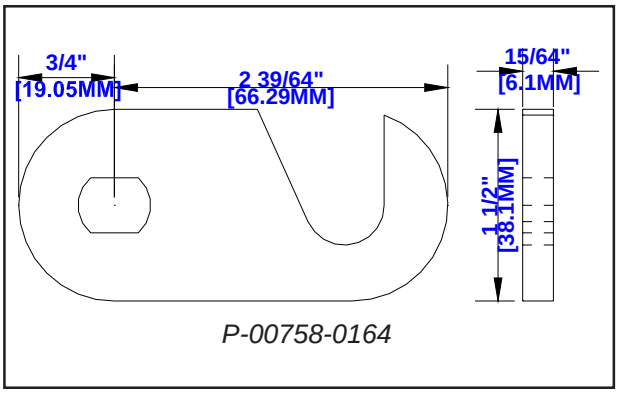

P-00758-0164

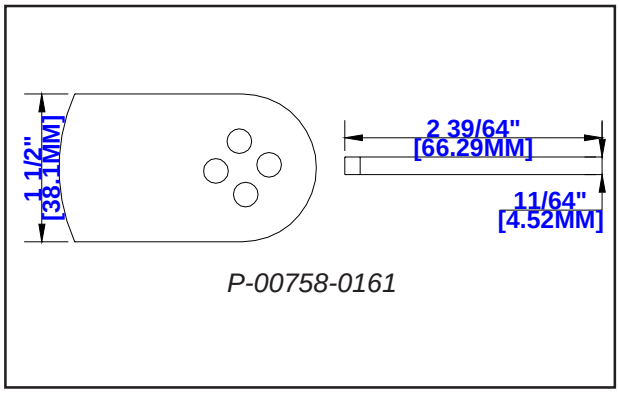

P-00758-0161

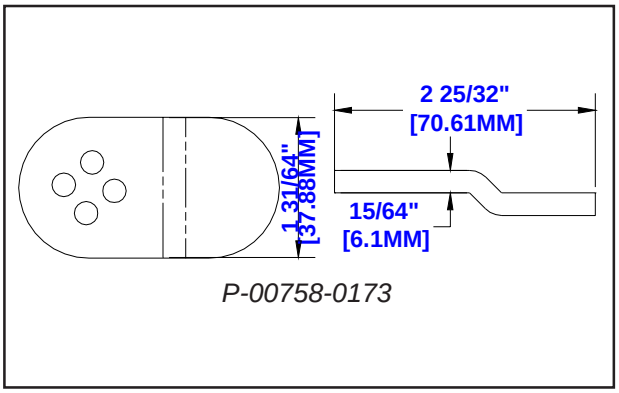

P-00758-0173

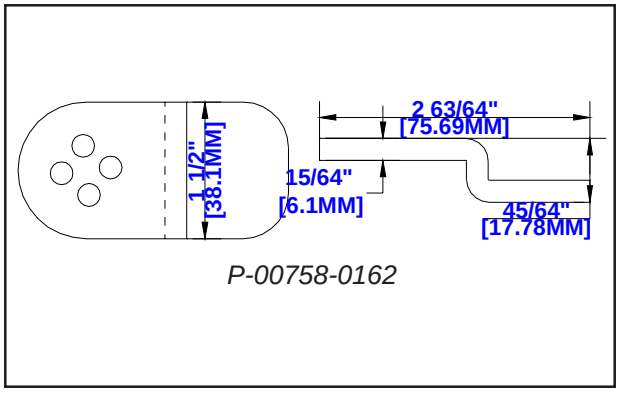

P-00758-0162

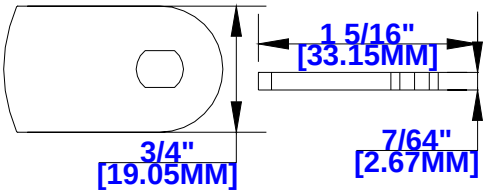

P-00758-0180

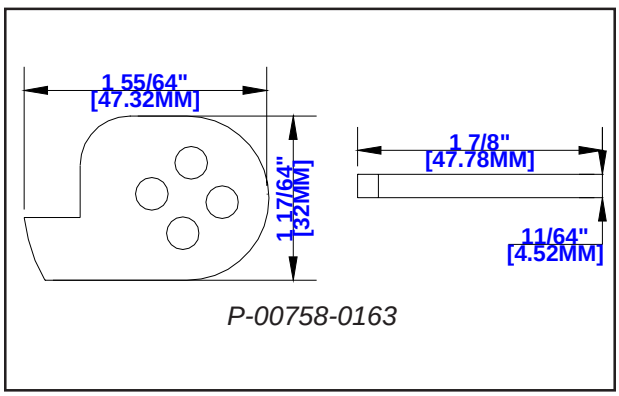

P-00758-0163

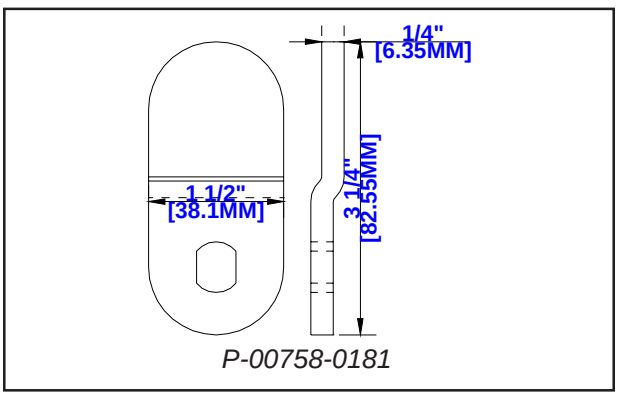

P-00758-0181

Appendix A

Lock and Cams (Cont.)

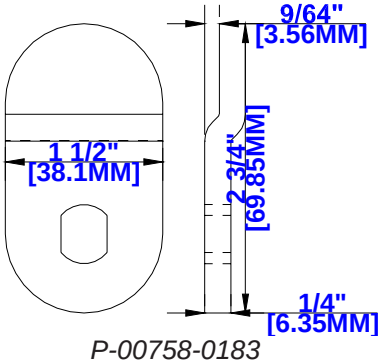

P-00758-0183

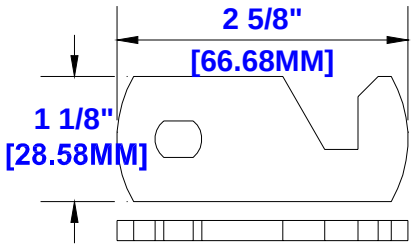

|| *P-00758-0201*

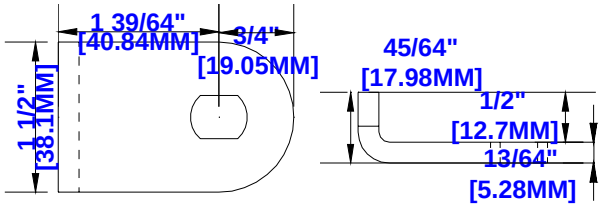

P-00758-0189

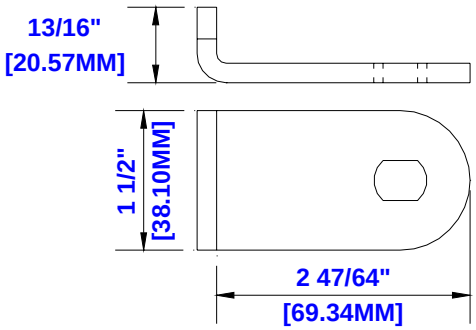

|| *P-00758-0202*

| - Revised, || - New
©2003 Bally Gaming and Systems

Periodic Maintenance

MODULE 4

MK4-SVMOD-0002

PERIODIC MAINTENANCE

©2002 BALLY GAMING AND SYSTEMS ALL RIGHTS RESERVED

Bally Gaming and Systems
6601 South Bermuda Road Las Vegas, NV 89119

For Customer Service and information:
+1-702-896-7772 Outside the U.S.
1-877-GO-BALLY (877) 462-2559 in the U.S. and Canada
896-7772 in Las Vegas
FAX: +1-702-896-7710
or visit our website at http://www.ballygaming.com

©2002 Bally Gaming and Systems

Module 4

Periodic Maintenance Table of Contents

Overview **4-5**
Cabinet **4-6**
Door Switch Optic 4-6
Cabinet Interior 4-6
Lamps 4-6
Cabinet Exterior 4-6
Machine Door **4-6**
Player Panel Buttons 4-6
All Glass 4-6
Door Switch Optic 4-6
Coin Entry **4-6**
COD Board Optics 4-6
Coin Diverter 4-6
Inspection 4-6
Coin Hopper **4-6**
Coin Switch 4-6
Hopper Test 4-6
Bill Acceptor **4-6**
Bill Path 4-6
Timing Belts 4-6
Sensors 4-7
Handle Mechanism **4-7**
Release Solenoid and Ratchet 4-7
Reel Drive **4-7**
Reel Optics 4-7
Reel Strip 4-7
Monitor **4-7**
Viewable Area 4-7
Position, Color and Size 4-7
Touch Screen Calibration 4-7
CD ROM Drive **4-7**
Lens 4-7
CD ROM 4-8
Printer **4-8**
Ribbon (Impact) 4-8
Print Head 4-8

 ©2002 Bally Gaming and Systems

Periodic Maintenance

Overview

This module describes periodic maintenance for all ProSlot®, GameMaker®, EVO® Video and EVO® Hybrid products

The following is the recommended Periodic Maintenance Schedule:

Periodic Maintenance Schedule				
Assembly	**Maintenance Item**	**Service Interval (Days)**		
		30	**90**	**180**
Cabinet	Door Switch Optic (detector)	X		
	Cabinet Interior		X	
	Lamps	X		
	Cabinet Exterior		X	
Machine Door	Player Panel Buttons	X		
	All Glass	X		
	Door Switch Optic (emitter)	X		
Coin Entry	COD Board Optics	X		
	Coin Diverter Inspection		X	
Coin Hopper	Coin Switch	X		
	Hopper Test		X	
Bill Acceptor	Bill Path	X		
	Timing Belts			X
	Sensors			X
Handle Mechanism	Release Solenoid and Ratchet		X	
Reel Drive	Reel Optics		X	
	Reel Strip	X		
Monitor	Viewable area	X		
	Position, Size, and Intensity		X	
	Touch Screen Calibration		X	
CD ROM Drive	Lens	X		
	CD ROM	X		
Printer	Ribbon (Impact)	X		
	Print Head	X		

Cabinet

Door Switch Optic (detector)	The ProSlot®, GameMaker®, EVO® Video and EVO® Hybrid use optical door switches. Maintain optimum performance by cleaning with a lint-free cloth.
Cabinet Interior	Vacuum the inside of the cabinet. Remove all dust and debris from the coin chutes. Remove loose coins to keep them from shorting electrical connections.
Lamps	Replace any burned out lamps. Flickering fluorescents may be caused by faulty starters. All fluorescents illuminate when machine power is switched ON. Locate burned out button and feature lamps by playing the machine or by activating the Output Test as described in Module 2, Setup and Operation.
Cabinet Exterior	The laminate or powder coat exterior of the cabinet requires little maintenance except for occasional dusting. Avoid abrasive cleansers.

Machine Door

Player Panel Buttons	Use a dry, lint-free cloth to clean the buttons. If a cleaning solution is necessary, use a mild glass cleaner. Avoid abrasive cleansers.
All Glass	Use a dry, lint-free cloth to remove the dust from the glass. Use a mild glass cleaner if necessary. Avoid abrasive cleansers or anything that will damage the protective laminate on the inside of the Display Glass and Feature Glass.
Door Switch Optic (emitter)	The ProSlot®, GameMaker®, EVO® Video and EVO® Hybrid use optical door switches. Maintain optimum performance by cleaning with a lint-free cloth.

Coin Entry

COD Board Optics	The Coin Optic Decoder Board uses an infrared emitter and detector to monitor coins. The emitter and detector are on the same side of the COD board. The emitter shines through the assembly and is reflected by a prism back to the detector. Use a lint-free cloth to clean the prism. Check the prism bracket to ensure that the prism is secure.
Coin Diverter Inspection	With power OFF the Coin Diverter Assembly should pivot freely. Activate the Output Test as described in Module 2, Setup and Operation, to verify operation.

Coin Hopper

Coin Switch	Upright and Bartop machines use optical switches to count coins from the hopper. Use a dry, lint-free cloth to clean the lenses. Check the adjustment of the micro switch on slant machines.
Hopper Test	Activate the Hopper Test as described in Module 2, Setup and Operation. The hopper will dispense 10 coins.

Bill Acceptor

Bill Path	Open the acceptor and transport components. Use a dry lint-free cloth to remove any debris.
Timing Belts	Frayed or worn belts should be replaced.

 ©2002 Bally Gaming and Systems

Bill Acceptor (cont.)

Sensor

Dirty, clouded, or scratched lenses may degrade the performance of the acceptor and should be replaced. Clean the sensors with a dry lint-free cloth. If a solvent is needed, use a weak solution of water and mild dish detergent. Allow the lenses to dry completely before closing the acceptor and transport assembly.

Activate the Bill Acceptor Test as described in Module 2, Setup and Operation, to verify operation.

Handle Mechanism

Release Solenoid and Ratchet

The handle mechanism consists of a ratchet assembly, an optic sensor, a release solenoid, and an arm assembly. The handle mechanism should be inspected for proper function and to ensure handle arm is secure.

Press the PSEUDO COIN button to energize the handle release solenoid and allow the handle to move. Pull the handle and check for smooth ratchet operation. The reels should spin when the handle is in the full forward position. Release the handle and ensure it returns and locks into its original upright position.

Note: The handle mechanism is factory lubricated and does not require additional lubrication or adjustment.

Reel Drive

Reel Optics

Optical sensors monitor the reel positions. Clean the reel optics with a dry lint-free cloth or swab. Dirty reel optics can cause 40 series and 70 series tilts. Refer to Troubleshooting in Module 2, Setup and Operation, for more information.

Reel Strip

Clean each Reel Strip with a soft cloth moistened with warm water.

Monitor

Viewable Area

A Micro Touch® touch screen is bonded to the CRT, which can be damaged with abrasive or ammonia-based cleaners. Clean the monitor with an antistatic nonabrasive cloth and a cleaner recommended for lap top computer screens.

Position, Color and Size

Allow at least 20 minutes with power ON for the monitor to stabilize. Check the picture for discoloration or fade-out. Degauss if necessary.

Check for correct horizontal and vertical alignment by ensuring that all text and images are within the borders of the monitor bezel. Use the CRT COLOR and SCREEN SIZE diagnostics as described in Module 2, Setup and Operation.

Touch Screen Calibration

Settings for the touch screen will change over time, or if any adjustment has been made to the monitor. Calibrate the touch screen according to the directions described in Module 2, Setup and Operation.

CD ROM Drive

Lens

The CD ROM Drive reads data with a laser. Dust, smoke and airborne particles can cloud the lens that the laser is focused through, causing “freezing” and other machine malfunctions.

CD ROM Drive

Lens(cont.)

A commercial lens cleaner can help maintain optimum performance from the 5 ½" optical disc drive. The cleaner is a disc with a small lab-grade brush installed on the underside that gently cleans the delicate lens. This special brush is made with ultra-fine synthetic fibers that are infused with a microscopic strand of copper giving the cleaner antistatic properties.

CD ROM

Contamination on the CD ROM can cause read errors similar to those of a dirty drive. A slow flashing BUSY LED may indicate a dirty CD. Clean the CD ROM with a soft damp cloth. Avoid using a circular motion while cleaning. The disc should be wiped in a radial (inner side outward) direction.

Printer

Ribbon (Impact)

Frayed and worn ribbons can damage the print head by snagging and bending the pins. Replace worn ribbons according to procedure described in Module 8, Peripherals.

Print Head

Once the unit is opened, the ticket path is accessible for cleaning or clearing tickets. Use a soft brush to clean the paper dust from inside the printer and chassis area. The paper dust should also be removed from the sensor optics. If streaking on the printed ticket is evident, the thermal print head may need to be cleaned.

Cleaning cards are available for thermal printers through TransAct or can also be purchased direct from Enefco International Ltd. at (888) 578-0141.

©2002 Bally Gaming and Systems

GLOSSARY

MODULE 5

MK5-SVMOD-0002

Glossary

Bally Gaming and Systems

©2002 BALLY GAMING AND SYSTEMS ALL RIGHTS RESERVED

6601 South Bermuda Road, Las Vegas NV 89119

For Customer Service and information, call or FAX:
1-877-GO-BALLY (877-462-2559) in the U.S. and Canada
896-7772 in Southern Nevada
+702-896-7772 Outside the U.S.
FAX: +1-702-896-7710
or visit our website at http://www.ballygaming.com

Acronyms and Abbreviations

ADJUST	SDS® Adjustments Report	**A**
APC	MAPS® Atomic Progressive Controller	
BADREV	SDS® Bad Revenue Report	**B**
BPC	MAPS® Boss Progressive Controller	
BSG	Bally Secondary Game	
CE	Council of the European Communities (Low Voltage Directive)	**C**
CIU	SDS® Communication Interface Unit	
CLR	SDS® Clear (CLR+ENT to move backwards in parameters)	
CMOS	Complementary Metal Oxide Semiconductor	
COD	Coin Optic Decoder	
COINRP	SDS® Coin Difference Report	
COMPRO	SDS® communications program	
CPC	MAPS® Central Progressive Controller	
CRC	Cyclical Redundancy Check	
CSA	Canadian Standards Association	
DAC	Digital to Analog Converter	**D**
DENOM	SDS® Machine Denomination	
DIP	Dual In-line Package	
DIU	SDS® Display Interface Unit	
DMK	SDS® Display with Magnetic card reader and Keypad	
DUART	Dual Universal Asynchronous Receiver Transmitter	
EEPROM	Electronically Erasable Programmable Read-Only Memory	**E**
EGD	Electronic Gaming Device	
EGM	Electronic Gaming Machine	
EIA	Electronics Industry Association (approved equipment)	
ENT	SDS® Enter: to move Forward in parameters	
EPI	SDS® Enhanced Player Interface	
EPROM	Erasable Programmable Read Only Memory	
GAT	Game Authentication Terminal	**G**
GMU	SDS® Game Monitoring Unit	
GSA	Gaming Standards Association (formerly GAMMA)	
GUI	Graphical User Interface	
HHU	Hand-Held Unit	**H**
LAN	Local Area Network	**L**
LED	Light Emitting Diode	
Mag Card	SDS® Magnetic Card	**M**
MAPS®	Multi Area Progressive System	
MC	SDS® Mastercom	
MISER	Micro Integrated Slot Event Recorder	
MPU	Microprocessing Unit	
NMOS	N-Channel Metal Oxide Semiconductor	**N**
NOCOMM	SDS® Slots Not Communicating Report	

Acronyms and Abbreviations (cont.)

O	**OEM**	Original Equipment Manufacturer
P	**PAL**	Programmable Array Logic
	PJP	SDS® Progressive Jackpot
	PRD	Peripheral Device
	PROM	Programmable Read Only Memory
	PTD	SDS® Period To Date
Q	**QTD**	SDS® Quarter To Date
R	**RNG**	Random Number Generator
	RTC	Real Time Clock
S	**SAS®**	Slot Accounting System (IGT)
	SCO	SDS® Software Change Order
	SDS®	Slot Data Systems
	SDT	SDS® Data Transport
	SED	Simple External Device
	SIU	SDS® System Interface Unit
	SMART™	Slot Marketing And Revenue Tracking System (IGT)
	SMI	Specific Model Information
	SMIB	Smart Interface Board
	SNA	Systems Network Architecture
T	**TTL**	Transistor-Transistor Logic
	TX/RX	Transmit/Receive
U	**UART**	Universal Asynchronous Receiver Transmitter
	UPS	Uninterruptable Power Supply
V	**VGD**	Video Gaming Device
	VGM	Video Gaming Machine
	VIP	SDS® Very Important Player or Video Interactive Play
	VLT	Video Lottery Terminal
	VRTX	Versatile Real-Time Execute
W	**WAPS**	Wide Area Progressive System
	WTD	SDS® Week To Date
X	**XC**	SDS® Exception Code
Y	**YTD**	SDS® Year To Date

©2002 Bally Gaming and Systems

Module 5

Glossary

Introduction

This glossary includes terminology from Bally Gaming and Systems SDS® and MAPS®. These terms and definitions are included to assist the Operator's understanding of machine components and game operations.

A

Abandoned Card: SDS® message generated when an Employee Card or Player Card is inserted into a card reader, but there is no activity registered to that machine.

Accounting Meters: *See Bookkeeping Meters.*

ADJUST: (Adjustments Report) SDS® listing of GMU meters outside preset parameters.

Administration Mode: The machine state invoked by the Audit Key where bookkeeping meters are displayed.

APC: (Atomic Progressive Controller) A MAPS® machine-to-LAN interface. It connects with a gaming machine through a three-wire RS-232C, and with the LAN through the slot line. It may also control a display that shows progressive jackpot amounts.

Appendage: A division of the SDS® Slot Line, connecting machines on the floor to the slot line patch panel. The slot line is divided as "A" side and "B" side, which is useful for troubleshooting and line balancing.

Art Form: A listing of symbols, their distribution on the reel tape, and the top awards for a slot. It is the information shown to a Player on the reels, feature glass and display glass.

Attendant: An employee whose responsibilities include verifying and paying jackpots.

Attendant Pay: *See Jackpot Lockup.*

Attract Message: A downloaded or Operator-entered message appearing on-screen, or in an SDS® EPI/DMK display to attract a potential Player.

Attract Mode: If active, following a specific period of inactivity the machine may display graphics, flash lamps, or play music to attract potential Players. It serves as a screen saver on video products.

Audit Key: (a.k.a. Reset Key) The key used to actuate the Audit Keyswitch.

Audit Key Menu: All electronic accounting information, diagnostic functions, and game configuration options are accessed from the Audit Key menu in video products.

Audit Keyswitch: When actuated with the Audit Key, it signals the game to respond according to the state of the machine. It may show Bookkeeping or Diagnostic Meters, the Audit Key menu, or release a jackpot lockup.

Autohold: An option selected during configuration that automatically holds suggested card combinations. A HELD message appears above those cards.

Awards Glass: *See Feature Glass.*

Awards Test: *See Payout Test.*

©2002 Bally Gaming and Systems

B

Backplane Board: (a.k.a. Motherboard) A printed circuit board that provides interconnections between the MPU board and cabling.

BADREV Report: (Bad Revenue Report) SDS® listing of machines that have performed with unusually high or unusually low receipts.

Banner: *See Attract Message.*

Bar Top: A machine manufactured to fit within a bar counter.

Base Amount: The starting amount of a progressive jackpot.

Basic Percentage: The payback percentage of a game, excluding the Bonus, for the maximum wager. *See also Nominal Percentage and Bonus.*

Beef: (a.k.a. Dispute) When coins are taken from a machine by an Employee and given to a Player (a coin jam, for example). An SDS® Beef Slip should be generated for this transaction.

Beef Slip: SDS® documentation from the change booth terminal to record the transfer of money taken from a machine or the change booth by an Employee and given to a Player.

Belly Glass: *See Display Glass.*

Bet Mode: A machine option that configures how the machine will accept wagers. The choices are Cash, Credit, Player Selectable, and Coin to Credit.

Bill Acceptor: An assembly that examines currency or coupons and communicates the value to the machine. Accepted items register as credits, rejected items are returned to the Player.

Bill Drop: (a.k.a. Soft Drop) Controlled process of removing bills from bill acceptors.

Bill Acceptor Records: A listing of bill transactions by denomination.

Bill Acceptor Transaction History: A record of credits incremented or coins dispensed for each of the last 10 bill transactions.

Bill Validator: *See Bill Acceptor.*

Bill Vended Meter: An SDS® meter that records the cumulative number of credits for accepted bills.

Blackout: An SDS® message generated when a machine with power OFF is turned ON.

Bleed: A process where coins are removed from a machine by an Employee and returned to the change booth. An SDS® Bleed Slip should be generated to document the transaction. For example, a Bleed would occur with the removal of all money from the hopper and the coin acceptor when a machine is removed from the floor.

Bleed Slip: SDS® documentation from the change booth terminal to record machine-specific Bleed transactions.

Bonus: A reward for playing the maximum wager. For example, on a three coin multiplier game, a particular combination may pay 100 with one wagered, 200 with two wagered, and 500 (instead of 300) with the maximum three wagered. The 500 pay includes a 200 coin bonus for wagering the maximum.

 ©2002 Bally Gaming and Systems

B

Bonusing: An automated payout system for rewarding Players even without playing the maximum wager or winning a jackpot. For example, “Savvy 7s” pays a random bonus between $10 and $1000 when a special symbol appears on the third reel; “Mystery Jackpots” pays a random award to the Player that reaches a level of play regardless of the game’s outcome.

Bookkeeping Meters: An electronic and electromechanical means of storing and displaying statistical data within the machine. Typical information includes Total In, Total Out, Combined Drop, Attendant Paid, Bill Credits, etc.

BPC: (Boss Progressive Controller) Bally Gaming and Systems MAPS® LAN to WAN interface and the single site controller. If the WAN should fail, the BPC is capable of accumulating and displaying progressive information until communication through the WAN is restored.

BSG: (Bally Secondary Game) Communication protocol between processors controlling second-feature games, such as BellRinger®.

Buy-a-Pay: A style of game where the Player “buys” paying combinations by wagering more. For example, on a three-credit game, the first two coins may buy the wareds for all symbols except sevens on the payline. The third credit would buy the awards for the sevens.

C

Cabinet: The housing of the gaming machine.

Cancelled Credits: Soft credits paid by an Attendant.

Candle: *See Tower Light*.

Card: *See Player Card or Employee Card.*

Card Reader: Device for monitoring and tracking Player activity, machine maintenance, and Employee activity through insertions of magnetic stripe cards.

Cash: (Bet Mode) Machine option where coins inserted register in COIN IN or BET to the maximum allowed by the game. Bill acceptor transactions and wins are paid in coins from the hopper according to other machine option settings.

Cash Cage™: A bill hopper system within a machine that dispenses currency or coupons. It works in conjunction with a coin hopper to pay the Player upon a cashout.

Cashout: An activity by a Player to transfer credits to a Player’s card, or convert machine credits to cash or payable vouchers by pressing the CASH/CREDIT button on the player panel, or the COLLECT screen icon.

Casino Cabinet: (a.k.a. W6 style) An upright cabinet style with a sloped top box that is several inches higher in the front than in the back.

Central Slip Printer: An SDS® printer dedicated to printing EPI/DMK Fill Slips.

Change Booth: SDS® facility for terminals that print jackpot and fill slips, activate Employee cards, and log drops.

Checksum: The result of an arithmetic operation on bits. Used to verify the integrity of data.

CIU: (Communication Interface Unit) SDS® hardware interface (commonly the red board) within the CIU/SIU rack.

©2002 Bally Gaming and Systems

C

CIU/SIU: (Communication Interface Unit/System Interface Unit) SDS® hardware that controls the on-line/off-line status. The CIU/SIU holds four types of boards: the slot line controller, the CIU "red board," TX/RX (transmit/receive) board, and the EIA board.

Clear: SafeRAM™ *See SafeRAM™ Clear Procedure.*

Clock: A timing device that generates the base signal used to synchronize operations in a computer (*for time and date see RTC*).

COD: (Coin Optic Decoder) Board A printed circuit board containing micro-controller, optic sensors, and other components to detect a coin and determine it's direction of travel.

Coin Diverter: An assembly to guide coins to the hopper until it is full, then to a drop container.

Coin Drop: Action taken to empty the drop containers. *See also Hard Count or Hard Drop.*

Coin Inhibit: A control line from the MPU board to the coin acceptor or COD board to reject all coins.

Coinless Transaction: Where Players use vouchers or coupons, which are accepted by machines as credits, or where credits are transferred to the Player's card.

Coin Out Switch: A mechanical, optical, or proximity switch to count coins dispensed by the machine's hopper.

Coin to Credit: (Bet Mode) (a.k.a EuroCredit) All coins, currency, and wins are registered as credits up to the credit top limit.

COINRP: (Coin Difference Report) An SDS® report showing changes for coin in, coin out, drop, and games meters in the system while the main door was open.

COMPRO: An SDS® communication program interface between SDS software and the CIU.

Concept3™: A communication standard developed by Acres Gaming.

Coupon: A note with no cash value used in place of currency to establish credits on a machine.

CPC: (Central Progressive Controller) The central system for Bally MAPS®. It accumulates bet data from all LANs, computes the current and hidden jackpots for each link and transmits the amounts to the LANs.

CPU: **(Central Processing Unit)** The component of a computer system that has the circuitry to control the interpretation and execution of instructions.

Crazy Reel Operation: Random spin direction of each reel during a game.

CRC: (Cyclical Redundancy Check) Checksum technique to verify data. *See also Checksum.*

Credit: (Bet Mode) Machine option where inserted coins register in COIN IN or BET. Wins and bill acceptor transactions register as credits subject to other machine options. *See Bet Mode.*

Credit Collect Lockup: A jackpot lockup upon a collect, from a machine setting which, when equaled or exceeded by the available credits, requires an Attendant to pay the balance of credits remaining.

Credit Meter: A portion of the message center on a slot product and the area on a video screen where credits for play or collection are indicated to the Player.

 ©2002 Bally Gaming and Systems

C

CRT: (Cathode Ray Tube) A vacuum tube, such as a television picture tube, whose electron beam can be focused to show graphical data.

Current Credit Meter: Bookkeeping meter showing credits available to the Player when the machine returns to revenue operation.

Current Draw: The amount of current required to operate the machine. Usually measured in Amperes.

Cursor: The symbol on a display indicating where the next character will appear or where the next action will take place.

Cycle: The total number of symbol combinations on a gaming machine.

D

DAC: (Digital to Analog Converter) An IC that provides a voltage or current output from a digital input.

Daisy Chain: A group of devices where a second device is connected to the first, a third device is connected to the second, etc.

Data Vault™: A battery-backed redundant bookkeeping meter system that interfaces asynchronously with the machine's meters. The numbers are recorded at the same time, yet they are separate from the operations of the machine's meters, assuring accuracy even if something bad should happen to the machine's memory.

Deck: (a.k.a. Player Panel) Area of the machine's cabinet where the Player accessible buttons are located.

Degauss: The neutralizing of a magnetic field around a video monitor to correct faulty color.

Denomination: The value of each credit. For example, a machine configured for 25¢ registers one credit for each quarter through the coin acceptor and four credits for each dollar through the bill acceptor.

DIP Switch: (Dual In-line Package Switch) A set of switches with a footprint similar to an IC for mounting on circuit boards.

Display Glass: (a.k.a. Belly Glass) The lower glass insert of the door of an upright machine.

DIU: (Display Interface Unit) MAPS® system hardware that connects the LAN with external signs. Through this device, the CPC via the BPC sends character strings, display sequences, and jackpot amounts to the overhead signs.

Diverter: *See Coin Diverter*.

DMK: (Display with Magnetic card reader and Keypad) SDS® hardware interface between the GMU and the Operator or Player. External devices include a keypad, card reader and display.

DMK/EPI Fill Request: An SDS® fill request registered at the change booth when the employee enters the fill code at the keypad of a machine.

Double Down: 1) A secondary game where a Player may wager part or all of the winnings from the most recent game and possibly double the current winnings. 2) In Blackjack, doubling the initial wager when the value of the first two cards totals 10 or 11.

Double Up: *See Double Down, definition 1.*

Drop 1) Coins and bills collected from a machine or the process. 2) An SDS® indicator for the fiscal end and beginning of a gaming day for coin, bill, and/or slip data collection.

©2002 Bally Gaming and Systems

D

Drop Hold Percentage: The percentage of the total drop retained by the Operator. Calculated as (Combined Drop - [Fills + Attendant Paid]) / Combined Drop.

DUART: **(Dual Universal Asynchronous Receiver Transmitter)** A communication IC that can interface between a microprocessor and a serial channel. *See also UART.*

E

EEPROM: **(Electronically Erasable Programmable Read-Only Memory)** A memory IC where contents can be erased with electric signals.

EIA: **(Electronics Industry Association [approved board])** An SDS® electronic circuit board in the CIU/SIU that interfaces the RS-232 signal lines with the SDS® computer. Each EIA board supports four terminals.

Electromechanical Meters: Lifetime counters within the machine that record accounting information. Commonly used meters are total in, total out, and combined drop. Usage varies with Market Code and configuration. The electromechanical meters are an independent record of the same information stored in bookkeeping meters.

Electronic Meters: *See Bookkeeping Meters.*

Electronic Signature: Individual identification, such as the magnetically encoded number on SDS® Player or Employee cards.

Employee Card: An SDS® magnetic stripe card encoded with the Employee's identification number, permission level, and expiration.

End of Game Signal: A serial or discrete output from the MPU indicating that a game has completed.

Environmental Requirements: Physical space, heat load, and power requirements of the machine.

EPI: **(Enhanced Player Interface)** An enhanced SDS® DMK with a flexible modular design. Enhancements include a card reader with a lighted bezel and a two-line vacuum fluorescent display. It has all the standard DMK functions plus hot key options accessed through the keypad.

EPI Fill Request: *See DMK/EPI Fill Request.*

EPROM: **(Erasable Programmable Read-Only Memory)** An electrically programmed memory IC erased by exposure to ultraviolet light. It provides a nonvolatile medium for program instructions. Game programs and video graphics are stored in EPROMs.

Error Messages: *See Exception Codes.*

Escalator: The part of the slant or bar hopper that carries coins up to the coin bucket assembly.

E²) (E Squared) *See EEPROM.*

Even Handpay: Machine option, when enabled, allows a partial payment upon a jackpot lockup that is independent from the option coin hopper pay amount. The hopper pays enough additional coins so that the Attendant Pay amount is an "even" amount.

Event Log: Listing of SDS® metered events that have been recorded by the machine.

 ©2002 Bally Gaming and Systems

Exception Code: (a.k.a. XC, Tilt Code) A numeric message associated with operations of the machine, EPI/DMK, GMU, or SDS® computer. If a malfunction or inappropriate operation of any device occurs, the code is logged for tracking and reporting.

E

Exception Log: A SDS® record of all abnormal events.

Expanded Pay Table Glass: The display glass of an upright machine showing a continuation of the pay table from the feature glass.

Feature Glass: A silk-screened glass for the top box of an upright cabinet. It usually shows the pay table.

F

Fill: Coins that are added to an empty hopper or the process.

Fill Slip: SDS® documentation from the change booth terminal to record a fill and associate it with a specific machine.

Firmware: Software stored in an IC (EPROM, EEPROM, PROM or ROM).

Floor Activity Reports: Any of a group of SDS® reports generated to track casino floor activity. These include machine activity reports, coin in, coin out, drop, exception codes, handle pulls, fills, jackpots, etc.

Game: A program designed to operate a gaming machine offering a Player the opportunity to win money by wagering on the outcome of the game's activity. There can be several games on one machine.

G

Game Authentication Terminal: (GAT) Interface for verfication of the contents of the machine's storage media.

GameKeeper®: A Bally Systems PC-based program family of products that includes GameTrack® and GameWatch®. These tools facilitate the collection and analysis of revenue.

Game Maker®: Bally Gaming's innovative multi-game product that is available in upright, bar top, slant, and casino cabinet styles.

Game Recall: Function that allows the Operator to review past games, including winning combination, amount collected, amount wagered, amount won, and the available credits.

GameTrak®: A Bally Systems PC-based program used to create alternative performance and analysis reports from data gathered from the SDS®.

GameWatch®: SDS® software that transforms data into graphical representations of the performance of the floor. Just by clicking icons, an Operator can isolate on a variety of parameters. There is even a CYCLE DISPLAY feature to automatically cycle the choices.

GMU: **(Game Monitoring Unit)** An SDS® circuit board within the machine that records machine operation and transfers the information to the CIU via the slot line.

Gross Handle: Sum of all wagers accepted

Handle: (Pulls) Games played.

H

Hard Count: The room, process, or the personnel counting coins from gaming operations.

Hard Credit: Any credit on a machine derived from a winning combination.

©2002 Bally Gaming and Systems

H

Hard Drop: The controlled process of removing coins from gaming machines.

Hard Meters: *See Electromechanical Meters.*

Hit Frequency: The winning combinations that will occur on the machine as a percentage of all combinations. It is calculated by dividing the number of individual winning games by the number of possible outcomes.

Hold Percentage: The percentage of wagers retained by the Operator. It is calculated by subtracting the payback percentage from 100.

Home Run: The cable lines from the Slot Patch Panel in the computer room to the casino floor.

Hopper Knife: The hopper component that moves coins from the pinwheel to the coin outlet.

Hopper Optic Switch: An opto-interrupter switch used on the hopper to determine coin direction and the number of coins paid from the hopper. *See also Coin-Out Switch.*

Hopper Probe: A sensor within the hopper bowl to detect a preset level of coins. When coins touch the probe, a signal is sent by the MPU to energize a coil that moves the coin diverter assembly to route coins to the drop container.

Host: A computer system operatoing where networked gaming machines are the target systems. The complexity of a Host can range from monitoring and compiling statistical information, to the electronic transfer of funds; and can include RNG and game outcome.

Hot: An SDS® layering system to monitor the activity on the floor and relate it to an individual Player's activity.

Hot Player: A casino specified rating for a Player with qualifying wagers within a time frame.

I

Insert: A piece of glass or film that contains information not included in the feature, display, or reel glass. It can be a paytable or other important information. *See also Decal.*

J

Jackpot Keyswitch: *See Audit Keyswitch.*

Jackpot Lockup: A game state requiring intervention by an Attendant because the current win exceeds the setting at win lockup, or the current credits exceed the setting at credit collect lockup upon a cashout. The Attendant must pay the Player and release the jackpot lockup before the machine is available for play.

Jackpot Reset Switch: *See Audit Keyswitch.*

Jackpot Slip: SDS® documentation from the change booth to track Attendant pays for jackpot lockups.

Jumper: A removable connector (plug, wire, etc.) that electrically joins separate connections.

Jurisdiction: Area under the influence of a gaming control agency with the rights and power to interpret and apply the law as it applies to gaming.

K

Keypad: An input device with multiple buttons linked to an SDS® EPI or DMK to access the functions of the GMU.

Keyswitch: A switch actuated by inserting and turning a key.

 ©2002 Bally Gaming and Systems

K

L

Knockoff Credits: The credits registered on the machine when an Attendant activates the knockoff keyswitch.

LAN: (Local Area Network) A network of interconnected computers covering a relatively limited geographic area, such as one or more buildings at one location.

LED: (Light Emitting Diode) A semiconductor that glows when supplied with a current.

LED Message Center: An arrangement of seven-segment LED arrays used on slot products to show information to the Player and Operator.

Line Noise: Interference in a transmission line that may be caused by interference from a power source or poor connections within the line.

Link: MAPS® single set of progressive parameters, which include the progressive controllers, display interface units, and the gaming machines that participate in that set.

Linked Progressive: Several machines contributing to common jackpots.

Lockup: *See Jackpot Lockup.*

Logical Device Name: An SDS® name given to a terminal to describe its main function or menu access privileges.

Lottery: A gaming system where all machines are usually connected to an off-site central computer.

Lower Display Glass: (Door) *See Display Glass*.

M

Machine: A gaming device. This term is also synonymous with EGM (Electronic Gaming Machine), VGD (Video Gaming Device) , VGM (Video Gaming Machine) and VLT (Video Lottery Terminal).

Machine Meter Groups: (MMG) Operator accessible groups of related electronic meters. Machine Meter Groups include Bookkeeping, Win Records, Game Recall, Games Summary, Bill Transactions, Bill History, Progressive Jackpot Meters, etc.

Machine Options: Operator-selectable configuration available from Diagnostic Function #11 in slot products and the Audit Key menu in video products.

Mag Card: (Magnetic Card) *See Employee Card or Player Card.*

Malfunction Codes: *See Exception Codes.*

MAPS®: (Multi Area Progressive System) A single progressive system for multiple properties.

Market Code: A numeric factory setting to cause the machine to operate in the manner prescribed by a jurisdiction.

Mastercom: *See GMU.*

Maxbet Options: Operator selectable maximum and minimum wager for some games.

Message Center: *See LED Message Center*.

Monitor CRT: (cathode ray tube), associated circuitry, and hardware for presenting game images and other information to the Player or Operator.

©2002 Bally Gaming and Systems

M

Monitor Video Frequency: *See Refresh Rate.*

MPU: (Microprocessing Unit) Circuitry that contains a microprocessor and memory, input/output interface, buffer, clock, and driver circuits*. See also CPU.*

MPU Board: The PCB assembly that contains the CPU, memory, and associated logic and driver circuits to control the machine. Connects to the backplane.

Multi-Area Feature: An SDS® software package that allows for the subdivision of a casino into manageable parts. With this system a message can be directed to a specific area, reports can be generated for that area, or for the whole system.

Multi-Line Game: A game function that presents the Player with the opportunity to buy multiple paylines by increasing the amount wagered.

Mystery Machine Pay: A system that awards Players for coins played rather than a winning combination. *See also Bonusing.*

N

Nominal Percentage: Payback percentage of a game including the bonus for the maximum wager. *See also Basic Percentage and Bonus.*

Nudge: Movement after a reel stop when a NUDGE symbol appears on the payline.

Operator: Any person, partnership, company, or corporation and/or their legal representatives who own, operate, service, maintain and derive profit from their association with gaming equipment.

O

Opto-Isolator: A solid state device used to isolate electrical connections by using light emission and reception.

P

PAL: (Programmable Array Logic) An IC which can be programmed to function as an array of logic gates.

Payback Percentage: The amount the Player is expected to win divided by the amount of money played expressed as a percentage. On games where there is a bonus for the maximum wager, the payback percentage will vary slightly according to how many credits per game are played.

Payline: Where symbols align for award combinations. The Payline is determined by the game program. It can be vertical, horizontal, diagonal, or a combination of the three.

Payout Test: Diagnostic Function #10 in slot products confirming that reel symbol combinations match the game's pay table as it appears on the feature glass.

Paytable: A chart of pay amounts for winning combinations.

PCB: (Printed Circuit Board) Fiberglass on which electrical connections are formed by a printing and etching process. Integrated circuits and other electronic components are added, forming a functional unit.

Peripheral: An intelligent device connected to the machine, such as a touch screen, hopper, printer, or bill acceptor.

Personality: Programmed EPROMs of game-specific information that includes symbol distribution and paytables.

Personality Socket: The location on the MPU board where the Personality EPROMs are installed.

 ©2002 Bally Gaming and Systems

P

Pinwheel: A rotating steel disc used in coin hoppers to dispense coins. Small metal pins or raised points along the outer circumference of the pinwheel provide individual pockets where coins can ride along as the pinwheel rotates. As the coins reach the exit point of the hopper they are stripped off the pinwheel by the hopper knife.

Player: Any person who deposits money into a machine for the purpose of playing the game.

Player Card: An SDS® magnetic stripe card encoded with privileges and benefits.

Player Tracking Connection: A connection that is transferred through SDS® to another Player Tracking System, usually an AS/400 system, for the compilation of player tracking information. This system is used primarily for Player bonuses and marketing purposes.

Player Tracking System: A computer, software and accessories connected to gaming devices that allow the Operator to identify a Player, accumulate data, and reward the Player accordingly.

Play Speed: A machine option controlling the rate at which game events occur, such as deal speed, duration of reel spin, etc.

Poll: 1) An electronic request for information, usually from a Host or other computer to peripheral devices. 2) The process of gathering meter information from each game and reporting it to the Host computer.

Port: The connection that allows communication between a digital system and an external device.

Probability: A number expressing the likelihood of the occurrence of a specific event. It is expressed as the ratio of the number of actual occurrences to the number of possible occurrences.

PRD: (Peripheral Device) Communication protocol between processors controlling second-feature games, such as Roll the Dice®.

Progressive: 1) A system of pooling a portion of each wager into a cumulative fund that is available for a win. 2) A game that increments the prize amount based on Player participation. *See also MAPS, Linked Progressive, Stand Alone Progressive, and WAPS.*

Progressive Controller: A system to track wagers, increment the jackpot accordingly, and reset it to the base amount when the jackpot is won.

Progressive Jackpot: The jackpot offered by a progressive system in lieu of a fixed Jackpot.

PROM: (Programmable Read Only Memory) An integrated memory circuit where data can be stored, and generally cannot be altered thereafter.

Protocol: The communication standard between two devices.

Pseudo Coin: A nonrevenue credit that allows the Operator to play the machine while the main door is open.

Q

Qualifying Play Achieved: Message generated when Operator-set parameters are met thereby qualifying a Player for a specified reward.

R

RAM: (Random Access Memory) Volatile read/write memory.

Random Number Generator: (RNG) A routine designed to yield a random number.

Real Time Clock: (RTC) *See RTC.*

©2002 Bally Gaming and Systems

R

Rebet: A function that allows a Player to duplicate the wager of the previous game by pressing REBET or the DEAL-SPIN-START button.

Red Board: An SDS® term for the CIU, which is usually red.

Reel Glass: The glass framing the reels.

Reel Map: A listing of the symbol distribution on each reel strip. It is shipped with the machine and with model conversion orders.

Reel Tape: Plastic imprinted with game-specific symbols that is wrapped onto a slot reel.

Refresh Rate: The number of times per second the screen is redrawn. This is equal to the vertical synchronization frequency in a CRT. Expressed in Hertz (Hz).

Reg. 14: A reference to Nevada Gaming Regulation #14, which specifies signals that must be included in a protocol for communicating with progressive systems.

Reserve Game: An SDS® DMK function that allows an Employee to reserve a game for a special Player.

Reset Keyswitch: *See Audit Keyswitch.*

Reset Switch: The reset button on the MPU board used for a System reset.

ROM: (Read-Only Memory) Semiconductor memory where data has been permanently stored.

RS-232: A serial communication standard that uses signals more negative than five volts for a high, and more positive than five volts for a low.

RS-485: A serial communication standard with balanced drivers and receivers, requiring two transmit and two receive lines, to sustain signals over long distances. Uses +5 volts (TTL).

RTC: (Real Time Clock) An IC for maintaining time and date information.

S

SafeRAM™: Battery-backed RAM with restricted write access that stores game information. This information can be erased only with a SafeRAM™ Clear Procedure.

SafeRAM™ Clear Procedure: The process of erasing and initializing game information stored in the SafeRAM™ storage area.

SafeRAM™ Clear Chip: Special EPROMs used for a SafeRAM™ Clear Procedure.

SAS®: (Slot Accounting System - IGT) A data collection and accounting package and the communication protocol used by this system.

Scale Package: An SDS® optional feature that facilitates the hard count drop and increases accuracy. The hard count scales automatically send the data to SDS®, eliminating any manual entry.

Schematics: A graphical representation of an electrical circuit or assembly.

Screen Banner: *See Attract Message.*

SDS®: (Slot Data System) A computerized accounting and machine monitoring system developed by Bally Gaming and Systems, and the communication protocol used.

 ©2002 Bally Gaming and Systems

S

Select-a-Bet™: A multi-denomination betting feature of the Gambler's Choice™ machine that allows the Player to choose the value of each credit within an Operator-selectable range.

Sensor: The component that converts an input signal to a quantity that is measured and changed to a readable signal for an information gathering system.

Service Time Report: An SDS® report of Employee activity including the time needed to return a malfunctioning machine to operation.

Seven-Segment Display: A display comprised of seven separate LED bars that display the digit "8" when all are active.

Shelf Wheel: A metal disc attached to the hopper pinwheel providing a shelf for coins. Changing denominations usually requires changing the shelf wheel and may require changing the pinwheel.

Slant: A machine cabinet with a slanted top designed for Player comfort, which incorporates the following features: standard height seating, a padded armrest, easy access to coin and bill entry, game action below eye level, and feature glass at eye level.

SLIP: An SDS® logical device name where EPI/DMK fill slips are printed. Casinos segmented into multi-areas can direct fill slips to other change booths.

Slip Drop: The collection of all of slips from the floor for balancing with the floor activity reports.

Slot Game: A game that utilizes spinning reels.

Slot Line: SDS® cabling.

Slot Patch Panel: An SDS® hardware component that interfaces the slot line and the CIU within the CIU/SIU.

Slot Product: Distinction made for machines using motor-driven reels for games as opposed to video machines which present games on a CRT.

SMART System: (Slot Marketing And Revenue Tracking System) An accounting system developed by IGT.

SMI: (Specific Model Information) The percentage, reel tape specifications, art form numbers, glass numbers, and EPROM identification that comprise a unique model.

SNA: (Systems Network Architecture) Another type of Player tracking connection used by SDS®. The architecture was created by IBM.

Soft Count: The counting of currency generated by gaming operations and the location where the activity takes place.

Soft Credit: A credit from any source other than a winning combination (hard credit). For example, credits from bills, coupons, coins, knockoff keyswitch, ECT, or EFT.

Soft Drop: The controlled process of removing bills from bill acceptors.

Soft Meter: Any of the machine meter groups stored in SafeRAM™.

Solenoid: An electromagnetic device that converts electrical energy into mechanical energy. The solenoid consists of a coil which, when energized, becomes a magnet. The magnet then causes a metal component to move in order to activate a mechanical device.

©2002 Bally Gaming and Systems

S

Standalone Progressive: A progressive award that can only be won on one machine.

Stepper Motor: A motor used for precision motion control. Stepper motors rotate by applying a pulsating voltage to the windings. Each pulse causes the stepper motor shaft to rotate only a few degrees (1.6° per step on Bally slots).

Super Jackpot Meter: Number of times the machine has had a win that triggers JP0 while option 7, external jackpots, is greater than zero.

Synchronous: The ability to perform two or more processes at the same time controlled by a mutual timing signal or clock.

System Clock: A circuit on the MPU board that provides timing pulses for synchronization.

System Generated Code: Exception codes generated by SDS® in response to events recorded at change booths, at the RS-6000, or internally.

System Reset: Function used to return the program pointer to a known value. A system reset button is provided on the MPU board assembly for the Operator to restore a machine to operation after a malfunction.

System Test: The simulation of a running program to check for proper functioning of components and interconnections.

T

Terminal Patch Panel: An SDS® hardware component that interfaces the terminal lines and the EIA board within the CIU/SIU.

Terminal Server: OEM hardware for SDS® used to join several different terminal connections to the Network, then link to an SDS connection.

Test Box: An SDS® GMU attached to each slot patch panel to maintain the activity of the CIU to prevent its hibernation.

Top Box: An enclosed area at the top of the machine that typically contains a light assembly, feature glass, tower light, and optional assemblies.

Top Box Glass: *See Feature Glass.*

Tournament Operation: With additional hardware and enabled options, machines can operate in a nonrevenue state. Players compete with other Players to amass the most credits within a time period.

Tower Light: (a.k.a. Candle) The multi-lamp assembly mounted at the top of the machine. It displays machine states and game conditions using combinations of steady and flashing lamps.

Troubleshooting: (a.k.a. Fault Finding) The process of systematically locating and eliminating the source of a malfunction.

U

UART: (Universal Asynchronous Receiver Transmitter) Integrated circuit used in serial communication.

UNIX: The operating system used by Bally Systems for SDS®. Developed by AT&T Bell Laboratories in 1969.

Upright: Any machine model, except a slant or bar top. It is usually attached to a stand.

 ©2002 Bally Gaming and Systems

UPS: (Uninterruptable Power Source) A local backup power source for short term electrical power if the primary power fails.

U

Video Frequency: *See Refresh Rate.*

V

Video Products: Distinction made for machines using a CRT display to present games as opposed to slot products which use motor-driven reels for games.

Virtual Reel: An electronic slot machine with statistically calculated reel stops that are greater than the number of stops possible on a physical reel. This allows for higher awards, irrespective of the physical size of the machine's components. (Patent owned by IGT.)

VLT: (Video Lottery Terminal) A machine that communicates with a central computer system. Video lottery Players often receive payment in the form of printed tickets that are redeemable for cash.

Volatility: An index of the deviation from the expected hold of a game.

Voucher: A ticket from a video lottery terminal redeemable for cash.

WAPS: (Wide Area Progressive System) A progressive jackpot network linking several casinos. The games are played for a prize funded by the controlling agency. Examples include Thrillions®, Megabucks®, and Quartermania®. *See also MAPS.*

W

Weighted Mapping: The variable statistical weights assigned to reel positions. An alternative to virtual reel.

Wide Area Progressive System: *See WAPS, or see MAPS.*

Win Lockup: A jackpot lockup from a machine option setting, which was equaled or exceeded by a win.

XC: *See Exception Code.*

XMISER: An older SDS® GMU.

X

©2002 Bally Gaming and Systems

MODULE 6B

MK6B-S6MOD-0001

SLIMLINE-S6000

©2000 BALLY GAMING AND SYSTEMS ALL RIGHTS RESERVED

Bally Gaming & Systems

6601 South Bermuda Road, Las Vegas, NV 89119

For Customer Service and Information:
+1-702-896-7772 outside the U.S.
1-877-GO BALLY (877) 462-2559 in the U.S. and Canada
896-7772 in Las Vegas
FAX +1-702-896-7710
or visit our website at http://www.ballygaming.com

Module 6B

Slimline-S6000 Table of Contents

Components 5
Overview 6
Specifications 6
Locks and Cams 6
Installation 7

ProSlot 6000 Plus® Assemblies, Parts, and Hardware 8
Circuit Boards 8
Programmable Devices and Batteries 8
Illumination 8
Tower Lens Covers 8
Cables 8
Denomination Change Kits 9
Coin Acceptor Selections 9
Cabinet Assembly 10
Power Supply AS-04238-0065 12
Transformer 120VAC 50/60Hz
E-00122-0217 12
Transformer 220VAC 50/60 Hz.
E-00122-0218 13
Starter/Ballast Assembly, 120VAC 60Hz.
AS-03335-0403 13
Starter/Ballast Assembly, 220VAC 50Hz.
AS-03335-0402 14
Bell & Receptacle E-00664-0466 14
Card Rack Door/MPU Board
AS-06605-0001 15
Reel Mechanism
AS-04716-0004 15
Tower Selections 16
Door Assembly 18
Meter Panel Assembly
AS-2900-04-352K-001 18
Bill Acceptor 19

©2000 Bally Gaming, Inc.

Module 6

Slimline-S6000

Components

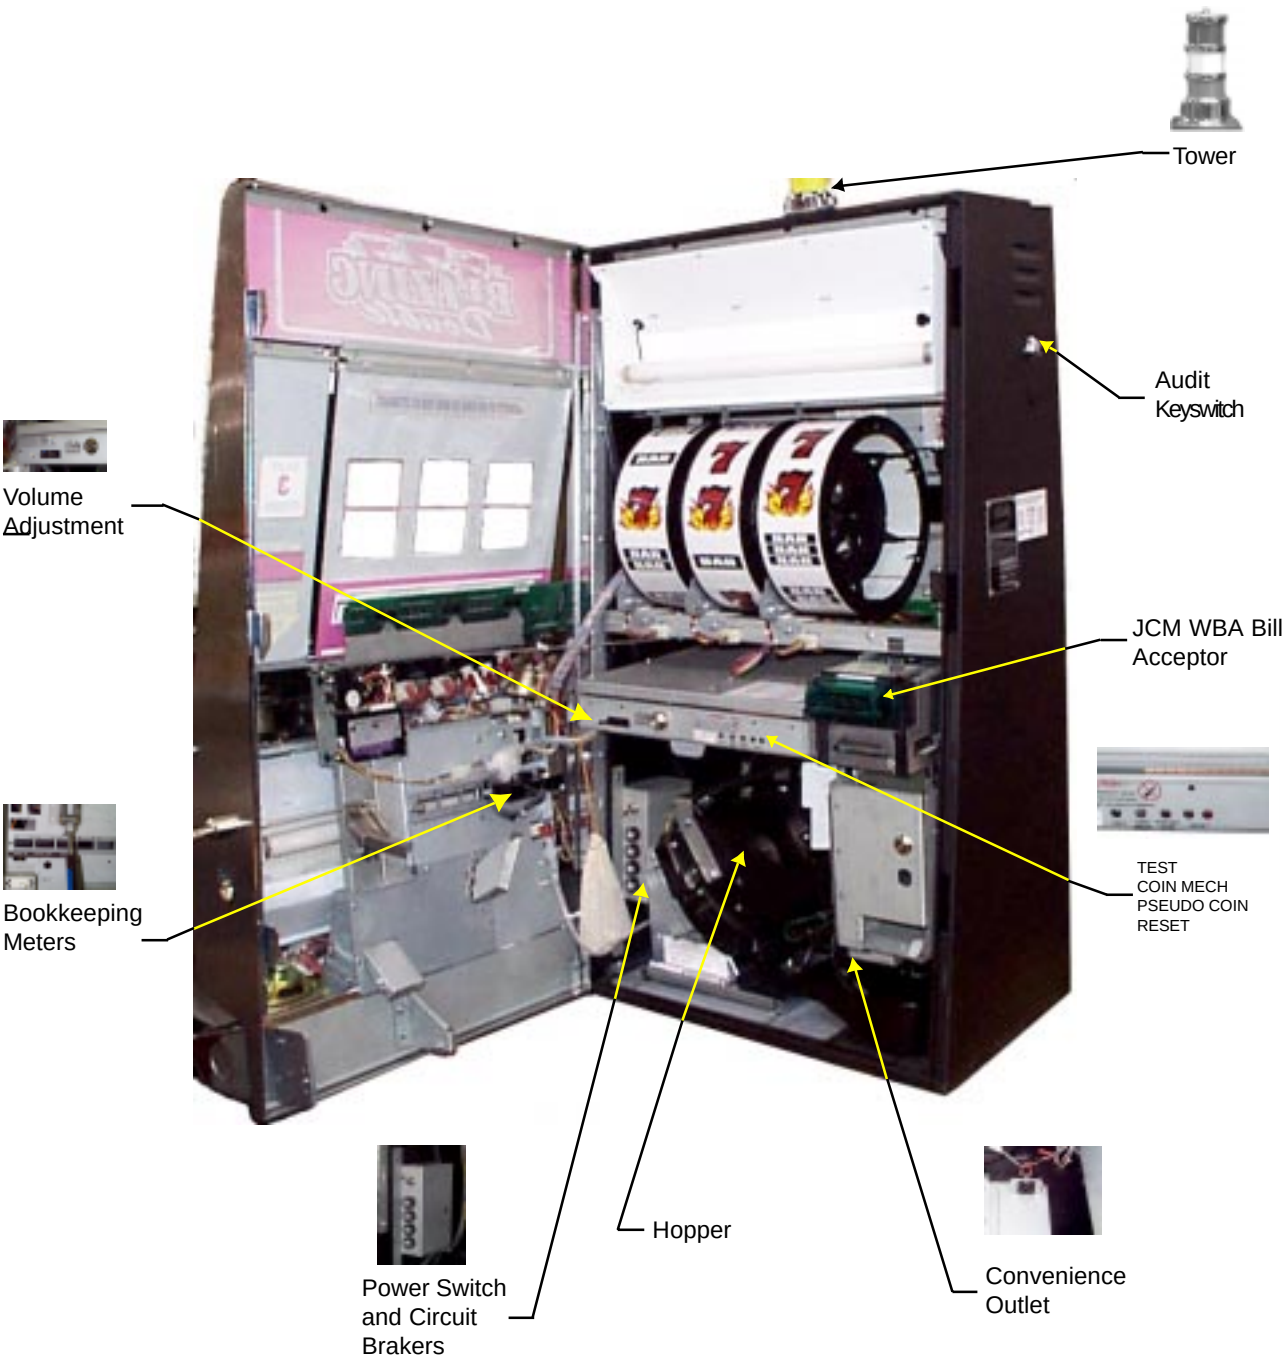

©2000 Bally Gaming, Inc.

Module 6

ProSlot 6000 Plus®

Overview

This module describes specifications, installation, configuration, and operation of ProSlot 6000 Plus® machines. Additional information is available in Module 9 Overall Wiring Diagrams.

Specifications

Electrical Specifications				
Line Voltage	100/240 VAC 50/60 Hz			
Power Supply Output	+5, +12, -12, +24 VDC			
Machine State	Idle	Play	Payout	Maximum Theoretical Draw
Current @ 110VAC	1.1 Amp	1.2 Amp	1.7 Amp	2.35 Amp
Current @ 220VAC	.55 Amp	.6 Amp	.85 Amp	1.18 Amp
Power	121W	132W	187W	259W

Ambient Temperature:
Max: 100º F (38º C) Min: 40º F (4º C)
Maximum Relative Humidity: 90%
Average Heat From Machine: 500 BTU/Hr.

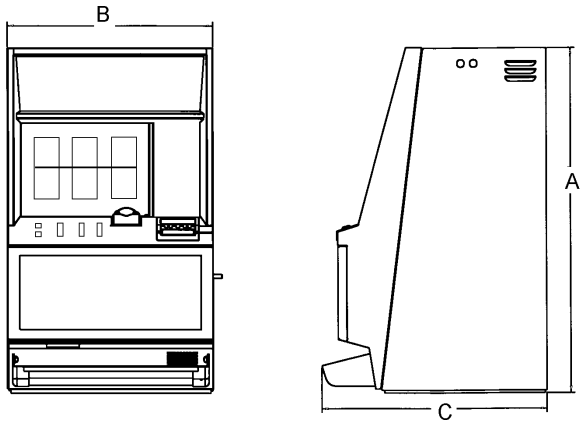

Dimentions and Weight			
A	Height	37"	93.98 cm
B	Width	20 ½"	52.07 cm
C	Depth	18"	45.72 cm
	Weight	219 lb	99.34 Kg

Locks and Cams

Keyswitches and MPU locks have been installed at the factory. Cams are provided for the other locks that the Operator must purchase.

All lock openings are are $^{5}/_{8}$" (1.59cm) by $^{3}/_{4}$" (1.91cm). The locks are 90 degree rotation. The keys should be removable only in the locked position.

Locks $1^{1}/_{8}$" (2.86cm) long can be used with spacers to maintain the $^{1}/_{2}$" (1.27cm) lock length.





EITHER "CW" OR "CCW" MAY BE OBTAINED BY CHANGING ORIENTATION OF STOP CAM ON BACK OF LOCK.

Slimline-S6000 2nd Keyswitch and Shipping Locks

Part #	Description	Where Used
304-0037	Switch, Locking reset, 1-1/8" #6120	Audit Keyswitch
04-60010	Shipping Lock	Stand

Slimline-S6000 Lock Requirements

Location	Hardware
Main Door	Lock Cam 7000-13-032
Belly Door	Lock cam 6600-17-068 PI
Bill Acceptor Security Door	Lock cam 6600-17-0049
Bill Acceptor Stacker	Two cams provided by JCM: #0943PT0504
MPU Door (Factory Installed)	Lock M-00281-162A, Key 52593 Cam P-00758-0094
Audit Keyswitch (Factory Installed)	304-0037
Data Tracking System (Factory Installed)	Lock M-00281-162A, Key 52593 Cam P-06434-0007
Top Box (Factory Installed)	Lock M-00281-162A, Key 52593 Cam 6000-19-260
Slot Stand	Lock Cam 04-60010

©2000 Bally Gaming, Inc.

Installation

Please refer to the current Module 2, Set Up and Operation for intallation procedures. A SafeRAM™ Clear is essential before the first use, when Main program EPROMs ar replaced, or if game memory becomes corrupted.

Note: SafeRAM™ Clear Eproms S6S1000CLE04-03 may be required.

Warning: To avoid injury from toppling machines, mount only to Bally Gaming and Systems stand #6000-18-061-0001.

©2000 Bally Gaming, Inc.

SlimLine-S6000 Assemblies, Parts, and Hardware

SlimLine-S6000 Circuit Boards

SlimLine-S6000 Circuit Boards	
Part #	Description
AS-03356-0424	MPU Board Assembly
AS-03356-0439	MPU Board Assembly, (with Smart Sockets)
AS-03356-0445	Backplane Board Assembly
AS-03356-0431	Bill Acceptor LED Board, JCM WBA
AS-205101	4-Pole Lockout PCB Assembly
AS-03356-0427	Door Optic Emitter Board
AS-03356-0428	Door Optic Detector Board
AS-03356-0362	Deluxe Sound Board Assembly
AS-03356-0368	Hopper Control Board, FET, Dual Optic
AS-03356-0426	Display Board

SlimLine-S6000 Programmable Devices and Batteries

SlimLine-S6000 Programmable Devices and Batteries		
Part #	Description	Where Used
E-00867-0037	(Blank) EPROM, IC, 1MEG, 128K X 8, 80NS	JCM WBA Bill Acceptor
E-00867-0035	(Blank) EPROM, IC, 256K, 32K X 8,120NS	Personality (U18, U20)
E-00867-0039	(Blank) EPROM, IC, 2MEG, 256K X 8,120NS	Main (U28, U43)
E-00867-0042	(Blank) EPROM, CMOS, (512K) 64K X 8	Personality (P1-P10)
E-00867-0046	(Blank) EPROM, IC, 8MEG, 1M X 8, 120NS	AS-03356-0362 Deluxe Sound Board
S6S1000CLEO403	ProSlot 6000 Plus® SafeRAM™ Clear	U28, U43
E-01056-0018	Programmed Controller, 16F84, FET-003	AS-03356-0368 Hopper Control Board
E-00628-0023	Battery, Lithium (3.6V @ 1800MAH)	B1
E-00882	Jumper	JWxx
E-00620-0673	IC, Dallas Smart Socket DS1213D	U30, U45

SlimLine-S6000 Illumination

SlimLine-S6000 Illumination	
Part #	Description
E-00412-0013	Lamp, Fluorescent, F15T8/CW
E-00412-0014	Lamp, Fluorescent, F14T8/CW
E-00411-0007	Fluorescent Starter FS-5
E-00411-0010	Fluorescent Starter FS-2 CE97
E-00125-0005	Lamp, #55 (6-8V .4A Tower)
E-00125-0084	Lamp, #86, 6.3V, T1-3/4, Wedge Base (Insert Coin)
E-00125-0095	Lamp, #86, 6.3V Incandescent (Button Lamp)
E-00125-0096	Lamp, #555, 6.3V, Wedge Base, (SPIN, BET MAX)
E-00125-0099	Lamp, #74, 4,14V, T1-3/4, Wedge Base (Denomination)
E-00120-0264	Socket, Lamp, Wedge Base, T-1 3/4

SlimLine-S6000 Tower Lens Covers

Tower Lens Covers				
Color	Tower Lens Cover, Small		Tower Lens Cover, Large	
	Top Part #	Bottom Part #	Top Part #	Bottom Part #
White	M-02100-0301	M-02100-0401	M-02100-0101	M-02100-0201
Red	M-02100-0302	M-02100-0402	M-02100-0102	M-02100-0202
Blue	M-02100-0303	M-02100-0403	M-02100-0103	M-02100-0203
Yellow	M-02100-030[illegible]	M-02100-0404	M-02100-0104	M-02100-0204
Green	M-02100-0305	M-02100-0405	M-02100-0105	M-02100-0205
Coral	M-02100-0306	M-02100-0406	M-02100-0106	M-02100-0206
Purple	M-02100-0307	M-02100-0407	M-02100-0107	M-02100-0207
Orange	M-02100-0308	M-02100-0408	M-02100-0108	M-02100-0208
Blue	M-02100-0309	M-02100-0409	M-02100-0109	M-02100-0209
Teal	M-02100-0310	M-02100-0410	M-02100-0110	M-02100-0210
Powder Blue	M-02100-0311	M-02100-0411	M-02100-0111	M-02100-0211
Pink	M-02100-0312	M-02100-0412	M-02100-0112	M-02100-0212
Amber	M-02100-0313	M-02100-0413	M-02100-0113	M-02100-0213

SlimLine-S6000 Cables

SlimLine-S6000 Cables	
Part #	Description
CBL-30201-0001	3 Reel, 501-0214
CBL-20214-0001	Bill Acceptor Door, 501-0212
CBL-30456-0001	Cabinet Power, 501 -0203
CBL-30234-0002	Cabinet Signals, 501-0202
CBL-20295-0001	Coin Acceptor Interface, MC-16
CBL-30347-0001	Deluxe Sound
CBL-30468-0001	Door Button, 501-0204
CBL-30227-0002	Hopper, 501-0206 Rev A
CBL-20227-0001	Knock-Down
CBL-20189-0001	Reel Control Board
E-00537-7623	Super Hopper
CBL-20234-0001	System Interface
CBL-20300-0001	Top Box Power
CBL-20095-0001	Tower Extension
CBL-30235^0001	WBA-10/20, 501-0213
CBL-30100-0001	XS1200 Super/Standard Hopper

WARNING: Attempting to re-charge Lithium batteries can cause them to explode. Replace failed batteries with Bally Gaming part E-00628-0023 or its equivalent.

©2000 Bally Gaming, Inc.

Denomination Change Kits for SlimLine-S6000

Parts needed to change the coin denomination accepted by the SlimLine-S6000 are available in kits. Each kit contains the necessary coin entry and hopper parts. Refer to the following matrix for part numbers:

Note: Parts indicated as "Express" are in stock and available for shipment within 24 hours after receiving an order.

Coin Acceptor Selections

Coin Mechanisms, Inc. MC-16

BALLY PART NO.	Coin Mechanisms PART NO.	DAMPER WEIGHT	DEMONINATION	PART DESCRIPTION
E-00887-5001	66460151	.7 gram	1c PENNY	MC-160E,24VDC,INH HI,PR15, 0.7G 6 PIN Penny
E-00887-5002	66460152	2.6 gram	5c NICKEL	MC-160E,24VDC,INH HI,PR15, 2.6G 6 PIN
E-00887-5003	66460153	.7 gram	10c DIME	MC-160E,24VDC,INH HI,PR15, 0.7G 6 PIN
E-00887-5004	66460069	6.0 gram	25c QUARTER	MC-160E,24VDC,INH HI,PR15, 6.0G 6 PIN
E-00887-5005	66460154	14.2 gram	50c & DOLLAR TOKEN	MC-160E,24VDC,INH HI,PR15,14.2G 6 PIN
E-00887-5006	66460155	14.2 gram	$5 WIDE BODY 1 PIECE TOKEN	MC-160EWB,24VDC,INH HI,PR15,14.2G 6 PIN
E-00887-5007	66460156	14.2 gram	$5 WIDE BODY BI-METAL TOKEN	MC-160EWB,24VDC,INH HI,PR15,14.2G 6 PIN DEEPSEAT

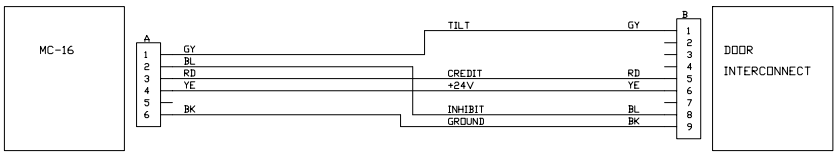



©2000 Bally Gaming, Inc.

Cabinet Assembly

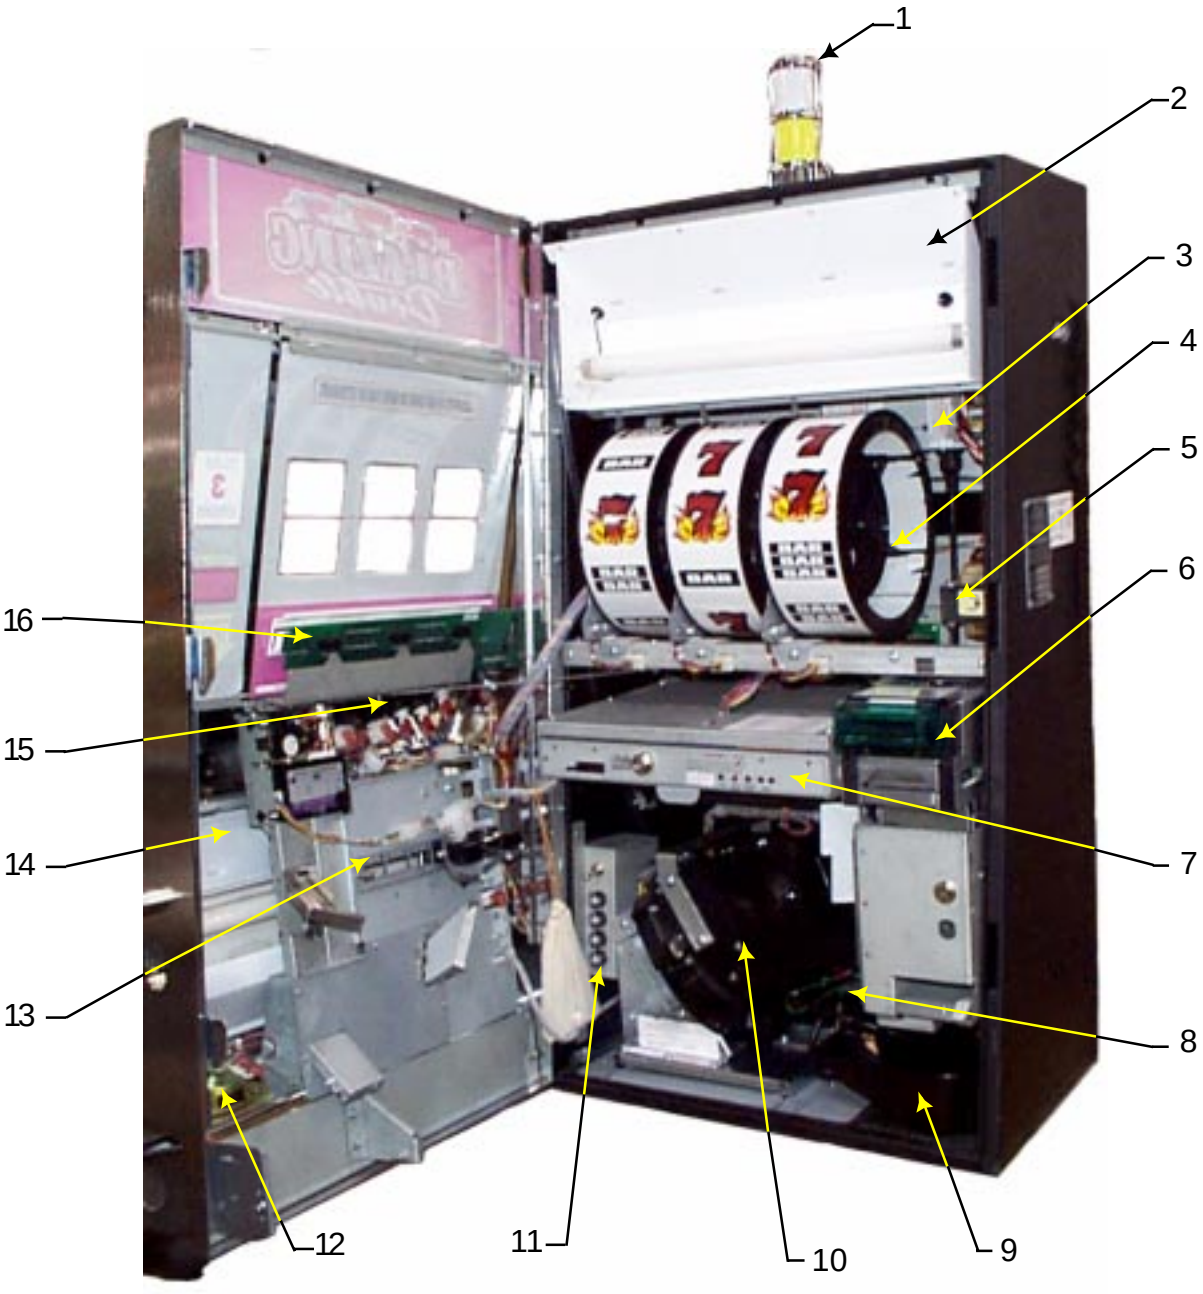

©2000 Bally Gaming, Inc.

ProSlot 6000 Plus® Cabinet Assembly		
Item	Part #	Description
1	TWR (series)	Tower See page
2	AS-5000-18-107K-001	Upper Light Assembly
3	AS-04238-0065	PDU Standard (Power Supply) See page
4	AS-04716-0004	Reel Mechanism, 3 Wide Reels
5	E-00122-0217	Transformer, 120VAC 50/60 Hz. See page
	E-00122-0234	Transformer, 220VAC 50/60 Hz. See page
6	E-01100-(series)	JCM Bill Acceptor
7	AS-06605-0001	Card Rack Door/MPU Board
8	AS-03268-0003	Convenience Outlet, IT
	AS-03268-0004	Convenience Outlet, US
	AS-03268-0008	Convenience Outlet, UK
	E-00664-447A	Convenience Outlet, EUROPE
9	6100-16-050	Cup, Drop Chute
10	AS.6000-18-027K-001	S/L Hopper Assembly
11	AS-6000-18-118K-001	Fuse Box Assembly
12	E-00281-0019	Speaker, 3X5 Oval, Quam
13	AS-2900-04-352K-001	Meter Panel Assembly
14	AS-2900-04-104K-001	Belly Light Assembly
15	5000-18-028	5 Hole Button Panel, Chrome
16	707-0030	Display Board
Not Shown	E-00126-0120	Line Cord, Modular, 8ft. (Italy)
	E-00126-0121	Line Cord, Modular, 8ft. Domestic
	E-00126-0122	Line Cord, Modular 2.5 meters, Europe
	E-00126-0123	Line Cord, Modular, 8.167 ft. (UK)
	E-00126-0132	Cord Set, Nema 6-15p, 8ft. Domestic
	E-00126-0143	Cord Set, Modular (AS)
	E-00126-0157	Cord Set, 8.2ft., BS546/IEC320 (South Africa)
	E-00126-0167	Line Cord, IRAM 2073, 8Ft. (AM,AR)
	AS-03335-0403	Starter/Ballast Assembly, 120VAC 50/60 Hz. See page 6-14
	AS-03335-0402	Starter/Ballast Assembly, 220VAC 50/60 Hz. See page 6-15
	E-00664-0466	Bell and Receptacle See page 6-14

©2000 Bally Gaming, Inc.

Power Supply
AS-04238-0065

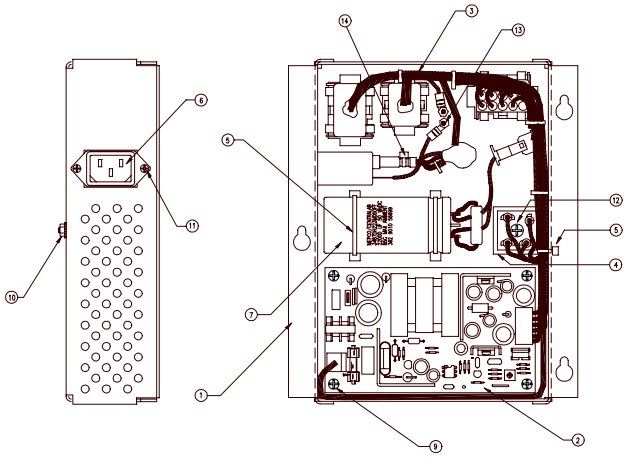

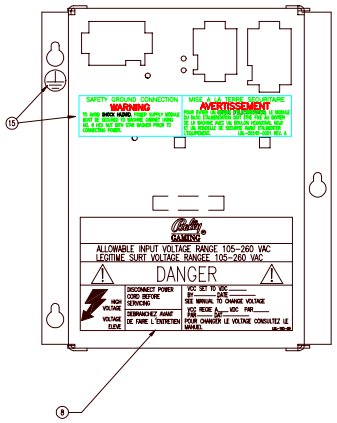

MATERIALS LIST			
REF.	PART NUMBER	DESCRIPTION	QTY.
1	A-04345-0003	ASSY, PWR. SUPL. CASE, V55+/CANADA	1
2	AS-02982-0030	ASSY, POWER SUPPLY BOARD	1
3	CBL-30180-0001	CABLE, PWR. SUPL, CE97	1
4	E-00602-0016	RECTIFIER, BRIDGE	1
5	E-00647-0005	CABLE TIE	3
6	E-00664-0594	ASSY, EMI LINE FILTER, STD / CSA	1
7	E-00664-0545	ASSY, CAPACITOR W/CONN, CE97	1
8	LBL-00183-0003	LABEL, PWR. SUPL, 105-260VAC	1
9	LSPP-00632-1104	SCREW	4
10	NLS-00832-1112	NUT	1
11	TFPP-00440-1106	SCREW	2
12	TFPP-00832-1112	SCREW	1
13	NLS-00832-2112	NUT	2
14	E-00647-0004	CABLE TIE	1
15	LBL-00245-0001	LABEL, GROUND SAFETY	1

Transformer, 120VAC 50/60 Hz.
E-00122-0217

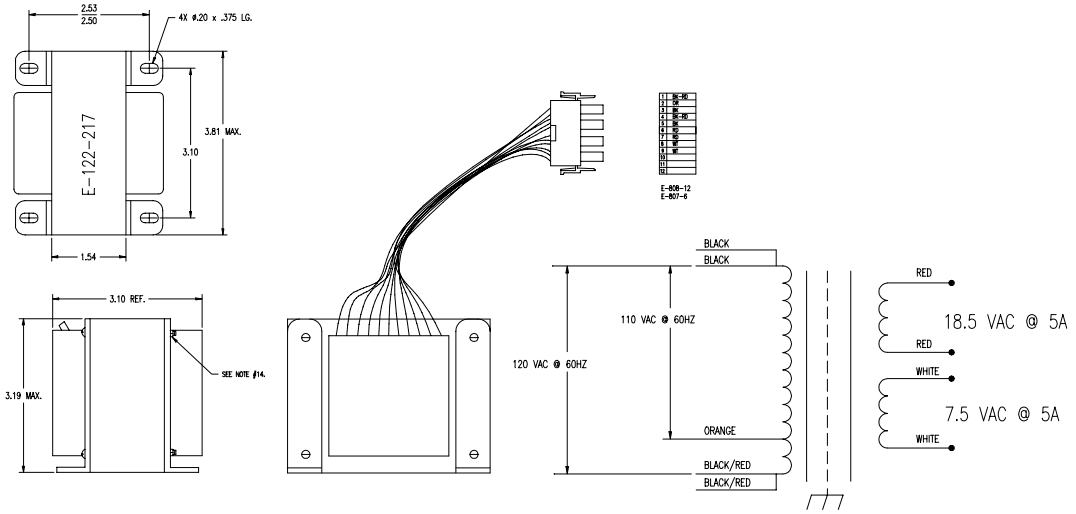

NO LOAD REQUIREMENTS							
PRIMARY WINDING	INPUT VOLTAGE	LOAD CURRENT	OUTPUT WINDING	OUTPUT VOLTAGE MIN.	NOM.	MAX.	UNITS
BK-OR BK-BK/RD	110 VAC 120 VAC	0 AMPS	RD-RD	18.0	19.0	20.0	VAC
BK-OR BK-BK/RD	110 VAC 120 VAC	0 AMPS	WT-WT	7.5	7.8	8.1	VAC

LOADED REQUIREMENTS							
PRIMARY WINDING	INPUT VOLTAGE	LOAD CURRENT	OUTPUT WINDING	OUTPUT VOLTAGE MIN.	NOM.	MAX.	UNITS
BK-OR BK-BK/RD	110 VAC 120 VAC	5 AMPS	RD-RD	17.5	18.5	19.5	VAC
BK-OR BK-BK/RD	110 VAC 120 VAC	5 AMPS	WT-WT	7.1	7.5	7.9	VAC

©2000 Bally Gaming, Inc.

Transformer, 220VAC 50/60 Hz.
E-00122-0218

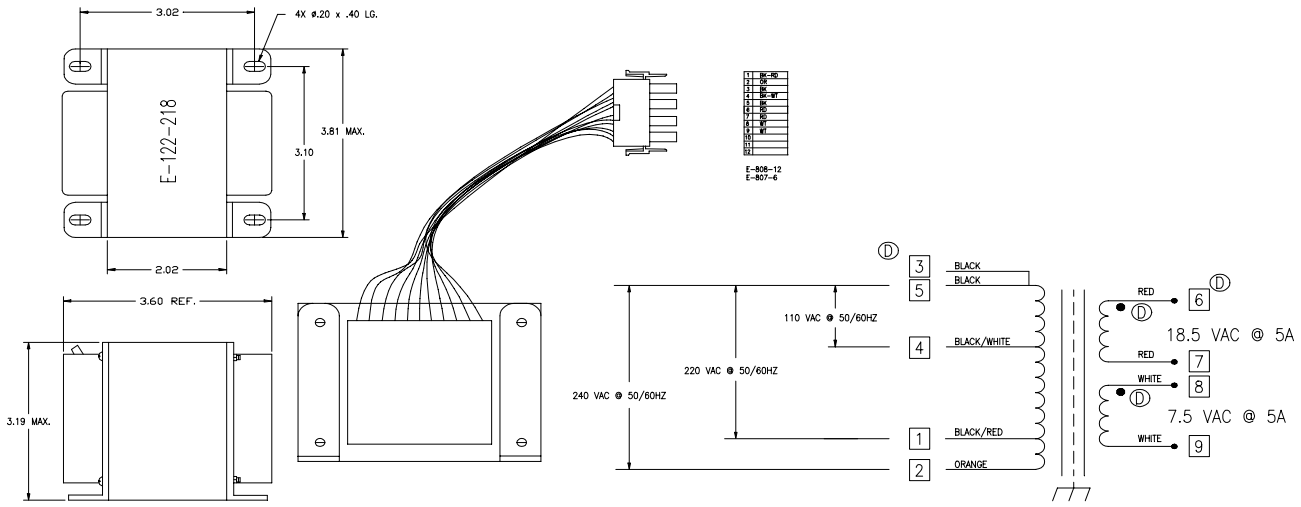

NO LOAD REQUIREMENTS

PRIMARY WINDING	INPUT VOLTAGE	LOAD CURRENT	OUTPUT WINDING	OUTPUT VOLTAGE MIN.	NOM.	MAX.	UNITS
BK–OR BK–BK/RD	240 VAC 220 VAC	0 AMPS	RD–RD	18.0	19.0	20.0	VAC
BK–OR BK–BK/RD	240 VAC 220 VAC	0 AMPS	WT–WT	7.5	7.8	8.1	VAC
BK–OR BK–BK/RD	240 VAC 220 VAC	0 AMPS	BK–BK/WT	115	120	125	VAC

LOADED REQUIREMENTS

PRIMARY WINDING	INPUT VOLTAGE	LOAD CURRENT	OUTPUT WINDING	OUTPUT VOLTAGE MIN.	NOM.	MAX.	UNITS
BK–OR BK–BK/RD	240 VAC 220 VAC	5 AMPS	RD–RD	17.5	18.5	19.5	VAC
BK–OR BK–BK/RD	240 VAC 220 VAC	5 AMPS	WT–WT	7.1	7.5	7.9	VAC
BK–OR BK–BK/RD	240 VAC 220 VAC	1.5 AMPS	BK–BK/WT	115	120	125	VAC

Starter/Ballast Assembly, 120VAC 60 Hz.
AS-03335-0403

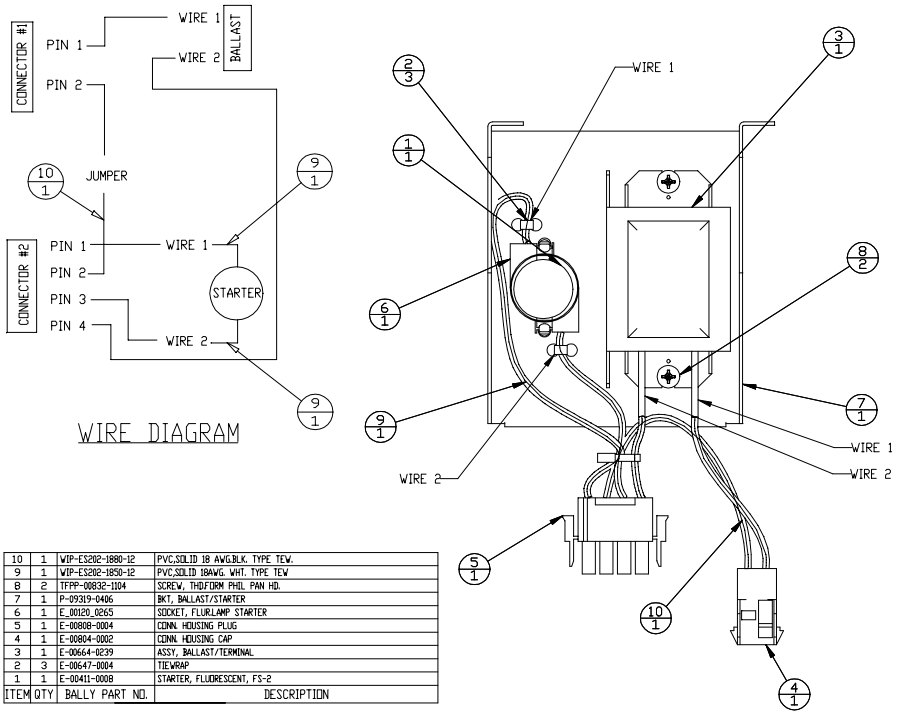

ITEM	QTY	BALLY PART NO.	DESCRIPTION
10	1	WIP-ES202-1880-12	PVC,SOLID 18 AWG.BLK. TYPE TEW.
9	1	WIP-ES202-1850-12	PVC,SOLID 18AWG. WHT. TYPE TEW
8	2	TFPP-00832-1104	SCREW, THDFORM PHIL PAN HD.
7	1	P-09319-0406	BKT, BALLAST/STARTER
6	1	E_00120_0265	SOCKET, FLURLAMP STARTER
5	1	E-00808-0004	CONN. HOUSING PLUG
4	1	E-00804-0002	CONN. HOUSING CAP
3	1	E-00664-0239	ASSY, BALLAST/TERMINAL
2	3	E-00647-0004	TIEWRAP
1	1	E-00411-0008	STARTER, FLUORESCENT, FS-2

©2000 Bally Gaming, Inc.

Starter/Ballast Assembly, 220VAC 50 Hz.
AS-03335-0402

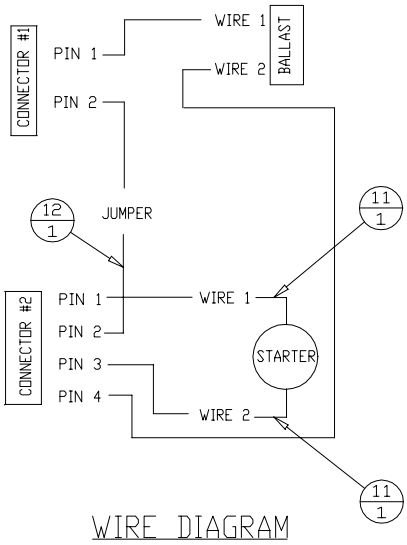

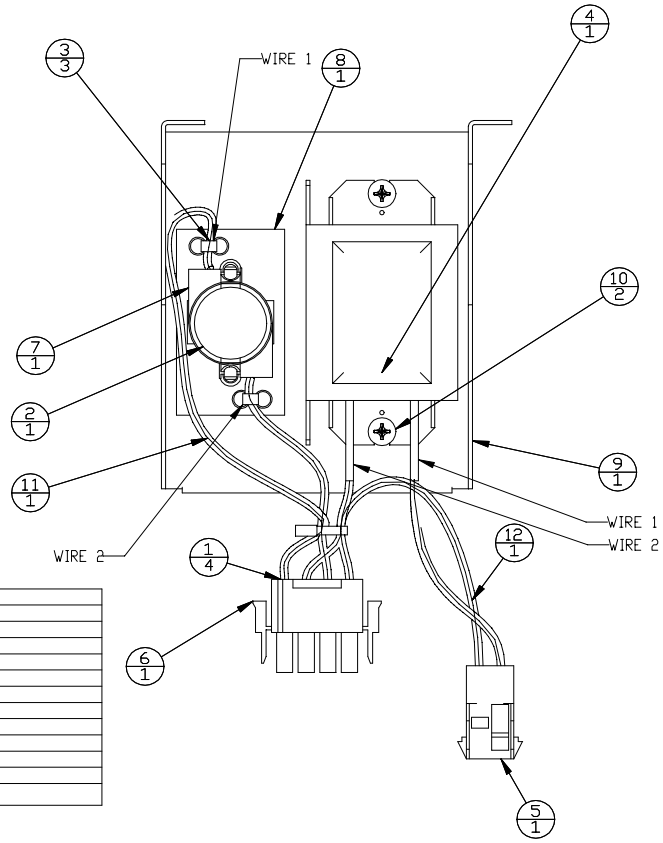

ITEM	QTY	BALLY PART NO.	DESCRIPTION
12	1	WIP-ES202-1880-402	PVC,SOLID 18 AWG.BLK. TYPE TEW.
11	1	WIP-ES202-1850-402	PVC,SOLID 18AWG. WHT. TYPE TEW
10	2	TFPP-00832-1104	SCREW, 8-32 X 1/4 THD.FORM PHIL PAN HD.
9	1	P-09319-0406	BKT, BALLAST/STARTER
8	1	P-00150-0292	INSULATOR, POLYCARBONATE CE97
7	1	E_00120_0265	SOCKET, FLUOR. LAMP STARTER CE97
6	1	E-00808-0004	CONN. HOUSING PLUG
5	1	E-00804-0002	CONN. HOUSING CAP
4	1	E-00664-0564	ASSY, BALLAST/TERMINAL
3	3	E-00647-0004	TIEWRAP
2	1	E-00411-0010	STARTER, FLUORESCENT, FS-2
1	4	E-00807	SOCKET, AMP, 24-18

Bell & Receptacle
E-00664-0466

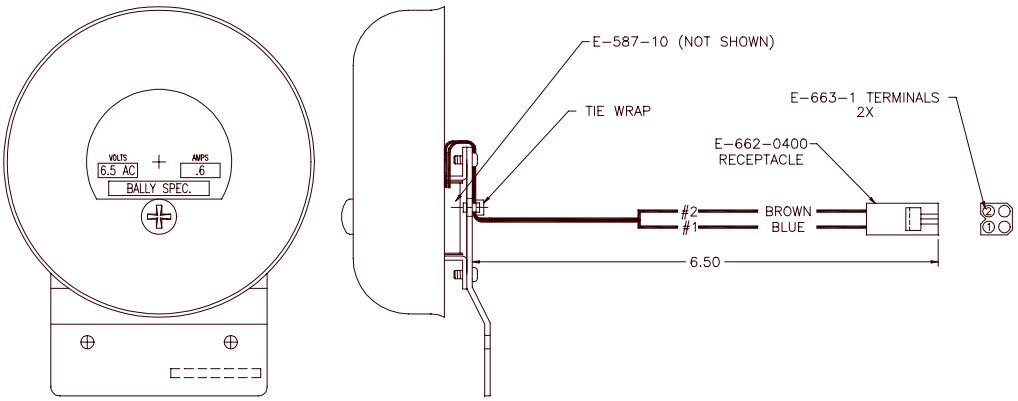

©2000 Bally Gaming, Inc.

Card Rack Door/MPU Board
AS-06605-0001

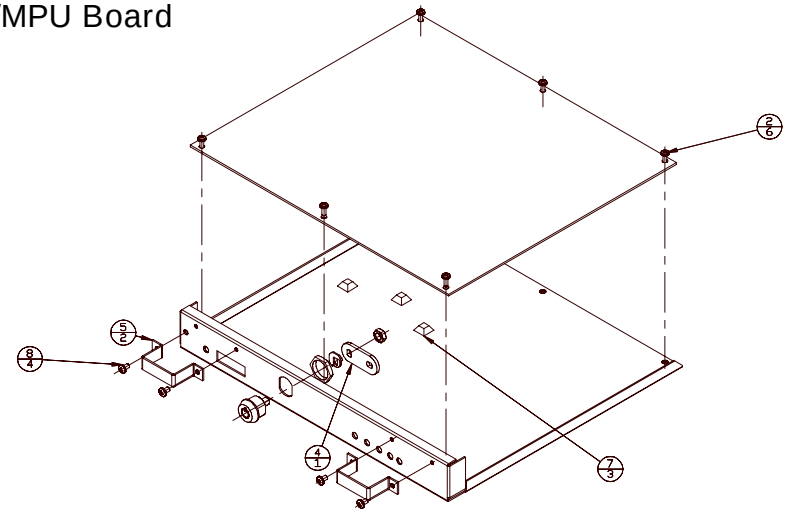

ITEM	QTY	BALLY PART NO.	DESCRIPTION
8	4	TFPP-00832-1104	SCREW, 8-32 X 1/4 THD.FORM PHIL PAN HD.
7	3	R-00409	BUMPER
6	1	P-06802-0001	TRAY, MPU BD.
5	2	P-06264-0332	HANDLE, CARD RACK DOOR
4	1	P-00758-0094	CAM, BILLAC STACKER, M0281-132
3	1	M-00281-162A	LOCK NO CAM, DOOR/BILLACC.
2	6	LSPP-00632-1106	SCREW, MACH W/LOCK PHIL PAN HD.
1	1	AS-03356-0424	ASSEMBLY, MPU BD.

Reel Mechanism
AS-04716-0004

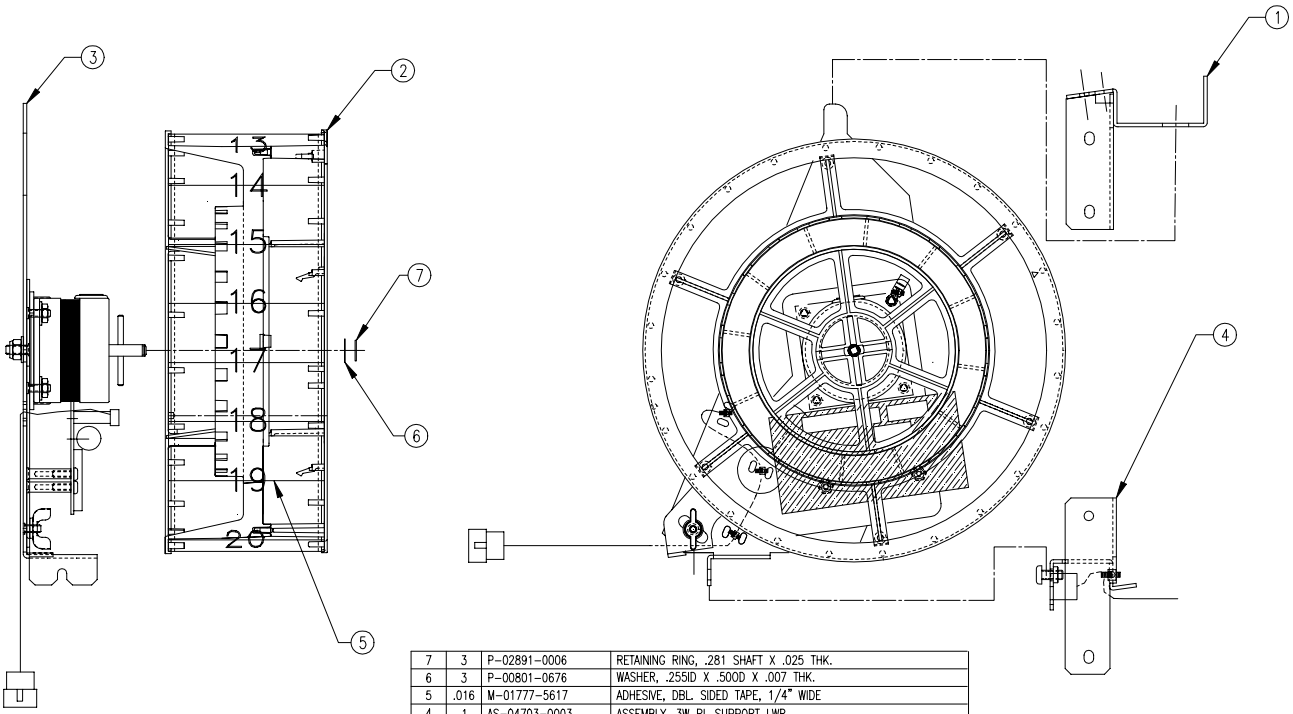

ITEM	QTY	PART NUMBER	DESCRIPTION
7	3	P-02891-0006	RETAINING RING, .281 SHAFT X .025 THK.
6	3	P-00801-0676	WASHER, .255ID X .500D X .007 THK.
5	.016	M-01777-5617	ADHESIVE, DBL. SIDED TAPE, 1/4" WIDE
4	1	AS-04703-0003	ASSEMBLY, 3W RL SUPPORT LWR
3	3	AS-04235-0009	ASSEMBLY, REEL DRIVE 9"
2	3	AS-04234-0004	ASSEMBLY, REEL 9"
1	1	A-04703-0006	BRACKET, 3W RL. SUPPORT, UPR

©2000 Bally Gaming, Inc.

Tower Selections

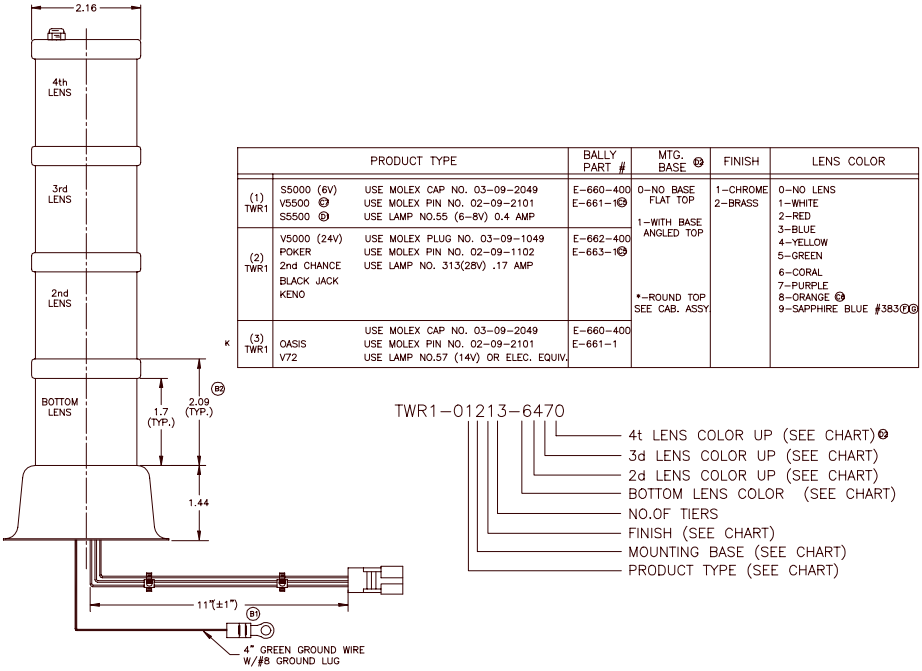

	PRODUCT TYPE		BALLY PART #	MTG. BASE	FINISH	LENS COLOR
(1) TWR1	S5000 (6V) V5500 S5500	USE MOLEX CAP NO. 03-09-2049 USE MOLEX PIN NO. 02-09-2101 USE LAMP NO.55 (6-8V) 0.4 AMP	E-660-400 E-661-1	0-NO BASE FLAT TOP 1-WITH BASE ANGLED TOP *-ROUND TOP SEE CAB. ASSY.	1-CHROME 2-BRASS	0-NO LENS 1-WHITE 2-RED 3-BLUE 4-YELLOW 5-GREEN 6-CORAL 7-PURPLE 8-ORANGE 9-SAPPHIRE BLUE #383
(2) TWR1	V5000 (24V) POKER 2nd CHANCE BLACK JACK KENO	USE MOLEX PLUG NO. 03-09-1049 USE MOLEX PIN NO. 02-09-1102 USE LAMP NO. 313(28V) .17 AMP	E-662-400 E-663-1			
(3) TWR1	OASIS V72	USE MOLEX CAP NO. 03-09-2049 USE MOLEX PIN NO. 02-09-2101 USE LAMP NO.57 (14V) OR ELEC. EQUIV.	E-660-400 E-661-1			

TWR1-01213-6470

- 4t LENS COLOR UP (SEE CHART)
- 3d LENS COLOR UP (SEE CHART)
- 2d LENS COLOR UP (SEE CHART)
- BOTTOM LENS COLOR (SEE CHART)
- NO.OF TIERS
- FINISH (SEE CHART)
- MOUNTING BASE (SEE CHART)
- PRODUCT TYPE (SEE CHART)

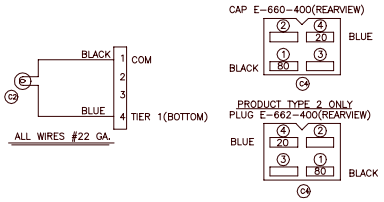

1-TIER TOWER

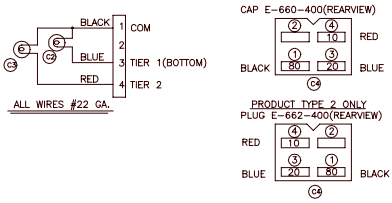

2-TIER TOWER

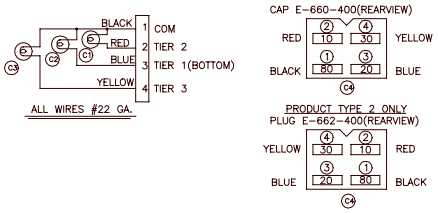

3-TIER TOWER

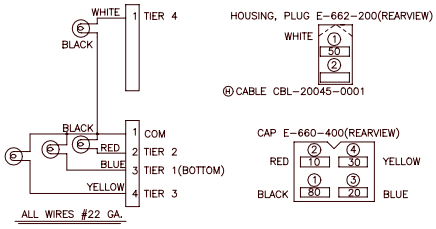

4-TIER TOWER

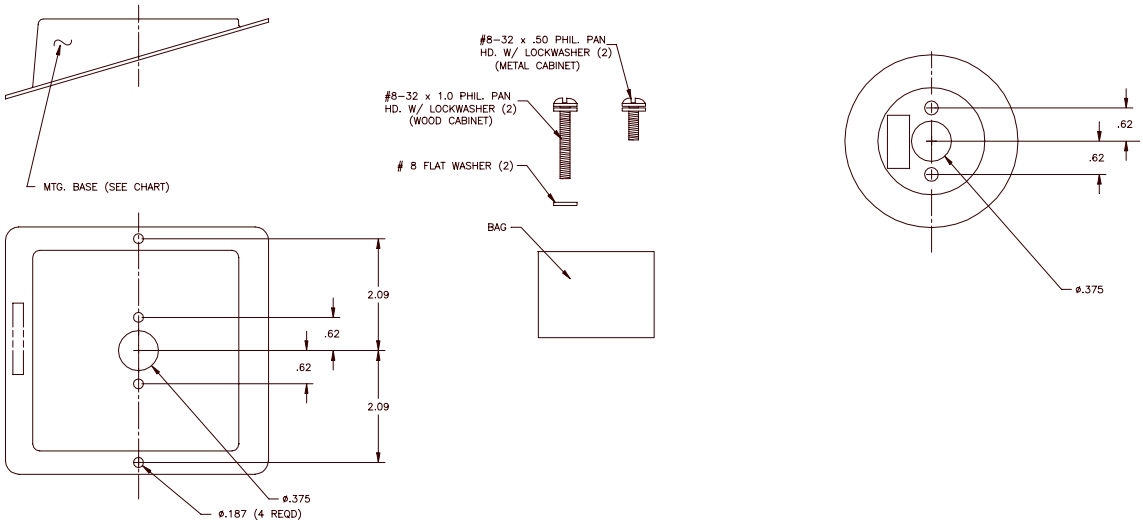

©2000 Bally Gaming, Inc.

Tower Selections (cont.)

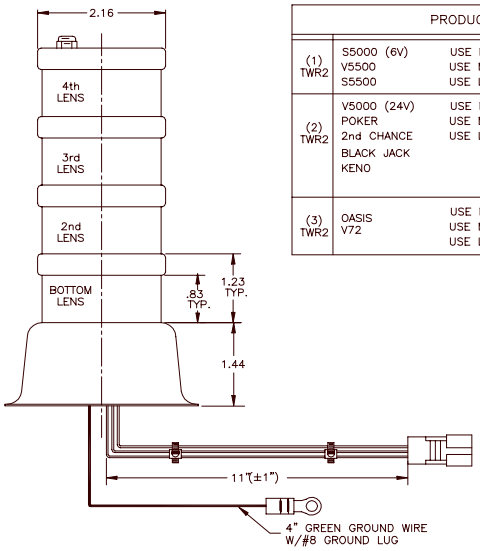

PRODUCT TYPE			BALLY PART #	MTG. BASE	FINISH	LENS COLOR
(1) TWR2	S5000 (6V) V5500 S5500	USE MOLEX CAP NO. 03-09-2049 USE MOLEX PIN NO. 02-09-2101 USE LAMP NO.55 (6-8V) 0.4 AMP	E-660-400 E-661-1	0-NO BASE FLAT TOP 1-WITH BASE ANGLED TOP *-ROUND TOP SEE CAB. ASSY.	1-CHROME 2-BRASS	0-NO LENS 1-WHITE 2-RED 3-BLUE 4-YELLOW 5-GREEN 6-ORANGE (CORAL) Ⓕ 7-PURPLE 8-ORANGE (OBSOLETE SEE -6)Ⓕ 9-SAPPHIRE BLUE #383 ⓄⓁ
(2) TWR2	V5000 (24V) POKER 2nd CHANCE BLACK JACK KENO	USE MOLEX PLUG NO. 03-09-1049 USE MOLEX PIN NO. 02-09-1102 USE LAMP NO. 313(28V) .17 AMP	E-662-400 E-663-1			
(3) TWR2	OASIS V72	USE MOLEX CAP NO. 03-09-2049 USE MOLEX PIN NO. 02-09-2101 USE LAMP NO.57 (14V) OR EQUIV.	E-660-400 E-661-1			

TWR2-01213-6470

- 4t LENS COLOR UP (SEE CHART)
- 3d LENS COLOR UP (SEE CHART)
- 2d LENS COLOR UP (SEE CHART)
- BOTTOM LENS COLOR (SEE CHART)
- NO.OF TIERS
- FINISH (SEE CHART)
- MOUNTING BASE (SEE CHART)
- PRODUCT TYPE (SEE CHART)

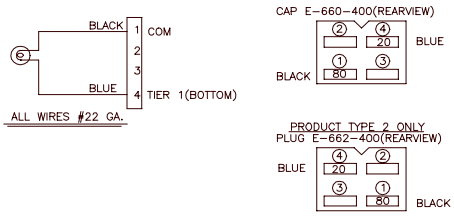

1-TIER TOWER

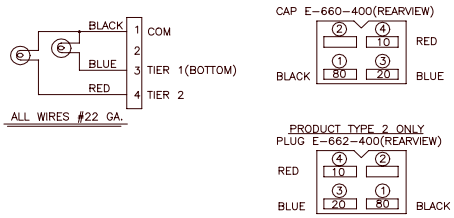

2-TIER TOWER

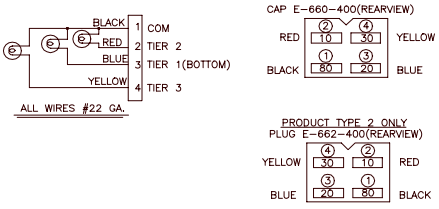

3-TIER TOWER

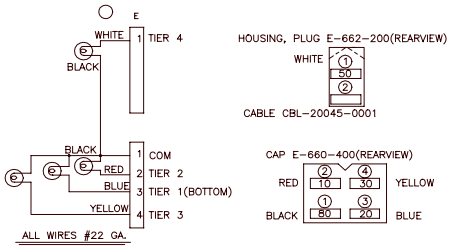

4-TIER TOWER

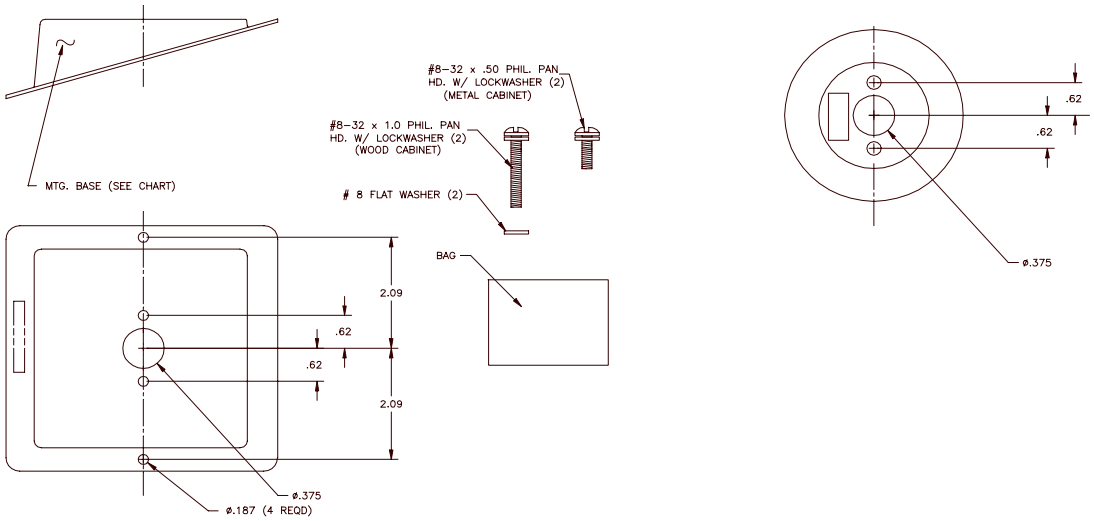

©2000 Bally Gaming, Inc.

Door Assembly

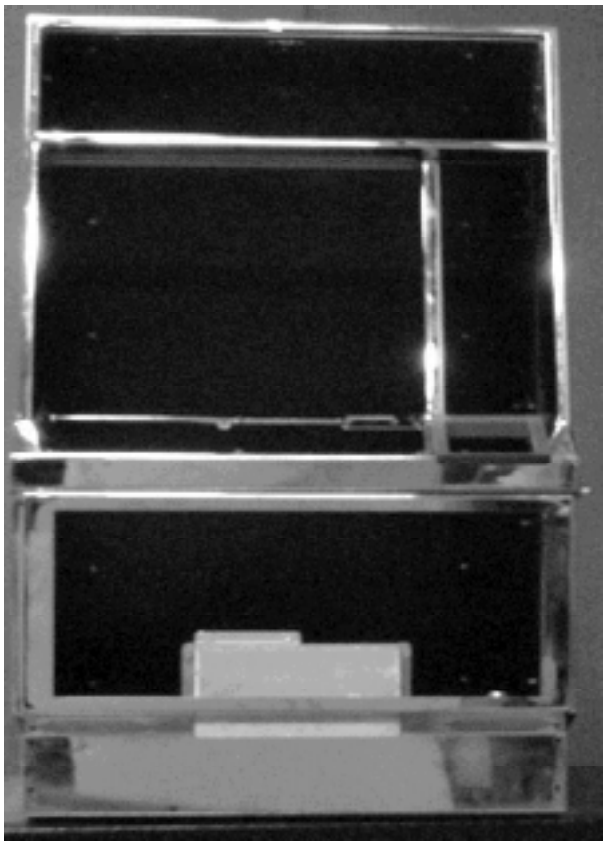



Door Assembly		
Item	Part #	Description
1	2900-04-311/190/235	Door Weldment
2	C-04713-0001	Base, Coin Head, Polished Chrome, 5000-19-041C
3	K-00604-5001	Entry, Chrome, 5¢, AS-5000-19-041K-005
	C-04300-1002	Back Plate, Chrome, 25¢ 5000-19-041Q
	C-04110-1016	Back Plate, Chrome, $1 5000-19-041D

Meter Panel Assembly
AS-2900-04-352K-001

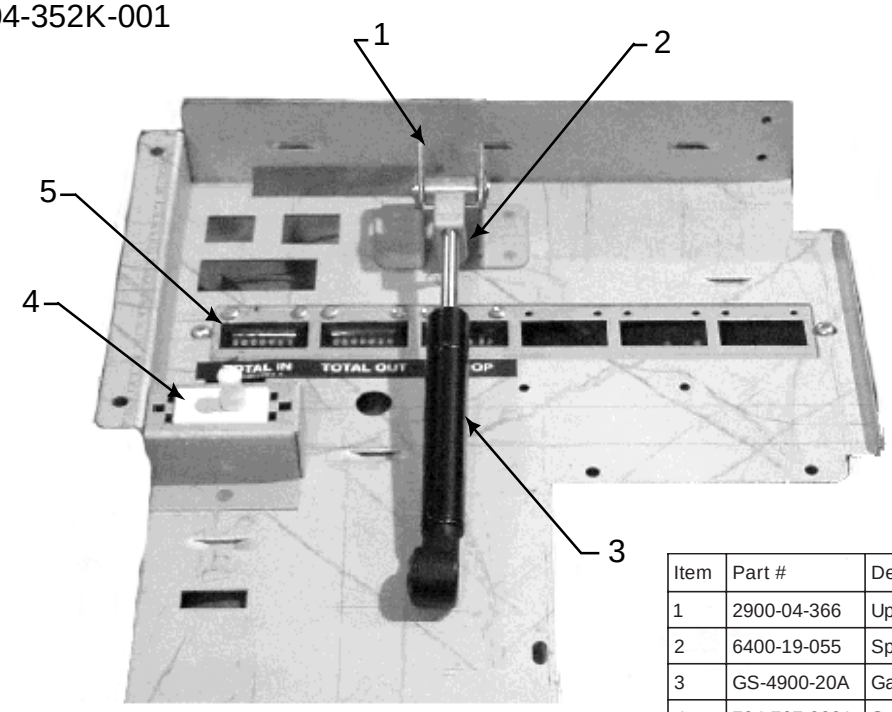

Item	Part #	Description
1	2900-04-366	Upper Gas Shock Bracket
2	6400-19-055	Spring Bracket Gas Shock
3	GS-4900-20A	Gas Spring, 7.5", 20#
4	704-767-0001	Safety Cherry Switch
5	E-00664-0491	7-Digit Meter Assembly

©2000 Bally Gaming, Inc.

Bill Acceptor Housing
6600-17-046

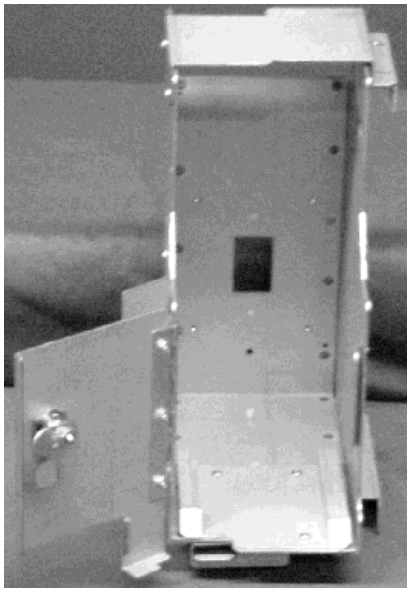

Bezel, JCM S/T & T-Bird M.C. (Green)
5400-16-160



Bill Acceptor Weldment
2900-04-065

JCM Bill Acceptor
E-01100-(series)

PART NUMBER	DESCRIPTION	BALLY GUIDE P/N JCM GUIDE P/N	JCM HANDLE P/N	BALLY BILL BOX P/N JCM BILL BOX P/N
E-01100-0001	BA, JCM WBA-10-SS/XXX-501-03	GJ-04000-0001 052519	058138	E-01100-P003 058134
E-01100-0002	BA, JCM WBA-11-SS/XXX-501-03	GJ-04000-0001 052519	058138	E-01100-P003 058134
E-01100-0003	BA, JCM WBA-20-SS/XXX-502-03	GJ-04000-0002 054625	058138	E-01100-P003 058134
E-01100-0004	BA, JCM WBA-21-SS/XXX-502-03	GJ-04000-0002 054625	058138	E-01100-P003 058134
E-01100-0005	BA, JCM WBA-12-SS/XXX-501-03	GJ-04000-0001 052519	058138	E-01100-P003 058134
E-01100-0006	BA, JCM WBA-13-SS/XXX-501-03	GJ-04000-0001 052519	058138	E-01100-P003 058134

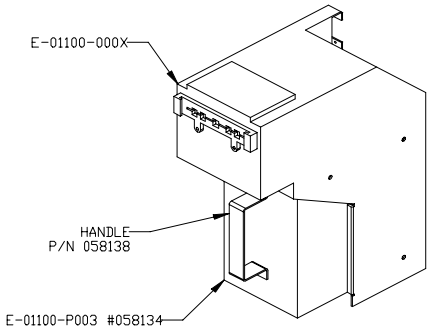

BILL ACCEPTOR TO BE SHIPPED WITH 1 EXTRA
BILL BOX PART NO. E-01100-P003 #058134 TOTAL OF 2

©2000 Bally Gaming, Inc.

ProSlot-6000™

MODULE 7

MK7-S6MOD-9800

PROGRESSIVE OPERATION

©1998 BALLY GAMING, INC. ALL RIGHTS RESERVED

Bally GAMING
6601 South Bermuda Road Las Vegas, NV 89119

Module 7

Progressive Operation

Table of Contents

Introduction 7-3

Hardware Requirements 7-3
Progressive Types 7-3
Machine Configuration 7-3
MPU Configuration 7-3
Backplane Configuration 7-3
Proper Progressive Operation 7-4
Progressive Testing 7-4

Mikohn ChamII+ Stand-alone Progressive. . . 7-5

Bally Kit Numbers and Parts Listings 7-5
Stand-alone Progressive Wiring Diagram 7-5

Mikohn ChamII+ Linked Progressive 7-6
(with in-machine display)

Bally Kit Numbers and Parts Listings 7-6
Linked Progressive Wiring Diagram 7-6

 © 1998 Bally Gaming, Inc.

Module 7
Progressive Operation

Introduction

A Progressive Jackpot represents an amount of money held in reserve, which is paid out for a specific win. The jackpot generally starts at a selected minimum value, and increases by a percentage of the money wagered on the machines connected to the progressive.

Hardware Requirements

Setting up a progressive system requires a controller and a display. The controller is a computer which keeps track of the main and hidden progressive amounts. The controller receives coin-in information from the machine(s) and increases the progressive amount by a percentage of the coin-in amount.

The display is a device which communicates progressive jackpot information to the Player. It can be a large overhead sign or a small display which fits in the top glass of a machine. It is usually constructed of LEDs and may support multiple colors.

Progressive Types

Progressives can be divided into two basic groups: Stand-alone and Linked. A Stand-alone progressive is set up in an individual machine. A Linked progressive consists of a group of machines that share a common progressive jackpot. A Linked Stand-alone Combo usually consists of a linked top award and a stand-alone secondary jackpot. A Wide-area progressive (MAPS) can link machines in several areas of a casino, several casinos in a market, or several market areas to a common jackpot.

When machines are linked to a progressive, they usually will have the same coin denomination and maximum coin-in. Linked machines should also have a similar jackpot hit frequency and payback percentage.

Machine Configuration

Machine options must be configured as follows for most installations. Please consult Module 2 for more information concerning other possible configurations.

OPTION	SETTING	DESCRIPTION
02	0004	Enables the S-6000 for S/MPI operation
07	0001~0004	Designates the number of external JPs
78L	0001~0032	Specifies unique machine ID for controller

MPU Configuration

The S-6000 MPU board must be correctly configured for progressive operation.

Jumper JW8 configures the MPU to accept serial data from the progressive controller via either the RS-232 or RS-485 interface. Pins 2 and 3 select RS-485.

Jumper JW9 enables or disables the RS-485 transmit function. Pins 2 and 3 prohibit machine transmission on the RS-485 Link.

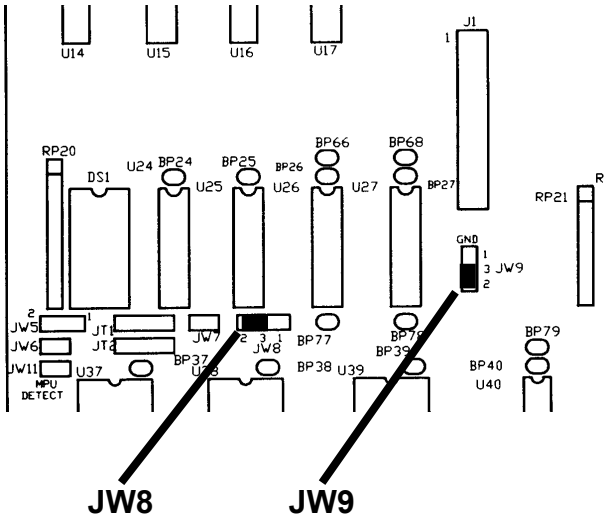

Backplane Configuration

Most progressive systems operate with signals from the opto-coupler installed in socket ISO1 of the backplane. Some progressive systems may communicate via the LINK serial port. Still others may operate through the house system (SDS, MAPS, SAS, CDS, etc.) Consult the manual provided by the manufacturer of the progressive system you are installing for individual signal requirements.

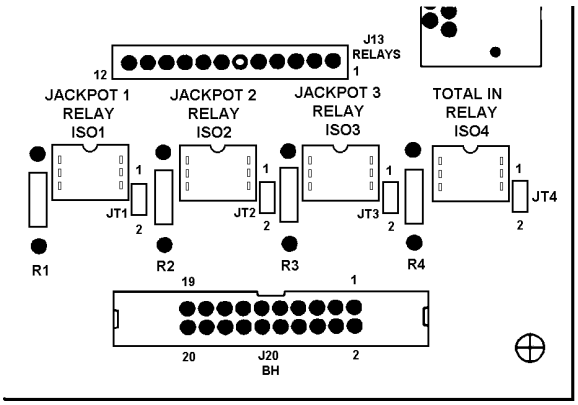

© 1998 Bally Gaming, Inc.

Proper Progressive Operation

When the machine and the progressive controller are connected and programmed correctly, the progressive jackpot will increase by each wager, as shown by the display. The wager required to increment the amount shown on the progressive display depends upon the percentage allotted to the progressive jackpot (incrementation rate).

When the jackpot is won, the machine signals the controller. The controller locks the jackpot until the first coin-in signal from the machine resets it to the starting jackpot amount (base amount).

The progressive controller communicates the amount of the win to the machine which stores the credit value of the win in its internal memory, and transmits the jackpot information to the house system.

Progressive Testing

To test the operation of the progressive, the S-6000 and the integrity of all of the connections, use the following procedure:

1. Enter Diagnostic Test 11 (Option Setting).
2. Scroll through the options with the BET MAX button until Option 80 appears.
3. Change Option 80 from its default setting of 0000 to 0001 by pressing the SPIN button.
4. Enter Diagnostic Test 10 (Payout Test).
5. Select individual reels with the CHANGE button and move the reels with the SPIN button. Center the jackpot symbols on the payline.
6. Use the BET ONE button to change the number shown in the COIN IN display to the maximum allowable wager.
7. Press the SPIN button. The progressive indicates that a progressive jackpot win has occurred by resetting to the starting progressive amount. The value of the progressive jackpot, rounded up to the next whole credit, will be shown in the CREDIT display.

Consult Module 2 of the ProSlot-6000™ Operators Manual for additional troubleshooting information.

 © 1998 Bally Gaming, Inc.

Mikohn Cham II+®
Stand-alone Progressive

Bally Progressive Kits:

K-00721-5513 CHAMII+ 2x12 Mini
K-00721-5517 CHAMII+ 2x12 Micro
K-00721-5525 CHAMII+ 1x12 Mini
K-00721-5526 CHAMII+ 1x12 Micro
K-00721-5527 CHAMII+ 1x14 Mini
K-00721-5528 CHAMII+ 1x14 Micro
K-00721-5531 CHAMII+ 12 Mini/Micro

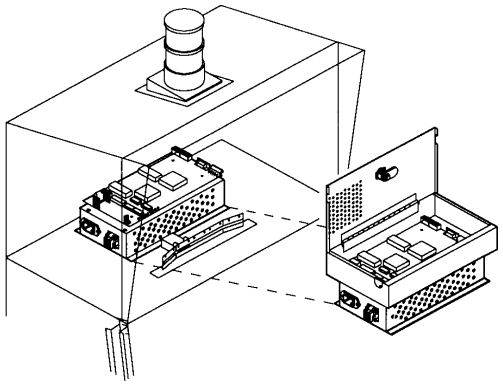

Please consult the following for more information on configuring the Mikohn CHAM II+.

Mikohn CHAM II+ Users Manual
Part # 990-219-00

Mikohn P.S.P. V2.0x
Progressive System Programmer Software
Configuration and User Manual

Mikohn Controller Kit (E-01040-0022)	
(5) AC Power Cable	311-010-22
(6) Power Supply	780-027-50
(7) Machine Cable	311-205-11
(8) CHAM II+ Controller	341-057-00

(#)s refer to the Stand-alone Progressive Wiring Diagram below. (1) is the S-6000 backplane board.

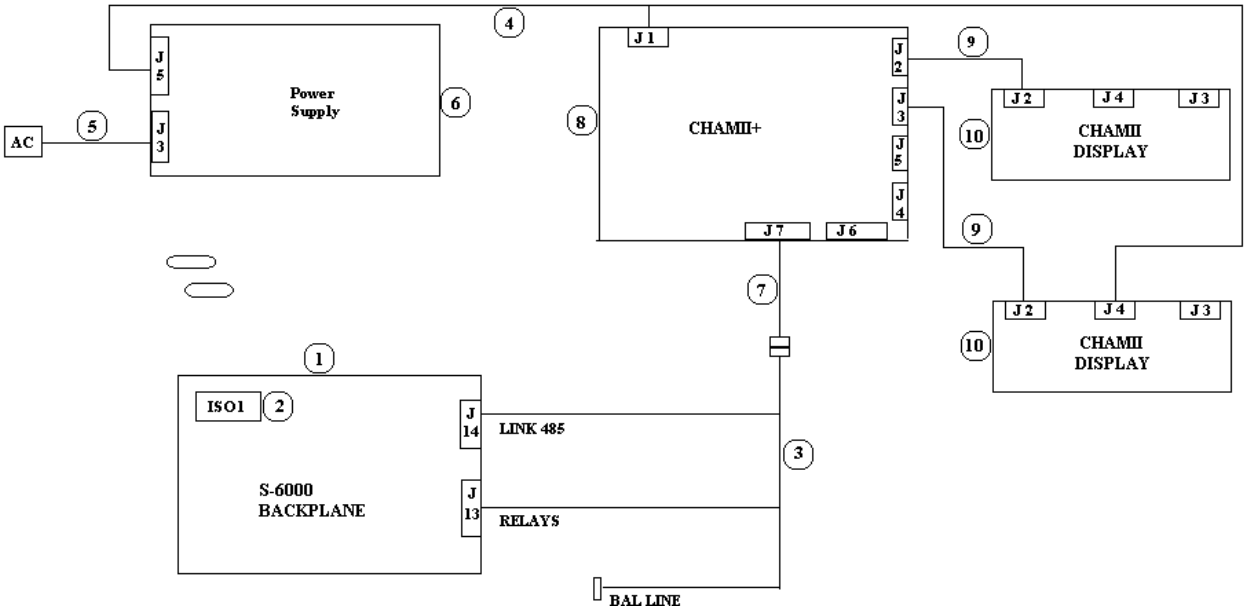

Bally Kit Number	(2) Opto-Isolator	(3) Machine Pig-tail	Controller Kit	(10) LED Display	(9) Ribbon Cable	(4) DC Power Cable
K-00721-5513	E-00620-0662	CBL-30314-0001	K-01040-0022	AS-03110-0025 AS-03110-0025	AS-02988-0226 AS-02988-0226	CBL-30195-0002
K-00721-5517	E-00620-0662	CBL-30314-0001	K-01040-0022	AS-03110-0026 AS-03110-0026	AS-02988-0226 AS-02988-0226	CBL-30195-0002
K-00721-5525	E-00620-0662	CBL-30314-0001	K-01040-0022	AS-03110-0025	AS-02988-0226	CBL-30195-0001
K-00721-5526	E-00620-0662	CBL-30314-0001	K-01040-0022	AS-03110-0026	AS-02988-0226	CBL-30195-0001
K-00721-5527	E-00620-0662	CBL-30314-0001	K-01040-0022	AS-03110-0027	AS-02988-0226	CBL-30195-0001
K-00721-5328	E-00620-0662	CBL-30314-0001	K-01040-0022	AS-03110-0028	AS-02988-0226	CBL-30195-0001
K-00721-5531	E-00620-0662	CBL-30314-0001	K-01040-0022	AS-03110-0025 AS-03110-0026	AS-02988-0226 AS-02988-0226	CBL-30195-0002

© 1998 Bally Gaming, Inc.

Mikohn CHAM II+® Linked Progressive

Both the Linked and the Combination progressives incorporate many of the same components as the Stand-alone progressive.

In its' basic form, the arrangement depicted below provides a progressive link for the top award with an overhead display and a smaller display in each machine.

By properly configuring the Mikohn CON2-A and the Mikohn CHAM II+, the arrangement depicted below will allow a linked top award and a stand-alone secondary award.

Configuration of the S-6000 is the same for any Mikohn progressive installation.

Please consult the following Mikohn manuals for additional information:

CHAM II+ Users Manual -- 990-219-00

CON2-A Users Manual -- 990-010-00

PSP V2.0 Users Manual -- 990-051-00

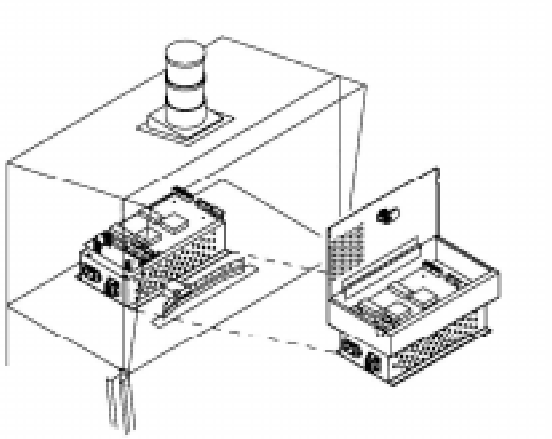

Ref. #s refer to the numbers in the diagram below.

Ref. #	Part #	Description
1	E-00620-0662	Opto-isolator at ISO1
2	CBL-30314-0001	Machine Pig-tail Cable
3	311-010-22	Mikohn AC Power Cable
4	780-027-50	Mikohn Power Supply Assembly
5	341-057-00	Mikohn CHAM II+ Controller
6	311-205-11	Mikohn Machine Cable
7	CBL-30195-000x	DC Power Cable
8	AS-03110-002x	Chameleon II Display
9	CBL-30323-0001	Mikohn SL8 CHAMII+ Cable
10	CBL-30324-0001	Mikohn SL8 Con2A Cable
11	CBL-30325-0001	Mikohn SL8 Link/CHAMII+ Cable
12	AS-02988-0226	Display Ribbon Cable
13	AS-02988-0027	Display Jumper Cable
14	AS-02936-0016	CON2-A Supercontroller
15	AS-02982-0033	12v. Power Supply Module

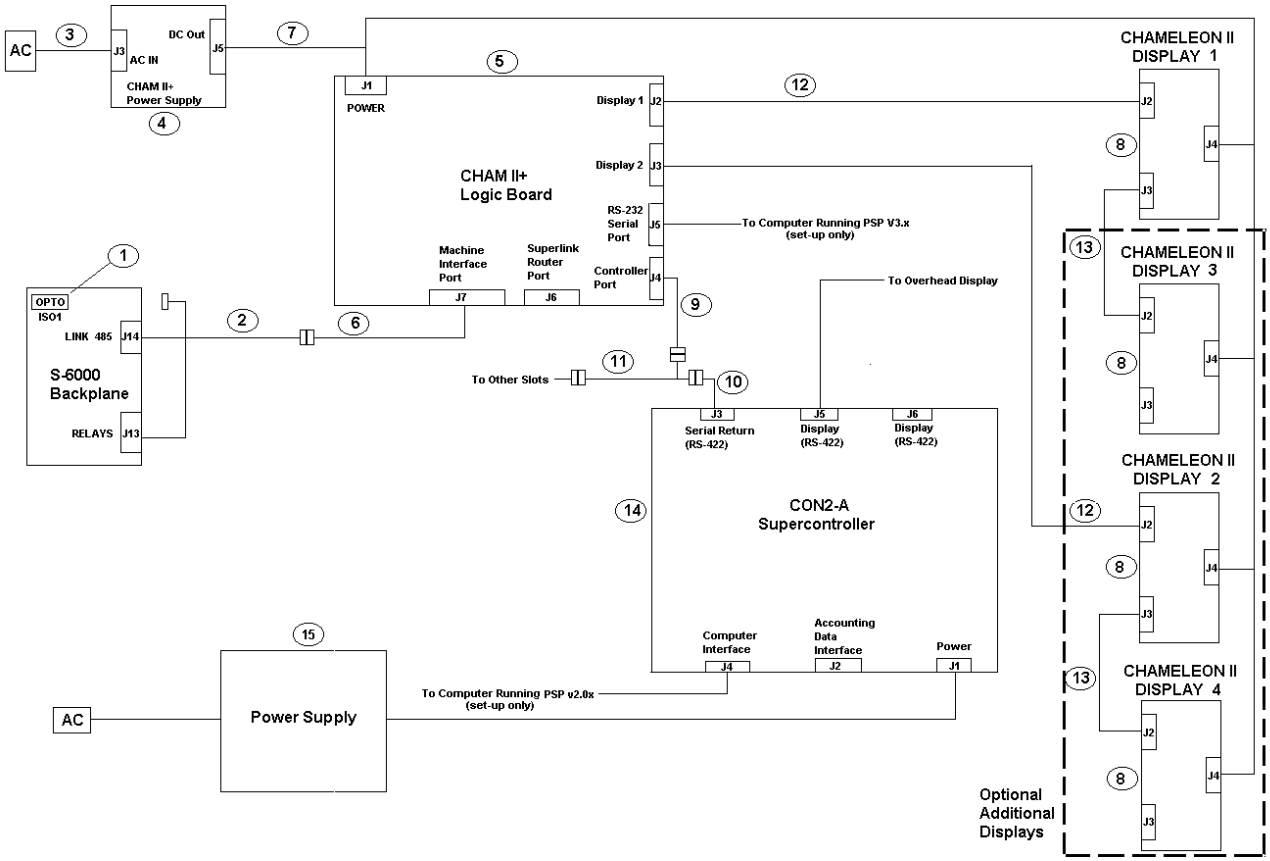

 © 1998 Bally Gaming, Inc.

PERIPHERALS

MODULE 8

MK8-SVMOD-0002

PERIPHERALS

©2002 BALLY GAMING AND SYSTEMS ALL RIGHTS RESERVED

Bally Gaming and Systems
6601 South Bermuda Road, Las Vegas, NV 89119

For Customer Service and information:
+1-702-896-7772 Outside the U.S.
1-877-GO-BALLY (877) 46-22559 in the U.S. and Canada
896-7772 in Las Vegas
FAX: +1-702-896-7710
or visit our website at http://www.ballygaming.com

Module 8
Peripherals Table of Contents

Coin Acceptors 5
Coin Mechanisms, Inc. CC-16 5
Coin Mechanisms, Inc. CC-62 6
Coin Mechanisms, Inc. Micro Comparitor MC 7
Money Controls Condor CN103 8
National Rejectors, Inc. G-13, 0000 9
IDX, X-10 and X-70 X-Mark Xeptors 9
Bill Acceptors 13
JCM® WBA-SS 13
JCM® SENTRY™ - Intelligent Bezel 16
JCM® DBV-200 18
Mars ZT Series 1000 20
Money Controls Ardac WACS 24
Hoppers 25
Bally Gaming and Systems XS-1200 26
Asahi Seiko DH-750 29
Ticket Printers 36
Ithaca Series 70 Impact Ticket Printer 36
Ithaca Series 700 Thermal Ticket Printer 40
Seiko PSA-66 Thermal Ticket Printer 42
Accounting System Interface 44
Accounting System Settings 47

©2002 Bally Gaming and Systems

 ©2002 Bally Gaming and Systems

Coin Acceptors

Coin Mechanisms, Inc. • 400 Regency Drive, Glendale Heights, Illinois 60139-5128 • Toll Free: (800) 323-6498 Phone: (630) 924-7070 Fax: (630) 924-7088 • www.coinmech.com

CC-16

CC-16

Power Requirements: fixed VDC models, 11.5 to 12.5 VDC

Feed Rate: 7 coins per second (models CC-16, CC-62, MC-16):

Designed for coin diameters of .700" (17.8mm) to 1.575 (40mm). Wide Body model recommended for coin diameters up to 1.95" (49.5mm).

Operating temperature recommended: 0º to 60ºC.

Installing the Sample Coin (models CC-16, CC62, MC-16): Looking at the front of the comparitor, slide (without lifting) the sensor coil assembly to the right. Replace the sample coin (or chip) with the desired coin (or chip) and then carefully release. In most cases, the coin (or chip) will automatically seat itself. When properly seated, the coin (or chip) will rest parallel between the sensor coil assembly and between the ribs on the rail insert.

Replacing an Existing Mechanical Acceptor (models CC-16, CC-62, MC-16):

1. Remove the acceptor.
2. Disconnect the coin return linkage.
3. Remove the lockout coil (if used).
4. In some cases, the comparitor mounting studs may need to be relocated to meet manufacturer's mounting specifications.
5. Mount comparitor into equipment, ensuring that coin entry and coin exit are aligned.

Wiring Instructions: The CC-16 printed circuit board requires a 6-pin JST terminated interface. The connector diagram following denotes the typical voltage line pinouts to the printed circuit board:

1. Inhibit input - 12VDC models only
   All other models - Triac load
2. Sense output
3. 48 Volt
4. 24 Volt
5. 12 Volt
6. Ground



Potentiometer Adjustment (models CC-16, CC-62):

Each comparitor is adjusted to give excellent discrimination against slugs. However, some high quality slugs may need a finer adjustment.

1. Adjust potentiometer clockwise (CW) until high quality slug is rejected.
2. Drop good coins to ensure accurate acceptance.
3. Repeat steps 1 and 3 if necessary. For further potentiometer adjustment procedures, call or fax Coin Mechanism, Inc.'s service department and request document #09300072.

Before Turning Power On (models CC-16, CC-62, MC-16):

1. Make sure that all connections are properly insulated.
2. Tuck wire to prevent interference with coin travel or coil armature movement.
3. Check the power cord for firm connection to the PC board.
4. Make sure the comparitor is mounted securely in the equipment.
5. Check the entry chute alignment by inserting the proper coin. The coin should fall freely, without stopping, through the comparitor and reject out of the equipment.

After Turning Power On (models CC-16, CC-62, MC-16):

1. The LED will illuminate when voltage is applied.
2. Drop good coins. They should be recognized by the comparitor and accepted.
3. Repeat step 2 several times to ensure the unit is functioning properly.

©2002 Bally Gaming and Systems

Coin Acceptors (cont.)

CC-62

Power Requirements: Voltage Range, 11.5 to 12.5 VDC.

Designed for coin diameters of .700" (17.8mm) to 1.575 (40mm). Wide Body model recommended for coin diameters up to 1.95" (49.5mm).

CC-62

Wiring Instructions: The CC-62 printed circuit board requires a 7-pin AMP right angle locking connector interface.

1. Ground
2. Coin Sense
3. Error
4. Credit
5. Key
6. 12 Volt
7. Inhibit



Operating Voltage: The neutral or ground (GND) of the voltage source should be wired directly to pin #1 of the printed circuit board.

The hot or positive 12-Volt DC of the voltage source is wired directly to pin #6 of the printed circuit board. These connections now provide the operating voltage to the comparitor.

Two Separate Outputs: When the sensing coils sense a good coin, a pulse is sent out to the host machine. Following this, the accept gate opens, and as the coin passes the LED optics a credit pulse is also sent out to the host machine. Together these two pulses provide optimum security against cheating. The host machine can be configured to recognize a valid coin only when both outputs have been detected.

The LED optics have been positioned such that coins falling edge-to-edge are guaranteed to be accepted without stealing.

Inhibit Feature: The CC-62 has an inhibit feature built-in to its electronics. The unique feature about the CC-62 inhibit is its ability to electronically inhibit the validator without removing power from it, thereby eliminating any power-up time delay. The inhibit condition is accomplished by disabling only the accept coil.

The inhibit line is wired to pin #7 of the printed circuit board.

Coin Sense Output Feature: The CC-62 sends a coin sense output pulse when the sensing coils detect a good coin. This pulse is sent on pin #2 of the printed circuit board.

LED Credit Output Feature: The CC-62 sends a credit pulse from the optics when a good coin has passed. This pulse is sent on pin #4 of the printed circuit board.

Tilt/Error Signal Feature: Another security feature of the CC-62 is its ability to protect against stringing. The optics are positioned in an A-Over-B pattern. This means that a coin must first block then uncover both the top and the bottom optic before a credit pulse is issued. If the bottom optic is blocked before the top, the CC-62 issues a tilt pulse on the tilt/error output line. The error signal, which is on the same output line, is used in the event of a failed or blocked optic. In the event an optic is blocked for a period of more than 1.5 seconds, the tilt/error output line goes low and will remain low for as long as the failed or blocked optic remains.

The built-in tilt/error detection line can be utilized by wiring to pin #3.

Denomination Adjustment: As with any comparitor product it is essential that the proper dampener lever and weight assembly are used for the size coin being validated. For the CC-62 there is an additional adjustment step that is critical to proper operation. This adjustment is to the adjustable guide rail. The adjustable guide rail ensures that a good coin, once accepted, adequately passes the optics as it exits the validator body.

To perform this adjustment, loosen the rail screw on the adjustable guide fail, as well as the elastic nut on the rail support bracket. Position the bottom of rail so that you have the full diameter of the coin's width, plus $^{1}/_{32}$" over. This guarantees proper optic blockage for the size coin being validated. After adjusting rail, make sure to fully tighten the rail screw to hold the adjustment made. Proceed by aligning the tip of the rail support bracket to the end of the rail, then tighten the elastic nut in place.

NOTE: An adjustment gage tool may be purchased from Coin Mechanisms directly by calling the Parts Sales department at (630) 924-7070 and requesting part number #06660003.

©2002 Bally Gaming and Systems

Coin Acceptors (cont.)

Micro Comparitor MC (Replacement for CC-16 and CC-62)

MC-16

Designed for coin diameters of .700" (17.8mm) to 1.47" (37.34mm). Wide Body model recommended for coin diameters up to 1.950" (49.5mm).

Wiring Instructions: The printed circuit board is available with one of two possible connectors. A 7-pin Molex header is used when emulating a model CC-62; a 6-pin JST header is used to emulate both the CC-16 and CC-40.

Operating Voltage: There are two different models offered, a 12 Volt DC only model, and a multi-voltage model which allows for operations from 20 to 40 Volts DC, or 20 to 30 Volts AC.

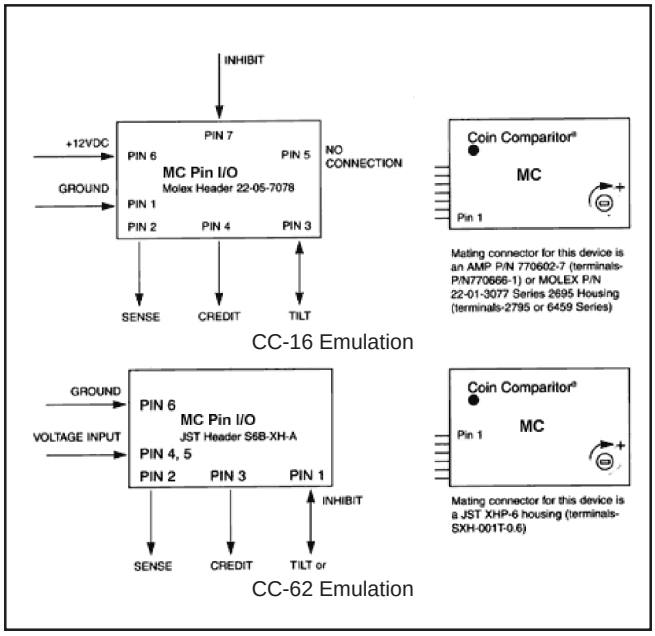

Inhibit Input Feature: The INHIBIT feature is an input which allows you to disable the device without removing power from it. The INHIBIT pin can be configured to accept either a LOW or HIGH level signal to inhibit the device.

Tilt Output: The TILT signal is an output which alerts the machine of a malfunction or tampering of the device. There are different conditions which will generate a TILT signal, and the lengths of the pulses can be changed to accommodate different machine requirements. Additionally, a NULL signal is an internal signal generated when a valid coin passes the sensor coils. If this NULL signal is too long (> 250ms as sometimes occurs when stringing) the TILT line will output a signal. If any of the optics are blocked for 1.5 seconds or longer the TILT line will be active until the condition is corrected. If a coin is detected moving past the optics in a reverse direction (stringing) a TILT pulse occurs. If a coin passes the optics without a matching sense pulse a TILT occurs (note 1). The mechanism will not accept coins when the TILT line is active.

Credit Signal: The CREDIT signal is an output which occurs for every valid coin that is accepted properly through the mechanism. A CREDIT is generated by the internal microcontroller only when a valid sense pulse is matched with a corresponding optic pulse. This close control between the sense signal and the optic signal allows more accurate monitoring of coins through the mechanism. The CREDIT signals are buffered and therefore are fixed in length and duty cycle regardless of coin feed rate.

Sense Signal: The SENSE signal is an output which simply indicates that a valid coin has passed the sensor coils. It is available for those applications requiring a pre-count or verification that valid coins have entered the device.

Bi-Color Status Indicator: The MC-16/40/62 incorporates a bicolor (green / red) LED on its front cover to easily indicate the operating status of the mechanism visually. The LED will be green when power is applied to the device and it is enabled (INHIBIT not active) to accept coins. The LED will be red if the INHIBIT line is active (disable coin acceptance) or if there is no resident coin in place. The LED will also change to red when the TILT line is active (error condition). When the LED is red the device will not accept coins.

©2002 Bally Gaming and Systems

Coin Acceptors (cont.)

Money Controls Money Controls • New Coin Street, Royton Oldham OL2 6JZ United Kingdom • Phone: +44 161-6780111 Fax: +44 161-6267674 • www.moneycontrols.com

Condor CN103

CN103

Power Requirements: Voltage, 12 VDC to 32 VDC

Operating temperature: 0° to 60° C.

Maintainable life of 20 million coins.

Coinage: Accepts coins within the diameter range of .59-1.75" (15-44.5 mm) and the thickness range of .059-.148" (1.5-3.75 mm).

Wiring Instructions:

Connector 1	Pin 1 Inhibit all Pin 2 VACS +6V Pin 3 +12 to 32 VDC Pin 4 +12 to 32 VDC Pin 5 +12 to 32 VDC Pin 6 +0V
Connector 2	Pin 1 Accept (b) NPN generation Pin 2 VACS NPN Pin 3 Alarm Pin 4 Error
Connector 3	Serial Port
Connector 4	LCD display

Alarm: Open collector NPN is activated for 2 seconds with inhibit all. This condition occurs when coins travel in reverse, too slowly or block the opto beams. A continuous yellow LED will result for the duration of the alarm. During this time a pulse will appear on the error pin.

Error: When a critical failure is detected at power up a 500ms pulse will be given on the error line and will repeat every 2 seconds. The LED will flash red and all coins will be inhibited.

Teach and Run™ Programming: Follow these steps to program:



LED Status

- **Select window 1**
- **Press button**
- **Start feeding coins/tokens until**
- **Press button - normal operation**
- **Select security** (see 5.0)

Security: The acceptance window can be adjusted to increase fraud rejection or increase coin acceptance.

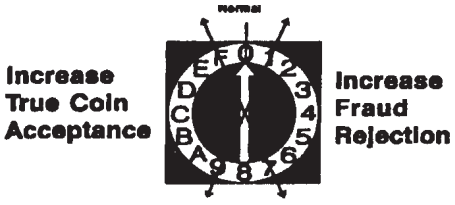

- **Clockwise (Increase fraud rejection)**
- **Anticlockwise (Increase true coin acceptance)**
- **0 (Normal)**

©2002 Bally Gaming and Systems

Coin Acceptors (cont.)

National Rejectors, Inc. GmbH • Postfach 1461 • Buxtehude 21604, Germany • Phone: +49 41 617 290 Fax: +49 41 617 29115 • www.nationalrejectors.com

G-13, 0000

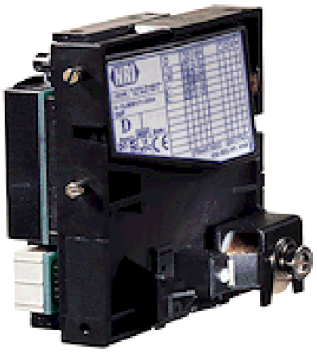

G-13, 0000

Power Requirements: 12 VDC +3/-1 Volts tolerances

Operating temperature 0° to 55° C.

Acceptance: Up to six different coins.

Diameter: between .59” and 1.22” (15 and 31mm).

Thickness of coins: between .059” and .1” (l.5 and 2.6 mm)

Dimensions: Height 4” (102 mm) Width 3.5” (89 mm) Depth 2” (52 mm)

Temperature range: 0° C up to +55° C

Coin inhibit: A common blocking line for all coins is available. Single coin inhibit may be achieved by DIP switches on the G-13.

Measuring principle: Three inductive sensors are arranged to detect material, thickness, diameter and embossing of coins as they pass. The passing coin activates the sensors, providing different voltage measuring values. These voltages are digitized and processed within the microprocessor.

Programming of acceptor: A standard computer (IBM PC or compatible) allows programming of the acceptor for any coin acceptance. Programming means just the insertion of a coin which should be accepted. Please refer to the document “Use of program PROEMP.”

Wiring
1. Ground
2. +12 VDC
3, 4, 7, 8, 9, 10. Coin Signals*
5. N.C.
6. Coin Inhibit



Wire Insertion View

*Coin Signals: <.07 volts active low / 150 mA Open collector NPN. I max = 150 mA, Umax = 35 volts. Time of pulses: 100 msec +/- 10%.

IDX, Incorporated • 400 W. Cedar St. • El Dorado AR 71730 • Ph: (800) 643-1109 FAX: 870-862-3472 • http://www.idxinc.com

X-10 and X-70 X-Mark Xeptors

X-10 X-Mark Xeptor

The X-10 and X-70 X-Mark Xeptors are multi-coin acceptors which can be field programmed to distinguish and accept any of up to six coins or tokens. Multi-coin acceptance offers the possibilities of mixing promotional tokens with standard tokens, accepting older tokens with new tokens in the process of change-over, or replacing expensive (4x) hopper fill real currency with economical tokens. Precision diameter measurement totally eliminates shaved coin acceptance problems. Its built-in multi-color indicator LED provides operational status and field diagnostic information. Its novel Personality Plug modules ensure plug compatibility in field retrofit applications.

X-70 X-Mark Xeptor

Features:

- Distinguishes and accepts any of up to six different coins or tokens.
- Reads multiple X-Mark codes and optionally detects the presence of SmartMark.
- Diameter ranges: X-10: 0.650" to 1.490" (16mm to 38mm), straight drop configuration, X-70: 1.330" to 1.950" (34mm to 49mm) reverse drop configuration
- Actually measures coin diameter to +/-.005" typ (X-10), +/-.007" typ X-70).
- Measures metal alloy 3 ways.
- Accepts up to 16 coins per second (X-10), 10 coins per second (X-70).
- Slide on access covers shed spilled liquids.
- Built-in coin release and opening coin chute.

©2002 Bally Gaming and Systems

Coin Acceptors (cont.)

- New coin types can be field programmed without extra equipment.
- Multi-color indicator LED for operational status and field diagnostics.
- Universal electrical interface compatibility with existing legacy machines and new machines via Personality Plug modules.

LED Status Indicator

- No light indicates no power. Plug it in, check your wires, check your power supply. Verify your Personality Plug.
- Solid green means normal operation for either switch position 0 (Run) or switch positions 7 to F (Field Test).
- Green with short red flash means the unit is normally operating and is secured from coin programming without using the X-Key. This is available starting with V3.0r firmware.
- Solid red is normal in switch positions 1-6 for coin programming. A red flash during coin acceptance indicates credit has issued.
- Alternating red-green means that the unit has detected some sort of malfunction. See Field Test to diagnose.
- Blinking yellow means Inhibit. It is inhibited from acceptance in switch position 0 ,inhibited from coin programming in switch positions 1-6, and Credit Optics not available in switch position 8.

Personality Plugs



Personality plugs are small connector conversion modules about as big as the last segment of your little finger. They are used to convert the 8-pin header in the Xeptor to any of many available connector styles and pin assignments common in the industry. For example, there is one personality plug type for each of the older Coin Mechanisms CC-series acceptors and the NRI multi-wire output acceptors. Additionally, many have been designed to meet the needs of specific OEMs, including such things as simulation of OEM credit optics module signals. Other special interface requirements are easily satisfied with new Personality Plugs designed specifically for the job. With the correct personality plug installed in an Xeptor, retrofit installation requires no machine connector rewiring. The tables below can help in deciding which personality plug to use. Refer to the Electrical Specifications table following for each pin definition.

Personality Plugs Table

Personality Plug Model	PP16	PP16IC	PPUNI	PPNRI-6	PPNRI-3
Compatibility Connector	CC-16 JST-6	CC-16 12V JST-6	Universal JST-6	NRI 10pin IDC	NRI 10pin IDC
Pin 1	1K to Gnd.	Inhibit	Inhibit	Ground	Ground
Pin 2	Sense	Sense	/Coin Optics	12VDC	12VDC
Pin 3	48 VDC/AC	----	----	/Output5	----
Pin 4	24 VDC/AC	24 VDC/AC	24 VDC/AC	/Output6	----
Pin 5	12 VDC	12 VDC	----	Coin Return	----
Pin 6	Ground	Ground	Ground	Inhibit	Inhibit
Pin 7				/Output1	/Output1
Pin 8				/Output2	/Output2
Pin 9				/Output3	/Output3
Pin 10				/Output4	----

Electrical Specifications

SIGNAL	ELECTRICAL CHARACTERISTICS (Note: Pulse widths programmable via "P" command on serial port)
INHIBIT	Inhibit = float or >3.5VDC, Enable = < 1.0VDC
SENSE	Active high 32ms pulse, PNP 12V pull-up 10mA max, 3.3K pull-down.
/SENSE	Active low 32ms pulse, NPN sinking 10mA max, 47K 5V pull-up.
/CREDIT	Active low 32ms pulse, NPN sinking 10mA max, 47K 5V pull-up.
/TILT	Active low >32ms pulse, NPN sinking 10mA max, 47K 5V pull-up.
/OUTPUT-n	Active low >32ms pulse, NPN sinking 10mA max, 47K 5V pull-up.
RELAY	Relay contact terminal. 40V 0.2A peak rating..
/Coin Optics	Wire-OR optics output enable, 100ms low pulse, 100K 12V pull-up.
48VDC/VAC	Power input 38 to 55VDC, 38 to 55VAC, 35mA max @idle.
24VDC/VAC	Power input 14 to 32VDC, 16 to 32VAC, 35mA max @idle.
12VDC	Power input 11.5 to 16VDC, 25mA max @idle, 240mA accept gate.
1K to Ground	1K 1W resistor to circuit ground. (for triac holding current)
Ground	Circuit common.

Field Tests and Diagnostics

The normal operation mode of the Xeptor is with the rotary switch position #0 where the LED is green. If the LED is flashing yellow, it means that the Xeptor is inhibited. This can be caused by an external control line such as from a door switch or otherwise as controlled by the machine that it connects to. It may also (although less likely) be caused by improper setting of the Inhibit bit in the SysConfig control byte. If the LED is alternating red-green, it indicates a malfunction has been detected. Some malfunctions can be corrected in the field.

Gate Relay Test (rotary switch #0): Press the test button to activate the gate relay. If it does not activate, it may be physically obstructed or its wire unplugged. This would be one cause for rejection of all coins.

©2002 Bally Gaming and Systems

Coin Acceptors (cont.)

Inductive Metal Sensor Tests (rotary switch #E, #F): Turn the rotary switch to positions #E and #F to test the inductive sensor. Normal LED color is green. A red color most often indicates either there is metal in front of the inductive sensors or that the flat cable going to the small sensor housing has been unplugged.

Diameter Optics Sensor Tests (rotary switch #B, #C, #D): Turn the rotary switch to positions #B, #C, and #D to test each of the three diameter through-beam optical sensors. Normal LED color is green. A red or orange color most likely indicated either there is an object or dirt blocking one of these three sensors and cleaning of the coin cute is required, or that the flat cable going to the small sensor housing has been unplugged.

X-Mark Code Optics Sensor Calibration (rotary switch #9, #A): Fold a piece of white paper twice (to 4 thicknesses) and insert it into the center of the coin chute. Turn the rotary switch to position #9 (rear side optics) and press the test button. The unit will use information gathered to calibrate the sensitivity of its reflective sensors for reading the X-Mark optical code on tokens. The LED should be an orange color after calibration. Repeat for switch position #A (front side optics). When you remove the paper, the LED should be green in both of the switch positions.

Credit Sensor Test (rotary switch #8): The credit optics (if installed) are located just above and below the gate relay rake. If they are not installed the LED will flash amber to indicate that the credit optics were not detected at power-up. If they are installed, the LED is normally green for proper function, and will become orange to red as they become blocked by dirt or other obstructions.

Memory Test (rotary switch #7): Turn the rotary switch to positions #7 to test the validity of memory. Normal LED color is green. A red color indicates that memory is corrupted. It may be possible to correct this by relearning the coins. If not, the memory chip is defective.

Auto Reporting

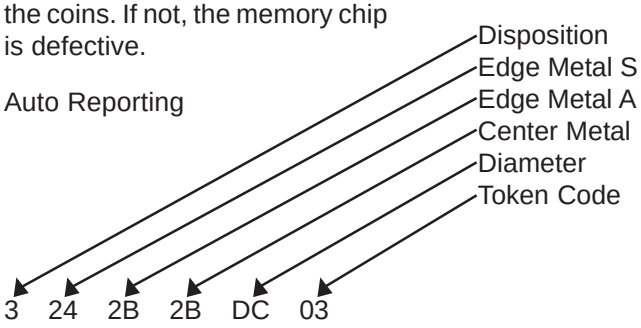

Auto report from a coin matching coin memory #3. The coin has the same edge and center metal, a diameter of 1.464" and an X-Mark code of 03.

The Xeptors will not "speak unless spoken to" except when a coin has been deposited. The Xeptor will automatically report the disposition and sensor readings taken from each coin when the analysis is complete and the SENSE pulse has been issued. If internal credit optics are installed, a subsequent report on slow or reverse coins may additionally occur. The auto report message consists of 6 data bytes in ASCII Hex format.

Report Command

The "R" REPORT command produces a list of all the critical operational parameters of the Xeptor (see example following). In the first line, the software version is identified and the ID# of the unit is reported. The next eight lines report the detail contents of each of the six coin memories. The bits of the options byte are defined in the following table:

Example Configuration Report and Coin Auto Report Messages.

```
Xeptor 30 (d) ID#: 1F5E -Firmware version and ID#
Coin Memory: 01  02  03  04  05  06
Coin Pulses:   0D  01  00  01  00  00
Token Code:    00  00  00  03  00  00
E-Metal S:     26  24  00  24  00  00
E-Metal A:     2E  2C  00  2C  00  00
C-Metal A:     2E  2C  00  2C  00  00
Diameter:      D9  DA  00  DC  00  00
Options:       01  01  00  81  00  00
Thresholds:    05  07  03  06  03  05  08  00  00
Tank Calib: 47 Tank Now:   47   51
Sys Config: 08 Tilt Time 1/3 sec:     09
Credit ms: 20 Divert Dly/Pls ms:      10  50
2  23  2D 2C  D9  00
2  25  2C 2C  DC  00
2  24  2C 2D  DA  00
4  24  2D 2D  DB  03 - Distinguished by X-Mark from #2
D 35  3E 3E  1E  00 - Failed on diameter
2  23  2D 2C  D9  00
2  25  2C 2C  DC  00
M 2A  30  30  DA  00 - Failed on edge metal
4  25  2C 2C  DC  03
4  24  2C 2D  DA  03
4  24  2D 2D  DB  03
U 26  2D 2E  D6  00 - Unwanted close slug for #2
U 27  2E 2D  DA  00 - Unwanted close slug for #2
I  00  00  00  00  00
I  00  00  00  00  00 - Xeptor inhibited
I  00  00  00  00  00
2  23  2D 2C  D9  00
2  25  2C 2C  DC  00
2  24  2C 2D  DA  00
S 00  00  00  00  00 - Coin took too long in coin chute
R 00  00  00  00  00 -  Wrong exit after credit issue.
4  24  2C 2D  DA  03
4  24  2D 2D  DB  03
2  23  2D 2C  D9  00
2  25  2C 2C  DC  00
2  24  2C 2D  DA  00
4  24  2D 2D  DB  03
```

Note: The internal sequence for parameter checking is 1.) diameter, 2.) code, 3.) edge metal-S, 4.) edge metal-A, 5.) center metal. Coin memory is checked in the order of 1-6 for a match.

©2002 Bally Gaming and Systems

Coin Acceptors (cont.)

The “Thresholds” line shows the sensitivity levels set for the 4 X-Mark optical sensors, the three diameter optical sensors, and the two credit optics sensors. These values will be between one and eight normally. The “Tank Calib” line shows the value of the inductive sensor reading when the last “learn” was performed, and what it is now in two different configurations. These should be in the 40s or higher. The “Sys Config” byte will normally be 00 for “inhibit low” and 80 for “inhibit high” on the Inhibit input line. The remaining timing values should be self explanatory.

View the Report Screen: Send the “R” command to see the coin data stored in memory and the operating parameters for various sensors and the timing of the credit pulse and other signals.

Change Inhibit Line Logic|: Xeptors have a hardware inhibit line that is used to prevent acceptance of coins even when power is applied to the unit. When inhibited, the Xeptor LED will flash amber color to indicate the inhibit state. Send the “I” command to change to “inhibit high” or send the “i” command to change to “inhibit low”. After doing so, you must send the “S” command to save the new configuration to nonvolatile memory.

Change Credit Pulse or Tilt Timing: The “Pccddddtt” command is used to change the output credit pulse width (cc), the diverter output option delay and pulse width (dddd) and the tilt time. Assuming you do not have a diverter option and you would like the credit pulse to be 34ms (22 hex) and the self inhibit after a tilt to last four seconds (12/3 sec Þ 0C hex) then you would enter the command “P2200000C”, followed by the “S” command to save the new configuration to nonvolatile memory.

Increase X-Mark Code Reading Security: Use this command to cause the Xeptor to increase the X-Mark reading security (have higher standards for acceptance) to knock out tokens which may have minted text or graphics which may, at least in part, mimic X-Mark facet reflections (only V3.0p or after). Bits 4 and 5 in the SysConfig byte control the X-Mark reading security features. Assuming that the inhibit logic is set for inhibit high (stored in bit 3 of SysConfig) and you wanted to set both X-Mark reading security bits (which raise the signal threshold level and require the mark be seen on both the leading and trailing edge of the coin), you would send the command “s38” followed by the “S” command to save the new configuration to nonvolatile memory. If you additionally wanted tighter metal alloy tolerance, use “s78”.

Thickness and Diameter Adjustment: The X-10 Xeptor significantly raises the ability to measure and discriminate between coins through precision optical diameter measurement sensors, edge and center of coin metal alloy measurement, and X-Mark optical sensors to read minted-in codes on the surface of the coin. To benefit from these new measurement capabilities we must also do a little better in coin position control than formerly required when only metal alloy was being measured. One cannot expect imprecise coin position control to allow precise and repeatable measurement of the coin properties any more than one could expect an accurate measurement of the length of a fish if you won’t put the ruler up against the fish.

Thickness Setup: Figure 1 of the X-10 Xeptor is a side view showing a series of eight holes and a sliding adjustment with a detent that centers itself over one of the selected holes. The dimensions referring to each of the eight holes is the chute thickness achieved at each position of the sliding adjustment. A good rule of thumb would be to set the adjustment for .010" to .020" more than the thickest coin in the intended coin set.

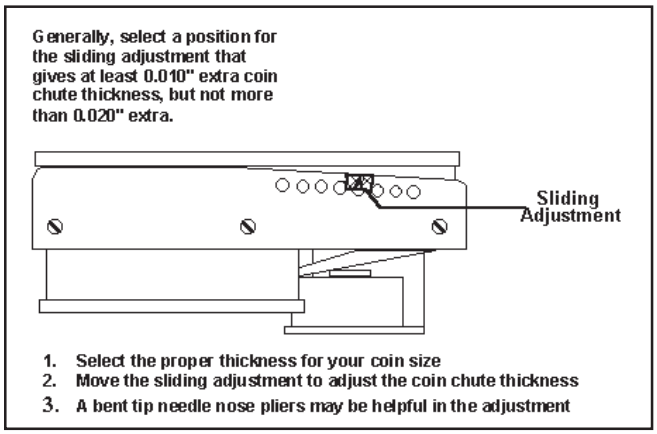

Figure 1

Diameter Setup: To control coin centering over the optical and inductive sensors, install the appropriate pair of clip-on coin chute edge guides as shown in Figure 2. The resultant coin chute width should be no more that about .060" wider than the coin if it has X-Mark codes. Without X-Mark codes, it may be as much as .23" wider. A single drop of silicone adhesive is recommended on each to ensure they are not accidentally knocked out.

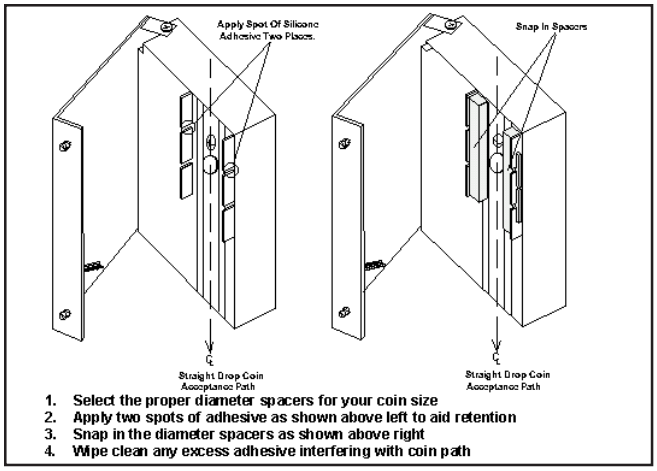

Figure 2

©2002 Bally Gaming and Systems

Bill Acceptors

JCM American Corporation • 925 Pilot Road, Las Vegas, NV 89119 • Tel: (702) 651-0000, Toll Free: (800) 683-7248, Fax: (702) 644-5512 • www.jcm-american.com

JCM® WBA-SS

WBA-SS

Power Requirements: Voltage Range, 95 to 135 VAC with power supply 50 to 60 Hz, or 12 VDC max 20 VA.

Magazine capacity 600 notes.

Operating temperature recommended 0° to 45° C.

Adjustable Bill Slot: The WBA-SS has the ability to read a wide range of bill sizes. Four adjustment guides are available for bills that are 65 mm to 80 mm wide (Figure 1).

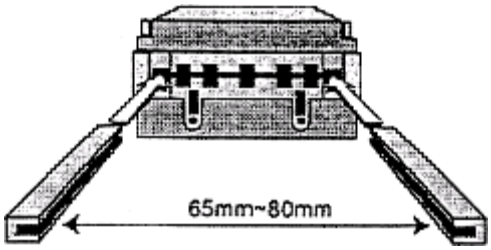

Figure 1

Collecting Bills: Collect bills by pressing the release lever and pulling the stacker box towards you (Figure 2).

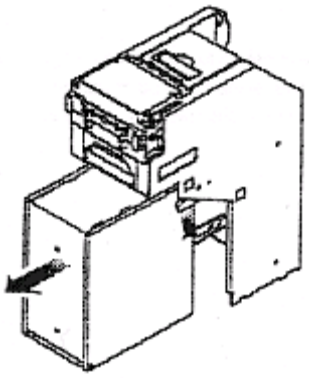

Figure 2

Open the stacker box cover and remove the bills inside (Figure 3).

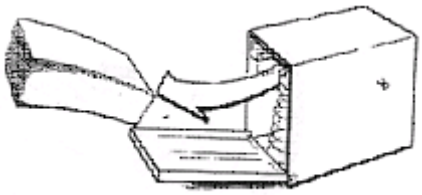

Figure 3

Bill Jams: Remove jammed bills from the bill head by moving the release catches on both sides of the head towards you. Open the acceptor head to access the jammed bill (Figure 4).

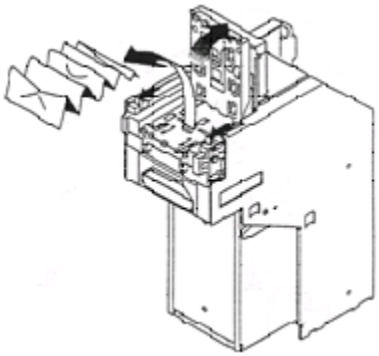

Figure 4

Remove jammed bills from the transfer area by pulling the access lever and opening the top cover (Figure 5).

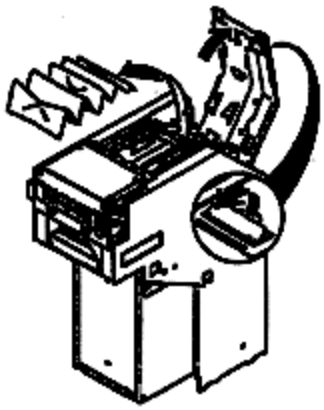

Figure 5

Occasionally, a bill jams near the inlet of the stacker box. Push the release lever of the stacker box and remove it to access the jammed bill (Figure 6).

©2002 Bally Gaming and Systems

Bill Acceptors

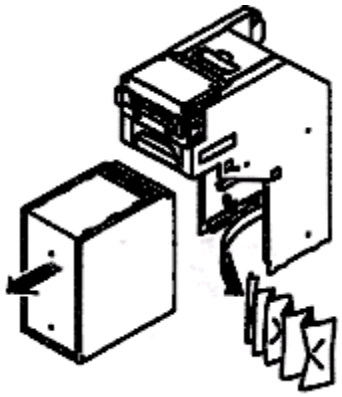

Figure 6

Interface: The WBA-SS uses an ID-003 interface. The ID-003 interface is a bidirectional serial interface. The machine is able to receive status reports from the WBA in response to appropriate commands (Figure 7).

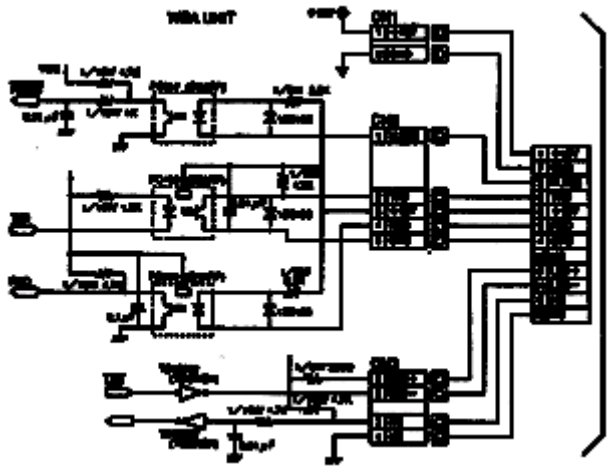

Figure 7

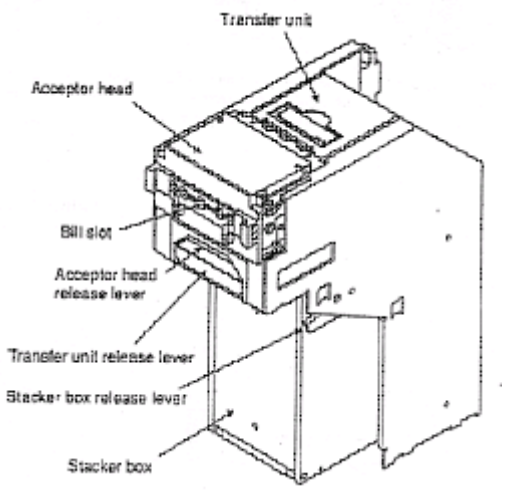

Component Identification

US dollar ($) DIP Switch Settings

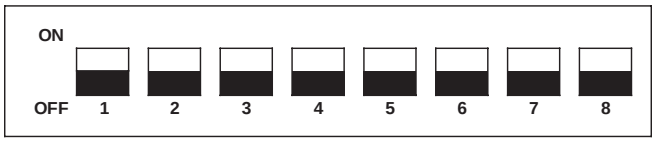

WBA-10/11/12/13 ID-003

SW-1	SW-2	SW-3	SW-4	SW-5	SW-6	SW-7	SW-8
DIR	$1	$5	$10	$20	$50	$100	OFF

(DIR) "ON": 2-WAY ACCEPTANCE {IF WITHIN FIRMWARE}
"OFF": 4-WAY ACCEPTANCE {IF WITHIN FIRMWARE}

Troubleshooting

Description	Probable Cause	Possible Solution
Bill Rejection	DIP switches not set properly	Set DIP switches
	Roller and/or belts are excessively dirty	Clean head and rollers with mild soap and water solution
	Denomination disabled on game	Check game options
	Credit limit not set properly on game	Set credit limit for proper acceptance
	Cashbox is full, or not installed properly	Check and verify cashbox condition
	Sensors out of calibration, unit not calibrated after software upgrade	Calibrate unit using proper procedures
		Check for proper software/ID prototol
No Activity	No power to the unit/No LEDs visible	Check Power source, pins, wires and connector
	Will not start acceptance procedure/cycle	Check for proper software usage/ID protocol
	Cycles, but will not accept bills	Check for proper DIP switch and game settings
	Acceptor in an error status	Run standalone test to verify
	BAD CPU board, no lights on CPU board	Replace CPU board, or change out unit
	Unit out of calibration	Calibrate unit using proper procedures

Stand-alone Test Mode

Accomplish this function by applying power to the unit's transport and head only.

NOTE: Perform this test outside the game using an extension harness, or power supply hookup.

- Remove power.
- Prior to starting, set the DIP switches. Place DIP switches 1, 2, 3 and 8 in the ON position.
- Apply power.
- Turn DIP switch 8 OFF. The unit should cycle briefly.
- The unit is now ready for the test.

©2002 Bally Gaming and Systems

Bill Acceptors (cont.)

- Insert a known bill/note.
- The bill/note will either go completely though, or be rejected.
- If the bill/note rejects, check calibration. Recalibrate if necessary. If the unit still rejects, there is a possible sensor problem, or incorrect software version. See Bill Return Codes.

NOTE: Verification that the unit is function properly can be done while in test mode.

- If the acceptor does not take the bill/note, check for power.
- When the unit cycles on power ON, this indicates power and forward motor operation.
- When a plain piece of paper is inserted and rejected, this indicates reverse motor operation.
- When various denominations of bills are inserted and accepted, this indicates the bill was successfully matched against the characteristics of the software.

Bill Return Codes

# of Blinks	Description	Possible Cause
1	Crooked insertion	WBA-10, 11, 12, 13 sensor PT1 or PT2 not working WBA-20, 21, 22, 23 sensor PT3 or PT4 not working Bill inserted crooked
2	Magnetic pattern error	Dirty rollers/belts Bad mag sensor PCB
3	Entrance sensors bypassed	Sensor other than PT1 and PT2 or PT3 and PT4 detected the presence of the bill/note while in standby
4	Dark-light ratio is below the fixed value	Reflective sensors may not be working
5	Bill not detected	Bill/note not detected by a sensor within a specified period HPC, HPL, HPR or feed in sensor
7	Photo sensor error	Bill/note may have a pattern not programmed or recognized in memory
8	Photo level error	The bill note may be dirty Overlapping bill/notes detected
9	Illegal bill/note	The bill/note does not fall into the range of acceptable bill/notes in program
11	Stacker level problems	Solenoid not working Sensor may not know position of the stacker lever
12	Timing error	The timing is degraded between the sensors that track the bill/note movement
13	Bill/Note length error	Bill/note is torn Registration on bill/note is too short
14	Color pattern error	Color pattern on the bill/note is incorrect

Auto-Calibration - Sensors

Description: Calibration sets a starting reference point for all optical sensors within the unit. This can be done at the host unit, or at the work bench with just a power source.

When to Calibrate:

- After the acceptor's components have been disassembled for repair.
- After a sensor board has been replaced.
- Whenever bill/note acceptance is degraded.
- During scheduled preventative maintenance (see Module 4, Periodic Maintenance)
- When upgrading/downloading software.

Procedure:

1. Remove transport unit with head.
2. Set DIP switches 5, 6, 7, and 8 to the on position, all others to the off position.
3. Connect transport unit with head to a power source - either the host machine, or adaptive power supply.
4. Listen for activation of the transport motor - forward and reverse for up to two seconds, then stop - READY.
5. After inserting the calibration paper, black paper first, the unit will carry the paper forward/reverse several times. When the process is complete, the unit will return the paper.

NOTE: Calibration paper may be purchased from JCM American directly by calling the Parts Sales department at (702) 651-3445 and requesting part number #501-000032.

6. Wait a few moments to allow for complete transfer of calibration data to be stored in memory. This is indicated via the LED on the test harness, or the bezel light on some applications with fast blinks.
7. Unsuccessful calibrations: Check the lenses. Retry calibration. If necessary, refer to the Error Conditions table following. Additional testing/troubleshooting may be required.

NOTE: Recalibration is required after installation of a new CPU.

Bill Acceptors (cont.)

Auto-Calibration Error Conditions Table

Look at the indicator LED connected to the test harness, or the bezel light. If the LED blinks from one to 11 times at $^1/_2$ second intervals, an error exists.

Count the number of blinks and match the table following. If a count was missed, it will repeat after a one-second pause.

# of Blinks	Error Found During Calibration
1	Entrance Lever Error
2	Solenoid Error
3	Entrance Sensor Error
4	Transport Jam
5	Gain Error - White or Black Level
6	Digital/Analog Error
7	Bar Code Sensor Error
8	Acceptor Head Error
9	Magnetic Setting Error
10	Write-In Error
11	Black Level Error

JCM® SENTRY™ - Intelligent Bezel

SENTRY™ Intelligent Bezel

The SENTRY bezel attaches to the WBA bill acceptor to provide both the machine user and slot technicians improved information about the operation of the bill acceptor.

For the slot user, the SENTRY has an animated display of green arrows on the bezel platform going into the bill acceptor that shows the unit is ready to accept bills or barcode coupons. While it is validating a bill or coupon, the arrows move from side-to-side. It also displays the denominations currently acceptable by the bill acceptor on the platform. The last bill entered is identified by the appropriate denomination light changing to orange.

When there is a problem requiring immediate attention, a flashing blue icon of an ambulance blinks on the front of the bezel and the bill acceptor shuts down. If a red icon also lights up, this gives the slot technician more specific information about the problem. On the standard bezel, the icons are a key, a crossed circle, an eye, and a crossed hammer and wrench. There is also a large JCM logo, which indicates the cashbox is full when lit.

Dimensions: 55 mm x 114 mm x 30 mm.

Note Acceptance: Accepts notes from 67 mm to 81 mm.

Features:

- Clearly indicates acceptor status, using graphic icons.
- Shows currently enabled denominations and/or bar code.

- Displays denomination of last-inserted bill.
- Runway light pattern indicates “Ready” (front to back) or “Processing” (side to side).
- Brilliant blue trouble light is easily visible from a distance.

 ©2002 Bally Gaming and Systems

Bill Acceptors (cont.)

- Easily installed as a retrofit on most machines.
- Low-cost, low-maintenance design.
- Controlled directly by the bill acceptor - no changes to game software necessary.

Installation Instructions

1. Remove the transport from the frame.
2. Remove the existing faceplate by opening the WBA transport and removing two screws. Disconnect the 4-wire harness from the transport (Figure 1).

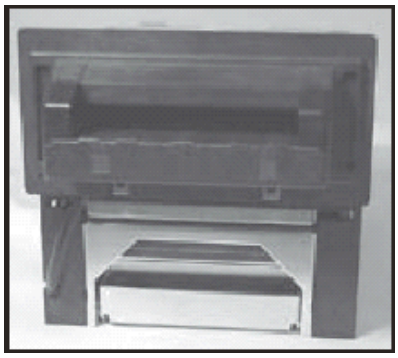

Figure 1

3. Disconnect the existing wire harness (Figure 2), then remove the two screws securing the connector on the rear of the transport.

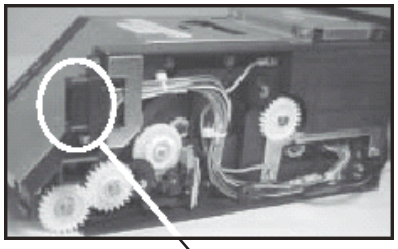

Figure 2

4. Install the new wire harness, including the 3-wire connector going to the new faceplate. Secure the rest of the wires in the same manner as before.
5. Attach the 3-wire connector to the back of the circuit board (Figure 3).



6. Slide the circuit board into the SENTRY faceplate (Figure 4).
7. Push the faceplate down the front of the transport.
8. If desired, attach the SENTRY bezel to the WBA with the two supplies supplied in the kit.

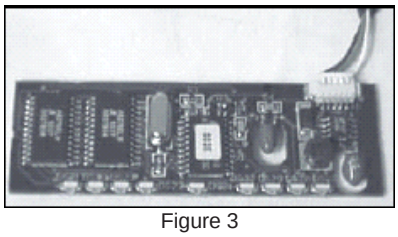

Figure 3

9. Replace the transport in the frame (Figure 5).

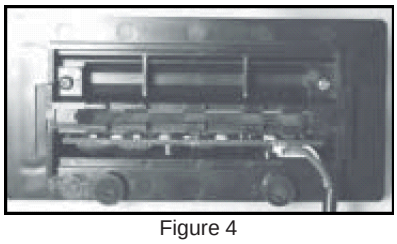

Figure 4

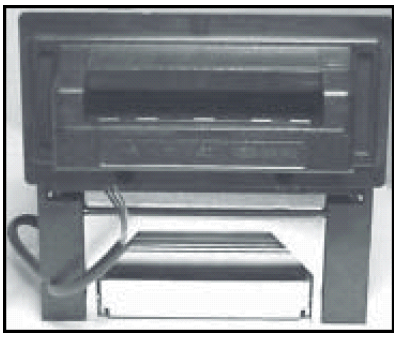

Figure 5

Troubleshooting

When there is a loss of communication between the bill acceptor and the machine, a flashing blue icon of an ambulance blinks on the front of the bezel and the bill acceptor shuts down. If one of the four red icons light up with the flashing ambulance, it indicates a specific problem and the bill acceptor will shut down.

The following table details what the icons indicate when they light up along with the blue icon:

Icon	Message
Key	Problem with the cashbox. Someone with access to the cashbox must handle this problem.
Crossed Circle	ROM verification error, or a jammed motor. The bill acceptor will have to be returned to the manufacturer for repairs.
Eye	Possible cheat attempt. If the eye illuminates by itself, the WBA has rejected several bills in a short period of time. This will NOT disable the bill acceptor, but could mean calibration or cleaning is needed.
Crossed Hammer and Wrench	Minor error condition that can be repaired at the location.
JCM Logo	Cashbox is full.

©2002 Bally Gaming and Systems

Bill Acceptors (cont.)

JCM® DBV-200

Power Requirements: 12V DC.



DBV-200

Features:

- **4-way or 2-way acceptance of old and new bank notes, by DIP switch selection.**
- **4-megabit memory**
- **Automatic calibration**

US dollar ($) DIP Switch Settings

DBV-2000 Connection

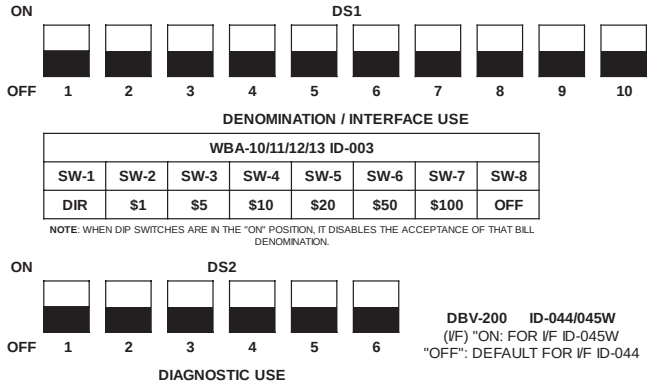

DENOMINATION / INTERFACE USE

WBA-10/11/12/13 ID-003							
SW-1	SW-2	SW-3	SW-4	SW-5	SW-6	SW-7	SW-8
DIR	$1	$5	$10	$20	$50	$100	OFF

NOTE: WHEN DIP SWITCHES ARE IN THE "ON" POSITION, IT DISABLES THE ACCEPTANCE OF THAT BILL DENOMINATION.

DIAGNOSTIC USE

DBV-200 ID-044/045W
(I/F) "ON: FOR I/F ID-045W
"OFF": DEFAULT FOR I/F ID-044

Switch	ON	OFF
1	With Stacker	Without Stacker
2	Must be set to OFF	OFF
3	Must be set to OFF	OFF
4	Must be set to OFF	OFF
5	Must be set to OFF	OFF
6	Test Mode	Normal

Pin #	Signal	Function
1	Power Supply	+12VDC
2	Power Supply	Ground
3	NC	Not Used
4	NC	Not Used
5	NC	Not Used
6	NC	Not Used

Wiring

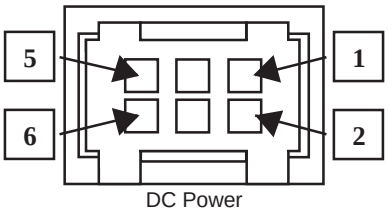

DC Power

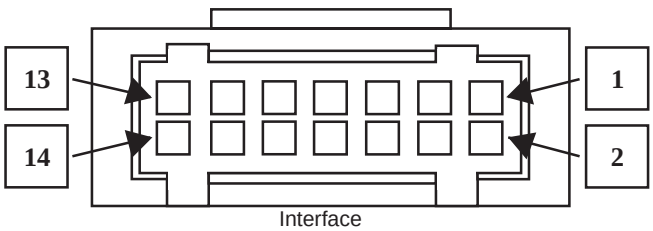

Interface

Pin #	Signal	Function
1	NC	Not Used
2	NC	Not Used
3	Busy	Indicates that the validator is in operation
4	Soft Reset	Signal to clear ABN (abnormal) or STKF (stacker full) signal.
5	Data	Terminal to output communication message.
6	CTS	Signal allows to send any communication message.
7	Ground	Ground
8	LED Power	Power supply to drive LED
9	NC	Not Used
10	Disable/Enable	Validator can accept bill when Low, and can not accept when High
11	RTS	Confirms the start of communication message.
12	NC	Not Used
13	NC	Not Used
14	ABN	To be output when the validator is in trouble, or when the stacker is full.

Troubleshooting

Description	Probable Cause	Possible Solution
Bill Rejection	DIP switches not set properly	Set DIP switches
	Roller and/or belts are excessively dirty	Clean head and rollers with mild soap and water solution
	Credit limit not set properly on game	Set credit limit for proper acceptance
	Cashbox is full, or not installed properly	Check and verify cashbox condition
	Sensors out of calibration, unit not calibrated after software upgrade	-Calibrate unit using proper procedures -Check for proper software/ID prototol
No Activity	No power to the unit/No LEDs visible	Check Power source, pins, wires and connector
	Will not start acceptance procedure/cycle	Check for proper software usage/ID protocol
	Cycles, but will not accept bills	Check for proper DIP switch and game settings
	Acceptor in an error status	Run standalone test to verify
	BAD CPU board, no lights on CPU board	Replace CPU board, or change out unit
	Unit out of calibration	Calibrate unit using proper procedures

Stand-alone Test Mode

Set the DIP switches, then apply power to the unit to accomplish this function.

NOTE: Perform this test outside the game using the game power (6-pin) connector, or power supply hookup.

- Before applying power, turn DIP switch 6 to on.

©2002 Bally Gaming and Systems

Bill Acceptors (cont.)

- Apply power, then turn DIP switch 6 to OFF. The unit should cycle.
- The unit is ready for stand-alone testing.
- Insert a bill/note. The bill/note will either be accepted and go complete through the bill head, or be rejected.
- If the unit rejects the bill/note, refer to the Bill Return Codes table.
- If the unit will not take the bill/note, check the Abnormal Initialization Codes table.
- When the unit cycles on power ON. this indicates power and forward motor operation.
- When a plain piece of paper is inserted and rejected this indicates reverse motor operation.
- When various denominations of currency are inserted and accepted, this indicates the bill/note was accurately match against the characteristics of the software version.

Bill Return Codes

# of Blinks	Description	Possible Cause
1	Crooked insertion	Bill was inserted crooked Entrance sensor malfunction
2	Magnetic pattern error	Error detecting magnetic pattern on a bill/note
3	Acceptor detected a bill while in standby	Detected the presence of a bill/note while in standy
4	Dark-light ratio is below the fixed value	Reflective sensors may not be working properly
5	Transport feed error	Bill/note not detected by the transport feed sensor within a specified period
7	Photo pattern error	Bill/note may have a pattern not programmed or recognized in memory Sensor may not be working properly
8	Photo level error	Dirty belts and/or rollers Double/overlapping bill detected The bill/note may be dirty
9	Return by inhibit settings	Bill/note does not fall into range of acceptable bills/notes, or denomination direction
10	Returned by host	Game program/settings will not accepted inserted bill/note
12	Detected another bill while a bill was still in stack mode	Entrance sensor malfunction Object blocking entrance sensor
13	Bill length error	Length of bill/note not within programmed specification
14	Color pattern error	Irregular color/shade/markings
15	Returned by other reasons (Magnetic error)	A combination error with magnetic sensors

Abnormal Initialization Codes

# of Blinks	Description	Possible Cause
1	Cashbox Full	Cashbox may be FULL Motor not functioning Sensor not working Encoder gear cracked or split
2	Jam in Cashbox	Pusher mechanism may be jammed Stacker encoder sensor not functioning
3	Jam in Transport Unit	Cover open Stacker lever problem Bill remains in the carrying path
4	Jam in Acceptor Head	An object blocking sensors Sensor problem
5	Motor Speed Error	No signal from the acceptor's encoder sensor
6	Motor Stop Error	Motor not functioning Encoder gear cracked or split Encoder sensor not functioning
8	Solenoid Error	Solenoid not functioning Stacker lever not at home position
10	Cashbox Removed	No cashbox (SS units only) Cashbox not seated properly
12	Cheat Condition Detected	Sensors indicate possible sensor manipulation
15	D/A Adjustment Error	Possible calibration sensor error

Auto-Calibration

1. Power OFF
2. Set DIP switch DS2: 4, 5, and 6 to ON.

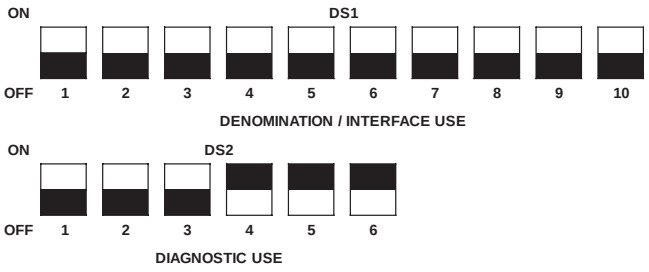

3. Power-on the unit plugging in the 6-pin connector.
4. Head motor will cycle and stop indicating it is ready to calibrate.
5. Insert the DBV-200 calibration paper, black side first.

NOTE: Calibration paper may be purchased from JCM American directly by calling the Parts Sales department at (702) 651-3445 and requesting part number #057619.

Bill Acceptors (cont.)

After inserting the calibration paper, the unit will carry the paper forward/reverse several times. When the process is complete, the unit will return the paper.

Look at the indicator for proper signals: 14-pin test LED, or the bezel light, if used. Fast blinks indicate acceptable calibration, and blinks from one to 11 intervals of 1/2 second indicate an error as described in the table following:

# of Blinks	Error Found During Calibration
1	Entrance Lever Error
3	Entrance Sensor Error
5	Gain Error - White or Black Level
6	Digital/Analog Error White Level Adjustments

# of Blinks	Error Found During Calibration
7	Barcode Sensor Error
9	Magnetic Setting Error
10	Write-in Error
11	Black Level Error

Mars Electronics International • 1301 Wilson Drive • West Chester, PA 19380 • **(800) 345-8215 Phone: (610) 430-2697 Fax: (610) 430-2694** • http://www.meiglobal.com

ZT Series 1000

ZT Series 1000

Features

- Exceptional Security: Through the use of multiple wavelength optical sensing and sophisticated data processing, the ZT Series 1000 bill acceptor sets the standard for rejecting invalid bills. Optical cross-channel sensors examine the bill path for foreign objects such as clear tape or strings. The LRC triggers an automatic “lock out” when separated from the unit for added security.
- High, four-way acceptance: Satisfy customers by accepting bills of all conditions. Bills can be fed in any direction, face up or down.
- Future flexibility in a flash: All U.S. models accept $1, $2, $5, $10, $20, $50 and $100 bills. The ZT Series 1000 bill acceptor can be easily updated electronically to handle new currency designs.
- Reliable / low maintenance: With the streamlined recognition system, sensors are embedded under the smooth plastic bill path, and the magnetic head and pinch roller have been eliminated to dramatically reduce jams, debris build up and the need for cleaning.
- Bar code capability: Reliably accepts industry standard bar code coupons face up in both directions.
- Easy to use: The Recognition and Transport Unit (RTU) and the Lockable Removable Cassette (LRC) can be removed from the front with one hand. The RTU fully opens for cleaning and electrically connects automatically when inserted. An easily accessible toggle switch enables the operational mode to be changed to “test” or “setup” mode.

Specifications

- Acceptance Rate: 95% or greater for US $1 through $100 bills
- Bill Insertion: Bill/lengthwise, four way (face up/down, either direction)
- Bar code Coupon/face up, either direction

©2002 Bally Gaming and Systems

Bill Acceptors (cont.)

- Transaction Speed: Approximately three seconds (from bill insertion to completed bill-stacking)
- Interfaces: Pulse and multiple serial protocols
- Power Sources: 12 to 40 volts DC
- Power Consumption: Standby: 3.0 Watts, Acceptance: 30 Watts peak, Stacking: 50 Watts peak
- Escrow: One bill/one barcode coupon
- Environment: Operating temperature: 5° C to 50° C, storage temperature: -30° C to 70° C, humidity: 5% to 85% relative humidity (non-condensing)

Bill acceptor components: The ZT1200 consists of three main components, the cashbox/LRC, the RTU and the chassis.

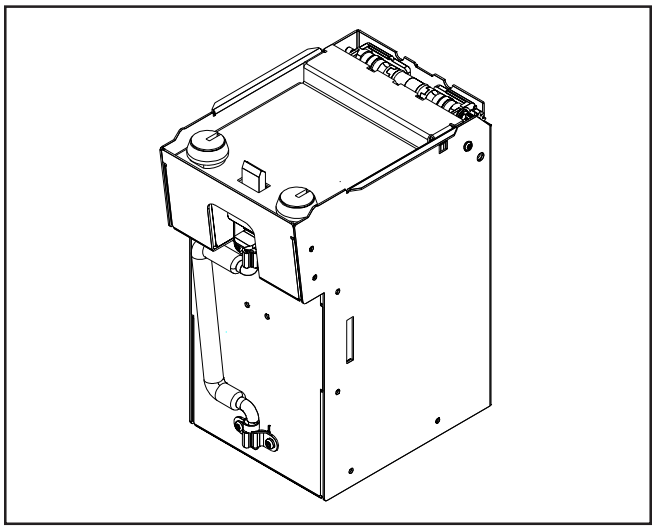

Cashbox/LRC

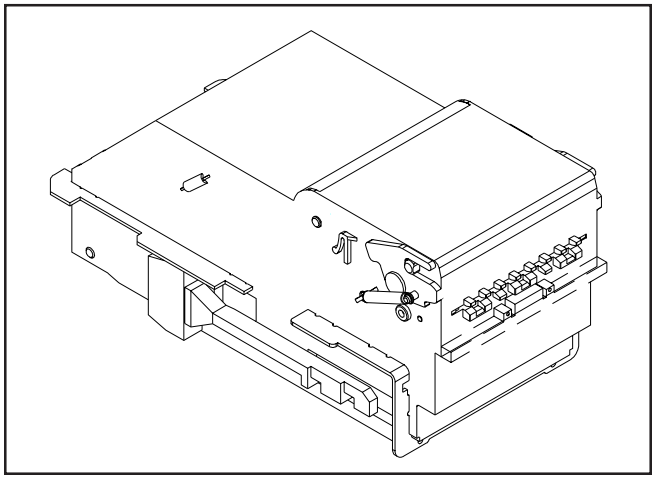

RTU

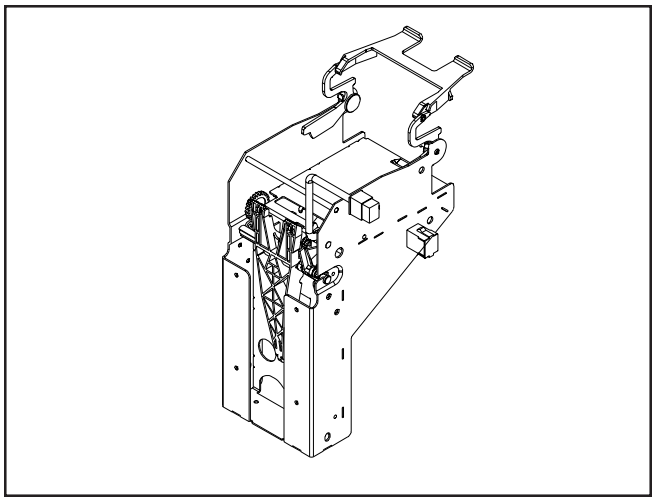

Chassis

US Dollar ($) DIP Switch Settings

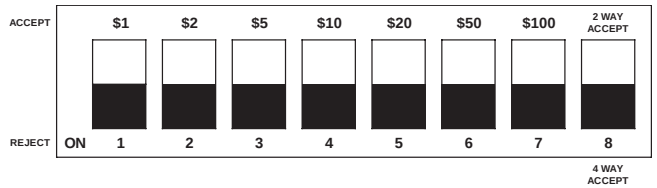

RTU Removal

1. Pull forward on the release lever on top of the RTU. At the same time, pull forward on the RTU to its first locked position, about halfway out.
2. Pull forward on the release lever again. Pull forward on the RTU to remove it from the chassis.

RTU Installation

1. Ensure that the bill path access areas are latched closed.
2. Slide the RTU into the chassis and push firmly to seat the unit.

Modes

Interface Mode (normal operation): This mode is selected by placing the mode switch to the down position. Interface mode is the normal operating mode of the ZT1200 Bill Acceptor. This allows the unit to communicate with the machine that it is installed in so that it may accept bills and give credits.

Calibration Mode: This mode is selected by placing the mode switch to the middle position and cycling power, After the calibration is successfully completed, the ZT1200 will automatically return to Interface mode.

Boot Mode: This mode is selected by holding the mode switch in the up position while cycling power to the

©2002 Bally Gaming and Systems

Bill Acceptors (cont.)

ZT1200. Boot mode is a special mode, which is reserved for factory use and field software upgrades. This unit will not accept bills or give credits when in this mode. To exit Boot mode, return the mode switch to the Interface mode position.

Test Mode: The test mode allows testing of the unit without credits being communicated to the host machine. This mode is very useful for troubleshooting and other stand-alone testing of the bill acceptor.

Entering the Test Mode:

NOTE: Bills will be accepted, but credits will not be given in test mode. Ensure that test mode is properly exited before placing the bill acceptor back in service.

1. Power up the ZT1200 in Interface mode.
2. After the unit performs a run-and-stack operation, wait at least an additional 10 seconds before performing the next step.
3. Hold the mode switch in test mode position.

The ZT1200 will now accept and stack bills, but no credits will be issued on the host machine.

To Exit the Test Mode:

1. Release the mode switch and return it to the Interface mode position.
2. Remove the RTU.
3. Replace the RTU (the unit will perform a run-and-stack.

The unit is now ready for use.

NOTE: The cashbox must be in place for bill acceptance.

Coupon Mode: This mode is selected by toggling the mode switch to the up position. This mode allows the default settings to be changed in the ZT1200 bill acceptor. These settings are used when switches 1-7 are in the OFF position on the bill option switch. The factory default coupon settings are $1, $2, $5, $10, $20, $50, and $100s enabled with four-way acceptance. Coupon mode will only allow a onetime try for coupon configuration. After an attempt, the ZT1200 will automatically return to Interface mode.

1. Turn bill option switches 1-7 to the off position.
2. To enter the coupon mode, toggle the mode switch to the up position one time.
3. Install the RTU into the machine and close the door. The unit will run-and-stack and then pulse the motor in reverse indicating coupon configuration mode is enabled.

Coupon Configuration:

1. Make copies of a coupon with a standard, carbon-based, non-color copier. Copies of the coupon are usable if cut to match the size of the following coupon.
2. Fill out the coupon using a #2 pencil to complete the blocks for desired coupons. For correct operation, all eight lines must be completed. Fill in only one block per line. Do not mark the back of the coupon.
3. Complete lines one through seven to enable desired bill denominations. Complete one block for each denomination. High accept enables maximum bill acceptance. High security may be desired for locations where a higher level of discrimination is desired. Off will reject bills of the selected denomination.
4. Complete line eight to enable desired bill direction. Enable 1-or 2-way face up, or 4-way acceptance (which allows acceptance in all directions).
5. Insert coupon and verify settings were accepted.

ACCEPTED: Coupon will be held in escrow mode for approximately three seconds then returned.

REJECTED: Coupon will be immediately returned. Review instructions or try a new coupon.

Returning to Normal Operation:

1. Remove the RTU.
2. Change bill option switches.
3. Reinstall the RTU.

Calibration:

NOTE: A Mars ZT Calibration Kit is required to perform a calibration. Contact Mars at (800) 345-8215 and reference part number 251061008 for assistance.

©2002 Bally Gaming and Systems

Bill Acceptors (cont.)

A calibration of the ZT1200 bill acceptor may need to be performed after certain maintenance procedures. Those procedures that require it will explicitly state that a calibration must be performed. As a general guide, any disassembly must be followed up with a calibration.

1. Turn off the bill acceptor and move the mode switch to the calibration position.
2. Turn on the unit and insert a piece of MARS calibration paper into the bezel of the bill acceptor within four seconds. After a few seconds, the calibration paper will be rejected.

NOTE: The bill acceptor will exit Calibration mode and return to Interface mode automatically four seconds after turning the power on if no calibration paper is inserted into the unit.

3. Remove the calibration paper from the bezel. The RTU will perform a run-and-stack operation if the calibration was accepted. If the unit does not perform a run-and-stack, the calibration data was not accepted. In this case, the calibration paper must be re-fed.

NOTE: If, after several attempts, the unit does not perform a run-and-stack, the bill acceptor may require additional services.

4. Allow the ZT1200 to idle for at least 20 seconds following the run-and-stack operation. Ensure that all bills, calibration paper or other objects are removed from the bezel during this period.
5. Turn off the unit and place the mode switch to the Interface position.
6. Turn on the unit. A run-and-stack operation will be performed if ready for service.

Troubleshooting

Description	Probable Cause	Possible Solution
Unit will not draw in bills	Jammed bill in bill path	Check bill path for jammed bill
	Cassette not properly seated	Remove the cashbox and reinstall
	RTU not properly seated	Remove the RTU and reinstall
	Interface connector not installed or faulty connection	Check interface connector
	Power connector not installed or faulty connection	Check power connector
	Mode switch not in Interface mode position	Turn the unit off, place the mode switch to the Interface mode position, and turn the unit on
	Unit disabled by machine	Check machine for errors
		Check machine doors
Unit does not give credit	Mode switch not in Interface mode	Turn the unit off, place mode switch to the Interface mode position, and turn the unit on
	Bezel option switch in wrong position	Return bezel option switch #1 to OFF position and cycle power
	Cassette jammed	Remove RTU, verify home flag is in UP position. If not, cassed may be jammed. Remove cassette and verify proper operation by pushing in on silver pusher at cassette rear.
	Communication error	Turn power off and on to clear error
Unit jams	Cassette not properly seated	Remove the cashbox and reinstall
	RTU not properly seated	Remove the RTU and reinstall
	Gear missing	Remove the RTU, check for two gears on the left-hand side, and replace gear if missing.
	Defective cashbox (LRC)	Remove the RTU. Roll the chassis idler gear (left-rear of chassis) and check for slipping. Remove and reinstall cashbox. Recheck for slipping. If slipping persists, replace cashbox.
Unit draws bills in, but will not accept bills	Option switches not set properly	Refer to Option Switch Settings section
	Interface errors	Check controller/machine enabling of bill acceptor
	Unit in Calibrate mode	Check mode switch position section
	Communication error	Turn power off and check connectors. Turn power on.
	Bills inserted upside down	Check switch for 4-way
	Worn or non-genuine bills	Use cash in better condition
Unit runs motor, stacks three times, then goes out of service	Cassette not properly installed	Remove and reinstall cashbox
	Home flag unclipped or broken	Remove RTU and verify proper home flag action. Re-clip or replace home flag.
	Cassette present cherry switch pushing on stacker arm	Some applications may have a cherry switch mounted behind the bill acceptor to verify cashbox removal. Remove cherry switch and wire to cassette present wires from chassis main harness.
RTU runs motor seven times and unit goes out of service	Dirt in bill path	Clean bill path and recalibrate

©2002 Bally Gaming and Systems

Bill Acceptors (cont.)

Money Controls • New Coin Street, Royton Oldham OL2 6JZ United Kingdom • Phone: +44 161-6780111 Fax: +44 161-6267674 • www.moneycontrols.com

Ardac WACS

Ardac WACS

The **Ardac WACS (World Acceptor Cassette System)** is a world-proven, self-contained note acceptor and cassette stacking system that offers high performance, high security and fast, trouble-free note handling for a wide range of applications.

Based on world-proven **Ardac** technology, **WACS** is designed for acceptance of virtually all the world's note currencies and can handle multiple currencies of varying sizes at the same time. EPROM or Flash memory is used to program up to 260 individual note profiles that allow reliable discrimination of up to 65 banknotes in four directions.

Ardac WACS optically scans each note to determine authenticity and denomination, resulting in very high security, and also incorporates an internationally proven optical and mechanical anti-stringing design to protect against fraudulent activity. Individual notes may be inhibited from normal acceptance, giving operational flexibility and enhanced security when needed. Accepted notes are routed and stacked within the removable, and optionally lockable, cassette. This has a capacity to hold up to 550 street-grade notes, and, with no motor or electrical connectors, is ideal for use as an interchangeable unit.

The modular **Ardac WACS** comprises the acceptor and cassette mounted within a steel chassis that allows simple location of the unit within a host machine. The acceptor and cassette can be easily removed from the chassis and opened for periodic inspection or cleaning without the use of tools, simplifying general maintenance. Advanced maintenance and system monitoring is performed using the built-in diagnostics function in association with a PC and Ardac Host Simulator interface.

Features:

- High-speed, high-performance solution
- Truly global – accepts most of the world's note currencies
- Field update of note sets
- Handles multiple currencies at the same time
- Optimum in-service time
- Quick and easy to use by the end user.
- Very high first-time acceptance rate of street-grade banknotes
- Multiple, precision optical and magnetic sensors
- Automatic calibration of sensors for high performance
- Optical and mechanical anti-stringing design
- Alternative programming methods – EPROM replacement or download
- Compact, modular system, front or rear entry
- Built-in diagnostics
- Cassette holds up to 550 street-grade banknotes.

Specifications

Dimensions	Acceptor	Cassette	Chassis
Height	90mm (3.520")	204mm (8.042")	316mm (12.442")
Width	107mm (4.210")	88mm (3.476")	116mm (4.588")
Depth	229mm (9.000")	202mm (7.940")	180mm (7.100")
Weight	2.2kg (4.75lb)	2.3kg (4.90lb)	1.6kg (3.50lb)
Note Size			
Minimum Width	62mm (2.443")		
Maximum Width	83mm (3.270") [85mm (3.350") option]		
Minimum Length	120mm (4.728")		
Maximum Length	172mm (6.777")		
Cassette Stacking Capacity			
	Up to 550 street-grade notes		
Environmental			
Temperature Range: Operating	0ºC to 60ºC		
Storage	-30ºC to 60ºC		
Humitity Range	Up to 90% RH non-condensing		
Electrical Interface			
Voltage: Nominal	12 - 24Vdc range		
Current:	@ 12Vdc		@24Vdc
Typical (running)	2.0A		820mA
Minimum (idle)	400mA		270mA
Maximum	4.0A		1.6A
Operational Specification			
	65 notes x 4-ways, 260 profiles		
	Automatic calibration of sensors for high performance		
	Vend time less than 3.25 seconds		
	Individual bill/note inhibit using 8-position DIP switch		
	Easy access to not path for inspection and cleaning		
	Diagnostics via RS232 ASCII serial interface		
Communications Interface			
	Ardac-2 serial protocol (RS232)		
Security			
	Ardac WACS incorporates an optical and mechanical anti-stringing design to deter and protect against fraudulent activity, such as pullback manipulation, thus providing optimum security.		

©2002 Bally Gaming and Systems

Hoppers

Bally Gaming and Systems products may use the XS-1200 Standard hopper. It also may use hoppers manufactured by Asahi Seiko, Inc.

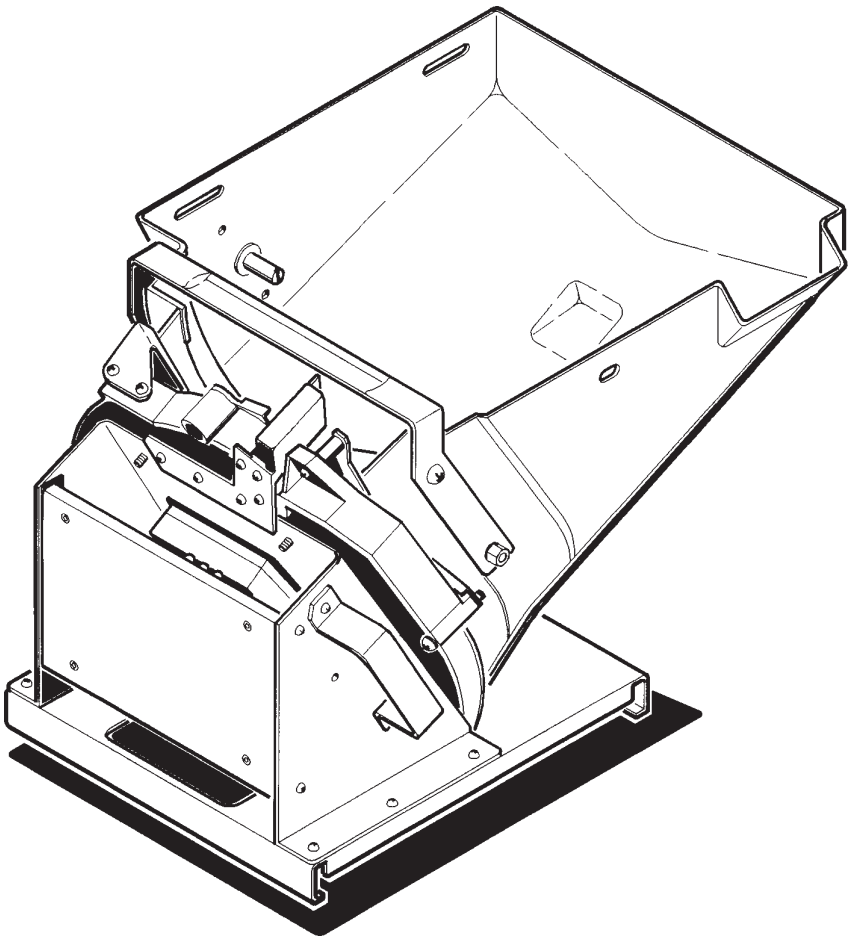

Bally XS-1200 Standard Hopper

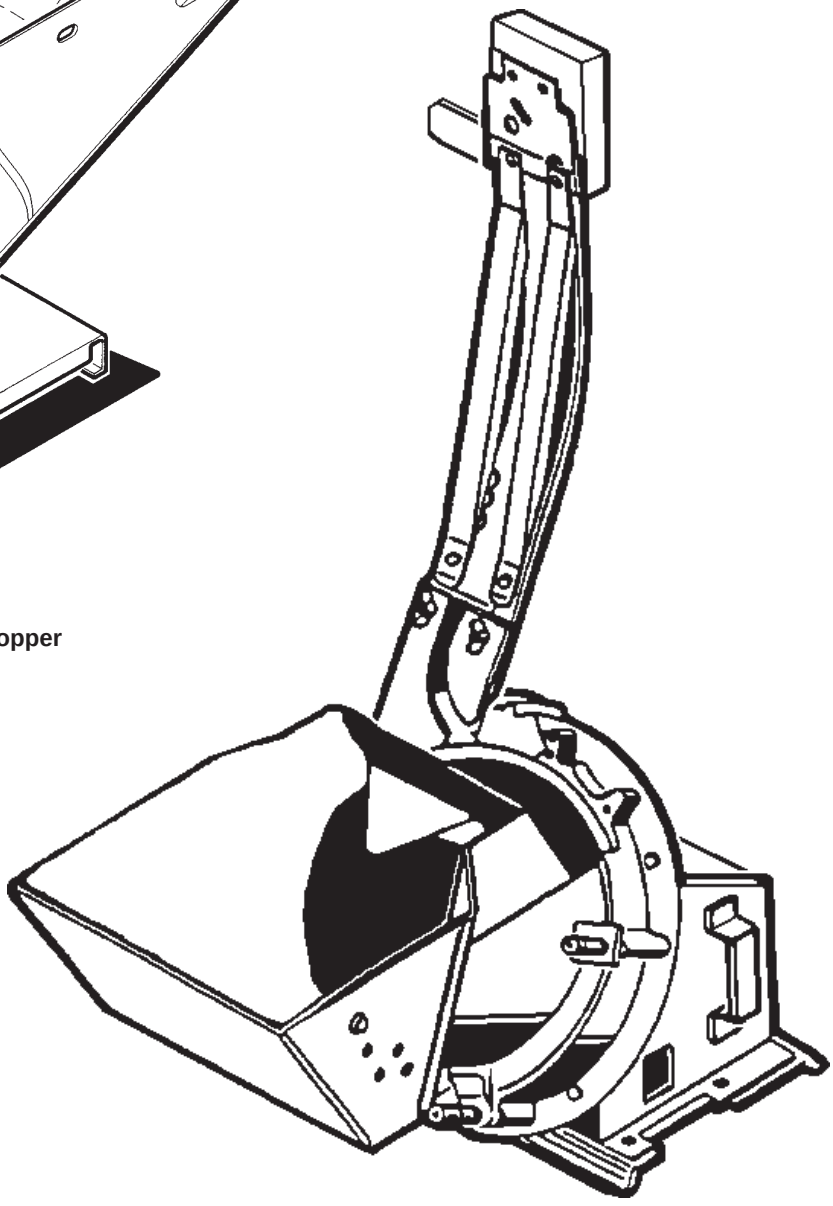

Asahi Seiko Hopper

Hoppers (cont.)

Bally Gaming and Systems XS-1200 Hopper (AS-04787-SERIES)

The XS-1200 design combines operator enhancements with the most advanced technology. It uses a multipurpose processor to provide an extremely efficient operation in a compact and simple design.

The primary focus of the engineering staff was to design the most dependable increased capacity hopper for the market and have greatly reduced the damage to components if a malfunction occurs, by adding several protective circuits. This is further enhanced by the power supply being included on a single printed circuit board for quick and easy repair.

Features

- Increased capacity for all denominations of coins. The recommended running levels are 4,200 25¢, 1,000 $1 (or tokens) and 500 $5 tokens.
- Larger motor for increased power, speed and reliability.
- Convenient switches for manual operation and testing.
- Advanced technology for easy repair.
- Easily adapted to various machine models.

XS-1200 Controller Board

The XS-1200 controller board is an intelligent control circuit. It handles all functions of the XS-1200 including pin wheel rotation, mixer rotation and coin un-jamming routines.

Switch Descriptions and Options

Forward Switch: Pressing the forward switch (sw2) will cause the pinwheel motor to rotate forward (payout mode). This switch will only function with the door open. Enabling this switch will also illuminate the green forward LED located at CR4. This LED will stay lit until the switch is released.

Reverse Switch: Pressing the reverse switch (sw1) will cause the pinwheel motor to rotate in reverse (clear jam mode). Enabling this switch will also illuminate the red reverse LED located at CR5 until the switch is released.

NOTE: The reverse spin on the pinwheel is slower than the forward spin, because the CPU on the control board sends a slower signal to prevent coins being forced underneath the hopper knife.

Forward / Reverse (Mixer/Motor Test): Pressing the forward switch (sw2) and the reverse switch (sw1) simultaneously will start the mixer motor, and illuminate the yellow mix LED located at CR3. The motor will remain on, and the LED will remain lit, until either switch is released.

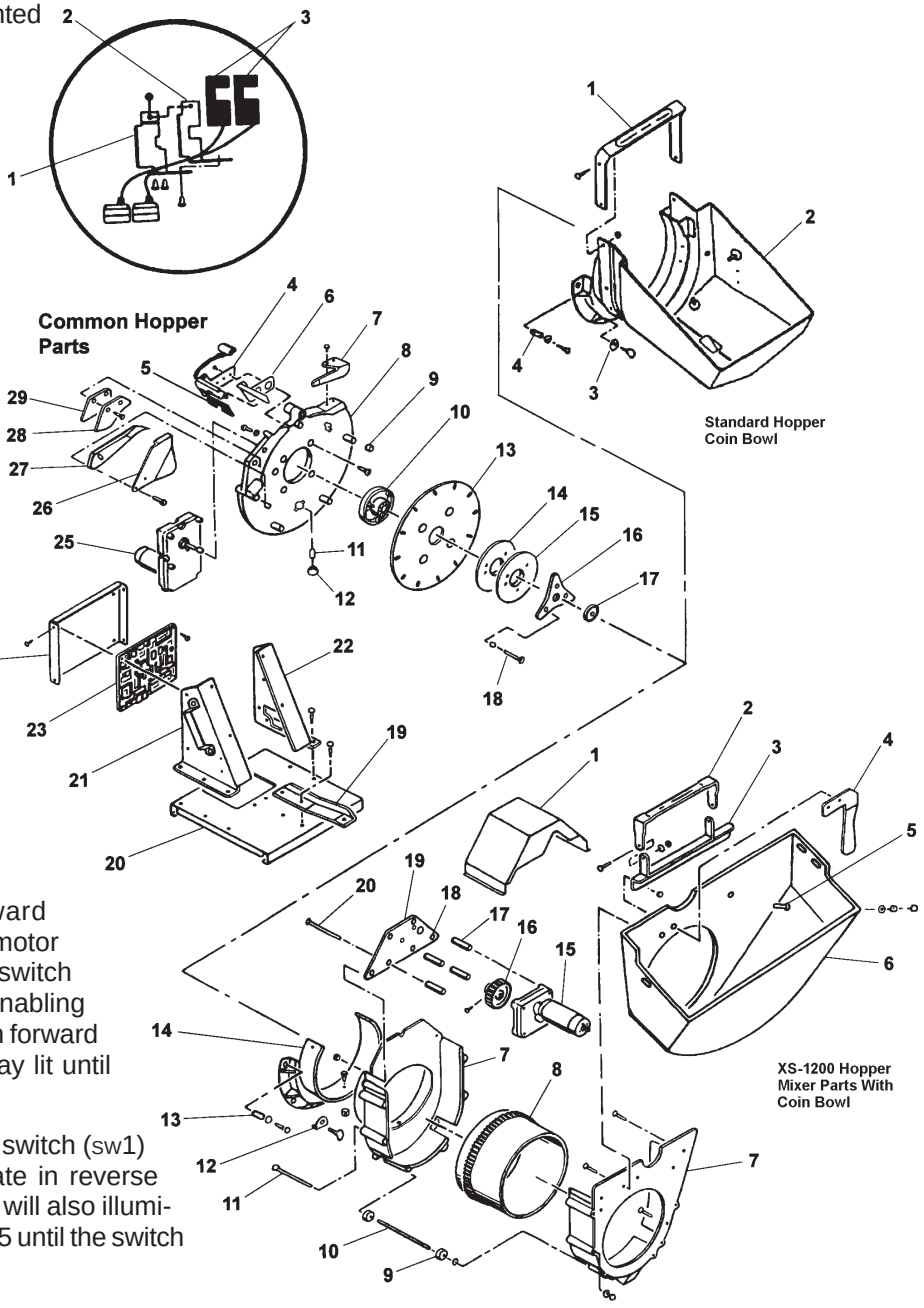

©2002 Bally Gaming and Systems

Hoppers (cont.)

XS1200 HOPPER PARTS

ITEM	PART #	DESCRIPTION
1	P-09319-0512	Bracket, Outer Mounting
2	P-09319-0511	Bracket, Inner Mounting
3	E-00733-0008	Optic Switch Assembly (2)
4	P-09319-0204	Bracket, Hopper Optic Guard, Outer
5	E-00733-0008	Optic Switch Assembly (Single)
	TFPP-00632-1114	Screw
6	P-09319-0203	Bracket, Hopper Optic Guard, Inner
7	P-00845	Wiper
8	M-03073-0002	Wheel Housing, Hopper
9	S-00231-0978	Spacer
10	M-03072-001B	Drive Coupling, Pinwheel, Hopper
11	S-02562-001A	Roller Shaft
12	M-03009-A001	Roller (3)
13	P-00842-011B	Pin Wheel, 12 Pin (1.00Token)
	P-00482-010B	Pin Wheel, 15 Pin (25¢)
	P-00482-009B	Pin Wheel, 16 Pin (5¢)
	A-04308-001A	Pin Wheel (5.00 Token)
14	P-00847-0024	Spacer, Shelf Wheel (5.00 Token)
15	P-00847	Shelf Wheel (25¢) .836” (21,23 mm) To .902” (22,91 mm) Diameter X .062” (1,58 mm) Width
16	R-00526-0003	Agitator, 5¢ to $1
17	S-02569-0002	Cup, Washer, Pin Wheel Hold Down
18	S-00231-0825	Bushing, Agitator Mounting
19	P-09278-0004	Bracket, Counter Balance Adjustment, Super (mixer) Hopper
	P-09278-0005	Bracket, Counter Balance Adj. Adjustment, V72,
	P-09278-0008	Bracket, Counter Balance
	NLS-25020-1112	Nut
	MSOH-25020-1124	Screw
20	P-09277-001B	Platform Bracket, (mixer)
21	P-09263-0005	Bracket, Hopper Mounting, Left
	TFPP-00832-1106	Screw (6)
22	P-09263-0006	Bracket. Hopper Mounting, Right
	TFPP-01032-1106	Screw (6)
23	AS-03356-0363	Hopper Control Board
24	P-06629-523A	Bracket, PCB
	TFPP_00832-1104	Screw (4)
	LSPP-00632-1108	Screw (4)
25	E-00119-0532	Motor, Pinwheel, Hi-Torque, 24RPM
26	P-00838-0011	Outlet Cover
	P-00838-006B	Outlet Cover, 5¢ & 25¢
	P-00838-0009	Outlet Cover, 5¢-50¢
	P-00838-007A	Outlet Cover, 1.00 Token
	P-00838-005A	Outlet Cover, 5.00-100.00 Token
	P-00838-0008	Outlet Cover, 5.00-100.00 Token
	P-00838-0012	Outlet Cover, 5.00-100.00 Token
27	M-03068-0006	Knife, Coin, Up To 1.625” (41,28mm) Diameter
	M-03068-0007	Knife, Coin, Over 1.625” (41,28mm) Diameter
28	P-00839	Coin Deflector
	P-00839-0004	Coin Deflector, 1.00, 5.00, 25.00, 100.00 Token
	MSPF-0832-1106	Screw (2)
29	P-09291-001B	Spacer, Deflector Plate

XS1200 HOPPER WITH MIXER PARTS

ITEM	PART #	DESCRIPTION
1	M-03082-001A	Cover, Mixer Drive
2	P-06264-0309	Handle
	TFPP-01032-1108	Screw
3	A-04349-0002	Bracket, Handle Mounting
	NLS-00832-1112	Nut (2)
	M-00319-0001	Stop Nut,Elastic (2)
4	P-09295-002D	Baffle
	NLS-00832-112	Nut (2)
5	S-00463-0053	Pin, Level Contact (Probe)
	P-00800-0006	Washer (2)
	NLS-00832-112	Nut (2)
6	M-03048-0013	Coin Bowl, V7K
	M-03048-0015	Coin Bowl, S6K
	A-04394-0001	Grounding Stud
7	AS-03368-0001	Assembly, Hopper Mixer Front/Back Bracket
8	M-03047-001A	Mix Cylinder
9	M-03066-001A	Roller (4)
	P-02891-0006	Retainer Ring
10	S-02558-001A	Shaft Roller (2)
11	TFPP-00832-1924	Screw (6)
12	M-01348-0043	Thumbscrew
13	SP-00200-0203	Spring (2)
	MSPT-01032-110B	Nut (2)
	PW-00010-0012	Washer (2)
	M-03074-001B	Adaptor
14	NLS-00832-0112	Nut (2)
	MSPT-01032-1108	Screw (3)
	NLS-01032-1112	Screw (3)
15	E-00119-0529	Mixer Cylinder Motor
16	M-03069-001B	Drive Gear Hopper
	CPAO-01032-1804	Set Screw
	S-00231-0979	Spacer (4)
17	S-00231-0978	Spacer (4)
	NLS-00832-1112	Nut (2)
18	R-00111-0029	Rubber Grommet For Elec.Wire
19	P-09276-0002	Bracket, Drive Motor
20	MSPF-00832-1132	Screw

STANDARD HOPPER COIN BOWL

ITEM	PART #	DESCRIPTION
1	P-09334-002B	Handle
	M-03048-0015	Coin Bowl, S6K, V8K
	M-03048-0012	Coin Bowl, V7K
2	M-03048-0017	Coin Bowl, V7 Casino
	M-03048-0019	Coin bowl, V72
	S-00463-0053	Pin,Level Contact
3	P-09278-003A	Retaining Bracket
	M-01348-0043	Thumbscrew
4	SP-00200-203	Spring (2)

©2002 Bally Gaming and Systems

Hoppers (cont.)

Hopper Adjustments

Adjust Hopper Wiper: The wiper knocks off coins stuck together, which allows only one coin to pass. To adjust the wiper, follow these steps:

1. Turn the pin wheel to position a coin under the wiper.
2. Loosen both mounting screws and move the wiper edge up to the coin.
3. Tighten both screws just enough to allow the wiper to be moved in and out.
4. Slide a coin under the wiper edge and release it. The coin should fall down onto the shelf wheel. The wiper edge should be close to the coin, but not holding it.
5. Tighten the back screw, then the front screw, constantly checking the wiper position to the coin. Continue to tighten the back screw then the front until the wiper cannot be moved in or out. Do not overtighten the screws as the head of the screw will break off.

Adjust Hopper Knife Position: The forward edge of the hopper knife presses against the pin wheel and touches the edge of the shelf wheel. This allows no coin to wedge itself between the blade and the pin.

Removing the Mix Cylinder: The mix cylinder is used to agitate coins in the hopper to prevent coin jams. It can be removed for hopper maintenance or replacement if necessary.

1. Remove the gear cover.
2. There are three bolts used to secure the drive motor to the adaptor hopper. Remove the two bolts that are in the recessed openings, and pull the motor up and to the side.
3. Unscrew and remove the baffle.
4. Lift out the mix cylinder.

Hopper Probe Circuit: The hopper probe circuit consists of two hopper probes. The first probe is a stationary pin located at the bottom of the bowl. The stationary probe and the moveable probe are electrically connected when the coins in the bowl are touching both probes. When the coins in the hopper are grounding to the stationary probe, and are also touching the moveable probe, a signal is sent to the MPU board indicating the hopper is full. The signal triggers the diverter coil on the door so that coins will be diverted to the drop.

Setting the hopper probe circuit coin level

1. Fill the hopper with the desired number of coins. The coins should be either level with, or slightly above, one of the holes drilled into the side of the hopper coin bowl.
2. Activate the forward switch for approximately five seconds. This will agitate, and then settle, the coins in the bowl.
3. Insert the top probe into the hole that is level with (or just above) the amount of the coins in the bowl. This sets the coin level for the chosen probe location.

©2002 Bally Gaming and Systems

Hoppers (cont.)

6644 Paradise Road, Las Vegas, Nevada • 89119-3719 • Telephone: (702) 260-6666 • Fax: (702) 260-6493 • Toll Free: 1(800) 859-5353 • http://www.asusainc.com

Asahi Seiko DH-750 Hopper, Model 53, Slant Top (AS-03105-SERIES)

Features

- Customization: The DH-750/U1 allows customers the flexibility to design around their requirements. They can choose exit direction, voltage, coin capacity, counting method and coin level detection as standard options.

DH-750 Hopper

- Serviceability: The DH-750/U1 was designed with the field service industry in mind. In the event a coin jam occurs, service techs can simply loosen the screws to clear the jam without damaging any parts that would otherwise require replacement. The use of Asahi Seiko's patented "back flow" system prevents coins from flowing back down the escalator causing miscounts and frequent coin jams.

General Specifications

Applicable Coin Sizes:	Diameter: 21.0mm – 38.0mm
	Thickness: 1.5mm – 3.3mm
Coin Capacity:	US 5¢: 1,300
	US 25¢: 1,000
	$1 Token: 300
Dispensing Speed:	US 5¢: 400 coins/minute
	US 25¢: 380 coins/minute
	US $1: 200 coins/minute
Coin Counting Method:	Proximity Sensor or Microswitch
Motor Voltage:	115VAC, 220VAC, 24VDC (Thermal Protector and Instant Stop device included on AC motors only)
Motor Rating:	5 Minutes
Current Consumption:	3.0A @ 115V AC
Operation Temperature:	-10°C - +60°C
Weight:	14.69 pounds approx. (AC motor)

DH-750 Model 53 Hopper Assembly

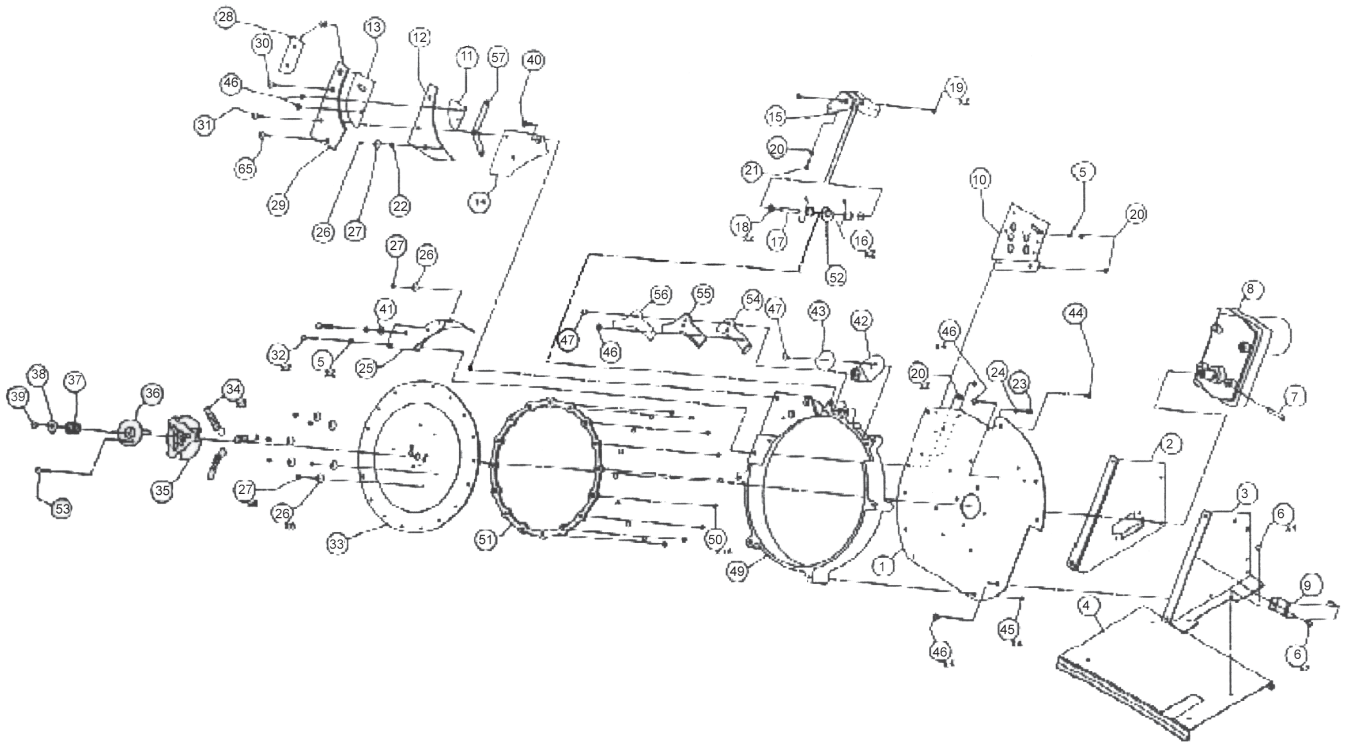

Hoppers (cont.)

NOTE: Items without a Bally part number are not stocked by Bally.

DH-750 MODEL 53, SLANT TOP COIN HOPPER

Item#	Bally Part #	Asahi Seiko Part #	Description	Item#	Bally Part #	Asahi Seiko Part #	Description
1		DH7991M025001	PLATE, CHASSIS	32	ASH-05000-0001	B4025HXSS	BOLT, M4x25, SS
2		DH7534M025002	FRAME, SIDE (R)	33	ASH-05000-0003	DH7001M005033	DISC, US 5¢
3		DH7534M025003	FRAME, SIDE (L)		ASH-05000-0012	DH7001M025033	DISC. US 25¢
4		DH7534M025004	PLATE. BASE		ASH-05000-0035	DH7001M10T033	DISC. $1 TOKEN
5		W4000SW99	WASHER, M4 SPLIT	34	ASH-05000-0013	DH7001M025034	SPRING, STIRRING
6		S4006RHSW	SCREW, M4x6 W/SW	35	ASH-05000-0014	DH7001M025035	COVER, SPRING
7	ASH-05000-0005	DH7001M025007	PIN, MOTOR DRIVE	36	ASH-05000-0015	DH7001M025036	HOLDER. SPRING
8	ASH-05000-0040	DH7004M025008	MOTOR, 24VDC (DME44S7C-272)	37	ASH-05000-0016	DH7001M025037	SPRING, DISC
9		DH7001M025055	HANDLE	38		W4015FW10	WASHER, 4x15x1.0 FLAT
10	ASH-05000-0097	DH7101M025536	BRACKET, ESCALATOR MOUNTING	39	ASH-05000-0170	S4008LHSS	SCREW. M4x8 TRUSS HEAD SS
11	ASH-05000-0168	DH7101M005530	GUIDE, TRANSITION (R), US 5¢	40	ASH-05000-0108	S4015CS99	SCREW, M4x15 COUNTERSUNK
	ASH-05000-0094	DH7101M025530	GUIDE, TRANSITION (R), US 25¢	41		W4010FW10	WASHER, 4x10x1.0 FLAT
	ASH-05000-0044	DH7101M10T530	GUIDE, TRANSITION (R). $1 TOKEN	42	ASH-05000-0029	DH7001M025073	SEPARATOR, COIN
12	ASH-05000-0169	DH7101M005531	GUIDE, TRANSITION (L). US 5¢	43	ASH-05000-0030	DH7001M025074	RETAINER, SEPARATOR
	ASH-05000-0095	DH7101M025531	GUIDE, TRANSITION (L), US 25¢		ASH-05000-0037	DH7001M10T074	RETAINER, SEPARATOR. $1 TOKEN
	ASH-05000-0045	DH7101M10T531	GUIDE, TRANSITION (L), $1 TOKEN	44		S4010HXSS	SCREW, M4x10 UPSET SF SS
13	ASH-05000-0077	DH7534M025529	COVER, TRANSITION (R)	45		S4015HXSS	SCREW, M4x15 UPSET SF SS
14:	ASH-05000-0096	DH7101M025534	PLATE, COIN SLIDE	46		S3010HXSS	SCREW, M3x10 UPSET SF SS
15	ASH-05000-0043	DH7101M025015	ROLLER LEVER, ESCALATOR	47		S4012HXSS	SCREW, M4x12 UPSET SF SS
16	ASH-05000-0006	DH7001M025016	SPRING. ROLLER LEVER	48		S4008HXSW	SCREW, M4x8 UPSET SW SS
17	ASH-05000-0007	DH7001M025017	PIN, ROLLER LEVER	49	ASH-05000-0022	DH7001M025057	CAST FRAME
18	ASH-05000-0008	DH7001M025018	BEARING, ROLLER LEVER	50		DH7001M025058	06 BALL BEARING
19	ASH-05000-0112	W3000ER99	03 E-RING	51		DH7001M025059	RETAINER, BEARING
20		N4000HX99	NUT, M4	52		DH7001M025064	WASHER, ROLLER LEVER
21		B4012HX99	BOLT, M4x12	53		S4025LHSS	SCREW, M4x25 LARGE HEAD SS
22	ASH-05000-0113	W3008FW08	WASHER, 3x8x0.8 FLAT	54		DH7001M005070	PLATE, ADJUSTING, US 5¢
23	ASH-05000-0106	S3010RH99	SCREW, M3x10		ASH-05000-0026	DH7001M025070	PLATE, ADJUSTING, US 25¢
24	ASH-05000-0086	N3000HX99	NUT, M3			DH7001M10T070	PLATE, ADJUSTING, $1 TOKEN
25	ASH-05000-0002	DH7001M005025	KNIFE, US 5¢	55		DH7001M005071	RUBBER, JUMP, US 5¢
	ASH-05000-0009	DH7001M025025	KNIFE, US 25¢		ASH-05000-0027	DH7001M025071	RUBBER, JUMP, US 25¢
	ASH-05000-0034	DH7001M10T025	KNIFE, $1 TOKEN		ASH-05000-0036	DH7001M10T071	RUBBER, JUMP. $1 TOKEN
26	ASH-05000-0010	DH7001M025026	BOSS. PLASTIC	56	ASH-05000-0004	DH7001M005072	COVER. JUMP, US 5¢
27	ASH-05000-0011	DH7001M025027	SCREW. BEVEL-HEADED		ASH-05000-0028	DH7001M025072	COVER, JUMP
28		DH7101M10T538	COVER, TRANSITION (L) $1T	57		DH7514M025650	SHIM, TRANSITION (L) O.3t
29	ASH-05000-0099	DH7101M025538	COVER, TRANSITION (L)			DH7514M10T650	SHIM, TRANSITION (L) 0.5t
30		S4012HXSS	SCREW, M4x12 UPSET SF SS	58		S4020HXSS	SCREW, M4x20 UPSET SF SS
31		S4025HXSS	SCREW, M4x25 UPSET SF SS				

DH-750 Model 53, Slant Top Bowl Assembly

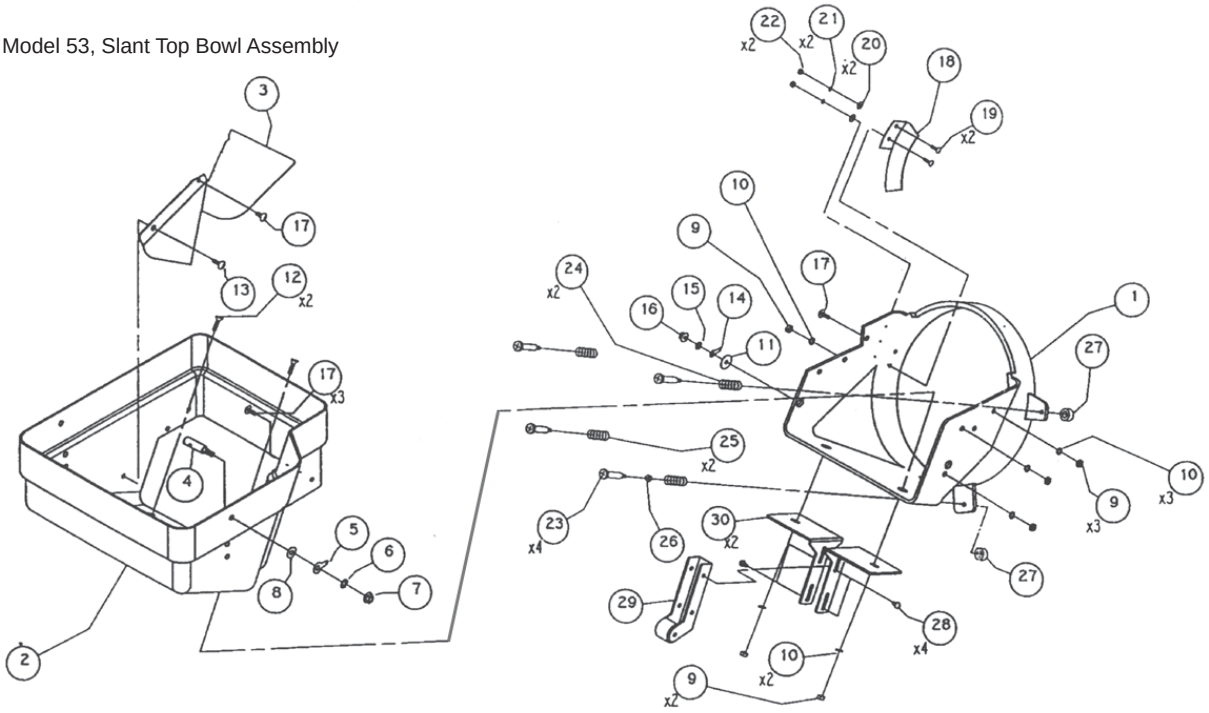

©2002 Bally Gaming and Systems

Hoppers (cont.)

NOTE: Items without a Bally part number are not stocked by Bally.

DH-750 MODEL 53, SLANT TOP BOWL ASSEMBLY (PLASTIC)

Item#	Bally Part #	Asahi Seiko Part #	Description	Item#	Bally Part #	Asahi Seiko Part #	Description
1		DH7031M025322	SCOOP. ALUMINUM	16		N4000SN99	NUT, M4 SHOULDER
2		DH7534M025950	BOWL, HOPPER (PLASTIC)	17		S4012LH99	SCREW. M4x12 LARGE HEAD
3		DH7031M025046	PLATE, REGULATOR	18	ASH-05000-0021	DH7001M025052	INSULATOR
4		DH7011M025153	.PROBE PIN	19		S3010LH99	SCREW. M3x10 LARGE HEAD
5		DH7011M025093	05 WIRE TERMINAL	20	ASH-05000-0113	W3008FW05	WASHER, 3x8x0.5 FLAT
6		W5000SR99	WASHER, M5,STAR	21		W3000SW99	WASHER. M3 SPLIT
7		N5000SN99	NUT.M5 SHOULDER	22	ASH-05000-0086	N3000HX99	NUT, M3
8		W5012FVW08	WASHER, 5x12X0.8 FLAT	23	ASH-05000-0018	DH7001M025047	SCREW, BOWL MOUNTING
9		M4000HX99	NUT, M4	24	ASH-05000-0019	DH7001M025048	SPRIN6. BOWL MOUNTING, UPPER
10		W4000SW99	WASHER, M4 SPLIT	25	ASH-05000-0020	DH7001M025049	SPRING, BOWL MOUNTING, LOWER
11		W4015FW10	WASHER, 4x15x1.0 FLAT	26	ASH-05000-0104	N4006HX99	NUT, M4 SMALL
12	ASH-05000-0108	S4015CS99	SCREW, M4X15 COUNTERSUNK	27	ASH-05000-0038	DH7001M10T081	COLLAR. SPACING ($1 TOKEN ONLY)
13	ASH-05000-0109	S4015LHSS	SCREW, M4x15 LARGE HEAD SS	28		S4008RHSF	SCREW, M4x8 W/SW & FW
14		DH7011M025307	04 WIRE TERMINAL	29		DH7031M025324	ROLLER, SUPPORT
15		W4000SR99	WASHER. M4 STAR	30		DH7534M025325	BRACKET, SUPPORT

DH-750 Model 53, Slant Top Escalator Assembly

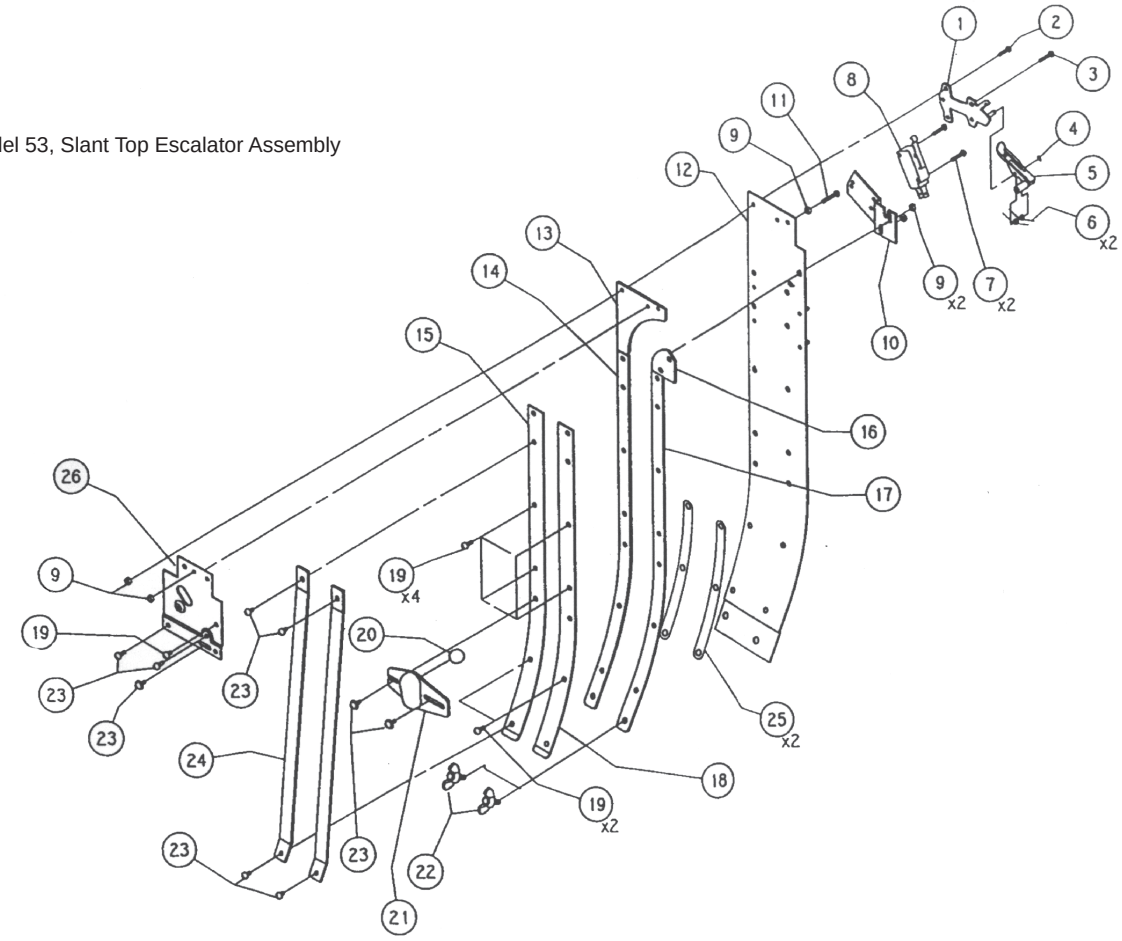

Hoppers (cont.)

NOTE: Items without a Bally part number are not stocked by Bally.

DH-750 MODEL 53, SLANT TOP ESCALATOR ASSEMBLY

Item#	Bally Part #	Asahi Seiko Part #	Description	Item#	Bally Part #	Asahi Seiko Part #	Description
1	ASH-05000-0020	DH7101M025516	PLATE, ACTUATOR MOUNTING	14		DH7534M005604	RAIL. GUIDE (L) 2.5t
2		S3010HXSW	SCREW, M3x10 UPSET SW SS			DH7534M025604	RAIL. GUIDE (L) 2.Ot
3		S3012HXSW	SCREW, M3x12 UPSET SW SS			DH7534M10T604	RAIL, GUIDE (L) 3.2t
4	ASH-05000-0111	W2000ER99	02 E-RING	15		DH7534M025606	COVER. GUIDE (L)
5	ASH-05000-0088	DH7101M025522	ACTUATOR, M/S INBOARD	16	ASH-05000-0160	DH7301M005560	GUIDE, TOP (R) US 5¢
6	ASH-05000-0089	DH7101M025523	SPRING, ACTUATOR		ASH-05000-0049	DH7301M025560	GUIDE, TOP (R) US 25¢
7		S3013RH99	SCREW, M3x13	17		DH7534M005605	RAIL. GUIDE (L) 2.5t
8	ASH-05000-0140	DH7534M025068	MICROSWITCH (D44L-R1LD)			DH7534M025605	RAIL, GUIDE (L) 2.0t
	ASH-05000-0039	DH7001P025013	PROXIMITY SENSOR			DH7534M025605	RAIL, GUIDE (L) 3.2t
9	ASH-05000-0086	N3000HX99	NUT, M3	18		DH7534M025607	COVER. GUIDE (R)
10		DH7301M025069	BRACKET. M/S MOUNTING (INBOARD)	19		S3010HXSS	SCREW, M3x10 UPSET SF SS
11		S3016RH99	SCREW, M3x16	20	ASH-05000-0091	DH7101M025525	011 BALL BEARING
12		DH7534M005601	PLATE, BACK US 5¢	21	ASH-05000-0090	DH7101M025524	RETAINER, CHECK BALL
		DH7534M025601	PLATE, BACK US 25¢	22	ASH-05000-0092	DH7101M025527	BOLT, M4x1OWING
		DH7534M10T601	PLATE, BACK $1T	23		S3012HXSS	SCREW, M3x12 UPSET SF SS
13		DH7301M005507	GUIDE, TOP (L) US 5¢	24	ASH-05000-0079	DH7534M025565	SUPPORT, ESCALATOR
	ASH-05000-0047	DH7301M025507	GUIDE. TOP (L) US 25¢	25		DH7534M025602	RAIL SPACER
	ASH-05000-0052	DH7301M10T507	GUIDE. TOP (L) $1T	26	ASH-05000-0048	DH7301M025514	COVER, TOP

DH-750 Model 51 Hopper Assembly

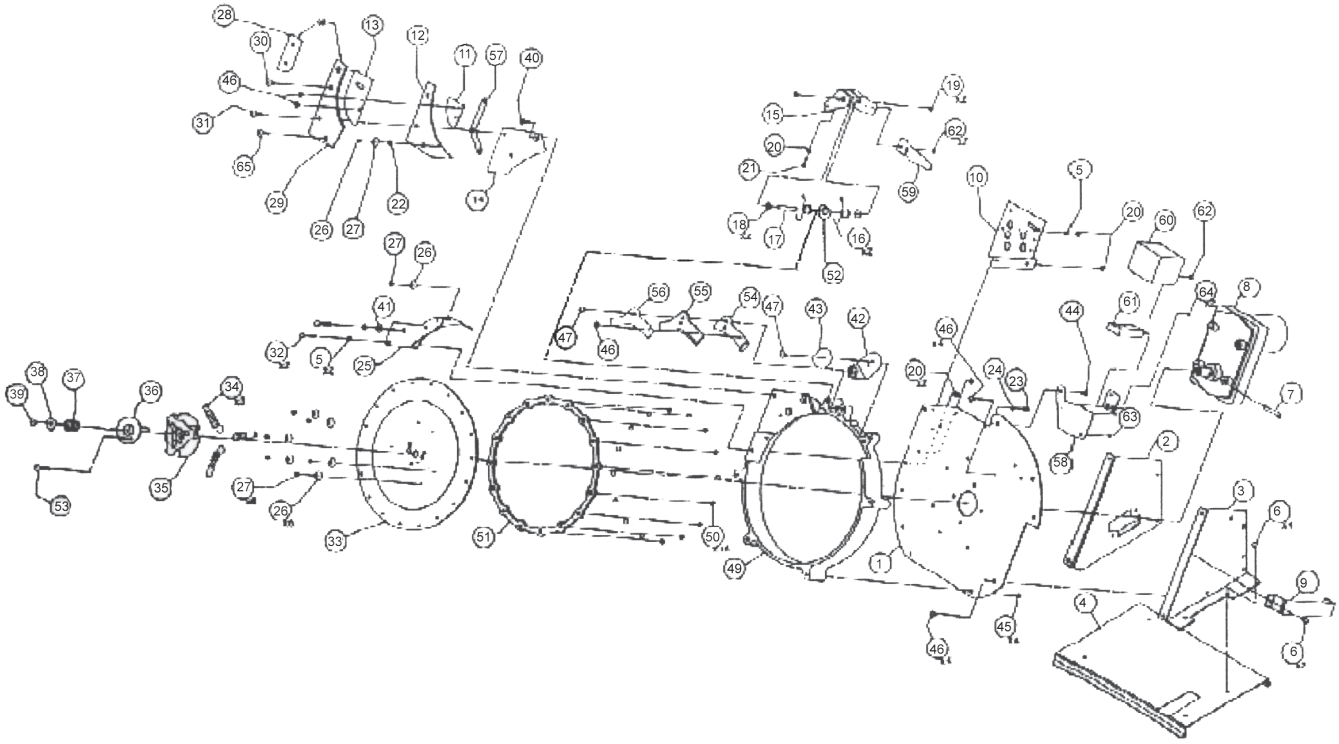

©2002 Bally Gaming and Systems

Hoppers (cont.)

NOTE: Items without a Bally part number are not stocked by Bally.

DH-750 MODEL 51, BARTOP (AS-03107-SERIES)

Item#	Bally Part #	Asahi Seiko Part #	Description	Item#	Bally Part #	Asahi Seiko Part #	Description
1		DH7991M025001	PLATE, CHASSIS	34	ASH-05000-0013	DH7001M025034	SPRING, STIRRING
2		DH7534M025002	FRAME, SIDE (R	35	ASH-05000-0014	DH7001M025035	COVER, SPRING
3		DH7514M025003	FRAME, SIDE (L	36	ASH-05000-0015	DH7001M025036	HOLDER, SPRING
4		DH7534M025004	PLATE. BASE	37	ASH-05000-0016	DH7001M025037	SPRING, DISC
5		W4000SW99	WASHER, M4 SPLIT	38		W4015FW10	WASHER, 4x15x1.0 FLAT
6		S4006RHSW	SCREW, M4x6 W/SW	39	ASH-05000-0170	S4008LHSS	SCREW. M4x8 TRUSS HEAD SS
7	ASH-05000-0005	DH7001M025007	PIN, MOTOR DRIVE	40	ASH-05000-0108	S4015CS99	SCREW. M4x15 COUNTERSUNK
8	ASH-05000-0040	DH7004M025008	MOTOR, 24VDC (DME44S7C-272)	41		W4010FW10	WASHER, 4x10x1.0 FLAT (US 5¢ ONLY)
9		DH7001M025055	HANDLE	42	ASH-05000-0029	DH7001M025073	SEPARATOR, COIN
10	ASH-05000-0097	DH7101M025536	BRACKET, ESCALATOR MOUNTING	43	ASH-05000-0030	DH7001M025074	RETAINER, SEPARATOR
11	ASH-05000-0168	DH7101M005530	GUIDE, TRANSITION (R), US 5¢		ASH-05000-0037	DH7001M10T074	RETAINER, SEPARATOR. $1 TOKEN
		DH7101M025530	GUIDE. TRANSITION (R), US 25¢	44		S4010HXSS	SCREW, M4x10 UPSET SF SS
	ASH-05000-0044	DH7101M10T530	GUIDE. TRANSITION (R). $1 TOKEN	45		S4014HXSS	SCREW. M4x14 UPSET SF SS
12	ASH-05000-0169	DH7101M005531	GUIDE, TRANSITION (L), US 5¢	46		S3010HXSS	SCREW, M3x10 UPSET SF SS
		DH7101M025531	GUIDE, TRANSITION (L), US 25¢	47		S4012HXSS	SCREW, M4x12 UPSET SF SS
	ASH-05000-0045	DH7101M10T531	GUIDE, TRANSITION (L), $1 TOKEN	48		S4008HXSW	SCREW, M4x8 UPSET SW SS
13	ASH-05000-0077	DH7534M025529	COVER, TRANSITION (R)	49	ASH-05000-0022	DH7001M025057	CAST FRAME
14	ASH-05000-0096	DH7101M025534	PLATE, COIN SLIDE	50		DH7001M025058	06 BALL BEARING
15		DH7514M025918	LEVER, ROLLER	51		DH7001M025059	RETAINER, BEARING
16	ASH-05000-0006	DH7001M025016	SPRING, ROLLER LEVER	52		DH7001M025064	WASHER, ROLLER LEVER
17	ASH-05000-0007	DH7001M025017	PIN, ROLLER LEVER	53		S4025LHSS	SCREW, M4x25 LARGE HEAD. SS
18	ASH-05000-0008	DH7001M025018	BEARING, ROLLER LEVER	54		DH7001M005070	PLATE, ADJUSTING, US 5¢
19	ASH-05000-0112	W3000ER99	03 E-RING		ASH-05000-0026	DH7001M025070	PLATE, ADJUSTING, US 25¢
20		N4000HX99	NUT, M4			DH7001M10T070	PLATE, ADJUSTING, $1 TOKEN
21		B4012HX99	BOLT, M4x12	55		DH7001M005071	RUBBER, JUMP, US 5¢
22	ASH-05000-0113	W3008FW08	WASHER, 3x8x0,8 FLAT		ASH-05000-0027	DH7001M025071	RUBBER, JUMP, US 25¢
23	ASH-05000-0106	S3010RH99	SCREW, M3x10		ASH-05000-0036	DH7001M10T071	RUBBER, JUMP. $1 TOKEN
24	ASH-05000-0086	N3000HX99	NUT, M3	56	ASH-05000-0004	DH7001M005072	COVER. JUMP, US 5¢
25	ASH-05000-0002	DH7001M005025	KNIFE, US 5¢		ASH-05000-0028	DH7001M025072	COVER, JUMP
	ASH-05000-0009	DH7001M025025	KNIFE. US 25¢	57		DH7514M025650	SHIM, TRANSITION (L) O.3t
	ASH-05000-0034	DH7001M10T025	KNIFE, $1 TOKEN			DH7514M10T650	SHIM, TRANSITION (L) 0.5t
26	ASH-05000-0010	DH7001M025026	BOSS, PLASTIC	58		DH7514M025915	BRACKET, OPTIC MOUNTING
27	ASH-05000-0011	DH7001M025027	SCREW, BEVEL-HEADED	59		DH7514M025916	FLAG, OPTIC
28		DH7101M10T538	COVER, TRANSITION (L) $1T	60		DH7514M025917	COVER, OPTIC
29	ASH-05000-0099	DH7101M025538	COVER, TRANSITION (L)	61		DH7514M025920	OPTIC
30		S4012HXSS	SCREW, M4x12 UPSET SF SS	62		N3000LN99	NUT, M3 NYLON LOCK
31		S4025HXSS	SCREW, M4x25 UPSET SF SS	63		S3005RHSF	SCREW, M3x5 W/SW & FW
32	ASH-05000-0001	B4025HXSS	BOLT. M4x25, SS	64		S3595TP99	SCREW, M3.5x9.5 TAPPING
33	ASH-05000-0003	DH7001M005033	DISC, US 5¢	65		S4020HXSS	SCREW, M4x20 UPSET SF SS
	ASH-05000-0012	DH7001M025033	DISC, US 25¢				
	ASH-05000-0035	DH7001M10T033	DISC, $1 TOKEN				

DH-750 Model 51, Bartop Bowl Assembly

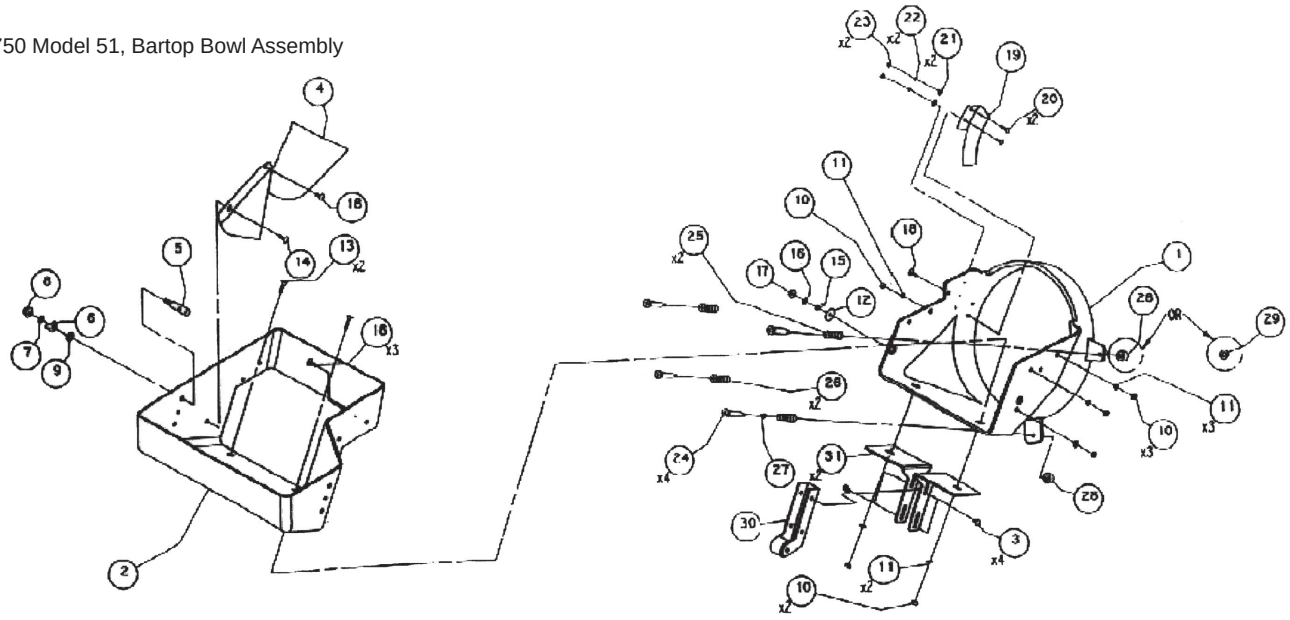

Hoppers (cont.)

NOTE: Items without a Bally part number are not stocked by Bally.

DH-750 MODEL 51, BARTOP BOWL ASSEMBLY

Item#	Bally Part #	Asahi Seiko Part #	Description	Item#	Bally Part #	Asahi Seiko Part #	Description
1		DH7031M025322	SCOOP. ALUMINUM	17		N4000SN99	NUT, M4 SHOULDER
2		DH7514M025050	BOWL, HOPPER	18		S4010LH99	SCREW, M4x1O LARGE HEAD
3		S4008RHSF	SCREW, M4x8 W/SW & FW	19	ASH-05000-0021	DH7001M025052	INSULATOR
4		DH7031M025046	PLATE, REGULATOR	20		S3010LH99	SCREW. M3x10 LARGE HEAD
5		DH7011M025153	PROBE PIN	21	ASH-05000-0113	W3008FW05	WASHER, 3x8x0.5 FLAT
6		DH7011M025093	05 WIRE TERMINAL	22		W3000SW99	WASHER, M3 SPLIT
7		W5000SR99	WASHER, M5 STAR	23	ASH-05000-0086	N3000HX99	NUT, M3
8		N5000SN99	NUT. M5 SHOULDER	24	ASH-05000-0018	DH7001M025047	SCREW, BOWL MOUNTING
9		W5012PW08	WASHER, 5x12x0.8 FLAT	25	ASH-05000-0019	DH7001M025048	SPRING, BOWL MOUNTING, UPPER
10		N4000HX99	NUT, M4	26	ASH-05000-0020	DH7001M025049	SPRING, BOWL MOUNTING, LOWER
11		W4000SW99	WASHER, M4 SPLIT	27	ASH-05000-0104	N4006HX99	NUT, M4 SMALL
12		W4015FW10	WASHER, 4x15x1.0 FLAT	28	ASH-05000-0038	DH7001M10T081	COLLAR, SPACING ($1 TOKEN ONLY)
13	ASH-05000-0108	S4015CS99	SCREW. M4x15 COUNTERSUNK	29		W4010FW16	WASHER, 4x10x1.6 FLAT (5^ ONLY)
14	ASH-05000-0109	S4015LHSS	SCREW, M4x15 LARGE HEAD SS	30		DH7031M025324	ROLLER. SUPPORT
15		DH7011M025307	04 WIRE TERMINAL	31		DH7534M025325	BRACKET, BOWL SUPPORT
16		W4000SR99	WASHER, M4 STAR				

DH-750 Model 51, Bartop Escalator Assembly

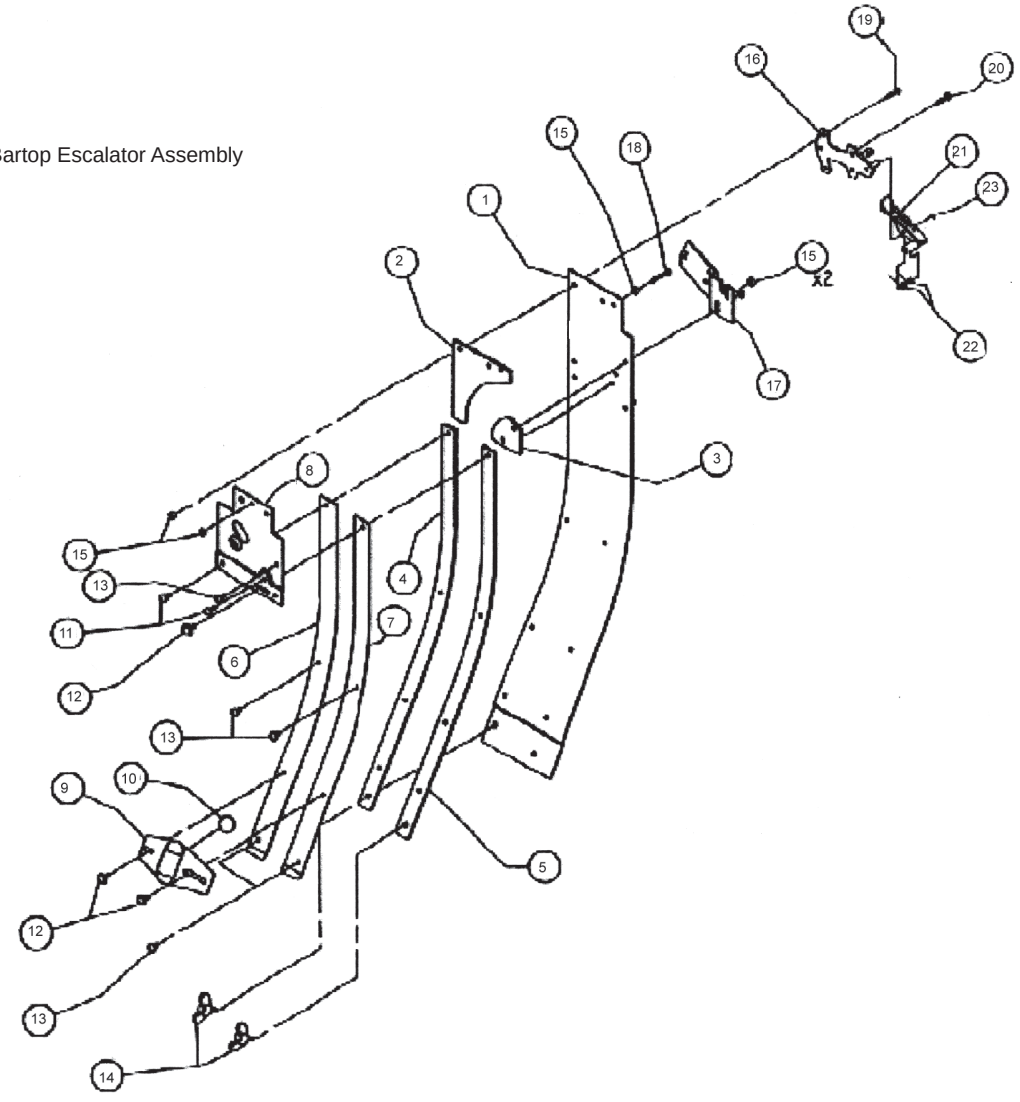

©2002 Bally Gaming and Systems

Hoppers (cont.)

NOTE: Items without a Bally part number are not stocked by Bally.

DH-750 MODEL 51, BARTOP ESCALATOR ASSEMBLY

Item#	Bally Part #	Asahi Seiko Part #	Description	Item#	Bally Part #	Asahi Seiko Part #	Description
I		DH7514M005505	PLATE, BACK, US 5¢	8	ASH-05000-0048	DH7301M025514	COVER, TOP
		DH7514M025505	PLATE, BACK, US 25¢	9		DH7101M025524	BRACKET. BALL RETAINING
		DH7514M10T505	PLATE. BACK, $1 TOKEN	10		DH7101M025525	011 BALL BEARING
2		DH7301M005507	GUIDE. 1 UP (L), US 5¢	11		S3012HXSS	SCREW, M3x12 UPSET SF SS
	ASH-05000-0047	DH7301M025507	GUIDE, TOP (L), US 25¢	12		S3012HXSS	SCREW. M3x12 UPSET SF SS
	ASH-05000-0052	DH7301M10T507	GUIDE, TOP (L). $1 TOKEN	13		S3010HXSS	SCREW, M3x1O UPSET SF SS
3		DH7301M005560	GUIDE, TOP (R). US 5¢	14		DH7101M025527	BOLT, M4 WING
	ASH-05000-0049	DH7301M025560	GUIDE, TOP (R), US 25¢	15	ASH-05000-0086	N3000HX99	NUT, M3
4	ASH-05000-0146	DH7514M005506	RAIL, GUIDE (L), US 5¢	16		DH7101M025516	PLATE, ACTUATOR MOUNTING
	ASH-05000-0147	DH7514M025506	RAIL, GUIDE (L). US 25¢	17	ASH-05000-0025	DH7001M025069	PLATE, M/S MOUNTING, INBOARD
		DH7514M10T506	RAIL. GUIDE (L), $1 TOKEN	18		S3016RH99	SCREW, M3x16
5	ASH-05000-0149	DH7514M005508	RAIL, GUIDE (R), US 5¢	19		S3010HXSW	SCREW, M3x1O UPSET SWSS
	ASH-05000-0150	DH7514M025508	RAIL, GUIDE (R), US 25¢	20		S3012HXSW	SCREW, M3x12 UPSET SW SS
	ASH-05000-0151	DH7514M10T508	RAIL, GUIDE (R). $1 TOKEN	21		DH7301M025522	ACTUATOR, M/S, INBOARD
6	ASH-05000-0152	DH7514M025509	COVER, GUIDE (L)	22		DH7101M025523	SPRING, ACTUATOR
7	ASH-05000-0153	DH7514M025511	COVER, GUIDE (R)	23	ASH-05000-0111	W2000ER99	02 E-RING

HOPPER CAPACITIES					
PROBE AT LEVEL	STANDARD		SUPER		ASAHI-SEIKO
	VIDEO	SLOT	VIDEO	SLOT	
	5¢				
1	1100	700	2100	1200	
2	2100	1000	2900	2000	
3	3100	1700	3600	2500	
4		2200	4300	3400	
5		2800	5000	3800	5000
6		3400		4300	
PROBE AT LEVEL	STANDARD		SUPER		ASAHI-SEIKO
	VIDEO	SLOT	VIDEO	SLOT	
	25¢				
1	900	700	1600	1000	
2	1000	2200	1500		
3	1400	2800	2200		
4	1700	3400	3100		
5	2400	4000	3800	3500	
6	2900		4200		
PROBE AT LEVEL	STANDARD		SUPER		ASAHI-SEIKO
	VIDEO	SLOT	VIDEO	SLOT	
	$1				
1	340	140	500	300	
2	560	280	640	460	
3	800	400	800	660	
4		560	900	800	
5		680	1100	1000	1200
6		820		1200	

©2002 Bally Gaming and Systems

Ticket Printers

TransAct Technologies, Inc. • 20 Bomax Drive Ithaca, New York 14850 USA • Phone: Sales/Support 1-877-7ithaca or (607)-257-8901 Fax: Sales (607) 257-3868 / Support (607) 257-3911 • http://www.ithper.com

Ithaca Series 70 Impact Ticket Printer

Series 70

The Series 70 takes the gamble out of consistent, quality impact printing for unattended printing applications. The Series 70 delivers receipts, tickets, and coupons at 4.9 lines per second with solid consistency. It features enhanced or emphasized font styles for greater legibility, and utilizes Oki® technology, known worldwide for quality, reliability, and snap-in/snap-out, user-friendly ribbon cassette. The Series 70 has a convenient “Paper Low” indicator to alert you before the paper roll runs out.

Features

- All Printers are Mechanisms with Drive Electronics
- Print Speed: 4.9 lps.—On Standard Test Receipt
- One-Year Standard Warranty: Extended Maintenance Plan Available
- Data Buffer: 2K
- Auto-Cutter (Full Cut): 82.5 mm (3.25 in.)
- CPI: 5, 6, 8.5, 10, 12, 15, 17.1, 24
- Print Zone: 60 mm (2.34 in.)
- Self-Test: Test Ticket
- Low 37W Power
- Paper Low Indicator
- Character Sets: 2 ASCII (slashed ø and unslashed 0), IBM Character Sets I and II, French, French Canadian, Spanish, German
- Barcodes: Code 128, Interleaved 2 of 5, Interleaved 3 of 9

Power Requirements

- Standard (Internal Supply): 110/120 VAC, 60 Hz
- Optional (Internal Supply): 220/240 VAC, 50/60 Hz

Reliability

- Printer in full operation (using all available features)*
- MTBF: 25,000 Hours
- Printhead: 200,000,000 Characters
- Auto-Cutter: 1,000,000 Cuts

Reliability data is based on Ithaca standard test conditions.

Environmental Specifications

- Operating Temperature: 0 to +50 degrees C (32 to +122 degrees F)
- Operating Humidity: 10 to 90% RH non-condensing

Media

- Standard Paper Roll—M75 (one-ply):

  Width: 82.5 mm (3.25 in.) Diameter: 89.0 mm (3.5 in.) or optional 152.0 mm (6 in.)

  One-ply Maximum Thickness: .11 mm (.0045 in.)

  Length Per Roll (3.5 in. dia.): 74.6 m (245 ft.)

  Length Per Roll (6 in. dia.): 148.8 m (488 ft.)

- Standard Paper Roll—M76 (two-ply):

  Width: 82.5 mm (3.25 in.) Diameter: 89.0 mm (3.5 in.) Maximum Thickness Per Ply: .09 mm (.0035 in.)

  Length Per Roll: 38.1 mm (125 ft.)

- Ribbons: 3-4.5 Million Character Life

  Ithaca or Genuine Oki Snap-on Ribbon Cassette (Black or Purple)

Physical Characteristics

- Dimensions (without transport): 154 mm H x 274 mm L x 172 mm H (6.06 in. W x 10.75 in. L x 6.75 in. H)
- Weight: 3.86 kg (8.5 lbs.)

©2002 Bally Gaming and Systems

Ticket Printers (cont.)

Connection Printer (Centronics)

1	BK/RD	Strobe	19		
2	BR	Data 1	20		
3	WT	Data 2	21		
4	OR/BL	Data 3	22		
5	YE	Data 4	23		
6	OR	Data 5	24		
7	GY	Data 6	25		
8	BL	Data 7	26		
9	YE/WT	Data 8	27		
10			28		
11	WT/BL	Busy	29		
12	WT/BR	Paper End	30		
13	WT/OR	Select	31	BR/BK	Printer Reset
14			32	WT/BK	Printer Fault
15			33	BK	Ground
16	BK	Ground	34		
17			35		
18			36		

Backplane (Dual Row Header)



1	BR	Data 1	14		
2	WT/OR	Select	15	YE/WT	Data 8
3	WT	Data 2	16		
4	WT/BL	Busy	17	BK/RD	Strobe
5	OR/BL	Data 3	18		
6			19	BR/BK	Printer Reset
7	YE	Data 4	20		
8	BK-1	Ground	21	WT/BK	Printer Fault
9	OR	Data 5	22		
10	BK-2	Ground	23	WT/BR	Paper End
11	GY	Data 6	24		
12			25		
13	BL	Data 7	26		

Changing the Ribbon Cassette: Change the cassette when the print becomes faded. Worn ribbons can damage the print head.

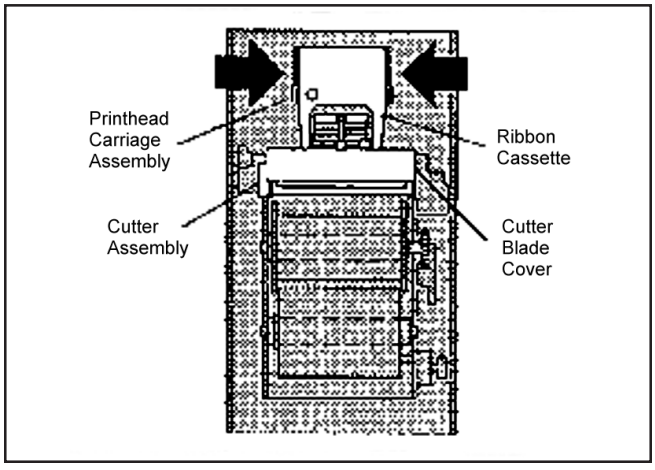

1. To remove the old cassette slide the Printhead Carriage Assembly to the middle.
2. Hold down the Cutter Blade Cover.
3. Grasp the bottom of the ribbon cassette and pull out.

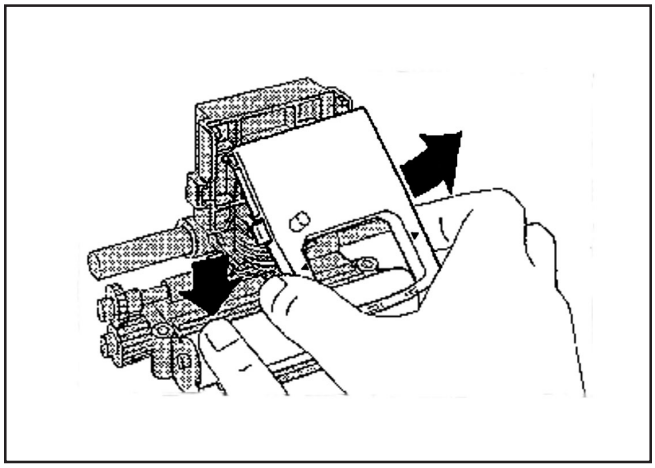

4. To install the new cassette hold down the Cutter Blade Cover.
5. Align the grooves at the top of the cassette with the tabs on the Printhead Carriage Assembly.
6. Pivot the ribbon cassette into the Printhead Carriage Assembly until it snaps into place.
7. Tighten the ribbon by turning the knob on the cassette clockwise.

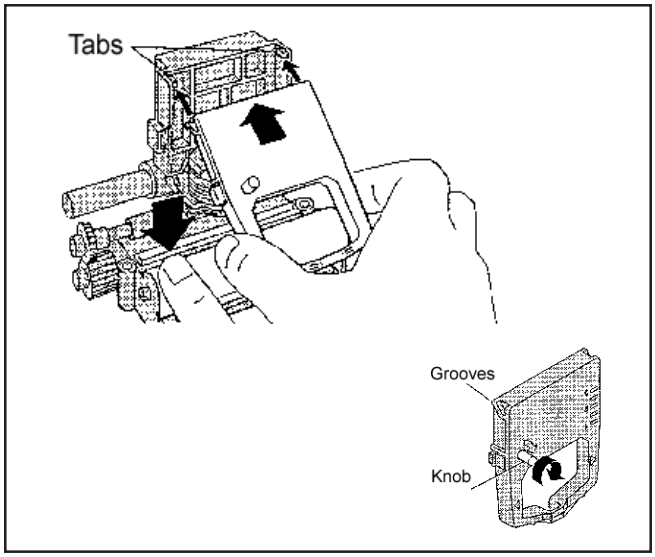

©2002 Bally Gaming and Systems

Ticket Printers (cont.)

Ordering Supplies

The following parts are available through TransAct Technologies, Inc.:

Description	Part #
Paper (two-ply)	98-0558
Ribbon Cassette (black or dark purple)	06-0560 (case of 12)
Supply Roll Spindle Large Diameter	09-1230
Supply Roll Spindle Small Diameter	09-1494
Take-up Spindle Take-up Core	06-0597
Take-up Flange	06-0599
Take-up Assembly (both core and flange)	06-0993
Power Cord	06-0561
Fuses 1.0 Amp, 125 Volt	150-9810010
1.5 Amp, 125 Volt	150-9810015
Printhead	06-0565
Printhead Clamp	06-0571

Changing Paper

Change the Supply Roll paper when you see the pink stripe on the receipt paper or when the terminal indicates the paper is low. Although the pink stripe appears with eight to ten feet left on the roll, the printer will print only 21 inches after the Paper Low sensor activates.

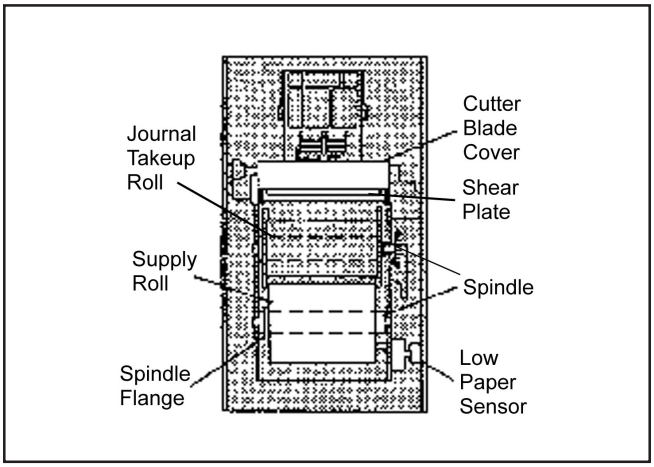

1. Unsnap the Journal Takeup Roll Spindle from the bracket. Tear off the yellow journal paper using the Shear Plate.

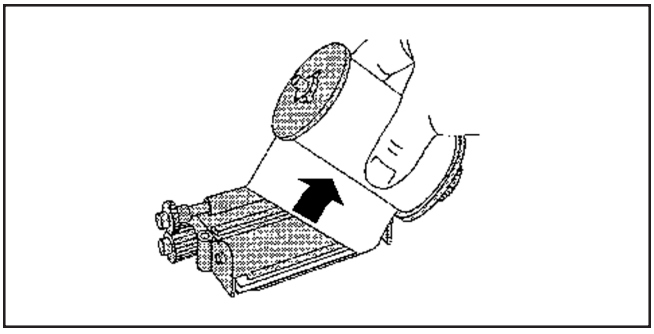

2. Remove the spindle from the journal by unscrewing the left flange in the direction of the OFF arrow. Secure and store the journal roll as required.

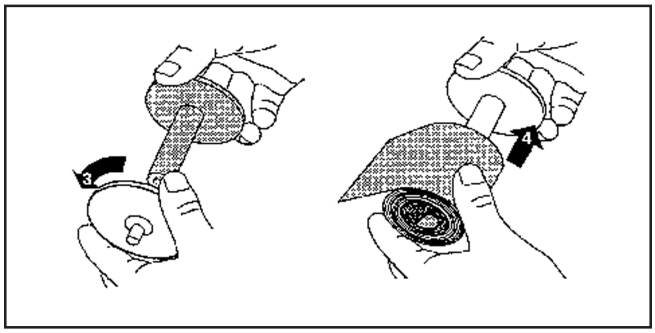

3. Unsnap the Supply Roll Spindle from the bracket. Hold down the Cutter Blade Cover and pull the remaining paper out of the printer.

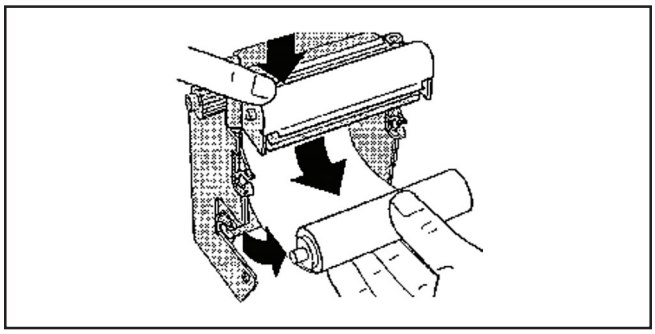

4. Remove the spindle from the used supply roll and set it aside. Don't throw it away.

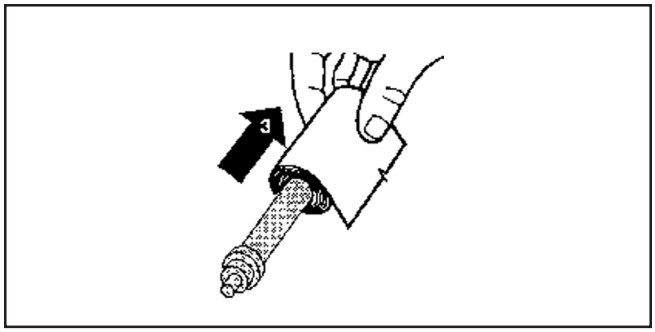

5. Trim enough of the new Supply Roll for a straight edge free from glue.

6. Put the spindle that was removed from the used supply roll into the new roll so that the white receipt paper is on the outside (See figure below). Snap the spindle into the lower set of snaps in the Bucket.

7. Hold down the Cuter Blade Cover and push the paper up through the throat in the back of the Bucket until the paper passes the printhead.

©2002 Bally Gaming and Systems

Ticket Printers (cont.)

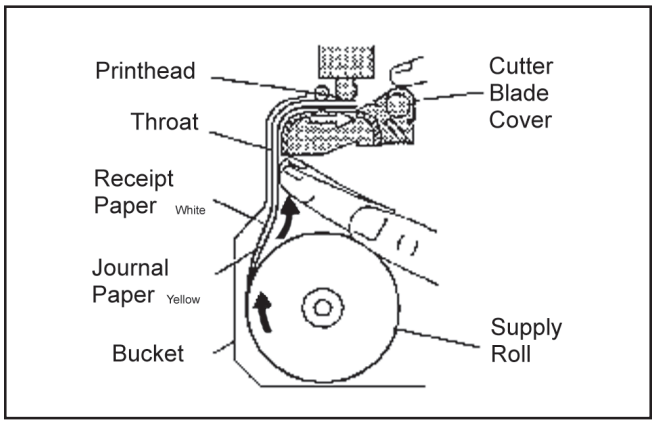

8. The receipt and journal thread through different paths. Using the Thumb Wheel (Gear on the left side. See bottom figure) to advance the paper, guide the journal and receipt paper so that they are separated by the Shear Plate.

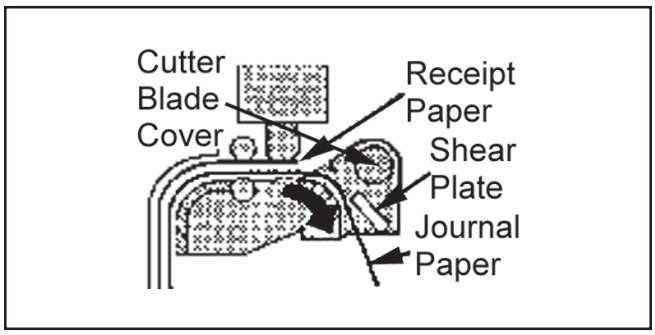

9. Advance about six inches of paper then tear off only the white receipt ply.

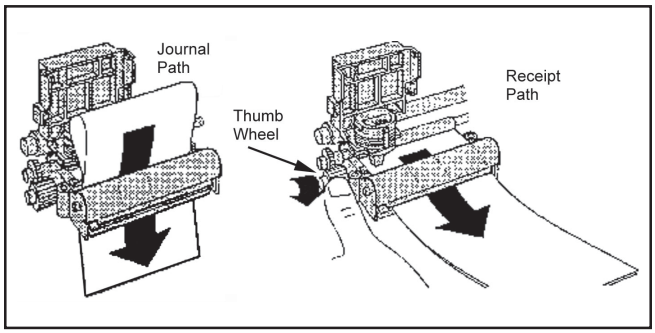

10. Reassemble the Journal Takeup Spindle by turning the flange in the direction of the ON arrow. Do not overtighten.

11. Fold about ½" of the journal paper and insert it into the groove of the Journal Takeup Spindle so that the gear is to the right.

12. Turn the Journal Takeup Spindle a few turns in the direction of the ON arrow to take up the excess journal paper.

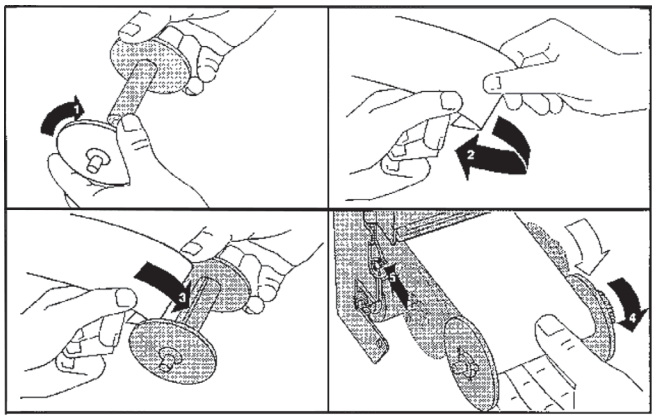

Function Switch

The Function Switch is a momentary two-position switch that provides the following functions:

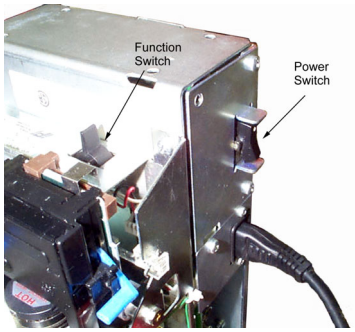

With power ON:

Left: Incremental paper advance
Right: Auto paper advance and cut.

Position switch with power OFF, then power ON:

Left: Print Test
Right: Hex Data Dump

Replacing the Printhead

WARNING: The printhead may be hot.

1. Remove the ribbon cassette.

2. Release the printhead by unfastening the Printhead Clamp. Pull the tab on the left to swing it open.

3. Hold down the Cutter Blade Cover.

4. Pull the printhead free from the edge connecter and carriage.

5. Using the guide on the printhead, slide the new printhead onto the carriage and into the edge connector.

©2002 Bally Gaming and Systems

Ticket Printers (cont.)

6. Secure the printhead with the Printhead Clamp.

7. Put the ribbon cassette back in.

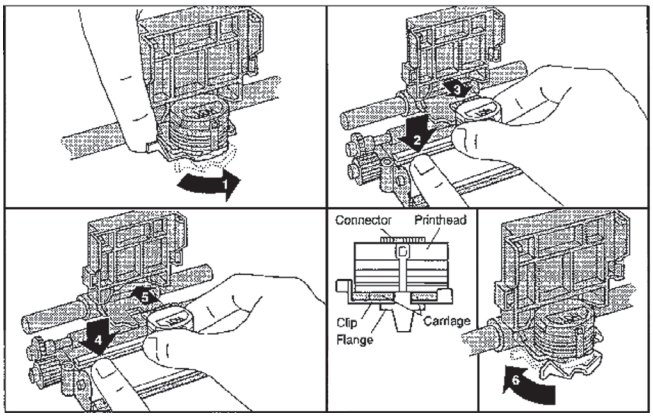

8. Check the print quality. Use the blue lever on the side of the carriage for lighter or darker printing.

Ithaca Series 700 Thermal Ticket Printer

Series 700

Coin-free slot machines have never been so hassle-free. With the Series 700, the ticket will not stick out until it is completely printed. This prevents players from pulling it too soon—a major cause of printer problems. Another practical features is a user-friendly, illuminated front bezel; a ticket supply box that holds 400 tickets; and a ball-bearing drawer chassis that slides out for easy ticket loading and maintenance.

Features

- Print Resolution: 8 dots per mm (203dpi) Horizontal and Vertical
- Easy Ticket Loading
- Print Zone Width: 56 mm (2.205 in.)
- Data Buffer: 4K
- Memory: 64K EPROM & 32K RAM
- Self Diagnostics
- Standard Warranty: 1 year
- Bar Code: Code 3 of 9, Interleaved 2 of 5, UPC-A & UPC-E, Codabar,
- EAN8 and EAN13, Code 128, and Postnet
- Ticket Low Sensor
- Top of Form/Ticket-Out Sensor
- High Quality Printing: Text, Barcodes, Graphics, Lines Bitmap Graphics, Portrait, and Landscape Printing
- Ticket is contained within the printer until printing is complete, preventing user interference.

Printing Characteristics

- Print Speed: 51 mm/sec (2 in. per second)
- Five Fonts: 7.5 cpi, 10 cpi, 12 cpi, 16.5 cpi, and 20 cpi
- Normal, Double-high, Double-wide, and Double-high/Double-wide print modes
- Prints on 62 mm x 120 mm, 65 mm x 120 mm, 65 mm x 156 mm (dollar-bill size) tickets

NOTE: 65 mm x 156 mm ticket requires no printing on last 1.4 inches of each ticket

©2002 Bally Gaming and Systems

Ticket Printers (cont.)

Physical Characteristics

- 750—139 mm W x 85 mm H x 159 mm D (5.46 in. W x 3.36 in. H x 6.27 in. D)
- Overall Size with All Options (with 120 mm length ticket supply box):

  139 mm W x 85 mm H x 287 mm D (5.46 in. W x 3.36 in. H x 11.29 in. D)

  Weight: 3.31 kg (7.30 lbs.)
- Overall Size with All Options (with 156 mm length ticket supply box):

  139 mm W x 85 mm H x 325 mm D (5.46 in. W x 3.36 in. H x 12.8 in. D)

  Weight: 3.41 kg (7.50 lbs.)

Media (Thermal Ticket, Fan Fold, Perforated)

- Type: Top coated, high sensitivity, direct thermal (Kanzaki TO-381N or approved equivalent)
- Thickness: 0.112 mm (0.0044 in.)
- Width x Length: 62 mm (2.44 in.) x 120 mm (4.73 in.); 65 mm (2.56 in.) x 120 mm (4.73 in.); 65 mm (2.56 in.) x 156 mm (6.14 in.) dollar-bill size
- Standard Store: 400 tickets per stack

Interface

- Bi-Directional RS232C
- CTS and/or XON/XOFF Handshake

Power Requirements

- 24VDC: 1.5A (supplied by system)
- Exit Lamp: 13VDC @ 150mA (supplied by system)

Reliability: Printhead Life: 25 km

Environmental Specs

- Operating Temperature: 0C to + 40C
- Storage Temperature: -20C to + 70C
- Operating Humidity: 5 to 95% RH Non-Condensing

Troubleshooting

If the 700 Series printer is experiencing printing problems, check to see if the unit is receiving power. The green test LED, located on the top of the “Core” printer, should be on when the printer is correctly receiving power. After confirming that the printer is receiving power, check to see that the ticket has been loaded correctly and is not jammed in the ticket path. Pressing the Ticket Feed switch-on the top of the “Core” printer-will advance a single ticket through the print mechanism, automatically positioning the tickets correctly. Check all connections to ensure a proper signal.

If the printer does not stop feeding when it automatically scrolls the ticket, check to see that the tickets are facing the right direction so the ticket present sensor detects the Black Dot/Top of Form indicator.

Loading Tickets into the Feeding Mechanism: The first ticket of the stack must be inserted into the printer by hand. With the Series 700 Printer Ticket Supply Box, there is a guide to direct the ticket into the printer mechanism. To load the printer, grasp the first ticket, and insert it into the guide until the ticket reaches the printer mechanism. Continue pushing gently until the printer mechanism detects the ticket and the motor pulls it through the printer. The printer will stop feeding automatically. Pressing the Ticket Feed button on the printer controller board will run the motor to present blank tickets or to aid in loading.

1. Insert the first ticket, blank side up, into the ticket feed guides as shown by the load ticket arrow on the instruction card.
2. The printer will automatically feed the ticket when the ticket is sensed by the printer.
3. If ticket does not feed automatically, press the Ticket Feed switch.
4. Remove the excess ticket from the front of the printer.

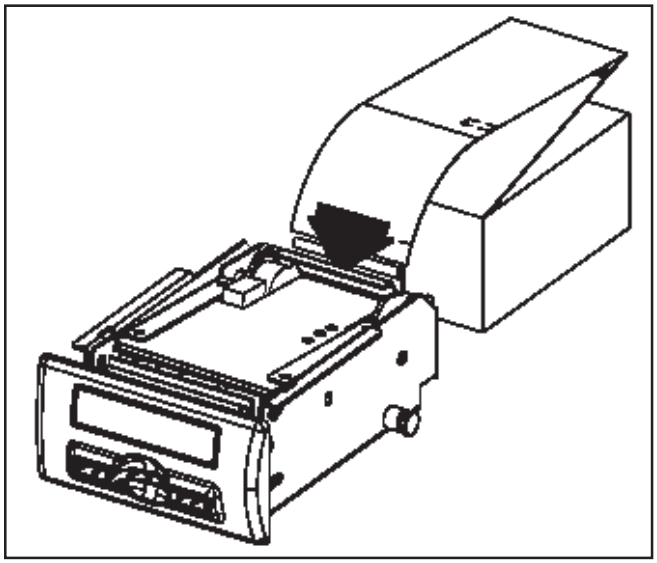

©2002 Bally Gaming and Systems

Ticket Printers (cont.)

SII Selko Instruments Inc.
Seiko Instruments USA Inc. • Micro Printer Division • 2990 West Lomita Blvd., Torrance, CA 90505 • Phone: (800) 553-6570 Fax: (310) 517-8154 • www.seikoprinters.com

PSA-66 Thermal Ticket Printer

PSA-66-ST

Operator Interface: The printer has status indicators and two controls. The status indicators are part of the Keypad. They are LEDs labeled STATUS and ERROR. The Operator controls are the Keypad and the Platen Release Lever.

Loading Paper

To load paper, pull open the printer drawer until the paper tray is completely accessible. Place the paper stack in the printer as indicated by the band around the stack and the Paper Orientation Label in the paper tray. Present the paper to the Paperfeed slot.

The automatic loading feature of this system will advance at least one ticket through the printer. The Platen Release Lever and the paper advance button are provided as support, but usually are not required to load paper.

NOTE: The Keypad CUT function is inoperative.

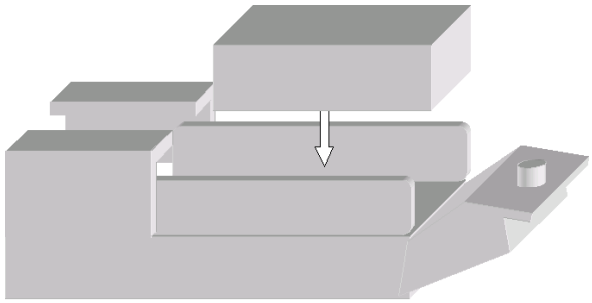

Place paper stack in Paper Tray

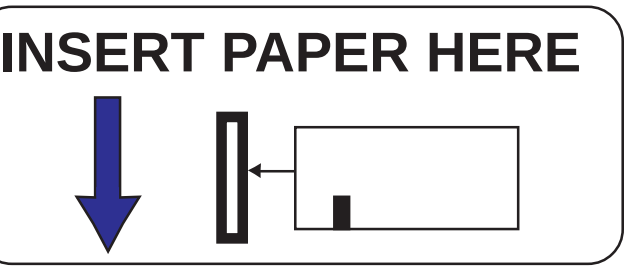

Paper Orientation Label

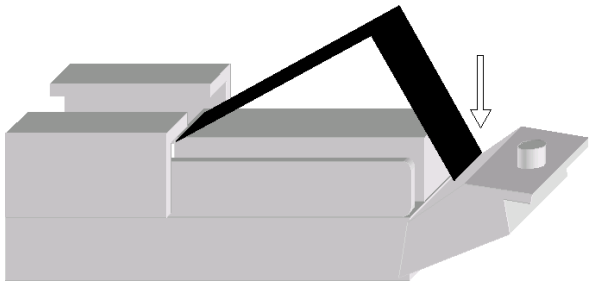

Present end of paper stack to the paper insertion slot

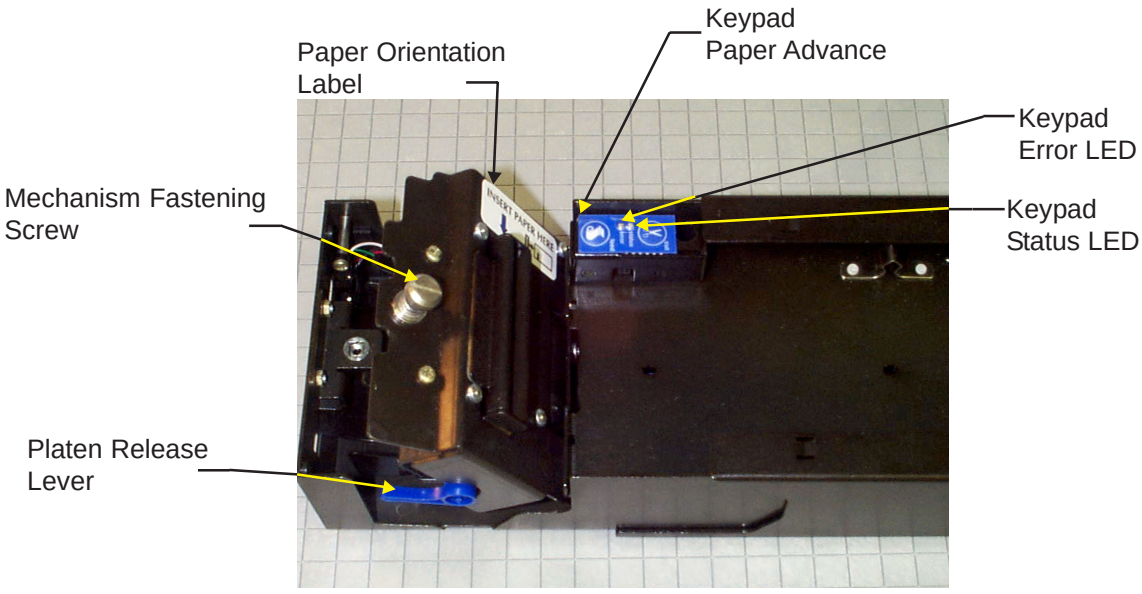

Component Identification

 ©2002 Bally Gaming and Systems

Ticket Printers (cont.)

Keypad LED Operation

The following table lists the conditions reported by the keypad LEDs.

CONDITION	STATUS LED	EERR LED
Unit in Powered Off	0FF	0FF
Unit Ready	ON	OFF
Unit Flushed	ON	ON
Paper out	OFF	ON
Head Up	OFF	ON
Temperature Error	OFF	MED BLINK
Voltage Error	OFF	SLOW BLINK
Print Head Error	ON	FAST BLINK
Flash Memory Error	SLOW BLINK	MED BLINK
Buffer Overflow	OFF	FAST BLINK
Missing Black Index Mark	ON	FAST BLINK
Paper Jam	ON	FAST BLINK

Error Conditions

Paper Out: The printer detects that paper is not present. The printer scans for a paper-out condition at all times. Remedy by loading a new paper stack.

Head Up: This condition results from lowering the Platen Release Lever. To remedy, raise the blue lever on the side of the unit.

Temperature Error: The printer has overheated. If the printer is operating environment is at room-temperature, this error would most likely be the result of a hardware problem. The printer will automatically resume operation when the head temperature cools within operational limits.

Voltage Error: The printer detected a power supply voltage (+24VDC to +25VDC) outside of legal limits. The printer will automatically resume operation when the power supply is within range.

Print Head Error: The printer senses an interfacing problem with the thermal print head. The error state remains until the power is cycled or the unit is reset. If the problem persists, the printer will require service.

Flash Memory Error: The printer is unable to program the Flash memory on the board. The printer will remain in error state until the power is cycled or the unit is reset. If the problem persists, the printer will require service before font or graphic data can be downloaded.

Buffer Overflow: A buffer overflow typically results from a mismatch in handshaking. The printer will remain in error state until the power is cycled or the unit is reset.

Missing Index Mark: While feeding paper or while printing, a black mark has not been seen within approximately 10” of paper. Remedy by using the correct paper in the printer, or installing the paper in the correct orientation. The condition is removed by raising the Platen Release Lever (presumably to change the paper).

Paper Jam: The printer detected an obstruction in the paper path. Remedy by opening the printer head and inspecting for a jammed ticket.

Self Test: If the Keypad FEED is held during power on or reset, a self test will be triggered. Proper operation will result in the printing of a configuration ticket.

Model: **PSA-66-ST**
Firmware: **1.0.0.0.0**

COMMUNICATION
Interface: **serial**
Baud Rate: **19200**
Data Bits: **8**
Parity: **NONE**
Handshaking: **HARDWARE**

PRINT CONTROL
Darkness Control: +00%
Black Bar Index: **Disabled**
Print On Demand: **Disabled**
Auto Sleep Timer: Off

SYSTEM RESOURCES
FLASH -Used: **000000**
-Free: **024064**

LIBRARY INVENTORY
Templates:
Print Regions:
Graphics:
Fonts: **3(0), 7(0), 8(0), 5(0)**

Sample Self-Test Ticket

©2002 Bally Gaming and Systems

Accounting System Interface

All Bally machines can interface accounting systems through a connection on the backplane board. Protocols supported are SDS® and SAS®.

EVO® V8700

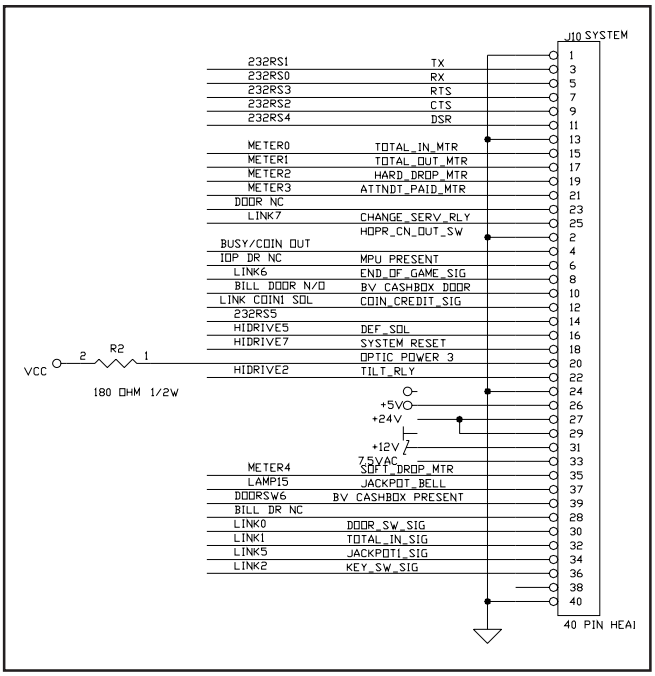

AS-03356-0501 Backplane Board

Game Maker® V7000

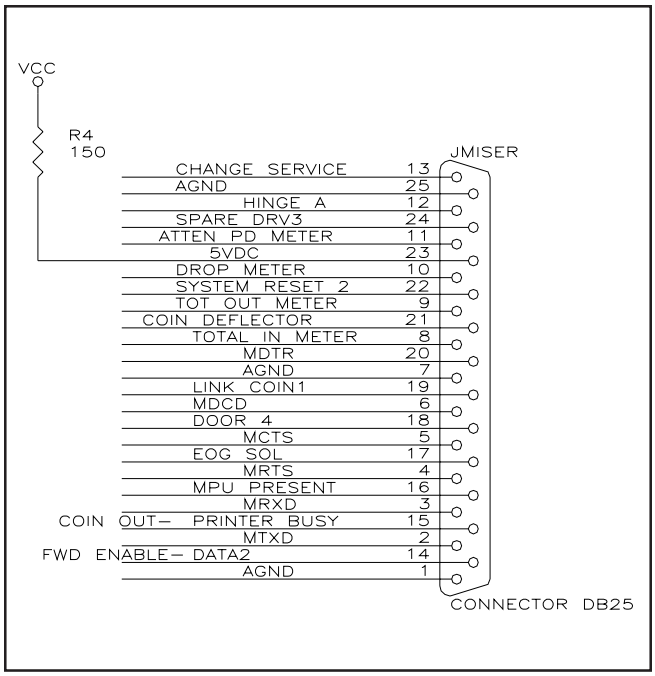

AS-03356-0247 Backplane Board

Game Maker® V7200

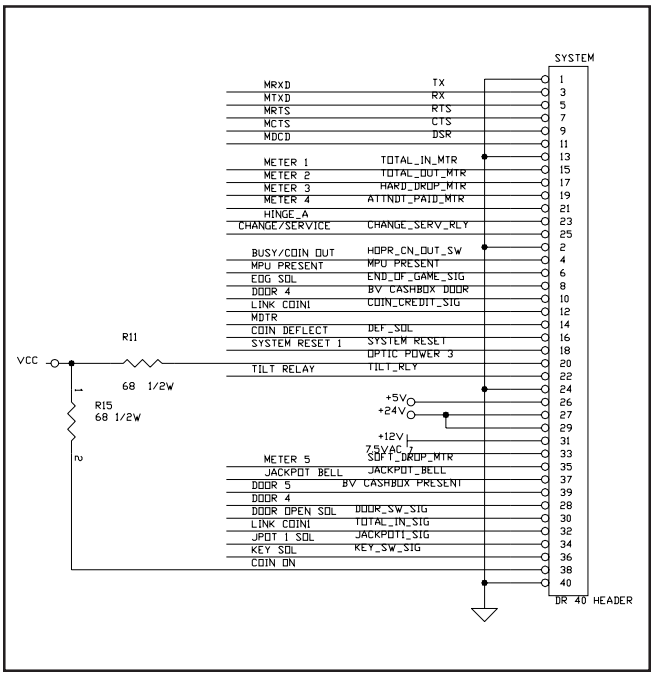

AS-03356-0432 Backplane Board

ProSlot® 6000

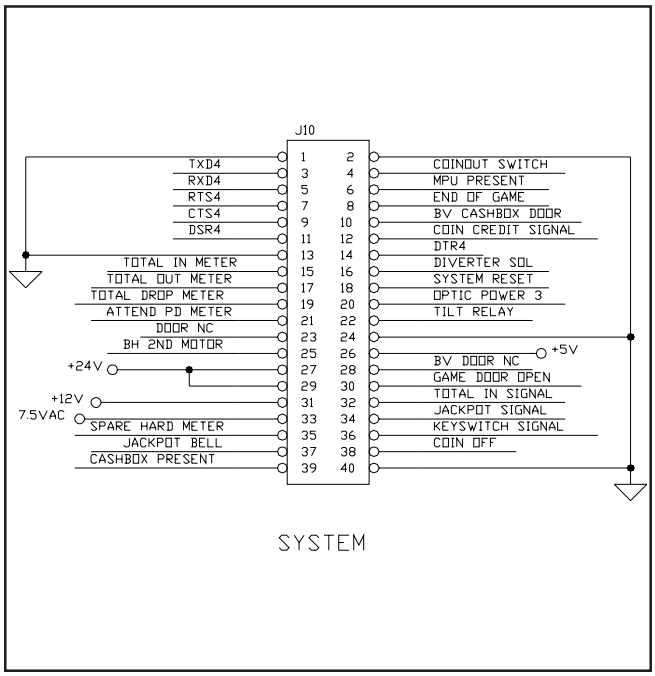

AS-03356-0445 Backplane Board

©2002 Bally Gaming and Systems

Accounting System Interface (cont.)

ProSlot® 5500

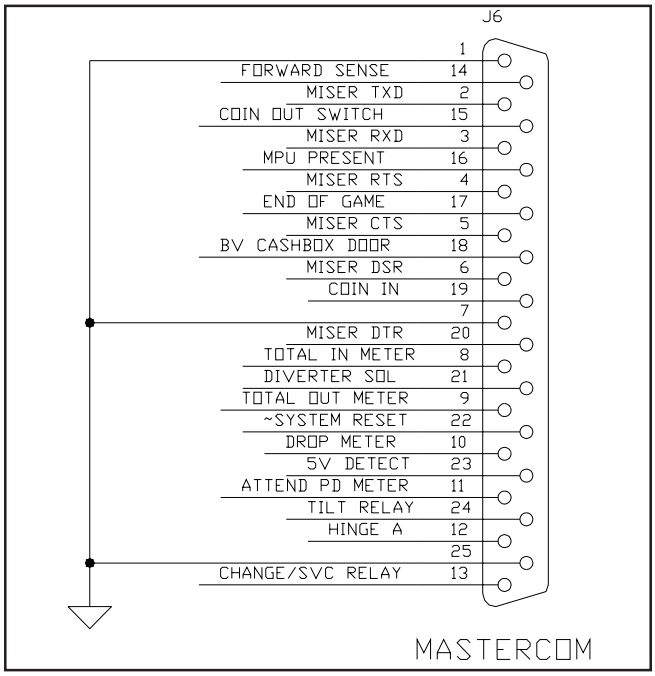

AS-03356-0207 Backplane board

NOTE: See Module MK10-SVMOD-0005, SDS Parts Reference for hardware requirements.

CBL-20234-0001 System Interface Cable (ProSlot®)

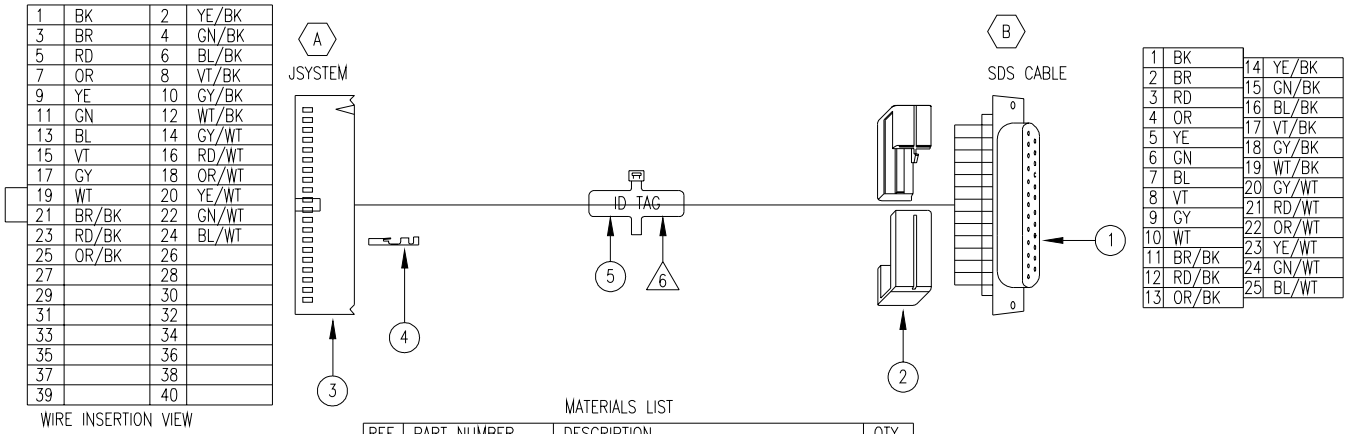

1	BK	2	YE/BK
3	BR	4	GN/BK
5	RD	6	BL/BK
7	OR	8	VT/BK
9	YE	10	GY/BK
11	GN	12	WT/BK
13	BL	14	GY/WT
15	VT	16	RD/WT
17	GY	18	OR/WT
19	WT	20	YE/WT
21	BR/BK	22	GN/WT
23	RD/BK	24	BL/WT
25	OR/BK	26	
27		28	
29		30	
31		32	
33		34	
35		36	
37		38	
39		40	

1	BK	14	YE/BK
2	BR	15	GN/BK
3	RD	16	BL/BK
4	OR	17	VT/BK
5	YE	18	GY/BK
6	GN	19	WT/BK
7	BL	20	GY/WT
8	VT	21	RD/WT
9	GY	22	OR/WT
10	WT	23	YE/WT
11	BR/BK	24	GN/WT
12	RD/BK	25	BL/WT
13	OR/BK		

MATERIALS LIST

REF.	PART NUMBER	DESCRIPTION	QTY.
1	E-00910-0061	RECEPTACLE, DB25, SINGLE WIRE I.D.C	1
2	E-00910-0065	COVER, PLASTIC, DB25	1
3	E-01011-0140	CONN, HOUSING, DUAL ROW, 40 PIN	1
4	E-00671-0003	TERMINAL, MOD IV, 24-20 AWG	25
5	E-00647-0020	MARKER TIE	1
6	E-00647-0004	CABLE TIE, 3/32" X 3 7/8"	–

Accounting System Interface (cont.)

CBL-20238-0001 System Interface Cable (EVO®)

1	BK	2	YE/BK
3	RD	4	GN/BK
5	BR	6	BL/BK
7	OR	8	VT/BK
9	YE	10	GY/BK
11	GN	12	WT/BK
13	BL	14	GY/WT
15	VT	16	RD/WT
17	GY	18	OR/WT
19	WT	20	YE/WT
21	BR/BK	22	GN/WT
23	RD/BK	24	BL/WT
25	OR/BK	26	
27		28	
29		30	
31		32	
33		34	
35		36	
37		38	
39		40	

WIRE INSERTION VIEW

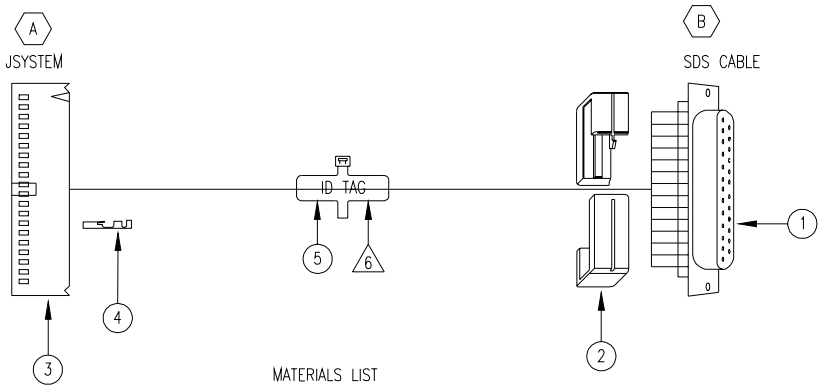

1	BK	14	YE/BK
2	BR	15	GN/BK
3	RD	16	BL/BK
4	OR	17	VT/BK
5	YE	18	GY/BK
6	GN	19	WT/BK
7	BL	20	GY/WT
8	VT	21	RD/WT
9	GY	22	OR/WT
10	WT	23	YE/WT
11	BR/BK	24	GN/WT
12	RD/BK	25	BL/WT
13	OR/BK		

MATERIALS LIST

REF.	PART NUMBER	DESCRIPTION	QTY.
1	E-00910-0061	RECEPTACLE, DB25, SINGLE WIRE I.D.C	1
2	E-00910-0065	COVER, PLASTIC, DB25	1
3	E-01011-0140	CONN, HOUSING, DUAL ROW, 40 PIN	1
4	E-00671-0003	TERMINAL, MOD IV, 24-20 AWG	25
5	E-00647-0020	MARKER TIE	1
6	E-00647-0004	CABLE TIE, 3/32" X 3 7/8"	–

©2002 Bally Gaming and Systems

Accounting System Settings

Manufacturer	System Type	System Version	Machine Setting(s)		System Protocol and Settings
			Video	Slot	
Acres Gaming	Acres SAS® 5.01	SAS® - 5 EFT Optional* Bonusing Optional*	Terminal ID: VGD > set to 1 Host Type > set to Acres (bonusing would be set in this mode if desired) Printer: Validation > set to Enhanced	Swtich bank DS1 > #s 1 and 5 off for EFT Enable Switch bank DS1 > #s 1, 2, and 5 off for EFT Disable Switch bank DS1 > #3 off for Bonusing Option 78Ho set to 1 Printer: Option 73 set to 2	SAS® Protocol
Casino Data Systems	CDS SAS® 3.62 - 3.64	SAS® - 3 No EFT No Bonusing	May be set to Popeye 5.01 Terminal ID: VGD > set to 1 Host Type > set to Standard or CDS Printer Validation > set to Standard	Switch bank DS1 > #s 1 and 2 off for EFT Disable Option 78Ho set to 1 Printer: Option 73 set to 2	SAS® Protocol: set to IGT Winner (for SAS® 5 EVO®s, old Game Maker® cable [with single wire pigtail) must be used)
	CDS SAS® (Windows NT [Oasis])	SAS® - 4 / 5 No EFT No Bonusing	Terminal ID: VGD > set to 1 Host Type > set to Standard Printer Validation > set to Standard	Switch bank DS1 > #s 1, 2 and 5 off for EFT Disable Option 78Ho set to 1 Printer: Option 73 set to 1	SAS® Protocol: set to IGT Winner System cable #20115 for SAS® communication with printers
Gaming System International	GSI SAS® 5.01	SAS® - 5 No EFT No Bonusing	Terminal ID: VGD > set to 1 Host Type > set to Standard Printer Validation > set to Standard	Switch bank DS1 > #s 1, 2 and 5 off for EFT Disable Option 78Ho > set to 1 Printer: Option 73 set to 1	SAS® Protocol: BIN > #74 Flash > F9 System Driver > 4
Konami Gaming	Paradigm SAS® 5.01	SAS® - 5 No EFT No Bonusing	Terminal ID: VGD > set to 1 Host Type > set to Standard Printer Validation > set to Standard	Switch bank DS1 > #s 1, 2 and 5 off for EFT Disable Option 78Ho > set to 1 Printer: Option 73 set to 1	SAS® Protocol
Bally Systems	SDS®	Standard	Standard settings EVO® (i.e. Popeye) > set to SAS® 5.01	Switch bank DS1 > set all to ON Printer > Option 73 set to 3	SAS® Protocol Must have MC250 board with R-5 EPROM
ACSC Gaming Systems (Alliance Gaming Corporaton)	SAS® 5.01	SAS® - 5 EFT	Terminal ID: VGD > set to 1 Host Type > set to Standard Printer Validation > set to Standard	Switch bank DS1 > #s 1 and 5 off for EFT Enable Option 78Ho > set to 1 Printer: Option 73 set to 1	SAS® Protocol
IGT Gaming	EDT SAS® 2.4	SAS® - 1 No EFT	Use standard SDS settings	Switch bank DS1 > set all to ON Option 78Ho > set to 1	SAS® Protocol (EVO® and S6000 must use IGT cable #607-645-00 or to talk 5.01 SAS®)
	EDT SAS® 2.62 - 3.6	SAS® - 2 / 3 No EFT	Terminal ID: VGD > set to 1 Host Type > set to Standard	Swtich bank DS1 > #1 to OFF Option 78Ho > set to 1 (try SAS® - 1 settings first)	SAS® Protocol (EVO® must use IGT cable #607-645-00)
	IGS SAS® 5.01	SAS - 5 No EFT	SAS® > set to 5.01 Terminal ID: VGD > set to 1 Host Type > set to Standard Printer Validation > set to Standard	Switch bank DS1 > #s 1, 2 and 5 off for EFT Disable Option 78Ho > set to 1 Printer: Option 73 set to 1	SAS® Protocol Flash: "G"
	SAS® 2.84 Easy Route	SAS® - 2 / 3 No EFT	SAS® > set to 2.84 Terminal ID: VGD > set to House Number Host Type > set to Standard Remote Reset > set to Enabled	Switch bank DS1 > #s 1 - 8 set to ON Option 78Ho > set to House Number Option 90 > set to 1 for Remote Reset	SAS® Protocol

 ©2002 Bally Gaming and Systems

Bally GAMING • SYSTEMS®

ProSlot® 6000

MODULE 9

MK9-S6MOD-0002

OVERALL WIRING DIAGRAMS

Bally Gaming and Systems

©2003 BALLY GAMING, INC. ALL RIGHTS RESERVED

6601 South Bermuda Road, Las Vegas, NV 89119

For Customer Service and information, call or FAX:
1-877-GO-BALLY (877-462-2559) in the U.S. and Canada
+1-702-896-7772 outside the U.S.
896-7772 in Las Vegas
FAX: +1-702-896-7710
or visit our website at http://www.ballygaming.com

Module 9 - Overall Wiring Diagrams Table of Contents

Bill Acceptors 5
Ardac CBL-30381-0001 5
Ardac CBL-30380-0001 6
Mars CBL-30302-0001 7
Diode Isolation Bill Acceptor Doors, GPT CBL-30405-0001 8
Diode Isolation Bill Acceptor Doors, JCM WBA / Ardac CBL-30420-0001 9
GPT CBL-30350-0001 10
JCM WBA 10/20 CBL-30252-0001 11
JCM WBA 12/13/23/25 CBL-30638-0001 12
JCM WBA 12/13/23/25 CBL-30638-0002 13
Diode Isolation Bill Acceptor Doors, GPT CBL-30405-0001 14
Universal System Signals CBL-30431-0001 15

Cabinet 16
Cabinet Power CBL-30255-0001 16
Cabinet Power CBL-30475-0001 17
Cabinet Signal CBL-30478-0001 18
Cabinet Signal CBL-30713-0001 19
Deck CBL-30715-0001 20
Door, with Removable Deck CBL-30680-0001 21
Cabinet Signal CBL-30234-0001 22
Light Panel Feature, Round CBL-30377-0001 23
Top Box Fluorescent CBL-20368-0001 24
Top Box Light CBL-30643-0001 25

Coin Acceptor 26
COD / CC-16 CBL-30471-0001 26
Coin Acceptor Interface, MC-16 CBL-20295-0001 27
Coin Acceptor Interface, MC-16 CBL-20307-0001 28
Coin I/O CBL-30472-0001 29
Coin I/O, COD/IDX/Condor CBL-30471-0002 30

Hopper 31
Hopper CBL-30473-0001 31
Hopper CBL-30476-0002 31

Logic 32
Data Vault™ (France) CBL-20277-0001 32

Player Panel 33
Deck Button CBL-30473-0001 33
7-Button Deck (United Kingdom) CBL-30681-0001 34

Power Distribution 35
PDU, CE97, Fused CBL-30469-0001 35
Power Supply, CE97 CBL-30180-0001 36

Printer 37
Seiko Printer CBL-20302-0001 37
Seiko Printer CBL-20398-0001 38

Reel Mechanism 39
3-Reel CBL-30201-0001 39
3-Reel CBL-30253-0001 40
4-Reel CBL-30202-0001 41

 ©2003 Bally Gaming and Systems

Module 9 - Overall Wiring Diagrams Table of Contents (cont.)

Sound Board 42
Deluxe Pro Sound 2 CBL-30531-0001 42
Sound Board, Feature, Round CBL-30375-0001 43
Pro Sound 2 CBL-20397-0001 44
Systems / Communication 45
Door Button CBL-30470-0001 45
UIB Communication CBL-30267-0001 46
UIB Communication CBL-30386-0001 47

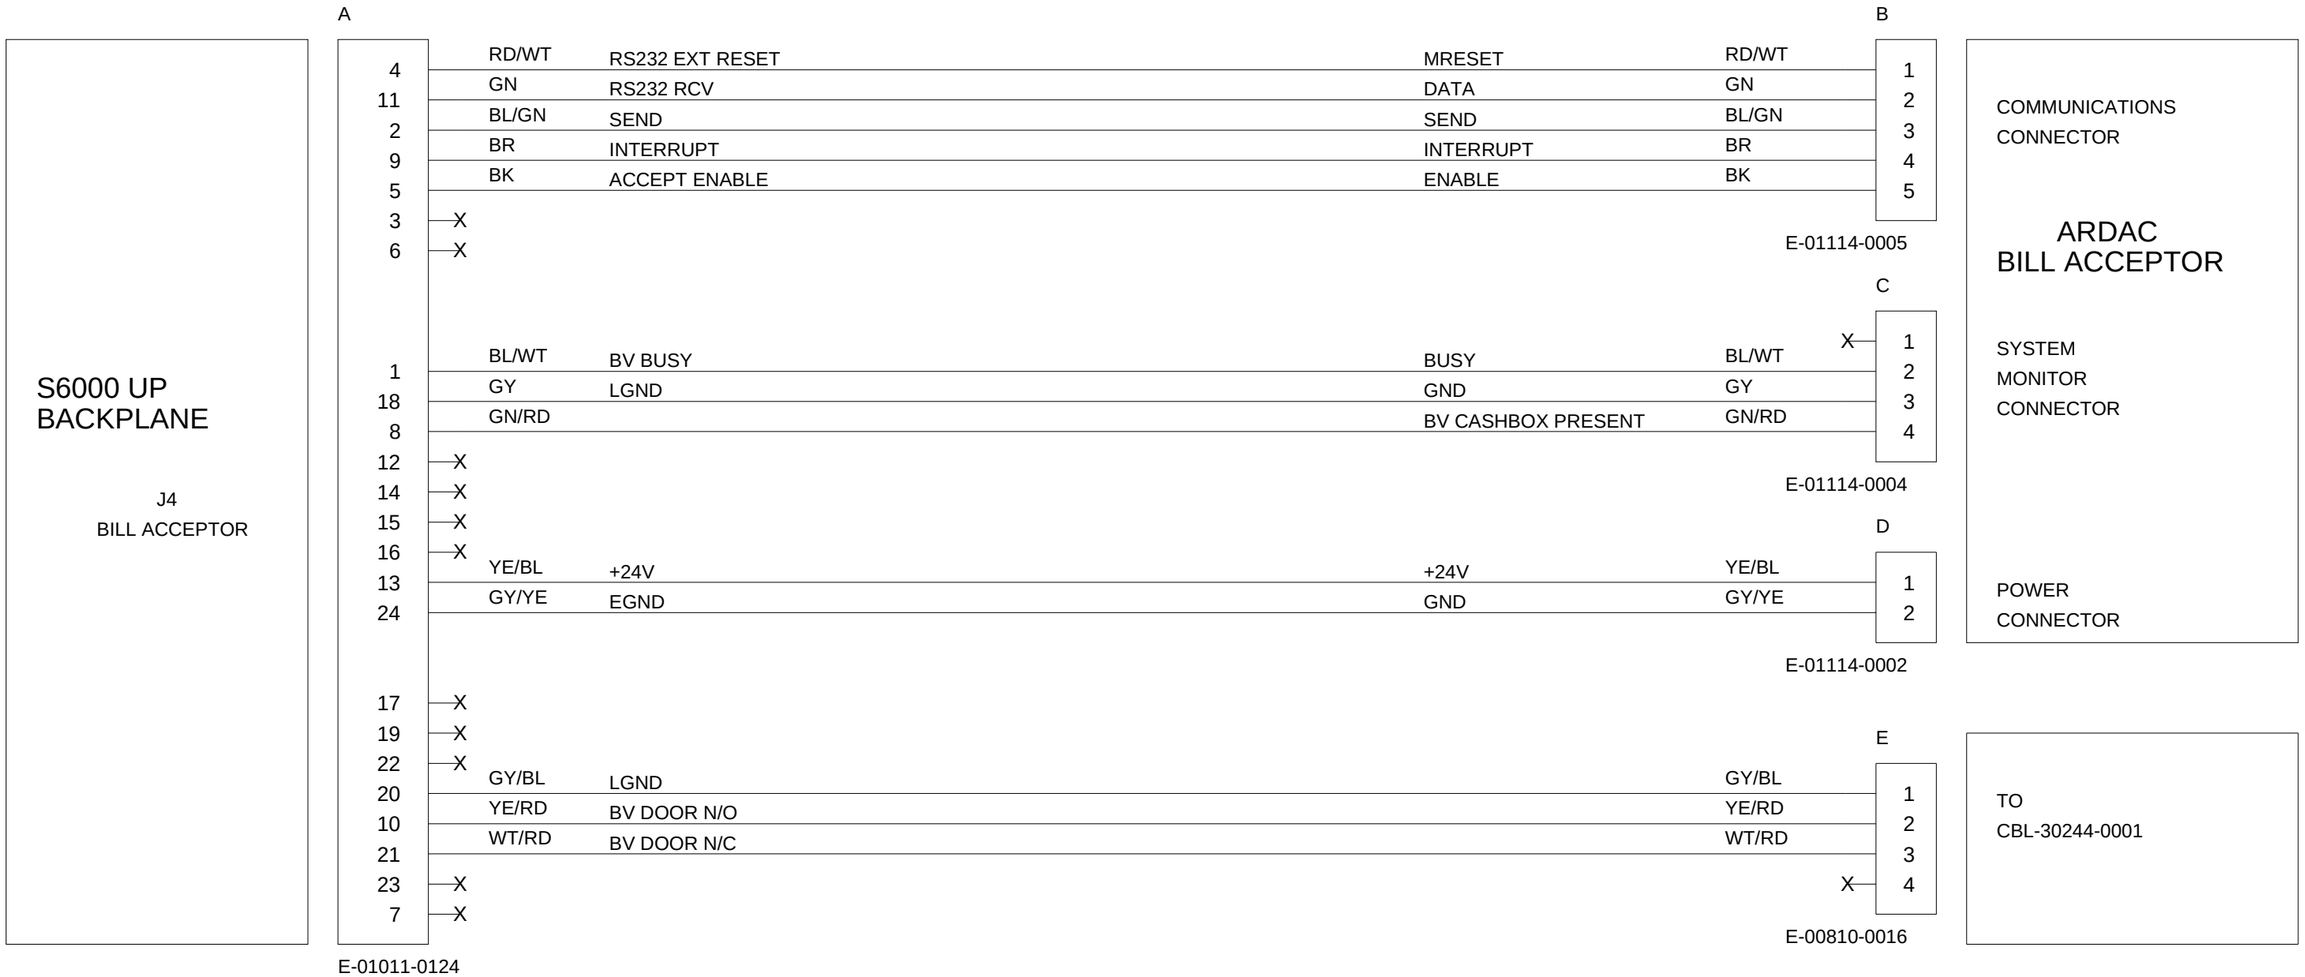

©2003 BALLY GAMING AND SYSTEMS

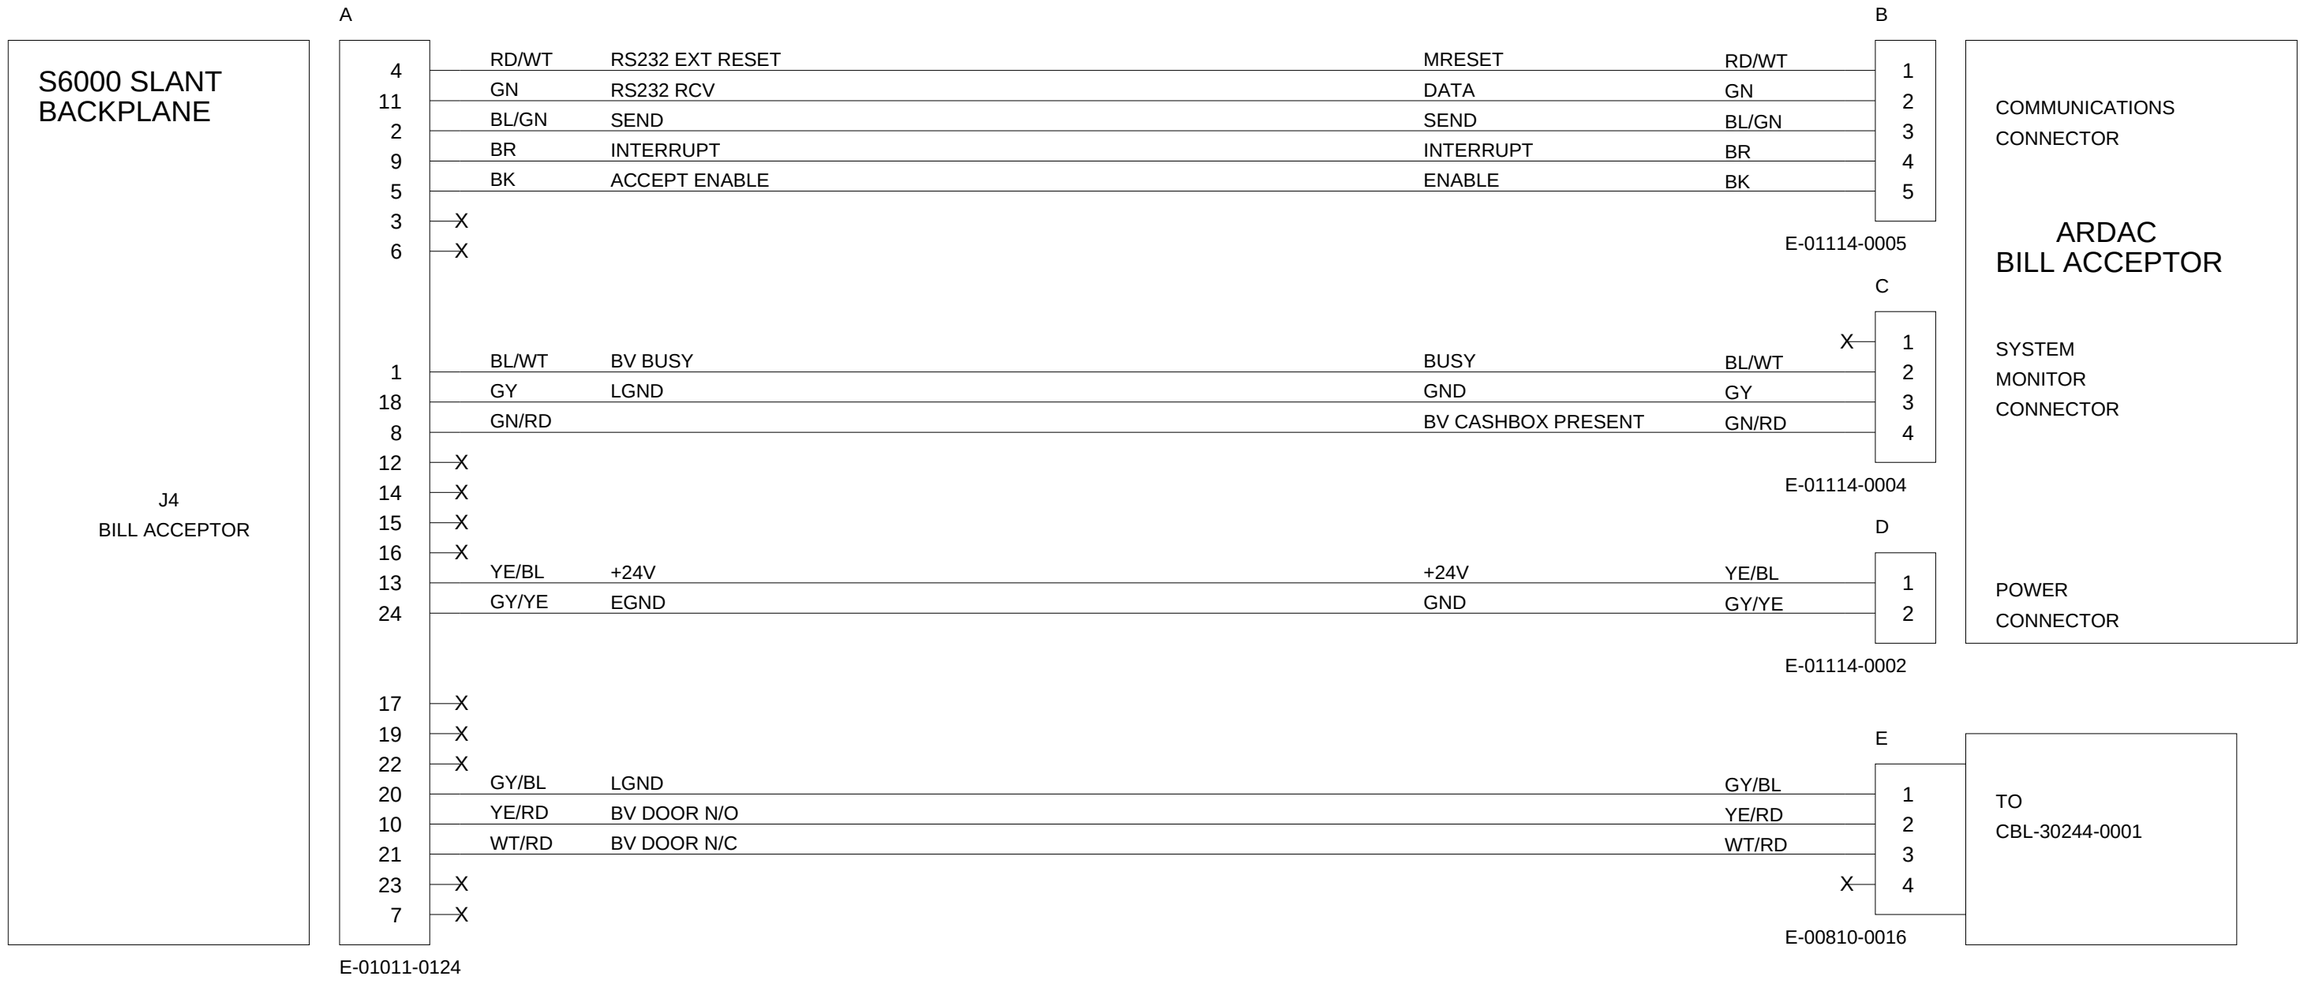

©2003 BALLY GAMING AND SYSTEMS

Bill Acceptors

|| Mars CBL-30302-0001 ☑Upright

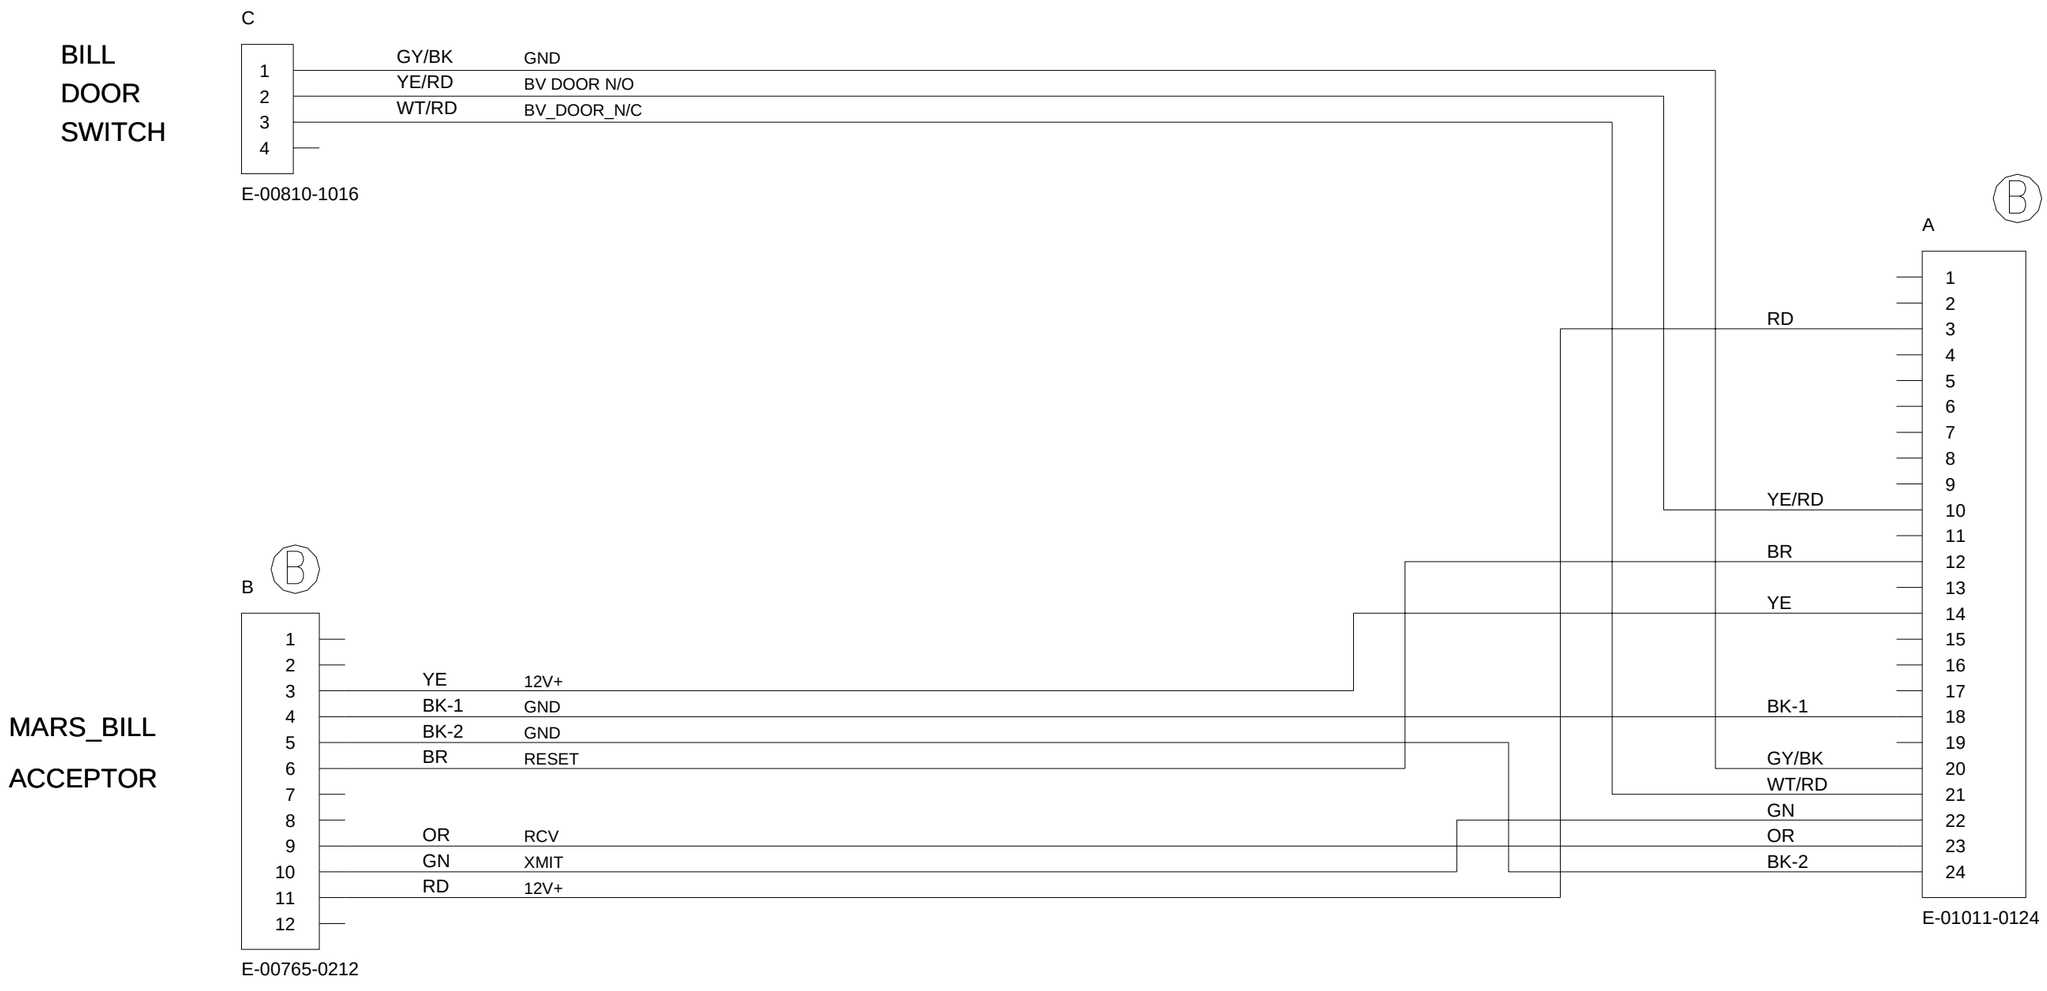

©2003 BALLY GAMING AND SYSTEMS

Diode Isolation, Bill Acceptor Doors, GPT

CBL-30405-0001 ☑Slant

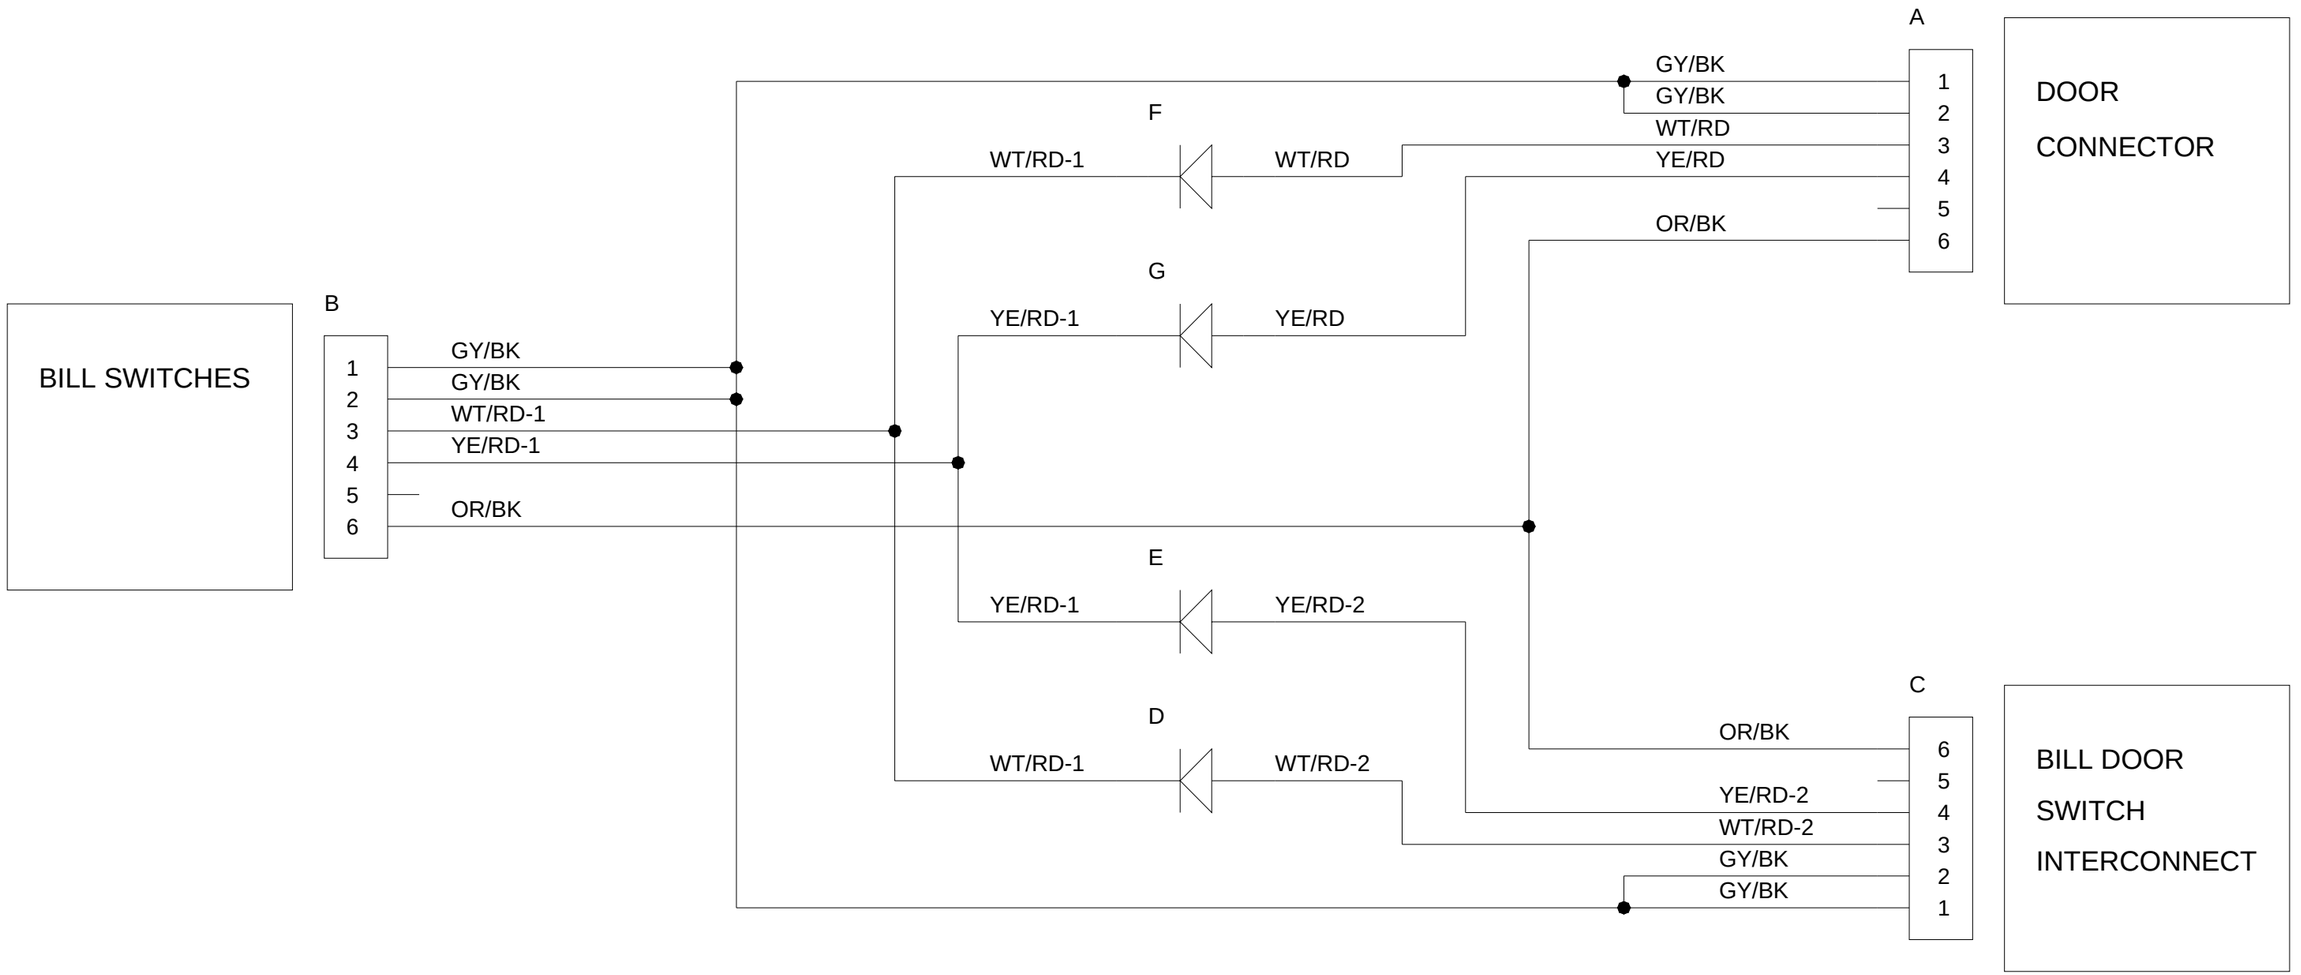

©2003 BALLY GAMING AND SYSTEMS

Bill Acceptors

Diode Isolation Bill Acceptor Doors, JCM WBA / Ardac CBL-30420-0001 ☑Slant

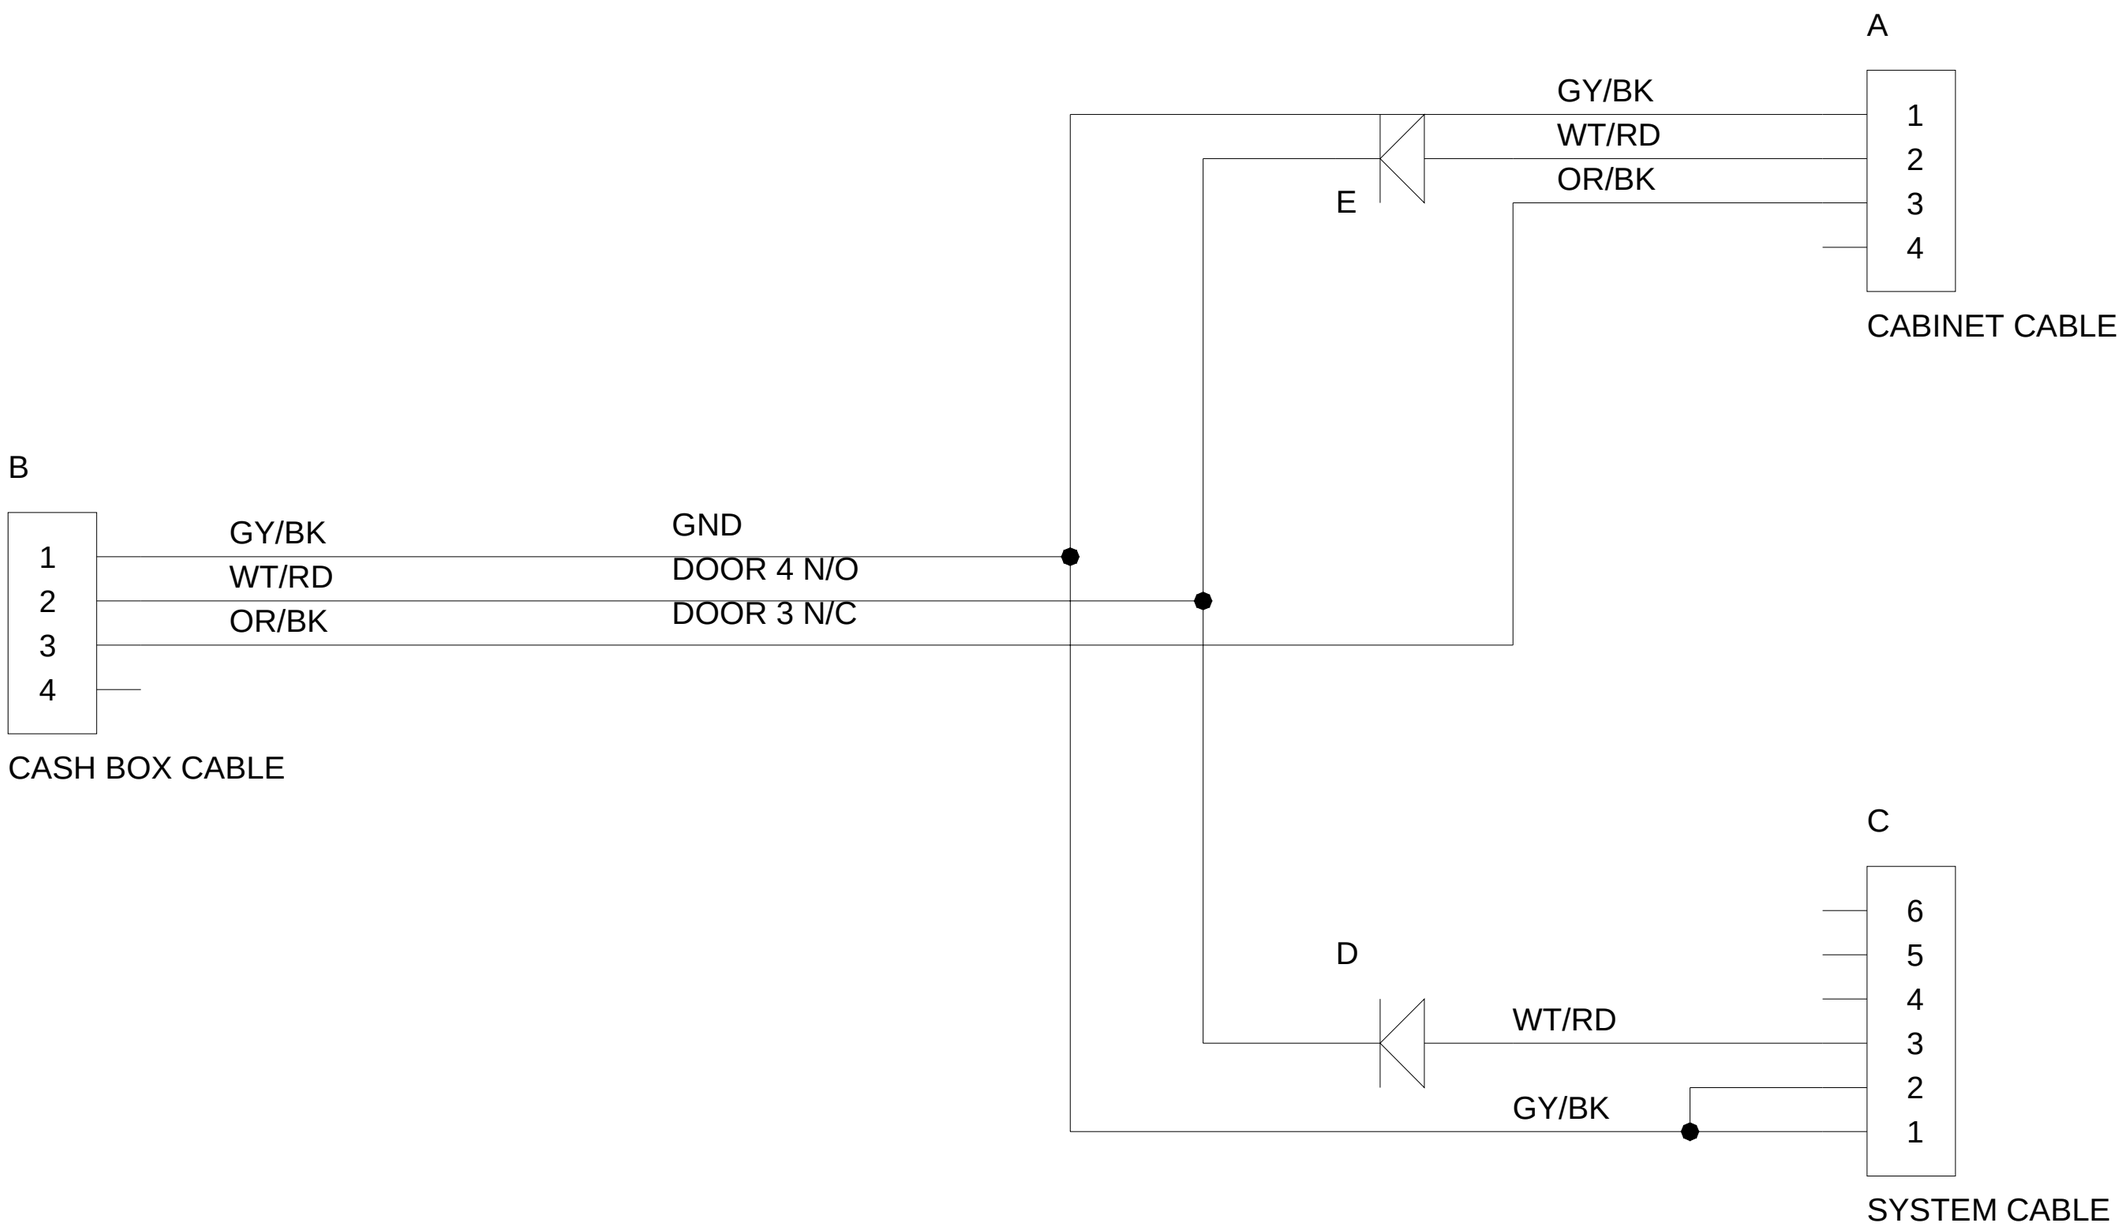

©2003 BALLY GAMING AND SYSTEMS

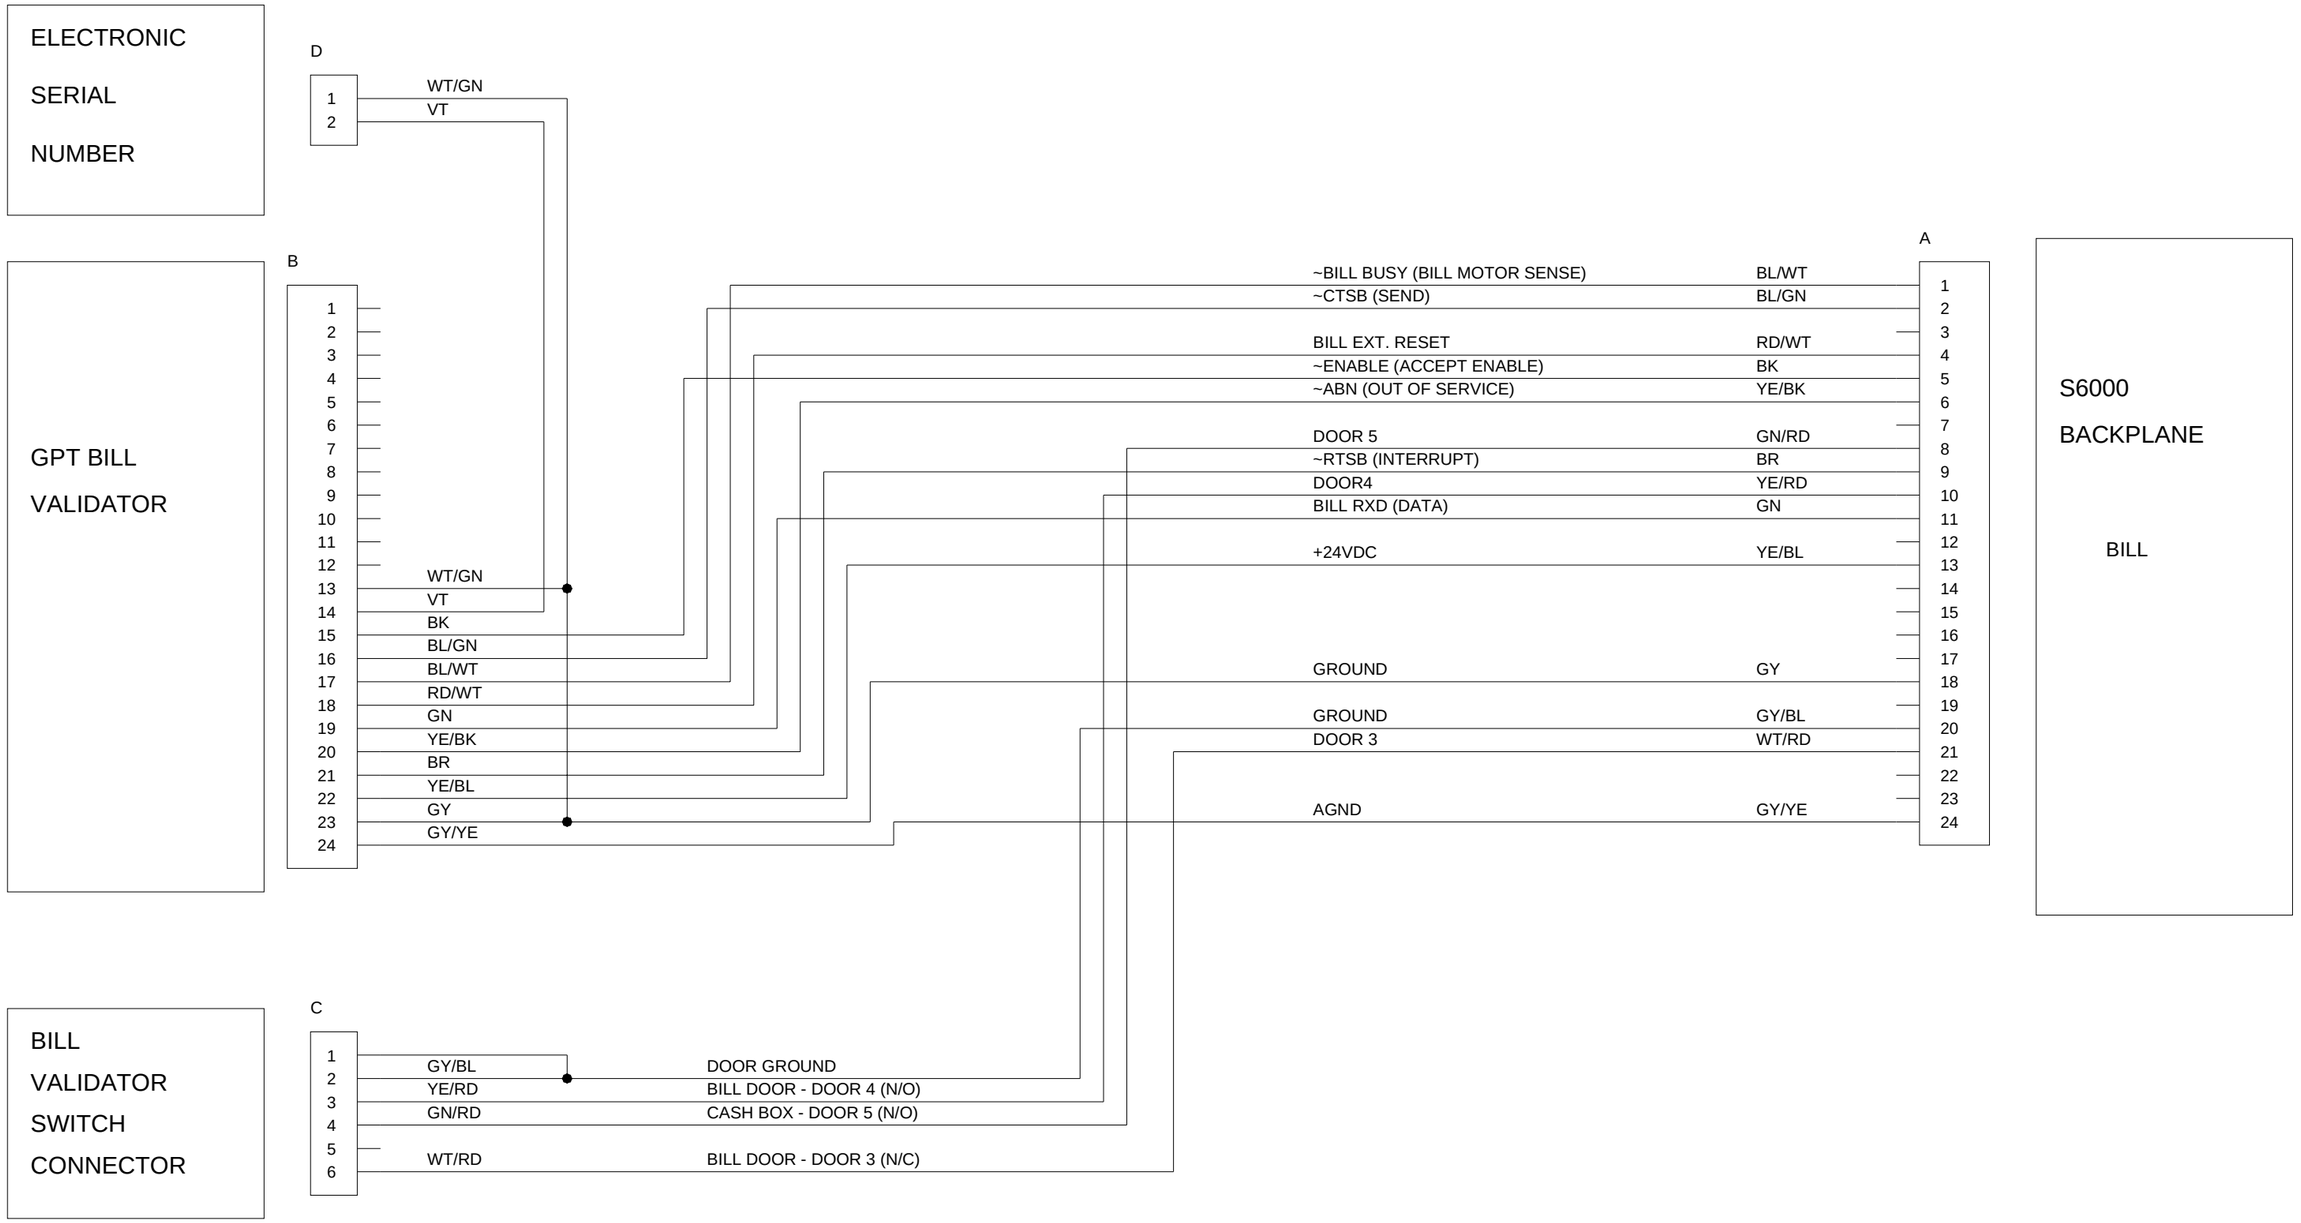

©2003 BALLY GAMING AND SYSTEMS

Bill Acceptors

|| JCM WBA 10/20 CBL-30252-0001 ☑Slant

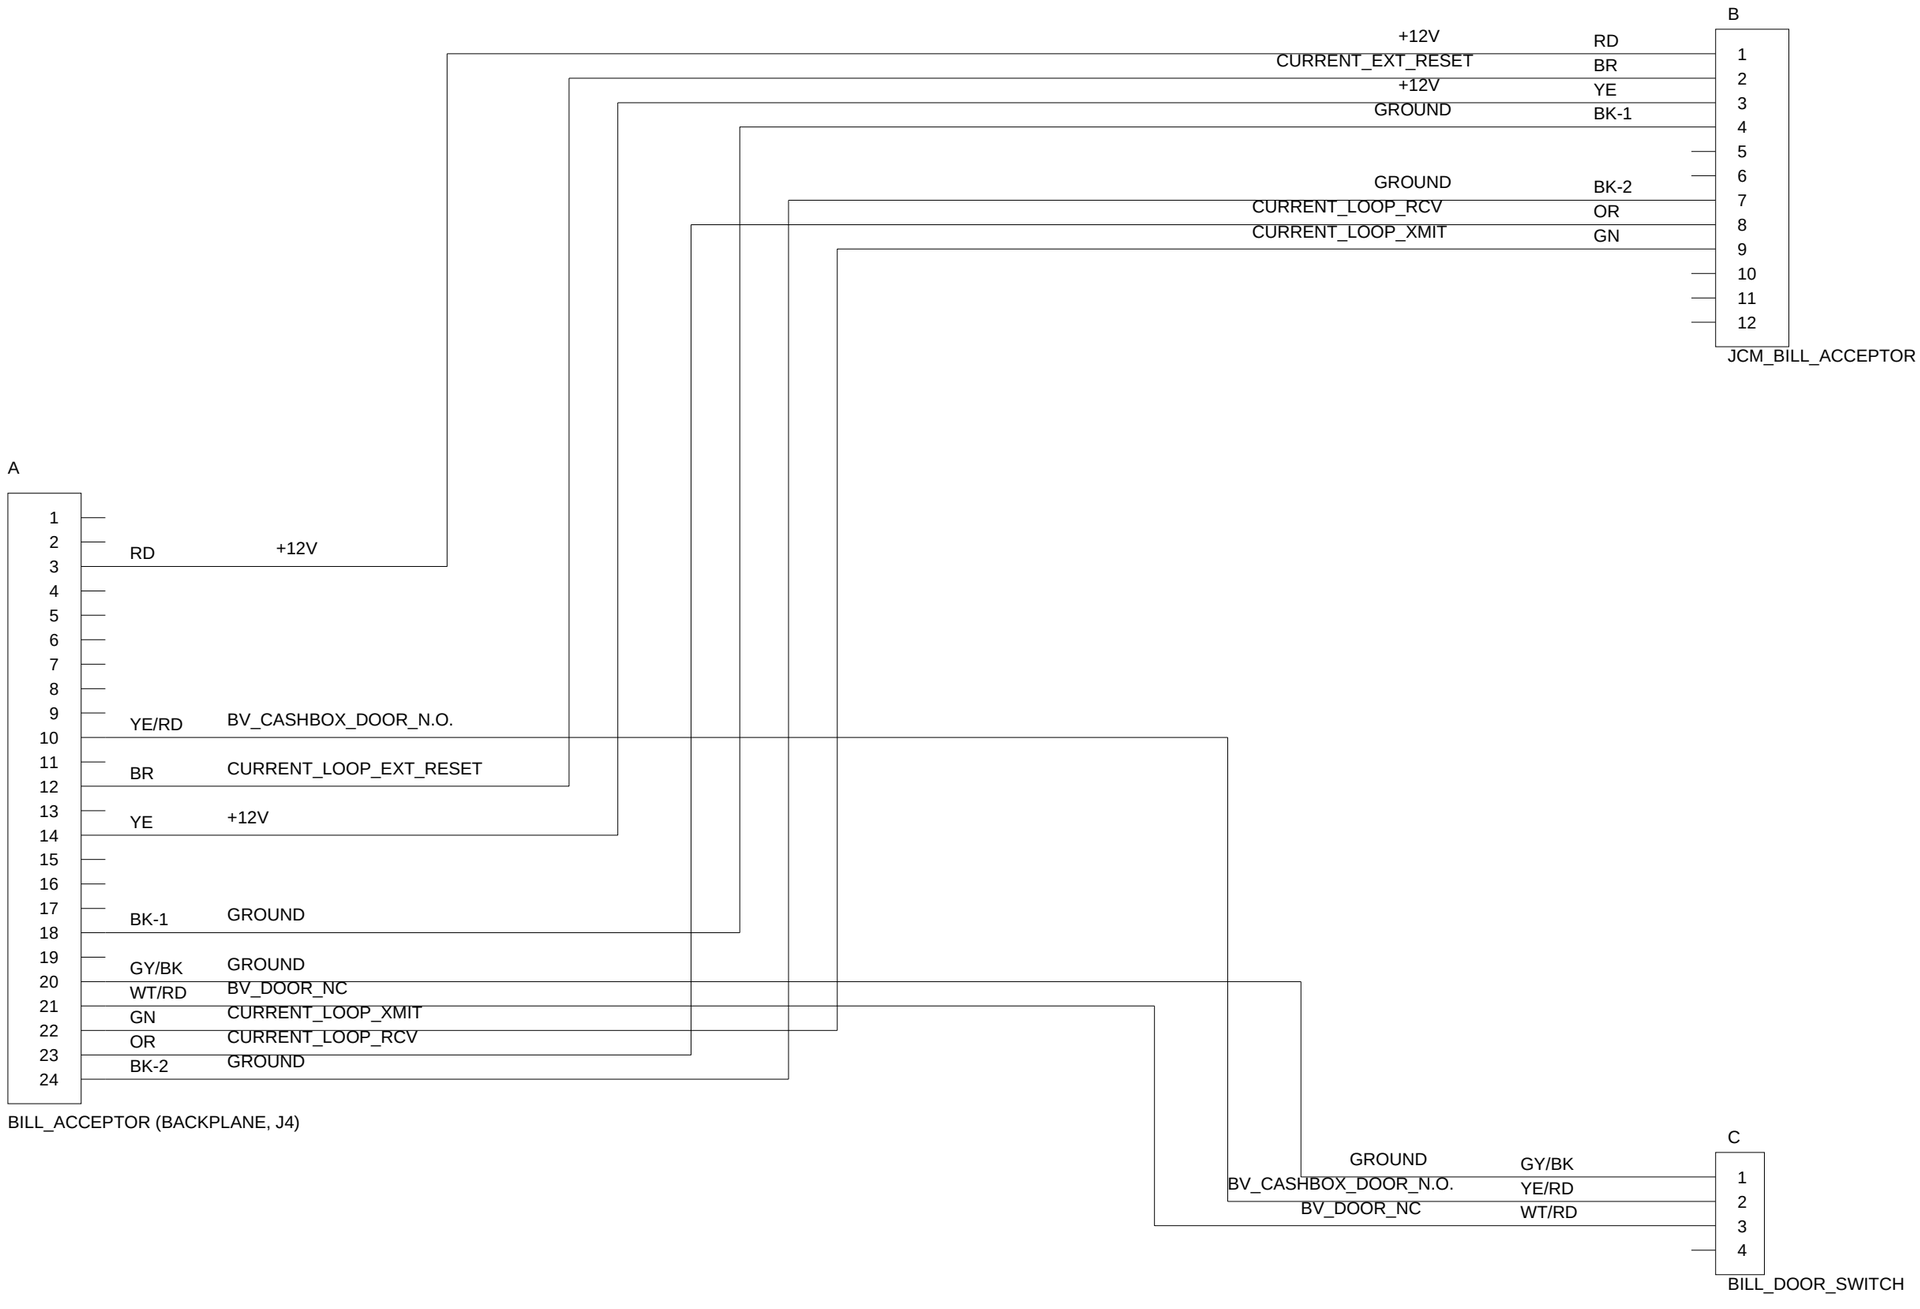

©2003 BALLY GAMING AND SYSTEMS

Bill Acceptors

JCM WBA 12/13/23/25 CBL-30638-0001

☑Slant

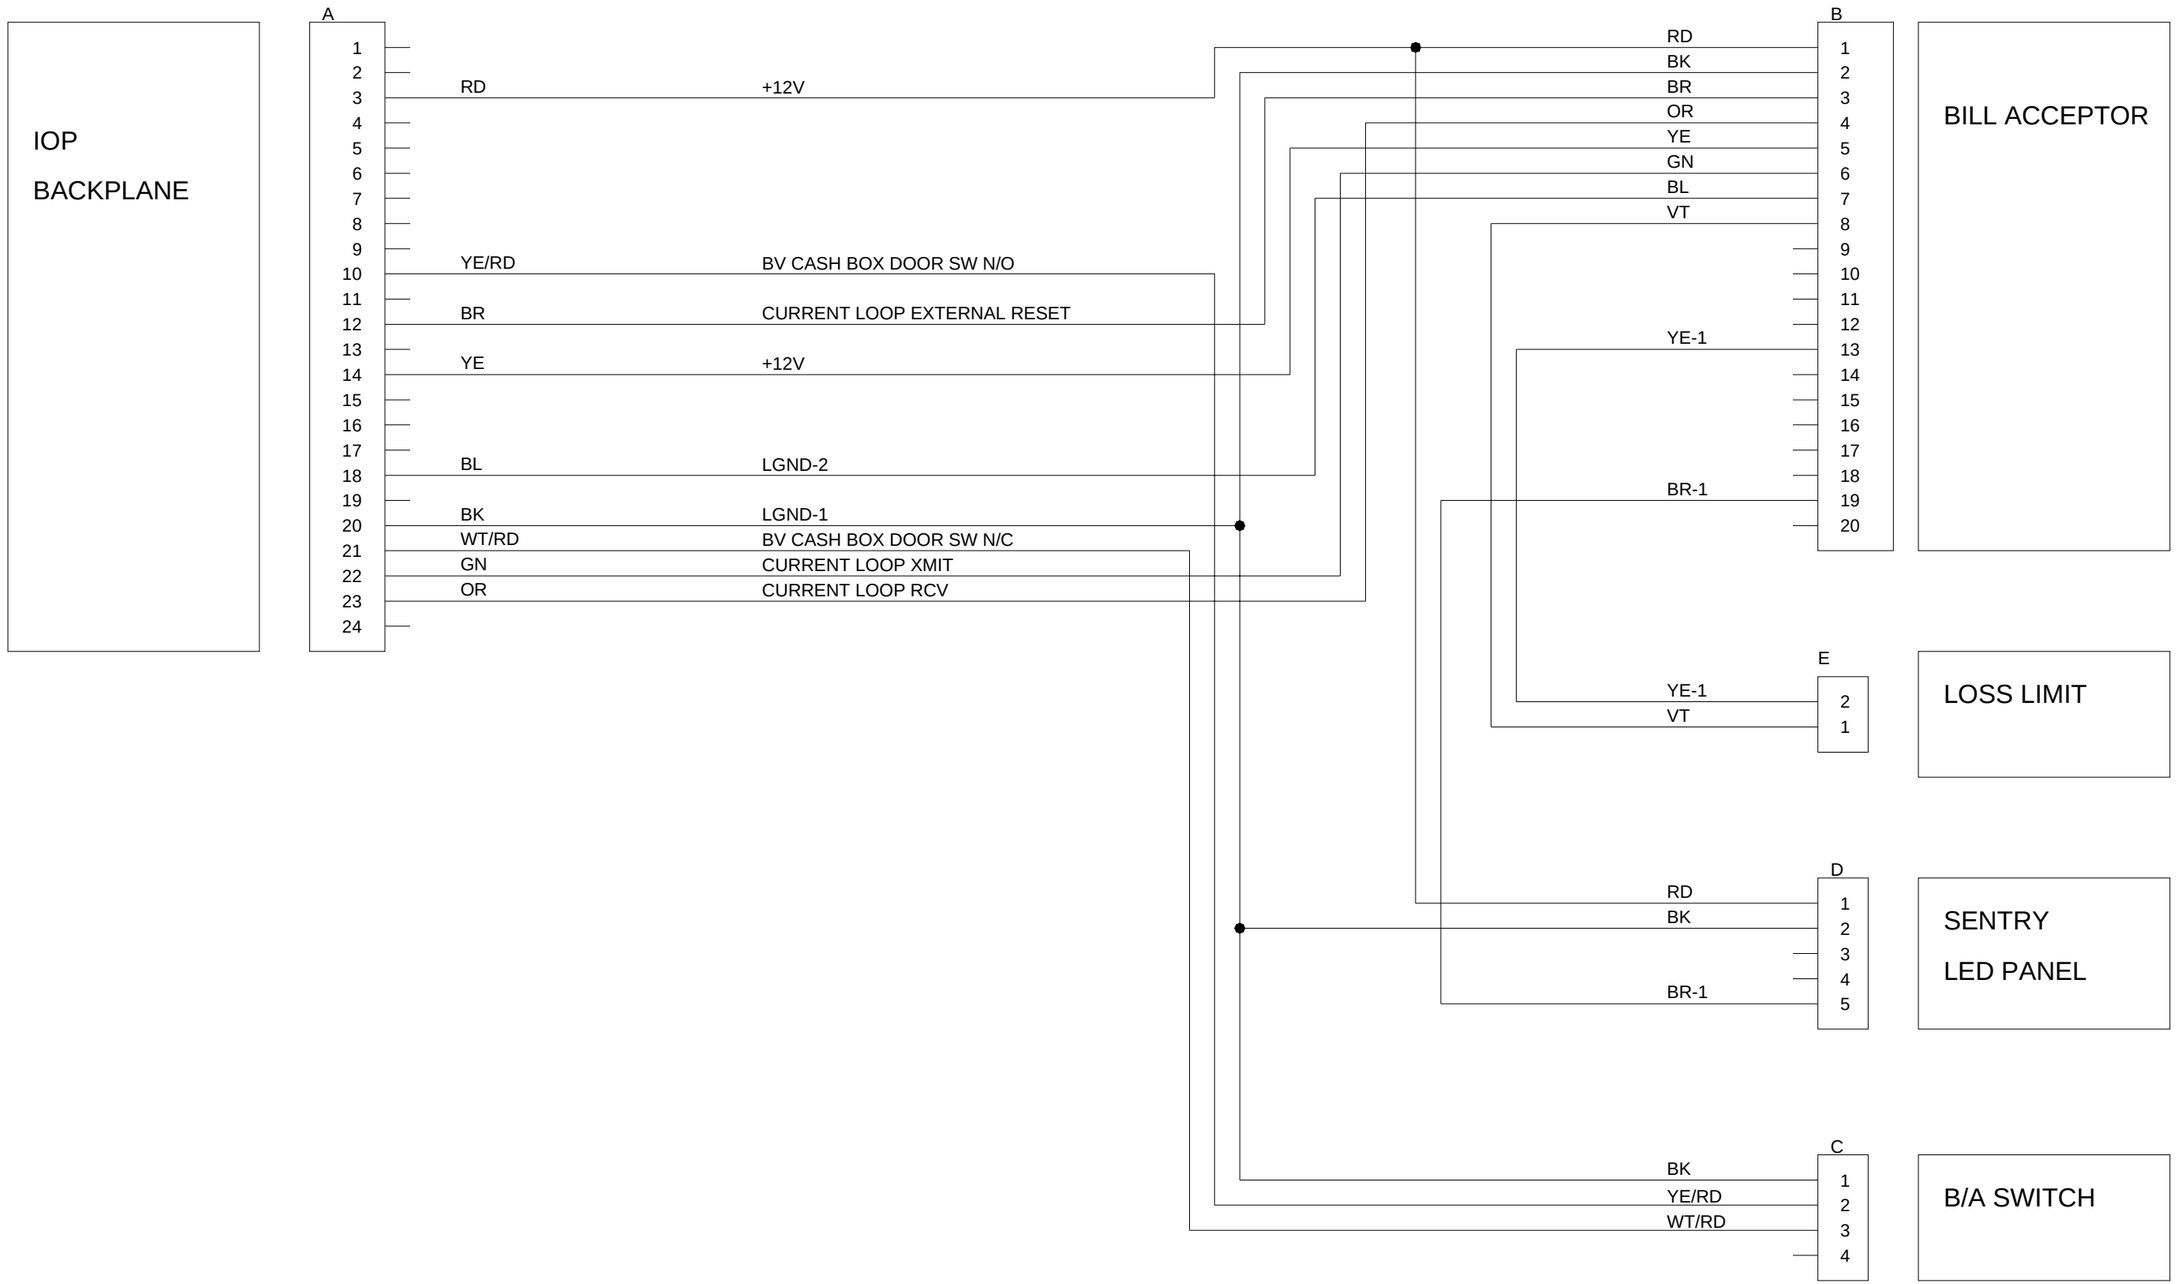

©2003 BALLY GAMING AND SYSTEMS

| - Revised, || - New

ProSlot® 6000

Bill Acceptors

JCM WBA 12/13/23/25 CBL-30638-0002

☑S6E

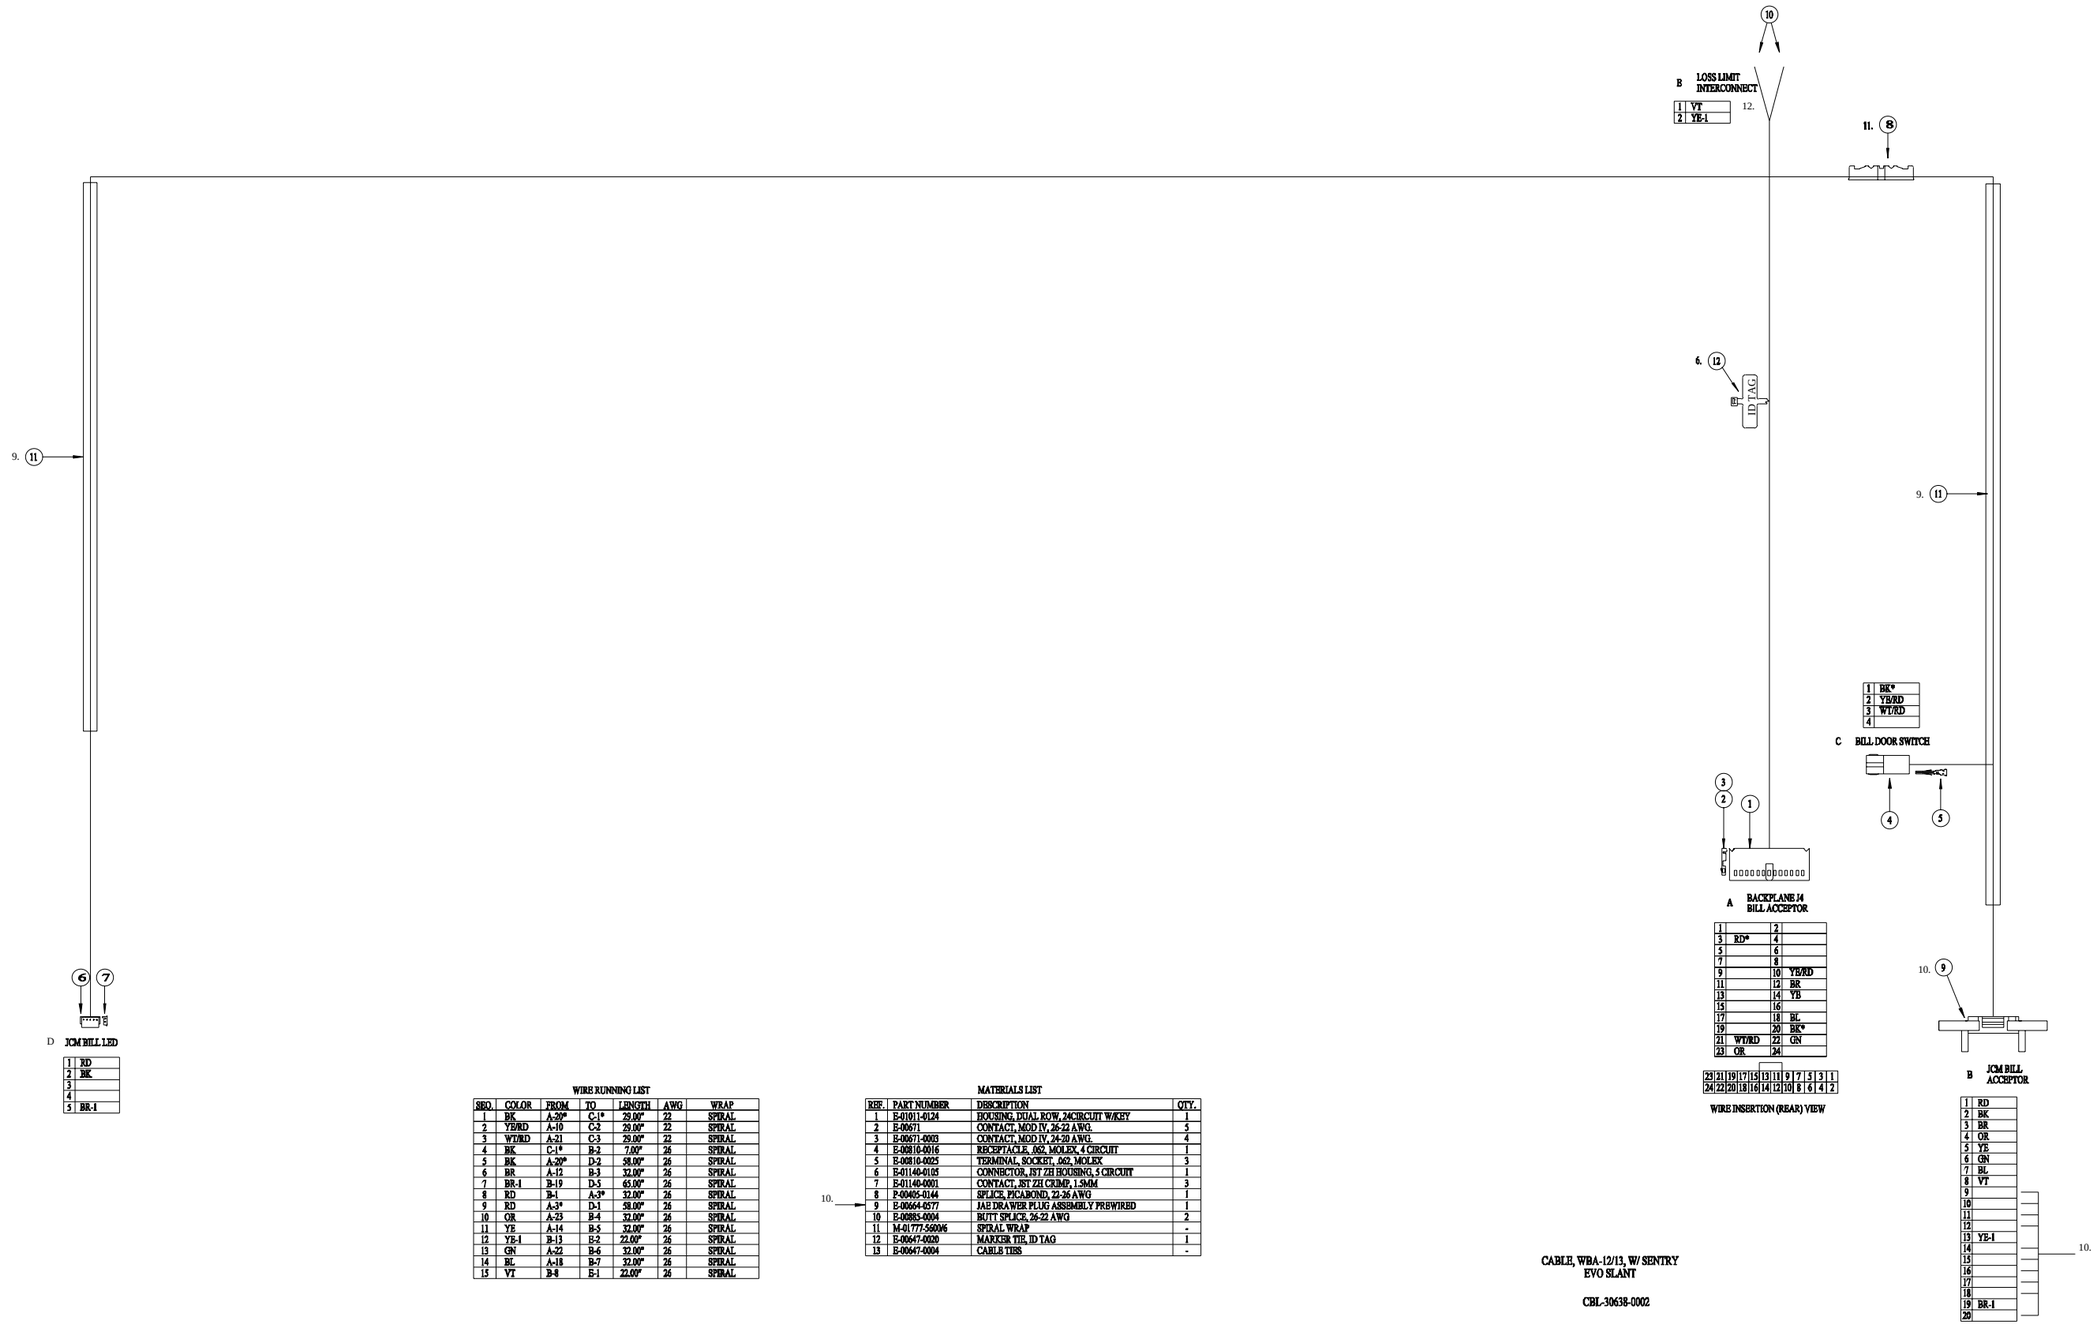

CABLE, WBA-12/13, W/ SENTRY EVO SLANT

CBL-30638-0002

WIRE RUNNING LIST

SEQ.	COLOR	FROM	TO	LENGTH	AWG	WRAP
1	BK	A-20*	C-1*	29.00"	22	SPIRAL
2	YB/RD	A-10	C-2	29.00"	22	SPIRAL
3	WT/RD	A-21	C-3	29.00"	22	SPIRAL
4	BK	C-1*	B-2	7.00"	26	SPIRAL
5	BK	A-20*	D-2	58.00"	26	SPIRAL
6	BR	A-12	B-3	32.00"	26	SPIRAL
7	BR-1	B-19	D-5	65.00"	26	SPIRAL
8	RD	B-1	A-3*	32.00"	26	SPIRAL
9	RD	A-3*	D-1	58.00"	26	SPIRAL
10	OR	A-23	B-4	32.00"	26	SPIRAL
11	YE	A-14	B-5	32.00"	26	SPIRAL
12	YE-1	B-13	E-2	22.00"	26	SPIRAL
13	GN	A-22	B-6	32.00"	26	SPIRAL
14	BL	A-18	B-7	32.00"	26	SPIRAL
15	VT	B-8	E-1	22.00"	26	SPIRAL

MATERIALS LIST

REF.	PART NUMBER	DESCRIPTION	QTY.
1	E-01011-0124	HOUSING, DUAL ROW, 24CIRCUIT W/KEY	1
2	E-00671	CONTACT, MOD IV, 26-22 AWG.	5
3	E-00671-0003	CONTACT, MOD IV, 24-20 AWG.	4
4	E-00810-0016	RECEPTACLE, .062, MOLEX, 4 CIRCUIT	1
5	E-00810-0025	TERMINAL, SOCKET, .062, MOLEX	3
6	E-01140-0105	CONNECTOR, JST ZH HOUSING, 5 CIRCUIT	1
7	E-01140-0001	CONTACT, JST ZH CRIMP, 1.5MM	3
8	P-00405-0144	SPLICE, PICABOND, 22-26 AWG	1
9	E-00664-0577	JAE DRAWER PLUG ASSEMBLY PREWIRED	1
10	E-00885-0004	BUTT SPLICE, 26-22 AWG	2
11	M-01777-560096	SPIRAL WRAP	-
12	E-00647-0020	MARKER TIE, ID TAG	1
13	E-00647-0004	CABLE TIES	-

©2003 BALLY GAMING AND SYSTEMS

Bill Acceptors

Diode Isolation Bill Acceptor Doors, GPT

CBL-30405-0001 ☑Slant

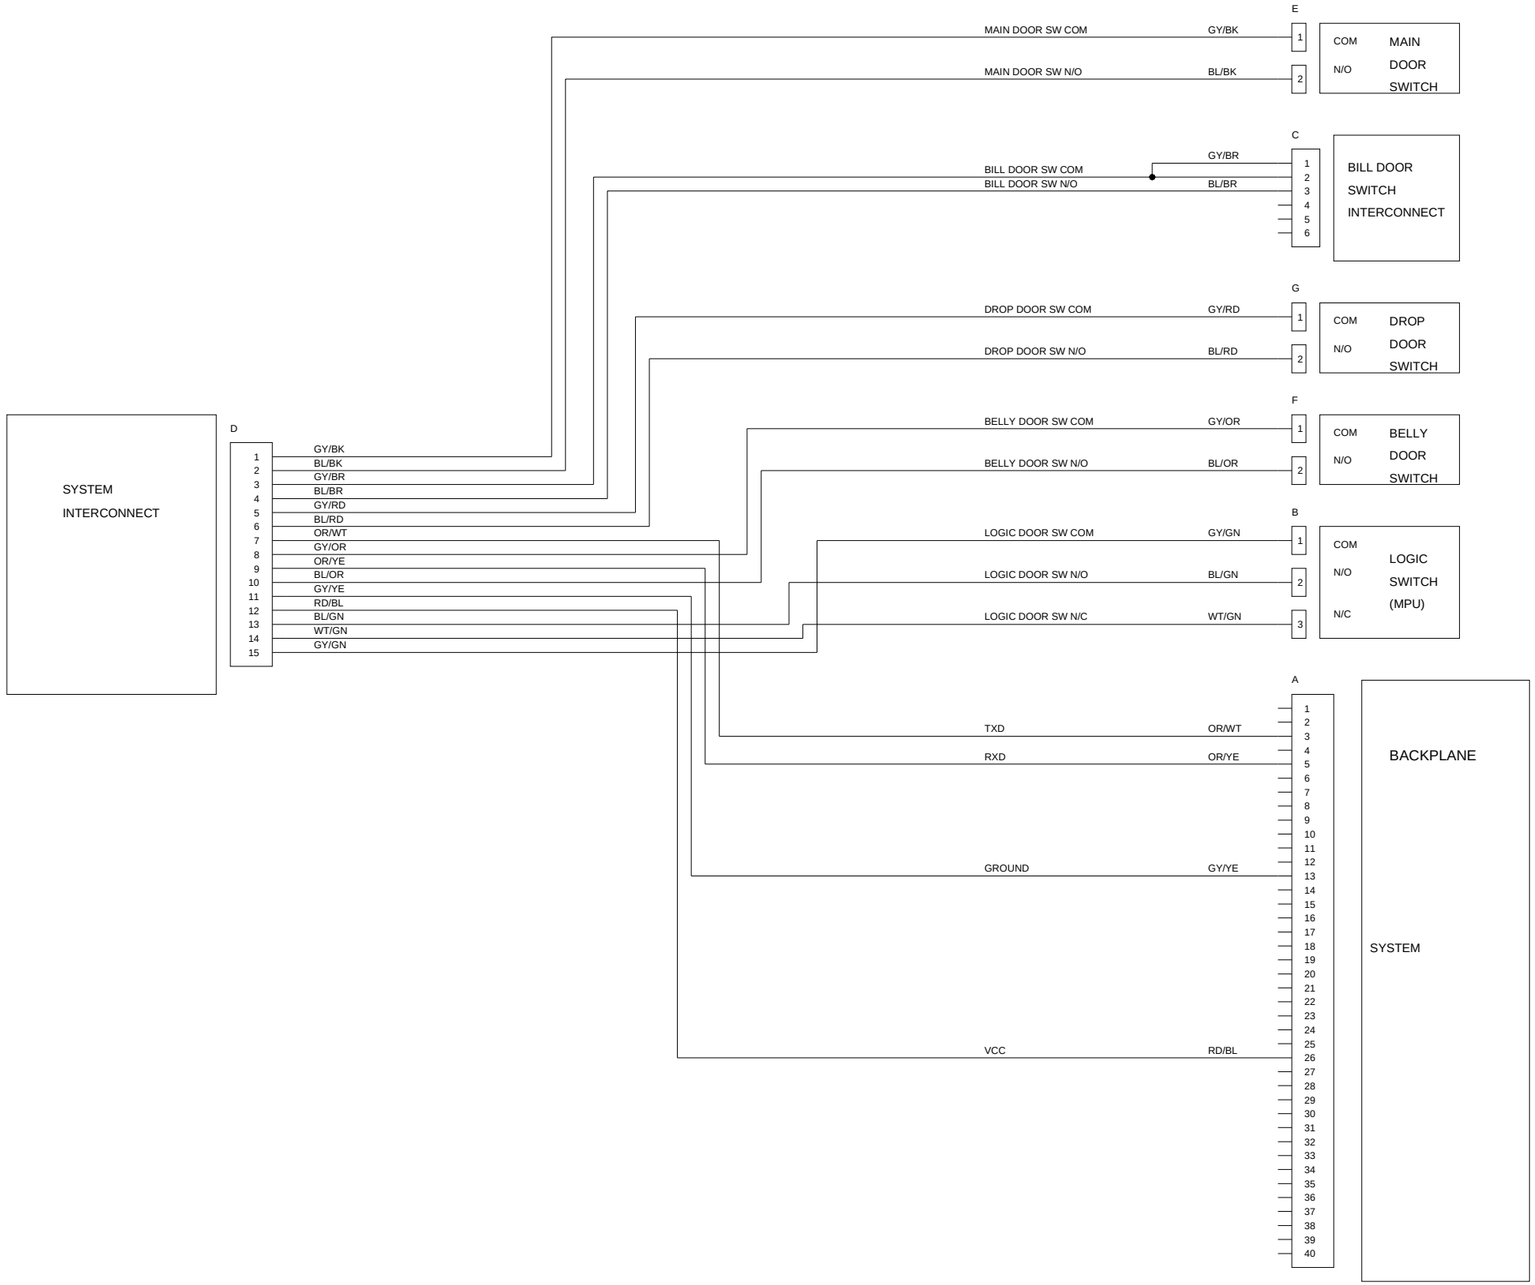

©2003 BALLY GAMING AND SYSTEMS

Bill Acceptors

|| Universal System Signals CBL-30431-0001

☑Slant

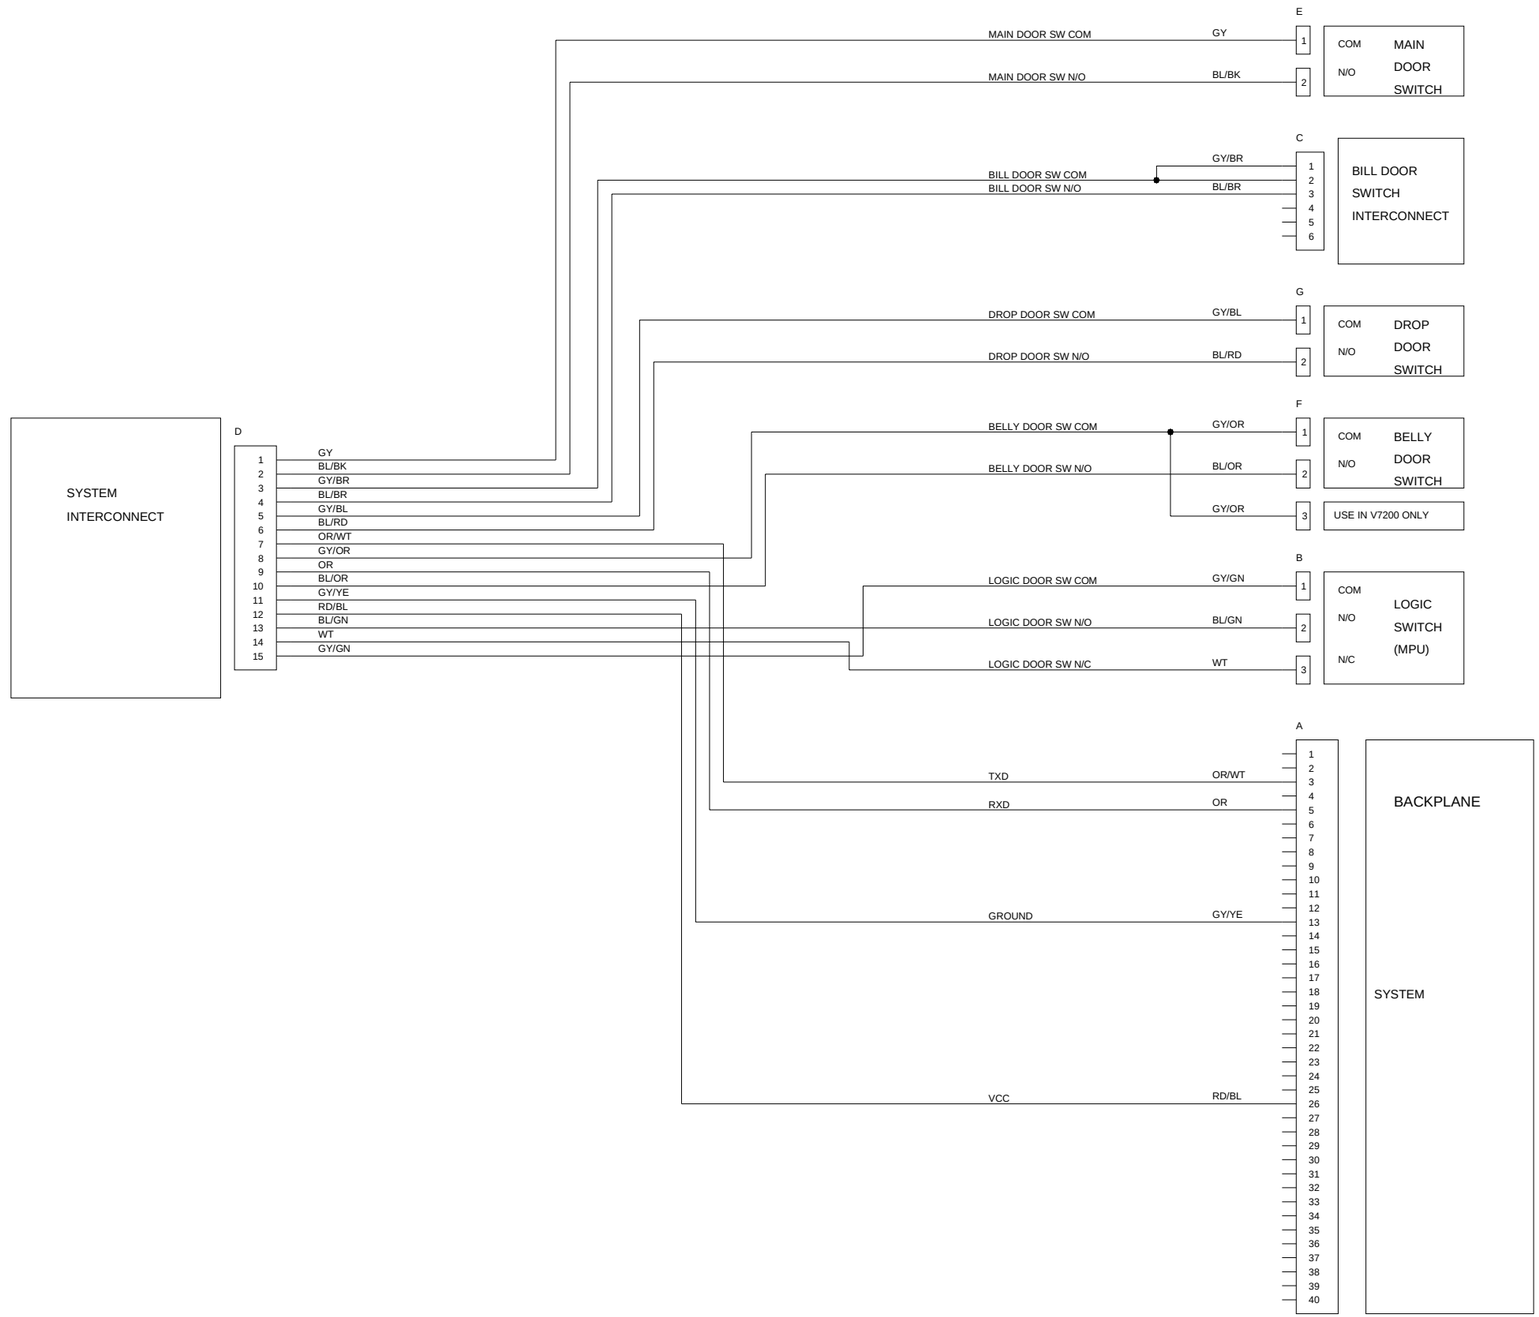

©2003 BALLY GAMING AND SYSTEMS

Cabinet

|| Cabinet Power CBL-30255-0001 ☑Slant

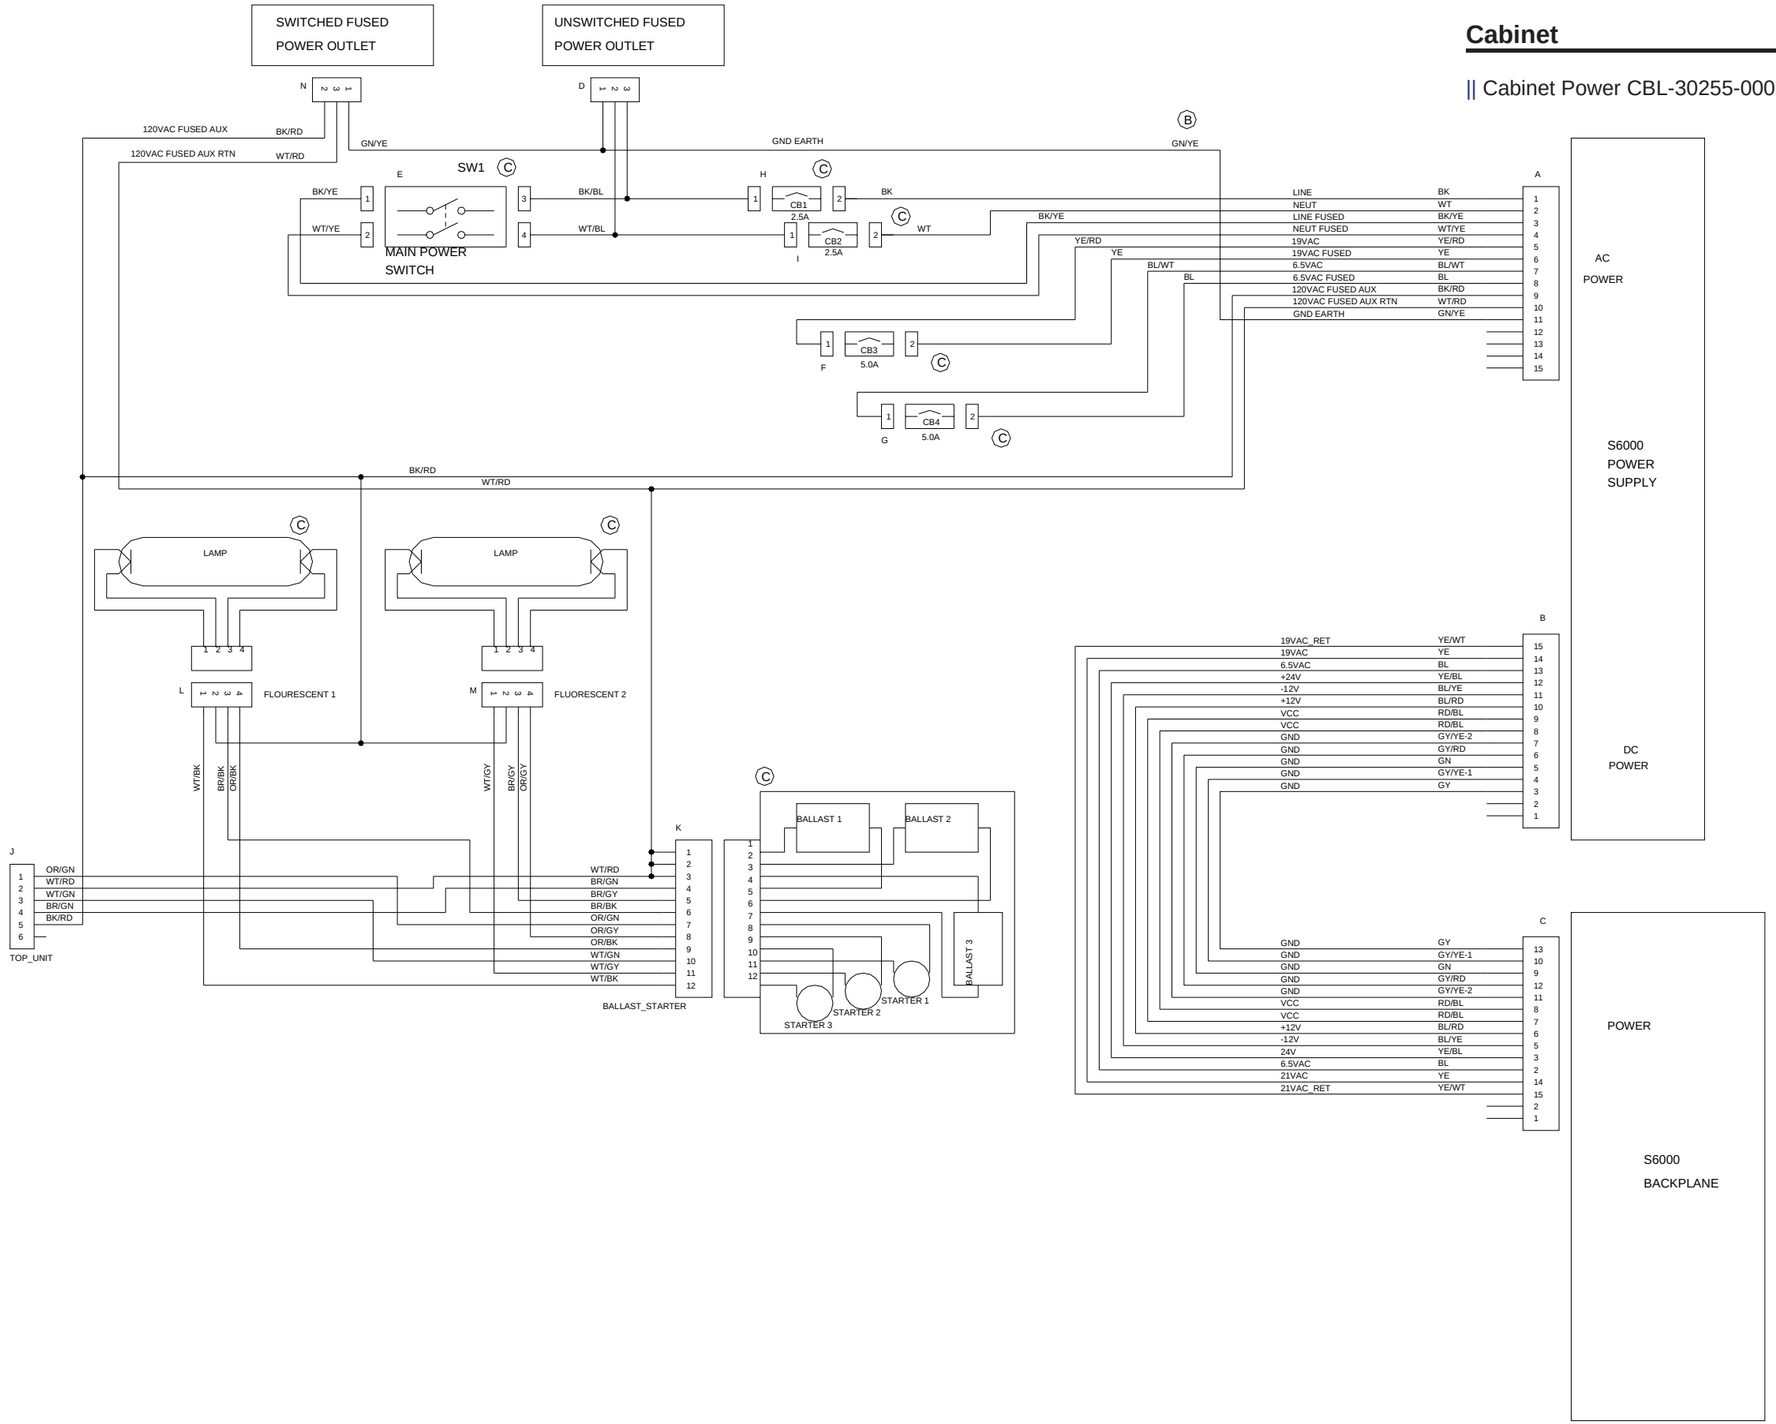

Cabinet

|| Cabinet Power CBL-30475-0001 ☑Upright

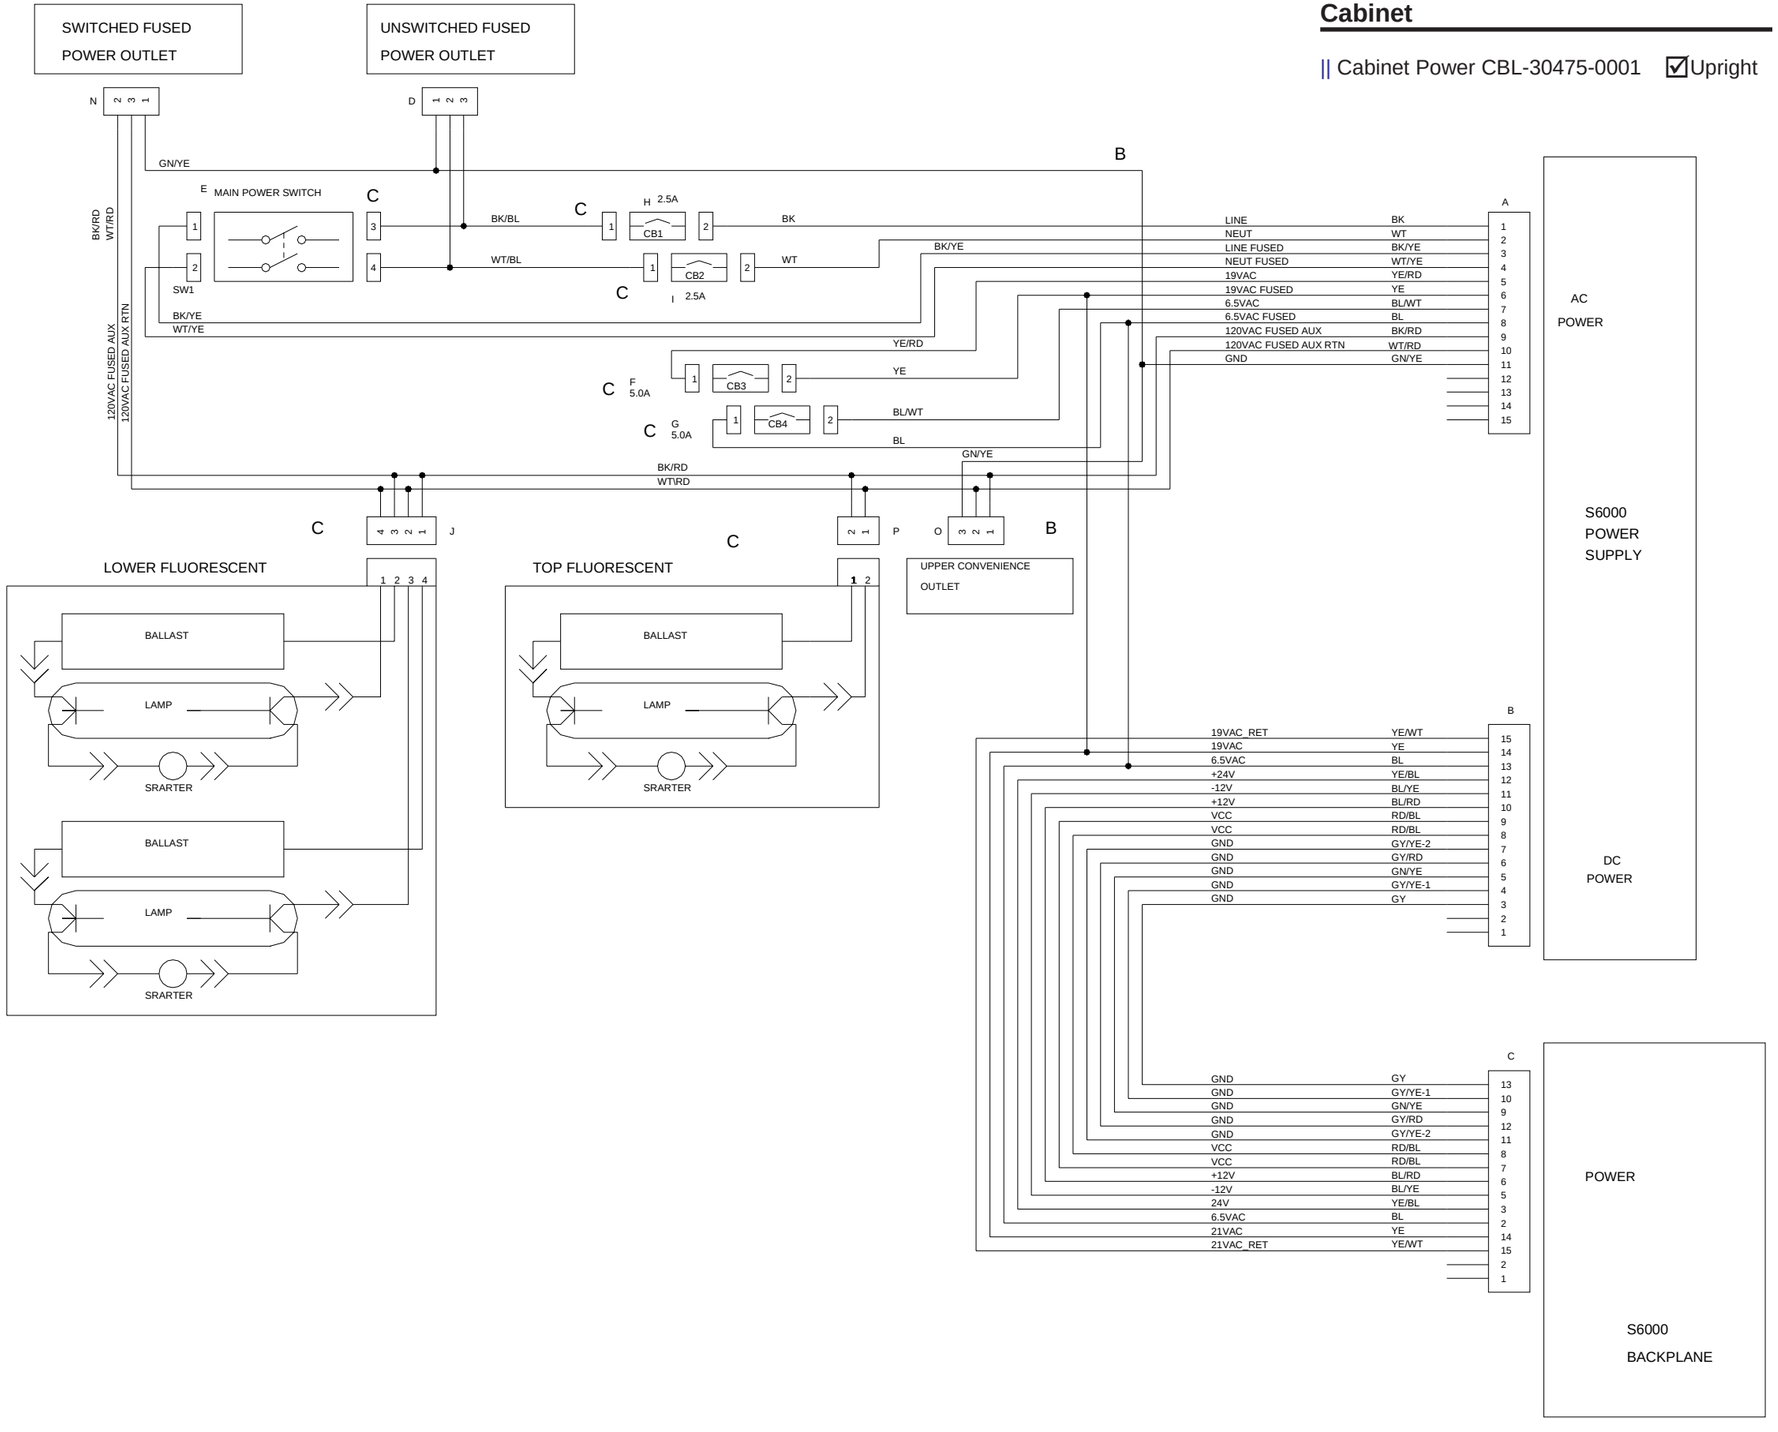

| - Revised, || - New

©2003 BALLY GAMING AND SYSTEMS

|| Cabinet Signal CBL-30478-0001 ☑Slant

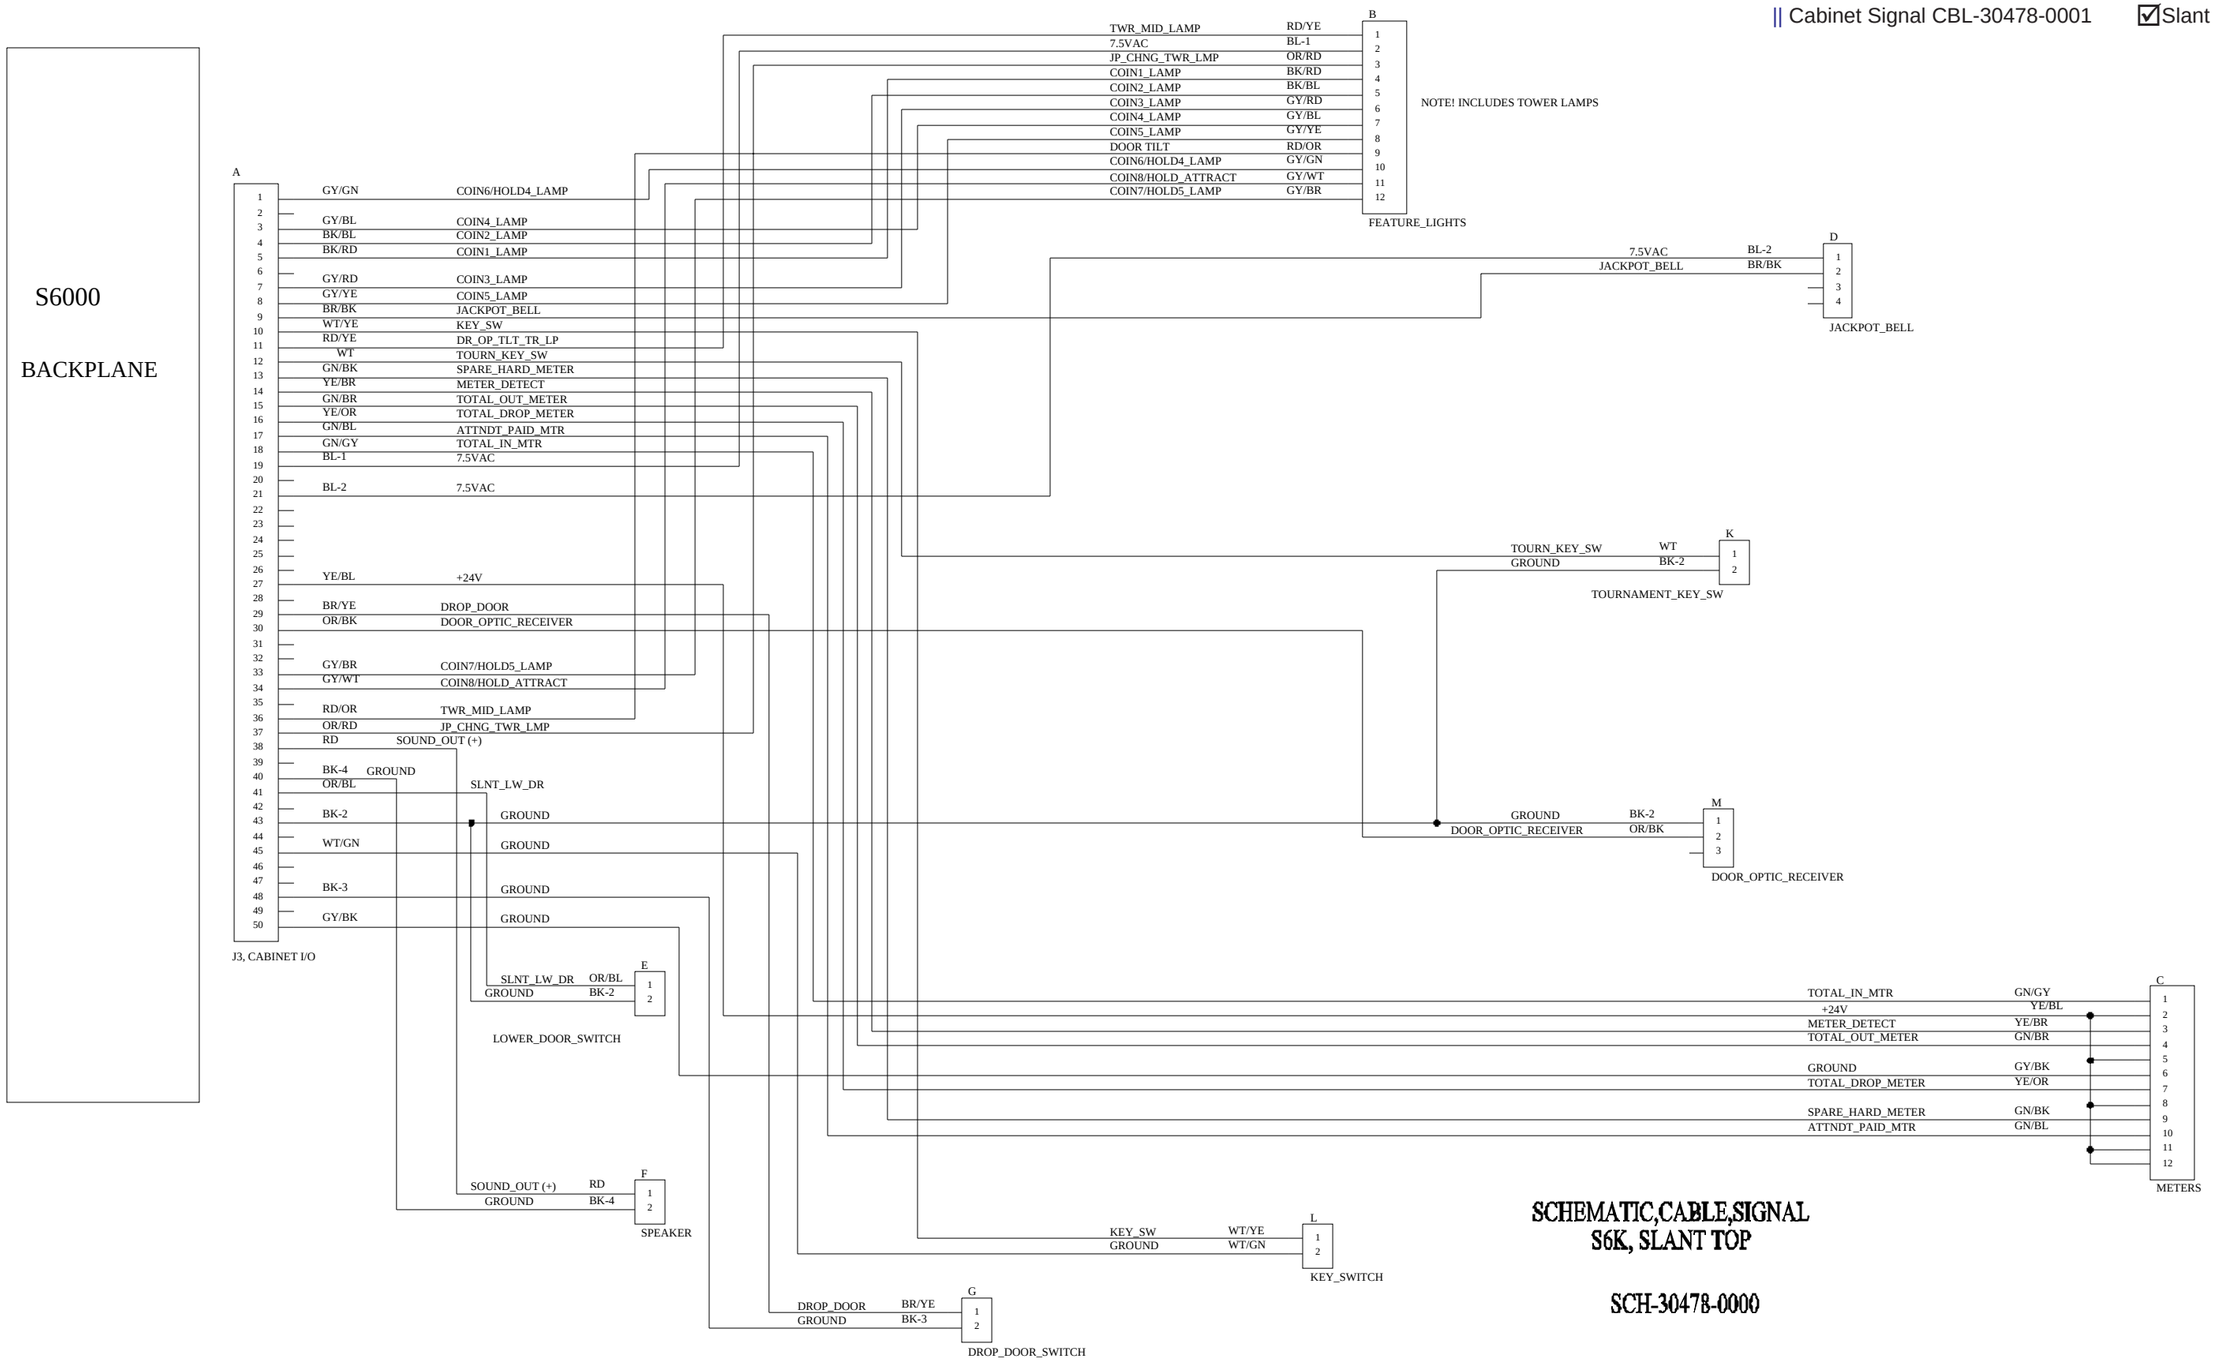

SCHEMATIC,CABLE,SIGNAL
S6K, SLANT TOP

SCH-30478-0000

©2003 BALLY GAMING AND SYSTEMS

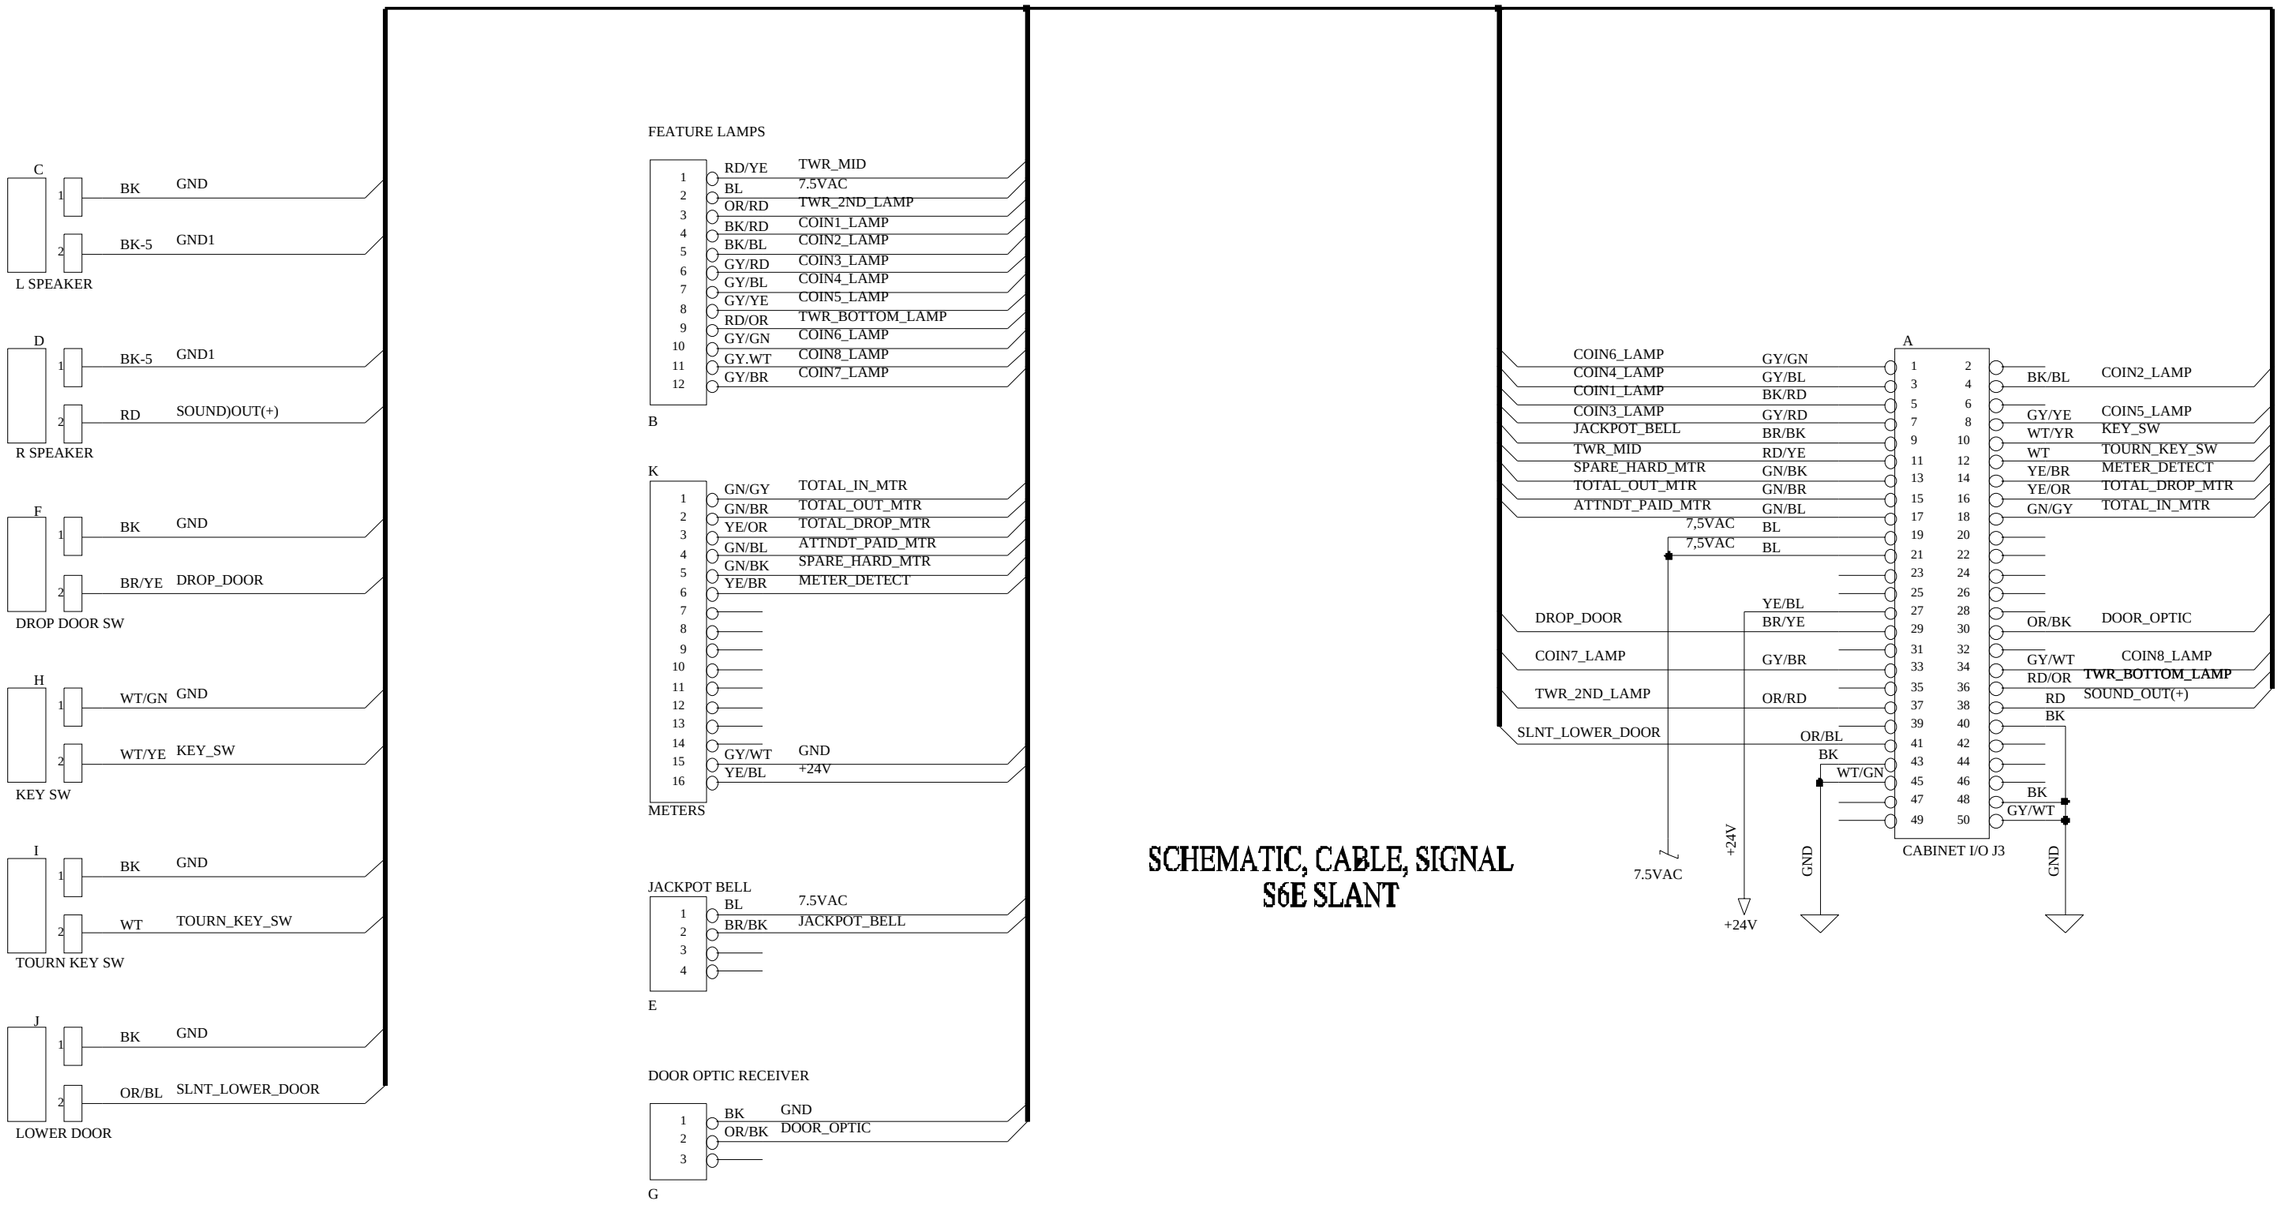

SCHEMATIC, CABLE, SIGNAL
S6E SLANT

©2003 BALLY GAMING AND SYSTEMS

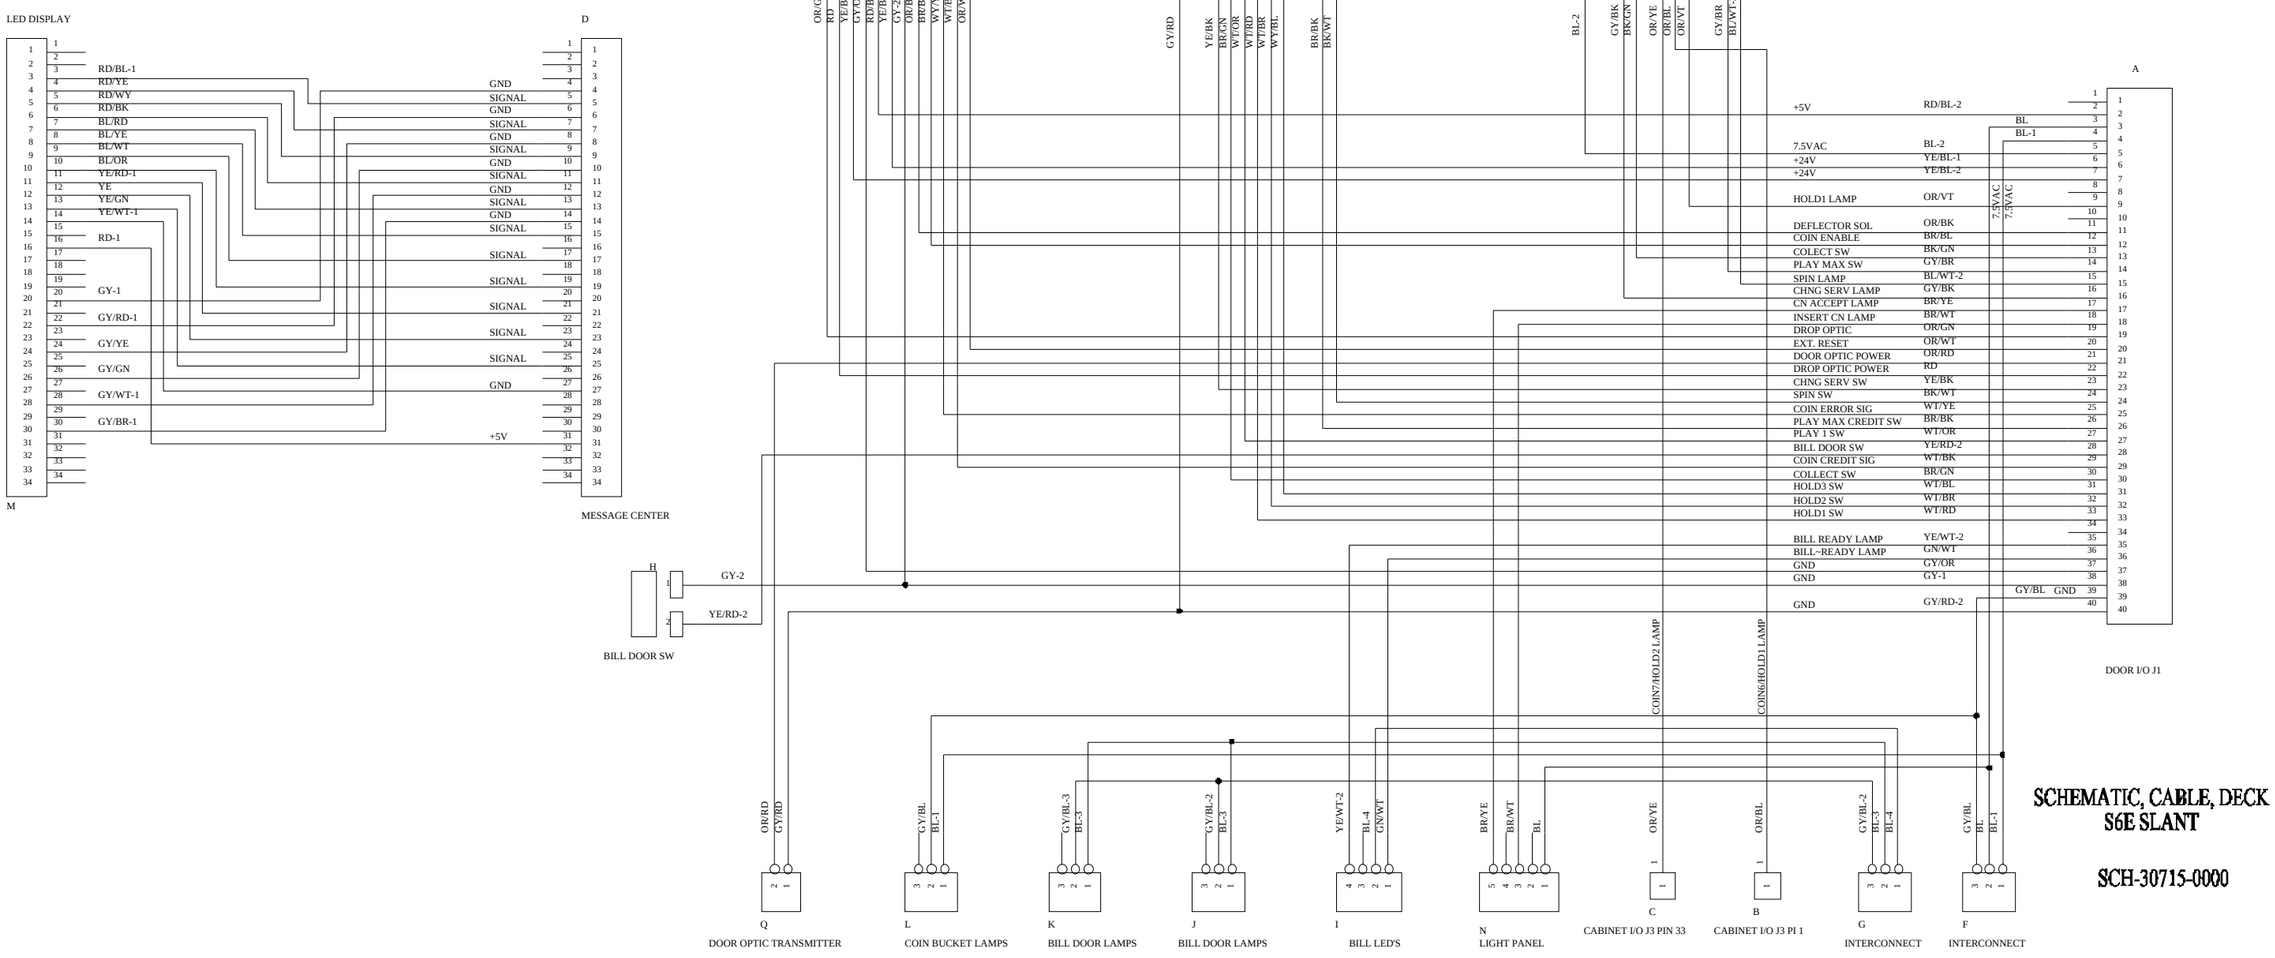

SCHEMATIC, CABLE, DECK
S6E SLANT

SCH-30715-0000

©2003 BALLY GAMING AND SYSTEMS

Cabinet

|| Door, with Removable Deck CBL-30680-0001
☑Upright

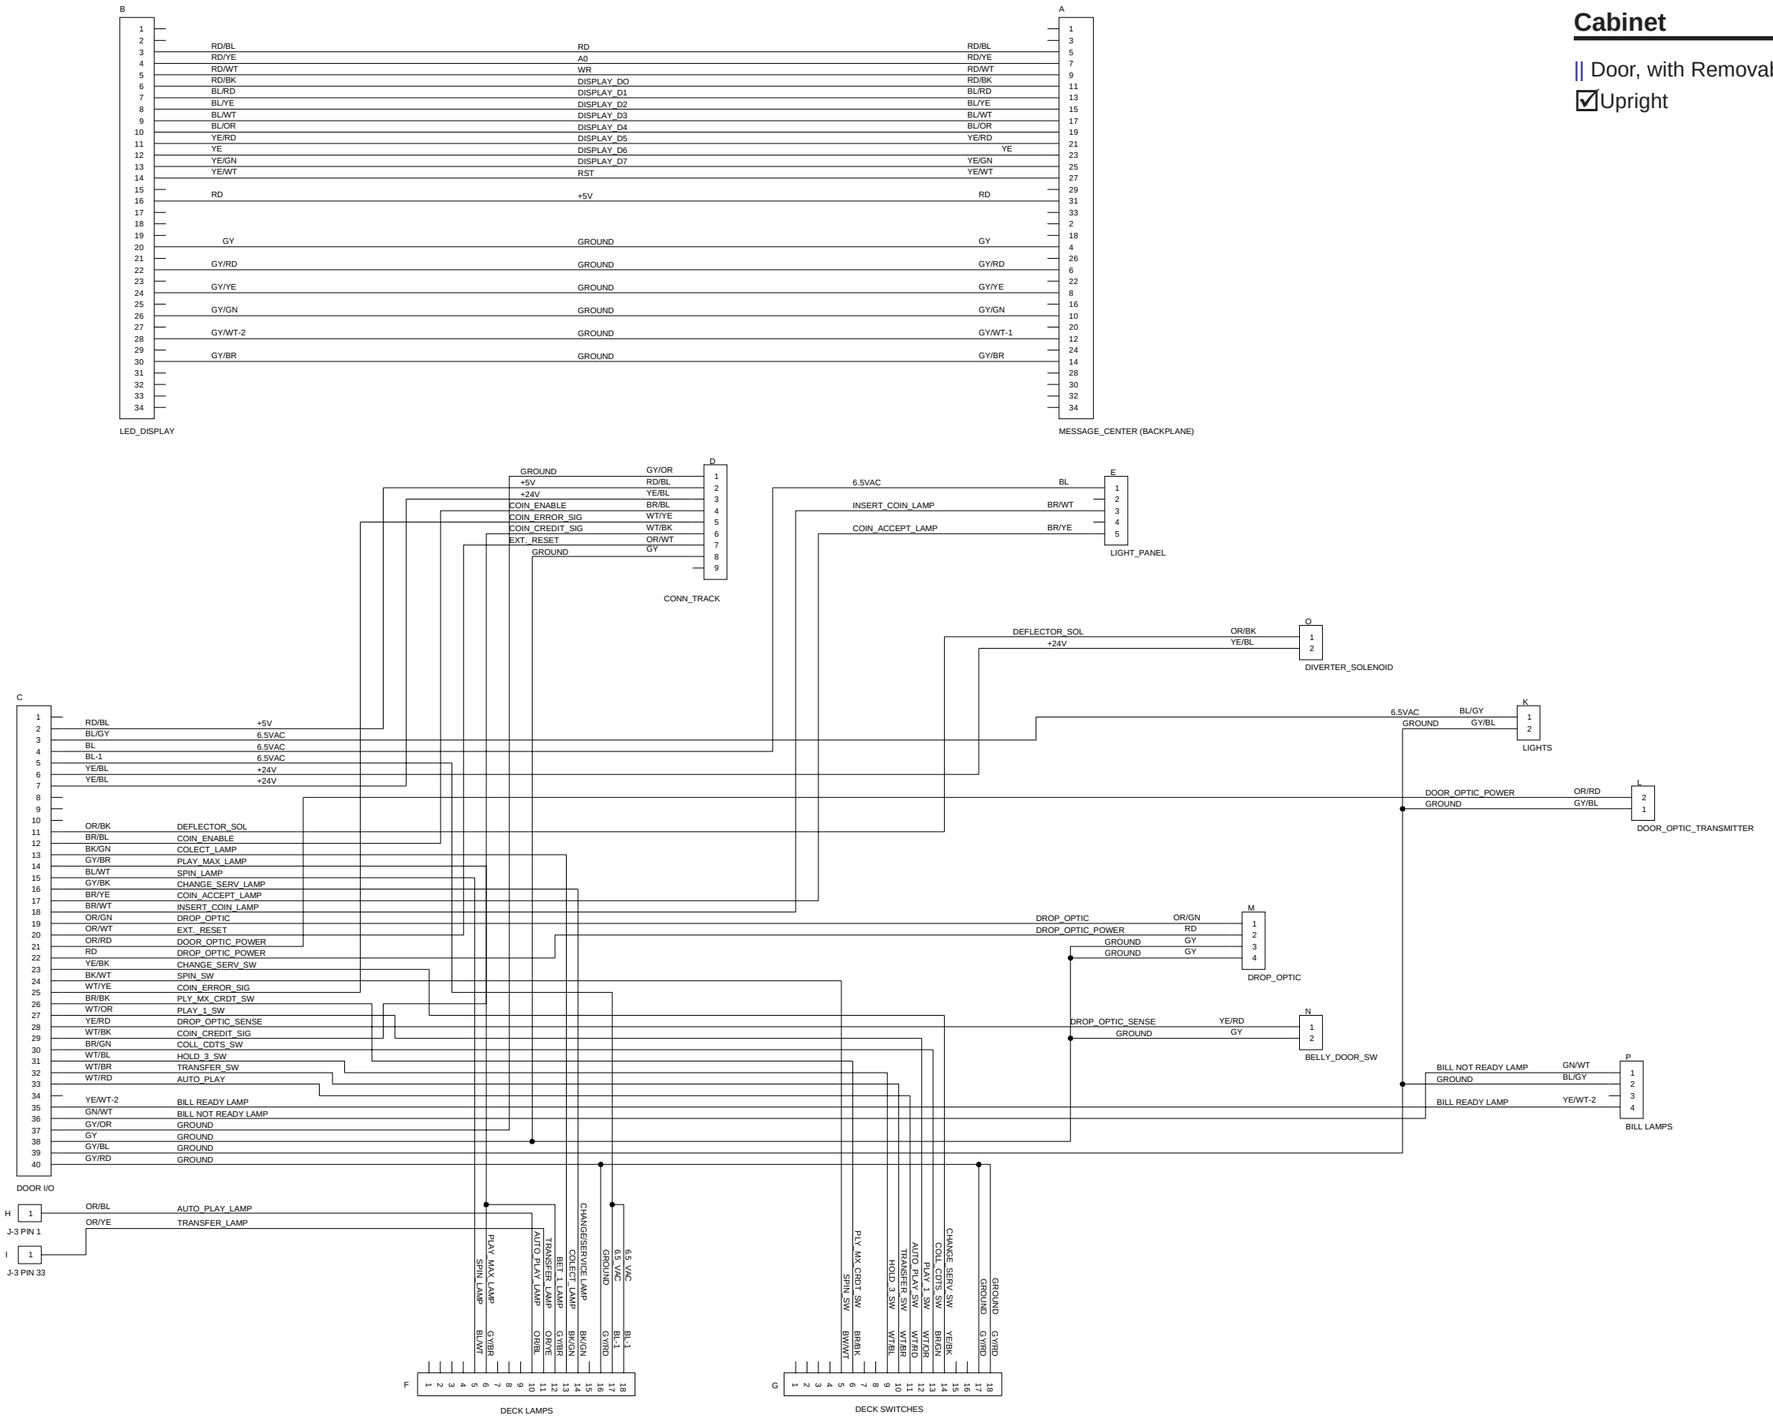

©2003 BALLY GAMING AND SYSTEMS

Cabinet

|| Cabinet Signal CBL-30234-0001 ☑Upright

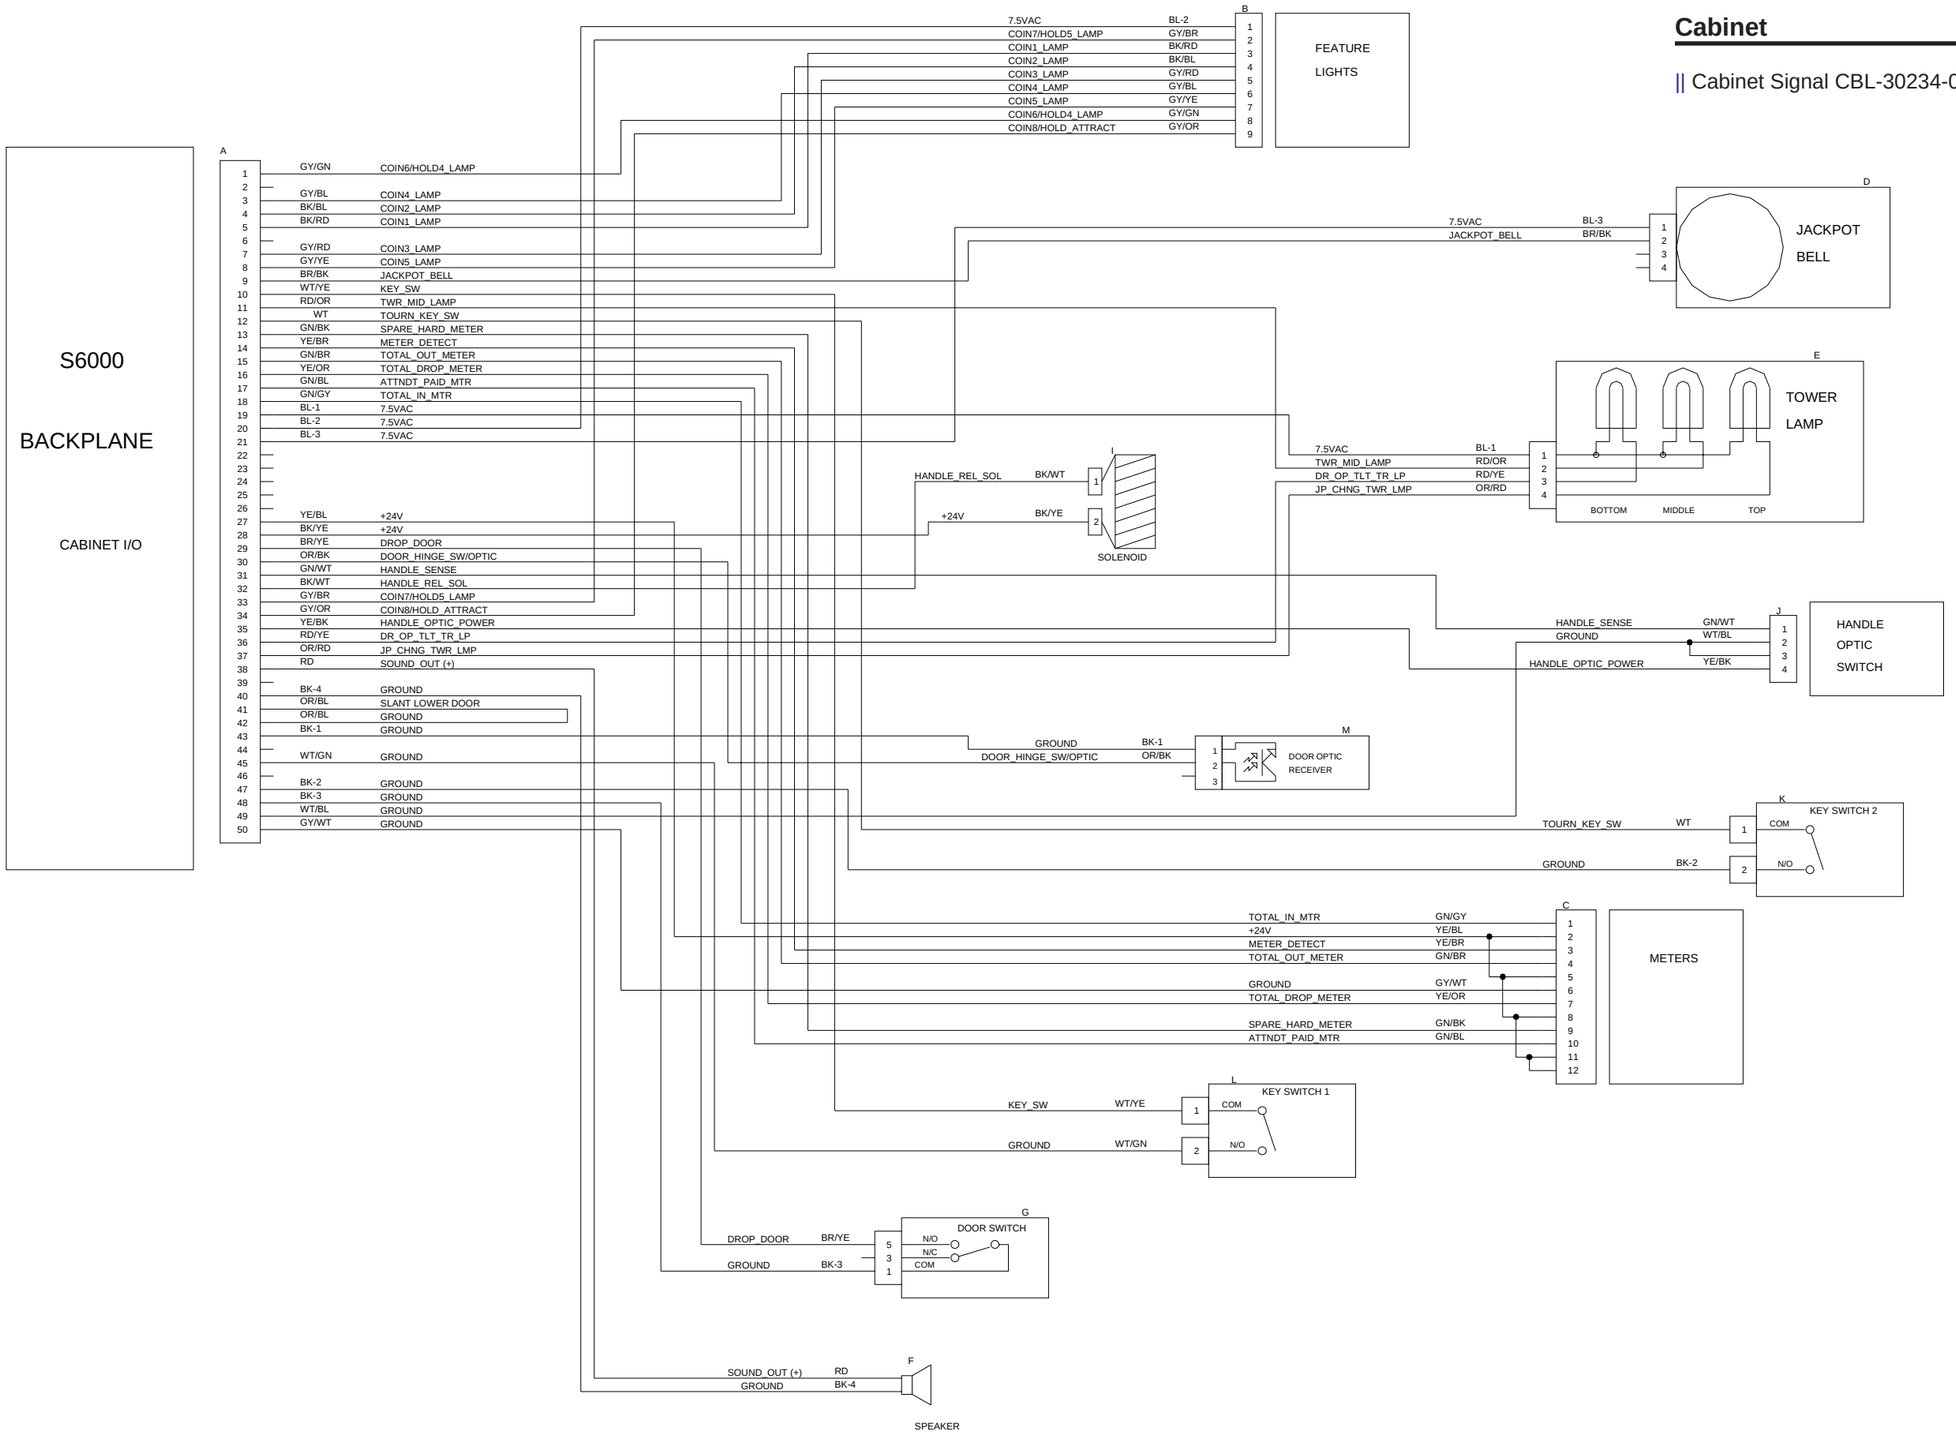

©2003 BALLY GAMING AND SYSTEMS

Cabinet

|| Light Panel Feature, Round CBL-30377-0001
☑Slant

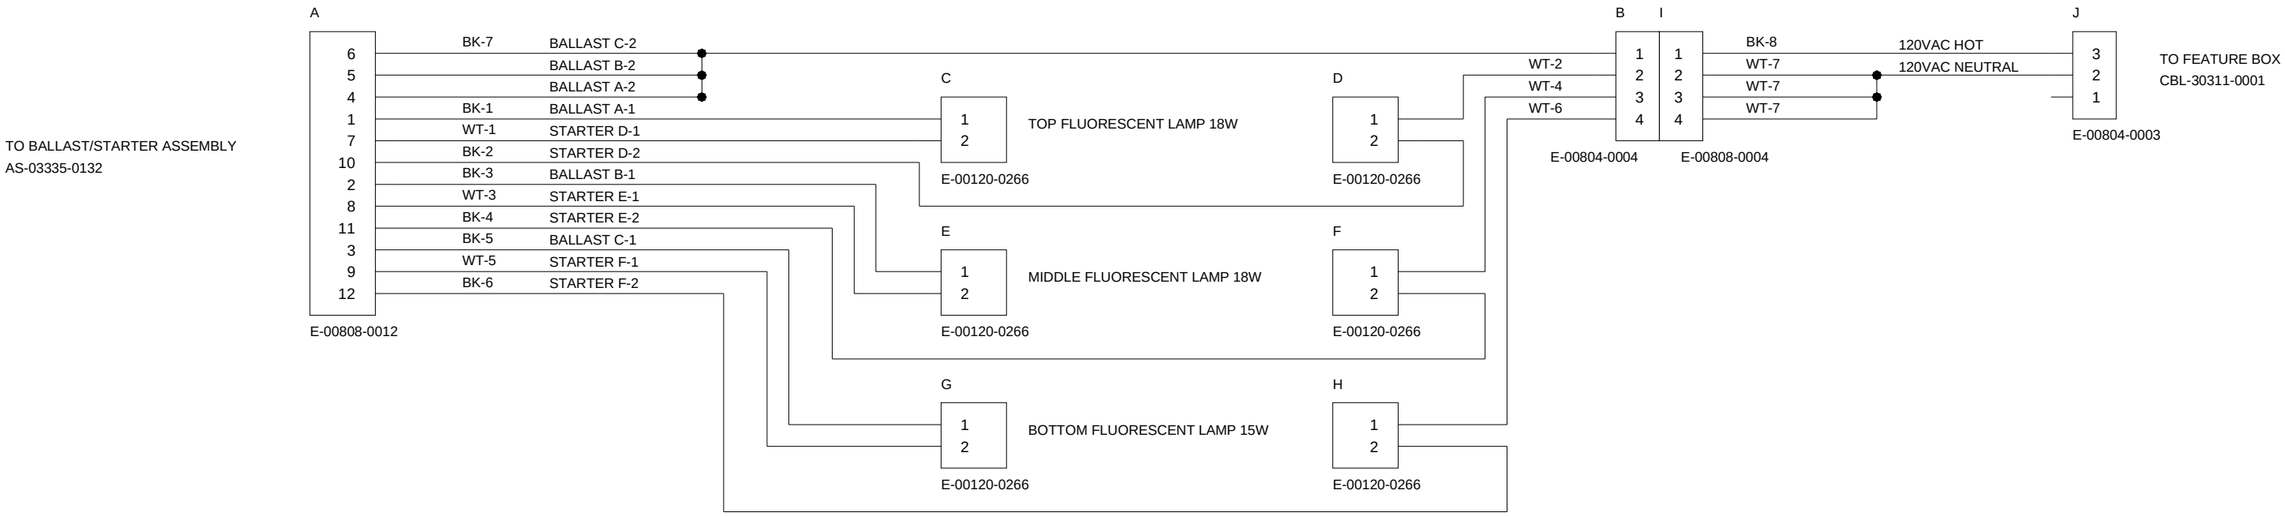

©2003 BALLY GAMING AND SYSTEMS

|| Top Box Fluorescent CBL-20368-0001

☑S6E

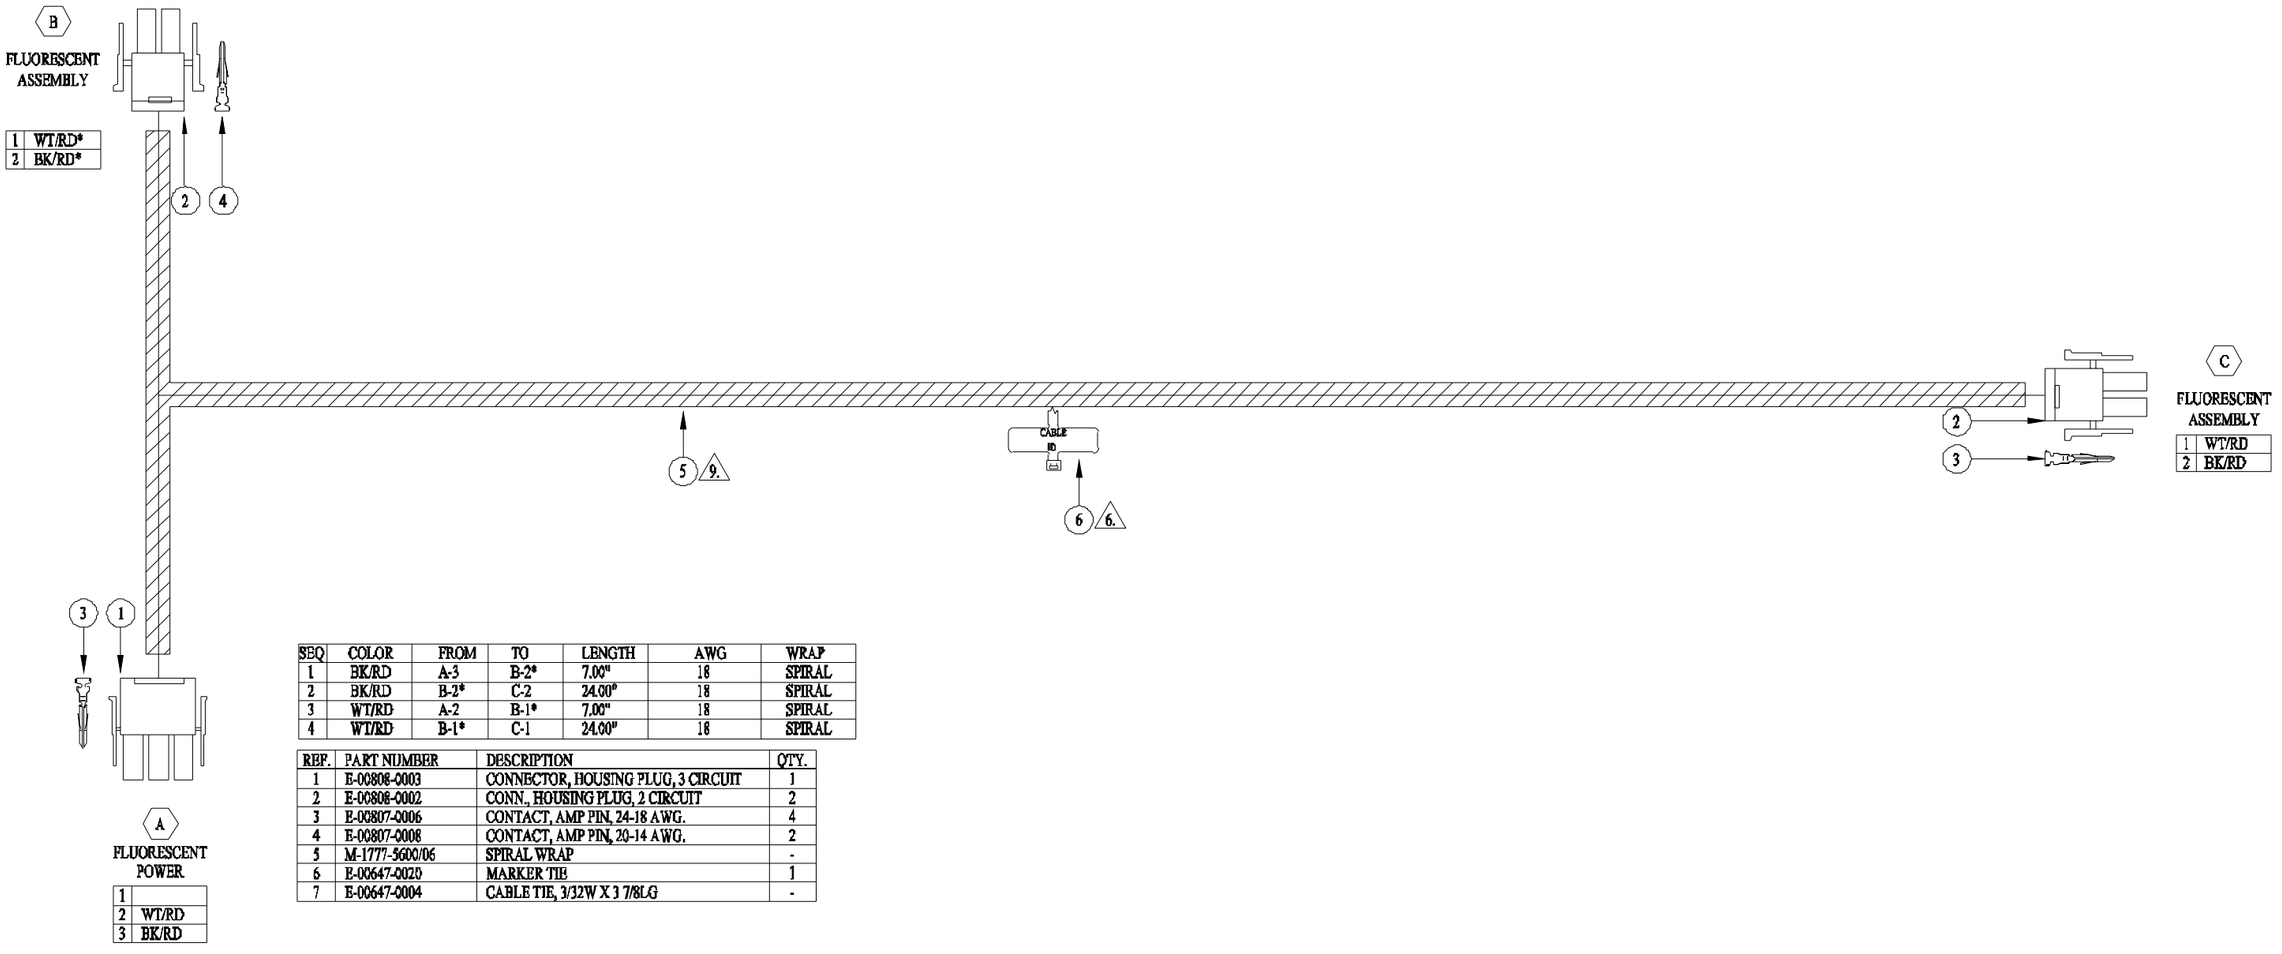

SEQ	COLOR	FROM	TO	LENGTH	AWG	WRAP
1	BK/RD	A-3	B-2*	7.00"	18	SPIRAL
2	BK/RD	B-2*	C-2	24.00"	18	SPIRAL
3	WT/RD	A-2	B-1*	7.00"	18	SPIRAL
4	WT/RD	B-1*	C-1	24.00"	18	SPIRAL

REF.	PART NUMBER	DESCRIPTION	QTY.
1	E-00808-0003	CONNECTOR, HOUSING PLUG, 3 CIRCUIT	1
2	E-00808-0002	CONN., HOUSING PLUG, 2 CIRCUIT	2
3	E-00807-0006	CONTACT, AMP PIN, 24-18 AWG.	4
4	E-00807-0008	CONTACT, AMP PIN, 20-14 AWG.	2
5	M-1777-5600/06	SPIRAL WRAP	-
6	E-00647-0020	MARKER TIE	1
7	E-00647-0004	CABLE TIE, 3/32W X 3 7/8LG	-

©2003 BALLY GAMING AND SYSTEMS

|| Top Box Light CBL-30643-0001 ☑S6E

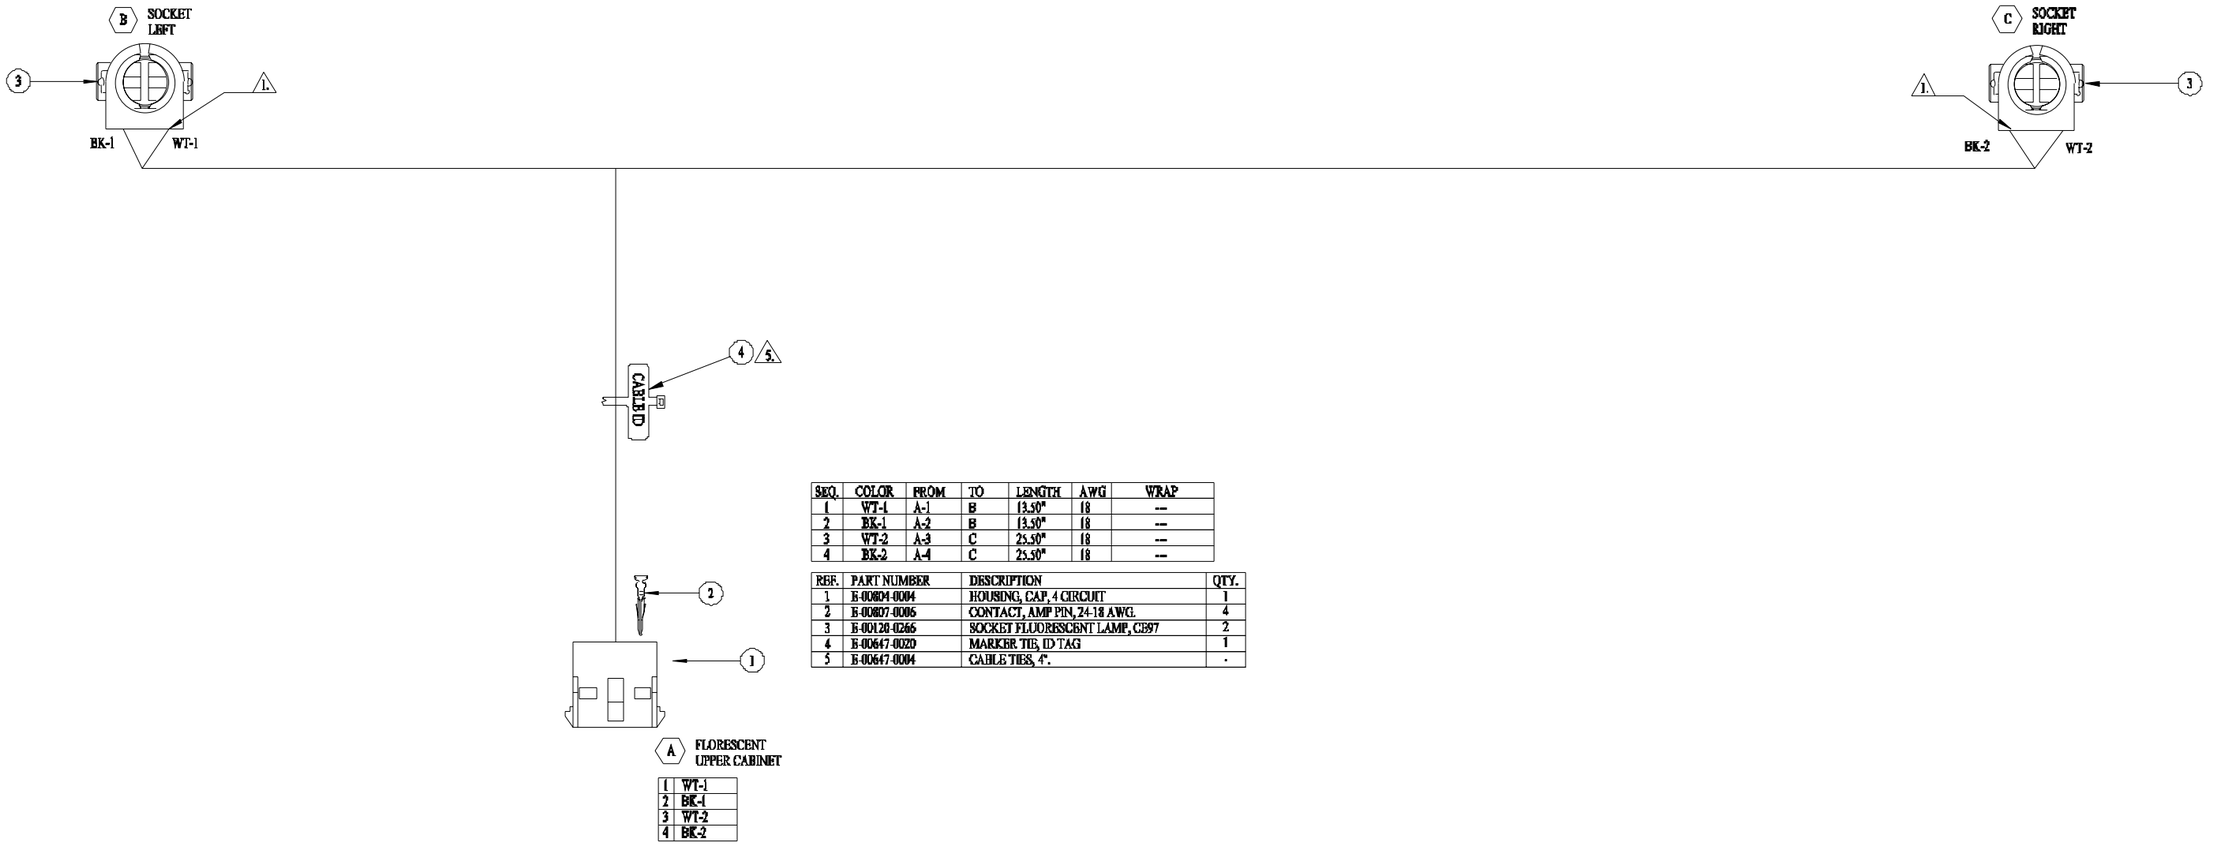

SEQ.	COLOR	FROM	TO	LENGTH	AWG	WRAP
1	WT-1	A-1	B	13.50"	18	--
2	BK-1	A-2	B	13.50"	18	--
3	WT-2	A-3	C	25.50"	18	--
4	BK-2	A-4	C	25.50"	18	--

REF.	PART NUMBER	DESCRIPTION	QTY.
1	E-00804-0004	HOUSING, CAP, 4 CIRCUIT	1
2	E-00807-0006	CONTACT, AMP PIN, 24-18 AWG.	4
3	E-00128-0266	SOCKET FLUORESCENT LAMP, CE97	2
4	E-00647-0020	MARKER TIE, ID TAG	1
5	E-00647-0004	CABLE TIES, 4".	.

©2003 BALLY GAMING AND SYSTEMS

Coin Acceptor

|| COD / CC-16 CBL-30471-0001 ☑Upright

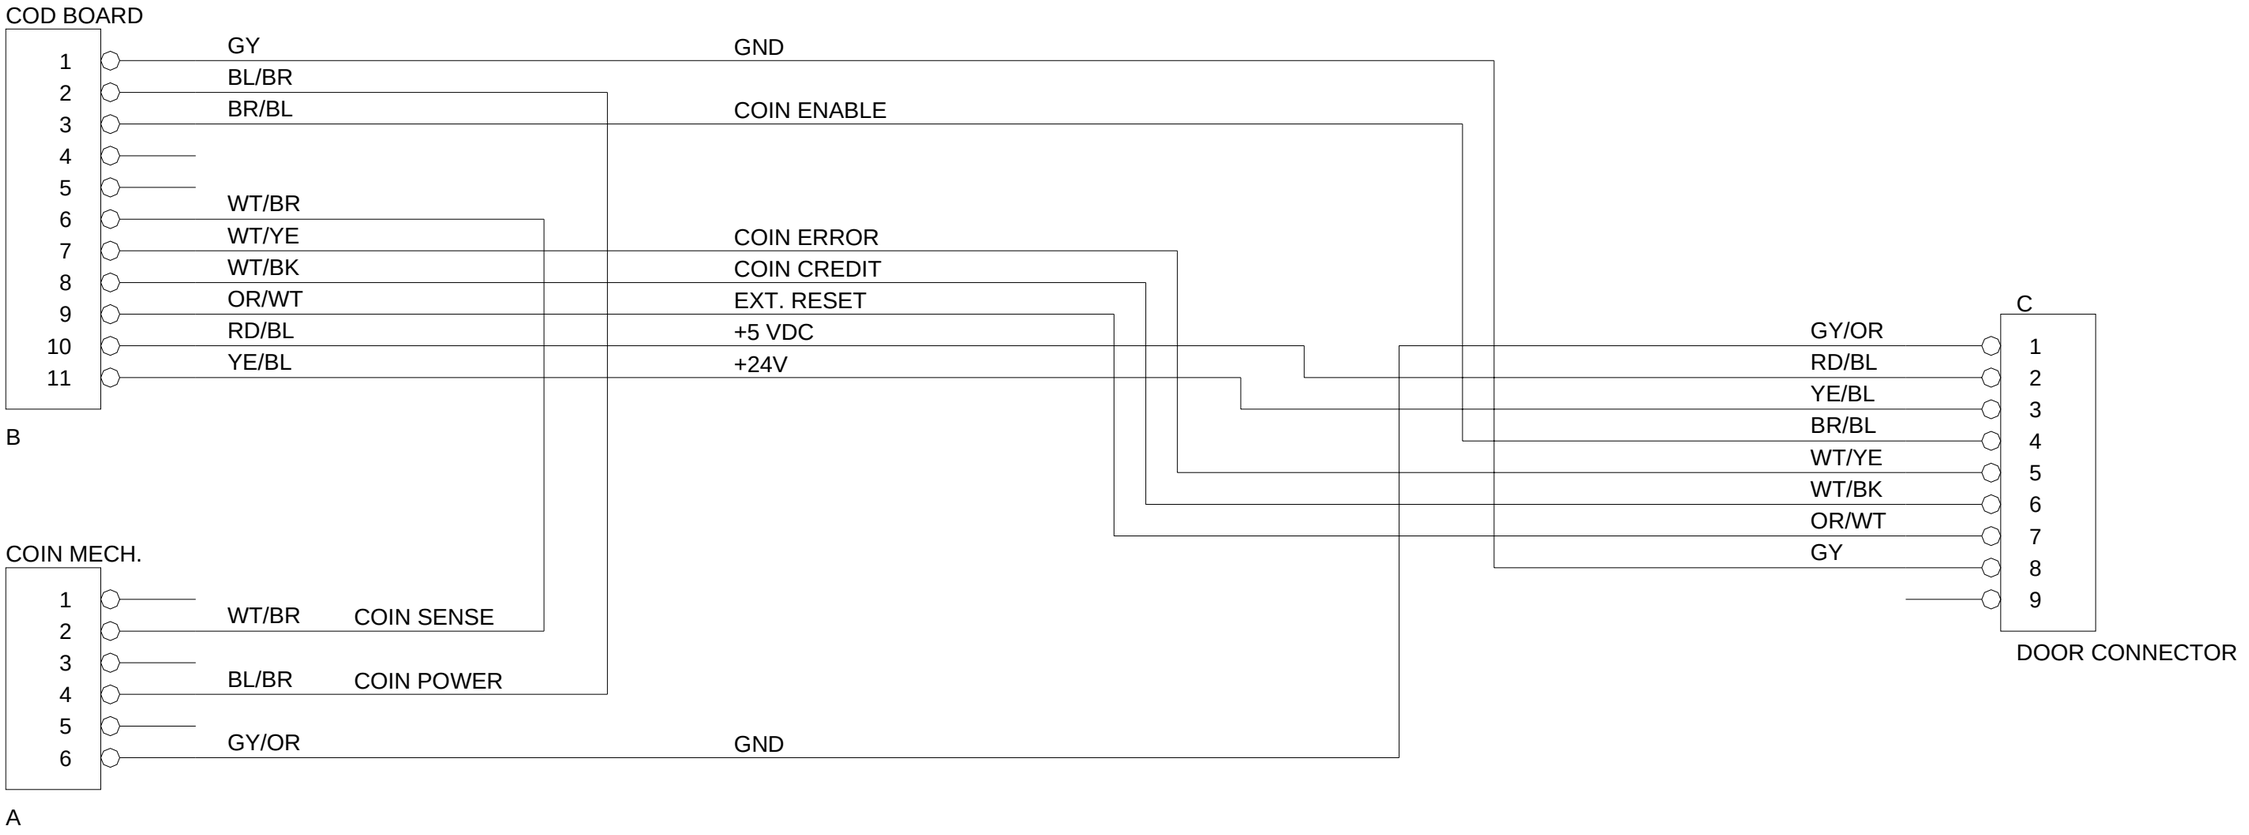

Coin Acceptor

Coin Acceptor Interface, MC-16
CBL-20295-0001 ☑Upright

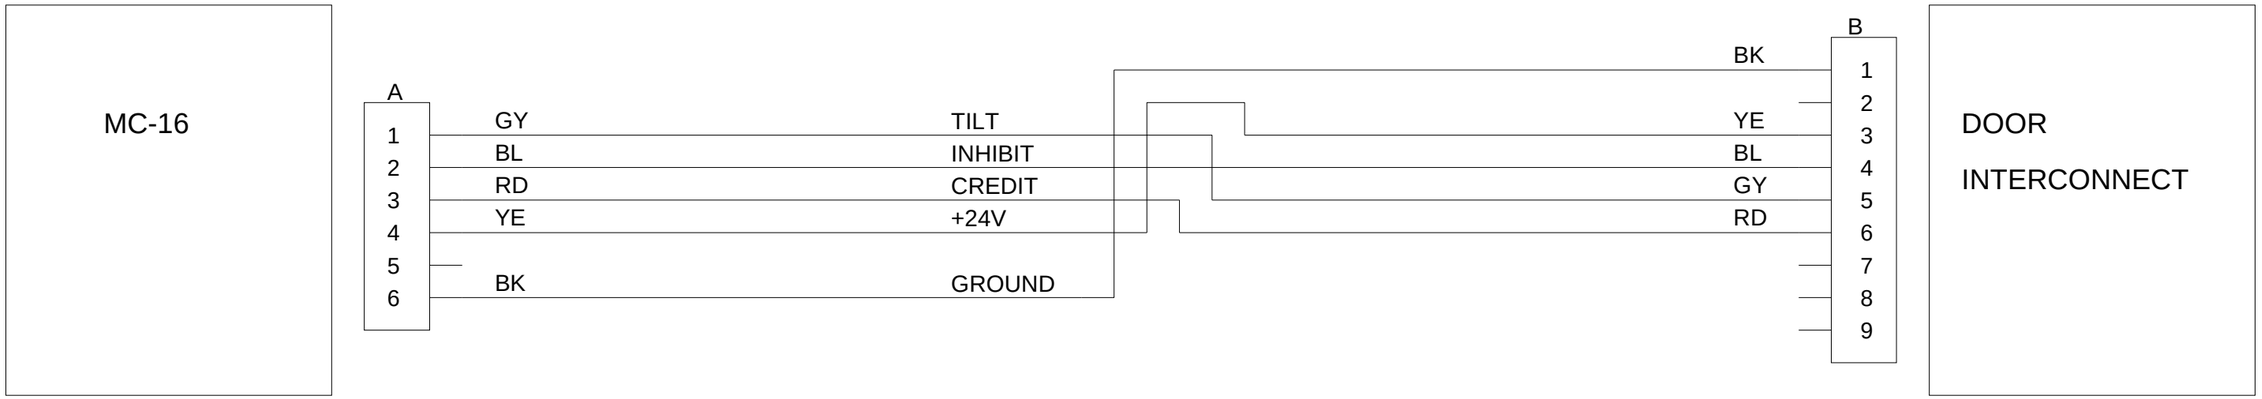

©2003 BALLY GAMING AND SYSTEMS

|| Coin Acceptor Interface, MC-16
CBL-20307-0001 ☑Slant

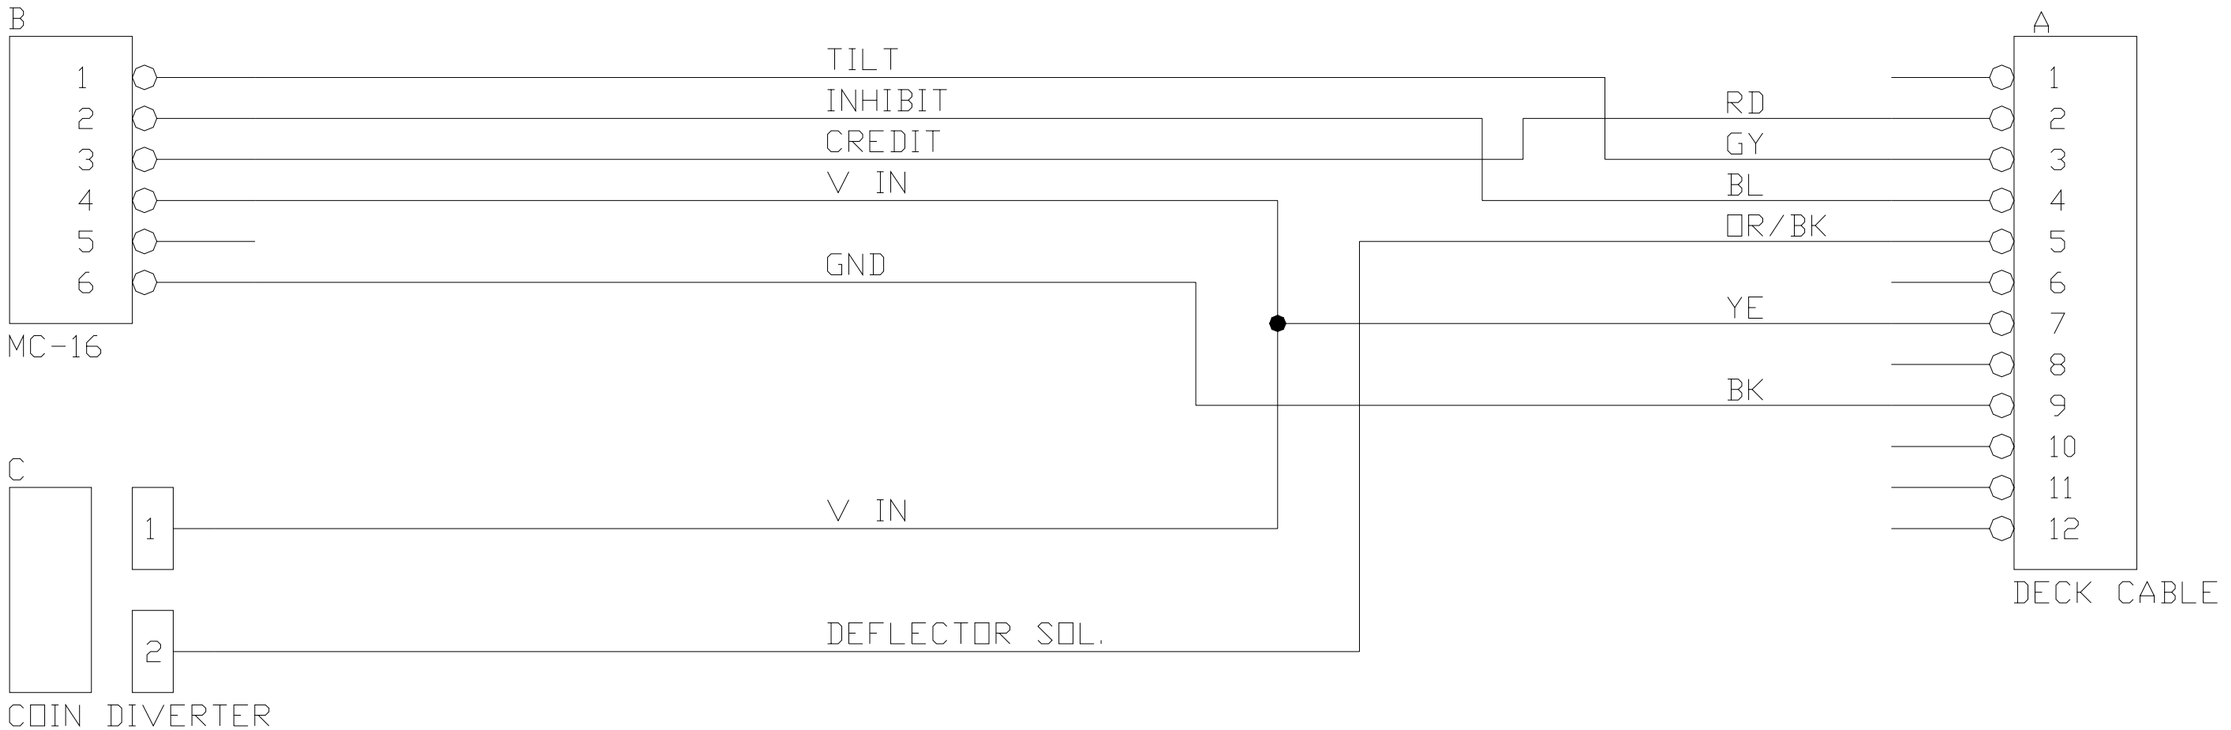

Coin Acceptor

|| Coin I/O CBL-30472-0001 ☑Slant

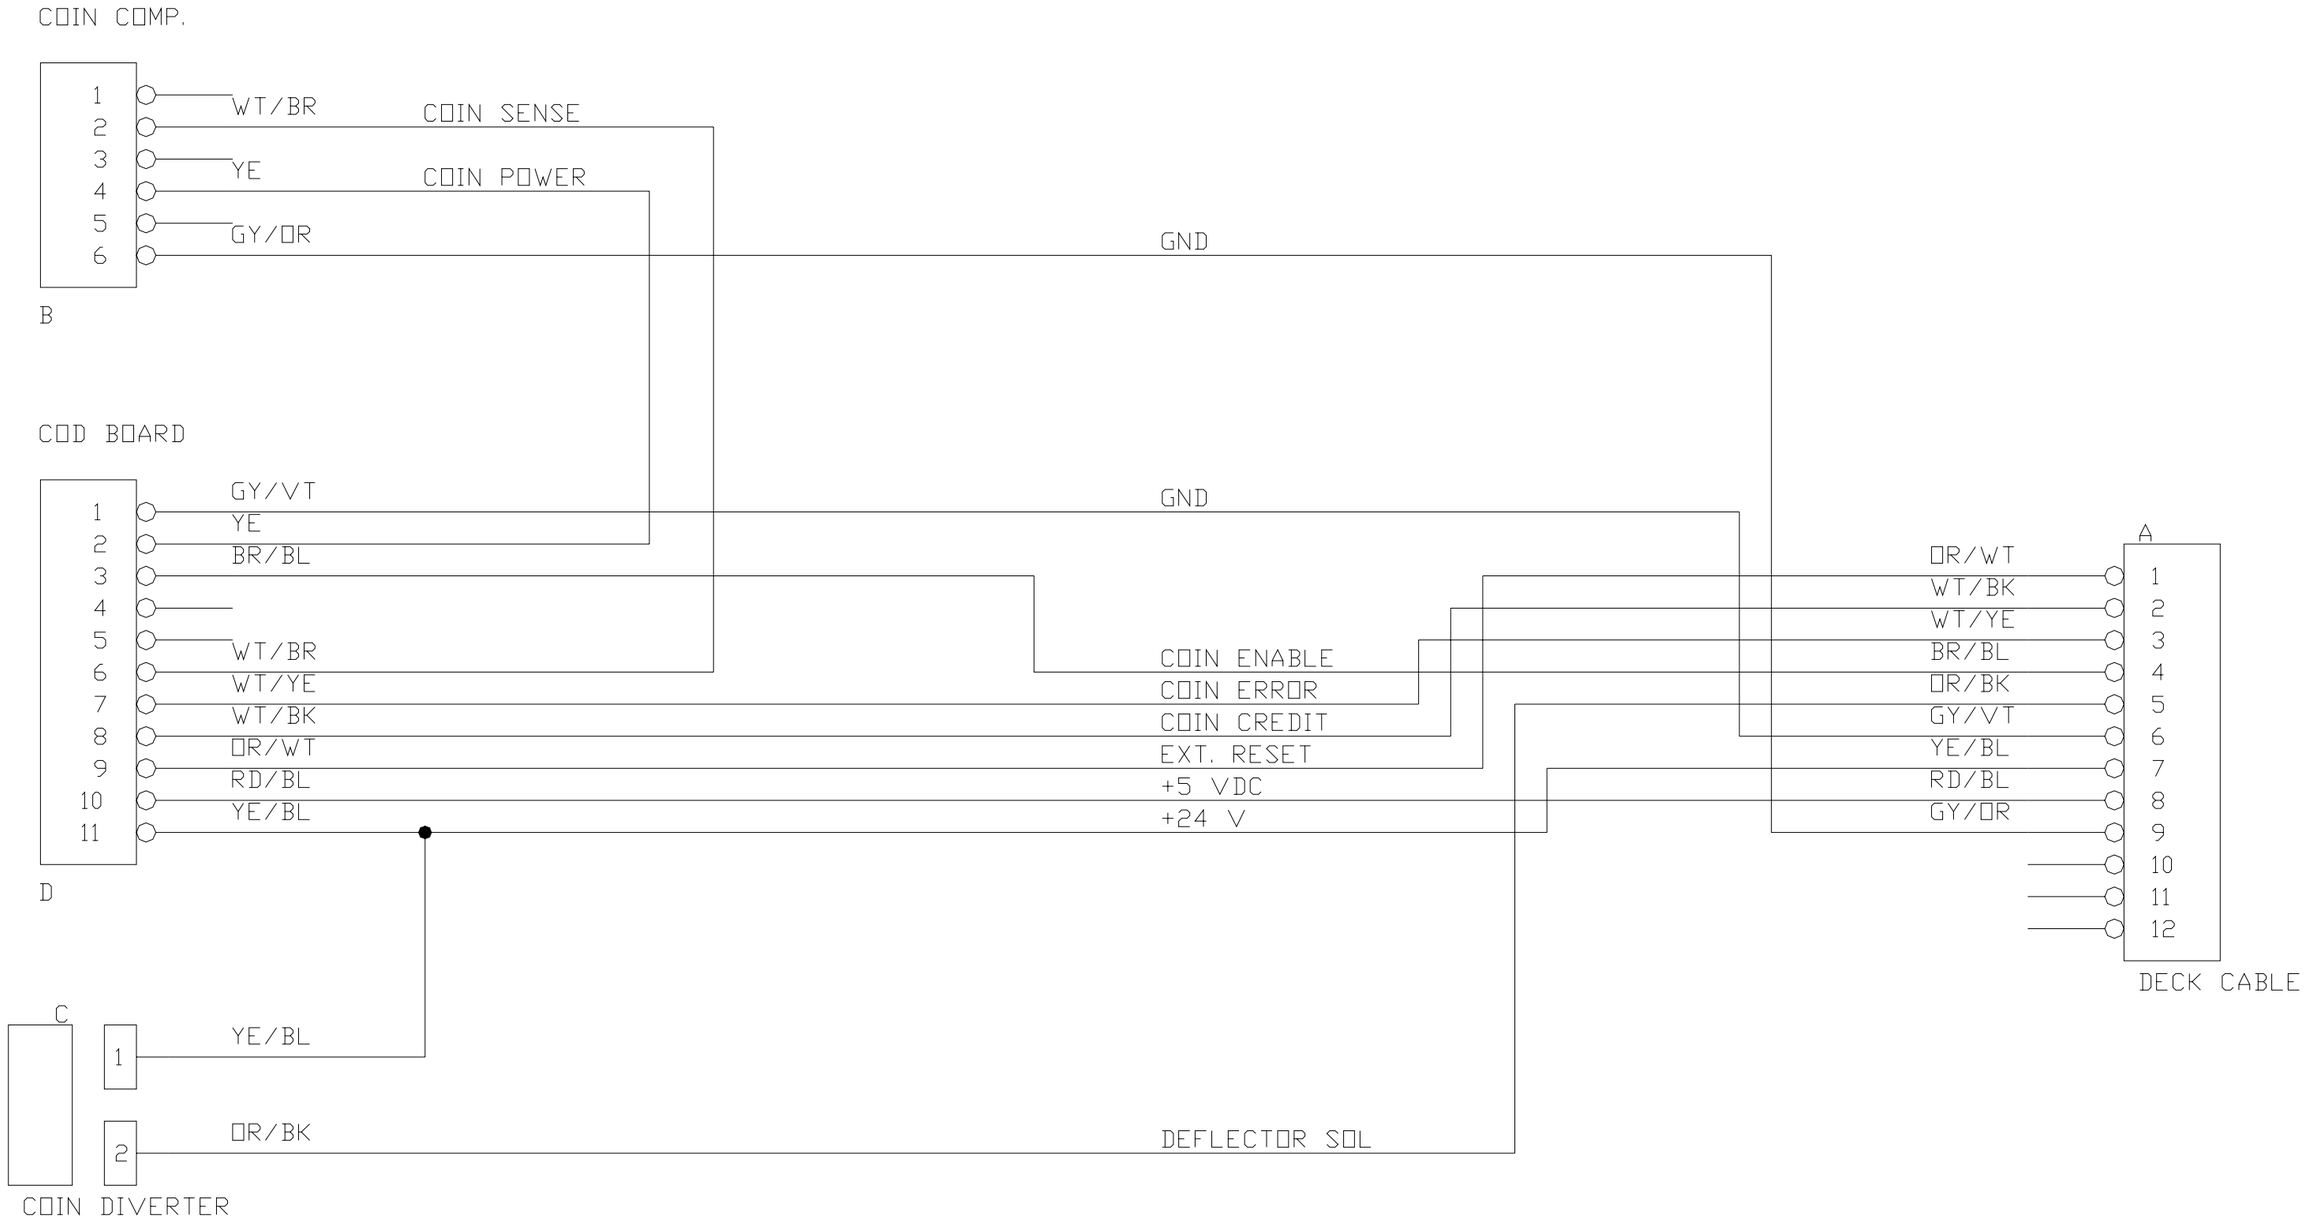

©2003 BALLY GAMING AND SYSTEMS

Coin Acceptor

|| Coin I/O, COD/IDX/Condor
CBL-30471-0002 ☑Upright

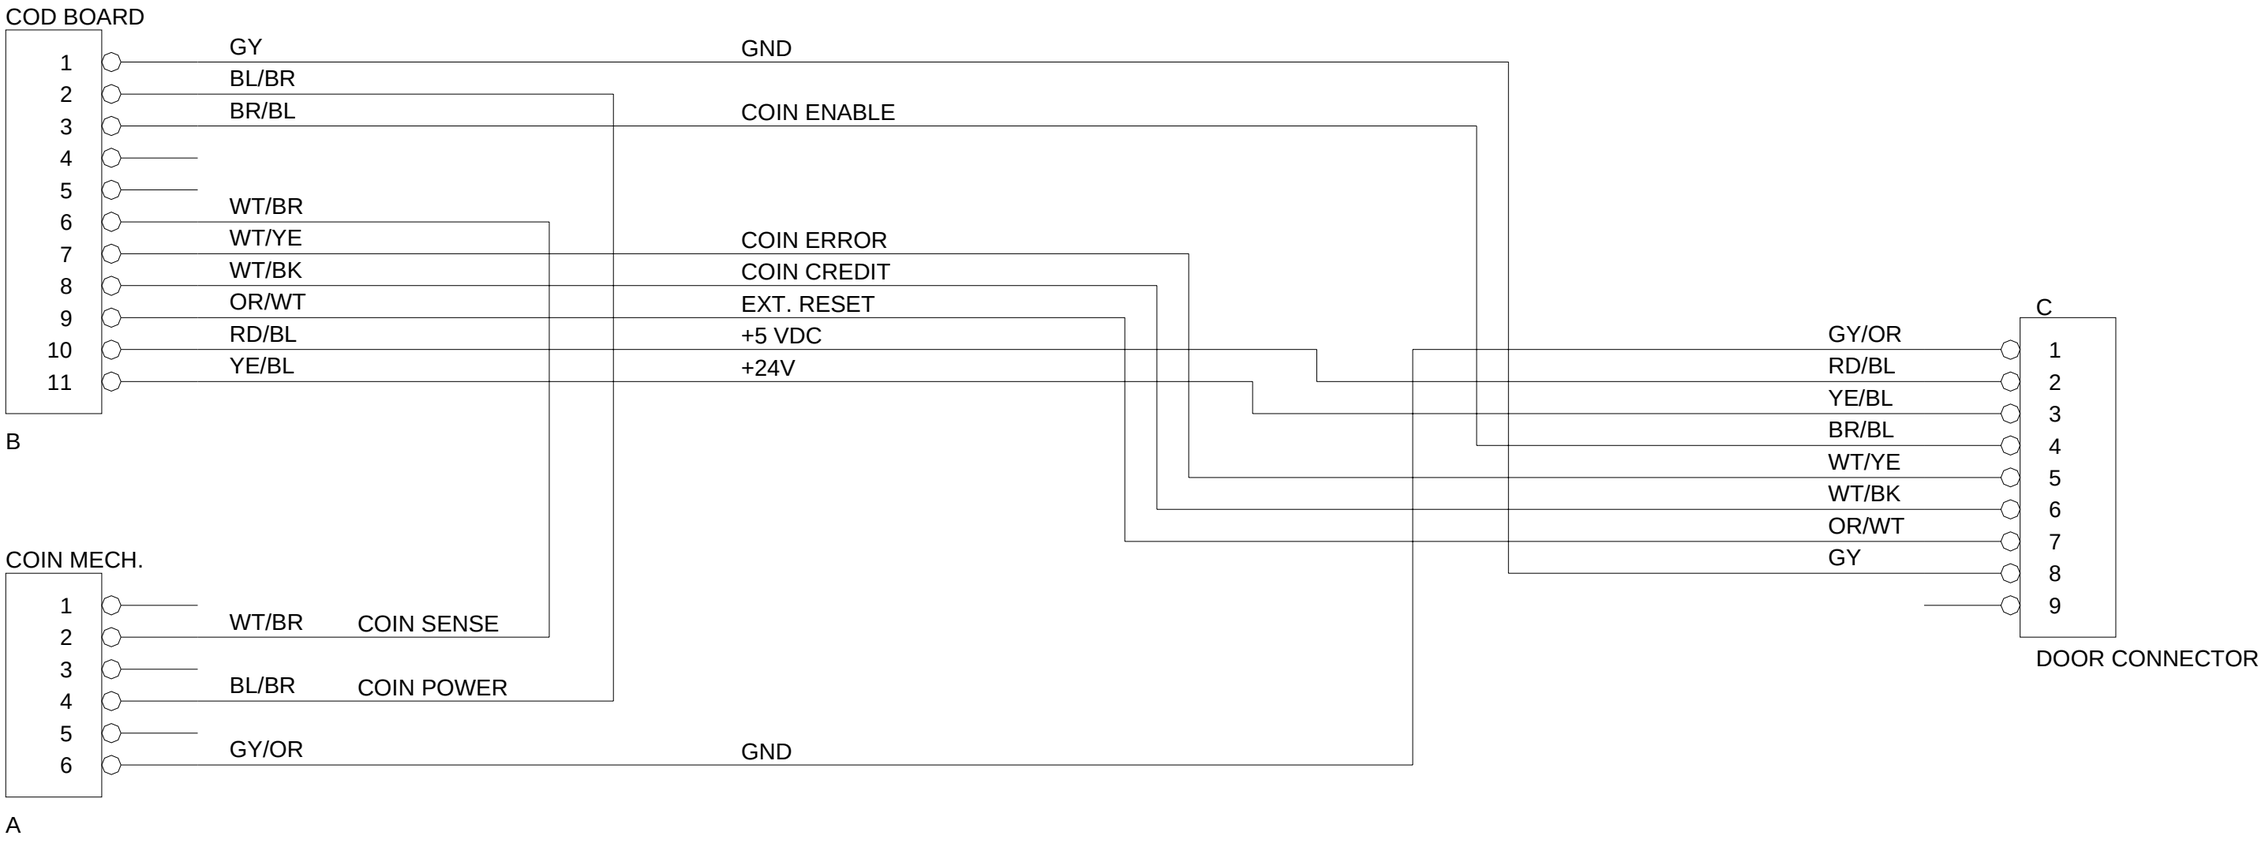

©2003 BALLY GAMING AND SYSTEMS

Hopper

|| Hopper CBL-30473-0001 ☑Upright
|| Hopper CBL-30476-0002 ☑Slant

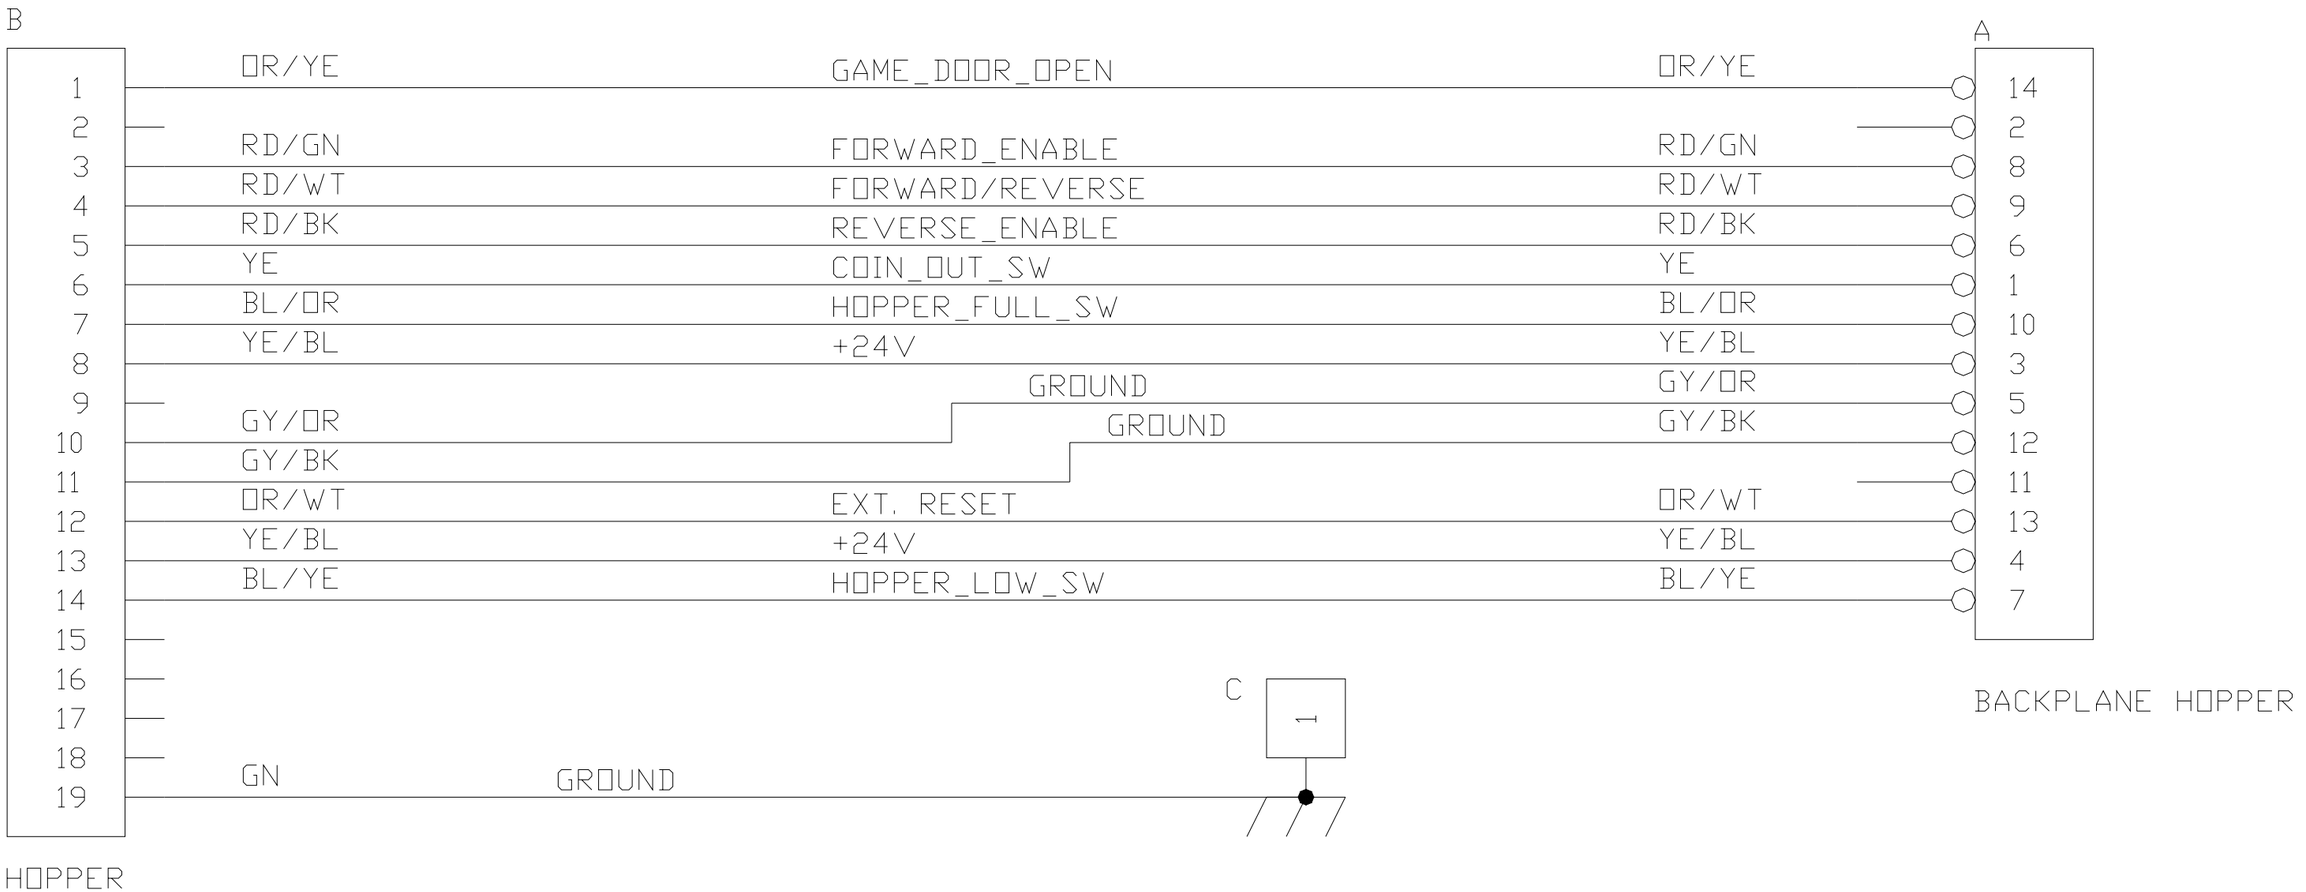

©2003 BALLY GAMING AND SYSTEMS

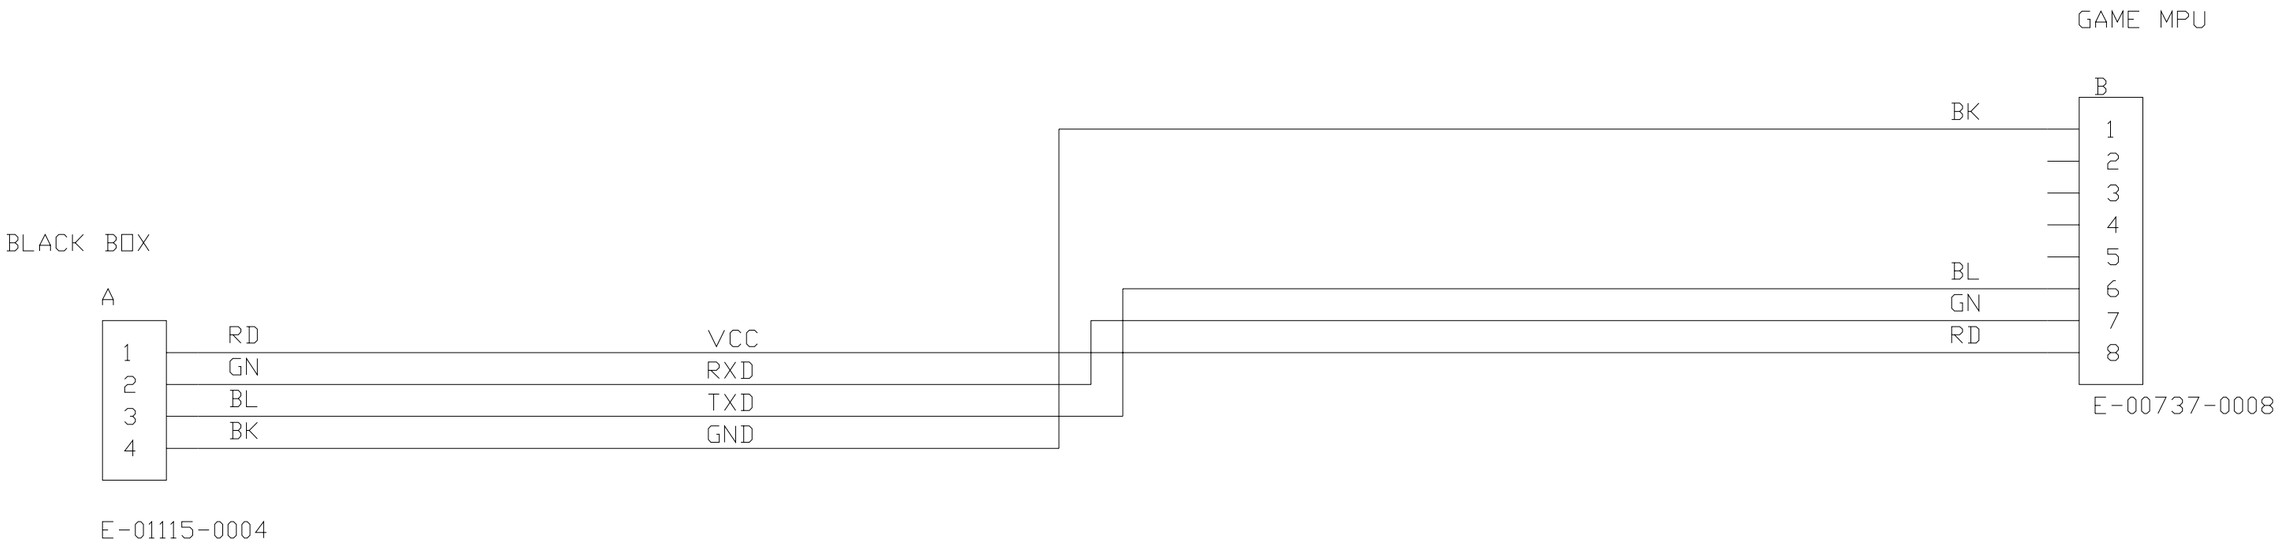

©2003 BALLY GAMING AND SYSTEMS

Player Panel

|| Deck Button CBL-30473-0001 ☑Slant

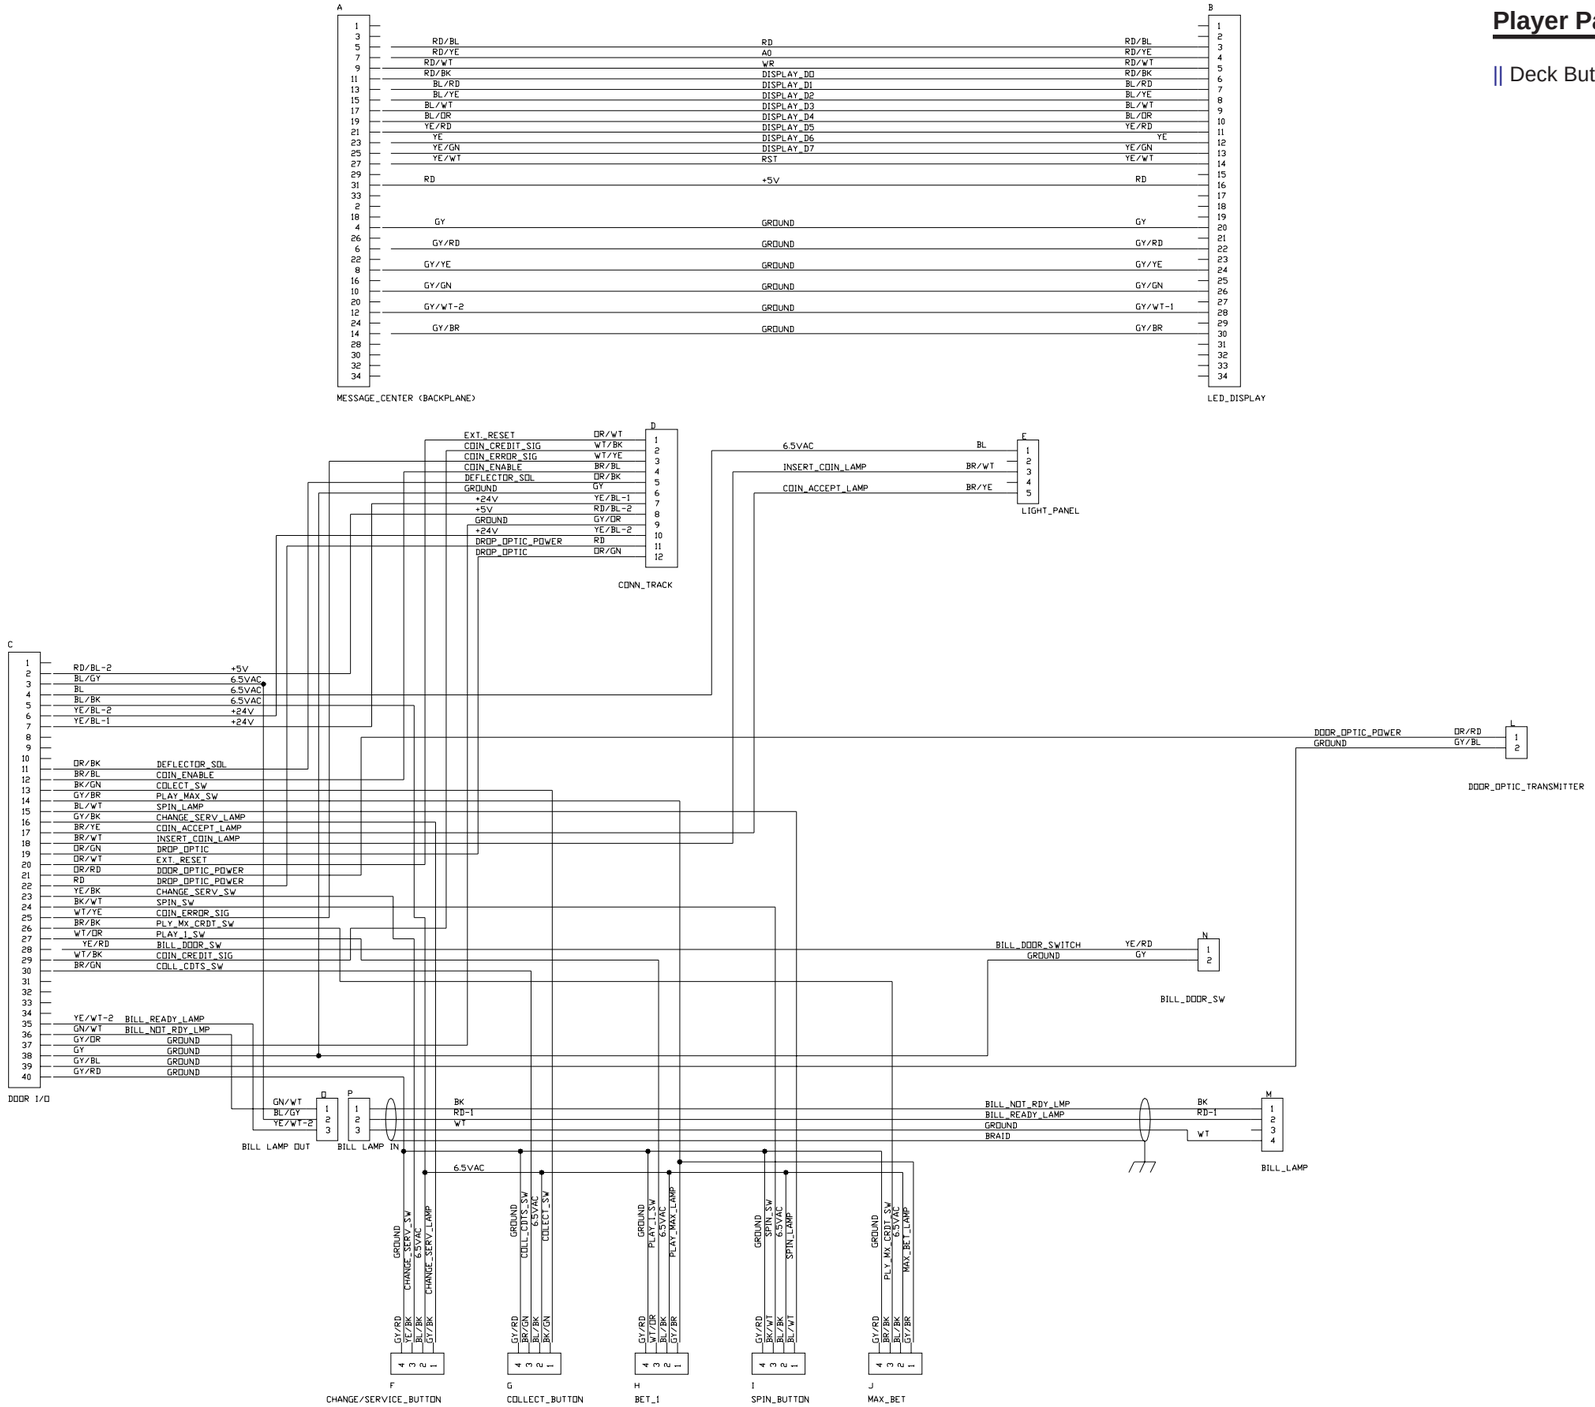

©2003 BALLY GAMING AND SYSTEMS

Player Panel

|| 7-Button Deck (United Kingdom)

CBL-30681-0001 ☑Upright

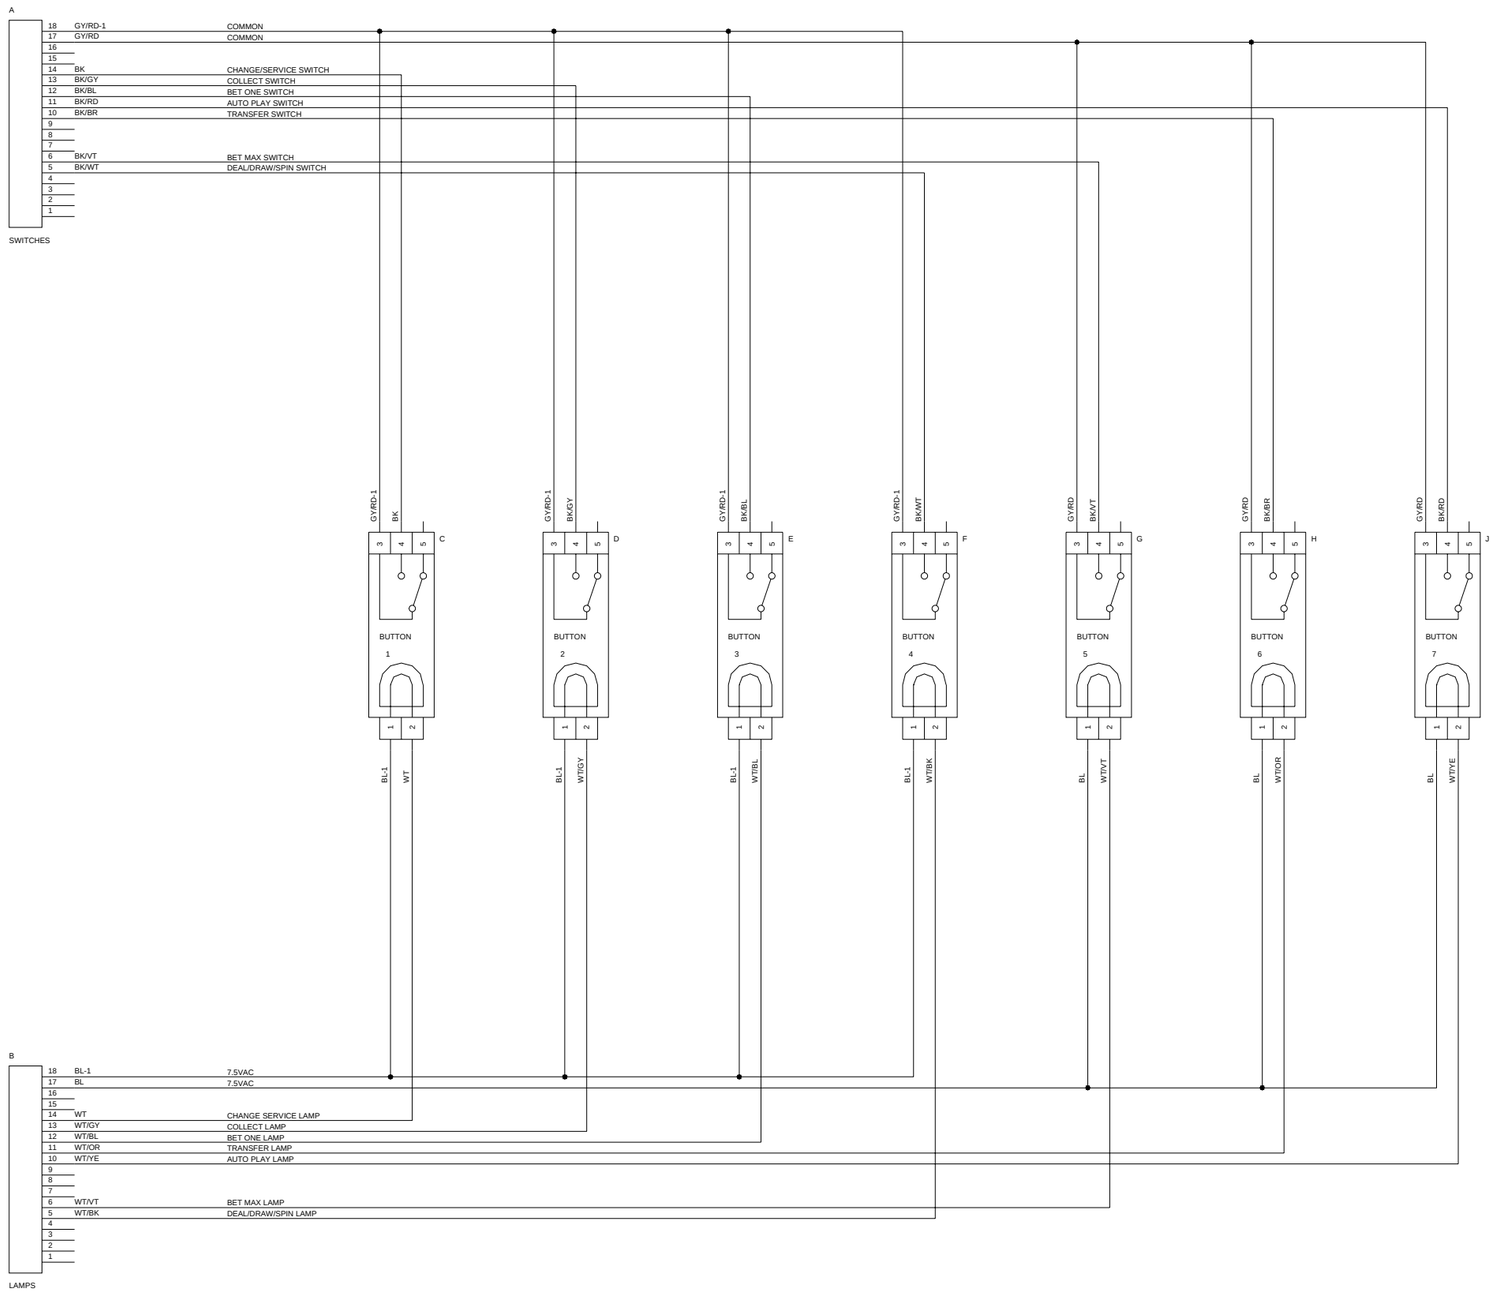

©2003 BALLY GAMING AND SYSTEMS

Power Distribution Unit

| PDU, CE97, Fused CBL-30469-0001
☑Upright ☑Slant

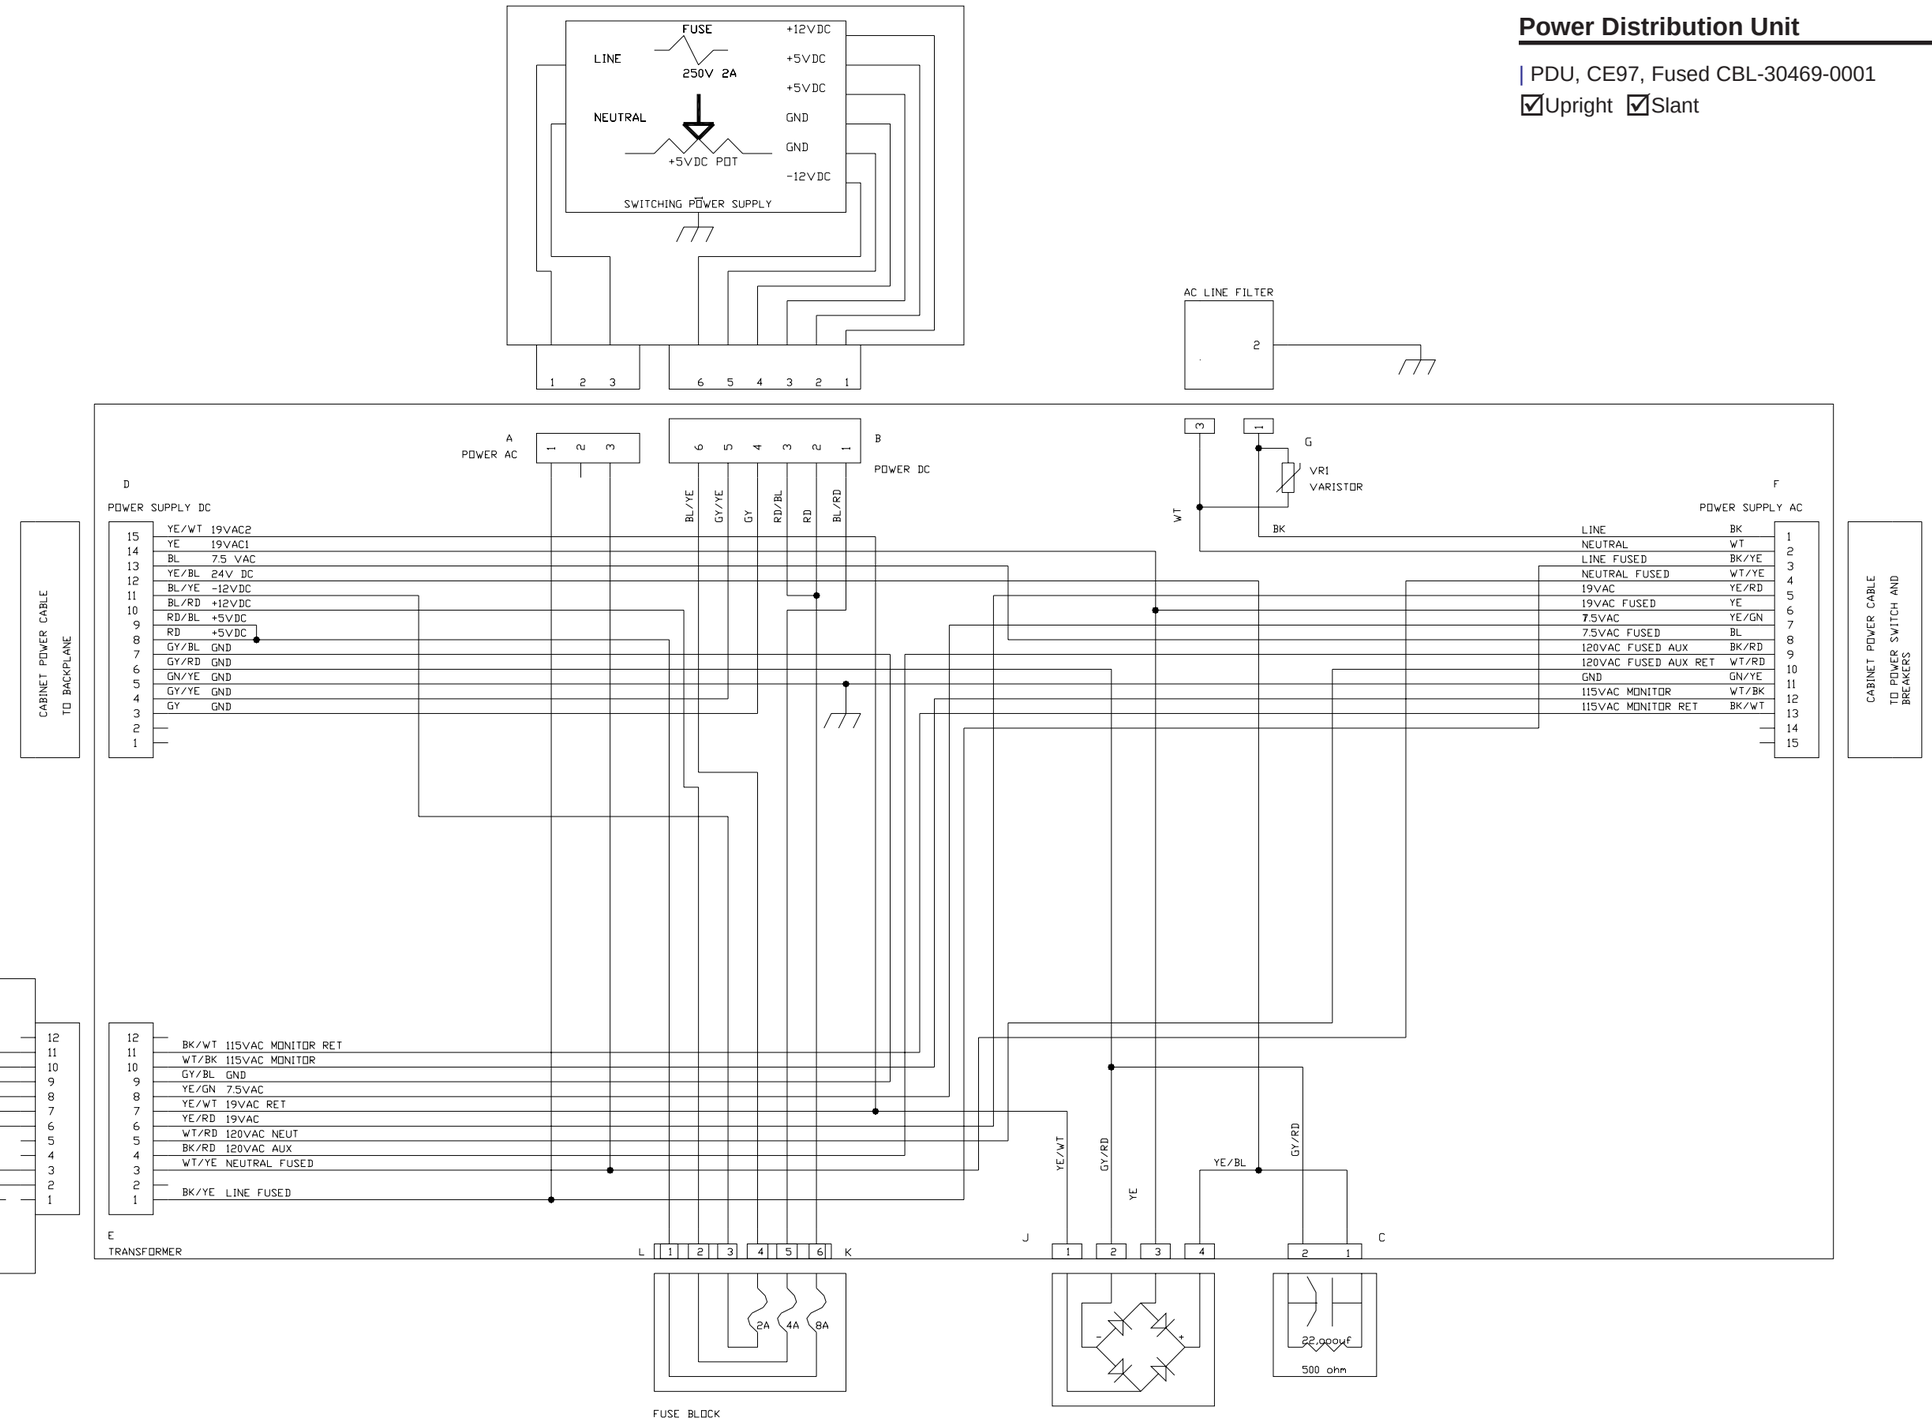

©2003 BALLY GAMING AND SYSTEMS

Power Distribution Unit

Power Supply, CE97 CBL-30180-0001

☑Upright ☑Slant

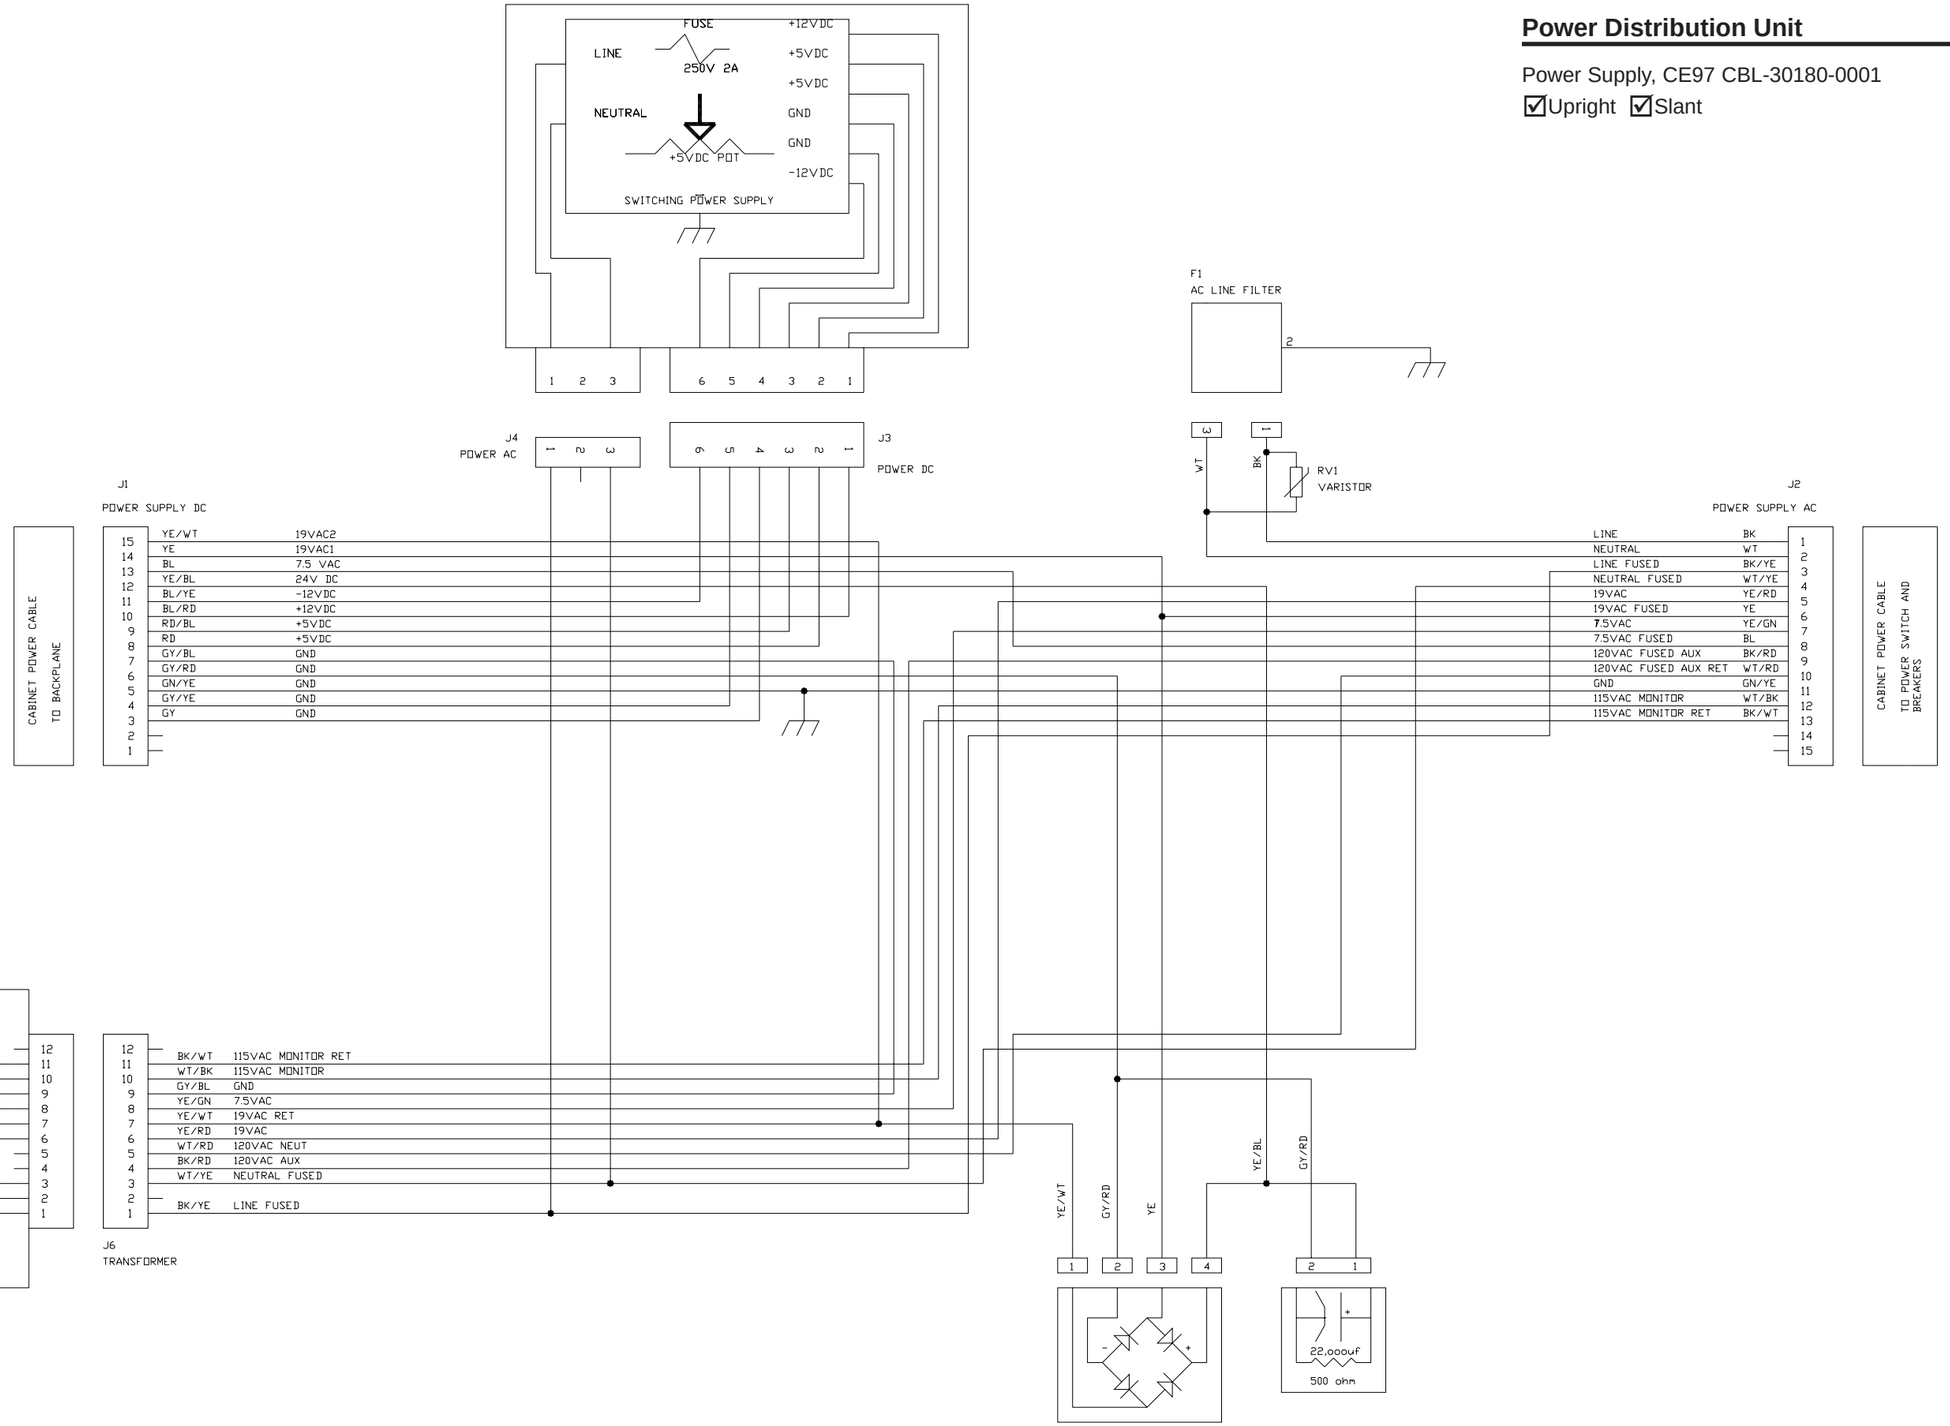

©2003 BALLY GAMING AND SYSTEMS

| - Revised, || - New

ProSlot® 6000

WIRE RUNNING LIST

SEQ.	COLOR	FROM	TO	LENGTH	AWG	WRAP
1	YE/BL	A-8	C-1	16.00"	18	
2	GY/RD	A-7	C-2	16.00"	18	
3	BK	A-5	B-5	16.00"	22	
4	RD	A-2	B-2	16.00"	22	
5	WT	A-4	B-3	16.00"	22	

MATERIALS LIST

REF.	PART NUMBER	DESCRIPTION	QTY.
1	E-00778-0212	CONN, RECEPTACLE, MINI-FIT, JR., 12 CIR, D/R	1
2	E-00778-0100	TERMINAL, SOCKET, MINI-FIT, 18-24 AWG.	5
3	E-01011-0110	CONN, DUAL ROW, 10 PIN	1
4	E-00671-0003	TERMINAL, MOD IV, STANDARD PRESSURE	3
5	E-00808-0002	CONN, HOUSING PLUG, 2 CIRCUIT	1
6	E-00807-0006	CONTACT, AMP PIN, 24-18 AWG.	2
7	E-00647-0020	MARKER TIE	1
8	E-00647-0004	CABLE TIE, 3/32" X 3 7/8"	-







A PRINTER

1	
2	RD
3	
4	WT
5	BK
6	
7	GY/RD
8	YE/BL
9	
10	
11	
12	

1		6	
2	RD	7	
3	WT	8	
4		9	
5	BK	10	

WIRE INSERTION VIEW



C
PRINTER POWER INTERCONNECT

1	YE/BL
2	GY/RD

CABLE, SEIKO PRINTER S6000

CBL-20302-0001

©2003 BALLY GAMING AND SYSTEMS

||| Seiko Printer CBL-20398-0001 ☑S6E

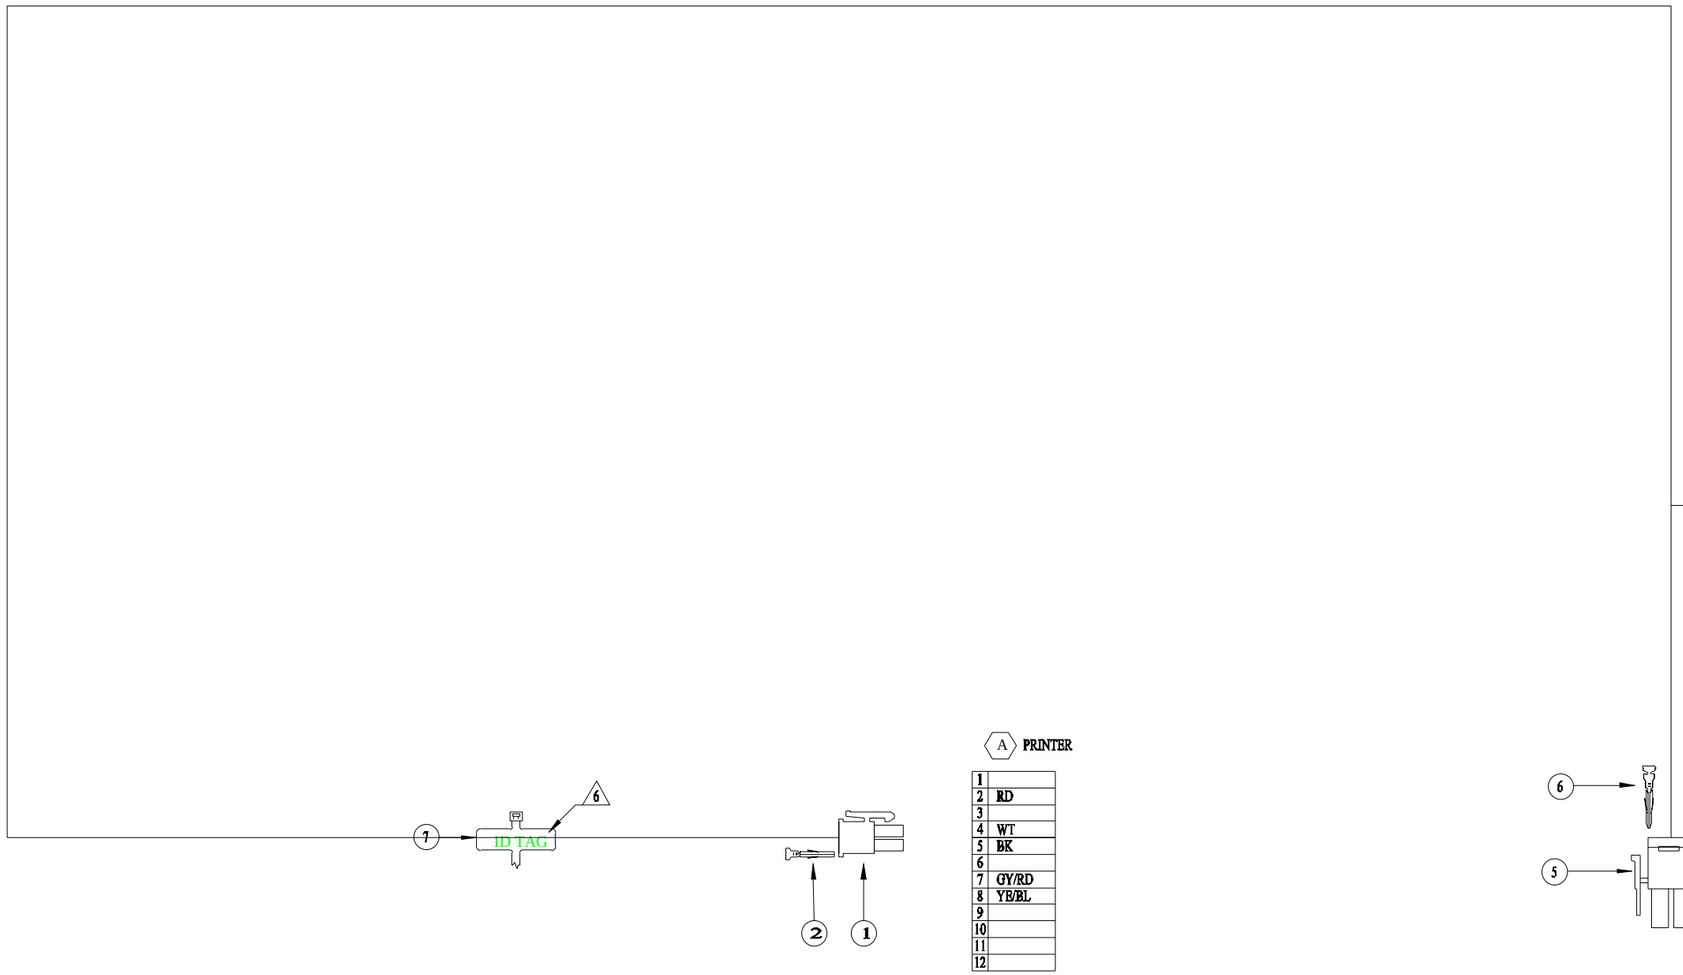

1	
2	RD
3	
4	WT
5	BK
6	
7	GY/RD
8	YE/BL
9	
10	
11	
12	

1		6	
2	RD	7	
3	WT	8	
4		9	
5	BK	10	

WIRE INSERTION VIEW

1	YE/BL
2	GY/RD

WIRE RUNNING LIST

SEQ.	COLOR	FROM	TO	LENGTH	AWG	WRAP
1	YE/BL	A-8	C-1	55.00"	18	
2	GY/RD	A-7	C-2	55.00"	18	
3	BK	A-5	B-5	55.00"	22	
4	RD	A-2	B-2	55.00"	22	
5	WT	A-4	B-3	55.00"	22	

MATERIALS LIST

REF.	PART NUMBER	DESCRIPTION	QTY.
1	E-00778-0212	CONN, RECEPTACLE, MINI-FIT, JR., 12 CIR, D/R	1
2	E-00778-0100	TERMINAL, SOCKET, MINI-FIT, 18-24 AWG.	5
3	E-01011-0110	CONN, DUAL ROW, 10 PIN	1
4	E-00671-0003	TERMINAL, MOD IV, STANDARD PRESSURE	3
5	E-00808-0002	CONN, HOUSING PLUG, 2 CIRCUIT	1
6	E-00807-0006	CONTACT, AMP PIN, 24-18 AWG.	2
7	E-00647-0020	MARKER TIE	1
8	E-00647-0004	CABLE TIE, 3/32" X 3 7/8"	-

CABLE, SEIKO PRINTER
S6E SLANT

CBL-20398-0001

©2003 BALLY GAMING AND SYSTEMS

Reel Mechanism

|| 3-Reel CBL-30201-0001 ☑Upright

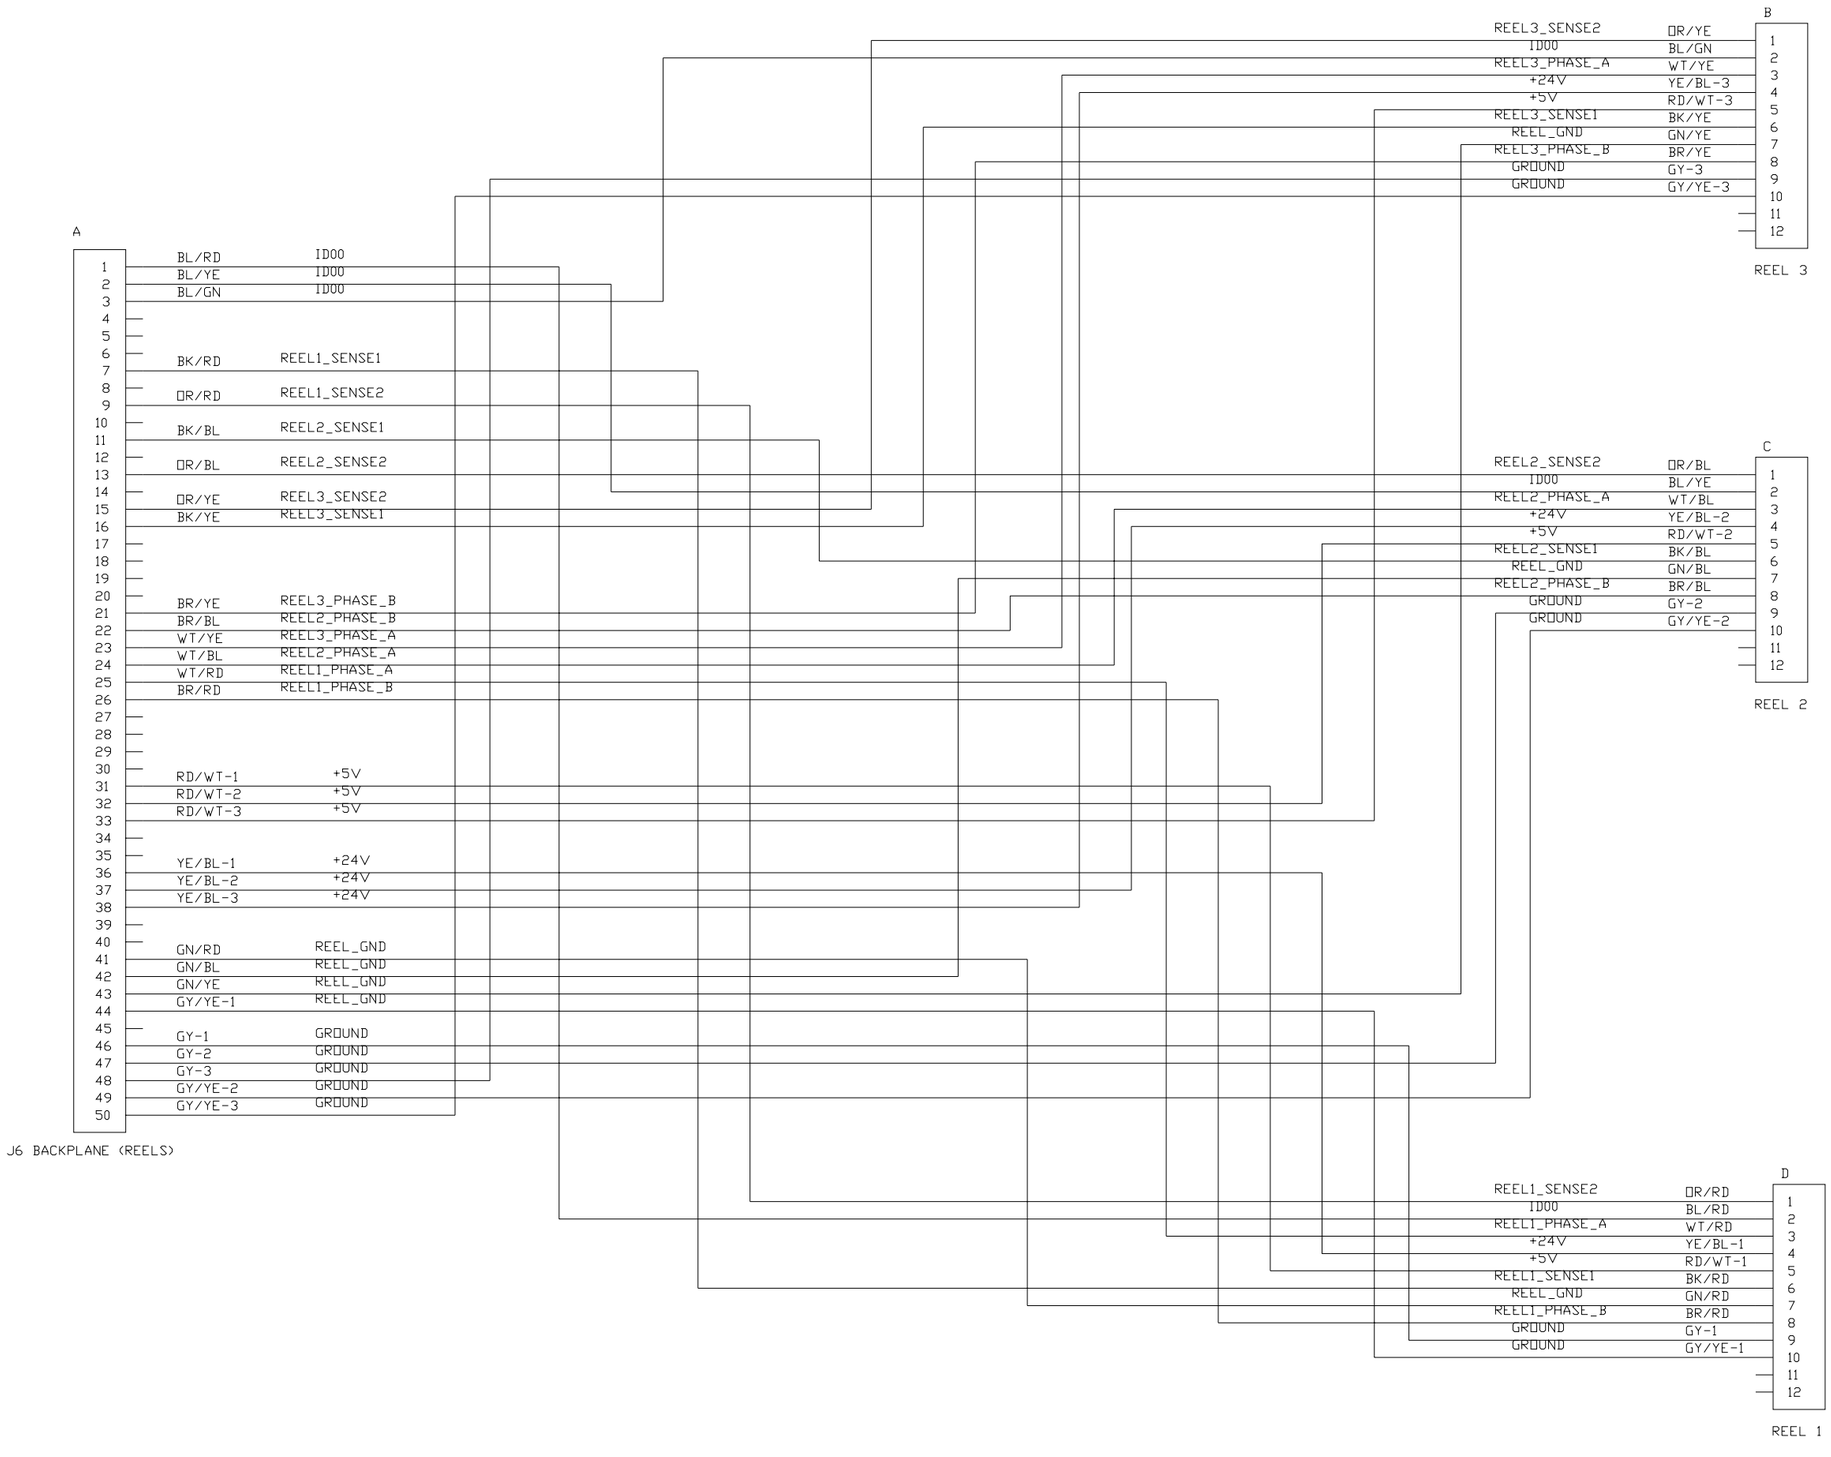

©2003 BALLY GAMING AND SYSTEMS

Reel Mechanism

|| 3-Reel CBL-30253-0001 ☑Slant

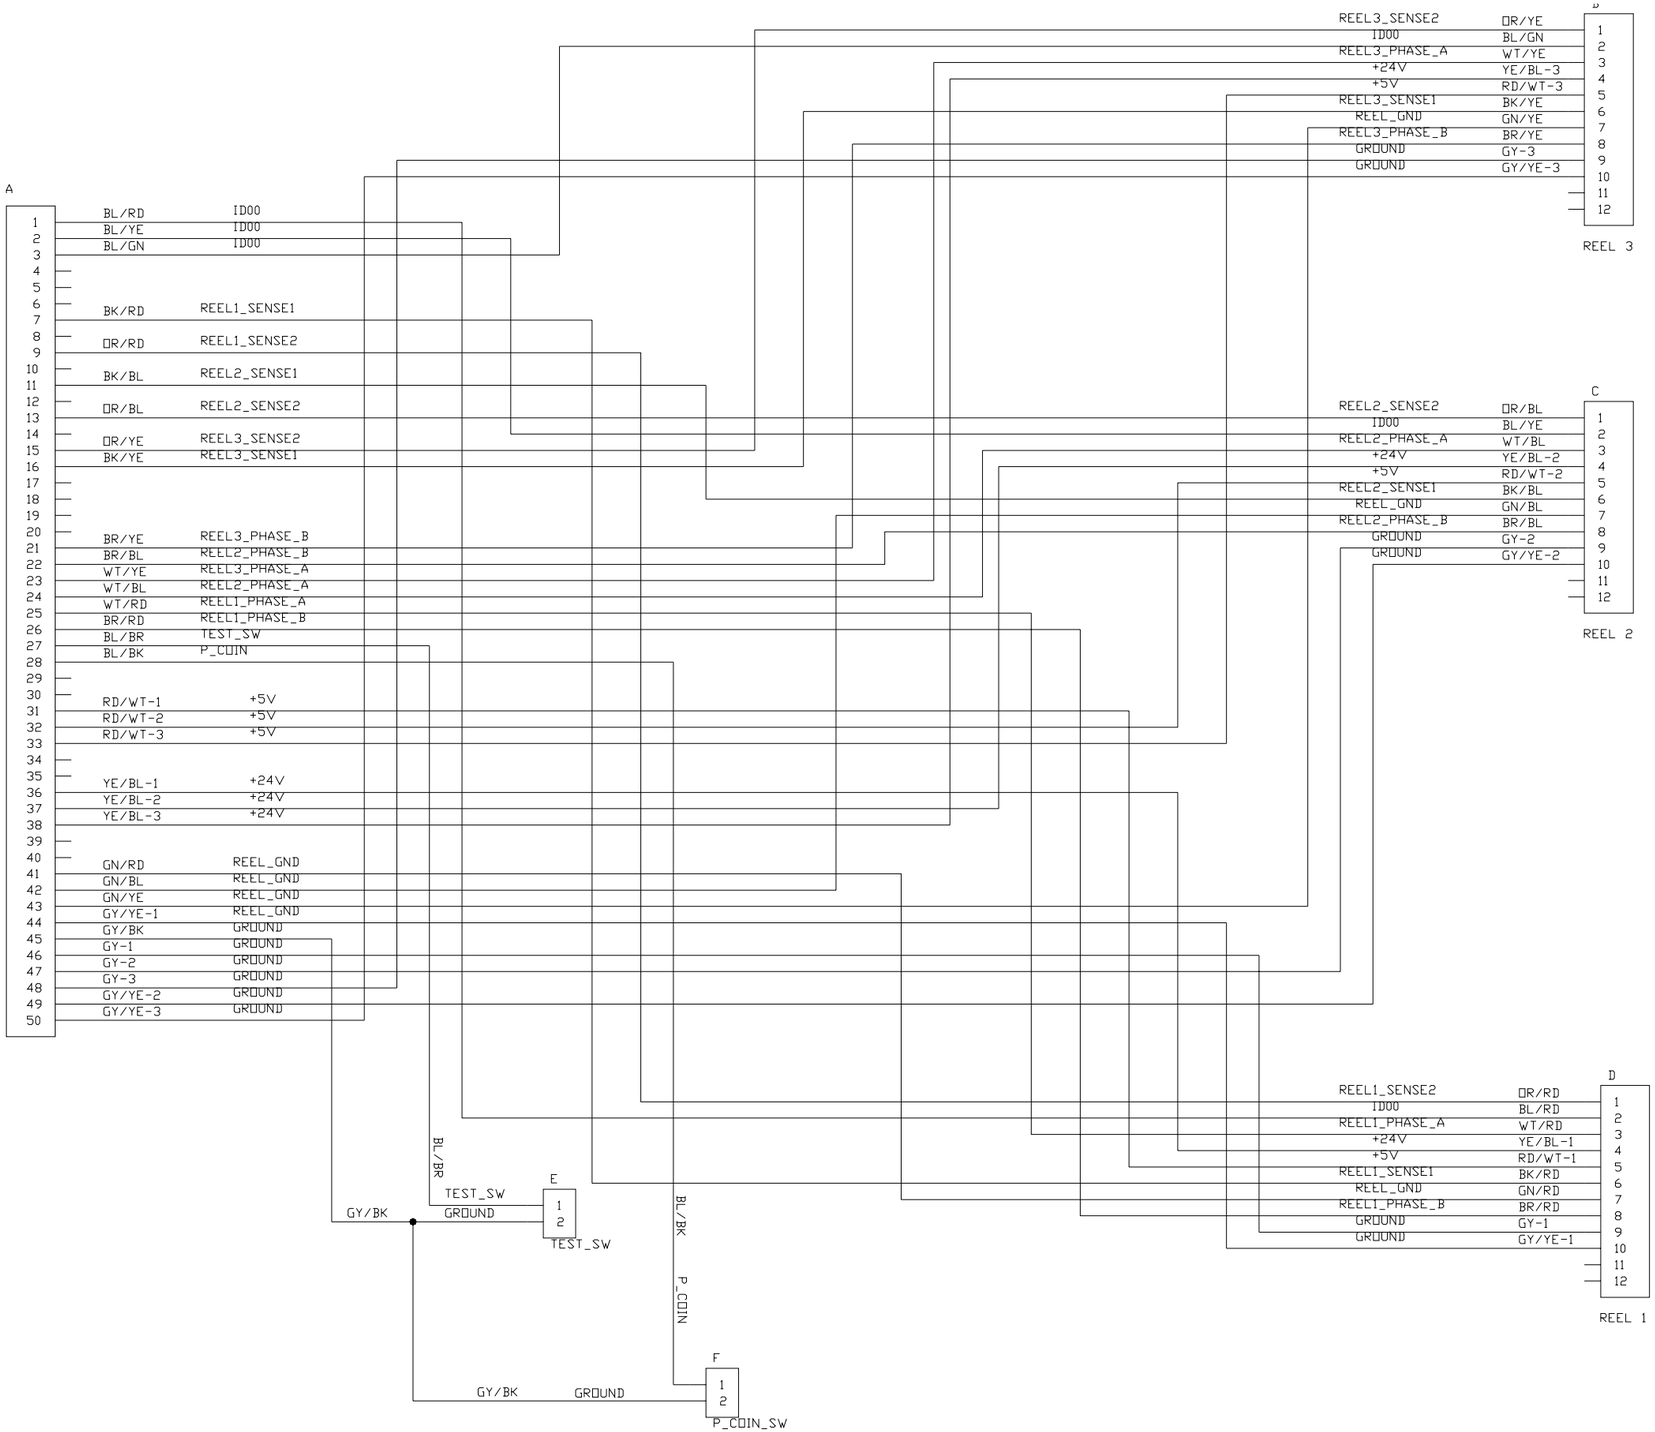

Reel Mechanism

|| 4-Reel CBL-30202-0001 ☑Upright

DOUBLE CRIMP LOGIC GROUND, PIN 10

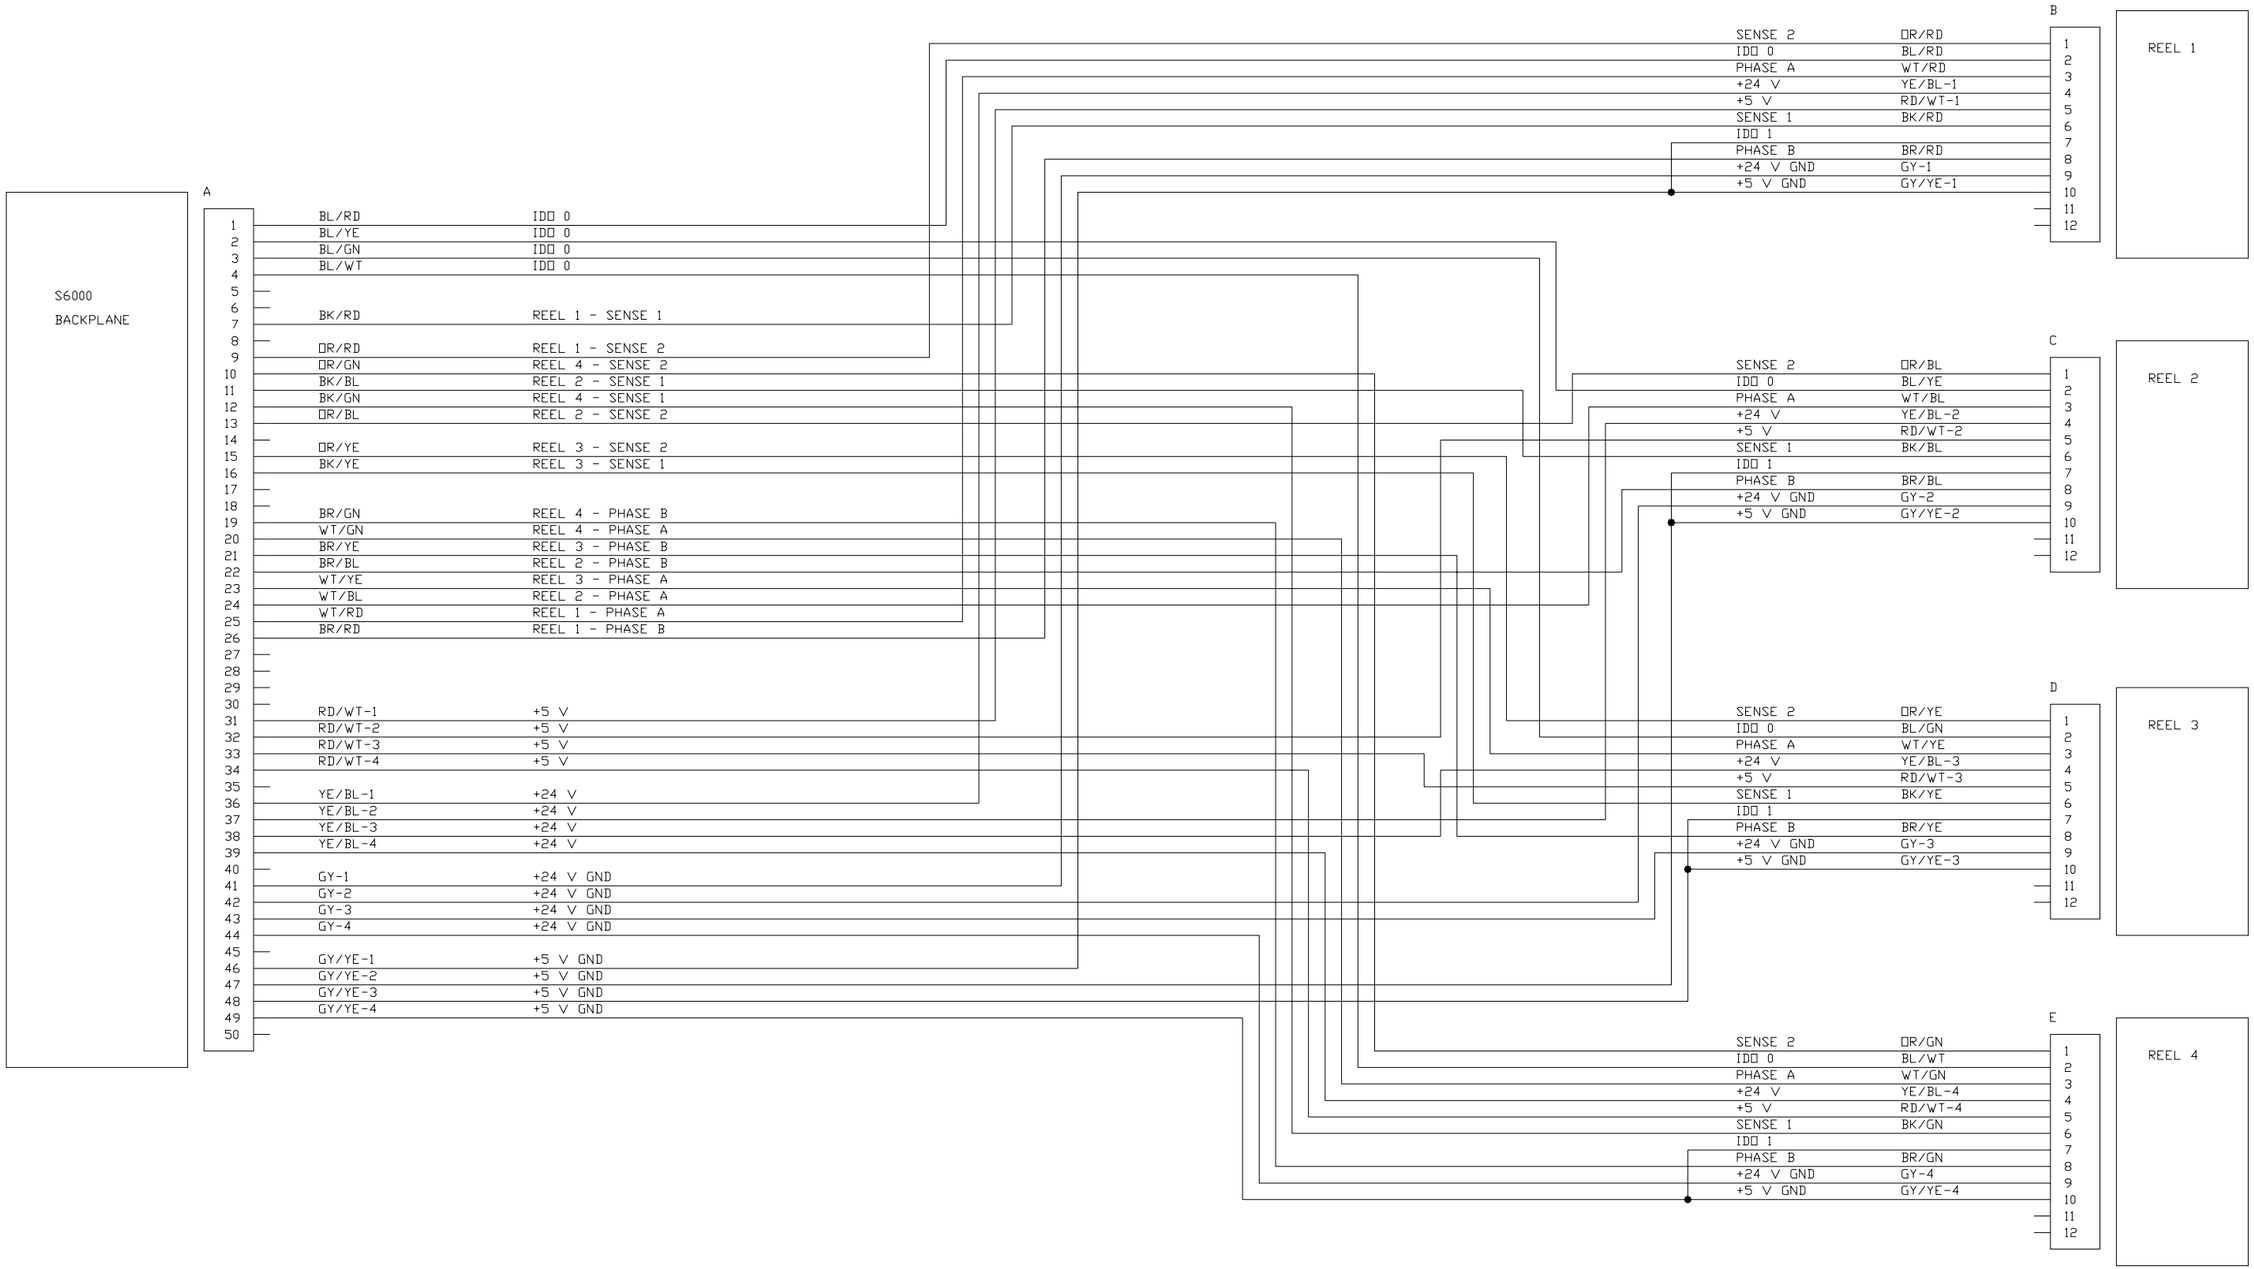

| - Revised, || - New

©2003 BALLY GAMING AND SYSTEMS

Sound Board

Deluxe Pro Sound 2 CBL-30531-0001

☑Upright / ☑Slant

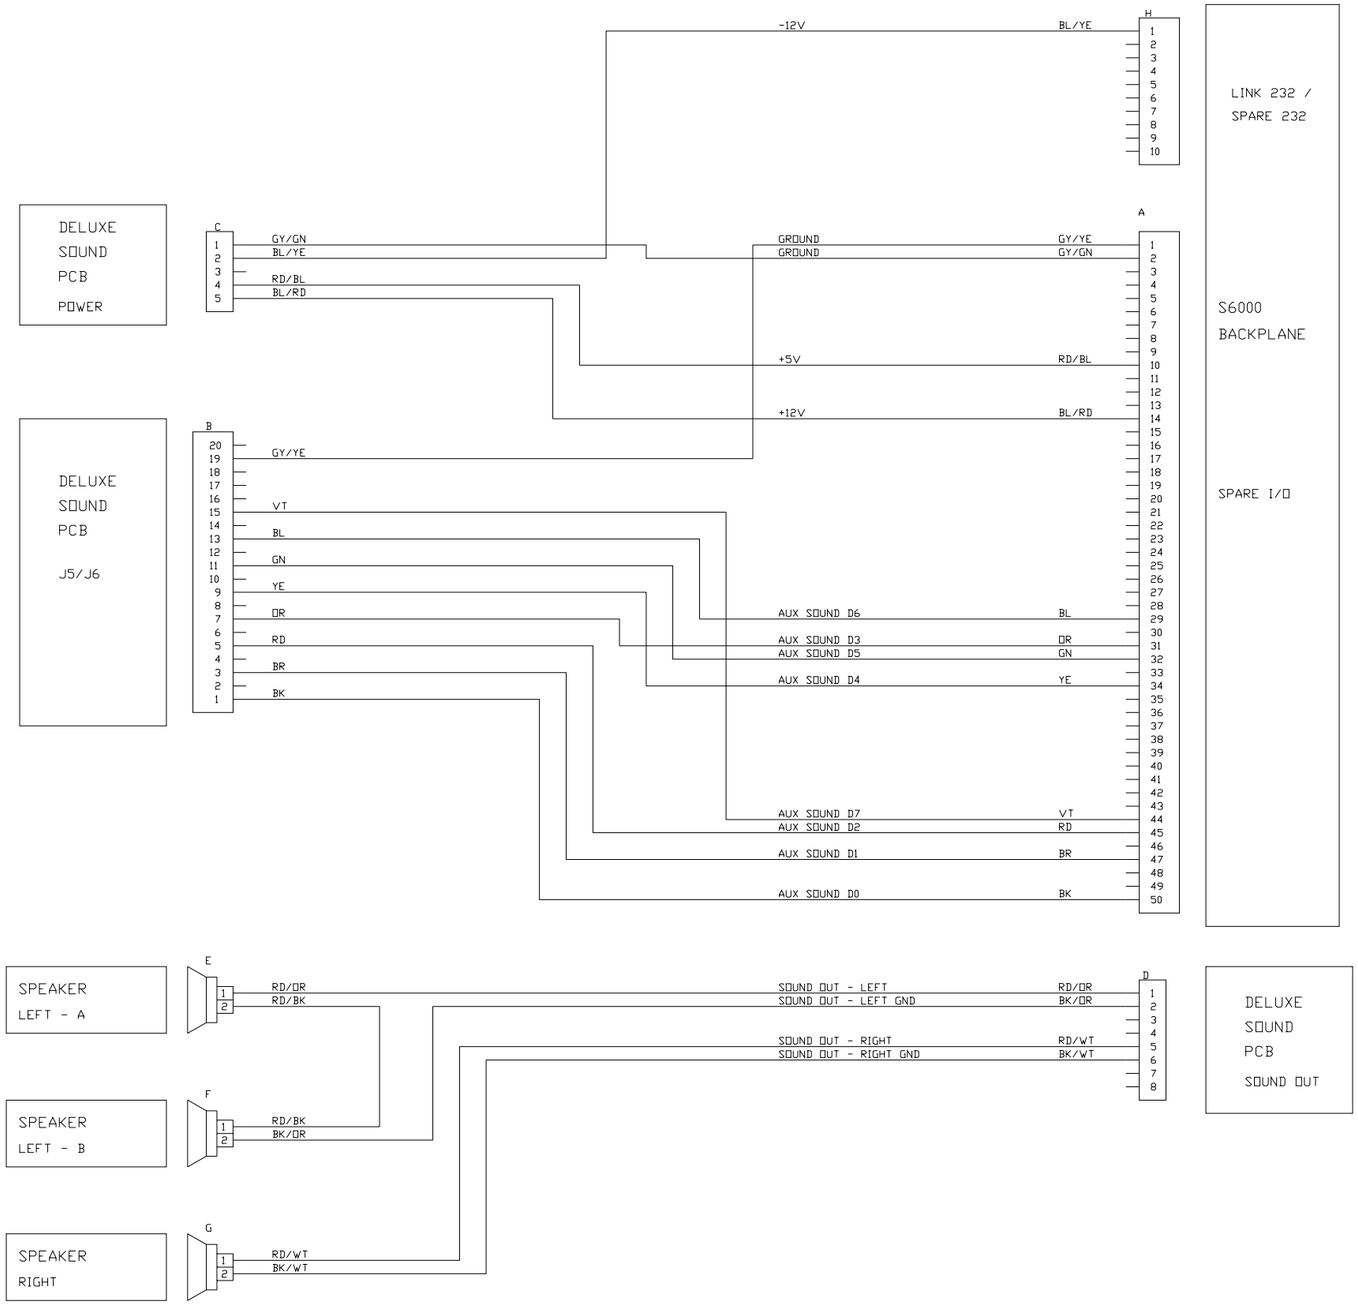

Sound Board

|| Sound Board, Feature, Round CBL-30375-0001
☑Slant

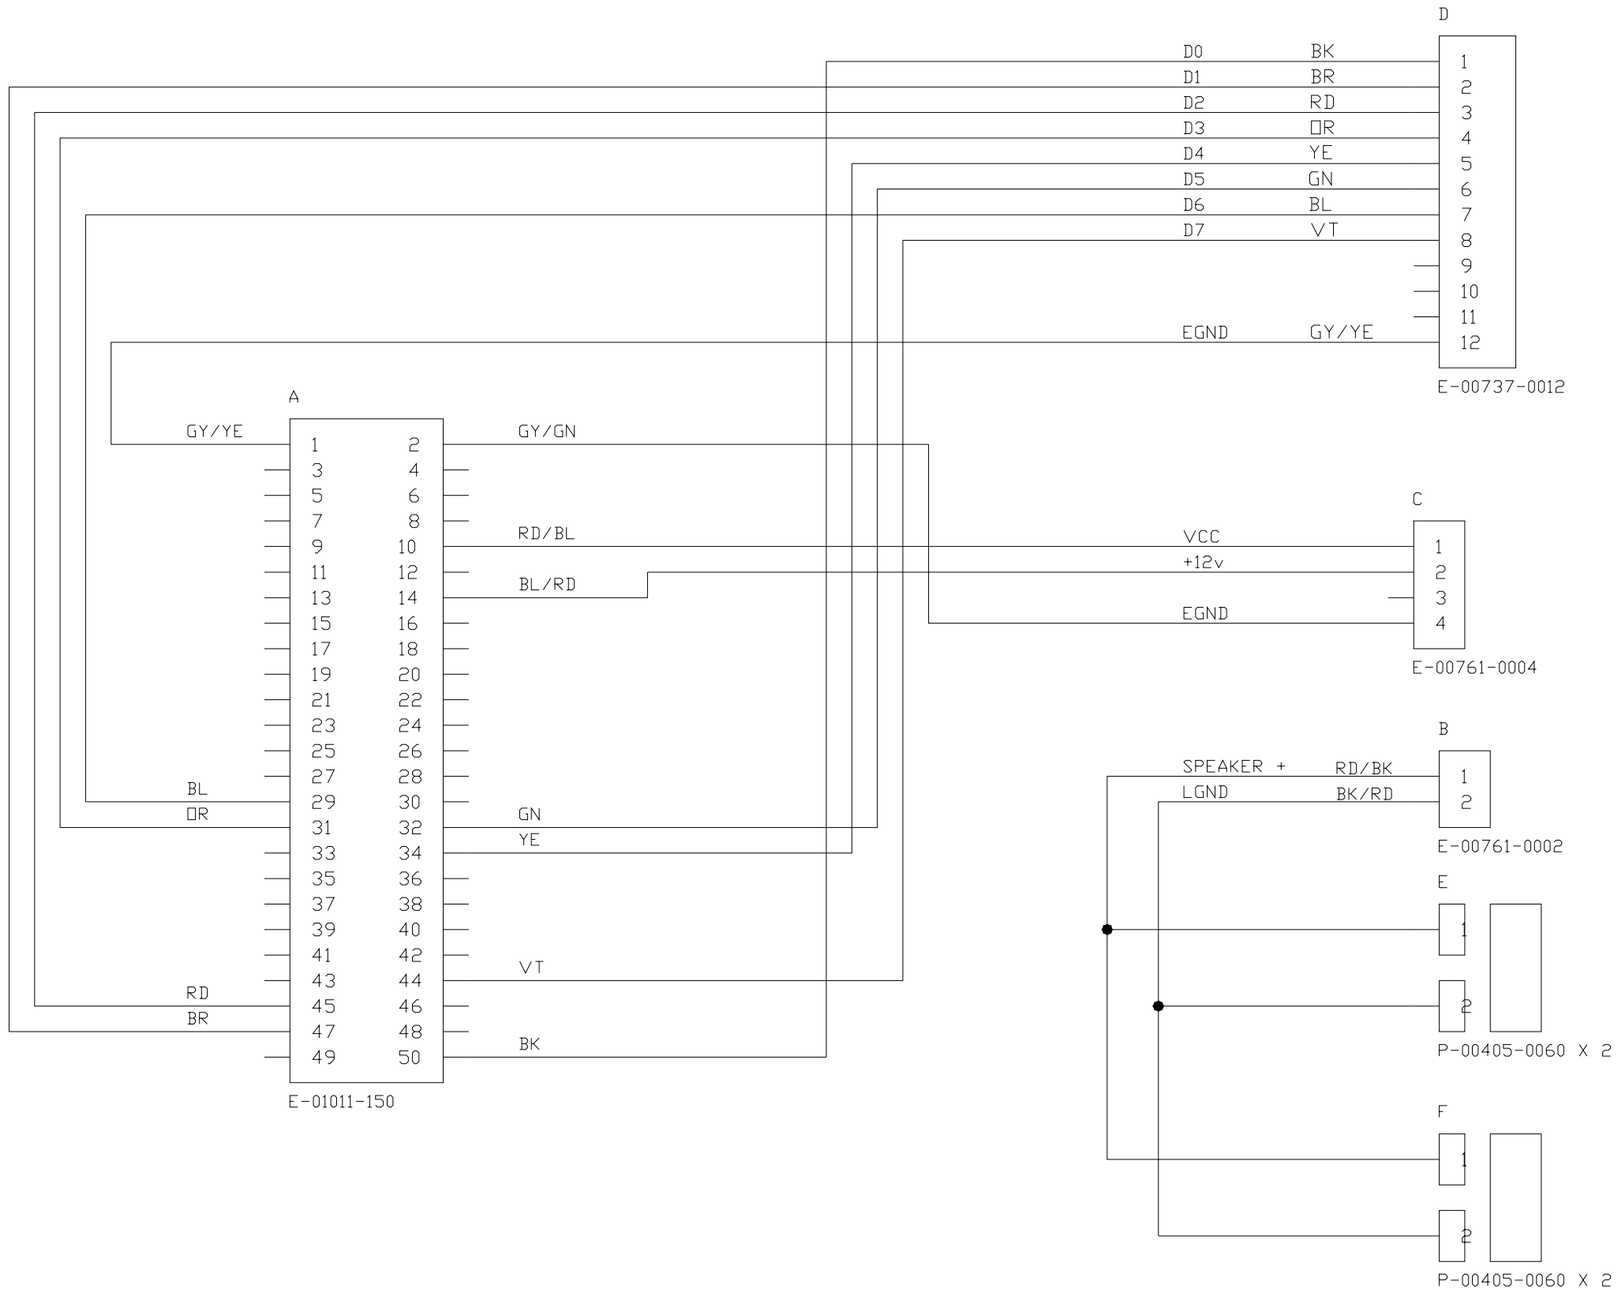

©2003 BALLY GAMING AND SYSTEMS

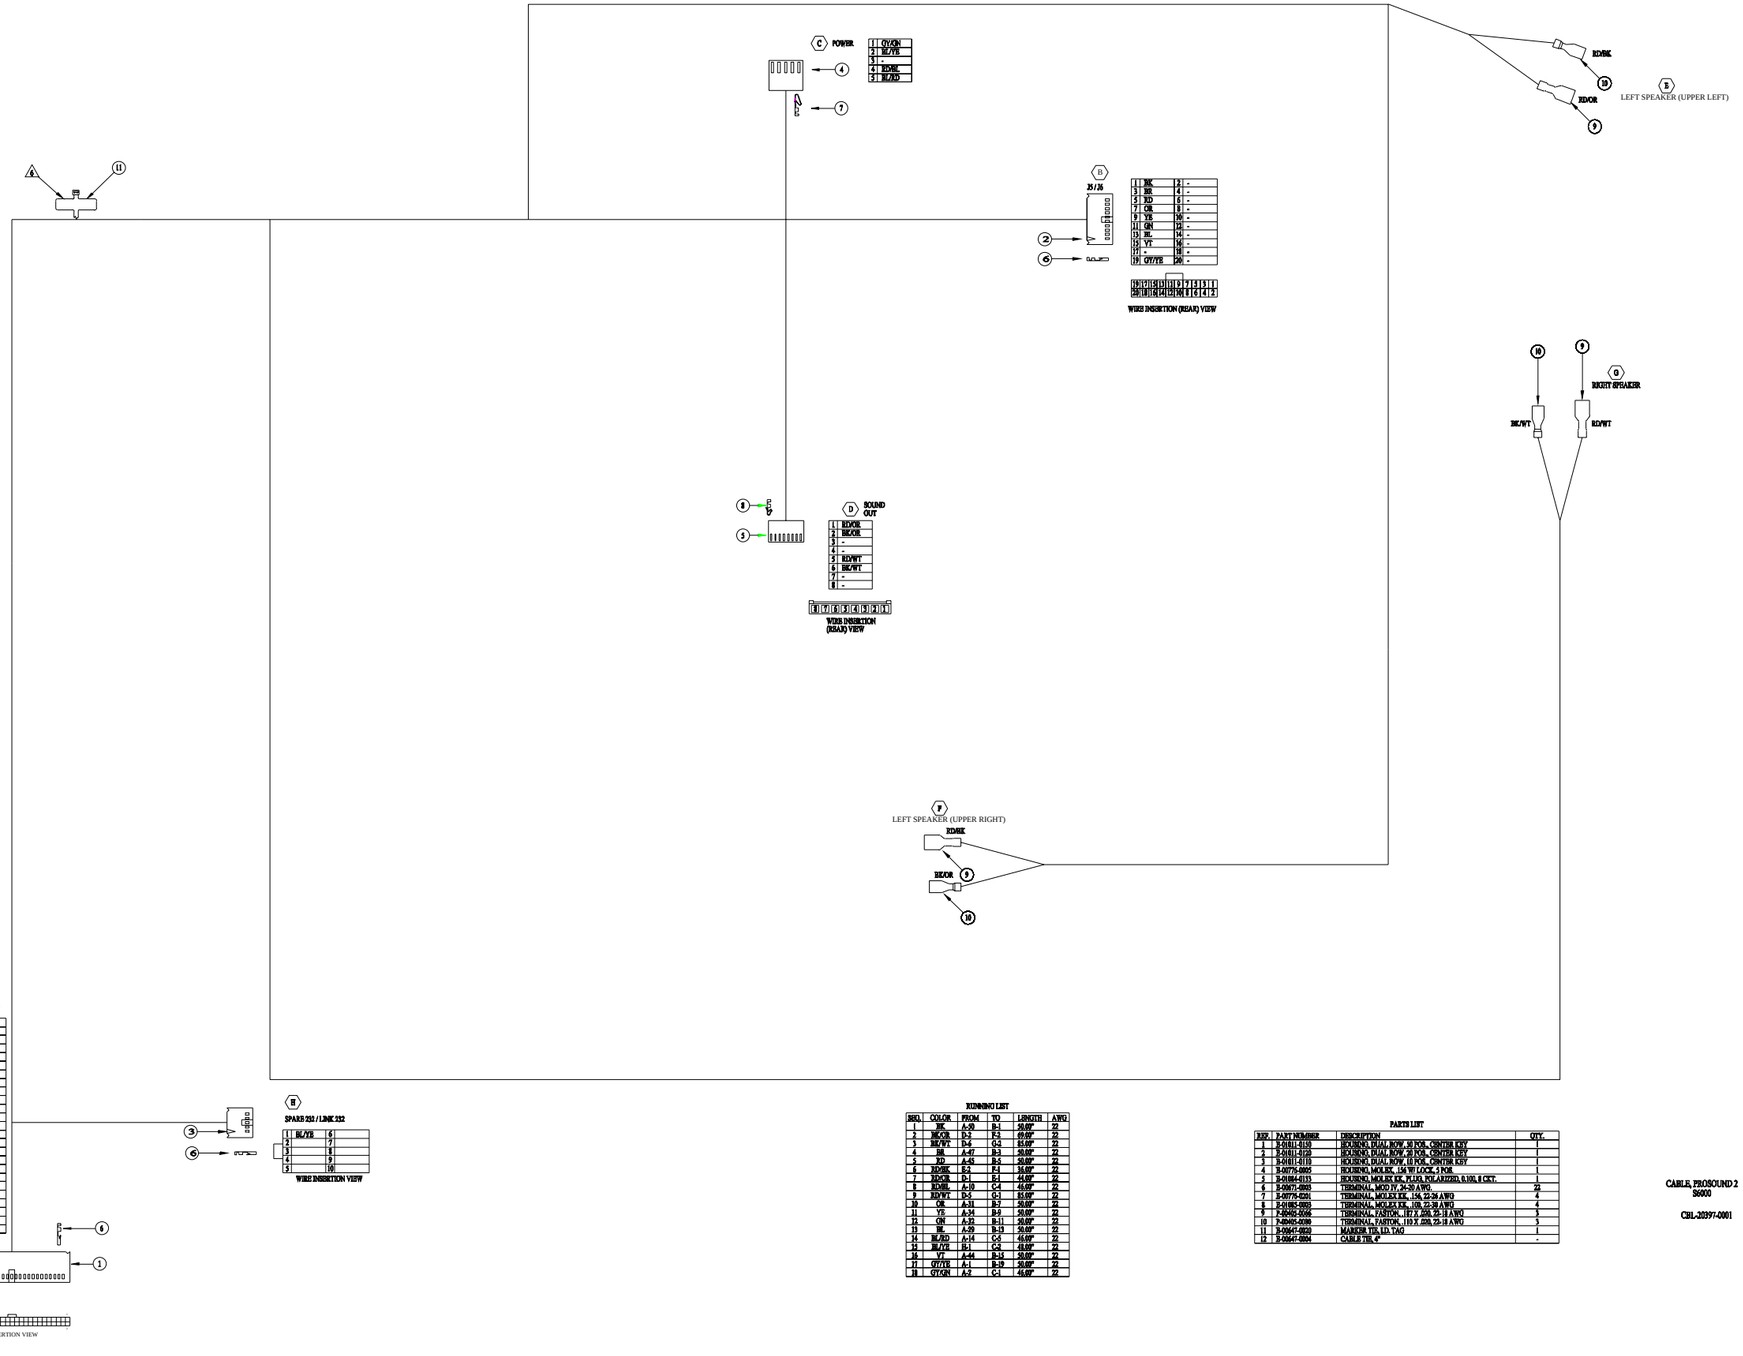

WIRING LIST

REF.	COLOR	FROM	TO	LENGTH	AWG
1	BK	A-20	B-1	50.00"	22
2	BK/OR	B-2	F-2	69.00"	22
3	BK/WT	D-6	G-2	85.00"	22
4	BR	A-47	B-3	50.00"	22
5	RD	A-45	B-5	50.00"	22
6	RD/BK	B-2	F-1	56.00"	22
7	RD/OR	D-1	F-3	44.00"	22
8	RD/BL	A-10	C-4	46.00"	22
9	RD/WT	D-5	G-1	85.00"	22
10	OR	A-31	B-7	50.00"	22
11	YE	A-34	B-9	50.00"	22
12	GN	A-32	B-11	50.00"	22
13	BL	A-29	B-13	50.00"	22
14	BL/RD	A-14	C-5	46.00"	22
15	BL/YE	B-1	C-3	48.00"	22
16	VI	A-44	B-15	50.00"	22
17	GY/YE	A-1	B-19	50.00"	22
18	GY/GN	A-2	C-1	46.00"	22

PARTS LIST

REF.	PART NUMBER	DESCRIPTION	QTY.
1	5-20811-0130	HOUSING, DUAL ROW, 30 POS. CENTER KEY	1
2	5-20811-0120	HOUSING, DUAL ROW, 20 POS. CENTER KEY	1
3	5-20811-0110	HOUSING, DUAL ROW, 10 POS. CENTER KEY	1
4	5-09775-0005	HOUSING, MOLEX, .156 WI LOCK, 5 POS.	1
5	5-09-1004-0131	HOUSING, MOLEX EX, PLUG, POLARIZED, 0.100, 8 CKT.	1
6	5-09071-0003	TERMINAL, MOD IV, 24-20 AWG	22
7	5-09775-0201	TERMINAL, MOLEX EX, .156, 22-26 AWG	4
8	5-09-1002-0005	TERMINAL, MOLEX EX, .100, 22-30 AWG	4
9	5-09-0002-0006	TERMINAL, FASTON, .187 X .020, 22-18 AWG	5
10	5-09-0002-0030	TERMINAL, FASTON, .110 X .020, 22-18 AWG	5
11	5-09647-0020	MARKER TIE, I.D. TAG	1
12	5-09647-0004	CABLE TIE, 4"	-

CABLE, PROSOUND 2
S6000

CBL-20397-0001

©2003 BALLY GAMING AND SYSTEMS

|| Door Button CBL-30470-0001 ☑Upright

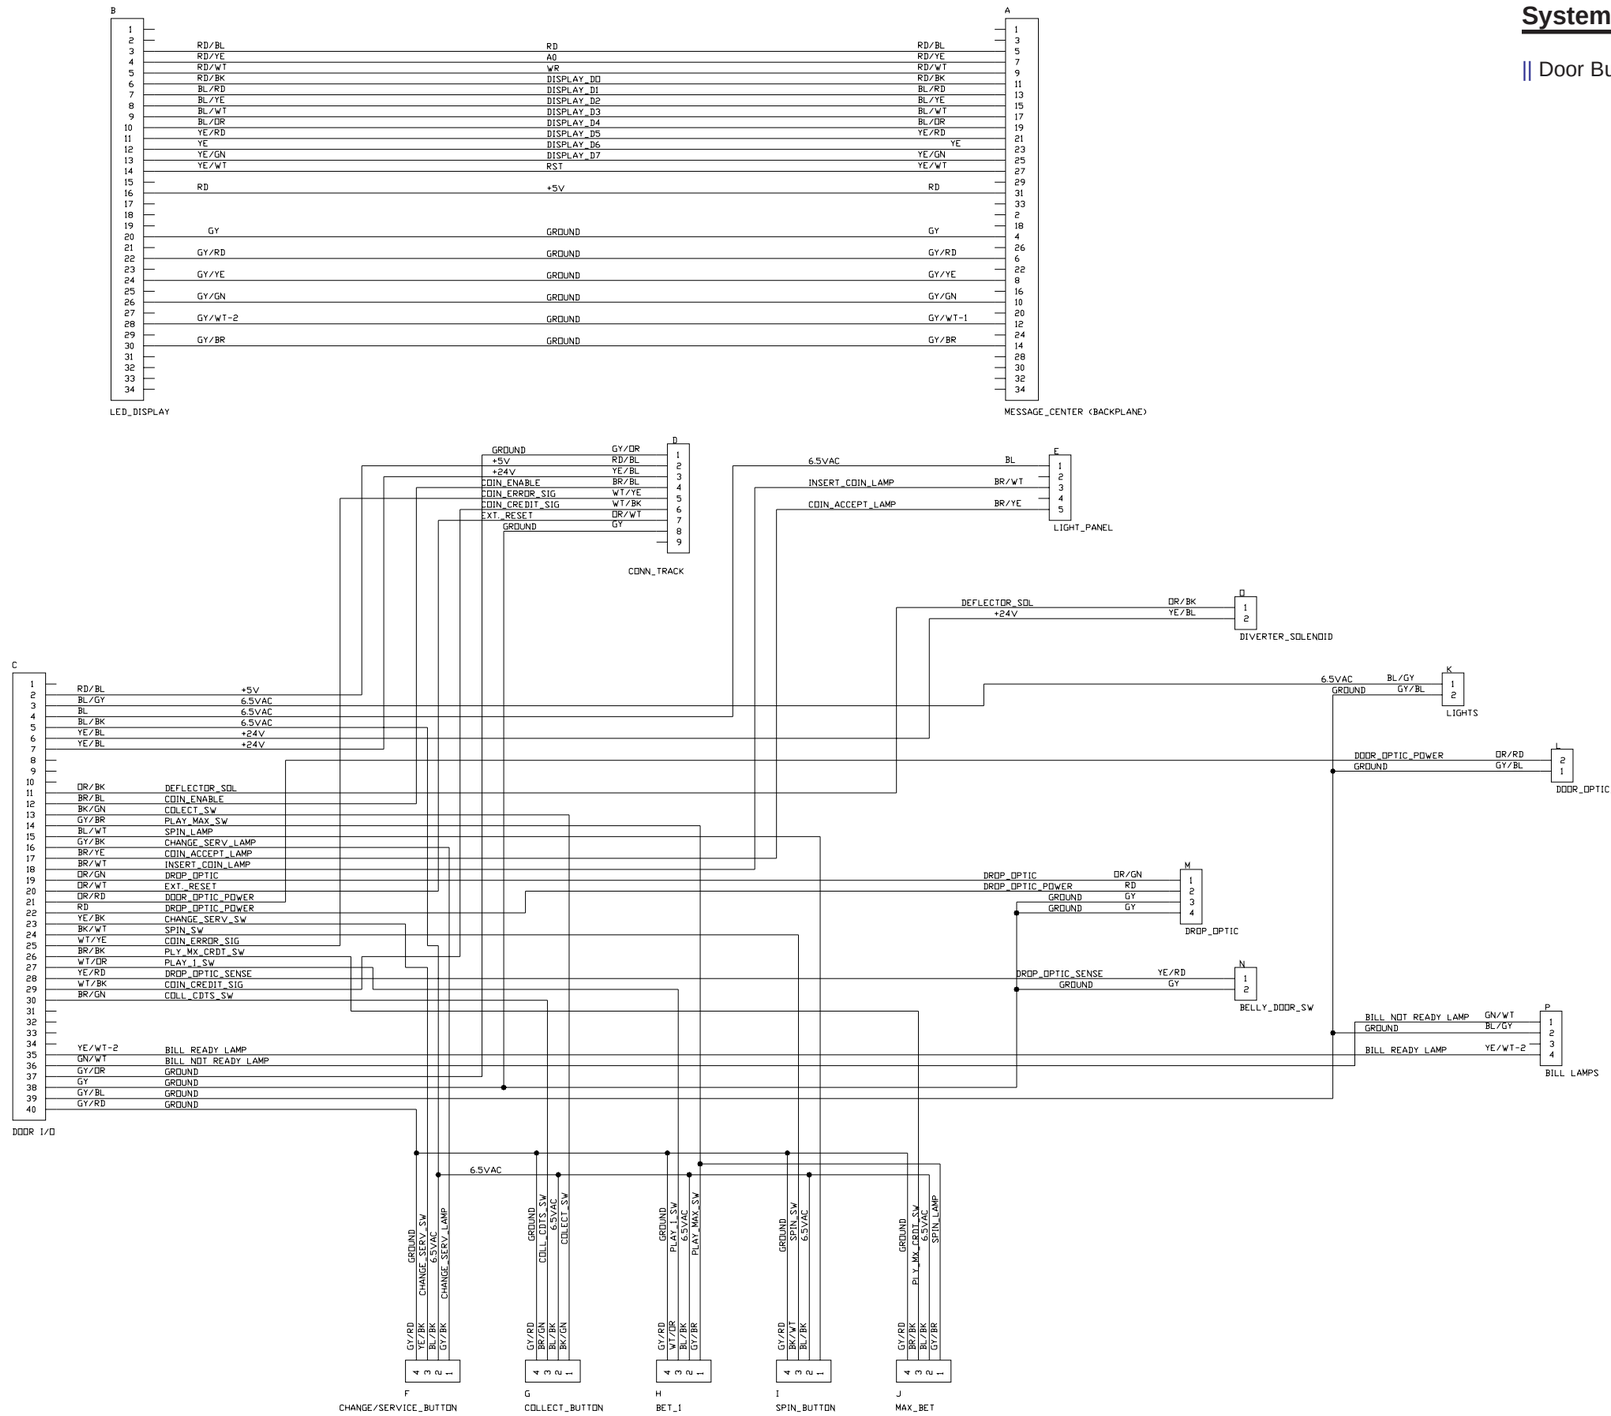

©2003 BALLY GAMING AND SYSTEMS

|| UIB Communication CBL-30267-0001

☑Upright

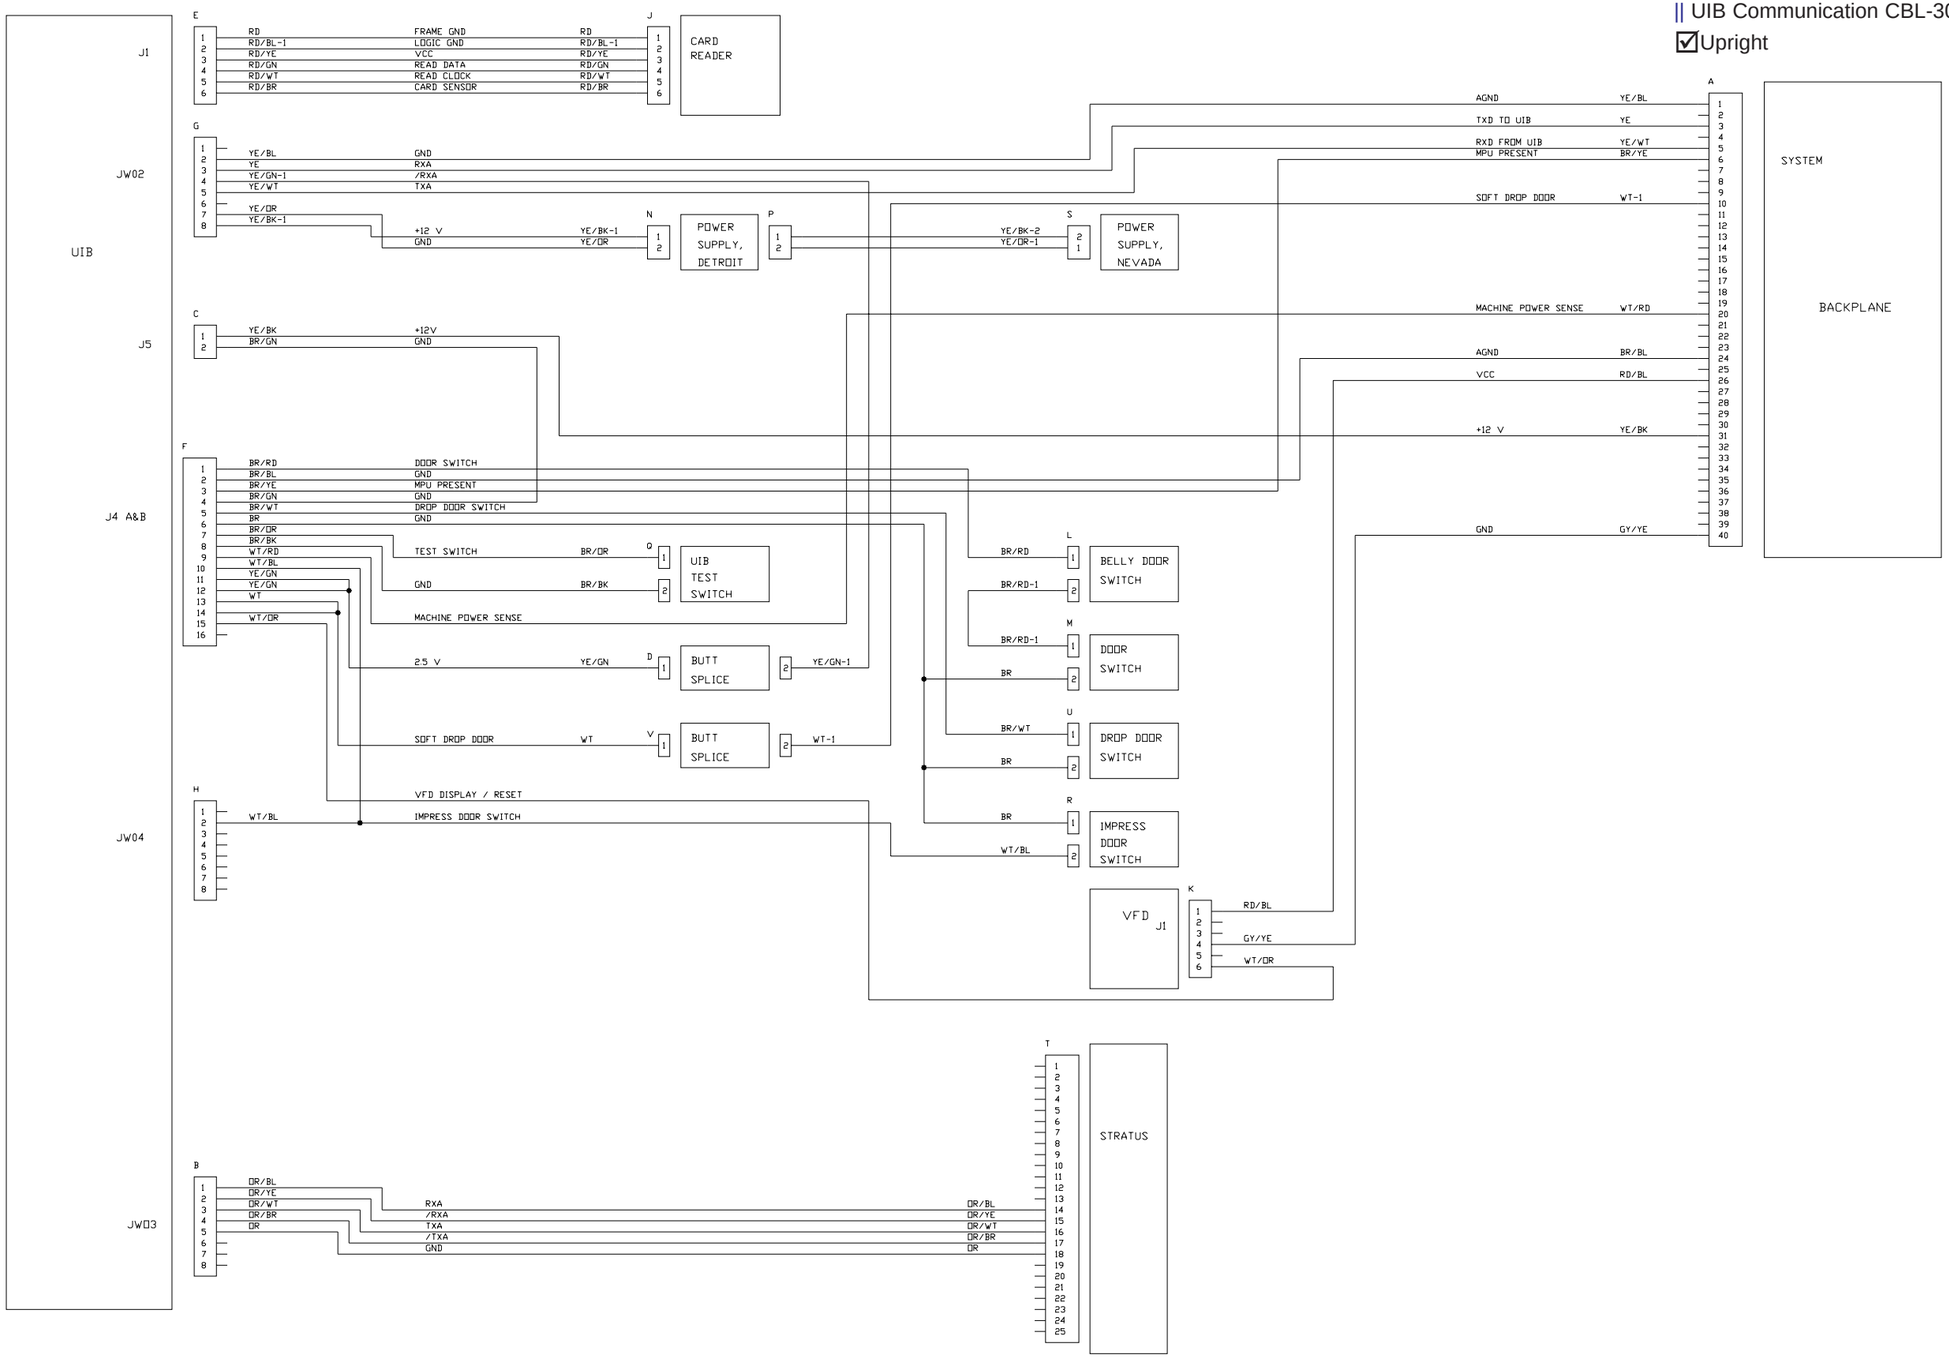

©2003 BALLY GAMING AND SYSTEMS

|| UIB Communication CBL-30386-0001☑Slant

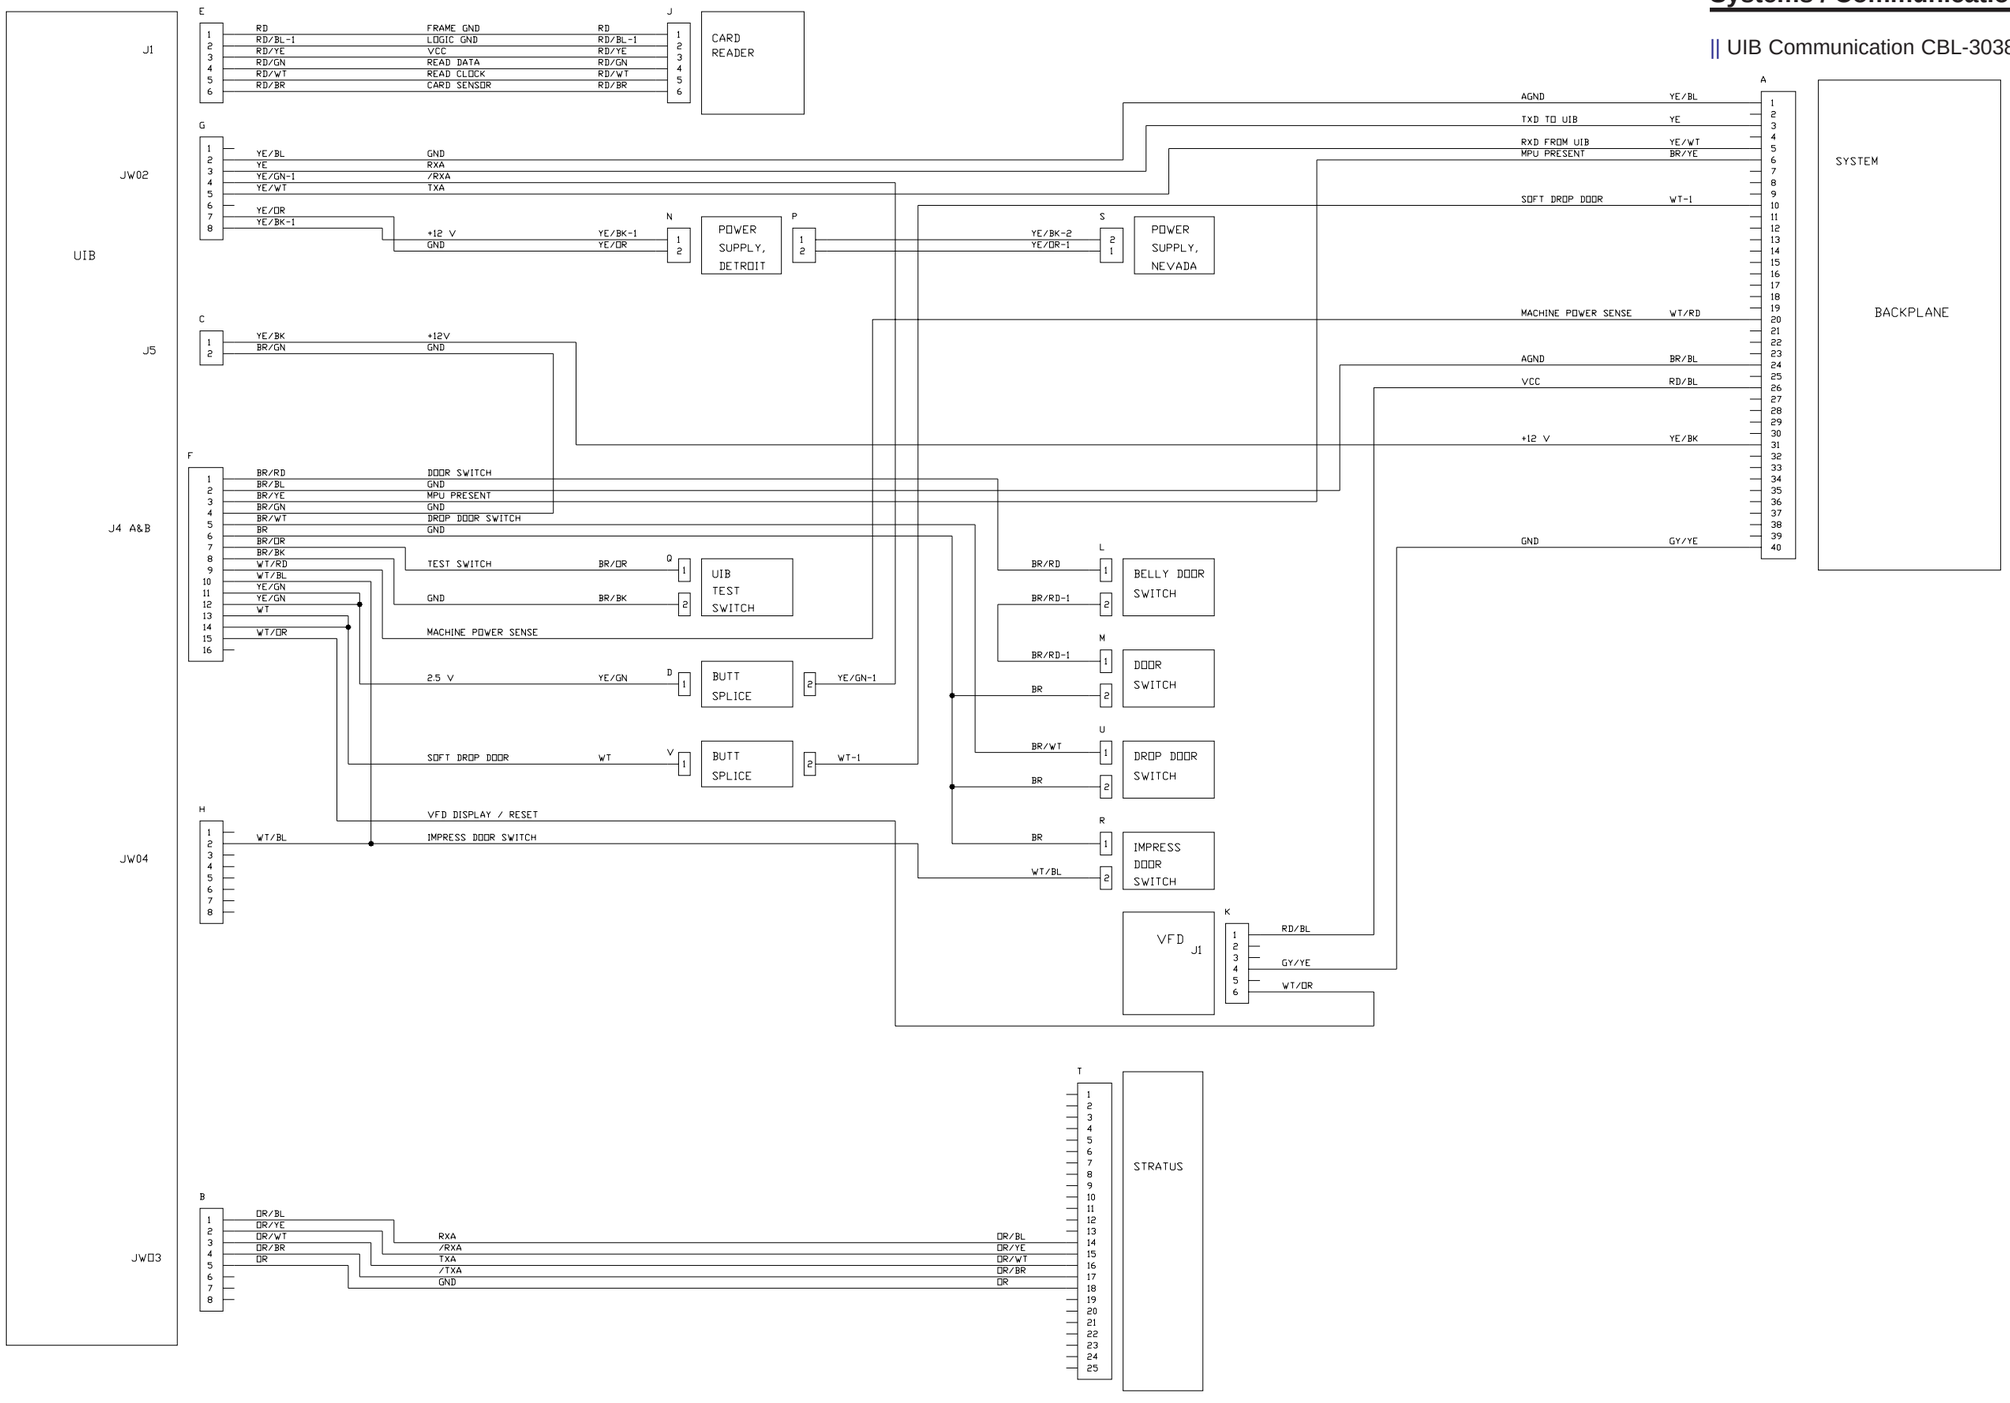

©2003 BALLY GAMING AND SYSTEMS

©2003 BALLY GAMING AND SYSTEMS

MODULE 12

MK12-S6MOD-0001

TOURNAMENT OPERATION

Bally Gaming and Systems

©2000 BALLY GAMING, INC. ALL RIGHTS RESERVED

6601 South Bermuda Road Las Vegas, NV 89119

For Customer Service and information:
+1-702-896-7772 Outside the U.S.
1-877-GO-BALLY (877) 46-22559 in the U.S. and Canada
896-7772 in Las Vegas
FAX: +1-702-896-7710
or visit our website at http://www.ballygaming.com

Module 12
Tournament Operation Table of Contents

Introduction 12-5

Tournament SMIs and Kits 12-5
Installing the Tournament Kit 12-5
Installing the Tournament Display 12-5

Tournament Operation 12-7

Module 12
Tournament Operation

Introduction

The ProSlot® 6000 supports a variety of tournament applications. With additional hardware, the machines will operate in a nonrevenue state where individual Players compete with others to accumulate the most credits.

According to Machine Options, a tournament can be based on time, or each machine can have a starting amount of credits (kitty). It's even possible to use of combination of both. Accounting meters remain unchanged during a tournament.

Tournament SMIs and Kits

Although any SMI will support tournament operation, programs are available with a higher payback percentage to add more fun for a tournament Player. There are some programs that include dual SMIs--one for tournaments and one for normal revenue operation. The most popular programs are listed in the following table:

Tournament Programs						
SMI	%	Config.	Personality	Art Form	Theme	
7339	89.41	0-0	E6481A2X-05	SAB-5024	Stars and Bars	
7340	1958.2	1-1				
7717	86.87	0-0	E6865A2X-05	SAB-5030	Stars and Bars Starlight Magic	
7718	1958.2	1-1				
7906	87.47	0-0	E7392A2X-05	DM7-5009	Blazing Triple Sevens Slant Cabinet	
8389	1554.6	1-0				

Tournament Kits are available that include the additional hardware needed for tournament operation:

Part #	Description	Cabinet
K-00710-6001	Tournament II CAS/HBY	W6
K-00710-6002	Tournament II CHOPTOP	C6
K-00710-6003	Tournament II Without Display	

Installing the Tournament Kit

Note the punch-out in the cabinet liner near the Audit Keyswitch for additional keyswitches. Use the appropriate tool to form a ¾" hole through the cabinet. Install the Tournament Keyswitch (part number M-00281-0172).

Near the Audit Keyswitch will be existing cabling for the Tournament Keyswitch. Cut the wire ties to free the black and white wires with Faston flag connectors and attach them to the lugs of the Tournament Keyswitch.

If the Tournament Display is not included, use the wire ties to secure the cable and complete the installation.

Installing the Tournament Display

Remove the smoked plexiglas cover from the Tournament Display to set the display DIP switches. Selections are made by a four-switch package DIP S1.

Note: A Tournament Display must be used because the Message Center does not show accumulated credits.

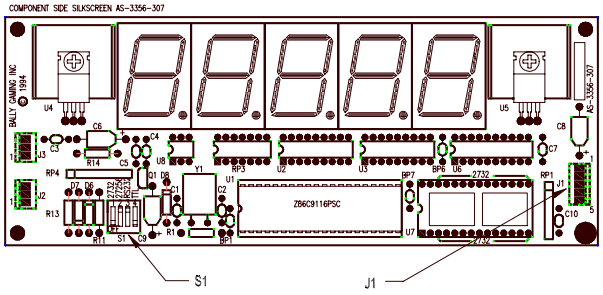

Set SW1 for a 27C256 EPROM at U7 and RS-232C communication standard according to the following table:

S1 Switch Settings					
U7 EPROM Size	sw1	sw2	Communication Standard	sw3	sw4
2732	ON	OFF	RS-232C	ON	OFF
27256	OFF	ON	TTL	OFF	ON

Installing the Tournament Kit (cont.)

Remove the Tower Light Assembly. Connect the MTA-100 connector of CBL-20105-0001 to the Tournament Display at J1. Reinstall the Tower Light Assembly with the Tournament Display Mounting Bracket P-09335-000x in place, routing the cable through the opening in the cabinet.

Route CBL-3095-0001 up the back of the cabinet through the opening into the Feature Box and connect the four-circuit receptacle of the cable to the four-circuit housing of CBL-20105-0001.

Secure the Tournament Display to the mounting bracket. Insert the 50-circuit housing of CBL-30345-0001 into the Backplane Assembly at connector J9 SPARE I/O. Connect the 10-circuit housing to the MPU Board Assembly at J3.

Complete the installation by securing the cabling with wire ties.

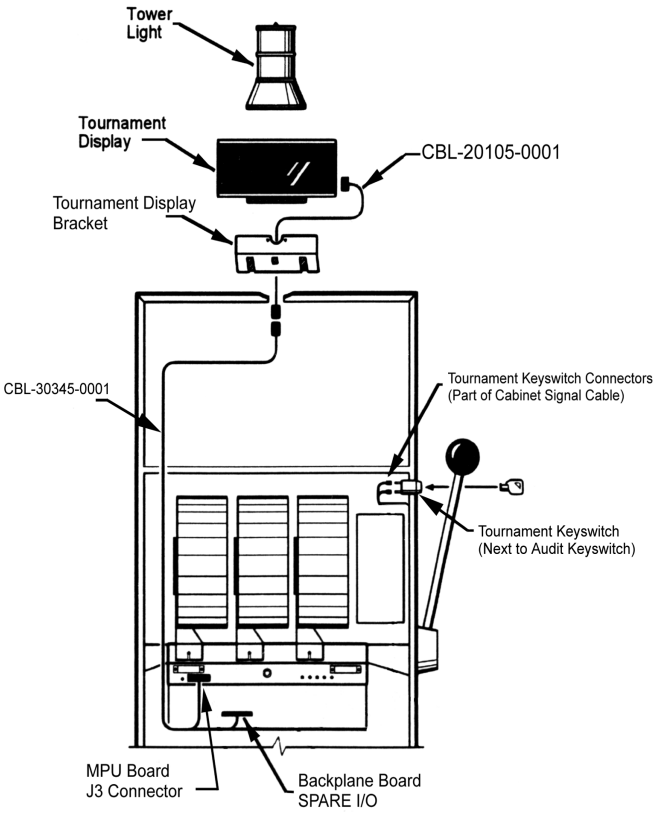

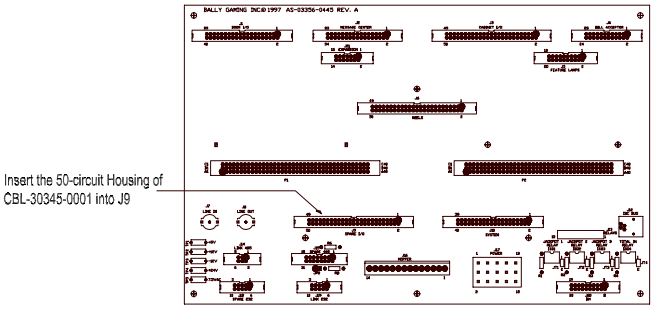

Upright Backplane Board AS-03356-0445

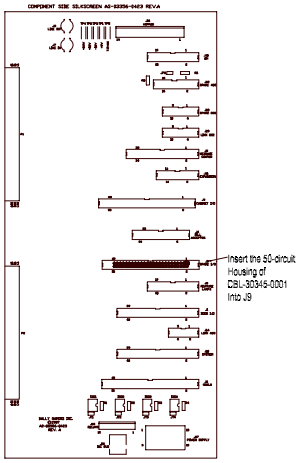

Slant Backplane Board AS-03356-0423



Tournament Operation

If EPROMs have been changed, a Complete SafeRAM™ Clear is required.

Set Machine Options pertaining to Tournament Operation as listed in the following table (also see Module 2 Set Up and Operation):

Machine Options For Tournament Operation			
No	**Option**	**Setting**	**Description**
09	Jackpot Bell	0000 0001 0002 0003 0004 0005	No Bell Bell rings on all wins Rings on wins of 20 or more Rings on wins of 50 or more Rings on wins of 100 or more Rings on wins of 200 or more
01	Tournament Minutes	0001-0099	Munutes for tournament
38	Reel Stop Sound	0000 0001	Sound from speaker Handle solenoid click
62	Tournament Kitty	0000-9999	Starting amount of credits for a tournament
03	Tournament Seconds	0001-0059	Seconds for tournament

Upon actuating the Tournament Keyswitch the Message Center will show a *97* in WIN PAID, indicating that a tournament session is ready to begin. The SMI configuration appears in CREDIT. The Tournament Display shows *HELLO.*

The session begins by pulling the handle or pressing SPIN. If values were entered in Option 01 Tournament Minutes or Option 3 Tournament Seconds, the progress of the count-down timer appears in WIN PAID. CREDIT shows the value entered in Option 62 Tournament Kitty. Wins show in WIN PAID. The accumulated wins always show in the Tournament Display.

The session completes when either the count-down timer or the kitty reach zero, indicated by *98* in WIN PAID.

Another session begins with actuation of the Tournament Keyswitch. The count-down timer and tournament kitty are reloaded. Machine Option settings remain unchanged. The Message Center will again show a *97* in WIN PAID.

Any interruption during a session such as a malfunction or opened door will suspend the timer. The Exception Code alternates with remaining time in WIN PAID. The Tournament Display will blink. When the condition is corrected, the session resumes by pulling the handle or pressing SPIN.

The session can be terminated at any time by with the Tournament Keyswitch.

Bally GAMING • SYSTEMS ®

ProSlot® 6000

MODULE 14

MK14-S6MOD-0001

SCHEMATICS

©2003 BALLY GAMING, INC. ALL RIGHTS RESERVED

Bally Gaming and Systems
6601 South Bermuda Road, Las Vegas, NV 89119

For Customer Service and information, call or FAX:
1-877-GO-BALLY (877-462-2559) in the U.S. and Canada
+1-702-896-7772 outside the U.S.
896-7772 in Las Vegas
FAX: +1-702-896-7710
or visit our website at http://www.ballygaming.com

Module 14 - Schematics

Bill Acceptor 14-5
LED Board, JCM WBA AS-03356-0431 14-5
Cabinet 14-6
Backplane Board AS-03356-0423 14-6
Cabinet 14-7
Backplane Board AS-03356-0643 14-7
Backplane Board (1 of 2) AS-03356-0445 14-8
Backplane Board (2 of 2) AS-03356-0445 14-9
Meter Detect Board, 5-Meter AS-03356-0609 14-10
Card Rack / MPU Board 14-11
MPU Board (1 of 5) AS-03356-0438 14-11
MPU Board (2 of 5) AS-03356-0438 14-12
MPU Board (3 of 5) AS-03356-0438 14-13
MPU Board (4 of 5) AS-03356-0438 14-14
MPU Board (5 of 5) AS-03356-0438 14-15
MPU Board (1 of 9) AS-03356-0424 14-16
MPU Board (2 of 9) AS-03356-0424 14-17
MPU Board (3 of 9) AS-03356-0424 14-18
MPU Board (4 of 9) AS-03356-0424 14-19
MPU Board (5 of 9) AS-03356-0424 14-20
MPU Board (6 of 9) AS-03356-0424 14-21
MPU Board (7 of 9) AS-03356-0428 14-22
MPU Board (8 of 9) AS-03356-0424 14-23
MPU Board (9 of 9) AS-03356-0424 14-24
Coin Acceptor 14-25
Coin Optic Decoder 2 Board AS-03356-0303 14-25
Door 14-26
Display Board with Hit and Run Connector AS-03356-0525 14-26
Display Board with Hit and Run Connector, Left AS-03356-0623 14-27
Door Optic Emitter Board AS-03356-0427 14-28
Hopper 14-29
Hopper Controller Board, FET, Dual Optic AS-03356-0368 14-29
Logic 14-30
Data Vault™ Memory Board (France) AS-03356-0466 14-30
Reel Mechanism 14-31
Reel Drive Board AS-03356-0205 14-31
Sound Board 14-32
Deluxe Sound Board AS-03356-0362 14-32
Sound Board 14-33
Pro Sound 2 Board (1 of 2) AS-03356-0512 14-33
Pro Sound 2 Board (2 of 2) AS-03356-0512 14-34
Systems / Communication 14-35
LSAMS Fiber Optic Board AS-03356-0185 14-35
Display Board, Horse Play AS-03356-0524 14-36

©2003 Bally Gaming and Systems

Marquee 14-37
LED Board with Power Connector, Diamond AS-03356-0621 14-37
LED Board, Diamond AS-03356-0622 14-37
LED Power Board, Round AS-03356-0577 14-38
Marquee Board, To Tell the Truth AS-03356-0551 14-38
Printed Circuit Board “A” - Generic Oval AS-03356-0592 14-39
Printed Circuit Board “B”- Generic Oval AS-03356-0593 14-39
Power Board, Movie Star Marquee AS-03356-0557 14-40

Bill Acceptor

LED Board, JCM WBA AS-03356-0431

☑ Upright ☑ Slant

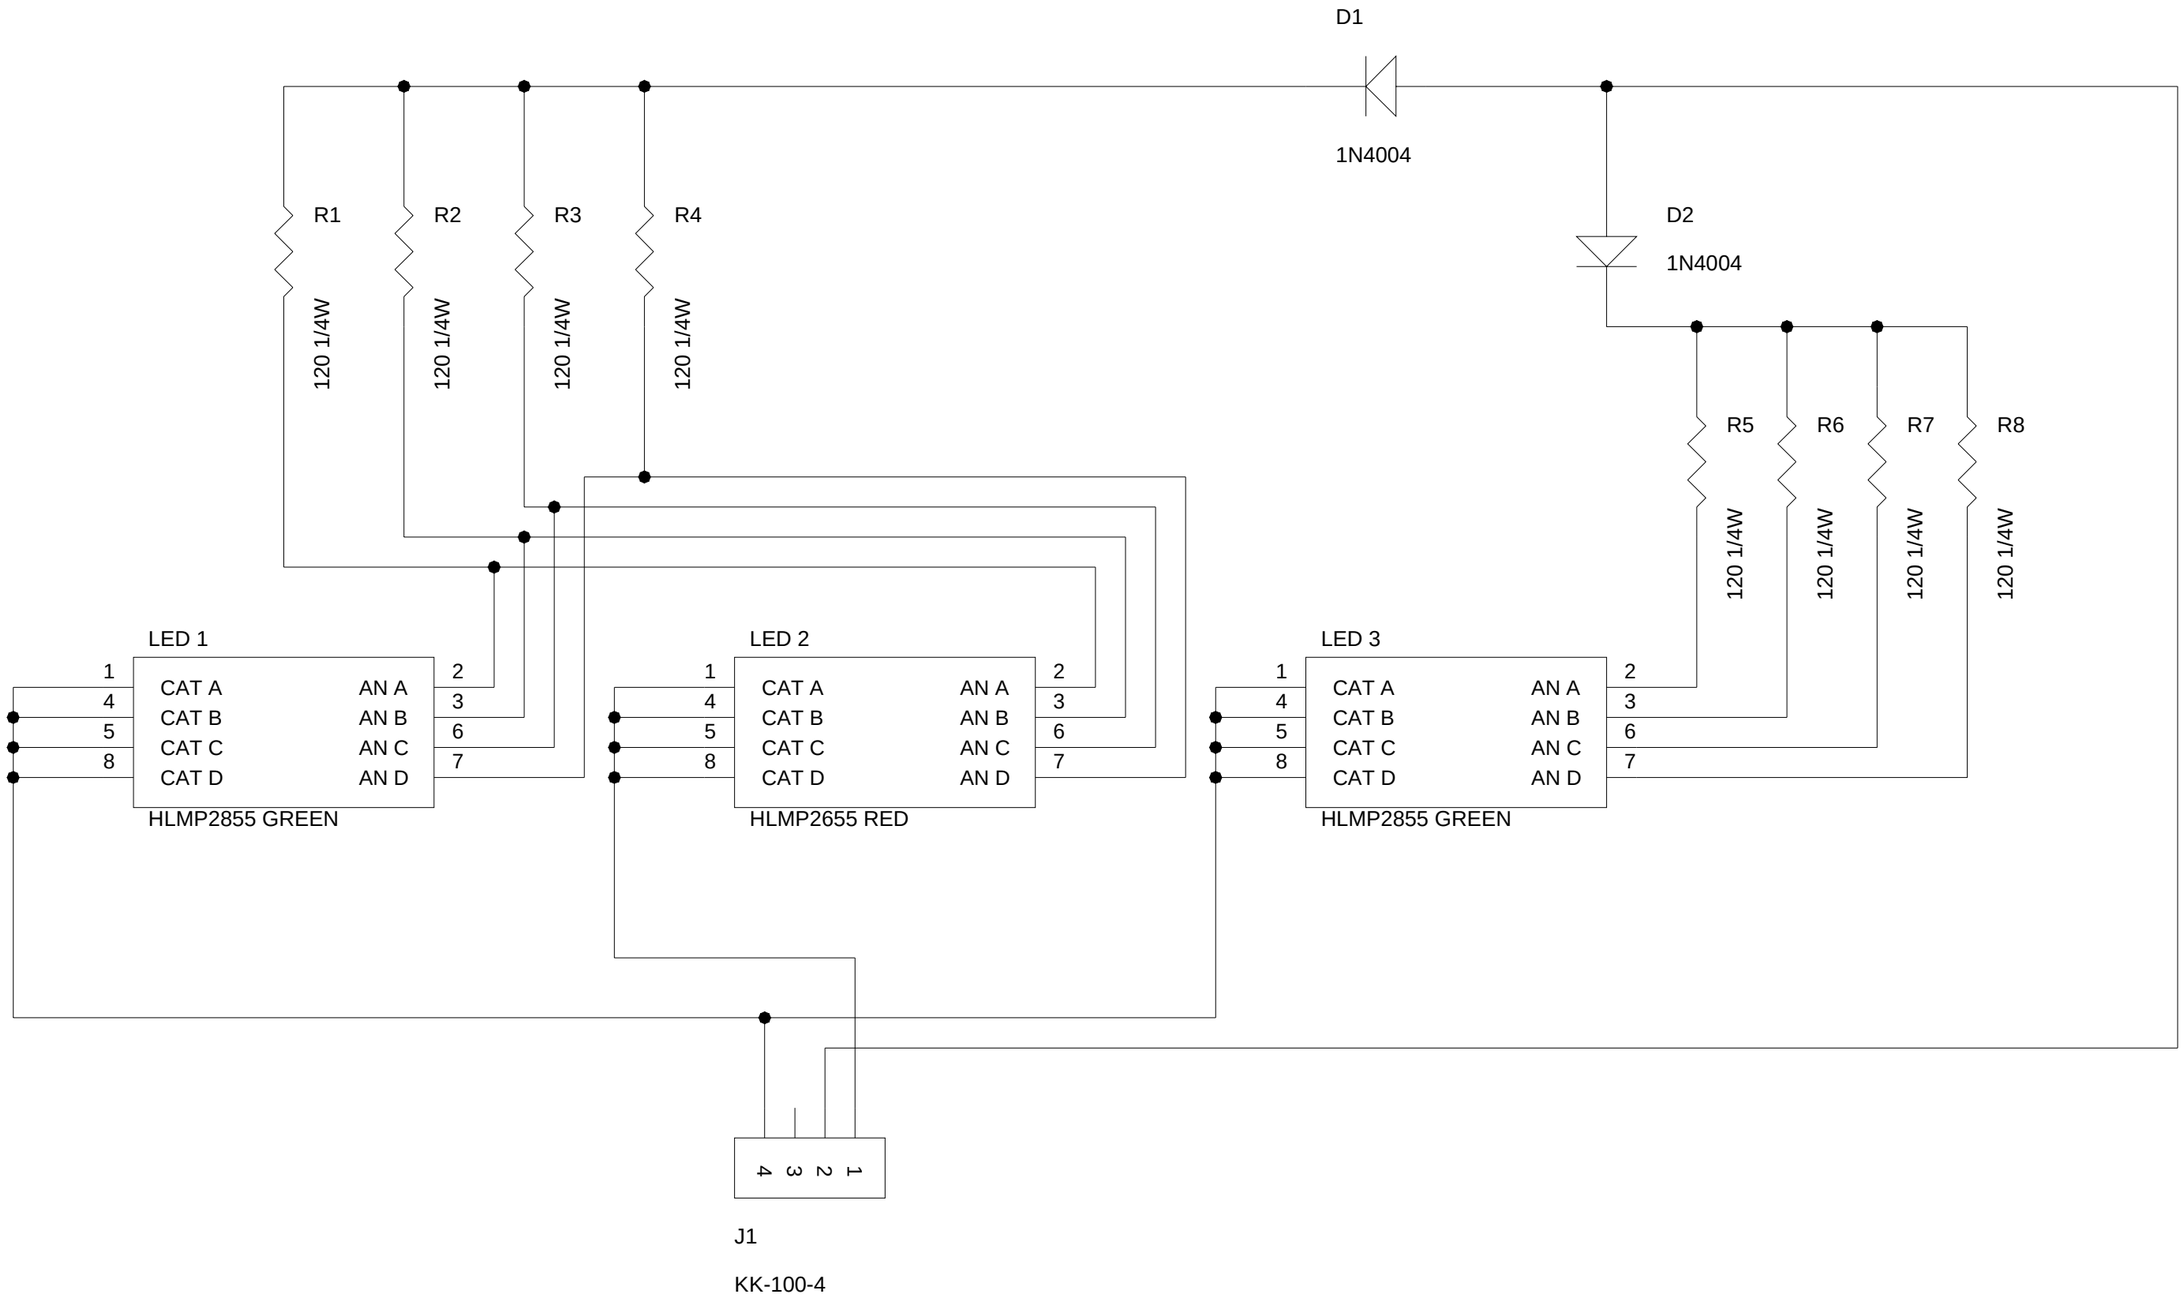

©2003 BALLY GAMING AND SYSTEMS

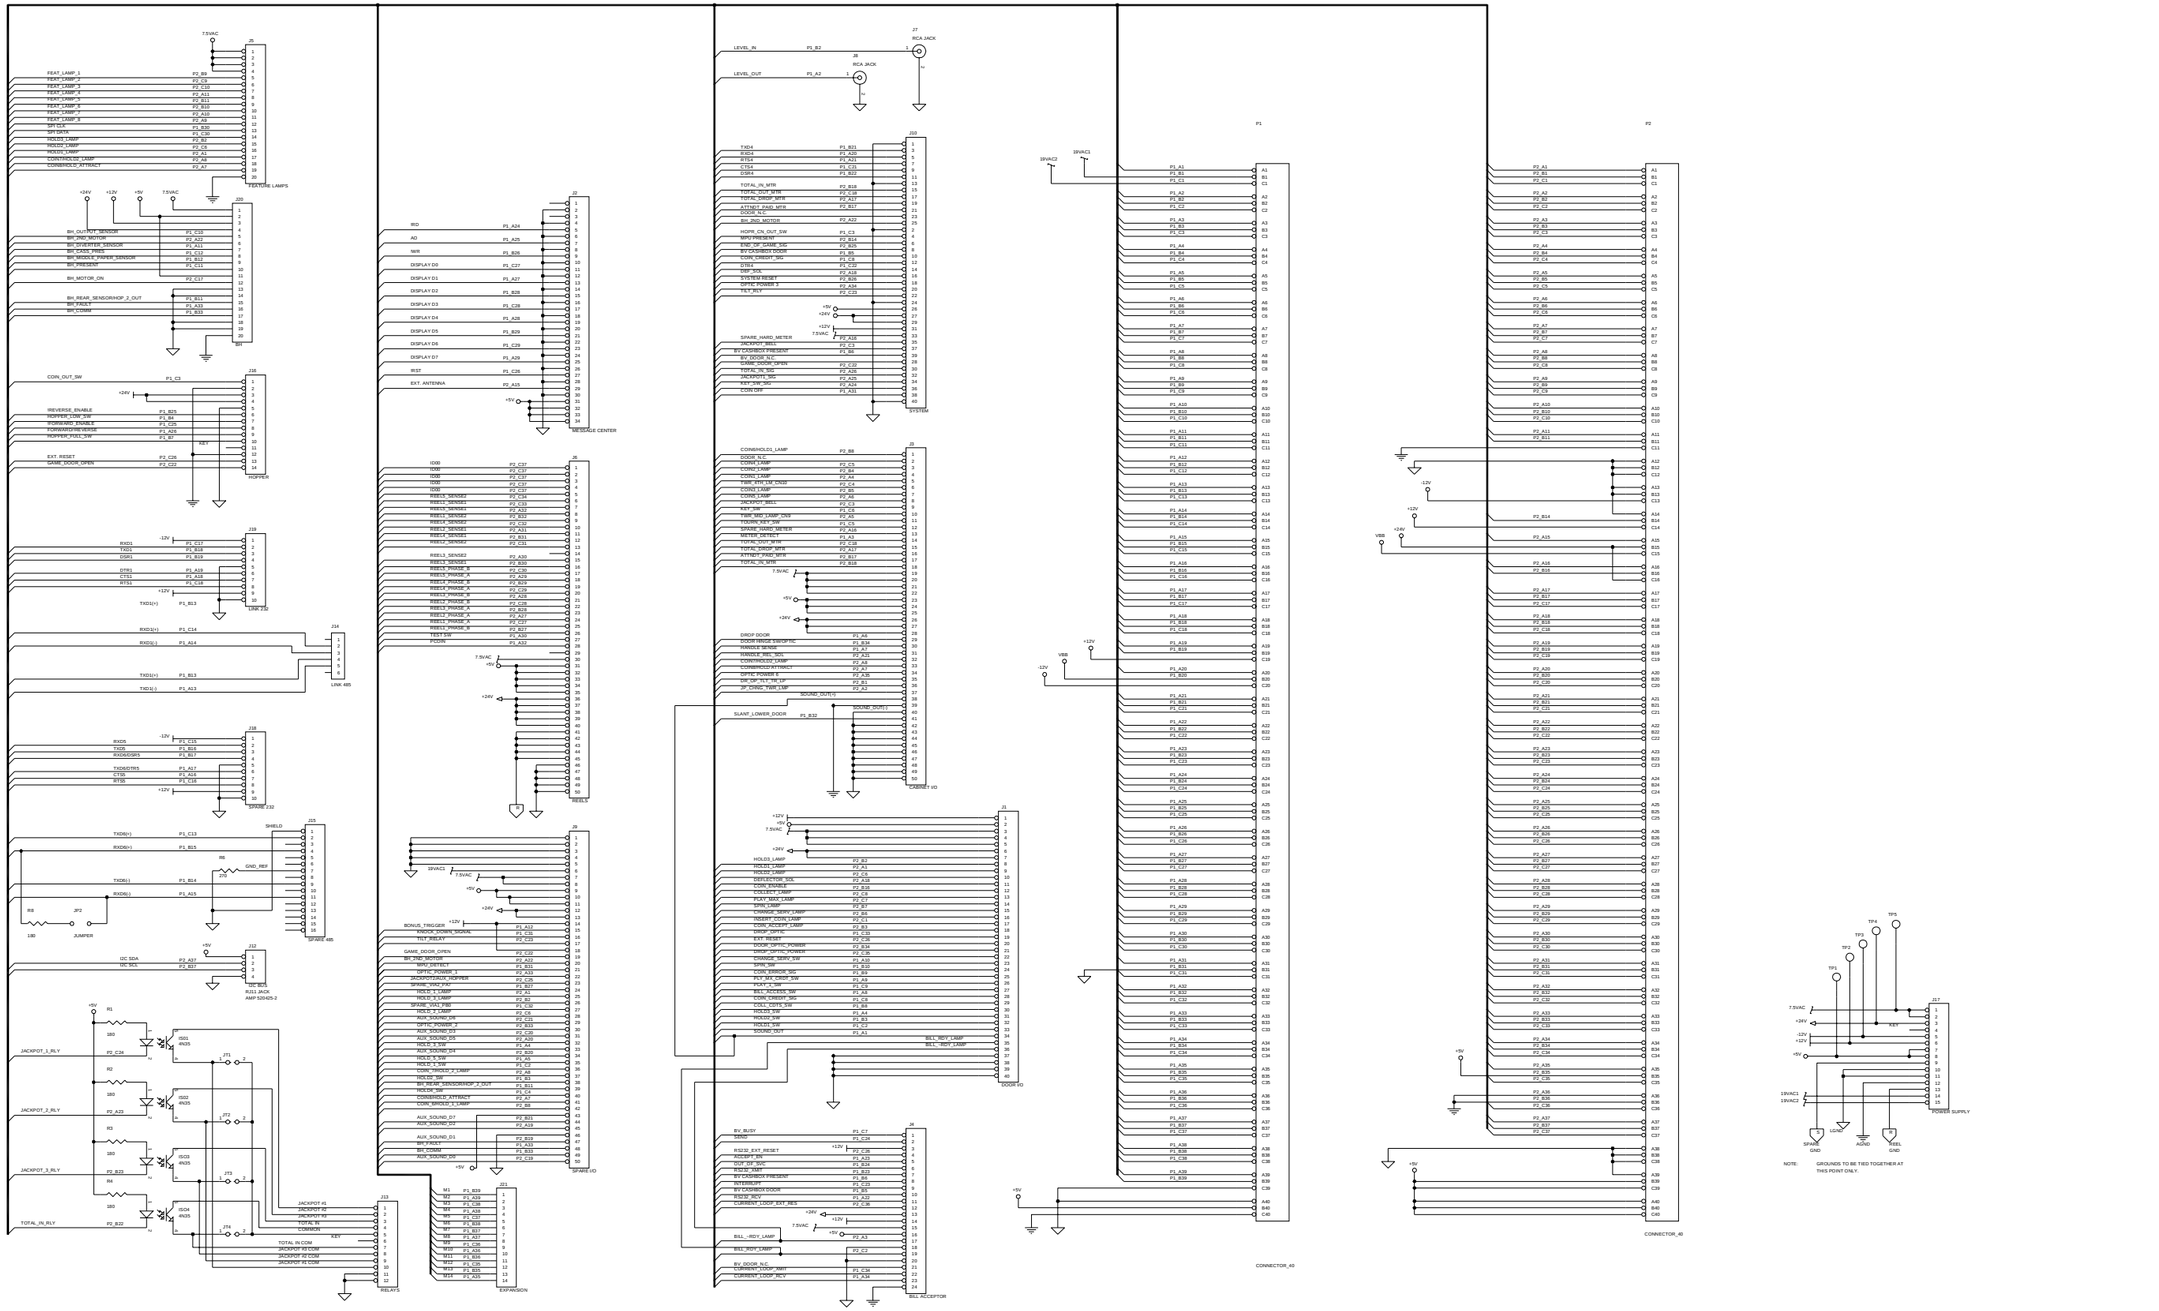
7.5VAC
J5
FEATURE LAMPS
+24V
+12V
+5V
7.5VAC
J20
BH_OUT/KIT_SENSOR
BH_DOC_MOTOR
BH_QUARTER_SENSOR
BH_CASS_PROX
BH_MODULE_PAPER_SENSOR
BH_PRESENT
BH_MOTOR_ON
BH_REAR_SENSOR/HOP_2_OUT
BH_FAULT
BH_COMM
BH1
CONN_OUT_SW
J16
HOPPER
IREVERSE_ENABLE
HOPPER_LOW_SW
FORWARD_ENABLE
FORWARD/REVERSE
HOPPER_FULL_SW
KEY
EXT. RESET
GAME_DOOR_OPEN
J19
LINK 232
LINK 485
SPARE 232
SHIELD
J15
SPARE 485
GND_REF
R6
270
R8
180
JP2
JUMPER
I2C SDA
I2C SCL
J32
I2C BUS
RJ11 JACK
AMP 520425-2
R1
R2
R3
R4
180
JACKPOT_1_RLY
JACKPOT_2_RLY
JACKPOT_3_RLY
TOTAL_IN_RLY
IGD1
4N35
IGD2
IGD3
IGD4
J71
J72
J73
J74
JACKPOT #1
JACKPOT #2
JACKPOT #3
TOTAL IN
COMMON
TOTAL IN COM
JACKPOT #1 COM
JACKPOT #2 COM
JACKPOT #3 COM
J13
RELAYS
J2
MODULE CENTER
IRD
AD
WHS
DISPLAY D0
DISPLAY D1
DISPLAY D2
DISPLAY D3
DISPLAY D4
DISPLAY D5
DISPLAY D6
DISPLAY D7
RST
EXT. ANTENNA
J6
SPARE I/O
J21
EXPANSION
J9
BONUS_TRIGGER
KNOCK_DOWN_SIGNAL
TILT_RELAY
GAME_DOOR_OPEN
BH_2ND_MOTOR
MPU_WATCH
OHTIC_POWER_1
JACKPOT/JAUX_HOPPER
SPARE_VIA_PAT
HOLD_1_LAMP
HOLD_2_LAMP
SPARE_VIA_PBT
HOLD_3_LAMP
HOP_OUT_SW
AUX_SOUND_C2
AUX_SOUND_D5
HOLD_4_SW
AUX_SOUND_D4
HOLD_5_SW
HOLD_6_SW
CONN_TROUT_2_LAMP
HOLD9_SW
BH_BEAM_SENSOR/HOP_4_OUT
HOLD8_SW
COINS/HOLD_ATTRACT
CONN_SHOUT_1_LAMP
AUX_SOUND_D7
AUX_SOUND_D2
AUX_SOUND_D1
BH_CNCT
BH_COMM
AUX_SOUND_D0
LEVEL_IN
LEVEL_OUT
J7
J8
RCA JACK
J10
SYSTEM
SPARE_HARD_METER
JACKPOT_BELL
BV CASHBOX PRESENT
BV_DOOR_NC
CONN_CREDIT_SIG
TOTAL_IN_SIG
JACKPOT1_SIG
KEY_SW_SIG
CONN OFF
J3
CABINET I/O
CONN/HOLD_LAMP
DOOR_N.C.
CONN_LAMP
CONN_LAMP
TOTAL_IN_1M_ENDS
CONN_LAMP
CONN_LAMP
JACKPOT_BELL
KEY_SW
TSBR_MID_LAMP_ENDS
TOURN_KEY_SW
SPARE_HARD_METER
METER_DETECT
TOTAL_OUT_SFTR
TOTAL_DROP_MTR
ATTRCT_PADC_MTR
TOTAL_IN_MTR
DROP DOOR
DOOR FRIDGE S/BOTTIC
HANDICE SENSE
HANDLE_REC_SOL
CONN/HOLDO_LAMP
CONN/HOLDO ATTRACT
OPTIC POWER 6
SW_OP_1/1_HE_LP
2P_CONC_TWR_LAMP
SOUND_OUT(-)
SLANT_LOWER_DOOR
J1
DOOR I/O
HOLD3_LAMP
HOLD1_LAMP
HOLD2_LAMP
CON_ENABLE
HOLDBUY_LAMP
FLAT_MAX_LAMP
TILT_LAMP
CHANGE_SERV_LAMP
INSERT_COIN_LAMP
CON_ACCEPT_LAMP
DROP_OPTIC
EXT_RESET
DOOR_OPTIC_POWER
DROP_OPTIC_POWER
CHANGE_SERV_SW
SPIN_SW
CON_ERROR_SIG
FLY_MIX_CROSS_SW
FLAY_L_SW
BILL_ACCESS_SW
CON_CREDIT_SIG
COLL_COIN1_SW
HOLD3_SW
HOLD2_SW
HOLD1_SW
SOUND_OUT
BILL_RDY_LAMP
BILL_RDY_LAMP
J4
BILL ACCEPTOR
BV_BUSY
SENSE
RS232_EXT_RESET
ACCEPT_EN
OUT_OF_SNC
RS232_XMIT
BV CASHBOX PRESENT
INTERRUPT
BV CASHBOX DOOR
RS232_REV
CURRENT_LOOP_EXT_RES
BILL_RDY_LAMP
BV_DOOR_N.C.
CURRENT_LOOP_XMIT
CURRENT_LOOP_REV
P1
P2
CONNECTOR_40
19VAC1
19VAC2
VBB
-12V
+12V
+24V
+5V
J17
POWER SUPPLY
TP1
TP2
TP3
TP4
TP5
KEY
SHIELD
GND
AGND
CHASS
GND
NOTE: GROUNDS TO BE TIED TOGETHER AT THIS POINT ONLY.

|| Backplane Board AS-03356-0643

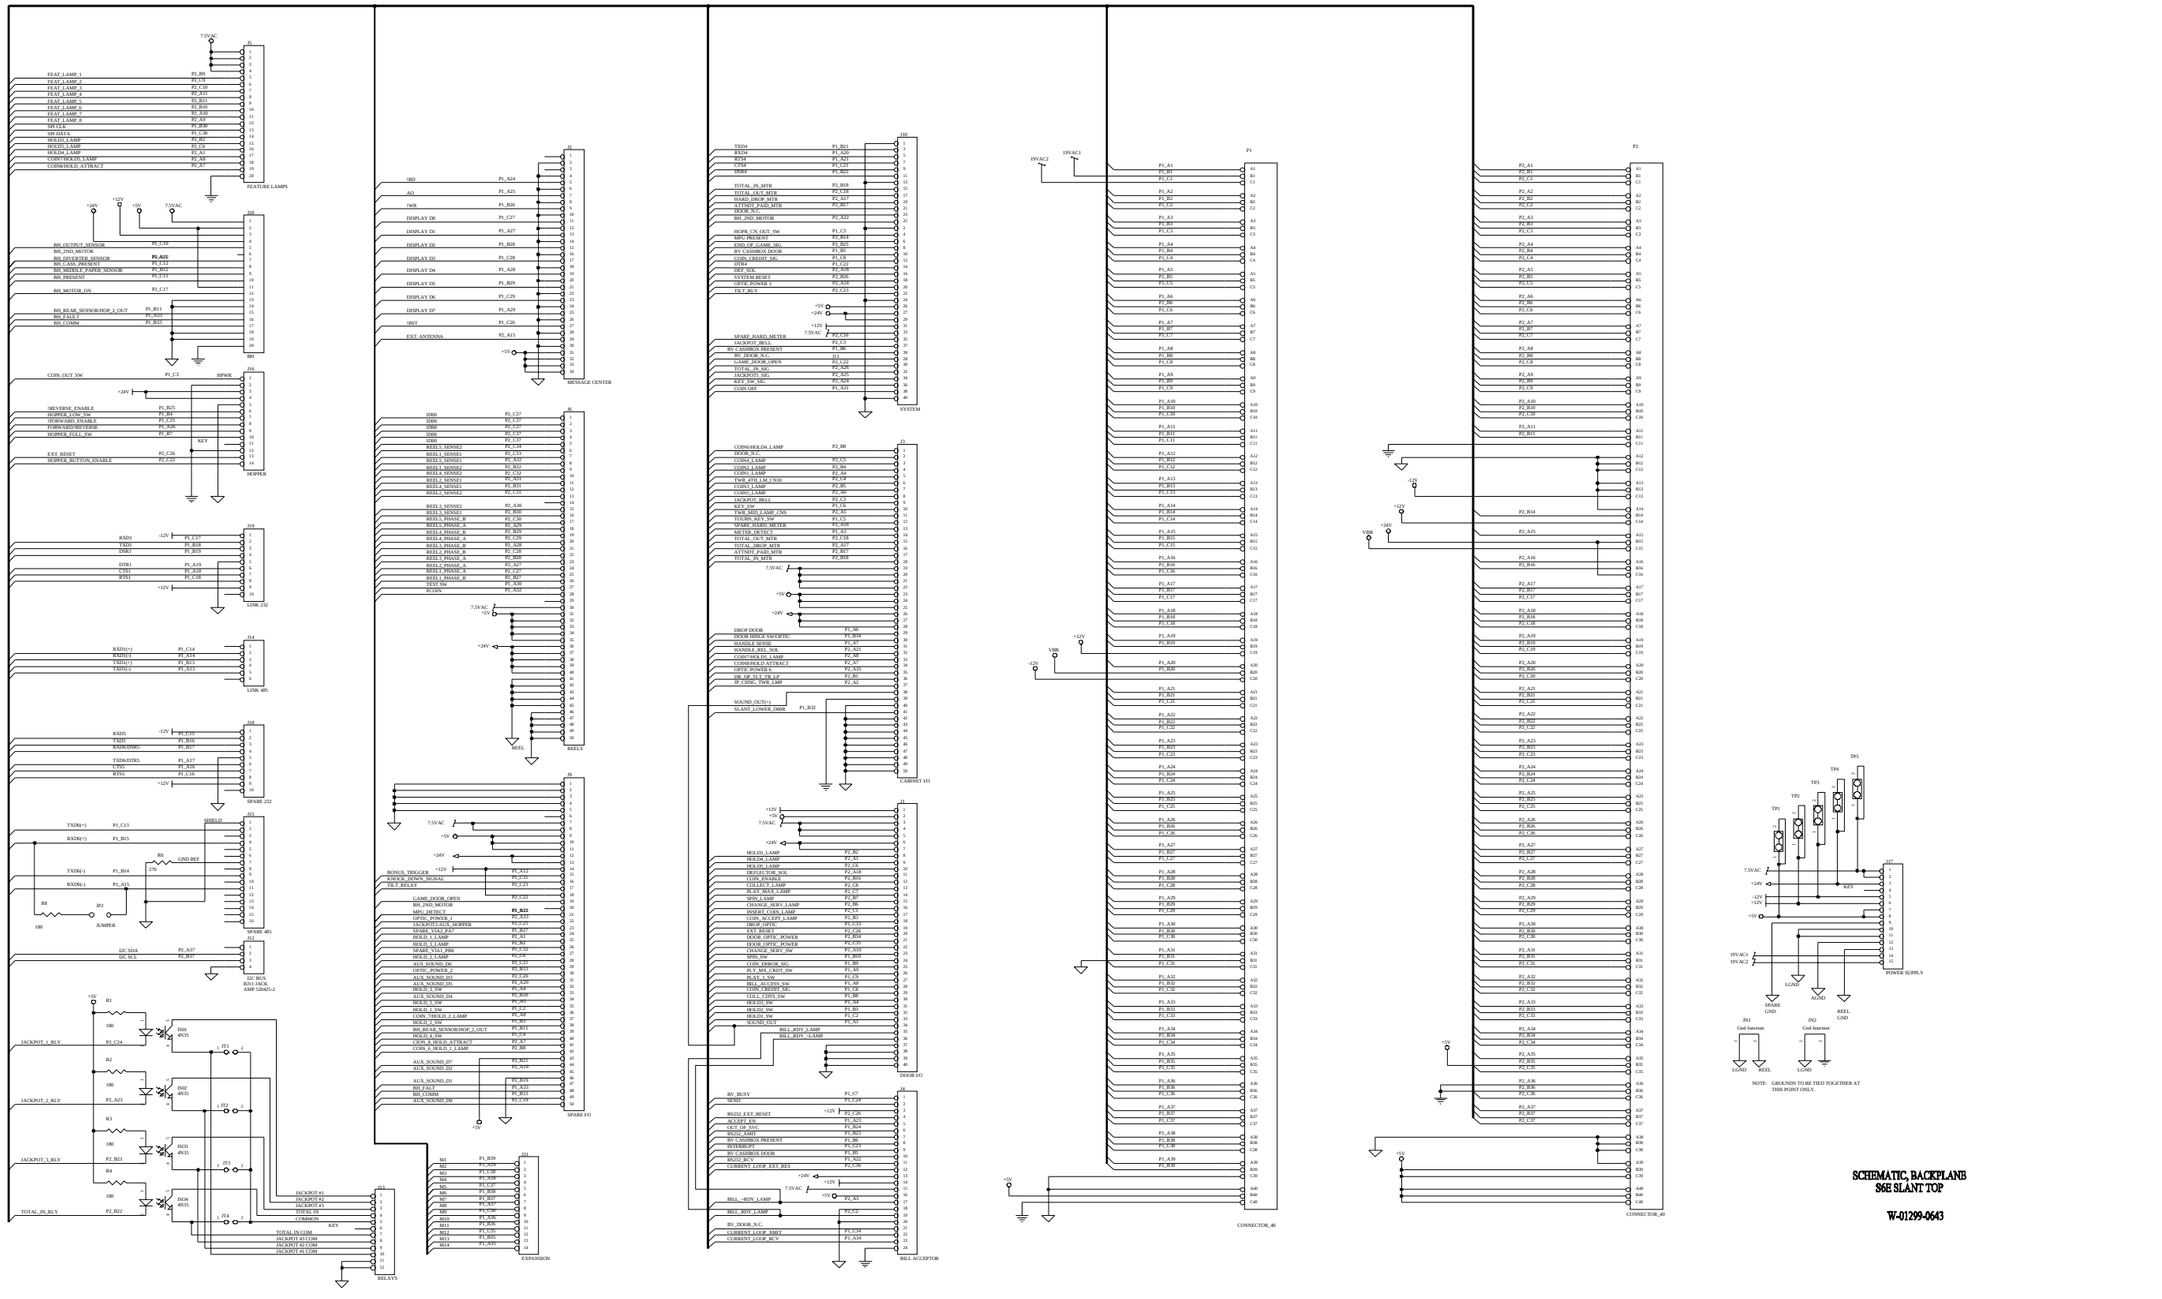

©2003 BALLY GAMING AND SYSTEMS

Backplane Board (1 of 2) AS-03356-0445

☑Upright

P1

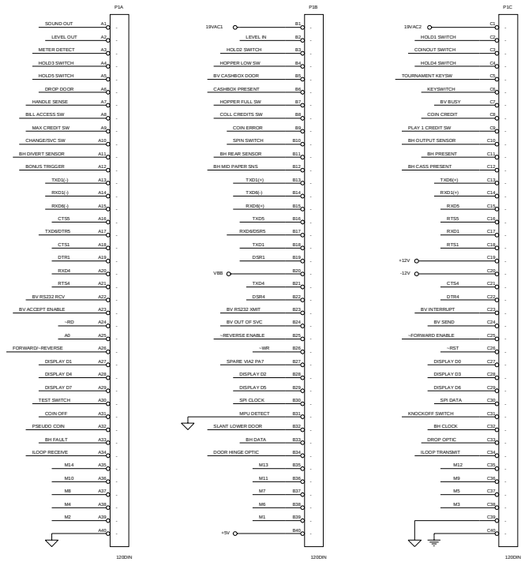

P2

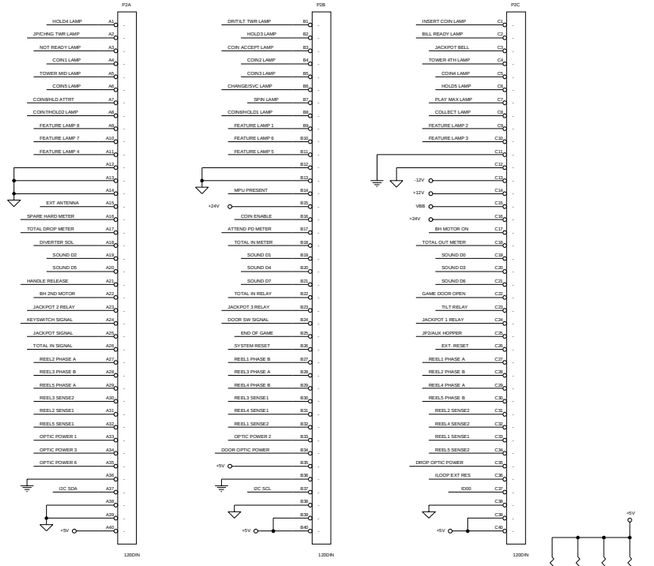

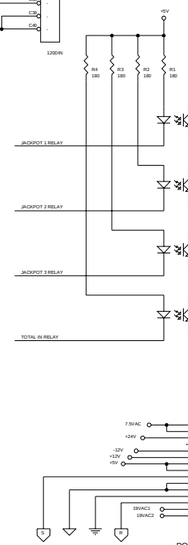

































Cabinet

Backplane Board (2 of 2) AS-03356-0445

☑Upright

SIGNAL	CONNECTIONS			
	A	B	C	D
~FORWARD ENABLE	P1,C25	J16,8		
~RD	P1,A24	J2,5		
~REVERSE ENABLE	P1,B25	J16,6		
~RST	P1,C26	J2,27		
~WR	P1,B26	J2,9		
19VAC1	P1,B1	J9,6	J17,14	
19VAC2	P1,C1	J17,15		
A0	P1,A25	J2,7		
ATTEND PD METER	P2,B17	J3,17	J10,21	
BH 2ND MOTOR	P2,A22	J9,20	J10,25	J20,6
BH CASS PRESENT	P1,C12	J20,8		
BH CLOCK	P1,C32	J9,27	J20,1	
BH DATA	P1,B33	J9,49	J20,17	
BH DIVERT SENSOR	P1,A11	J20,7		
BH FAULT	P1,A33	J20,16		
BH MID PAPER SNS	P1,B12	J20,9		
BH MOTOR ON	P2,C17	J20,12		
BH OUTPUT SENSOR	P1,C10	J20,5		
BH PRESENT	P1,C11	J20,10		
BH REAR SENSOR	P1,B11	J9,39	J20,15	
BILL ACCESS SW	P1,A8	J1,28		
BILL READY LAMP	P2,C2	J1,35	J4,19	
BONUS TRIGGER	P1,A12	J9,15		
BV ACCEPT ENABLE	P1,A23	J4,5		
BV BUSY	P1,C7	J4,1		
BV CASHBOX DOOR	P1,B5	J4,10	J10,10	
BV DOOR NC	J4,21	J10,28		
BV INTERRUPT	P1,C23	J4,9		
BV OUT OF SVC	P1,B24	J4,6		
BV RS232 RCV	P1,A22	J4,11		
BV RS232 XMIT	P1,B23	J4,7		
BV SEND	P1,C24	J4,2		
CASHBOX PRESENT	P1,B6	J4,8	J10,39	
CHANGE/SVC LAMP	P2,B6	J1,16		
CHANGE/SVC SW	P1,A10	J1,23		
COIN ACCEPT LAMP	P2,B3	J1,18		
COIN CREDIT	P1,C8	J1,29	J10,12	
COIN ENABLE	P2,B16	J1,12		
COIN ERROR	P1,B9	J1,25		
COIN OFF	P1,A31	J10,38		
COIN1 LAMP	P2,A4	J3,5		
COIN2 LAMP	P2,B4	J3,4		
COIN3 LAMP	P2,B5	J3,7		
COIN4 LAMP	P2,C5	J3,3		
COIN5 LAMP	P2,A6	J3,8		
COIN6/HOLD1 LAMP	P2,B8	J3,1	J9,42	
COIN7/HOLD2 LAMP	P2,A8	J3,33	J5,18	J9,37
COIN8/HOLD ATTR	P2,A7	J3,34	J5,19	J9,41
COINOUT SWITCH	P1,C3	J16,1	J10,4	
COLL CREDITS SW	P1,B8	J1,30		
COLLECT LAMP	P2,C8	J1,13		
CTS1	P1,A18	J19,7		
CTS4	P1,C21	J10,9		
CTS5	P1,A16	J18,7		
DISPLAY D0	P1,C27	J2,11		
DISPLAY D1	P1,A27	J2,13		
DISPLAY D2	P1,B28	J2,15		
DISPLAY D3	P1,C28	J2,17		
DISPLAY D4	P1,A28	J2,19		
DISPLAY D5	P1,B29	J2,21		
DISPLAY D6	P1,C29	J2,23		
DISPLAY D7	P1,A29	J2,25		
DIVERTER SOL	P2,A18	J1,11	J10,16	
DOOR HINGE OPTIC	P1,B34	J3,30		
DOOR NC	J10,23	J3,2		
DOOR OPTIC POWER	P2,B34	J1,21		
DOOR SW SIGNAL	P2,B24	J9,48		
DR/TILT TWR LAMP	P2,B1	J3,36		
DROP DOOR	P1,A6	J3,29		
DROP OPTIC	P1,C33	J1,19		
DROP OPTIC POWER	P2,C35	J1,22		
DSR1	P1,B19	J19,4		
DSR4	P1,B22	J10,11		
DTR1	P1,A19	J19,6		
DTR4	P1,C22	J10,14		
END OF GAME	P2,B25	J10,8		
EXT ANTENNA	P2,A15	J2,29		
EXT. RESET	P2,C26	J1,20	J4,4	J16,13 J20,13
FEATURE LAMP 1	P2,B9	J5,5		
FEATURE LAMP 2	P2,C9	J5,6		
FEATURE LAMP 3	P2,C10	J5,7		
FEATURE LAMP 4	P2,A11	J5,8		
FEATURE LAMP 5	P2,B11	J5,9		
FEATURE LAMP 6	P2,B10	J5,10		
FEATURE LAMP 7	P2,A10	J5,11		
FEATURE LAMP 8	P2,A9	J5,12		
FORWARD/~REVERSE	P1,A26	J16,9		
GAME DOOR OPEN	P2,C22	J9,19	J10,30	J16,14

SIGNAL	CONNECTIONS			
	A	B	C	D
HANDLE RELEASE	P2,A21	J3,32		
HANDLE SENSE	P1,A7	J3,31		
HOLD1 SWITCH	P1,C2	J1,33	J9,36	
HOLD2 SWITCH	P1,B3	J1,32	J9,38	
HOLD3 LAMP	P2,B2	J1,8	J5,15	J9,26
HOLD3 SWITCH	P1,A4	J1,31	J9,33	
HOLD4 LAMP	P2,A1	J1,9	J5,17	J9,25
HOLD4 SWITCH	P1,C4	J9,40		
HOLD5 LAMP	P2,C6	J1,10	J5,16	J9,28
HOLD5 SWITCH	P1,A5	J9,35		
HOPPER FULL SW	P1,B7	J16,10		
HOPPER LOW SW	P1,B4	J16,7		
I2C SCL	P2,B37	J12,3		
I2C SDA	P2,A37	J12,2		
ID00	P2,C37	J6,1	J6,2 J6,4	J6,3 J6,5
ILOOP EXT RES	P2,C36	J4,12		
ILOOP RECEIVE	P1,A34	J4,23		
ILOOP TRANSMIT	P1,C34	J4,22		
INSERT COIN LAMP	P2,C1	J1,17		
JACKPOT #1	ISO1,COLL	J13,1		
JACKPOT #1 COM	ISO1,EMITTER	J13,10	JT1,1	
JACKPOT #2	ISO2,COLL	J13,2		
JACKPOT #2 COM	ISO2,EMITTER	J13,9	JT2,1	
JACKPOT #3	ISO3,COLL	J13,3		
JACKPOT #3 COM	ISO3,EMITTER	J13,8	JT3,1	
JACKPOT 1 RELAY	P2,C24	ISO1,CATHODE		
JACKPOT 2 RELAY	P2,A23	ISO2,CATHODE		
JACKPOT 3 RELAY	P2,B23	ISO3,CATHODE		
JACKPOT BELL	P2,C3	J3,9	J10,37	
JACKPOT SIGNAL	P2,A25	J10,34		
JP/CHNG TWR LAMP	P2,A2	J3,37		
JP2/AUX HOPPER	P2,C25	J9,23		
KEYSWITCH	P1,C6	J3,10		
KEYSWITCH SIGNAL	P2,A24	J10,36		
KNOCKOFF SWITCH	P1,C31	J9,16		
LEVEL IN	P1,B2	J7,CENTER		
LEVEL OUT	P1,A2	J8,CENTER		
M1	P1,B39	J21,1		
M2	P1,A39	J21,2		
M3	P1,C38	J21,3		
M4	P1,A38	J21,4		
M5	P1,C37	J21,5		
M6	P1,B38	J21,6		
M7	P1,B37	J21,7		
M8	P1,A37	J21,8		
M9	P1,C36	J21,9		
M10	P1,A36	J21,10		
M11	P1,B36	J21,11		
M12	P1,C35	J21,12		
M13	P1,B35	J21,13		
M14	P1,A35	J21,14		
MAX CREDIT SW	P1,A9	J1,26		
METER DETECT	P1,A3	J3,14		
MPU PRESENT	P2,B14	J10,6		
NOT READY LAMP	P2,A3	J1,36	J4,17	
OPTIC POWER 1	P2,A33	J9,22		
OPTIC POWER 2	P2,B33	J9.30		
OPTIC POWER 3	P2,A34	J10,20		
OPTIC POWER 6	P2,A35	J3,35		
PLAY 1 CREDIT SW	P1,C9	J1,27		
PLAY MAX LAMP	P2,C7	J1,14		
PSEUDO COIN	P1,A32	J6,28		
REEL1 PHASE A	P2,C27	J6,25		
REEL1 PHASE B	P2,B27	J6,26		
REEL1 SENSE1	P2,C33	J6,7		
REEL1 SENSE2	P2,B32	J6,9		
REEL2 PHASE A	P2,A27	J6,24		
REEL2 PHASE B	P2,C28	J6,22		
REEL2 SENSE1	P2,A31	J6,11		
REEL2 SENSE2	P2,C31	J6,13		
REEL3 PHASE A	P2,B28	J6,23		
REEL3 PHASE B	P2,A28	J6,21		
REEL3 SENSE1	P2,B30	J6,16		
REEL3 SENSE2	P2,A30	J6,15		
REEL4 PHASE A	P2,C29	J6,20		
REEL4 PHASE B	P2,B29	J6,19		
REEL4 SENSE1	P2,B31	J6,12		
REEL4 SENSE2	P2,C32	J6,10		
REEL5 PHASE A	P2,A29	J6,18		
REEL5 PHASE B	P2,C30	J6,17		
REEL5 SENSE1	P2,A32	J6,8		
REEL5 SENSE2	P2,C34	J6,6		
RTS1	P1,C18	J19,8		
RTS4	P1,A21	J10,7		
RTS5	P1,C16	J18,8		
RXD1	P1,C17	J19,2		
RXD1(+)	P1,C14	J14,2		
RXD1(-)	P1,A14	J14,3		
RXD4	P1,A20	J10,5		

SIGNAL	CONNECTIONS			
	A	B	C	D
RXD5	P1,C15	J18,2		
RXD6(+)	P1,B15	J15,4	R8,1	
RXD6(-)	P1,A15	J15,11	JP2,1	
RXD6/DSR5	P1,B17	J18,4		
SLANT LOWER DOOR	P1,B32	J3,41		
SOUND D0	P2,C19	J9,50		
SOUND D1	P2,B19	J9,47		
SOUND D2	P2,A19	J9,45		
SOUND D3	P2,C20	J9,31		
SOUND D4	P2,B20	J9,34		
SOUND D5	P2,A20	J9,32		
SOUND D6	P2,C21	J9,29		
SOUND D7	P2,B21	J9,44		
SOUND OUT	P1,A1	J1,34	J3,38	
SPARE HARD METER	P2,A16	J3,13	J10,35	
SPARE VIA2 PA7	P1,B27	J9,24		
SPI CLOCK	P1,B30	J5,13		
SPI DATA	P1,C30	J5,14		
SPIN LAMP	P2,B7	J1,15		
SPIN SWITCH	P1,B10	J1,24		
SYSTEM RESET	P2,B26	J10,18		
TEST SWITCH	P1,A30	J6,27		
TILT RELAY	P2,C23	J9,17	J10,22	
TOTAL DROP METER	P2,A17	J3,16	J10,19	
TOTAL IN	ISO4,COLL	J13,4		
TOTAL IN COM	ISO4,EMITTER	J13,7	JT4,1	
TOTAL IN METER	P2,B18	J3,18	J10,15	
TOTAL IN RELAY	P2,B22	ISO4,CATHODE		
TOTAL IN SIGNAL	P2,A26	J10,32		
TOTAL OUT METER	P2,C18	J3,15	J10.17	
TOURNAMENT KEYSW	P1,C5	J3,12		
TOWER 4TH LAMP	P2,C4	J3,6		
TOWER MID LAMP	P2,A5	J3,11		
TXD1	P1,B18	J19,3		
TXD1(+)	P1,B13	J14,4		
TXD1(-)	P1,A13	J14,5		
TXD4	P1,B21	J10,3		
TXD5	P1,B16	J18,3		
TXD6(+)	P1,C13	J15,2		
TXD6(-)	P1,B14	J15,9		
TXD6/DTR5	P1,A17	J18,6		
VBB	P1,B20	P2,C15		

| - Revised, || - New

©2003 BALLY GAMING AND SYSTEMS

|| Meter Detect Board, 5-Meter AS-03356-0609

☑Upright ☑Slant

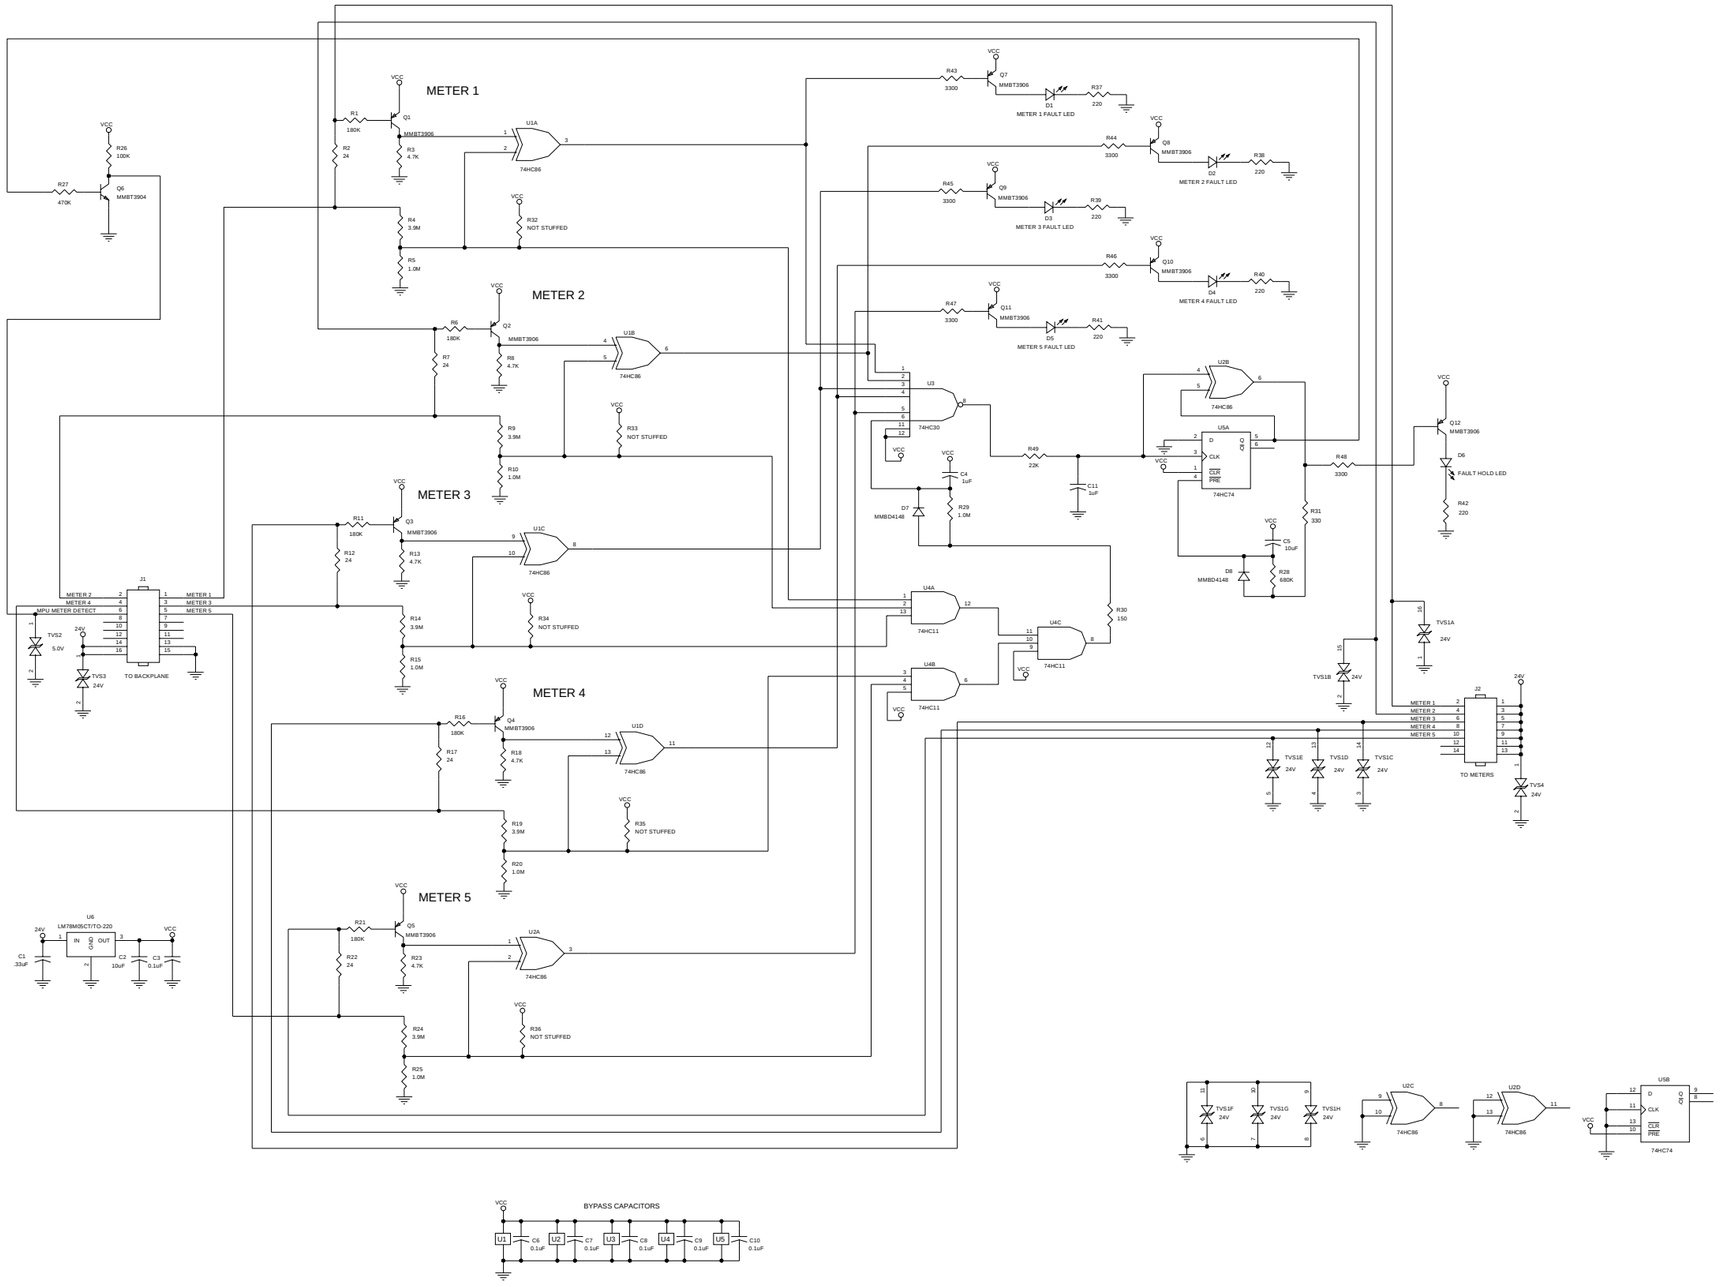

Card Rack / MPU Board

MPU Board (1 of 5) AS-03356-0438

☑Upright ☑Slant ☑ESlant

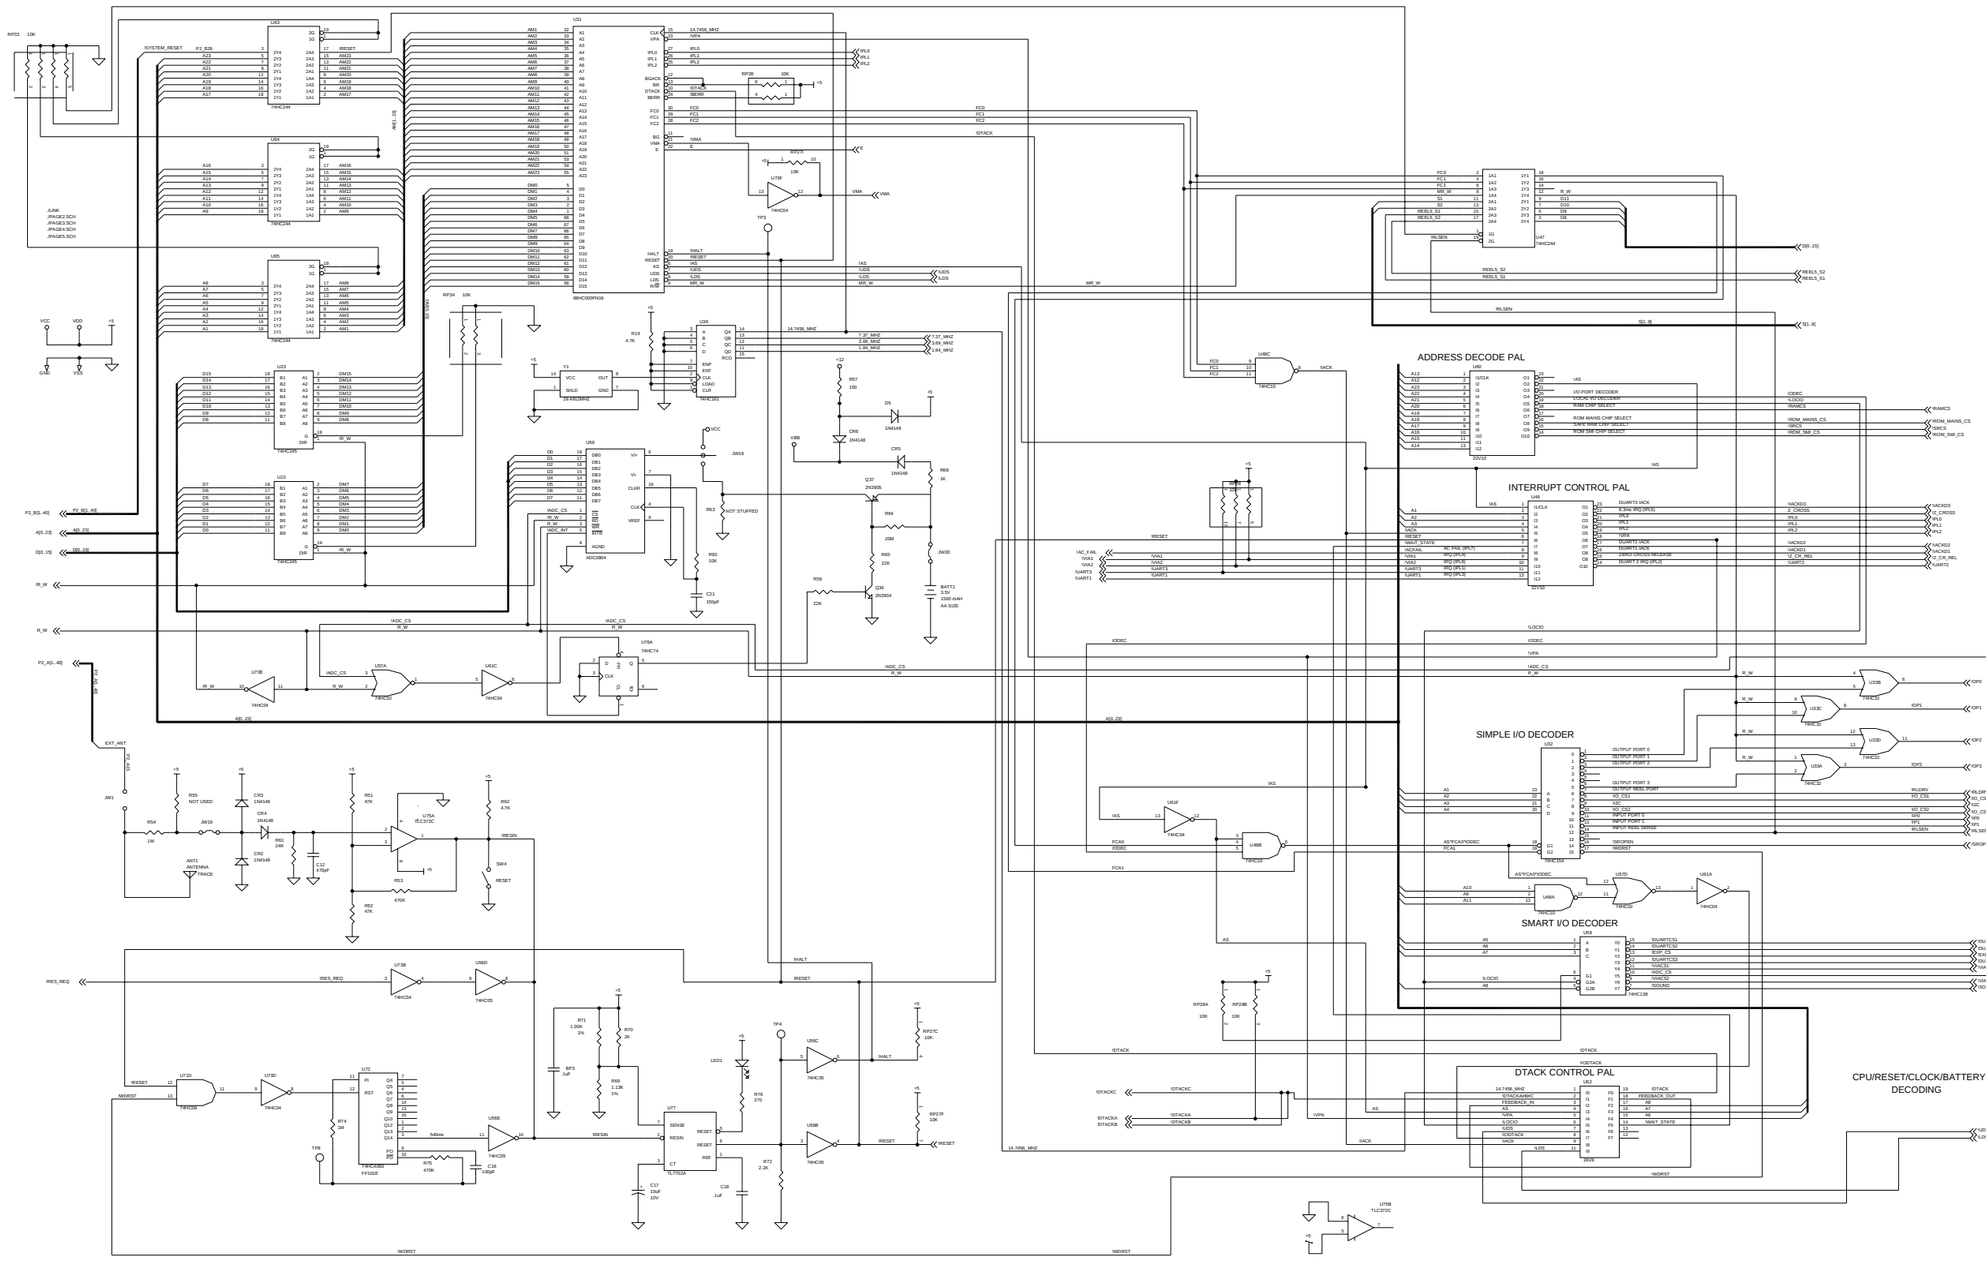

©2003 BALLY GAMING AND SYSTEMS

Card Rack / MPU Board

MPU Board (2 of 5) AS-03356-0438

☑Upright ☑Slant ☑ESlant

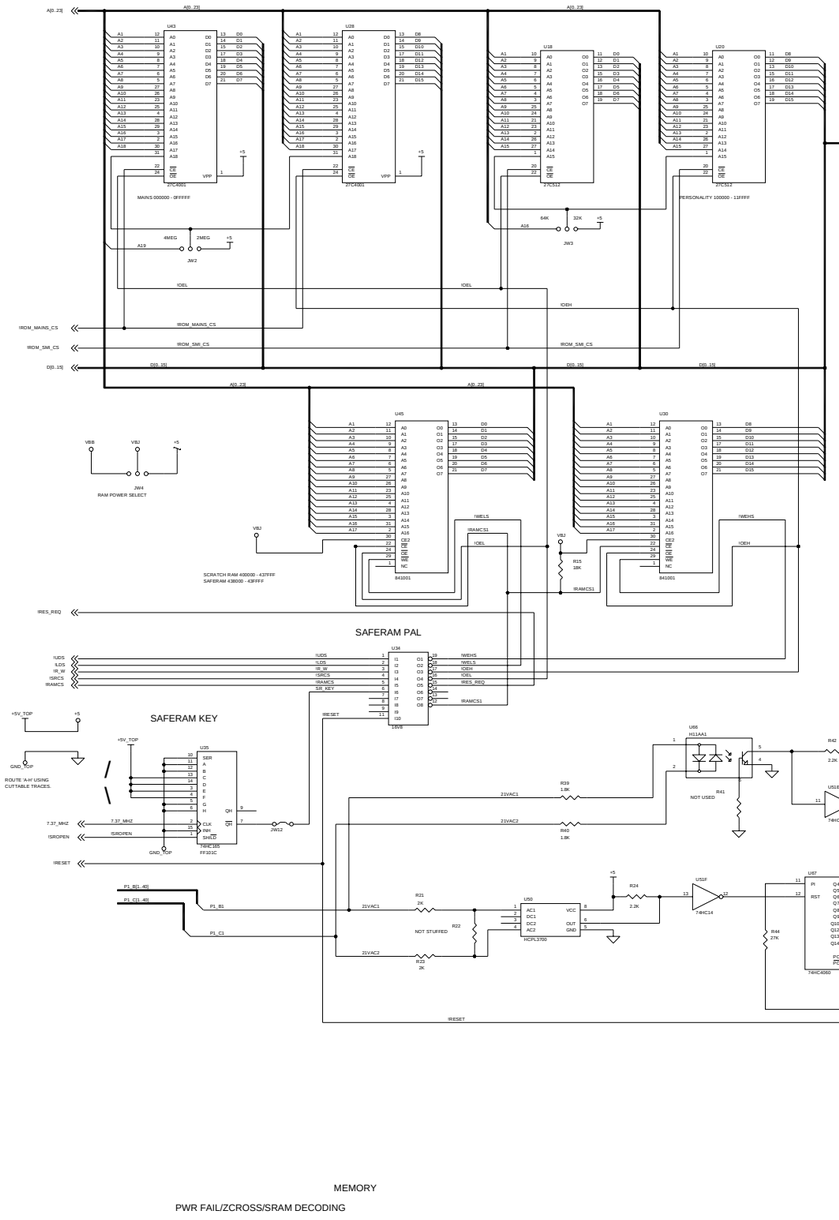

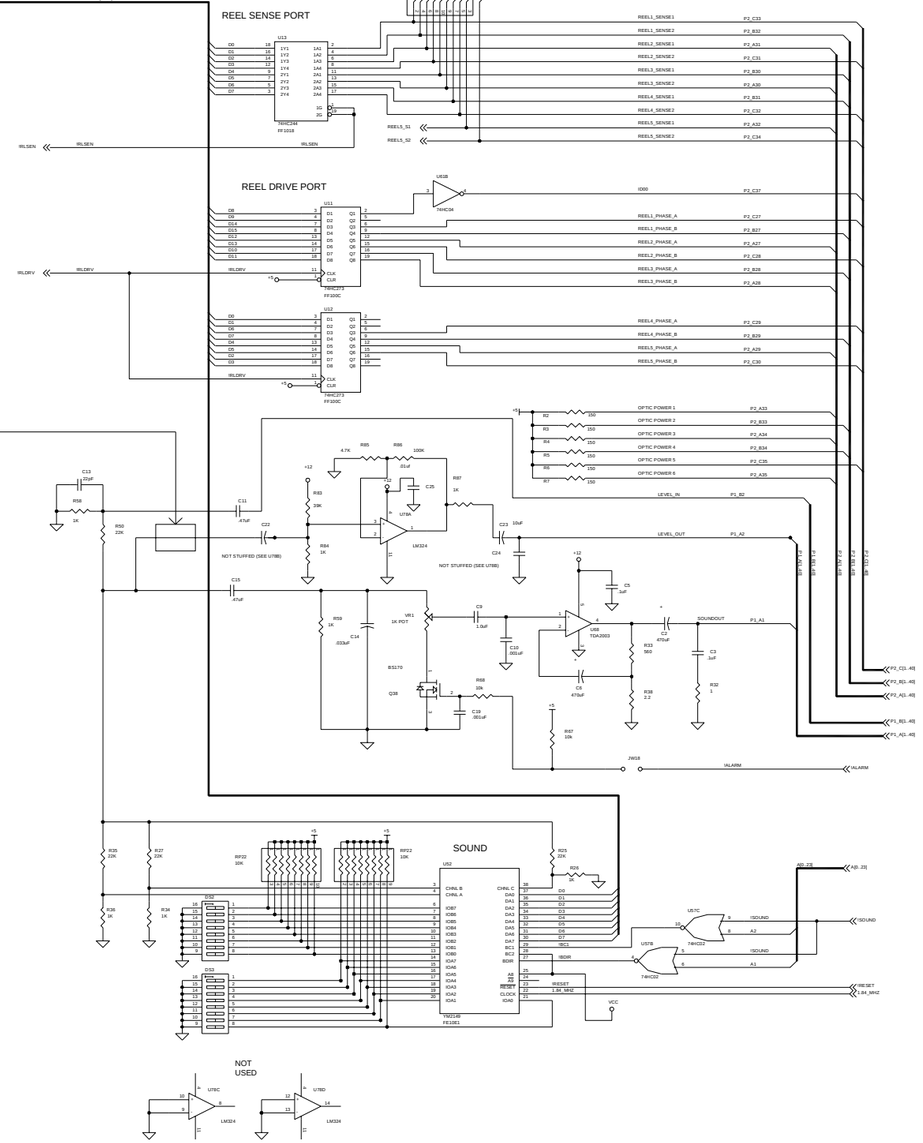

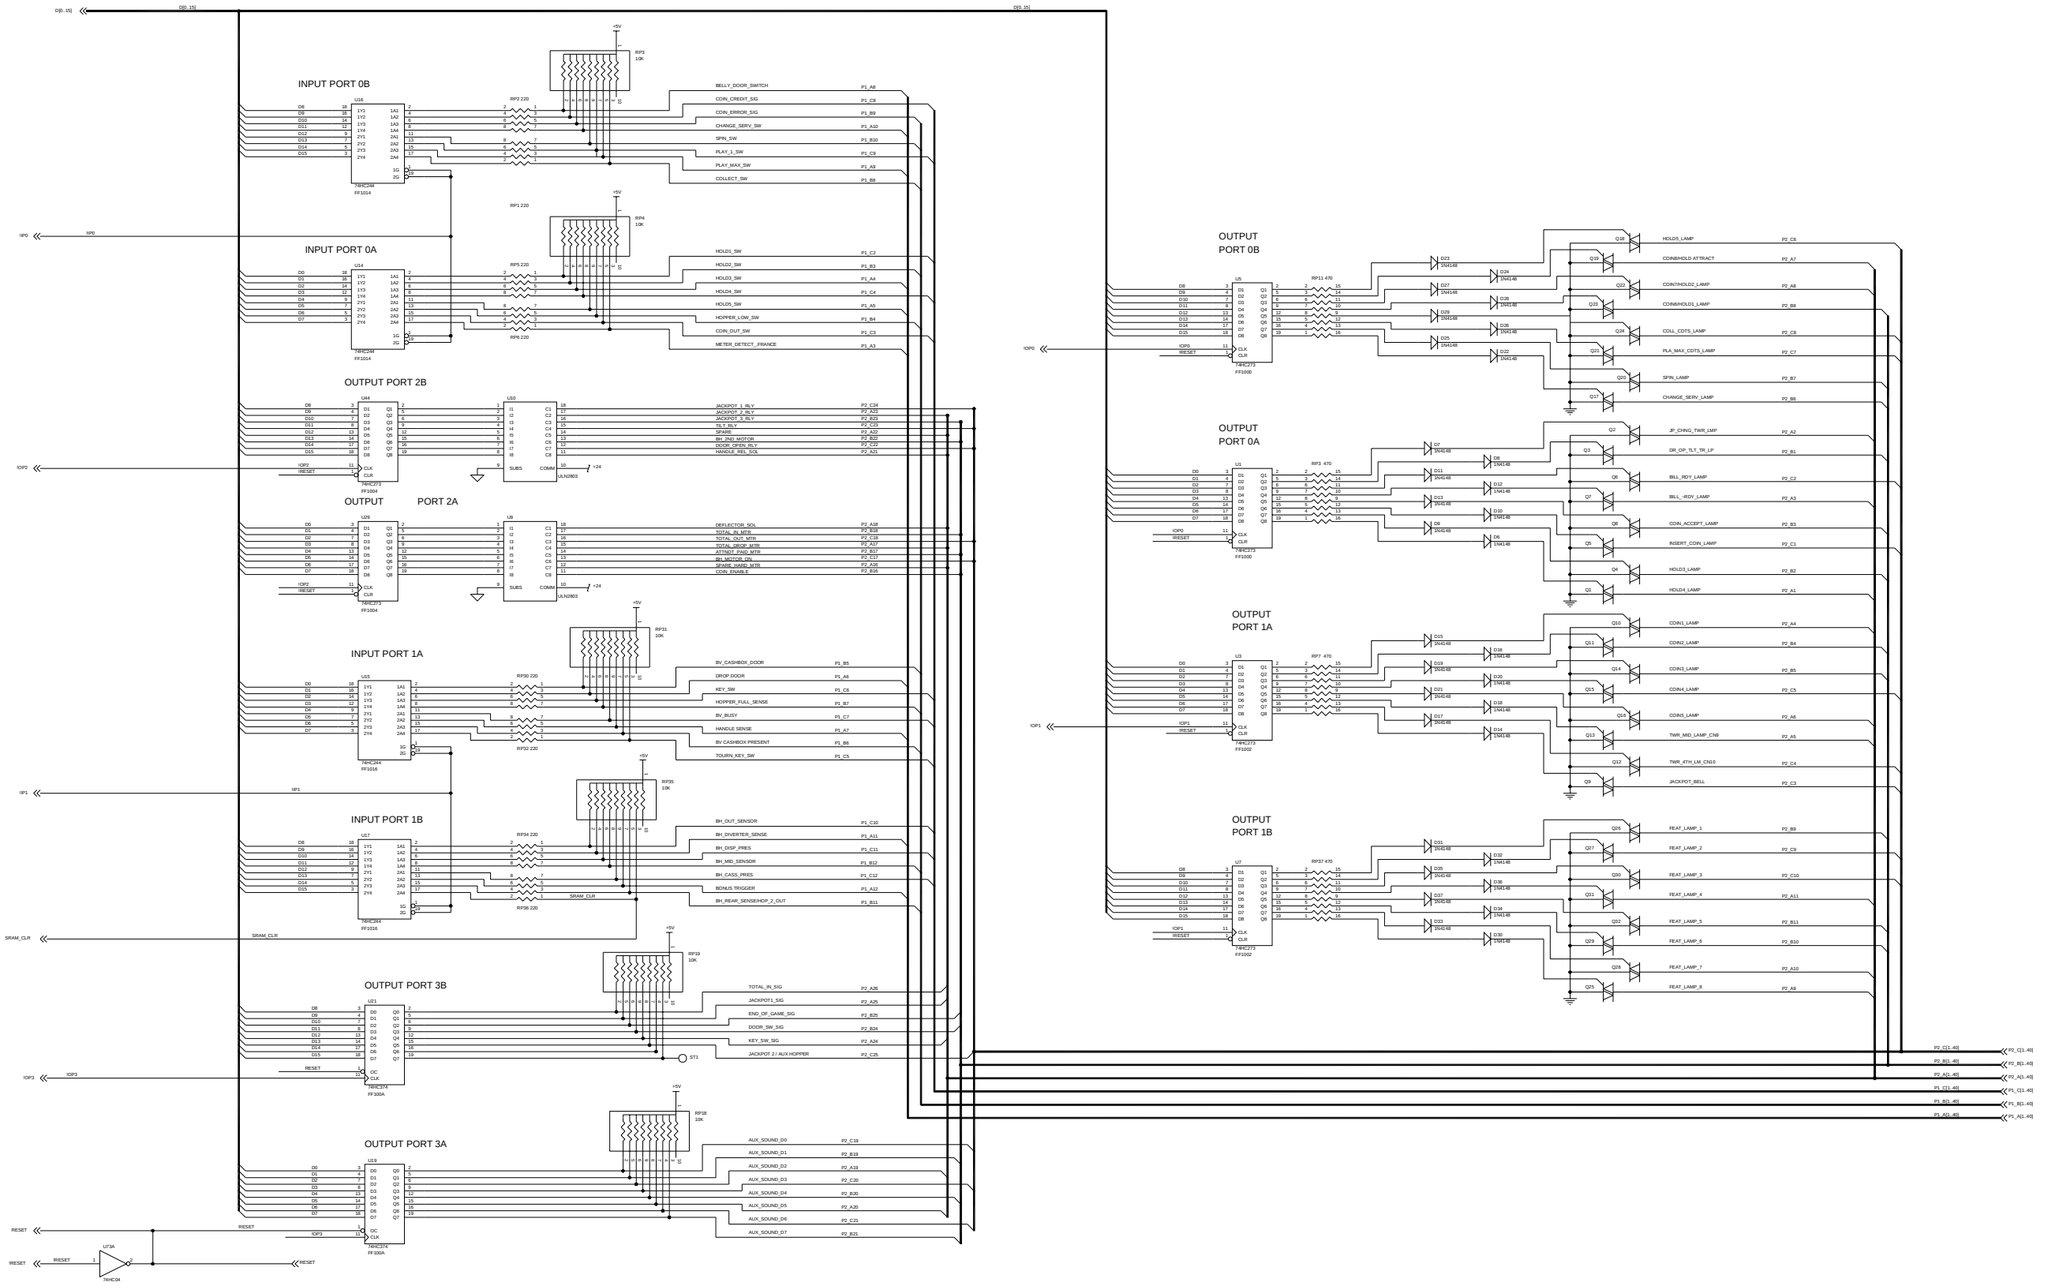

©2003 BALLY GAMING AND SYSTEMS

Card Rack / MPU Board

MPU Board (4 of 5) AS-03356-0438

☑Upright ☑Slant ☑ESlant

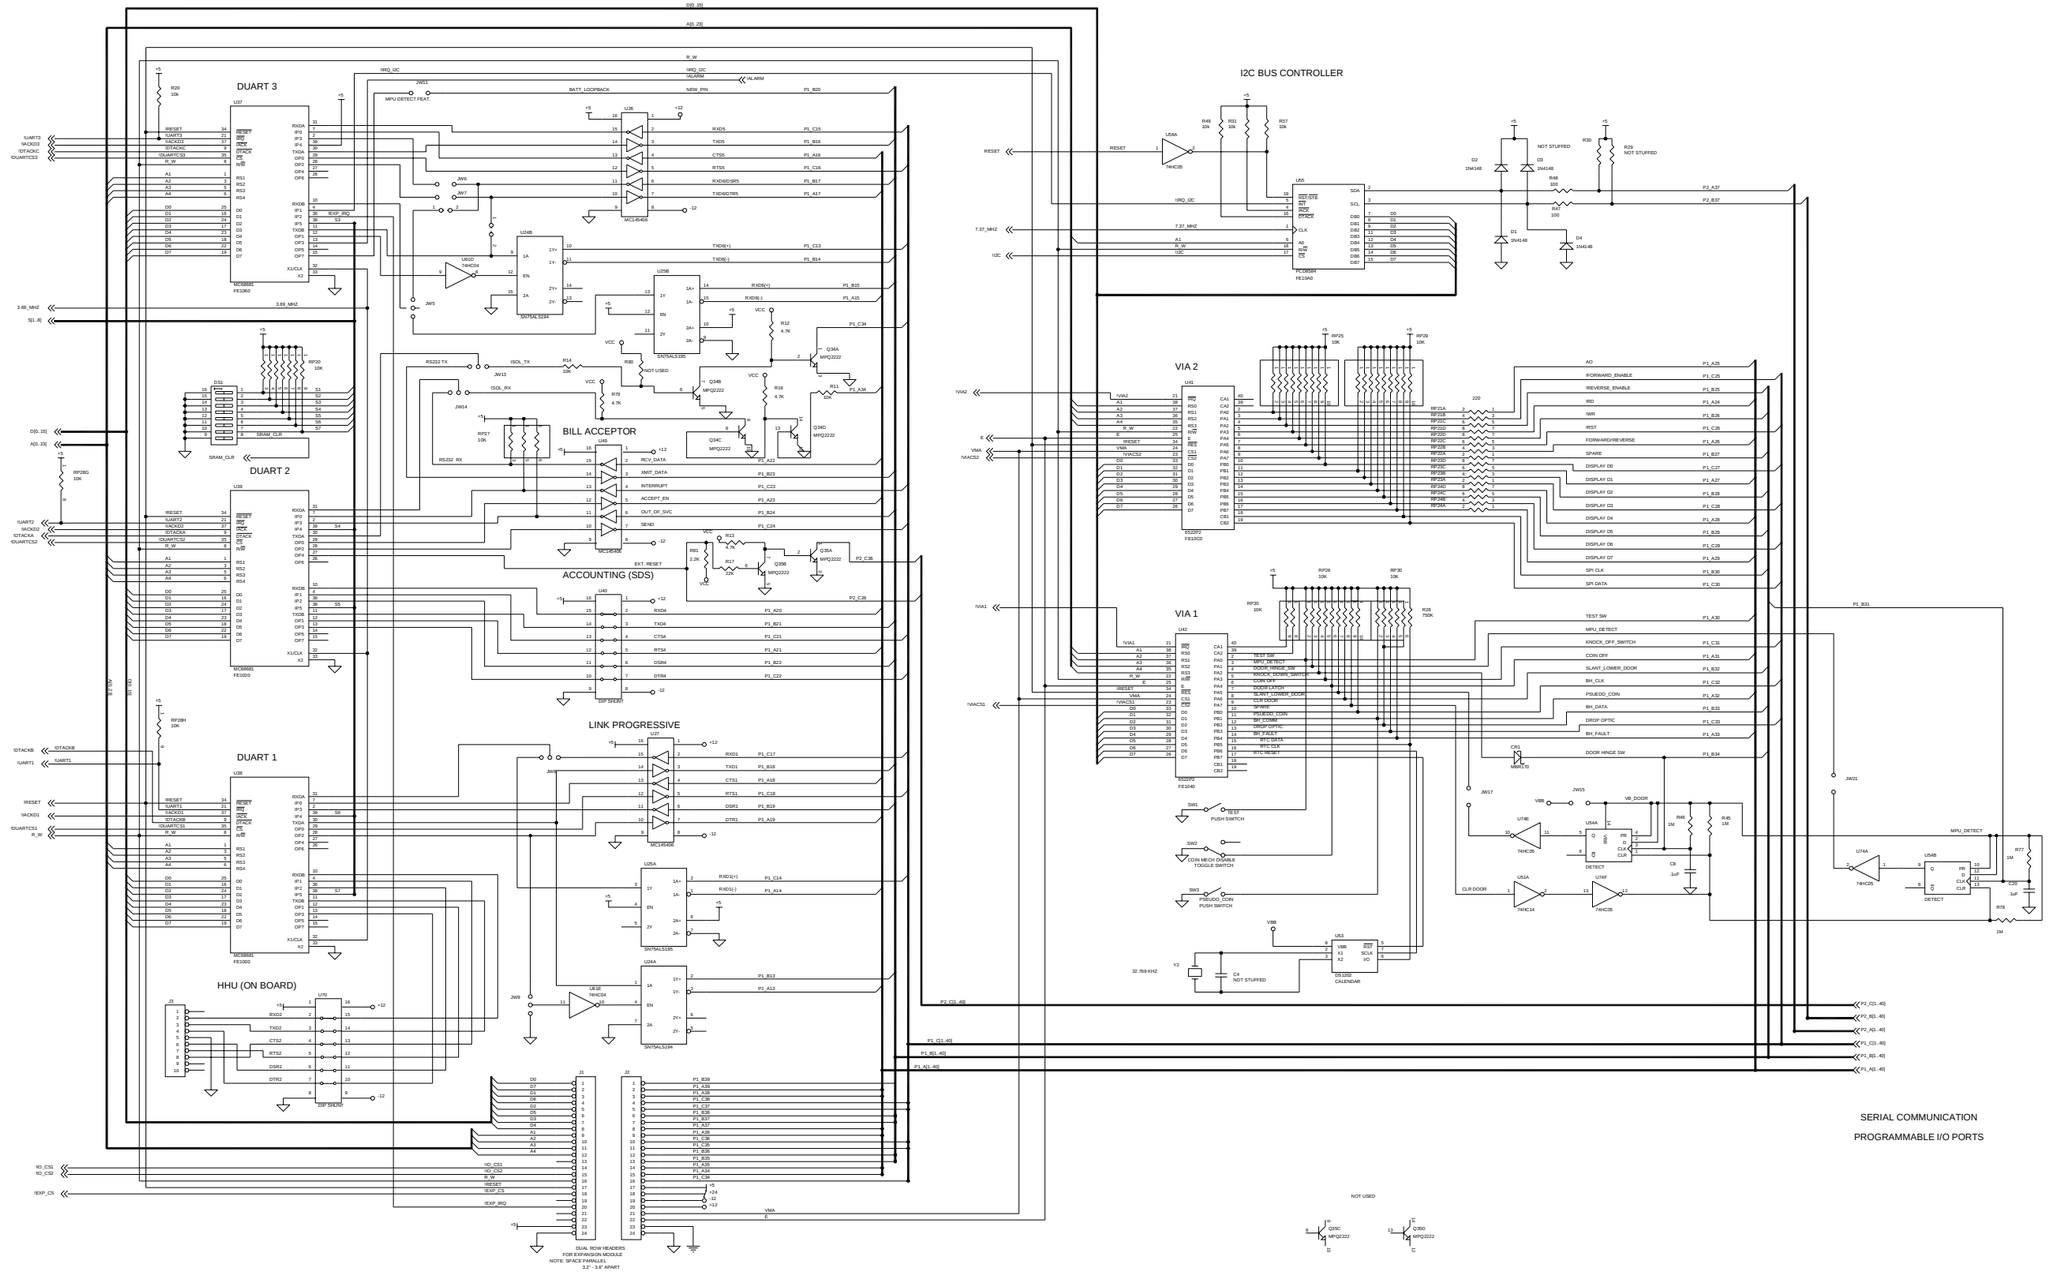

Card Rack / MPU Board

MPU Board (5 of 5) AS-03356-0438

☑Upright ☑Slant ☑ESlant

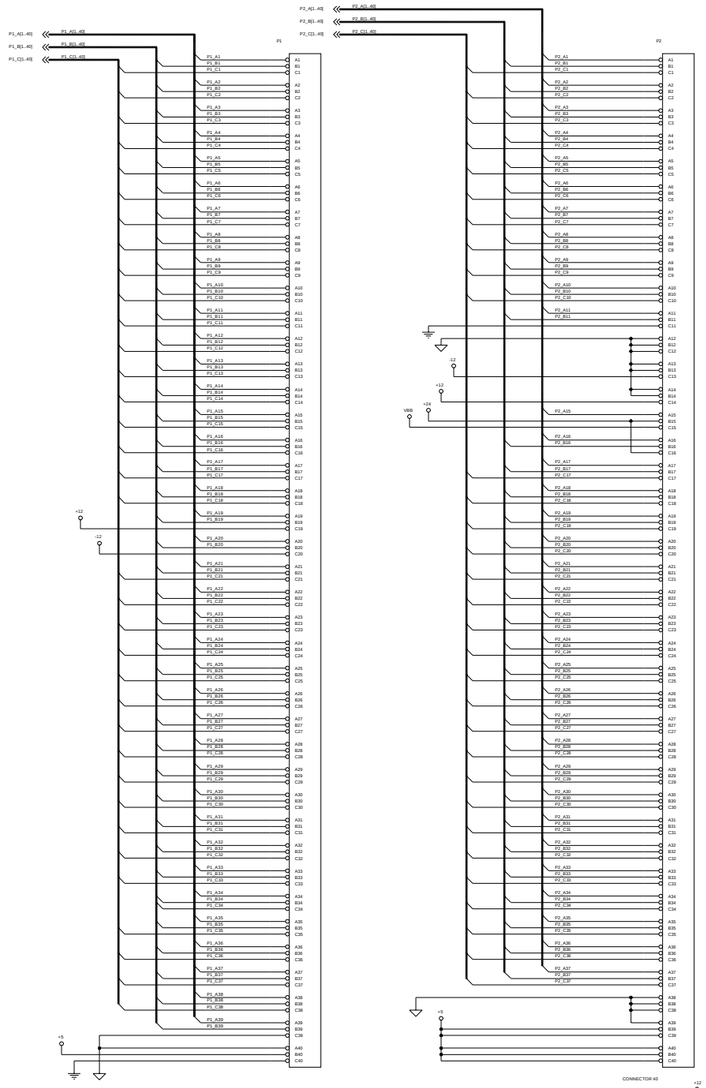

Refer	Part	Sheet
ANT1	ANTENNA	1
BATT1	3.5V	1
BP1	.01uf	5
BP3	.1uF	1
BP5-BP65	.01uf	5
BP66	.1uF	5
BP67	.01uf	5
BP68	.1uF	5
BP69-BP76	.01uf	5
BP77-BP84	.1uF	5
CR1	MBR170	4
CR2	1N4148	1
CR3	1N4148	1
CR4	1N4148	1
CR5	1N4148	1
CR6	1N4148	1
C2	470uF	2
C3	.1uF	2
C4	NOT STFD	4
C5	.1uF	2
C6	470uF	2
C7	100pF	2
C8	.1uF	4
C9	1.0uF	2
C10	.001uF	2
C11	.47uF	2
C12	470pF	1
C13	22pF	2
C14	.033uF	2
C15	.47uF	2
C16	100pF	1
C17	10uF	1
C18	.1uF	1
C19	.001uF	2
C20	.1uF	4
C21	150pF	1
C22	NOT	2
C23	10uF	2
C24	NOT STFD	2
C25	.01uf	2
DS1	SW	4
DS2	SW	2
DS3	SW	2
D1-D4	1N4148	4
D5	1N4148	1
D6-D37	1N4148	3
JT1	JTRACE	4
JT2	JTRACE	1
JW1	JUMPER	4
JW2	J3	2
JW3	J3	2
JW4	J3	2
JW5	J3	1
JW6-JW7	JUMPER	4
JW8	J3	4
JW9	J3	4
JW11	JUMPER	4
JW12	JUMPER	2
JW13	Jumper3	4
JW14	Jumper3	4
JW15	JUMPER	4
JW16	Jumper3	1
JW17	JUMPER	4
JW18	JUMPER	2
JW19	JUMPER	1
JW20	JUMPER	1
JW21	JUMPER	4
J1	HEAD24	4
J2	HEAD24	4
J3	HEAD10	4
LED1	LED	1
P1	CONN	5
P2	CONN	5
Q1-Q32	2N6070	3
Q34-Q35	MPQ2222	4
Q36	2N3904	1
Q37	2N3905	1
Q38	BS170	2
RP1-RP4	10K	3
RP5-RP12	220	3
RP13-RP16	470	3
RP17	10K	2
RP18-RP19	10K	3
RP20	10K	4
RP21-RP24	220	4
RP25-RP30	10K	4
RP31-RP32	10K	2
RP33-RP34	10K	1
R2-R7	150	2
R8	10K	2
R11	4.7K	4
R12	4.7K	4
R13	4.7K	4
R14	470	4
R15	18K	2
R16	4.7K	4
R17	22K	4
R19	4.7K	1
R20	10K	4
R21	2K	2
R22	NOT STFD	2
R23	2K	2
R24	2.2K	2
R25	22K	2
R26	1K	2
R27	22K	2
R28	750K	4
R29	NOT STFD	4
R30	NOT STFD	4
R31	10K	4
R32	1	4
R33	560	2
R34	1K	2
R35	22K	2
R36	1K	2
R37	10K	4
R38	2.2	2
R39	1.8K	2
R40	1.8K	2
R41	NOT STFD	2
R42	2.2K	2
R43	6.2K	2
R44	27K	2
R45	1M	4
R46	1M	4
R47	100	4
R48	100	4
R49	10K	4
R50	22K	2
R51	47K	1
R52	47K	1
R53	470K	1
R54	1M	1
R55	NOT STFD	1
R56	22K	1
R57	150	1
R58	1K	2
R59	1K	2
R60	2.2K	2
R61	24K	1
R62	4.7K	1
R63	NOT STFD	1
R64	20M	1
R65	22K	1
R66	1K	1
R67	10K	2
R68	10K	2
R69	1.13K	1
R70	2K	1
R71	1.00K	1
R72	2.2K	1
R73	2.2K	2
R74	1M	1
R75	470K	1
R76	270	1
R77	1M	4
R78	1M	4
R79	4.7K	4
R80	4.7K	4
R81	2.2K	4
R82	10K	1
R83	39K	2
R84	1K	2
R85	4.7K	2
R86	100K	2
R87	1K	2
ST1	SPARETP	3
SW1	PUSH	4
SW2	TOGGLSW	4
SW3	PUSH	4
SW4	RESET	1
TP1	TEST	2
TP2	TEST	2
TP3	TEST	1
TP4	TEST	1
TP5	TEST	2
TP6	TEST	2
TP7	TEST	2
TP8	TEST	1
U1	74HC273	3
U2	DELETED	3
U3	74HC273	3
U4	DELETED	3
U5	74HC273	3
U6	DELETED	3
U7	74HC273	3
U8	DELETED	3
U9	ULN2803	3
U10	ULN2803	3
U11	74HC273	2
U12	74HC273	2
U13	74HC244	2
U14	74HC244	3
U15	74HC244	3
U16	74HC244	3
U17	74HC244	3
U18	27C512	2
U19	74HC374	3
U20	27C512	2
U21	74HC374	3
U22	74HC245	1
U23	74HC245	1
U24A	75194	4
U24B	75194	4
U25A	75195	4
U25B	75195	4
U26	MAX1406	4
U27	MAX1406	4
U28	27C4001	2
U29	74HC273	3
U30	841001	2
U31	68FN16	1
U32	74HC154	1
U33	74HC32	1
U34	16V8	2
U35	74HC165	2
U36	74HC161	1
U37-U38	MC68681	4
U40	MAX1406	4
U41,U42	6522P2	4
U43	27C4001	2
U44	74HC273	3
U45	841001	2
U46	22V10	1
U47	74HC244	1
U48	74HC10	1
U49	MAX1406	4
U50	HCPL37	2
U51A	74HC14	4
U51E	74HC14	2
U51F	74HC14	2
U52	YM2149	2
U53	DS1202	4
U54	DETECT	4
U55	PCD8584	4
U56A	74HC05	4
U56B	74HC05	1
U56C	74HC05	1
U56D	74HC05	1
U56E	74HC05	1
U57A	74HC02	1
U57B	74HC02	2
U57C	74HC02	2
U57D	74HC02	1
U58	74HC138	1
U59	ADC0804	1
U60	22V10	1
U61A	74HC04	1
U61B	74HC04	2
U61C	74HC04	1
U61D	74HC04	4
U61E	74HC04	4
U61F	74HC04	1
U62	16V8	1
U63-U66	74HC244	1
U66	H11AA1	2
U67	744060	2
U68	TDA2003	2
U69A	74HC74	2
U69B	74HC74	2
U70	MAX1406	4
U71D	74HC08	1
U72	744060	1
U73A	74HC04	3
U73B	74HC04	1
U73C	74HC04	2
U73D	74HC04	1
U73E	74HC04	1
U73F	74HC04	1
U74	74HC05	4
U75A	TLC372C	1
U75B	TLC372C	1
U76A	74HC74	1
U77	TL7702A	1
U78	LM324	2
VR1	1K	2
Y1	29.4MHZ	1
Y2	32.7KHZ	4

SIGNAL NAME	PAGE
!AC_FAIL	1,2
!ADC_CS	1
!ADC_INT	1
!ALARM	2,4
!AS	1
!BC1	2
!BDIR	2
!BERR	1
!DTACK	1
!DTACKA	1,4
!DTACKB	1,4
!DTACKC	1,4
!DUARTCS1	1,4
!DUARTCS2	1,4
!DUARTCS3	1,4
!EXP_CS	1,4
!EXP_IRQ	4
!HALT	1
!I2C	1,4
!IACK	1
!IACKD1	1,4
!IACKD2	1,4
!IACKD3	1,4
!IC_CS1	1,4
!IC_CS2	1,4
!IODTACK	1,4
!IP0	1,3
!IP1	1,3
!IRQ_I2C	4
!LDS	1,2
!LOCIO	1
!OEH	2
!OEL	2
!OP0	1,3
!OP1	1,3
!OP2	1,3
!OP3	1,3
!R_W	1,2
!RAMCS	1,2
!RAMCS1	2
!RES_REQ	1,2
!RESET	1,2,3,4
!RESIN	1
!RLDRV	1,2
!RLSEN	1,2
!ROM_MAINS_CS	1,2
!ROM_SMI_CS	1,2
!SOUND	1,2
!SRCS	1,2
!SROPEN	1,2
!UART1	1,4
!UART2	1,4
!UART3	1,4
!UDS	1,2
!VIA1	1,4
!VIA2	1,4
!VIACS1	1,4
!VIACS2	1,4
!VMA	1
!VPA	1
!WAIT_STATE	1
!WDRST	1
!WEHS	2
!WELS	2
/Z_CR_REL	1,2
/Z_CROSS	1,2
1.84_MHZ	1,2
14.7456_MHZ	1
21VAC2	2
3.69_MHZ	1,4
7.37_MHZ	1,2,4
E	1,4
FC0	1
FC1	1
FC2	1
FCA0	1
FEEDBACK_IN	1
IODEC	1
IPL0	1
IPL1	1
IPL2	1
MR_W	1
R_W	1,4
RESET	3,4
SR_KEY	2
SRAM_CLR	3,4
VMA	1,4
ZCROSS	1

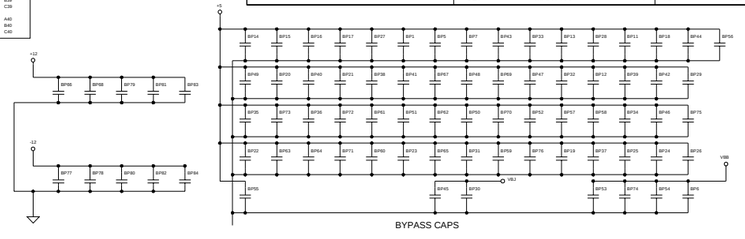

BACKPLANE CONNECTIONS

BYPASS CAPS

©2003 BALLY GAMING AND SYSTEMS

Card Rack / MPU Board

MPU Board (1 of 9) AS-03356-0424

☑Upright ☑Slant ☑ESlant

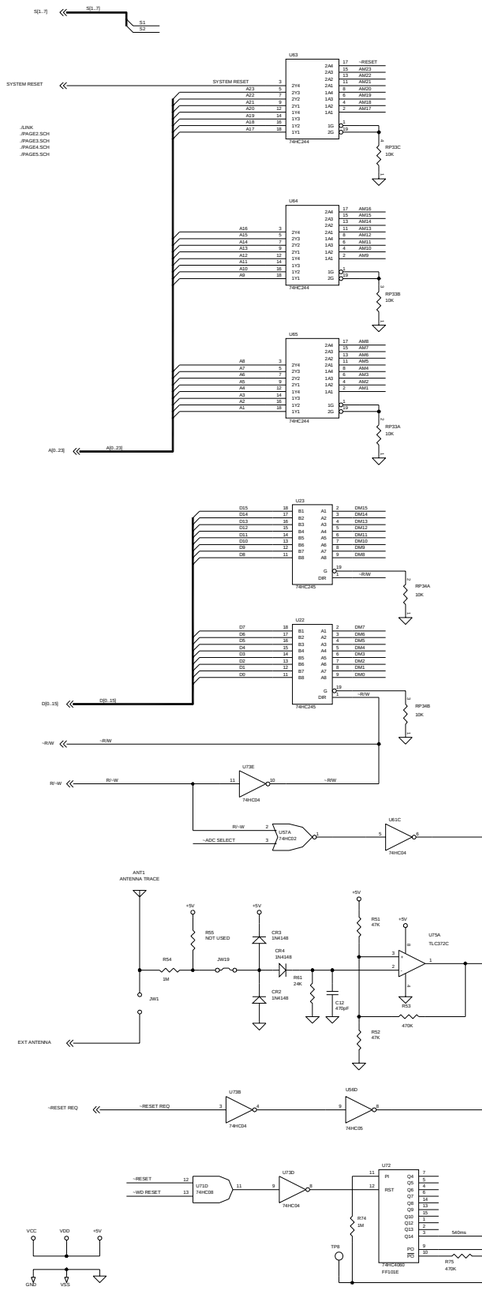

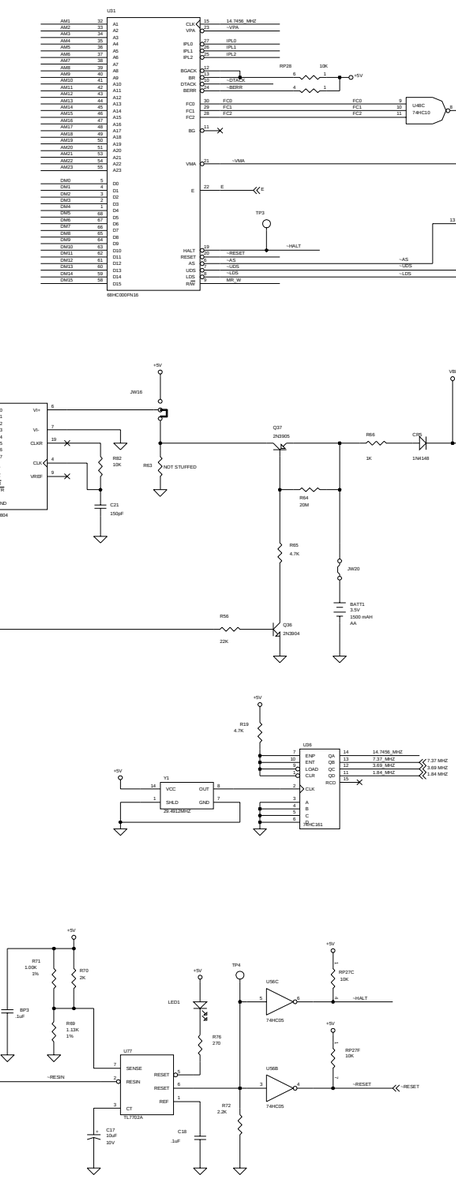



ADDRESS DECODE PAL



INTERRUPT CONTROL PAL

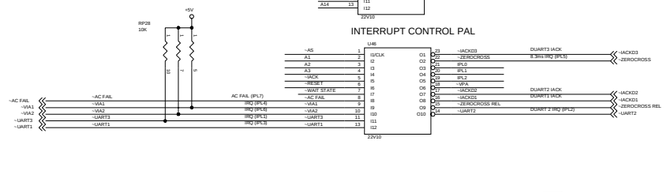

SIMPLE I/O DECODER

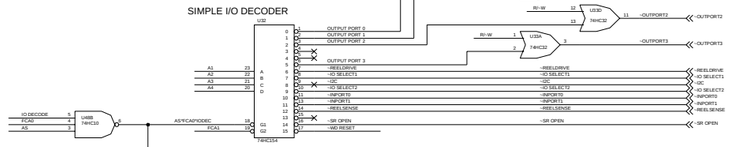

SMART I/O DECODER



DTACK CONTROL PAL

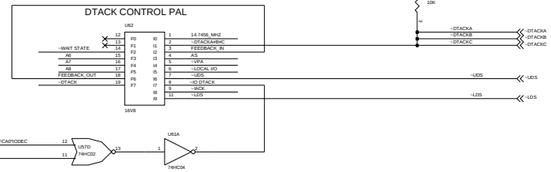

©2003 BALLY GAMING AND SYSTEMS

Card Rack / MPU Board

MPU Board (2 of 9) AS-03356-0424

☑Upright ☑Slant ☑ESlant

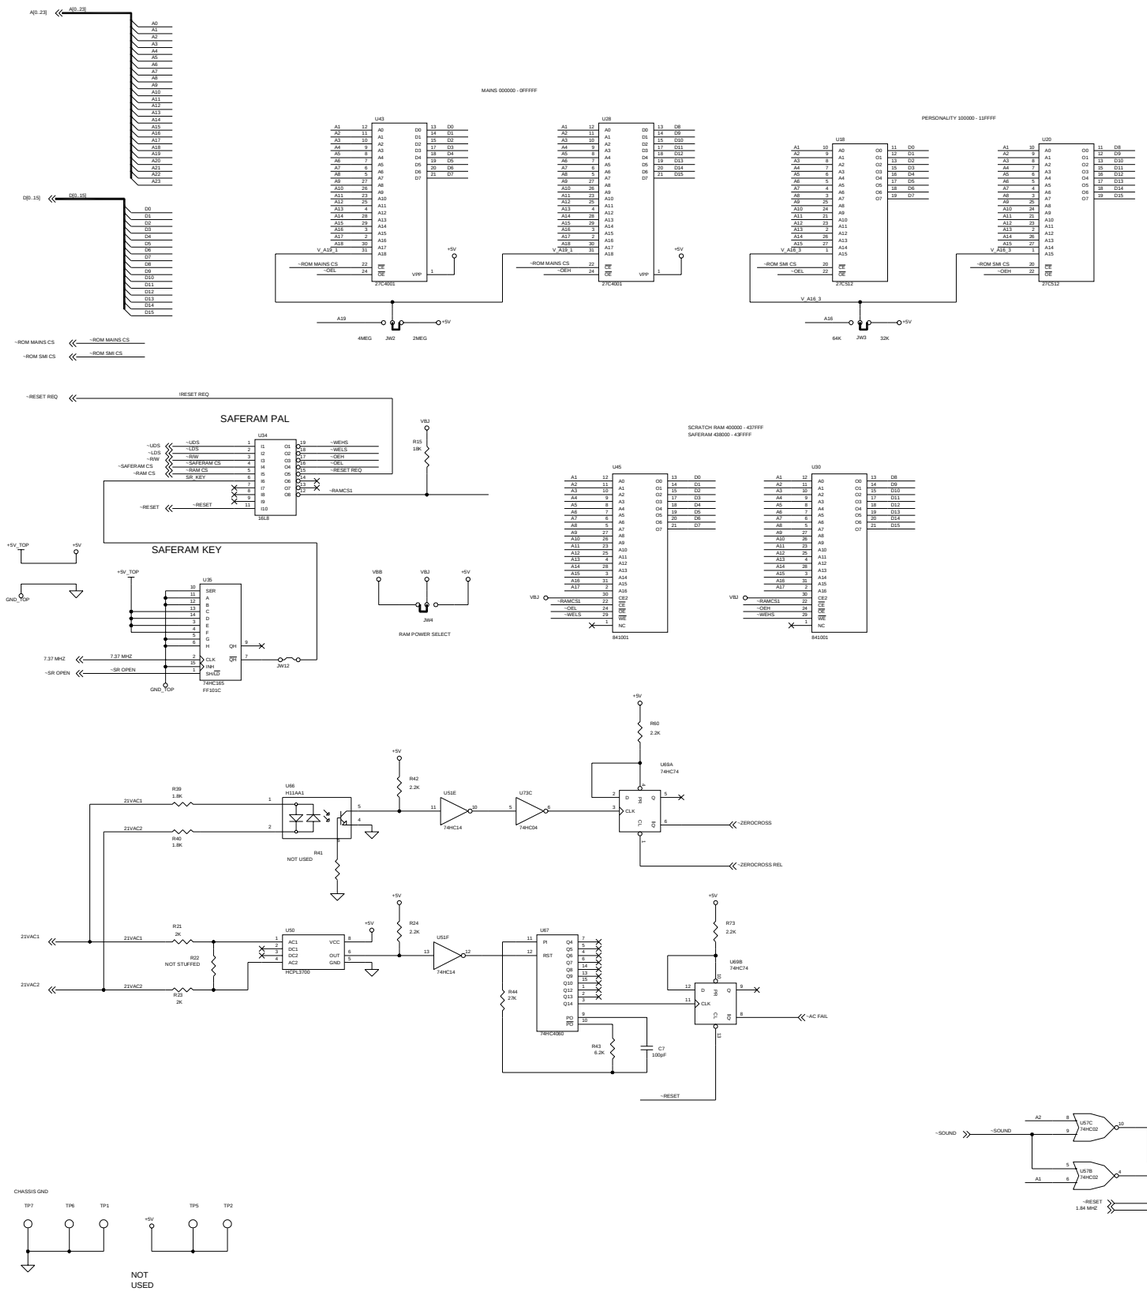

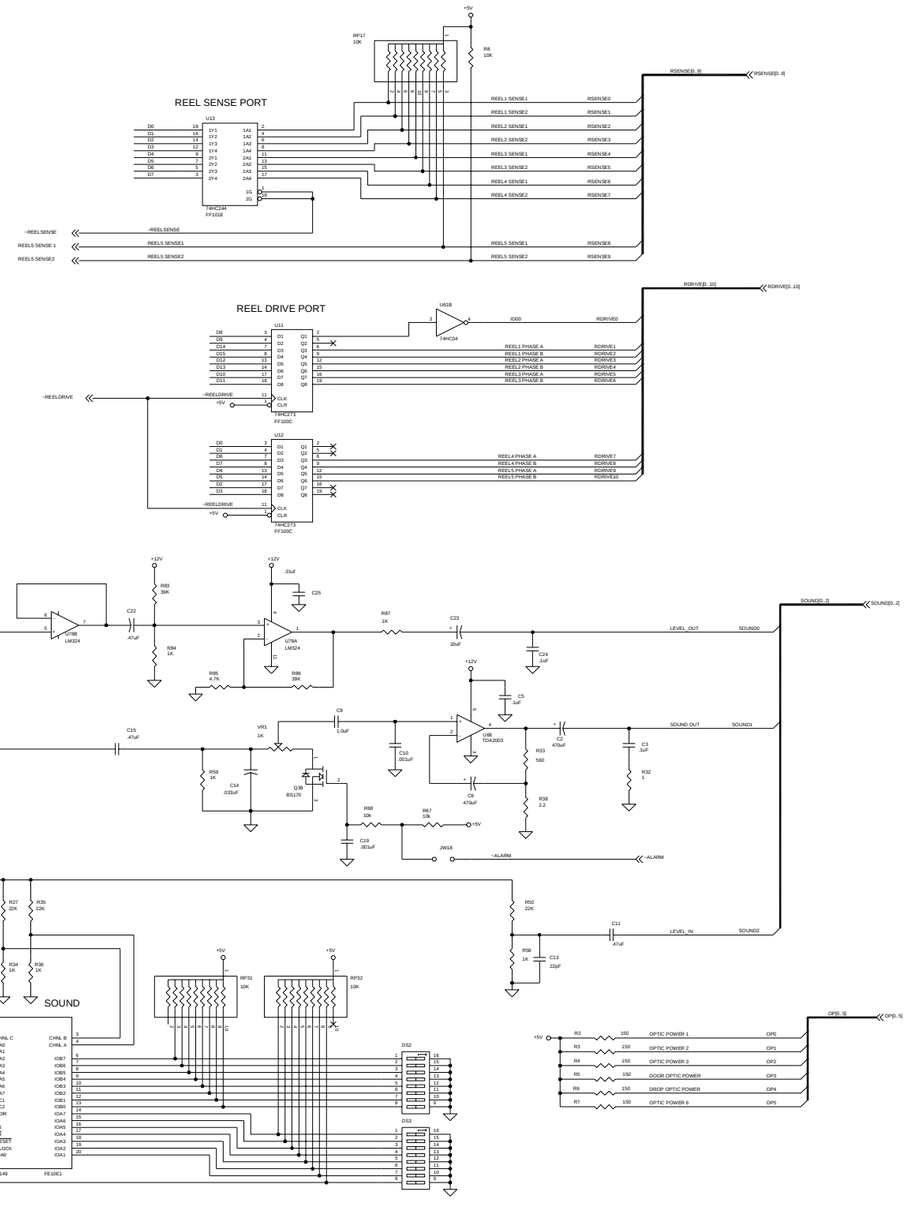

©2003 BALLY GAMING AND SYSTEMS

Card Rack / MPU Board

MPU Board (3 of 9) AS-03356-0424

☑Upright ☑Slant ☑ESlant

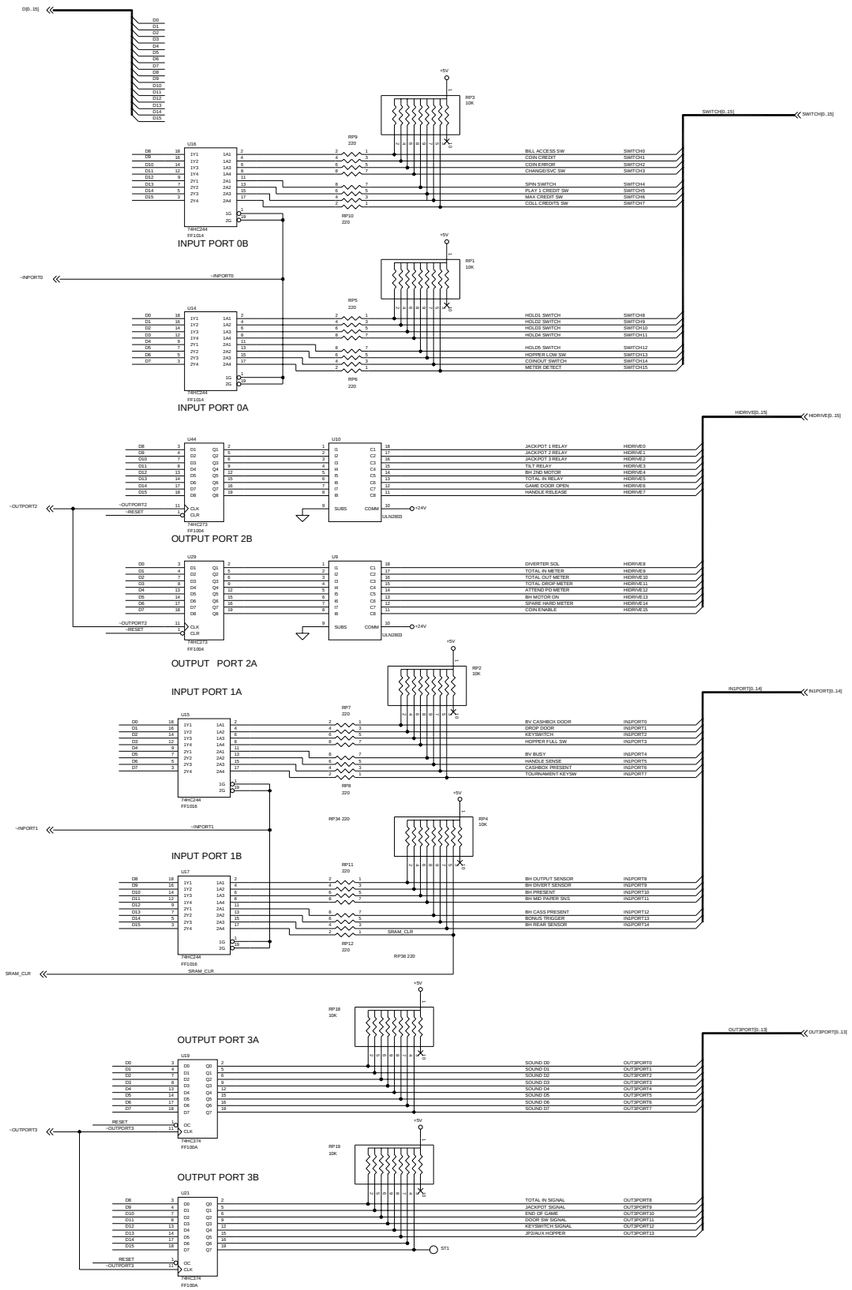

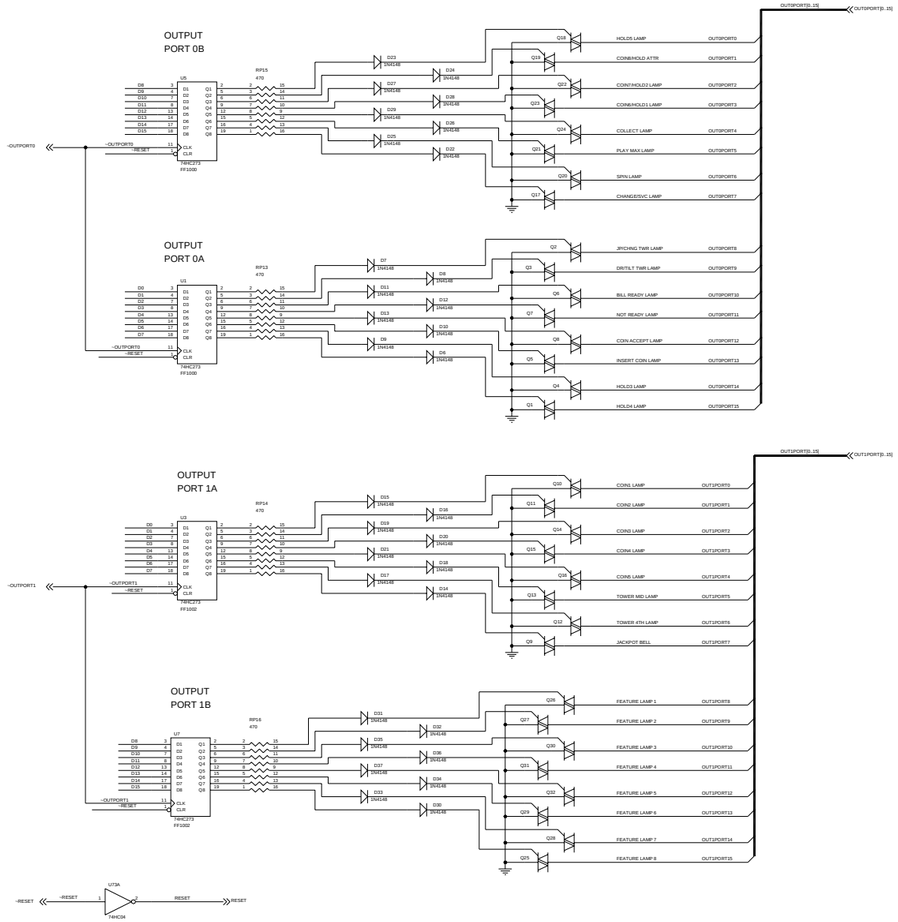

Card Rack / MPU Board

MPU Board (4 of 9) AS-03356-0424

☑Upright ☑Slant ☑ESlant

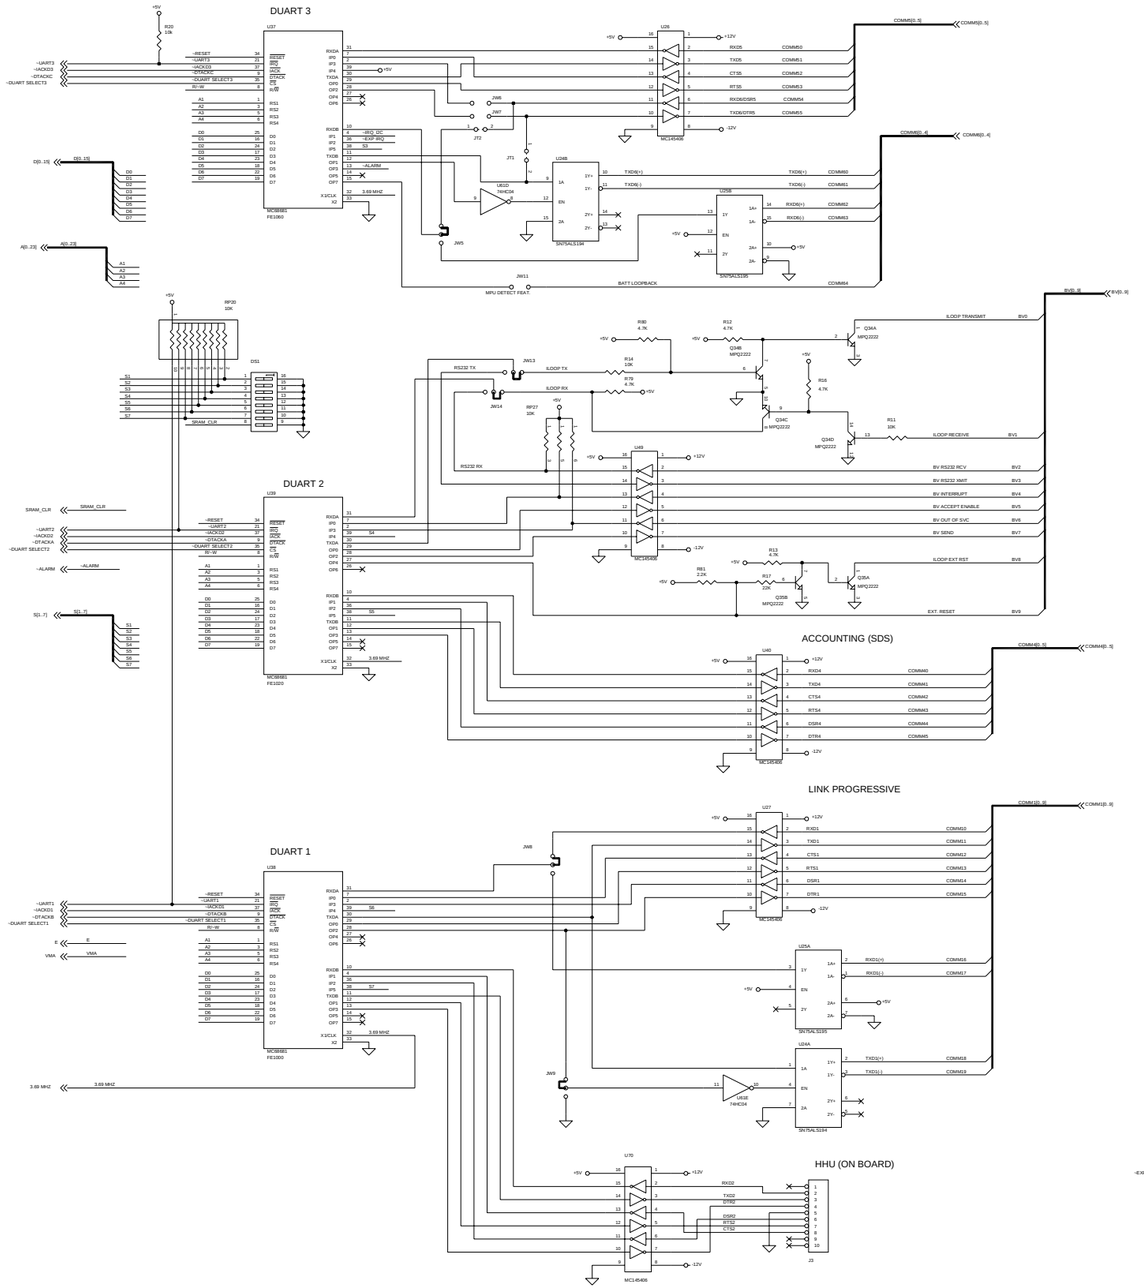

©2003 BALLY GAMING AND SYSTEMS

| - Revised, || - New

Card Rack / MPU Board

MPU Board (5 of 9) AS-03356-0424

☑Upright ☑Slant ☑ESlant

P1

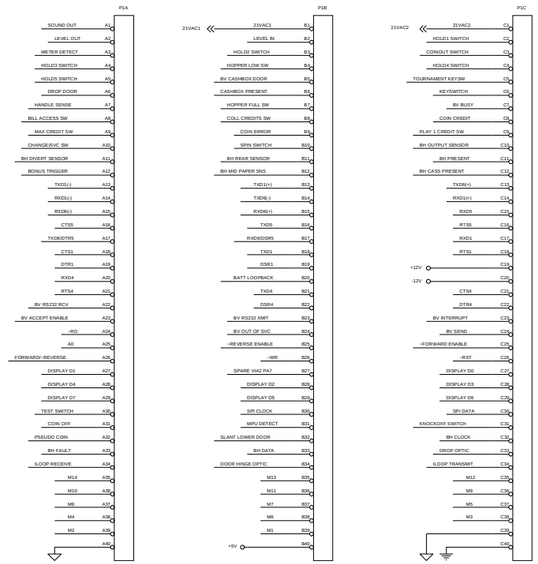

P2

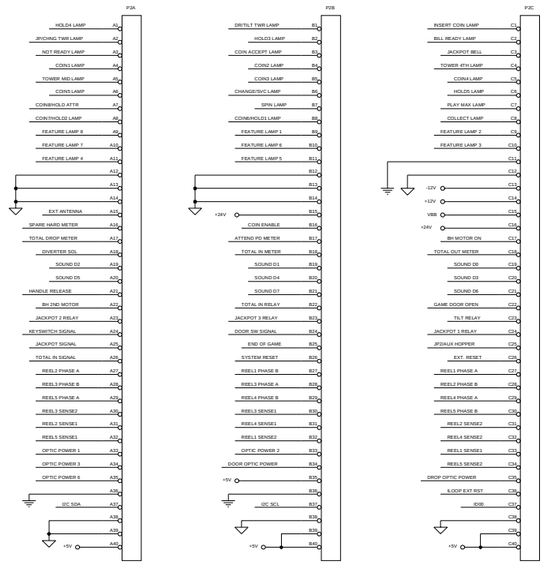

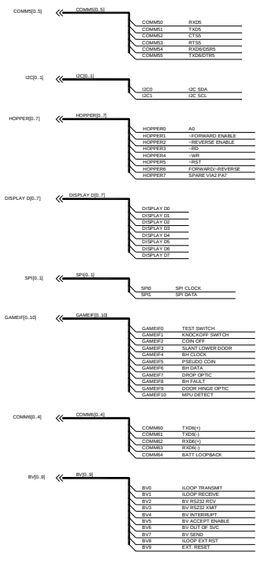

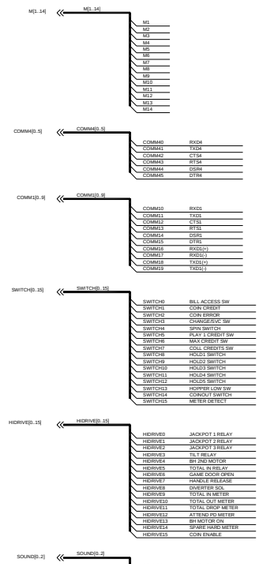

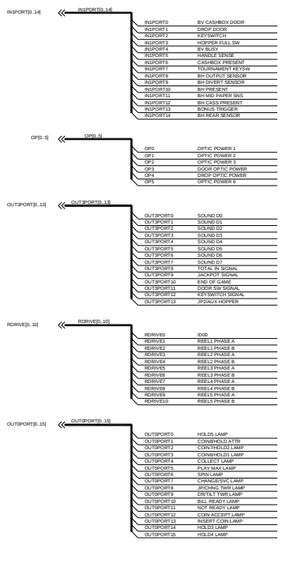

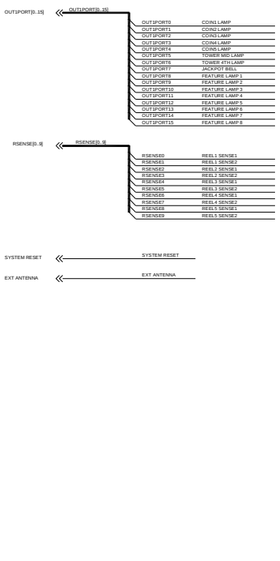

BYPASS CAPACITORS

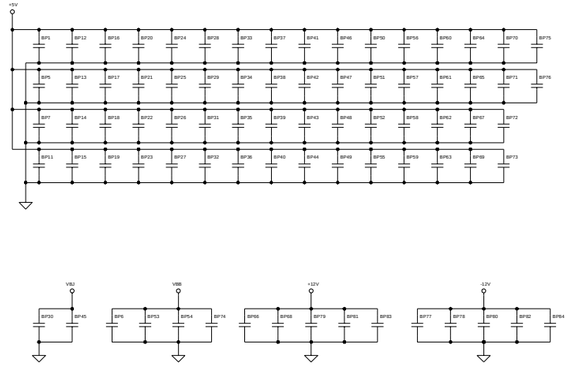

©2003 BALLY GAMING AND SYSTEMS

| - Revised, || - New

ProSlot-6000™

COMPONENT LOCATOR CHART

COMP.	ID	SHEET	GRID	COMP.	ID	SHEET	GRID	COMP.	ID	SHEET	GRID	COMP.	ID	SHEET	GRID
ANT1	ANTENNA TRACE	1	C-10	BP74	.01uF	5	C-2	D27	1N4148	3	G-4	Q28	2N6070	3	C-3
BATT1	3.5V	1	D-6	BP75	.01uF	5	D-1	D28	1N4148	3	G-4	Q29	2N6070	3	C-4
BP1	.01uF	5	D-3	BP76	.01uF	5	D-1	D29	1N4148	3	G-4	Q30	2N6070	3	C-3
BP3	.1uF	1	B-8	BP77	.1uF	5	C-2	D30	1N4148	3	C-4	Q31	2N6070	3	C-4
BP5	.01uF	5	D-3	BP78	.1uF	5	C-1	D31	1N4148	3	C-4	Q32	2N6070	3	C-3
BP6	.01uF	5	C-3	BP79	.1uF	5	C-2	D32	1N4148	3	C-4	Q34A	MPQ2222	4	F-7
BP7	.01uF	5	D-3	BP80	.1uF	5	C-1	D33	1N4148	3	C-4	Q34B	MPQ2222	4	F-7
BP11	.01uF	5	D-3	BP81	.1uF	5	C-2	D34	1N4148	3	C-4	Q34C	MPQ2222	4	F-7
BP12	.01uF	5	D-3	BP82	.1uF	5	C-1	D35	1N4148	3	C-4	Q34D	MPQ2222	4	F-7
BP13	.01uF	5	D-3	BP83	.1uF	5	C-2	D36	1N4148	3	C-4	Q35A	MPQ2222	4	E-7
BP14	.01uF	5	D-3	BP84	.1uF	5	C-1	D37	1N4148	3	C-4	Q35B	MPQ2222	4	E-7
BP15	.01uF	5	D-3	CR1	MBR170	4	D-3	JT1	JUMPER TRACE	4	H-8	Q35C	MPQ2222	4	B-2
BP16	.01uF	5	D-3	CR2	1N4148	1	C-9	JT2	JUMPER TRACE	4	H-8	Q35D	MPQ2222	4	B-1
BP17	.01uF	5	D-3	CR3	1N4148	1	C-9	JW1	JUMPER 2	1	C-10	Q36	2N3904	1	D-6
BP18	.01uF	5	D-3	CR4	1N4148	1	C-9	JW2	JUMPER 3	2	G-9	Q37	2N3905	1	E-6
BP19	.01uF	5	D-3	CR5	1N4148	1	E-6	JW3	JUMPER 3	2	G-7	Q38	BS170	2	D-4
BP20	.01uF	5	D-3	CR6	1N4148	1	E-5	JW4	JUMPER 3	2	E-9	RP1	10K	3	G-9
BP21	.01uF	5	D-3	C2	470uF	2	D-2	JW5	JUMPER 3	4	G-8	RP2	10K	3	E-9
BP22	.01uF	5	D-3	C3	.1uF	2	D-2	JW6	JUMPER 2	4	H-8	RP3	10K	3	H-9
BP23	.01uF	5	D-3	C4	NOT STUFFED	4	C-4	JW7	JUMPER 2	4	H-8	RP4	10K	3	D-9
BP24	.01uF	5	D-3	C5	.1uF	2	D-3	JW8	JUMPER 3	4	C-8	RP5A	220	3	G-9
BP25	.01uF	5	D-3	C6	470uF	2	D-3	JW9	JUMPER 3	4	B-8	RP5B	220	3	G-9
BP26	.01uF	5	D-3	C7	100pF	2	C-8	JW11	JUMPER 2	4	G-8	RP5C	220	3	G-9
BP27	.01uF	5	D-3	C8	.1uF	4	C-2	JW12	JUMPER 2	2	E-9	RP5D	220	3	G-9
BP28	.01uF	5	D-3	C9	1.0uF	2	D-3	JW13	JUMPER 3	4	F-8	RP6A	220	3	F-9
BP29	.01uF	5	D-3	C10	.001uF	2	D-3	JW14	JUMPER 3	4	F-8	RP6B	220	3	F-9
BP30	.01uF	5	C-3	C11	.47uF	2	C-2	JW15	JUMPER 2	4	D-2	RP6C	220	3	F-9
BP31	.01uF	5	D-3	C12	470pF	1	C-9	JW16	JUMPER 3	1	E-7	RP6D	220	3	F-9
BP32	.01uF	5	D-3	C13	22pF	2	C-2	JW17	JUMPER 2	4	D-3	RP7A	220	3	D-9
BP33	.01uF	5	D-2	C14	.033uF	2	D-4	JW18	JUMPER 2	2	C-3	RP7B	220	3	D-9
BP34	.01uF	5	D-2	C15	.47uF	2	D-4	JW19	JUMPER 2	1	C-9	RP7C	220	3	D-9
BP35	.01uF	5	D-2	C16	100pF	1	A-8	JW20	JUMPER 2	1	D-6	RP7D	220	3	D-9
BP36	.01uF	5	D-2	C17	10uF	1	A-7	JW21	JUMPER 2	4	C-3	RP8A	220	3	D-9
BP37	.01uF	5	D-2	C18	.1uF	1	A-7	J1	HEADER 24	4	B-4	RP8B	220	3	D-9
BP38	.01uF	5	D-2	C19	.001uF	2	D-3	J2	HEADER 24	4	B-4	RP8C	220	3	D-9
BP39	.01uF	5	D-2	C20	.1uF	4	C-1	J3	HEADER 10	4	B-7	RP8D	220	3	D-9
BP40	.01uF	5	D-2	C21	150pF	1	E-7	LED1	LED	1	B-7	RP9A	220	3	H-9
BP41	.01uF	5	D-2	C22	.47uF	2	E-4	P1A	120 DIN	5	H-10	RP9B	220	3	H-9
BP42	.01uF	5	D-2	C23	10uF	2	E-3	P1B	120 DIN	5	H-9	RP9C	220	3	H-9
BP43	.01uF	5	D-2	C24	.1uF	2	E-3	P1C	120 DIN	5	H-8	RP9D	220	3	H-9
BP44	.01uF	5	D-2	C25	.01uF	2	E-4	P2A	120 DIN	5	H-6	RP10A	220	3	G-9
BP45	.01uF	5	C-3	DS1	SW DIP-8	4	F-9	P2B	120 DIN	5	H-5	RP10B	220	3	G-9
BP46	.01uF	5	D-2	DS2	SW DIP-8	2	B-3	P2C	120 DIN	5	H-4	RP10C	220	3	G-9
BP47	.01uF	5	D-2	DS3	SW DIP-8	2	B-3	Q1	2N6070	3	E-3	RP10D	220	3	G-9
BP48	.01uF	5	D-2	D1	1N4148	4	G-3	Q2	2N6070	3	F-3	RP11A	220	3	C-9
BP49	.01uF	5	D-2	D2	1N4148	4	G-3	Q3	2N6070	3	F-3	RP11B	220	3	C-9
BP50	.01uF	5	D-2	D3	1N4148	4	G-3	Q4	2N6070	3	E-3	RP11C	220	3	C-9
BP51	.01uF	5	D-2	D4	1N4148	4	G-3	Q5	2N6070	3	E-3	RP11D	220	3	C-9
BP52	.01uF	5	D-2	D5	1N4148	1	E-5	Q6	2N6070	3	F-3	RP12A	220	3	C-9
BP53	.01uF	5	C-3	D6	1N4148	3	E-4	Q7	2N6070	3	F-3	RP12B	220	3	C-9
BP54	.01uF	5	C-3	D7	1N4148	3	F-4	Q8	2N6070	3	F-3	RP12C	220	3	C-9
BP55	.01uF	5	D-2	D8	1N4148	3	F-4	Q9	2N6070	3	D-3	RP12D	220	3	C-9
BP56	.01uF	5	D-2	D9	1N4148	3	F-4	Q10	2N6070	3	E-3	RP13A	470	3	F-5
BP57	.01uF	5	D-2	D10	1N4148	3	F-4	Q11	2N6070	3	E-3	RP13B	470	3	F-5
BP58	.01uF	5	D-2	D11	1N4148	3	F-4	Q12	2N6070	3	D-3	RP13C	470	3	F-5
BP59	.01uF	5	D-2	D12	1N4148	3	F-4	Q13	2N6070	3	D-3	RP13D	470	3	F-5
BP60	.01uF	5	D-1	D13	1N4148	3	F-4	Q14	2N6070	3	D-3	RP13E	470	3	F-5
BP61	.01uF	5	D-1	D14	1N4148	3	D-4	Q15	2N6070	3	D-3	RP13F	470	3	F-5
BP62	.01uF	5	D-1	D15	1N4148	3	E-4	Q16	2N6070	3	D-3	RP13G	470	3	F-5
BP63	.01uF	5	D-1	D16	1N4148	3	E-4	Q17	2N6070	3	F-3	RP13H	470	3	F-5
BP64	.01uF	5	D-1	D17	1N4148	3	D-4	Q18	2N6070	3	G-3	RP14A	470	3	D-5
BP65	.01uF	5	D-1	D18	1N4148	3	D-4	Q19	2N6070	3	G-3	RP14B	470	3	D-5
BP66	.1uF	5	C-2	D19	1N4148	3	D-4	Q20	2N6070	3	G-3	RP14C	470	3	D-5
BP67	.01uF	5	D-1	D20	1N4148	3	D-4	Q21	2N6070	3	G-3	RP14D	470	3	D-5
BP68	.1uF	5	C-2	D21	1N4148	3	D-4	Q22	2N6070	3	G-3	RP14E	470	3	D-5
BP69	.01uF	5	D-1	D22	1N4148	3	G-4	Q23	2N6070	3	G-3	RP14F	470	3	D-5
BP70	.01uF	5	D-1	D23	1N4148	3	G-4	Q24	2N6070	3	G-3	RP14G	470	3	D-5
BP71	.01uF	5	D-1	D24	1N4148	3	G-4	Q25	2N6070	3	C-4	RP14H	470	3	D-5
BP72	.01uF	5	D-1	D25	1N4148	3	G-4	Q26	2N6070	3	C-3	RP15A	470	3	G-5
BP73	.01uF	5	D-1	D26	1N4148	3	G-4	Q27	2N6070	3	C-4	RP15B	470	3	G-5

©2003 BALLY GAMING AND SYSTEMS

COMPONENT LOCATOR CHART

COMP.	ID	SHEET	GRID	COMP.	ID	SHEET	GRID	COMP.	ID	SHEET	GRID	COMP.	ID	SHEET	GRID
RP15C	470	3	G-5	R7	150	2	B-2	R80	4.7K	4	F-8	U48B	74HC10	1	D-4
RP15D	470	3	G-5	R8	10K	2	H-3	R81	2.2K	4	E-7	U48C	74HC10	1	G-6
RP15E	470	3	G-5	R11	10K	4	F-6	R82	10K	1	E-7	U49	145406	4	F-8
RP15F	470	3	G-5	R12	4.7K	4	F-7	R83	39K	2	E-4	U50	HCPL3700	2	C-9
RP15G	470	3	G-5	R13	4.7K	4	E-7	R84	1K	2	E-4	U51A	74HC14	4	C-2
RP15H	470	3	G-5	R14	10K	4	F-8	R85	4.7K	2	D-4	U51E	74HC14	2	D-8
RP16A	470	3	C-5	R15	18K	2	F-9	R86	39K	2	D-4	U51F	74HC14	2	C-8
RP16B	470	3	C-5	R16	4.7K	4	F-7	R87	1K	2	E-3	U52	YM2149	2	C-5
RP16C	470	3	C-5	R17	22K	4	E-7	ST1	SPARE TAP	3	A-9	U53	DS1202	4	C-4
RP16D	470	3	C-5	R19	4.7K	1	D-6	SW1	TEST SWITCH	4	D-4	U54A	74HC74	4	D-2
RP16E	470	3	C-5	R20	10K	4	H-10	SW2	COIN MECH DISABL	4	D-4	U54B	74HC74	4	C-2
RP16F	470	3	C-5	R21	2K	2	C-10	SW3	PSEUDO COIN	4	C-4	U55	PCD8584	4	G-4
RP16G	470	3	C-5	R22	NOT STUFFED	2	C-10	SW4	RESET	1	C-8	U56A	74HC05	4	H-4
RP16H	470	3	C-5	R23	2K	2	C-10	TP1	TEST PT GND	2	B-10	U56B	74HC05	1	B-6
RP17	10K	2	H-3	R24	2.2K	2	C-9	TP2	TEST PT 5V.	2	B-9	U56C	74HC05	1	B-6
RP18	10K	3	C-9	R25	22K	2	C-5	TP3	TEST PT ~HALT	1	F-6	U56D	74HC05	1	B-9
RP19	10K	3	B-9	R26	1K	2	C-5	TP4	TEST PT RESET	1	B-7	U56E	74HC05	1	A-8
RP20	10K	4	G-10	R27	22K	2	C-5	TP5	TEST PT +5V	2	B-10	U57A	74HC02	1	D-9
RP21A	220	4	F-3	R28	750K	4	E-3	TP6	TEST PT GND	2	B-10	U57B	74HC02	2	B-6
RP21B	220	4	F-3	R29	NOT STUFFED	4	G-2	TP7	TEST PT GND	2	B-10	U57C	74HC02	2	B-6
RP21C	220	4	F-3	R30	NOT STUFFED	4	G-2	TP8	TEST PT WDT	1	A-9	U57D	74HC02	1	B-3
RP21D	220	4	F-3	R31	10K	4	G-4	U1	74HC273	3	F-5	U58	74HC138	1	D-3
RP22A	220	4	F-3	R32	1	2	D-2	U3	74HC273	3	D-5	U59	ADC0804	1	E-8
RP22B	220	4	F-3	R33	560	2	D-3	U5	74HC273	3	G-5	U60	22V10	1	F-2
RP22C	220	4	F-3	R34	1K	2	C-5	U7	74HC273	3	C-5	U61A	74HC04	1	B-3
RP22D	220	4	F-3	R35	22K	2	C-5	U9	ULN2803	3	E-9	U61B	74HC04	2	F-3
RP23A	220	4	F-3	R36	1K	2	C-5	U10	ULN2803	3	F-9	U61C	74HC04	1	D-9
RP23B	220	4	F-3	R37	10K	4	H-4	U11	74HC273	2	F-4	U61D	74HC04	4	G-8
RP23C	220	4	F-3	R38	2.2	2	D-3	U12	74HC273	2	F-4	U61E	74HC04	4	B-7
RP23D	220	4	F-3	R39	1.8K	2	D-10	U13	74HC244	2	G-4	U61F	74HC04	1	G-5
RP24A	220	4	E-3	R40	1.8K	2	D-10	U14	74HC244	3	G-10	U62	16V8	1	C-3
RP24B	220	4	F-3	R41	NOT STUFFED	2	D-9	U15	74HC244	3	D-10	U63	74HC244	1	H-9
RP24C	220	4	F-3	R42	2.2K	2	D-9	U16	74HC244	3	H-10	U64	74HC244	1	G-9
RP24D	220	4	F-3	R43	6.2K	2	C-8	U17	74HC244	3	C-10	U65	74HC244	1	F-9
RP25	10K	4	F-4	R44	27K	2	C-8	U18	27C512	2	H-7	U66	H11AA1	2	D-9
RP26	10K	4	E-4	R45	1M	4	D-2	U19	74HC374	3	B-10	U67	74HC4060	2	C-8
RP27B	10K	4	F-8	R46	1M	4	D-2	U20	27C512	2	H-6	U68	TDA2003	2	D-3
RP27C	10K	1	B-6	R47	100	4	G-2	U21	74HC374	3	B-10	U69A	74HC74	2	D-8
RP27D	10K	4	F-8	R48	100	4	G-2	U22	74HC245	1	E-9	U69B	74HC74	2	C-7
RP27E	10K	4	F-8	R49	10K	4	G-4	U23	74HC245	1	E-9	U70	145406	4	B-8
RP27F	10K	1	B-6	R50	22K	2	C-3	U24A	75ALS194	4	B-7	U71D	74HC08	1	B-10
RP27I	10K	1	G-5	R51	47K	1	C-9	U24B	75ALS194	4	G-8	U72	74HC4060	1	B-9
RP28A	10K	1	C-3	R52	47K	1	B-9	U25A	75ALS195	4	C-7	U73A	74HC04	3	B-6
RP28B	10K	1	C-2	R53	470K	1	C-9	U25B	75ALS195	4	G-7	U73B	74HC04	1	B-9
RP28C	10K	1	G-6	R54	1M	1	C-10	U26	145406	4	H-7	U73C	74HC04	2	D-8
RP28D	10K	1	F-3	R55	NOT STUFFED	1	C-10	U27	145406	4	D-7	U73D	74HC04	1	B-9
RP28E	10K	1	G-6	R56	22K	1	D-7	U28	27C4001	2	H-8	U73E	74HC04	1	D-9
RP28F	10K	1	F-3	R57	150	1	E-5	U29	74HC273	3	E-10	U73F	74HC04	1	G-5
RP28I	10K	1	F-3	R58	1K	2	C-3	U30	841001	2	F-7	U74A	74HC05	4	C-3
RP29	10K	4	F-3	R59	1K	2	D-4	U31	68HC000FN16	1	H-7	U74E	74HC05	4	D-2
RP30A	10K	4	E-3	R60	2.2K	2	D-8	U32	74HC154	1	D-3	U74F	74HC05	4	C-2
RP30B	10K	4	E-3	R61	24K	1	C-9	U33A	74HC32	1	D-2	U75A	TLC372C	1	C-9
RP30C	10K	4	E-3	R62	4.7K	1	C-8	U33B	74HC32	1	E-2	U75B	TLC372C	1	A-5
RP30D	10K	4	E-3	R63	NOT STUFFED	1	E-7	U33C	74HC32	1	E-2	U76A	74HC74	1	D-8
RP30E	10K	4	E-3	R64	20M	1	E-6	U33D	74HC32	1	E-2	U77	TL7702A	1	B-7
RP30G	10K	4	E-4	R65	4.7K	1	E-6	U34	16L8	2	F-9	U78A	LM324	2	E-4
RP30H	10K	4	E-4	R66	1K	1	E-6	U35	74HC165	2	E-10	U78B	LM324	2	E-5
RP31	10K	2	C-4	R67	10K	2	D-3	U36	74HC161	1	C-6	U78C	LM324	2	A-10
RP32	10K	2	C-4	R68	10K	2	D-3	U37	MC68681	4	H-9	U78D	LM324	2	A-10
RP33A	10K	1	F-9	R69	1.13K	1	B-7	U38	MC68681	4	C-9	VR1	1K	2	D-4
RP33B	10K	1	G-9	R70	2K	1	B-7	U39	MC68681	4	F-9	Y1	29.4912 MHZ	1	C-7
RP33C	10K	1	H-9	R71	1.00K	1	B-7	U40	145406	4	E-7	Y2	32.768 KHZ	4	C-4
RP33D	10K	1	G-3	R72	2.2K	1	A-7	U41	6522P2	4	F-4				
RP34A	10K	1	E-9	R73	2.2K	2	C-7	U42	6522P2	4	E-5				
RP34B	10K	1	D-9	R74	1M	1	A-9	U43	27C4001	2	H-9				
R2	150	2	B-2	R75	470K	1	A-8	U44	74HC273	3	F-10				
R3	150	2	B-2	R76	270	1	B-7	U45	841001	2	F-8				
R4	150	2	B-2	R77	1M	4	D-1	U46	22V10	1	F-2				
R5	150	2	B-2	R78	1M	4	D-1	U47	74HC244	1	G-2				
R6	150	2	B-2	R79	4.7K	4	F-8	U48A	74HC10	1	B-4				

©2003 BALLY GAMING AND SYSTEMS

| - Revised, || - New

ProSlot-6000™

SIGNAL LOCATOR CHART

SIGNAL NAME	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID
~AC FAIL	1	E-4	2	C-7										
~ADC INT	1	E-8												
~ADC SELECT	1	C-2	1	C-9	1	E-8								
~ALARM	2	C-2	4	E-10	4	G-9								
~AS	1	F-2	1	F-3	1	F-6								
~BC1	2	B-5												
~BDIR	2	B-5												
~BERR	1	G-6												
~DTACK	1	B-3	1	G-6										
~DTACKA	1	C-1	4	E-10										
~DTACKB	1	C-1	4	C-10										
~DTACKC	1	C-1	4	H-10										
~DUART SELECT1	1	C-1	4	C-10										
~DUART SELECT2	1	C-1	4	E-10										
~DUART SELECT3	1	C-1	4	H-10										
~EXP IRQ	4	B-5	4	H-9										
~EXPAND SELECT	1	C-1	4	B-5										
~FORWARD ENABLE	4	F-3	5	C-9	5	F-8								
~HALT	1	B-6	1	F-6										
~I2C	1	D-1	2	G-4										
~IACK	1	B-2	1	F-3	1	G-5								
~IACKD1	1	E-1	4	C-10										
~IACKD2	1	E-1	4	E-10										
~IACKD3	1	F-1	4	H-10										
~INPORT0	1	D-1	3	G-10										
~INPORT1	1	D-1	3	C-10										
~IO DTACK	1	B-2												
~IO SELECT1	1	D-1	4	B-5										
~IO SELECT2	1	D-1	4	B-5										
~IRQ_I2C	4	G-4	4	H-9										
~LDS	1	B-1	1	F-5	2	F-10								
~LOCAL I/O	1	C-2	1	C-3	1	F-2								
~OEH	2	E-7	2	F-9	2	G-6	2	G-8						
~OEL	2	E-8	2	F-9	2	G-7	2	G-9						
~OUTPORT0	1	E-1	3	F-6										
~OUTPORT1	1	E-1	3	D-6										
~OUTPORT2	1	D-1	3	E-10										
~OUTPORT3	1	D-1	3	B-10										
~R/W	1	D-10	1	E-9	2	F-10								
~RAM CS	1	F-1	2	E-8	2	F-9								
~RAMCS1	2	E-7	2	F-9										
~RD	4	F-3	5	C-9	5	F-10								
~REELDRIVE	1	D-1	2	E-4										
~REELSENSE	1	D-1	1	G-3	2	F-4								
~RESET	1	B-6	1	B-10	1	F-3	1	F-6	1	H-9	2	B-5	2	B-7
	2	F-10	3	A-10	3	B-5	3	B-6	3	B-10	3	D-5	3	E-5
	3	E-10	3	F-5	4	B-5	4	C-9	4	D-5	4	E-9	4	F-4
	4	H-9												
~RESET REQ	1	B-10	2	F-10										
~RESIN	1	A-7	1	C-8										
~REVERSE ENABLE	4	F-3	5	C-9	5	F-9								
~ROM MAINS CS	1	F-1	2	F-10	2	G-8	2	G-9						
~ROM SMI CS	1	F-1	2	F-10	2	G-6	2	G-7						
~RST	4	F-3	5	C-9	5	F-8								
~RTC RESET	4	D-4												
~SAFERAM CS	1	F-1	2	F-10										
~SOUND	1	C-1	2	B-6										
~SR OPEN	1	D-1	2	E-10										
~UART1	1	E-4	4	C-10										
~UART2	1	E-1	4	E-10										
~UART3	1	E-4	4	H-10										
~UDS	1	B-1	1	F-5	2	F-10								
~VIA SELECT1	1	C-1	4	D-5										
~VIA SELECT2	1	C-1	4	F-5										
~VIA1	1	E-4	4	E-5										
~VIA2	1	E-4	4	F-5										
~VMA	1	F-6												
~VPA	1	C-2	1	F-2	1	G-6								
~WAIT STATE	1	C-3	1	E-3										
~WD RESET	1	A-10	1	D-3										

SIGNAL NAME	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID
~WEHS	2	E-7	2	F-9										
~WELS	2	E-8	2	F-9										
~WR	4	F-3	5	C-9	5	F-9								
~ZEROCROSS	1	F-1	2	D-7										
~ZEROCROSS REL	1	E-1	2	D-7										
1.84 MHZ	1	C-5	2	B-5										
3.69 MHZ	1	C-5	4	B-10	4	E-9	4	G-9						
7.37 MHZ	1	C-5	2	E-10	4	G-4								
14.7456 MHZ	1	C-2	1	C-6	1	G-6								
21VAC1	2	C-10	5	H-9										
21VAC2	2	C-10	5	H-8										
A[0..23]	1	F-10	2	H-10	4	G-10								
A[1..3]	1	F-3												
A[1..4]	1	D-3	4	B-5	4	C-9	4	E-5	4	E-9	4	F-4	4	H-9
A[1..15]	2	G-6	2	G-7										
A[1..17]	2	F-7	2	F-8										
A[1..18]	2	H-8	2	H-9										
A[5..7]	1	C-3												
A[6..8]	1	C-3												
A[9..11]	1	B-4												
A[12..23]	1	F-3												
A0	4	F-3	5	C-9	5	F-10								
A1	4	G-4												
A16	2	F-7												
A19	2	F-9												
AS	1	C-2	1	D-4	1	F-5								
AS*FCA0*IODEC	1	B-3	1	D-3										
ATTEND PD METER	E	E-8	5	A-8	5	G-5								
BATT LOOPBACK	4	G-8	5	B-9	5	F-9								
BH 2ND MOTOR	3	F-8	5	B-8	5	F-6								
BH CASS PRESENT	3	C-8	5	D-7	5	G-8								
BH CLOCK	4	D-3	5	B-9	5	E-8								
BH DATA	4	D-3	5	B-9	5	E-9								
BH DIVERT SENSOR	3	C-8	5	D-7	5	G-10								
BH FAULT	4	D-3	5	B-9	5	E-10								
BH MID PAPER SNS	3	C-8	5	D-7	5	G-9								
BH MOTOR ON	3	E-8	5	A-8	5	G-4								
BH OUTPUT SENSOR	3	C-8	5	D-7	5	G-8								
BH PRESENT	3	C-8	5	D-7	5	G-8								
BH REAR SENSOR	3	C-8	5	D-7	5	G-9								
BILL ACCESS SW	3	G-8	5	B-8	5	G-10								
BILL READY LAMP	3	F-3	5	A-7	5	H-4								
BONUS TRIGGER	3	C-8	5	D-7	5	G-10								
BV ACCEPT ENABLE	4	E-6	5	A-9	5	F-10								
BV BUSY	3	D-8	5	D-7	5	G-8								
BV CASHBO DOOR	3	D-8	5	D-7	5	G-9								
BV INTERRUPT	4	F-6	5	A-9	5	F-8								
BV OUT OF SVC	4	E-6	5	A-9	5	F-9								
BV RS232 RCV	4	F-6	5	A-9	5	F-10								
BV RS232 MIT	4	F-6	5	A-9	5	F-9								
BV SEND	4	E-6	5	A-9	5	F-8								
BV[0..9]	4	F-5	5	A-10										
CASHBO PRESENT	3	D-8	5	D-7	5	G-9								
CHANGE/SVC LAMP	3	F-3	5	A-7	5	G-5								
CHANGE/SVC SW	3	G-8	5	B-8	5	G-10								
CLEAR DOOR	4	D-4												
COIN ACCEPT LAMP	3	E-3	5	A-7	5	H-5								
COIN CREDIT	3	G-8	5	B-8	5	G-8								
COIN ENABLE	3	E-8	5	A-8	5	G-5								
COIN ERROR	3	G-8	5	B-8	5	G-9								
COIN OFF	4	E-3	5	B-9	5	E-10								
COIN1 LAMP	3	D-3	5	D-5	5	H-6								
COIN2 LAMP	3	D-3	5	D-5	5	H-5								
COIN3 LAMP	3	D-3	5	D-5	5	G-5								
COIN4 LAMP	3	D-3	5	D-5	5	G-4								
COIN5 LAMP	3	D-3	5	D-5	5	G-6								
COIN6/HOLD1 LAMP	3	G-3	5	B-7	5	G-5								
COIN7/HOLD2 LAMP	3	G-3	5	B-7	5	G-6								
COIN8/HOLD ATTR	3	G-3	5	B-7	5	G-6								
COINOUT SWITCH	3	F-8	5	B-8	5	H-8								

SIGNAL NAME	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID
COLL CREDITS SW	3	G-8	5	B-8	5	G-9						
COLLECT LAMP	3	G-3	5	B-7	5	G-4						
COMM1[0..9]	4	D-5	5	C-9								
COMM4[0..5]	4	E-5	5	C-9								
COMM5[0..5]	4	H-6	5	D-10								
COMM6[0..4]	4	G-6	5	B-10								
CTS1	4	C-7	5	C-8	5	F-10						
CTS2	4	A-7										
CTS4	4	D-7	5	C-8	5	F-8						
CTS5	4	H-7	5	D-9	5	G-10						
D[0..15]	1	D-10	2	G-10	3	H-10	4	G-10				
D[0..7]	1	E-8	2	B-5	2	E-4	2	F-7	2	G-4	2	G-6	2	H-8
	3	B-10	3	D-5	3	D-10	3	E-5	3	E-10	3	F-10	4	B-5
	4	C-9	4	D-5	4	E-9	4	F-4	4	G-3	4	H-9		
D[8..15]	1	G-2	2	F-4	2	F-6	2	G-5	2	H-7	3	A-10	3	C-5
	3	C-10	3	F-10	3	G-5	3	G-10						
DISPLAY D[0..7]	4	F-1	5	C-10								
DISPLAY D0	4	F-2	5	C-9	5	F-8						
DISPLAY D1	4	F-2	5	C-9	5	F-10						
DISPLAY D2	4	F-2	5	C-9	5	F-9						
DISPLAY D3	4	F-2	5	C-9	5	F-8						
DISPLAY D4	4	F-2	5	C-9	5	F-10						
DISPLAY D5	4	F-2	5	C-9	5	F-9						
DISPLAY D6	4	E-2	5	C-9	5	F-8						
DISPLAY D7	4	E-2	5	C-9	5	F-10						
DIVERTER SOL	3	E-8	5	A-8	5	F-6						
DOOR HINGE	4	E-4										
DOOR HINGE OPTIC	4	D-3	5	B-9	5	E-9						
DOOR LATCH	4	D-4										
DOOR OPTIC POWER	2	B-2	5	C-7	5	E-5						
DOOR SW SIGNAL	3	A-8	5	C-7	5	F-5						
DR/TILT TWR LAMP	3	F-3	5	A-7	5	H-5						
DROP DOOR	3	D-8	5	D-7	5	G-10						
DROP OPTIC	4	D-3	5	B-9	5	E-8						
DROP OPTIC POWER	2	B-2	5	C-7	5	E-4						
DSR1	4	C-7	5	C-8	5	F-9						
DSR2	4	A-7										
DSR4	4	D-7	5	C-8	5	F-9						
DTR1	4	C-7	5	C-8	5	F-10						
DTR2	4	A-7										
DTR4	4	D-7	5	C-8	5	F-8						
E	1	F-6	4	A-4	4	C-10	4	D-5	4	F-4		
END OF GAME	3	A-8	5	C-7	5	F-5						
EXT ANTENNA	1	B-10	5	C-6	5	G-6						
EXT. RESET	4	E-6	5	A-9	5	F-4						
FC0	1	G-3	1	G-6								
FC1	1	G-3	1	G-6								
FC2	1	G-3	1	G-6								
FCA0	1	D-4	1	G-2								
FCA1	1	D-3	1	G-2								
FEATURE LAMP 1	3	C-3	5	D-5	5	G-5						
FEATURE LAMP 2	3	C-3	5	D-5	5	G-4						
FEATURE LAMP 3	3	C-3	5	D-5	5	G-4						
FEATURE LAMP 4	3	C-3	5	D-5	5	G-6						
FEATURE LAMP 5	3	C-3	5	D-5	5	G-5						
FEATURE LAMP 6	3	C-3	5	D-5	5	G-5						
FEATURE LAMP 7	3	B-3	5	D-5	5	G-6						
FEATURE LAMP 8	3	B-3	5	D-5	5	G-6						
FORWARD/~REVERSE	4	F-3	5	C-9	5	F-10						
GAME DOOR OPEN	3	E-8	5	B-8	5	F-4						
GAMEIF[0..10]	4	E-1	5	B-10								
HANDLE RELEASE	3	E-8	5	A-8	5	F-6						
HANDLE SENSE	3	D-8	5	D-7	5	G-10						
HIDRIVE[0..15]	3	F-7	5	B-9								
HOLD1 SWITCH	3	F-8	5	B-8	5	H-8						
HOLD2 SWITCH	3	F-8	5	B-8	5	H-9						
HOLD3 LAMP	3	E-3	5	A-7	5	H-5						
HOLD3 SWITCH	3	F-8	5	B-8	5	H-10						
HOLD4 LAMP	3	E-3	5	A-7	5	H-6						
HOLD4 SWITCH	3	F-8	5	B-8	5	H-8						

| - Revised, || - New

©2003 BALLY GAMING AND SYSTEMS

SIGNAL LOCATOR CHART

SIGNAL NAME	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID
HOLD5 LAMP	3	G-3	5	B-7	5	G-4								
HOLD5 SWITCH	3	F-8	5	B-8	5	G-10								
HOPPER FULL SW	3	D-8	5	D-7	5	G-9								
HOPPER LOW SW	3	F-8	5	B-8	5	H-9								
HOPPER[0..7]	4	F-1	5	D-10										
I2C SCL	4	G-2	5	D-9	5	E-5								
I2C SDA	4	G-2	5	D-9	5	E-6								
I2C[0..1]	4	G-1	5	D-10										
ID00	2	F-3	5	B-7	5	E-4								
ILOOP E T RST	4	E-6	5	A-9	5	E-4								
ILOOP RECEIVE	4	B-4	4	F-6	5	A-9	5	E-10						
ILOOP TRANSMIT	4	B-4	4	F-6	5	A-9	5	E-8						
IN1PORT[0..14]	3	D-7	5	D-7										
INSERT COIN LAMP	3	E-3	5	A-7	5	H-4								
IO DECODE	1	D-4	1	F-2										
IPL0	1	F-2	1	G-6										
IPL1	1	F-2	1	G-6										
IPL2	1	F-2	1	G-6										
JACKPOT 1 RELAY	3	F-8	5	B-8	5	F-4								
JACKPOT 2 RELAY	3	F-8	5	B-8	5	F-6								
JACKPOT 3 RELAY	3	F-8	5	B-8	5	F-5								
JACKPOT BELL	3	D-3	5	D-5	5	H-4								
JACKPOT SIGNAL	3	A-8	5	C-7	5	F-6								
JP/CHNG TWR LAMP	3	F-3	5	A-7	5	H-6								
JP2/AUX HOPPER	3	A-8	5	C-7	5	F-4								
KEYSWITCH	3	D-8	5	D-7	5	G-8								
KEYSWITCH SIGNAL	3	A-8	5	C-7	5	F-6								
KNOCKOFF SWITCH	4	E-3	5	B-9	5	F-8								
LEVEL IN	2	C-2	5	A-8	5	H-9								
LEVEL OUT	2	D-2	5	A-8	5	H-10								
M[1..14]	4	B-3	5	D-8										
M1	5	E-9												
M2	5	E-10												
M3	5	E-8												
M4	5	E-10												
M5	5	E-8												
M6	5	E-9												
M7	5	E-9												
M8	5	E-10												
M9	5	E-8												
M10	5	E-10												
M11	5	E-9												
M12	5	E-8												
M13	5	E-9												
M14	5	E-10												
MAX CREDIT SW	3	G-8	5	B-8	5	G-10								
METER DETECT	3	F-8	5	B-8	5	H-10								
MPU DETECT	4	C-1	5	B-9	5	F-9								
MPU_DETECT	4	C-3	4	E-4										
MR_W	1	F-6	1	G-3										
NOT READY LAMP	3	E-3	5	A-7	5	H-6								
OP[0..5]	2	B-1	5	C-7										
OPTIC POWER 1	2	B-2	5	C-7	5	E-6								
OPTIC POWER 2	2	B-2	5	C-7	5	E-5								
OPTIC POWER 3	2	B-2	5	C-7	5	E-6								
OPTIC POWER 6	2	B-2	5	C-7	5	E-6								
OUT0PORT[0..15]	3	G-2	5	B-7										
OUT1PORT[0..15]	3	E-2	5	D-6										
OUT3PORT[0..13]	3	B-7	5	C-7										
OUTPUT PORT 0	1	D-3												
OUTPUT PORT 1	1	D-3												
OUTPUT PORT 2	1	D-3												
OUTPUT PORT 3	1	D-3												
PLAY 1 CREDIT SW	3	G-8	5	B-8	5	G-8								
PLAY MAX LAMP	3	F-3	5	B-7	5	G-4								
PSEUDO COIN	4	D-3	5	B-9	5	E-10								
R/~W	1	D-2	1	D-10	1	E-2	1	E-8	1	G-2	4	B-5	4	C-9
	4	E-5	4	E-9	4	F-4	4	G-4	4	H-9				
RDRIVE[0..10]	2	F-1	5	B-7										

SIGNAL NAME	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID
REEL1 PHASE A	2	F-3	5	B-7	5	F-4								
REEL1 PHASE B	2	F-3	5	B-7	5	F-5								
REEL1 SENSE1	2	G-3	5	C-5	5	E-4								
REEL1 SENSE2	2	G-3	5	C-5	5	E-5								
REEL2 PHASE A	2	F-3	5	B-7	5	F-6								
REEL2 PHASE B	2	F-3	5	B-7	5	F-4								
REEL2 SENSE1	2	G-3	5	C-5	5	F-6								
REEL2 SENSE2	2	G-3	5	C-5	5	F-4								
REEL3 PHASE A	2	F-3	5	B-7	5	F-5								
REEL3 PHASE B	2	F-3	5	B-7	5	F-6								
REEL3 SENSE1	2	G-3	5	C-5	5	F-5								
REEL3 SENSE2	2	G-3	5	C-5	5	F-6								
REEL4 PHASE A	2	E-3	5	B-7	5	F-4								
REEL4 PHASE B	2	E-3	5	B-7	5	F-5								
REEL4 SENSE1	2	G-3	5	C-5	5	F-5								
REEL4 SENSE2	2	G-3	5	C-5	5	E-4								
REEL5 PHASE A	2	E-3	5	B-7	5	F-6								
REEL5 PHASE B	2	E-3	5	B-7	5	F-4								
REEL5 SENSE1	1	G-3	2	F-3	5	C-5	5	E-6						
REEL5 SENSE2	1	G-3	2	F-3	5	C-5	5	E-4						
RESET	3	B-5	4	G-5										
RSENSE[0..9]	2	G-1	5	C-6										
RTC CLOCK	4	D-4												
RTC DATA	4	D-4												
RTS1	4	C-7	5	C-8	5	F-8								
RTS2	4	A-7												
RTS4	4	D-7	5	C-8	5	F-10								
RTS5	4	H-7	5	D-9	5	G-8								
RXD1	4	D-7	5	C-8	5	G-8								
RXD1(-)	4	C-8	5	C-8	5	G-10								
RXD1(+)	4	C-8	5	C-8	5	G-9								
RXD2	4	A-7												
RXD4	4	E-7	5	C-8	5	F-10								
RXD5	4	H-7	5	D-9	5	G-8								
RXD6(-)	4	G-7	5	B-9	5	G-10								
RXD6(+)	4	G-7	5	B-9	5	G-9								
RXD6/DSR5	4	H-7	5	D-9	5	G-9								
S[1..7]	1	H-10	4	E-10										
S1	1	G-3												
S2	1	G-3												
S3	4	H-9												
S4	4	E-9												
S5	4	E-9												
S6	4	C-9												
S7	4	C-9												
SLANT LOWER DOOR	4	D-3	5	B-9	5	E-9								
SOUND D0	3	B-8	5	C-7	5	F-4								
SOUND D1	3	B-8	5	C-7	5	F-5								
SOUND D2	3	B-8	5	C-7	5	F-6								
SOUND D3	3	B-8	5	C-7	5	F-4								
SOUND D4	3	B-8	5	C-7	5	F-5								
SOUND D5	3	B-8	5	C-7	5	F-6								
SOUND D6	3	B-8	5	C-7	5	F-4								
SOUND D7	3	B-8	5	C-7	5	F-5								
SOUND OUT	2	D-2	5	A-8	5	H-10								
SOUND[0..2]	2	E-1	5	A-9										
SPARE HARD METER	3	E-8	5	A-8	5	G-6								
SPARE VIA2 PA7	4	F-3	5	C-9	5	F-9								
SPI CLOCK	4	E-3	5	C-9	5	F-9								
SPI DATA	4	E-3	5	C-9	5	F-8								
SPI[0..1]	4	F-1	5	C-10										
SPIN LAMP	3	F-3	5	B-7	5	G-5								
SPIN SWITCH	3	G-8	5	B-8	5	G-9								
SR_KEY	2	F-9												
SRAM_CLR	3	C-10	4	E-10										
SWITCH[0..15]	3	G-7	5	B-9										
SYSTEM RESET	1	H-10	5	C-6	5	F-5								
TEST SWITCH	4	E-3	5	B-9	5	F-10								
TILT RELAY	3	F-8	5	B-8	5	F-4								

SIGNAL NAME	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID	PG	GRID
TOTAL DROP METER	3	E-8	5	A-8	5	G-6								
TOTAL IN METER	3	E-8	5	A-8	5	F-5								
TOTAL IN RELAY	3	E-8	5	B-8	5	F-5								
TOTAL IN SIGNAL	3	A-8	5	C-7	5	F-6								
TOTAL OUT METER	3	E-8	5	A-8	5	F-4								
TOURNAMENT KEYSW	3	D-8	5	D-7	5	G-8								
TOWER 4TH LAMP	3	D-3	5	D-5	5	H-4								
TOWER MID LAMP	3	D-3	5	D-5	5	G-6								
TXD1	4	D-7	5	C-8	5	F-9								
TXD1(-)	4	B-8	5	C-8	5	G-10								
TXD1(+)	4	B-8	5	C-8	5	G-9								
TXD2	4	A-7												
TXD4	4	D-7	5	C-8	5	F-9								
TXD5	4	H-7	5	D-9	5	G-9								
TXD6(-)	4	G-7	5	B-9	5	G-9								
TXD6(+)	4	G-7	5	B-9	5	G-8								
TXD6/DTR5	4	H-7	5	D-9	5	G-10								
V_1A6_3	2	G-6	2	G-7										
V_A19_1	2	G-8	2	G-9										
VB_DOOR	4	D-2												
VMA	1	G-5	4	A-4	4	C-10	4	D-5	4	F-4				

©2003 BALLY GAMING AND SYSTEMS

Coin Acceptor

Coin Optic Decoder 2 Board AS-03356-0303

☑Upright ☑Slant ☑ESlant

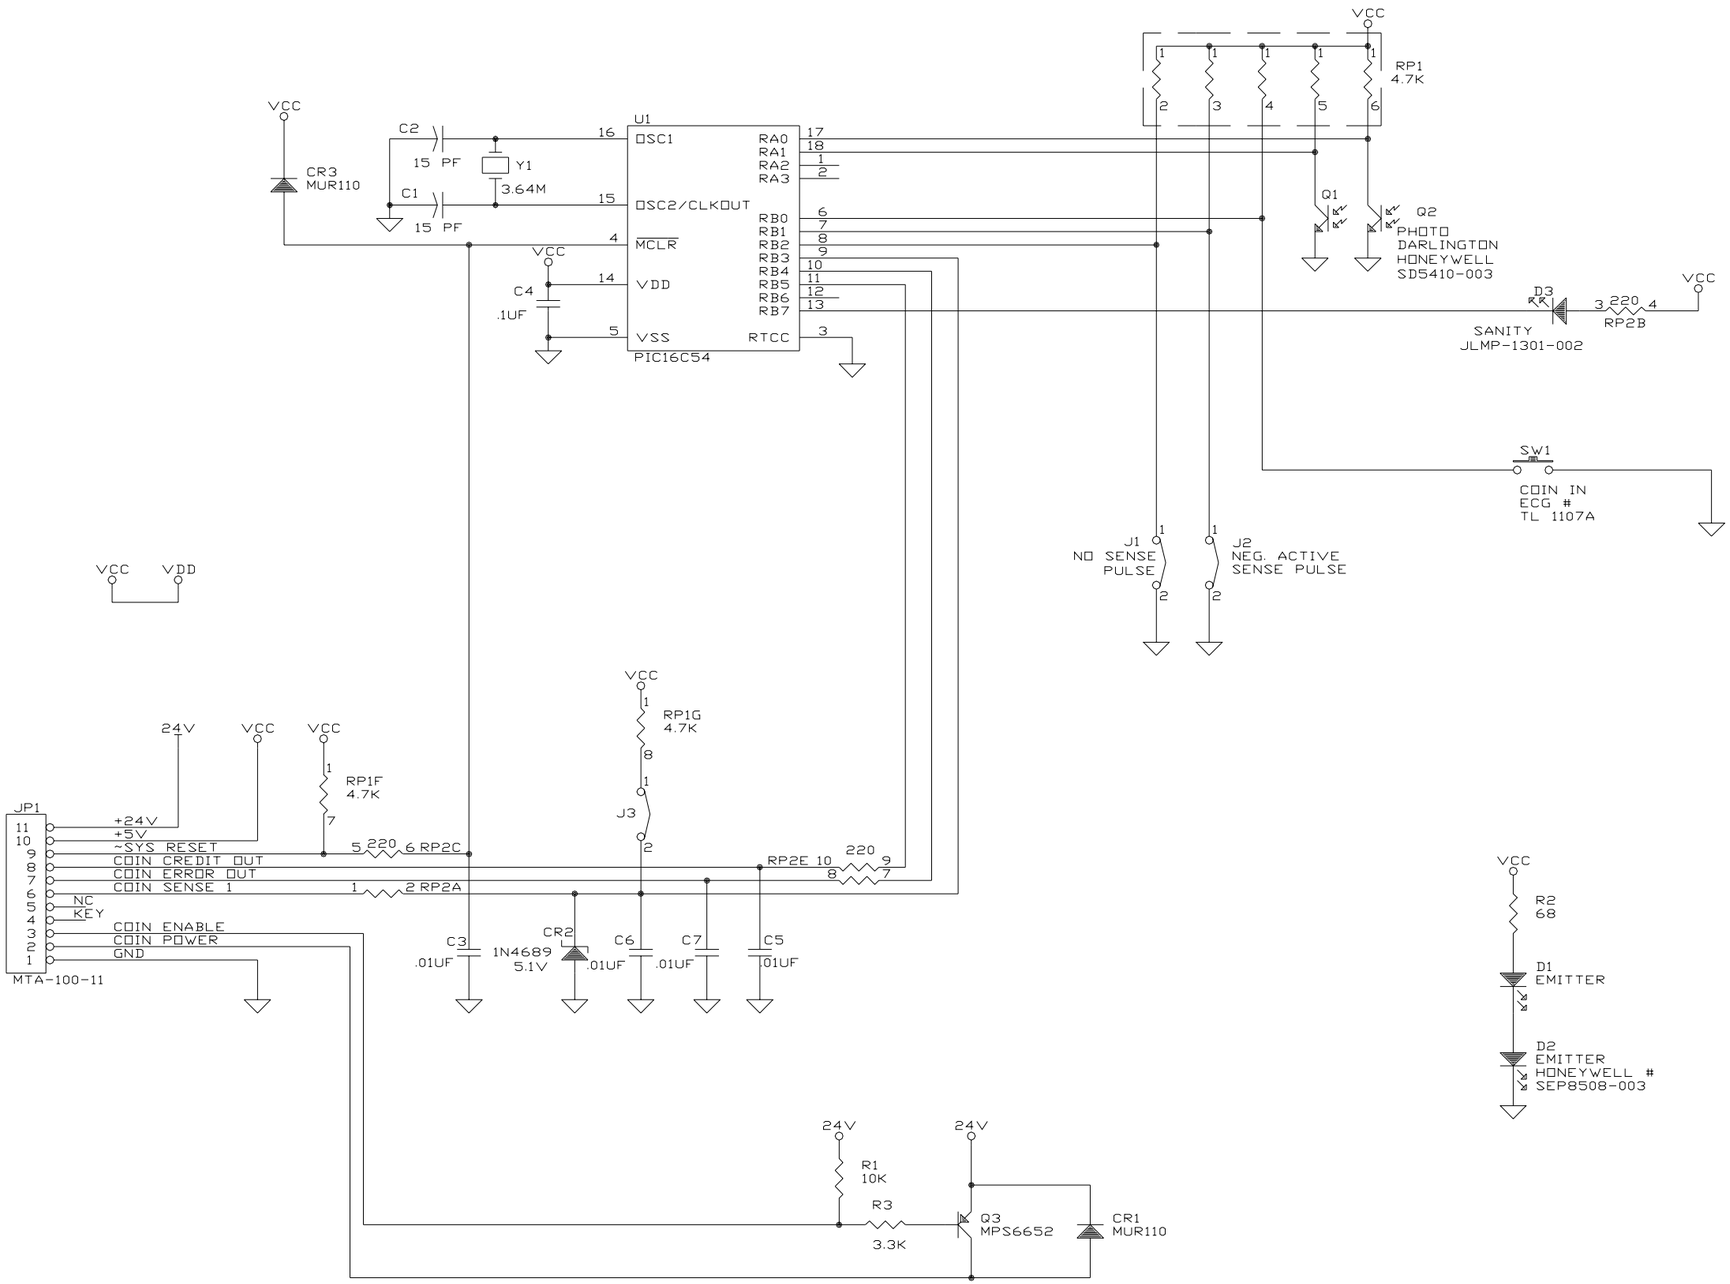

©2003 BALLY GAMING AND SYSTEMS

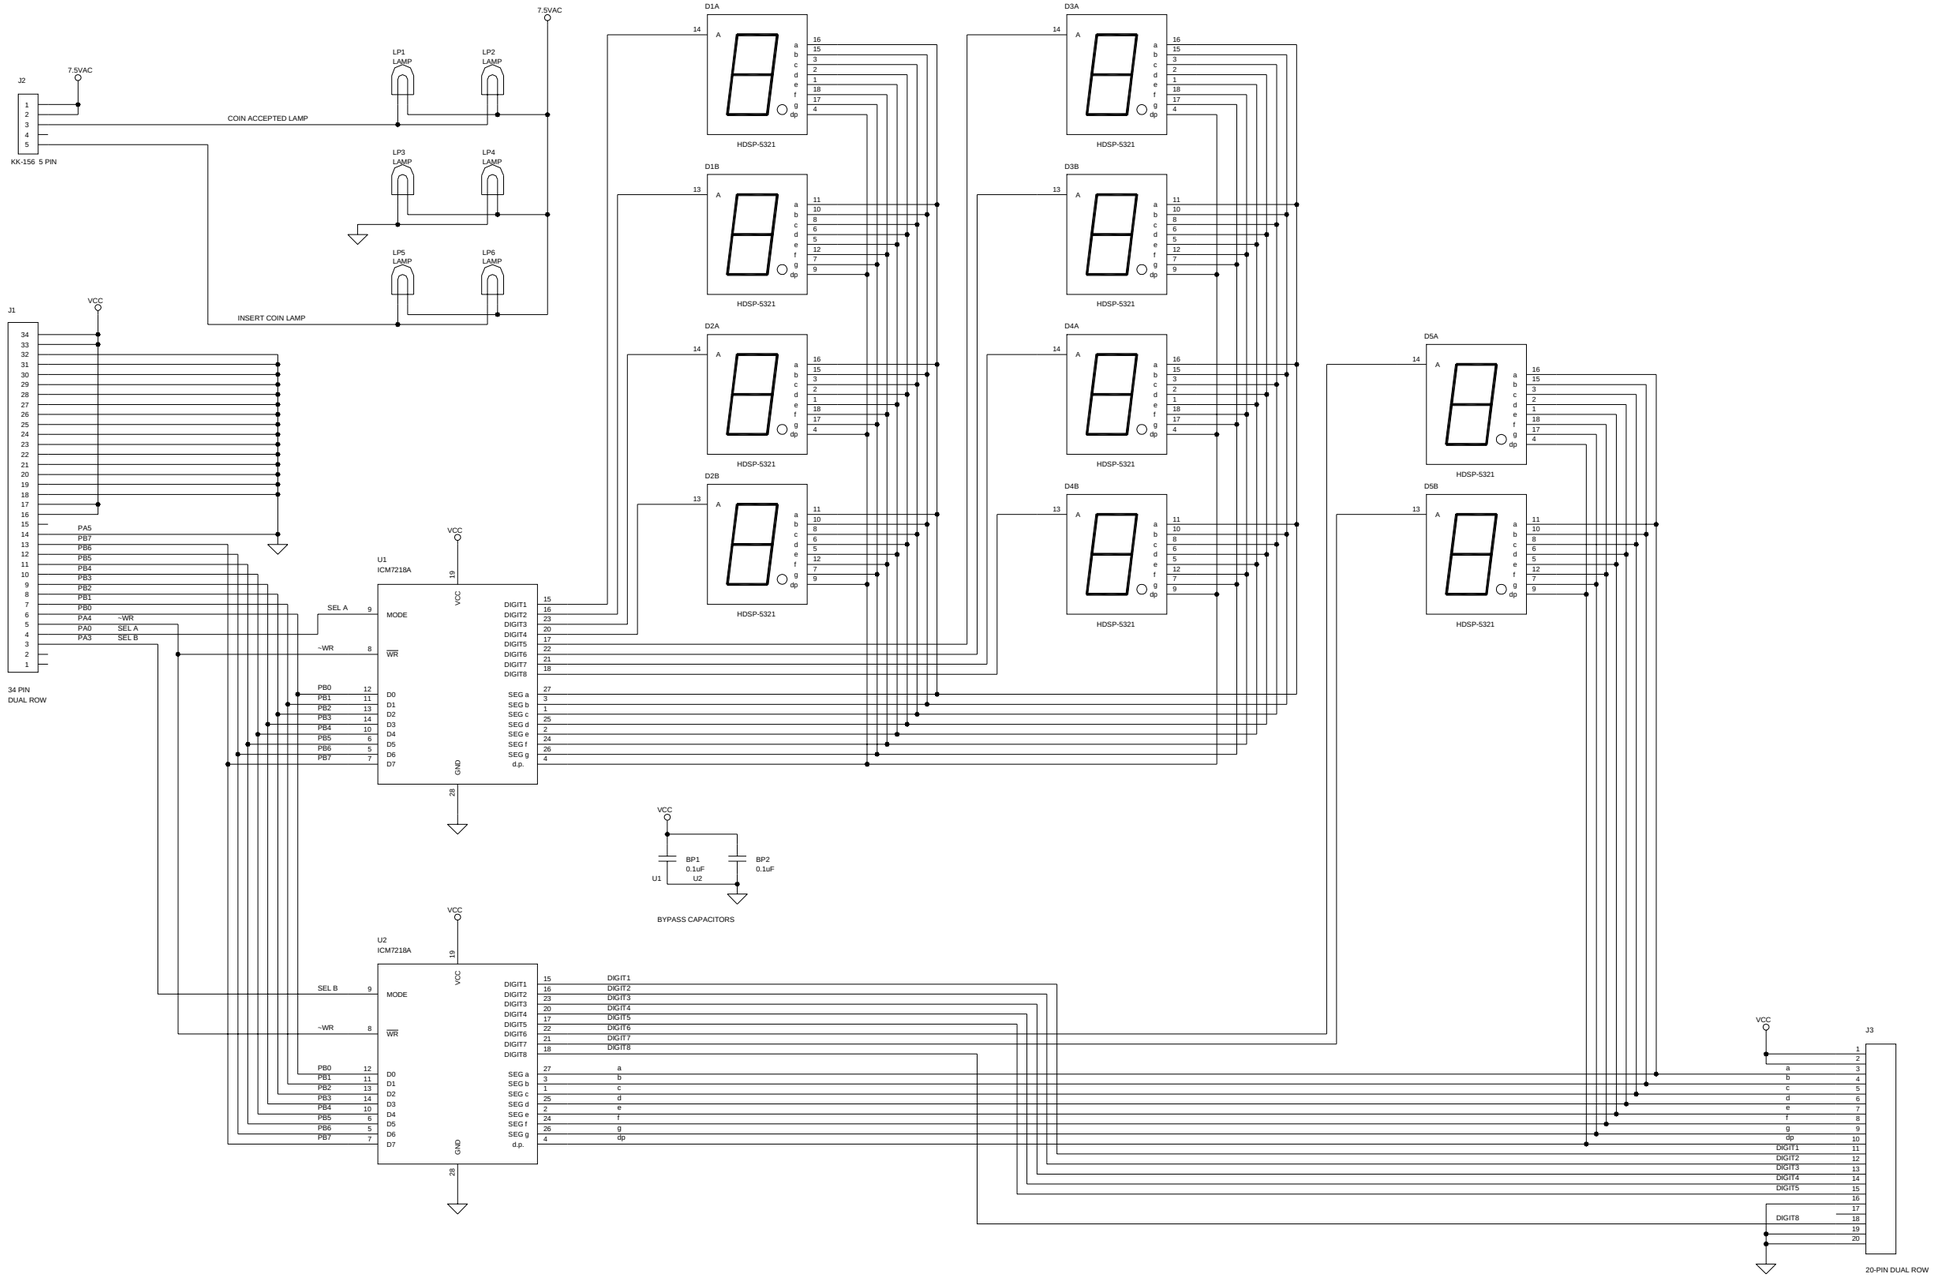

©2003 BALLY GAMING AND SYSTEMS

|| **Display Board with Hit and Run Connector, Left AS-03356-0623** ☑Upright

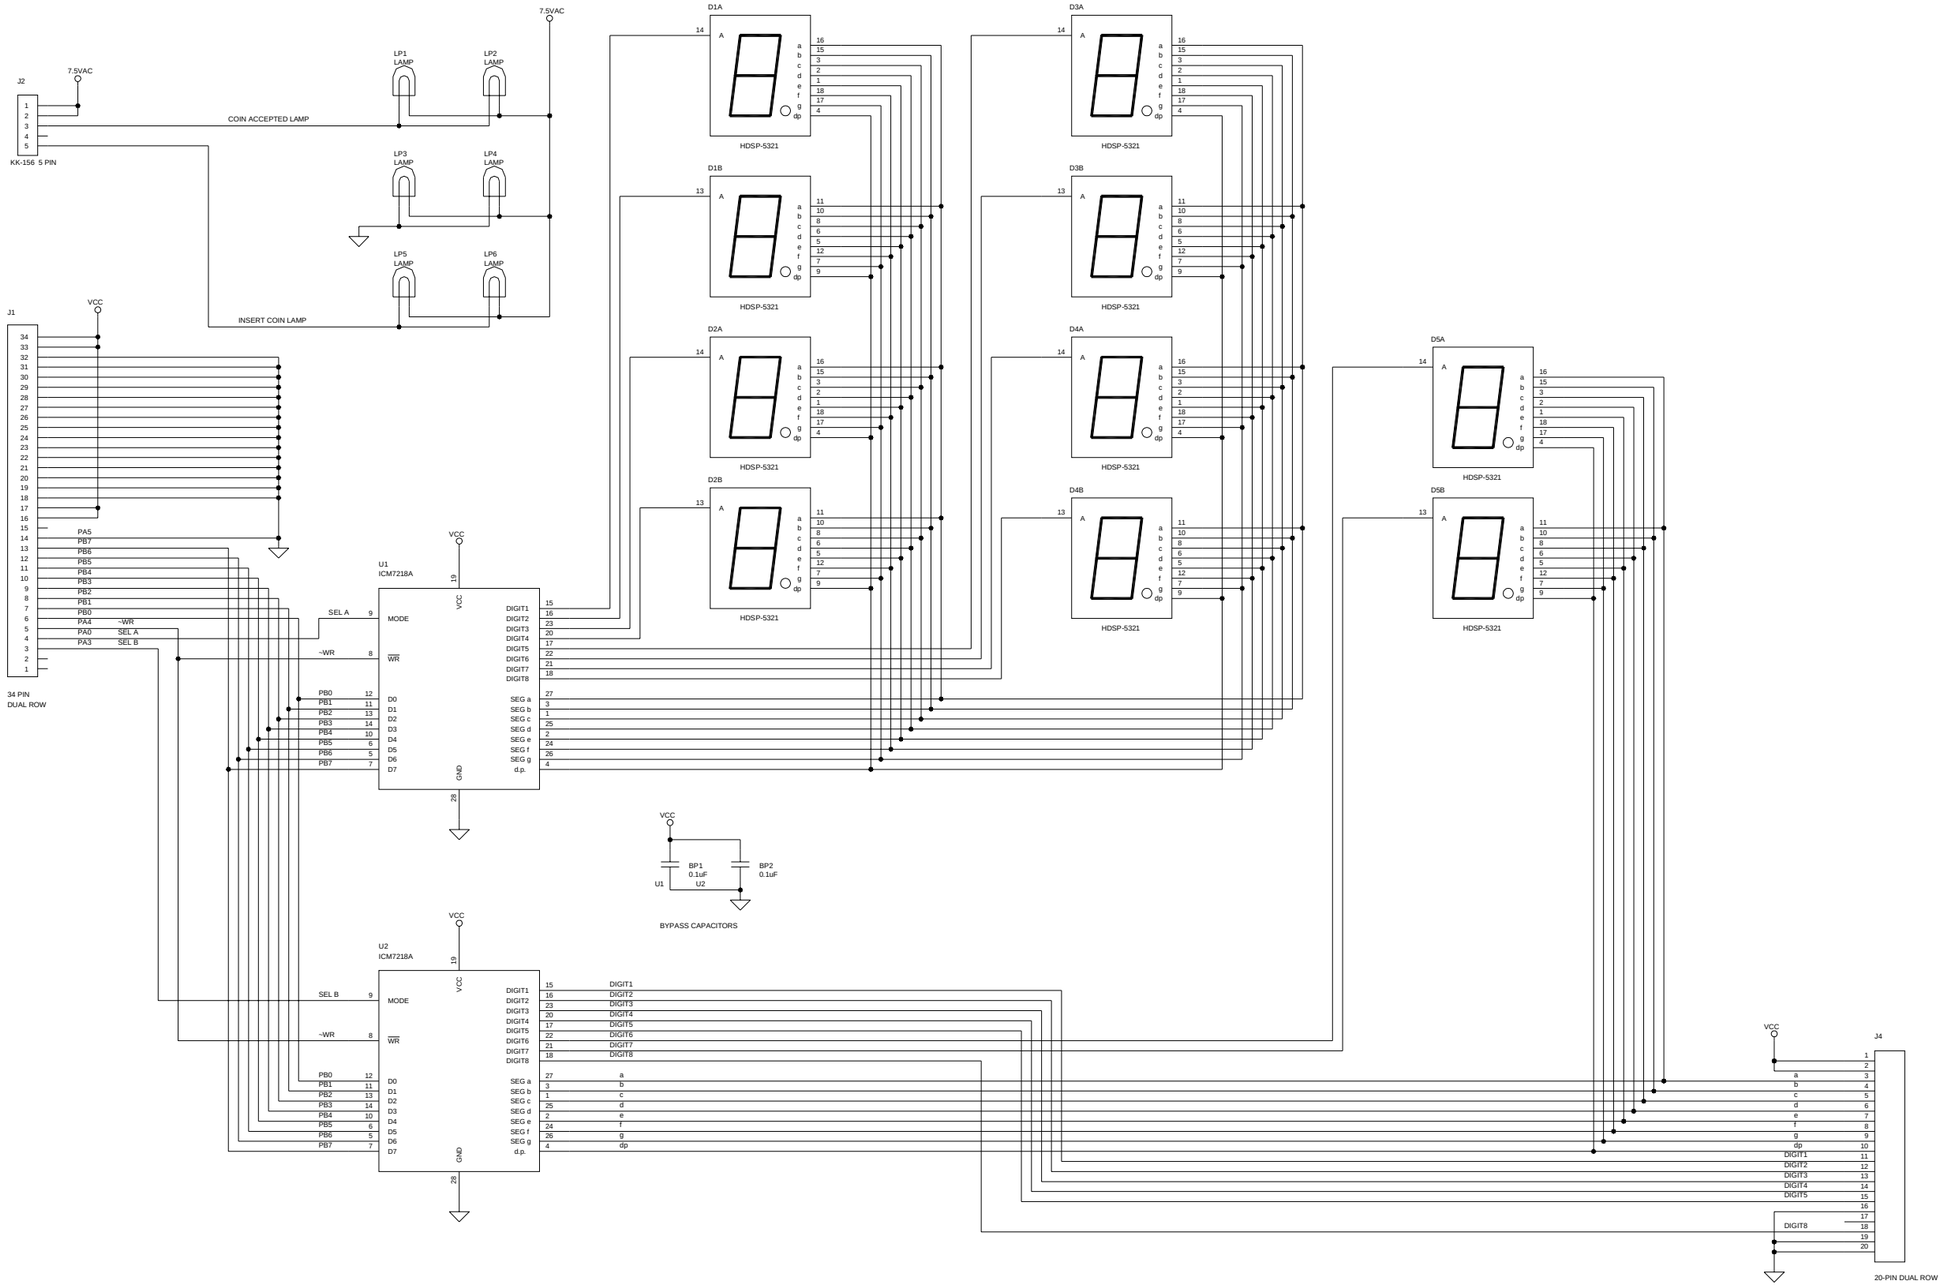

©2003 BALLY GAMING AND SYSTEMS

Door Optic Emitter Board AS-03356-0427

☑Upright ☑Slant ☑ESlant

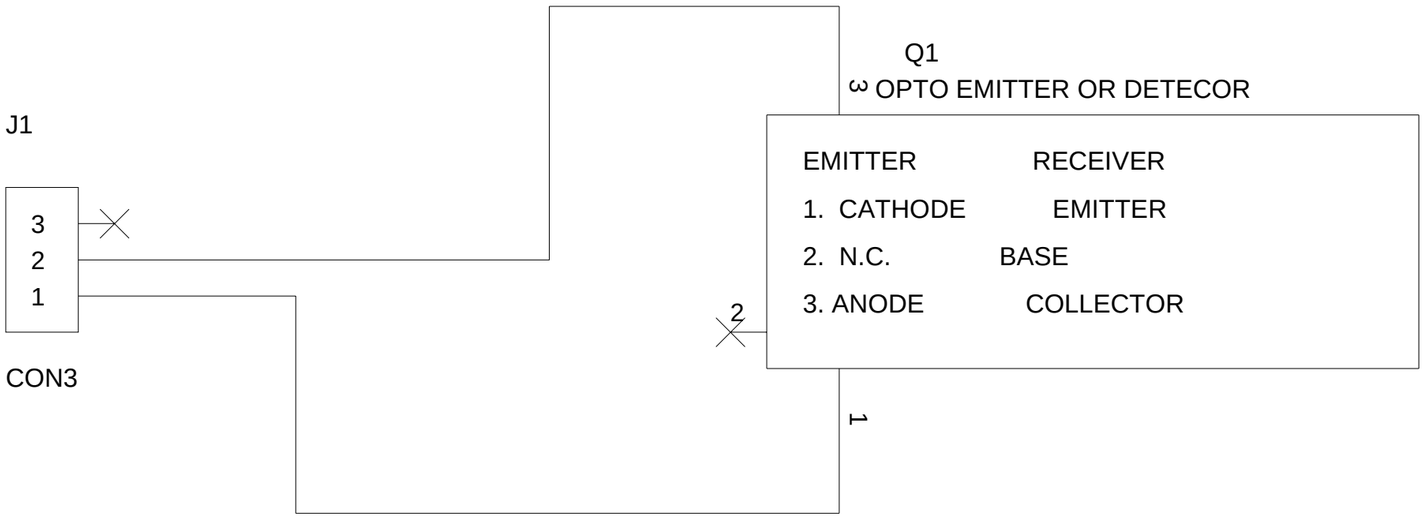

©2003 BALLY GAMING AND SYSTEMS

Hopper

Hopper Controller Board, FET, Dual Optic AS-03356-0368 ☑Upright ☑Slant ☑ESlant

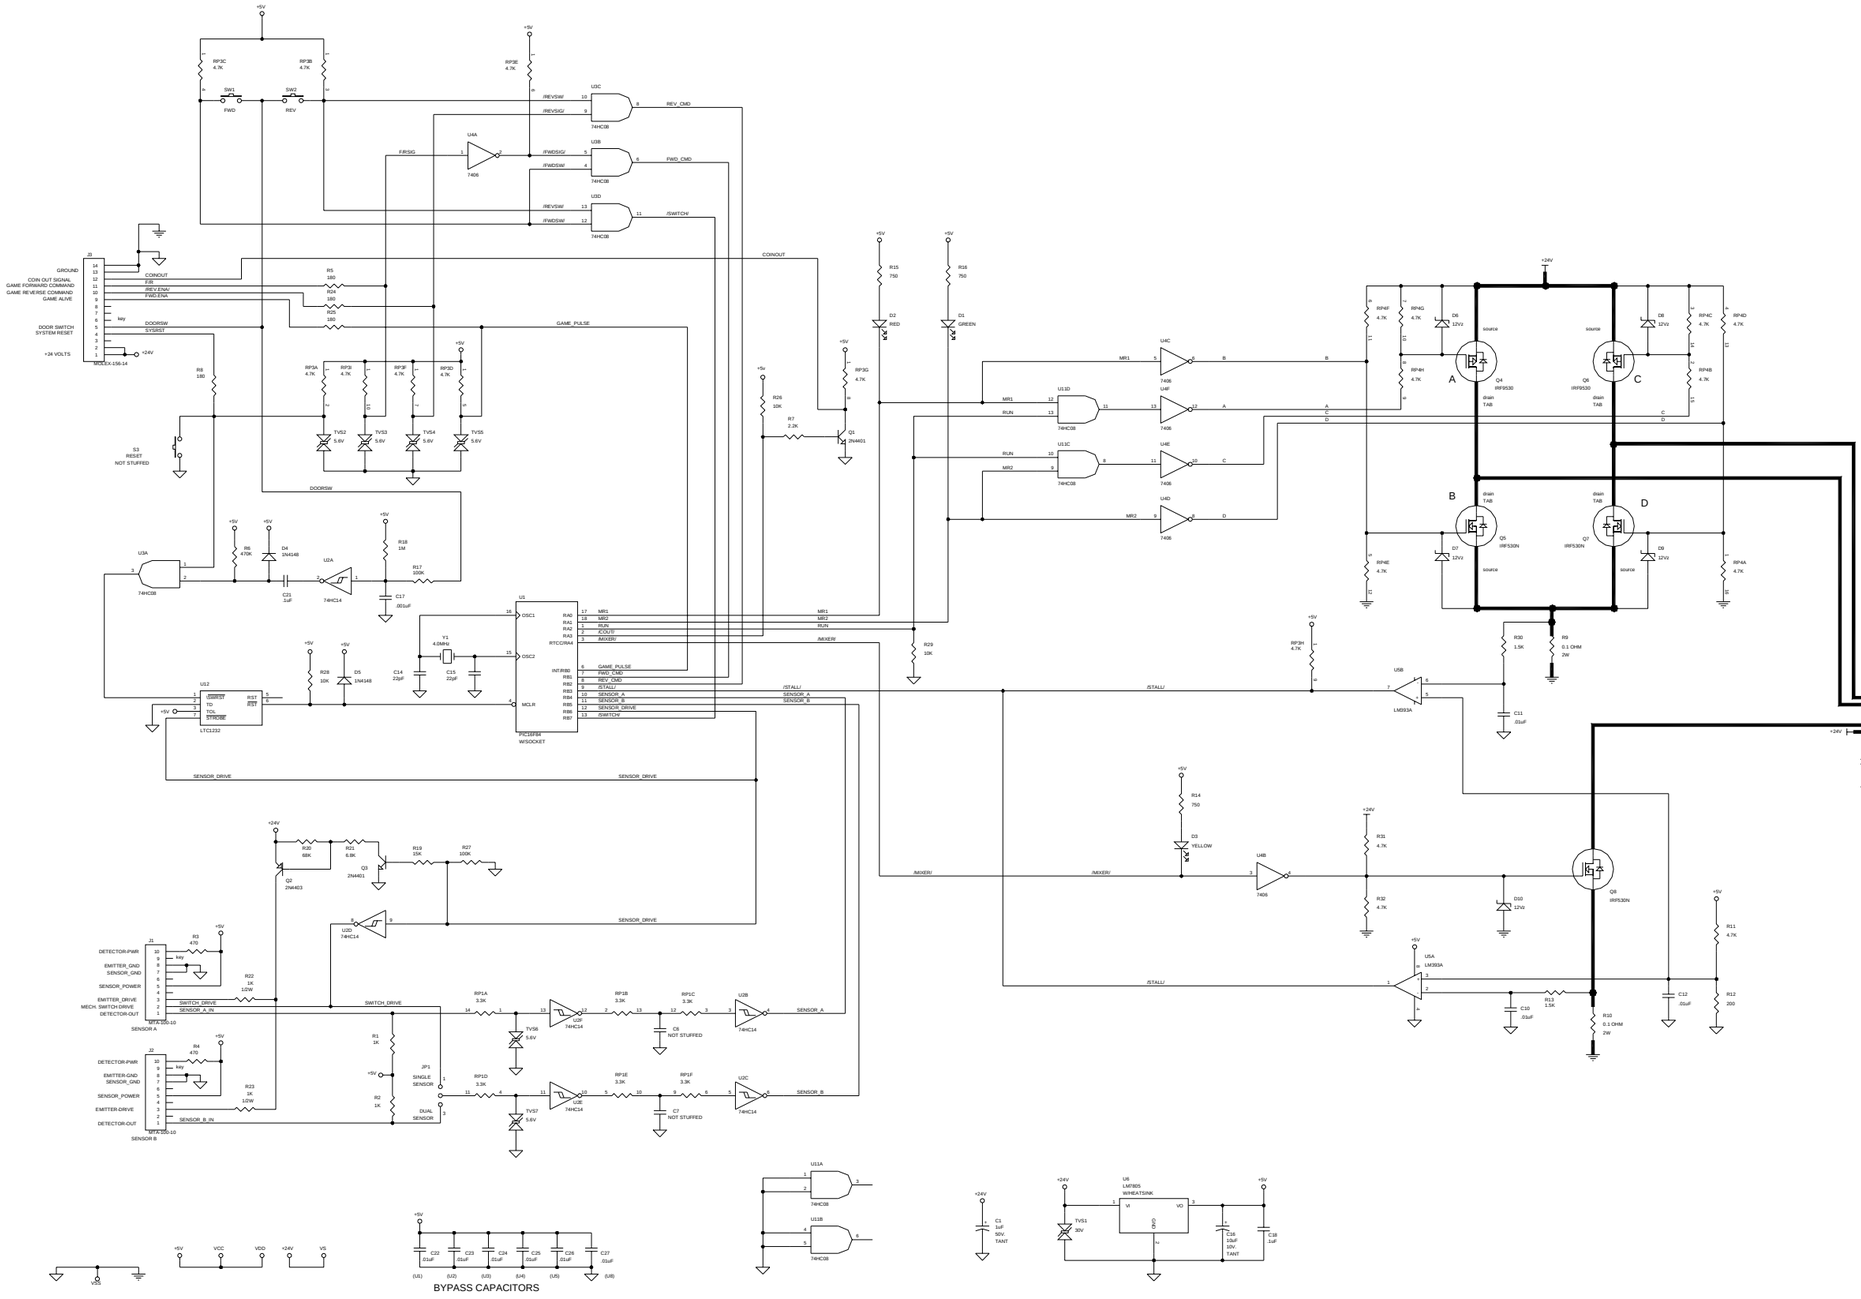

©2003 BALLY GAMING AND SYSTEMS

Data Vault™ Memory Board (France) AS-03356-0466 ☑Upright ☑Slant

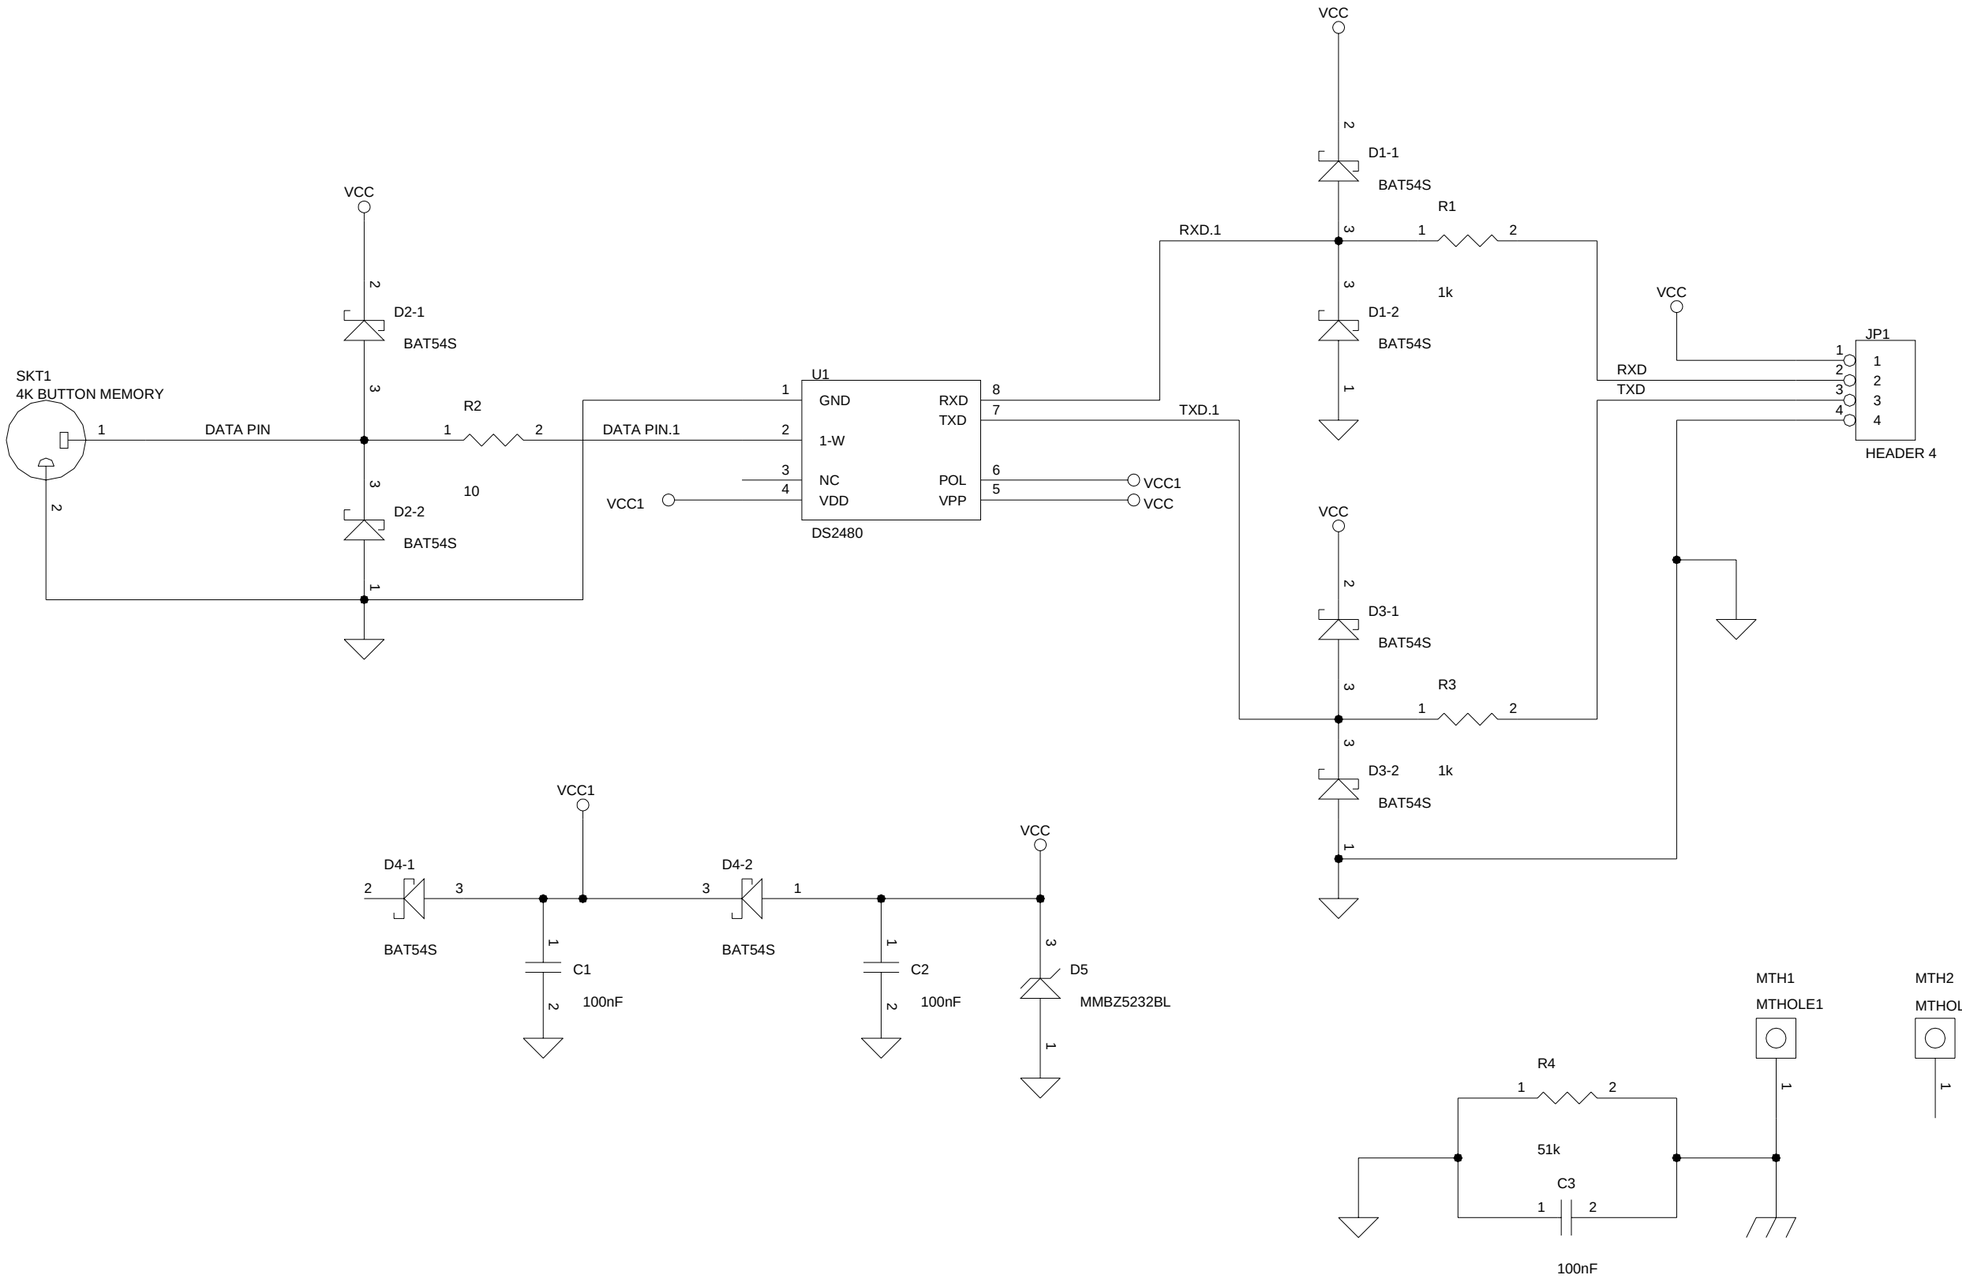

©2003 BALLY GAMING AND SYSTEMS

Reel Mechanism

Reel Drive Board AS-03356-0205

☑Upright ☑Slant ☑ESlant

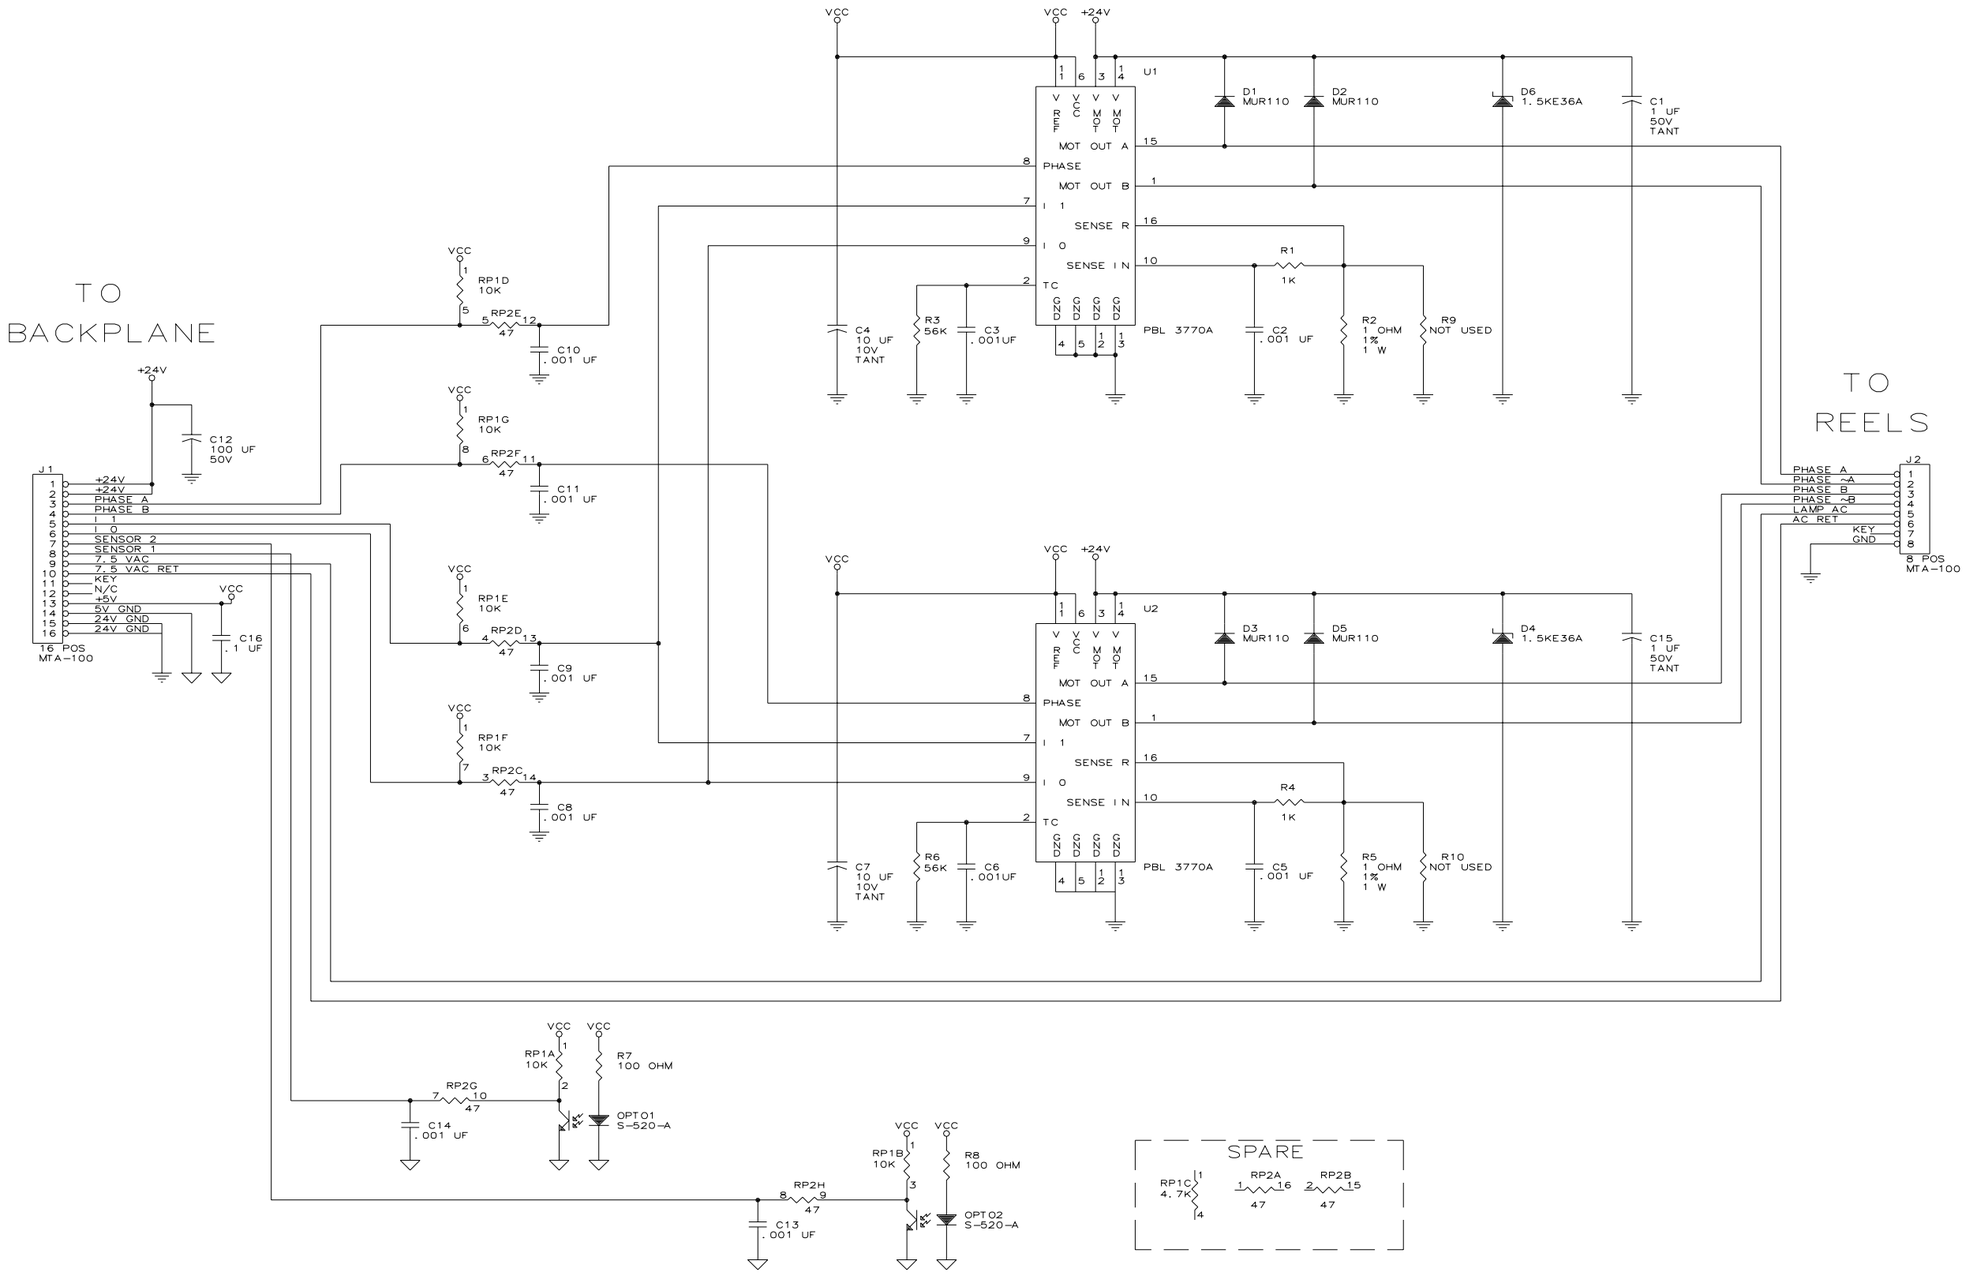

©2003 BALLY GAMING AND SYSTEMS

Sound Board

Deluxe Sound Board AS-03356-0362

☑Upright ☑Slant ☑ESlant

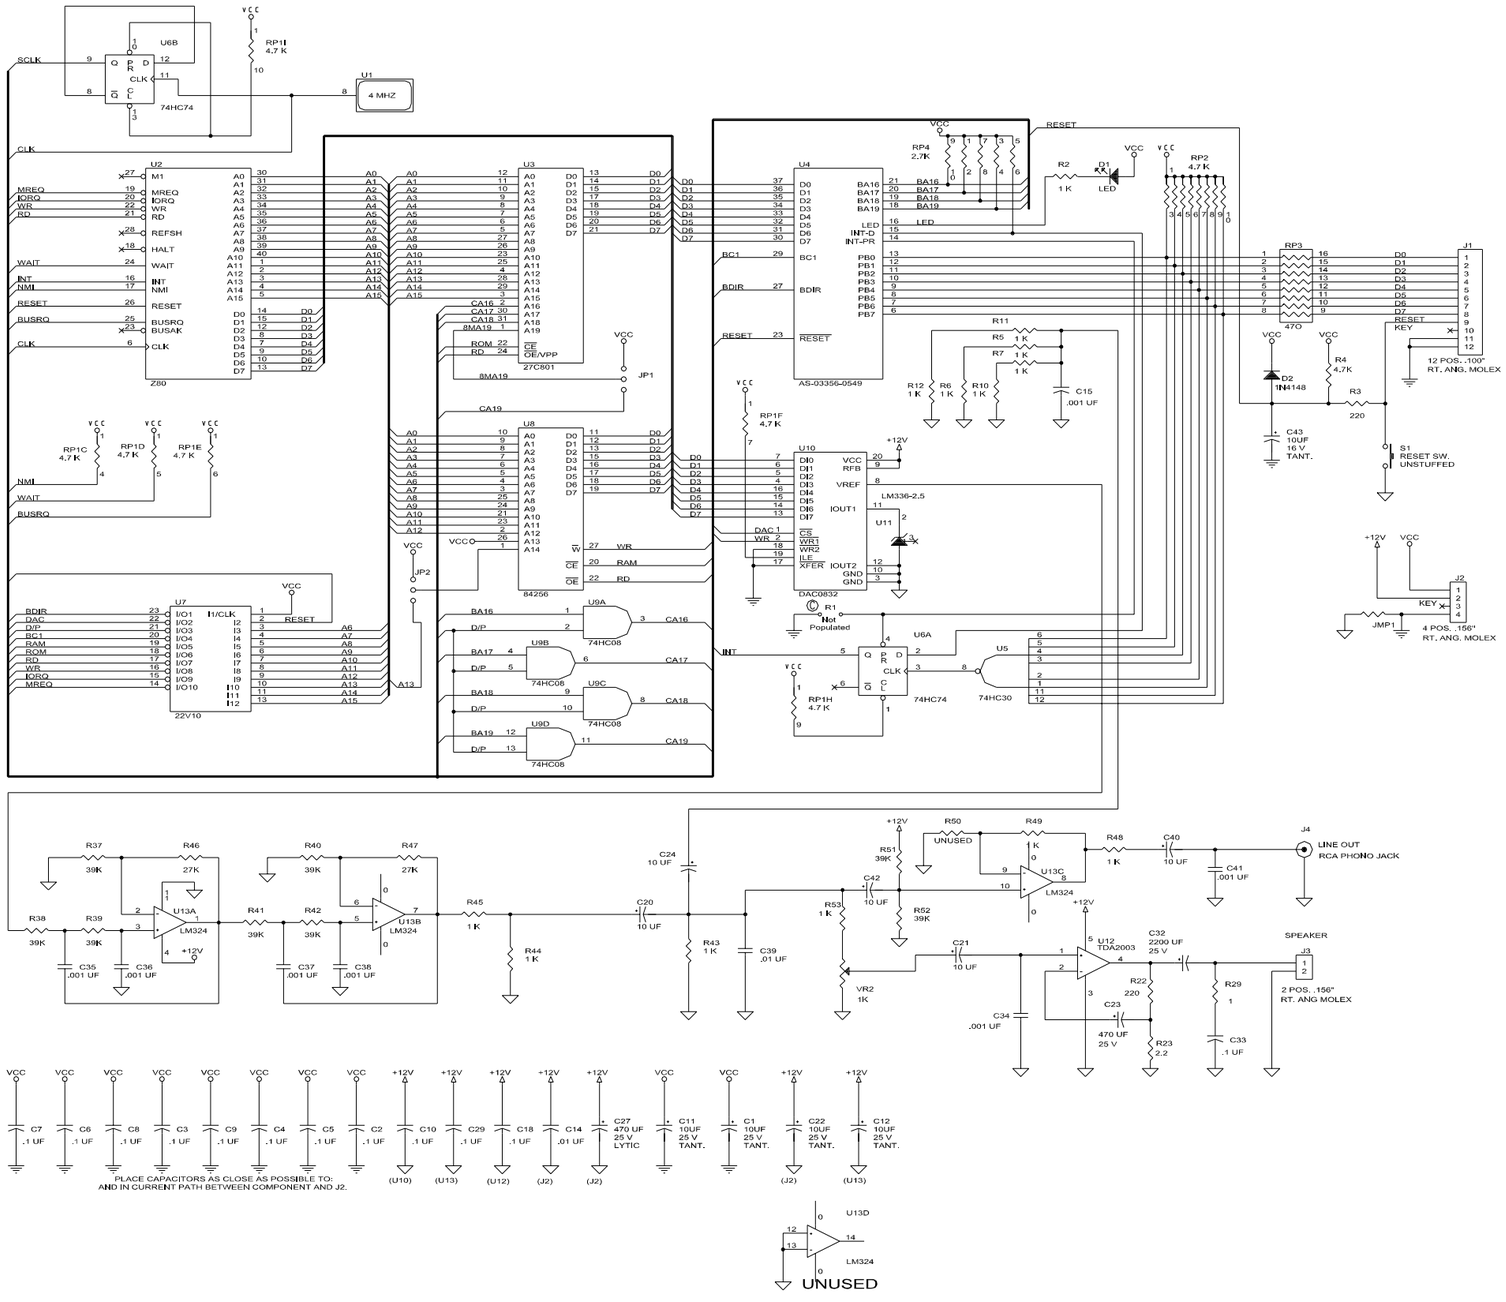

Sound Board

|| Pro Sound 2 Board (1 of 2) AS-03356-0512

☑Upright

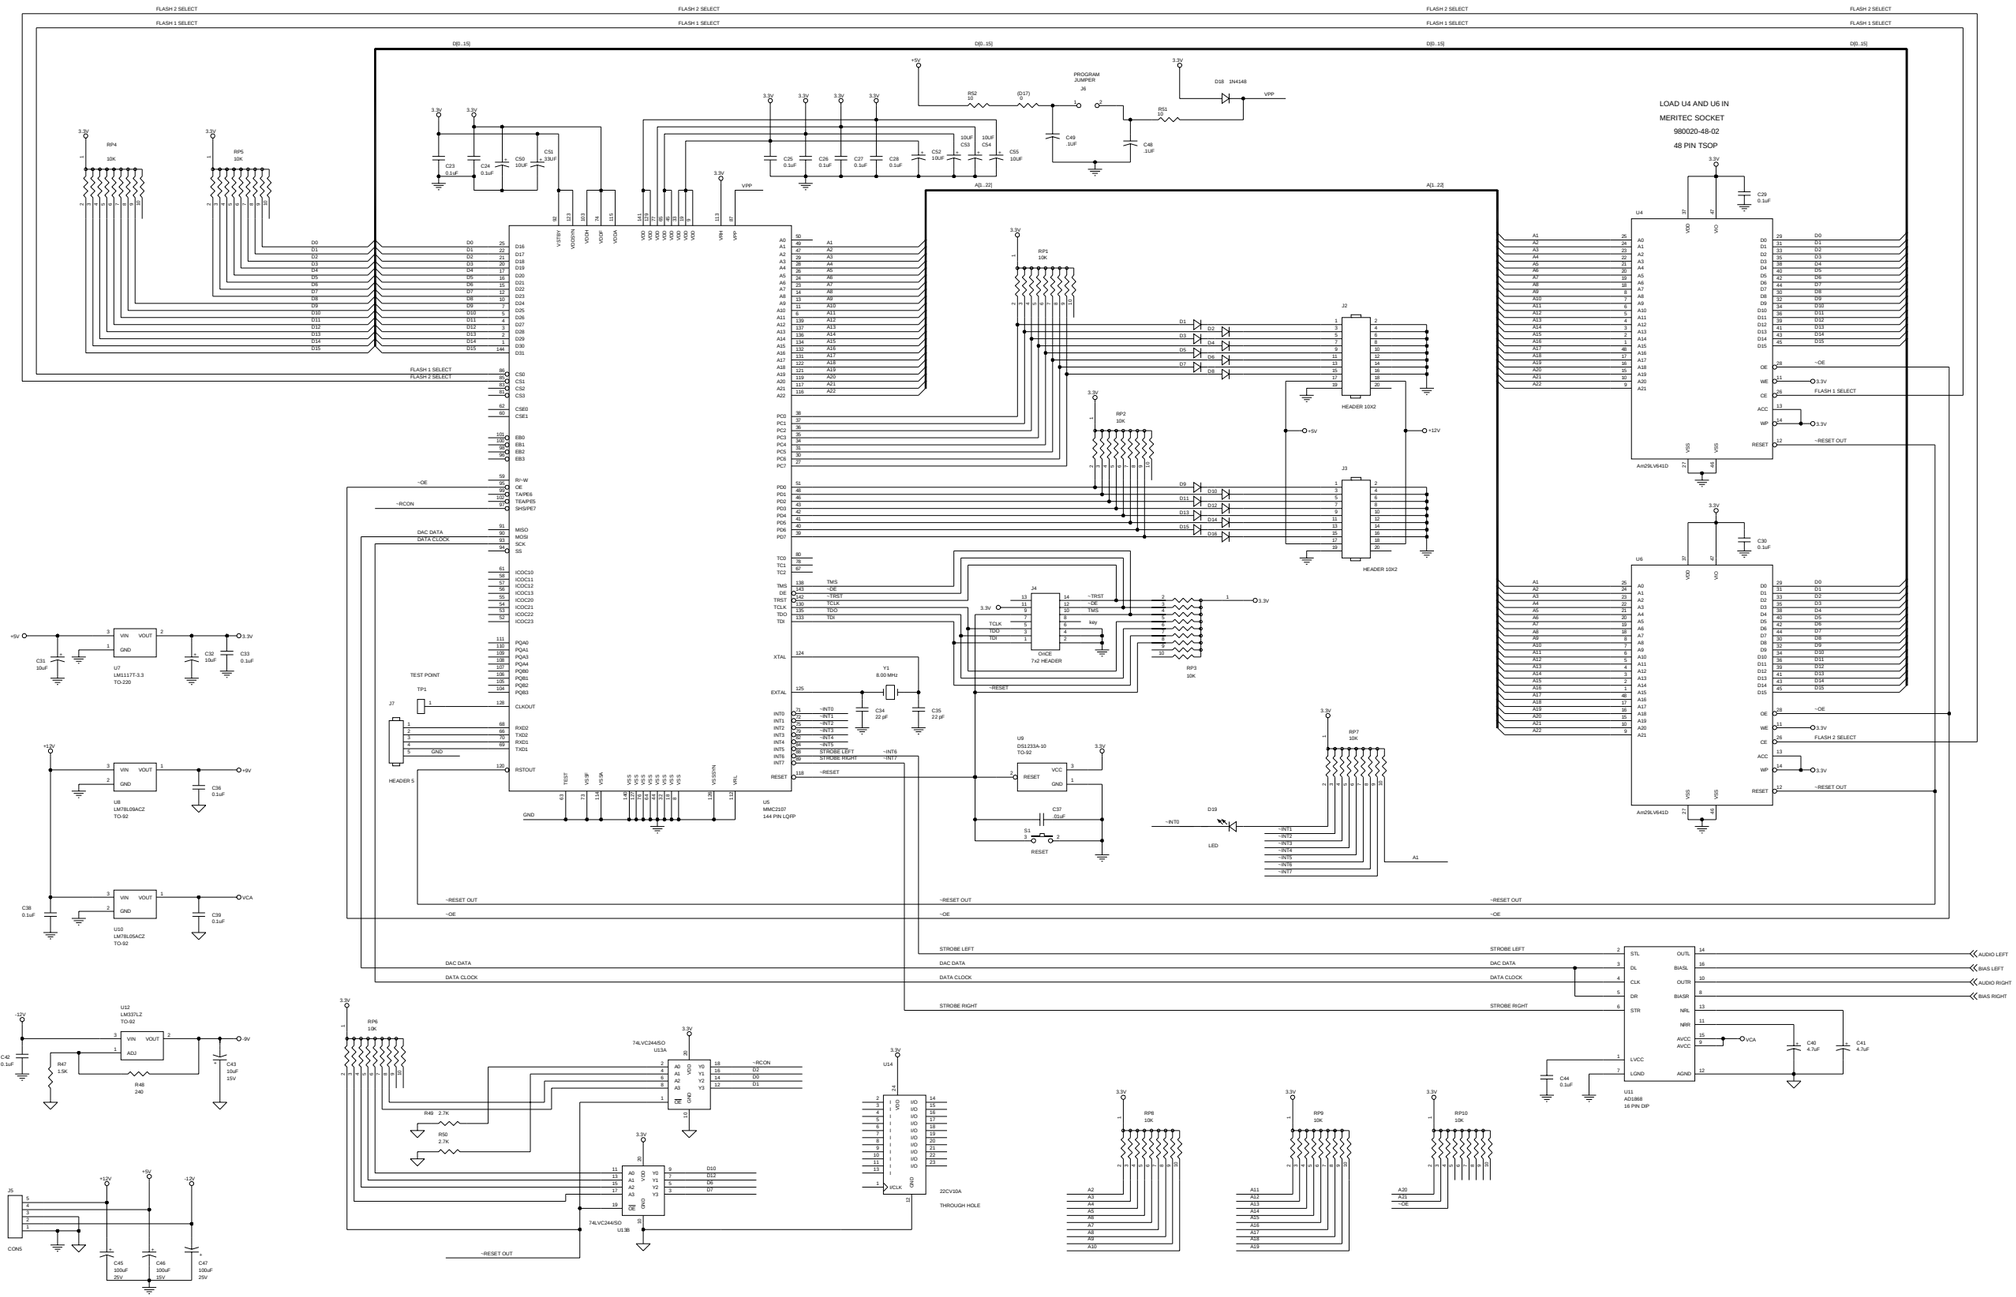

©2003 BALLY GAMING AND SYSTEMS

Sound Board

Pro Sound 2 Board (2 of 2) AS-03356-0512

☑Upright

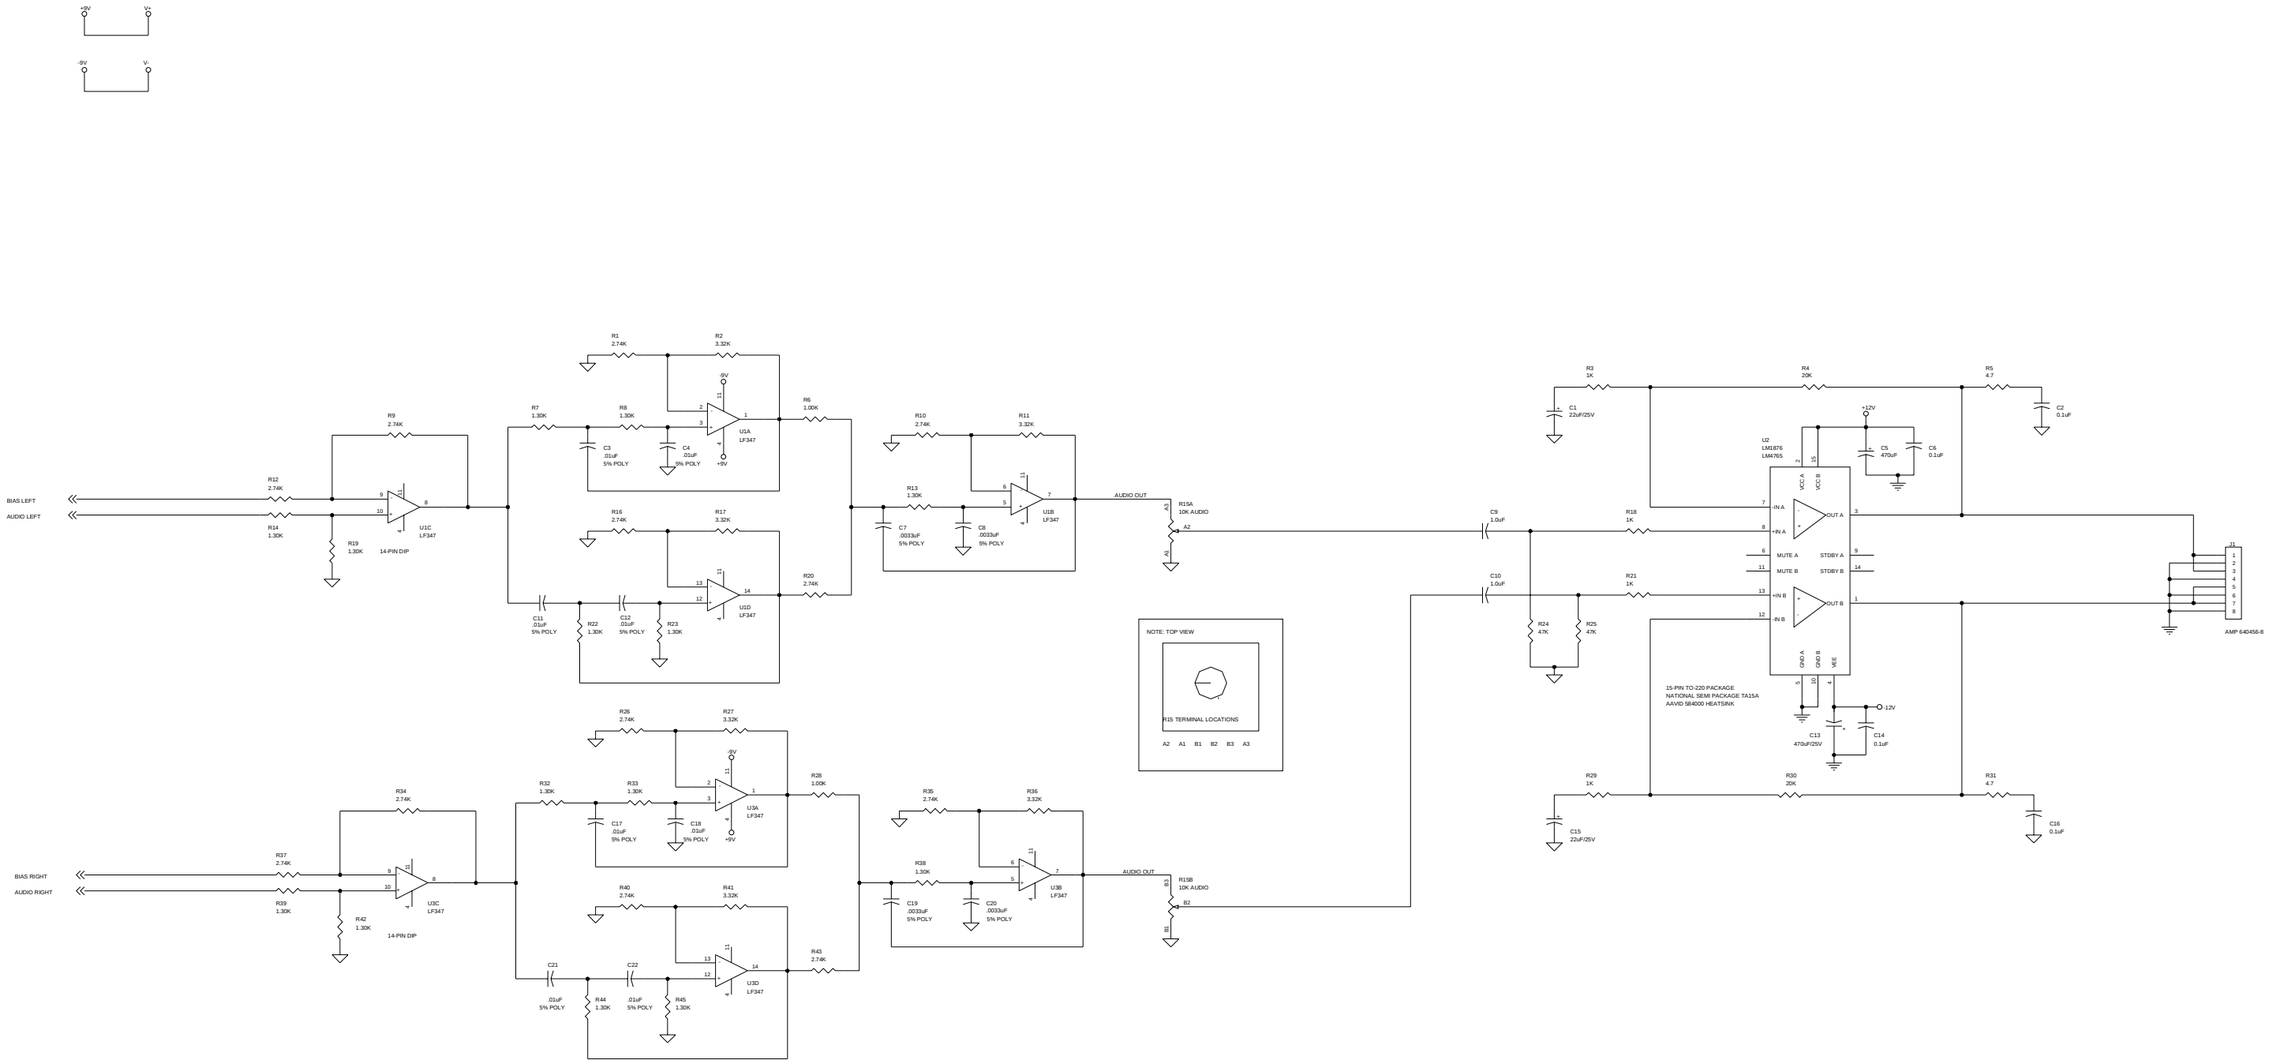

©2003 BALLY GAMING AND SYSTEMS

| - Revised, || - New

ProSlot-6000™

|| LSAMS Fiber Optic Board AS-03356-0185

☑Upright ☑Slant

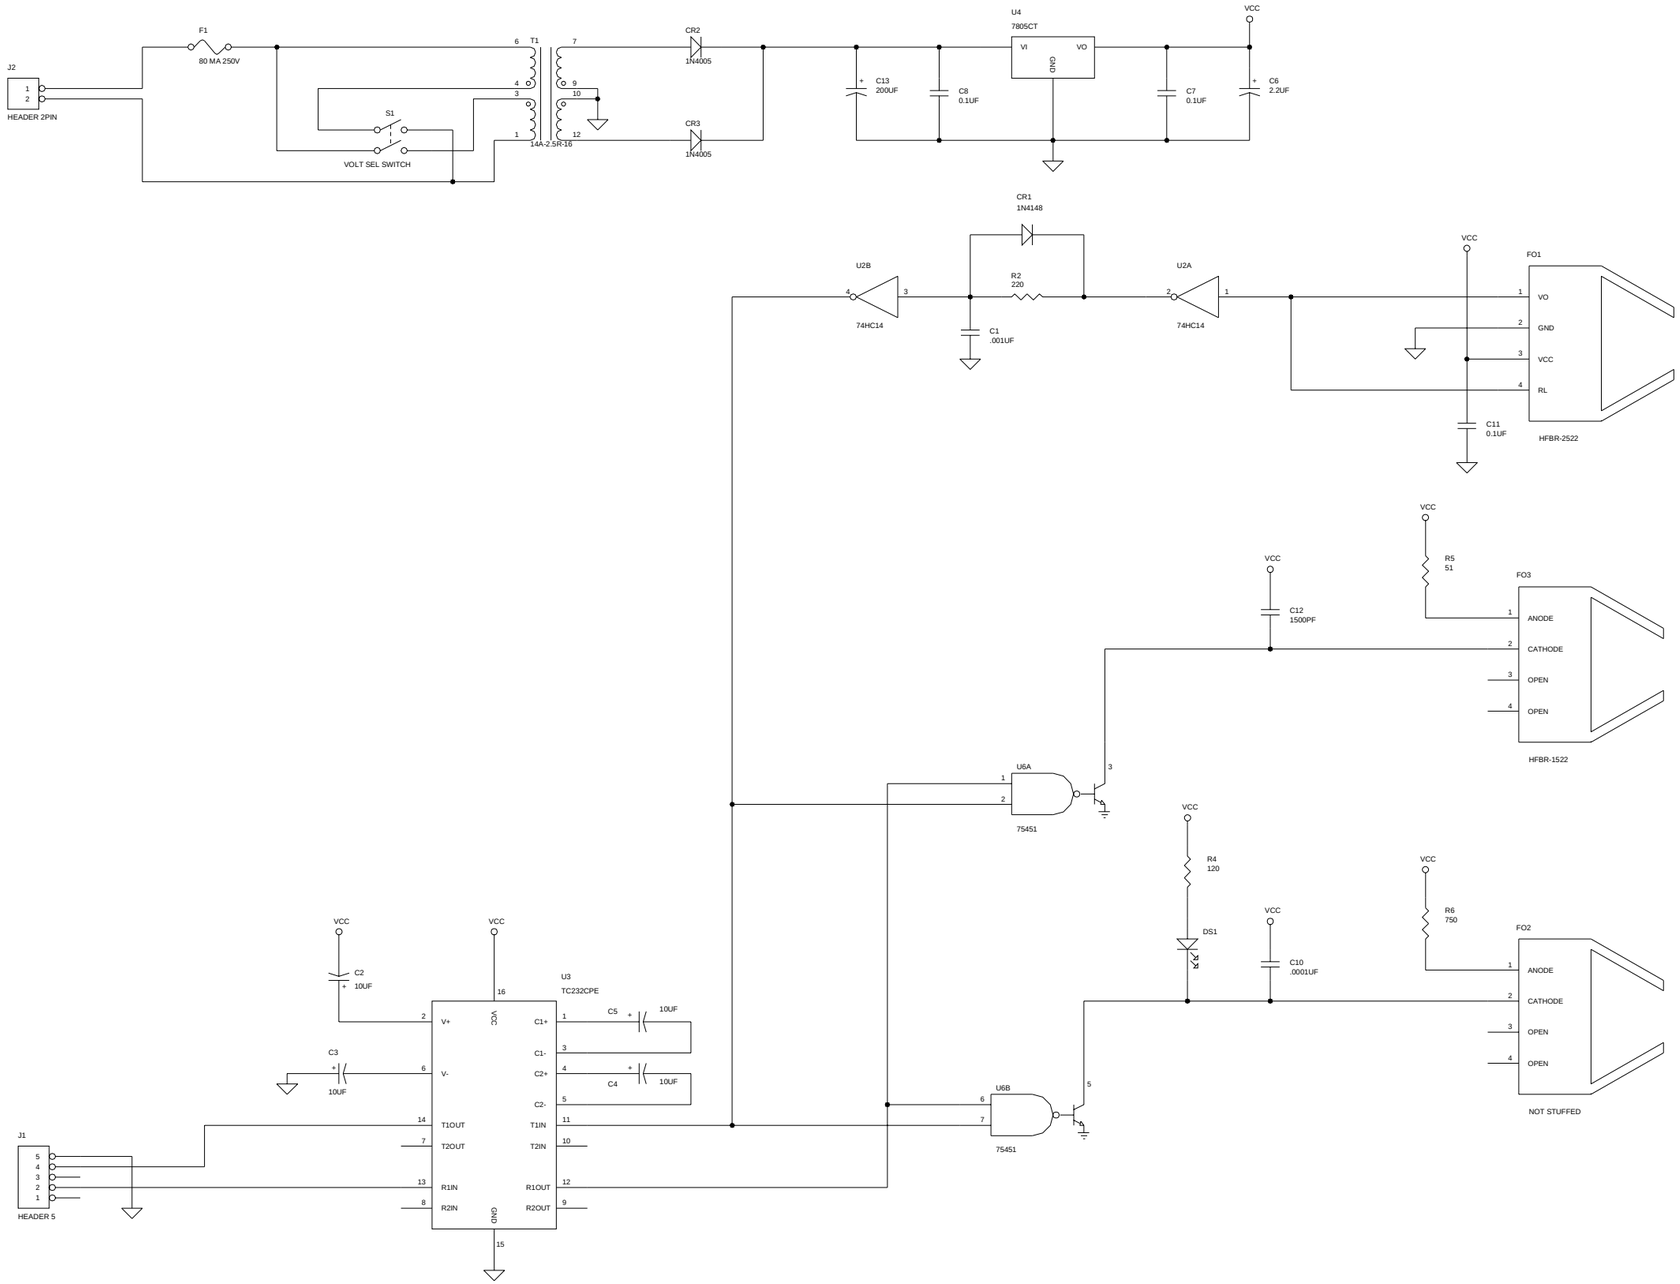

©2003 BALLY GAMING AND SYSTEMS

|| Display Board, Horse Play AS-03356-0524

☑Upright

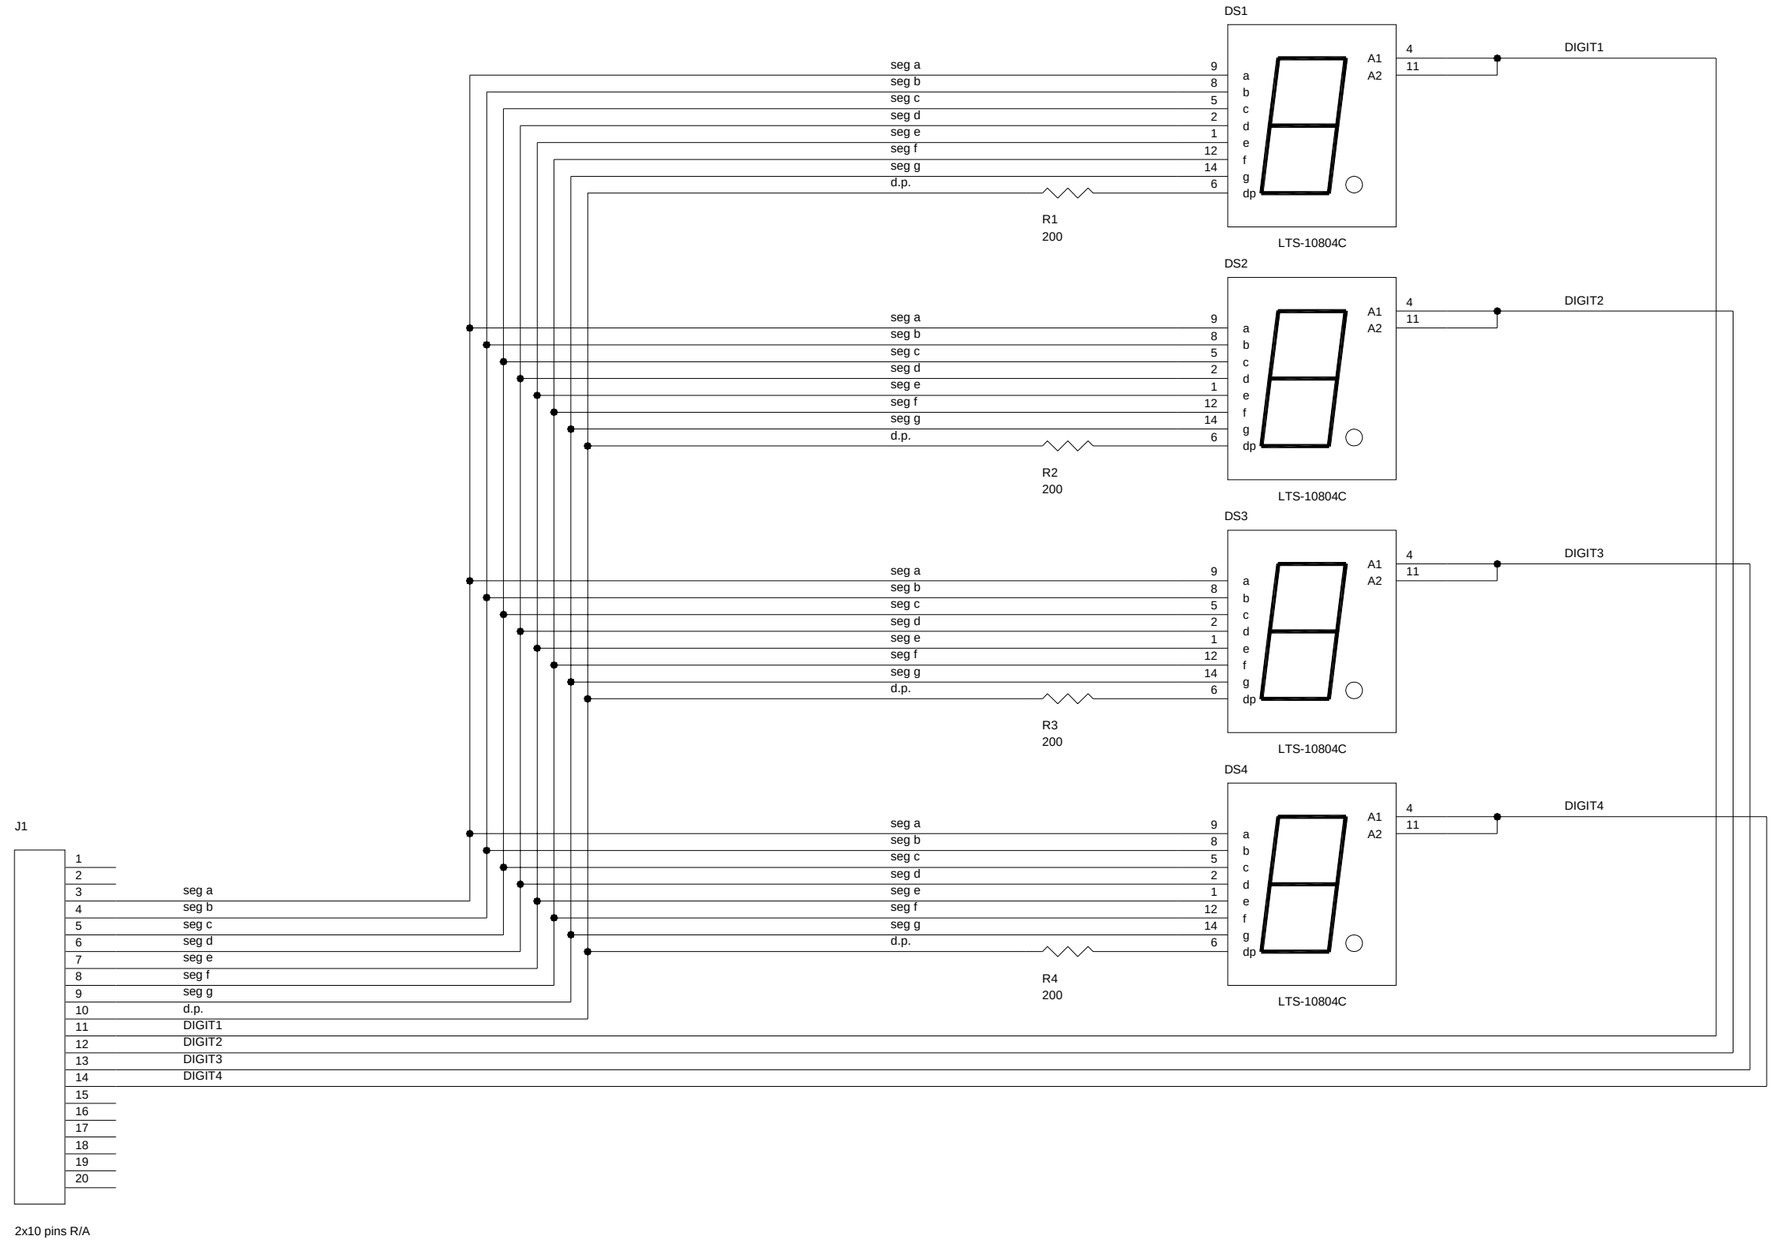

©2003 BALLY GAMING AND SYSTEMS

Marquee

|| **LED Board with Power Connector, Diamond AS-03356-0621** ☑Upright

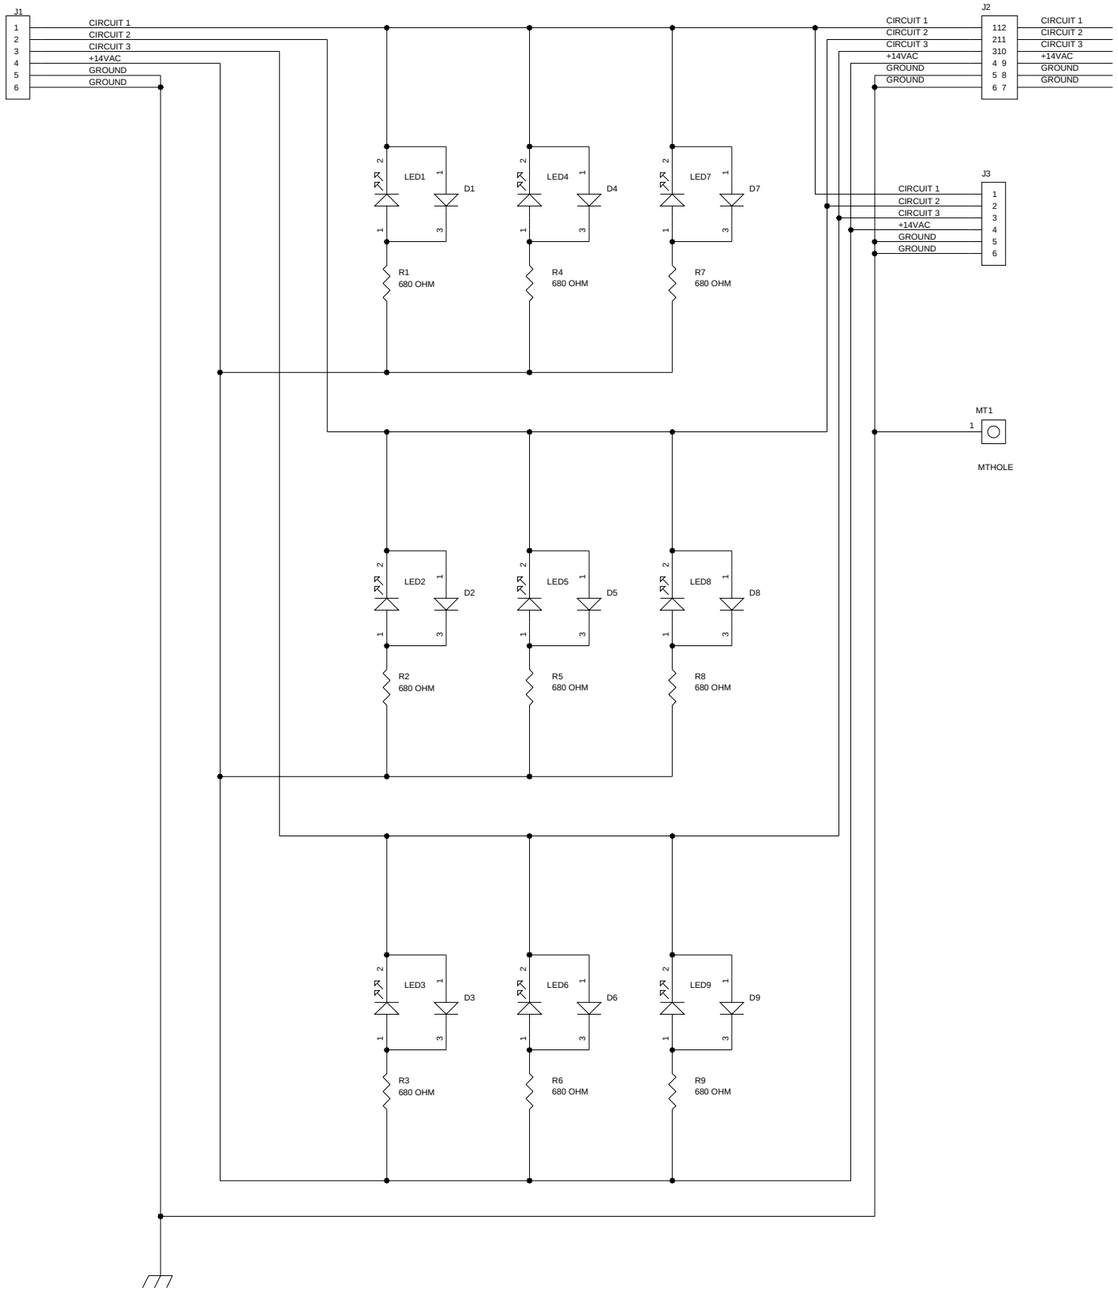

Marquee

|| **LED Board, Diamond AS-03356-0622**

☑Upright

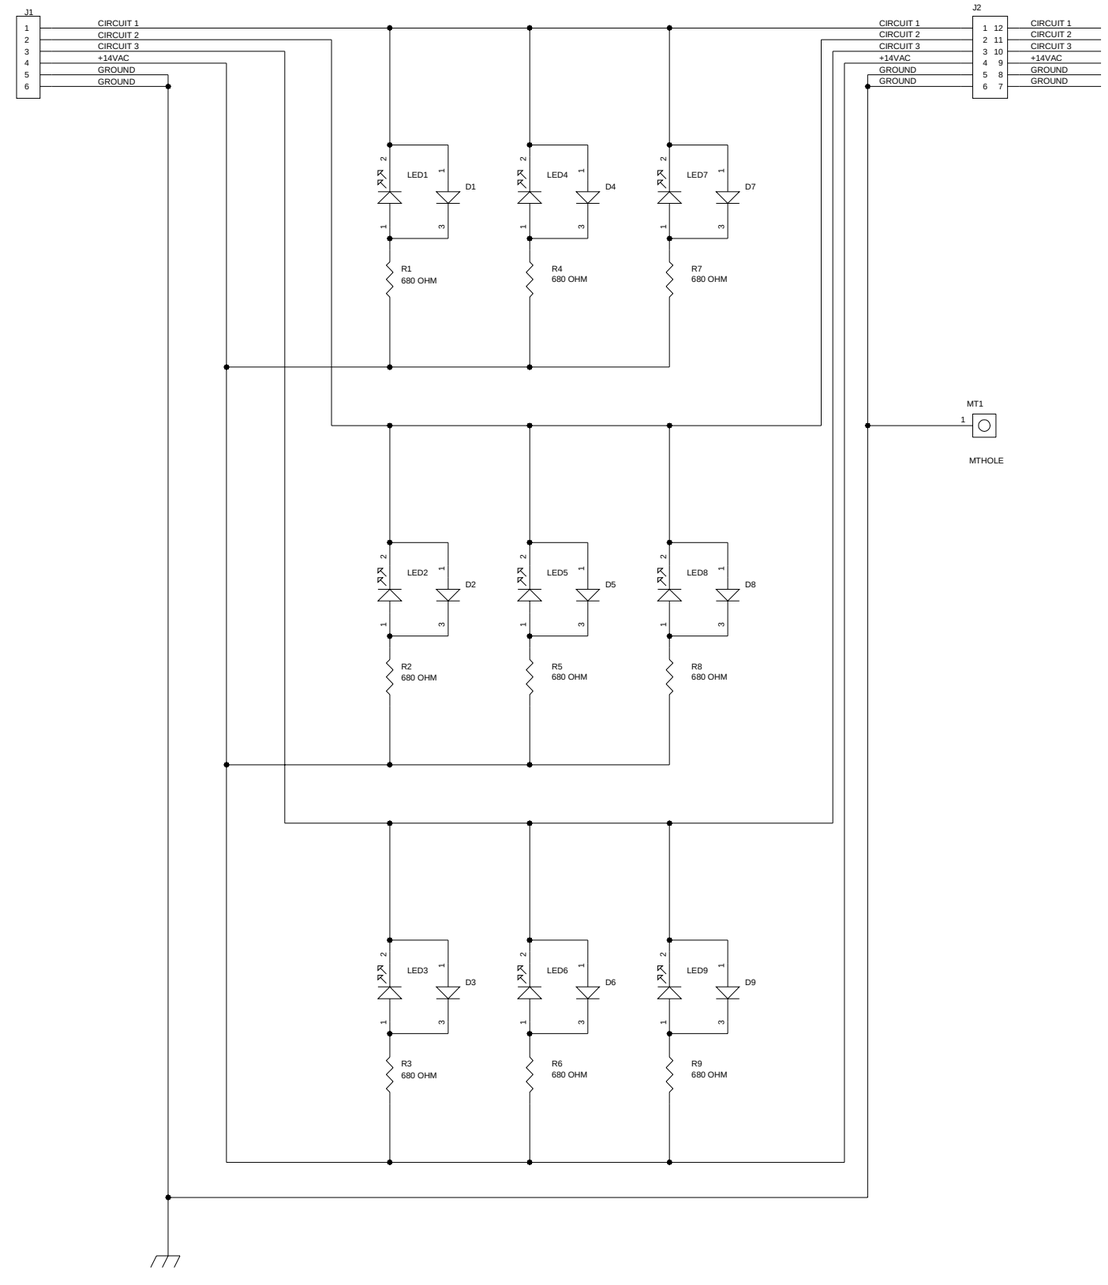

©2003 BALLY GAMING AND SYSTEMS

Marquee

|| LED Power Board, Round AS-03356-0577

☑Upright

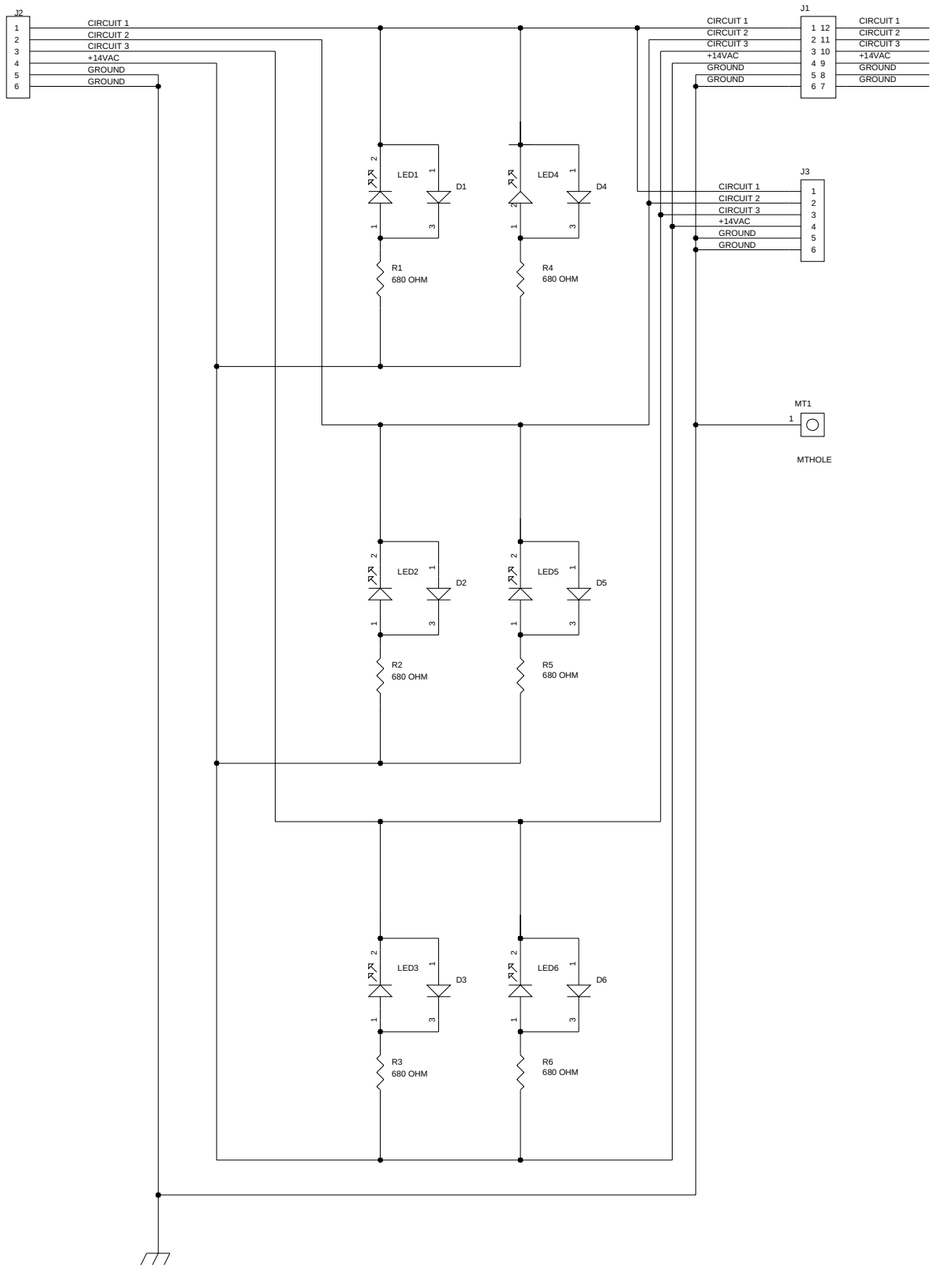

Marquee

|| Marquee Board, To Tell the Truth AS-03356-0551

☑Upright

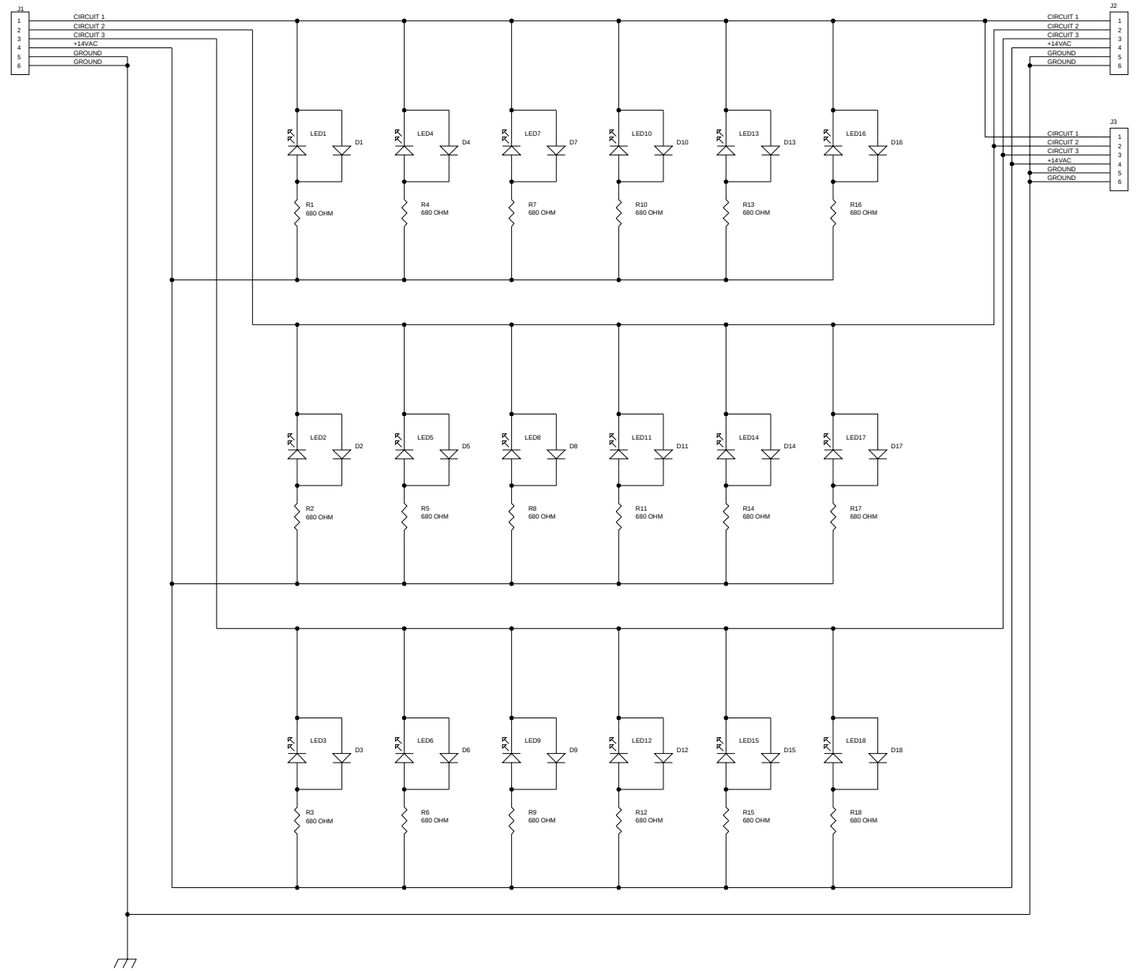

©2003 BALLY GAMING AND SYSTEMS

Marquee

Printed Circuit Board “A” - Generic Oval AS-03356-0592

☑Upright

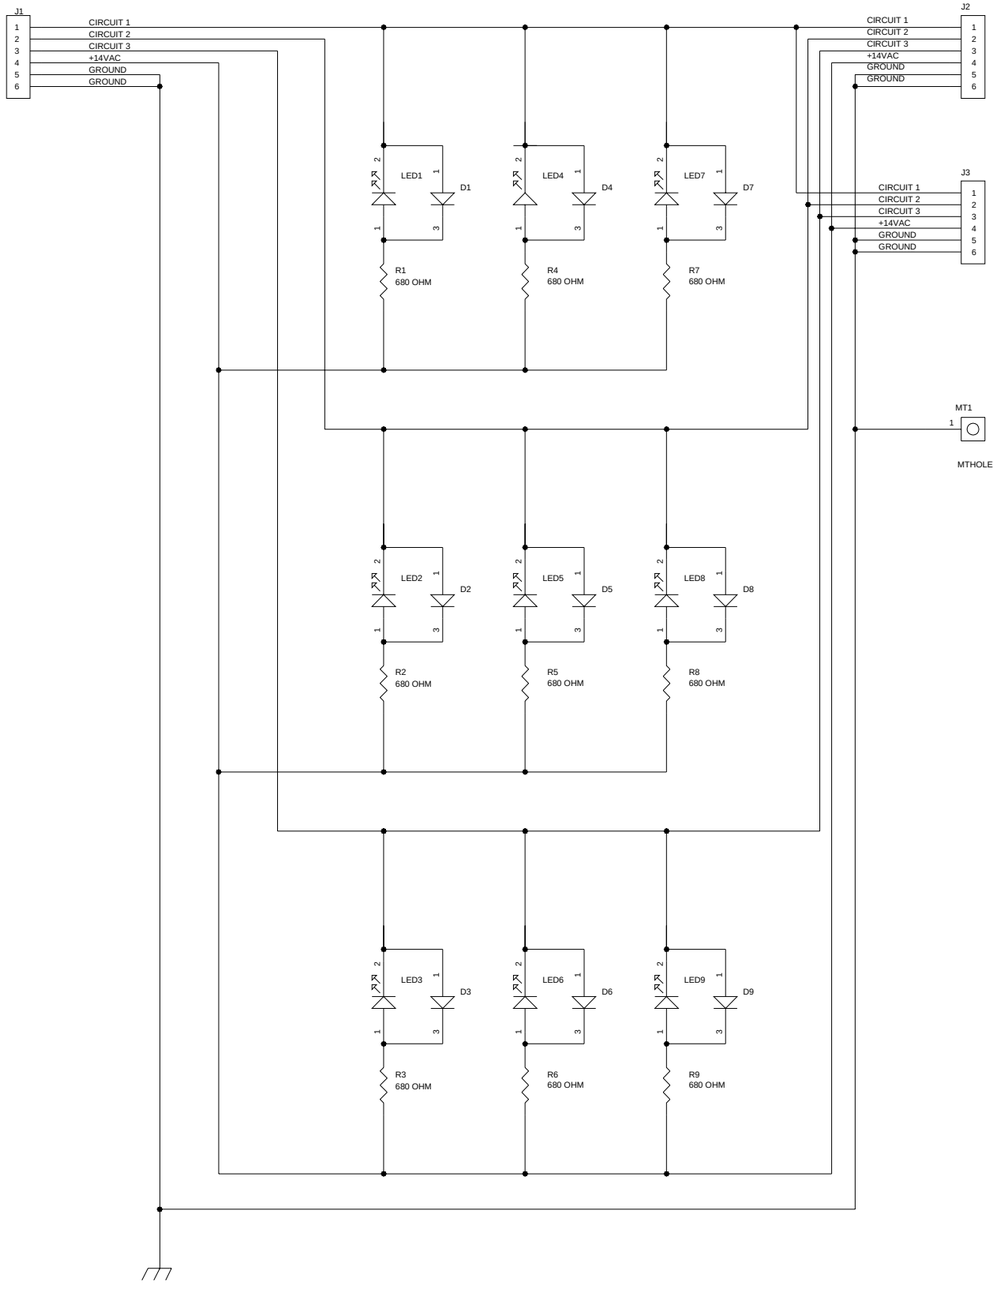

Marquee

|| Printed Circuit Board “B”- Generic Oval AS-03356-0593

☑Upright

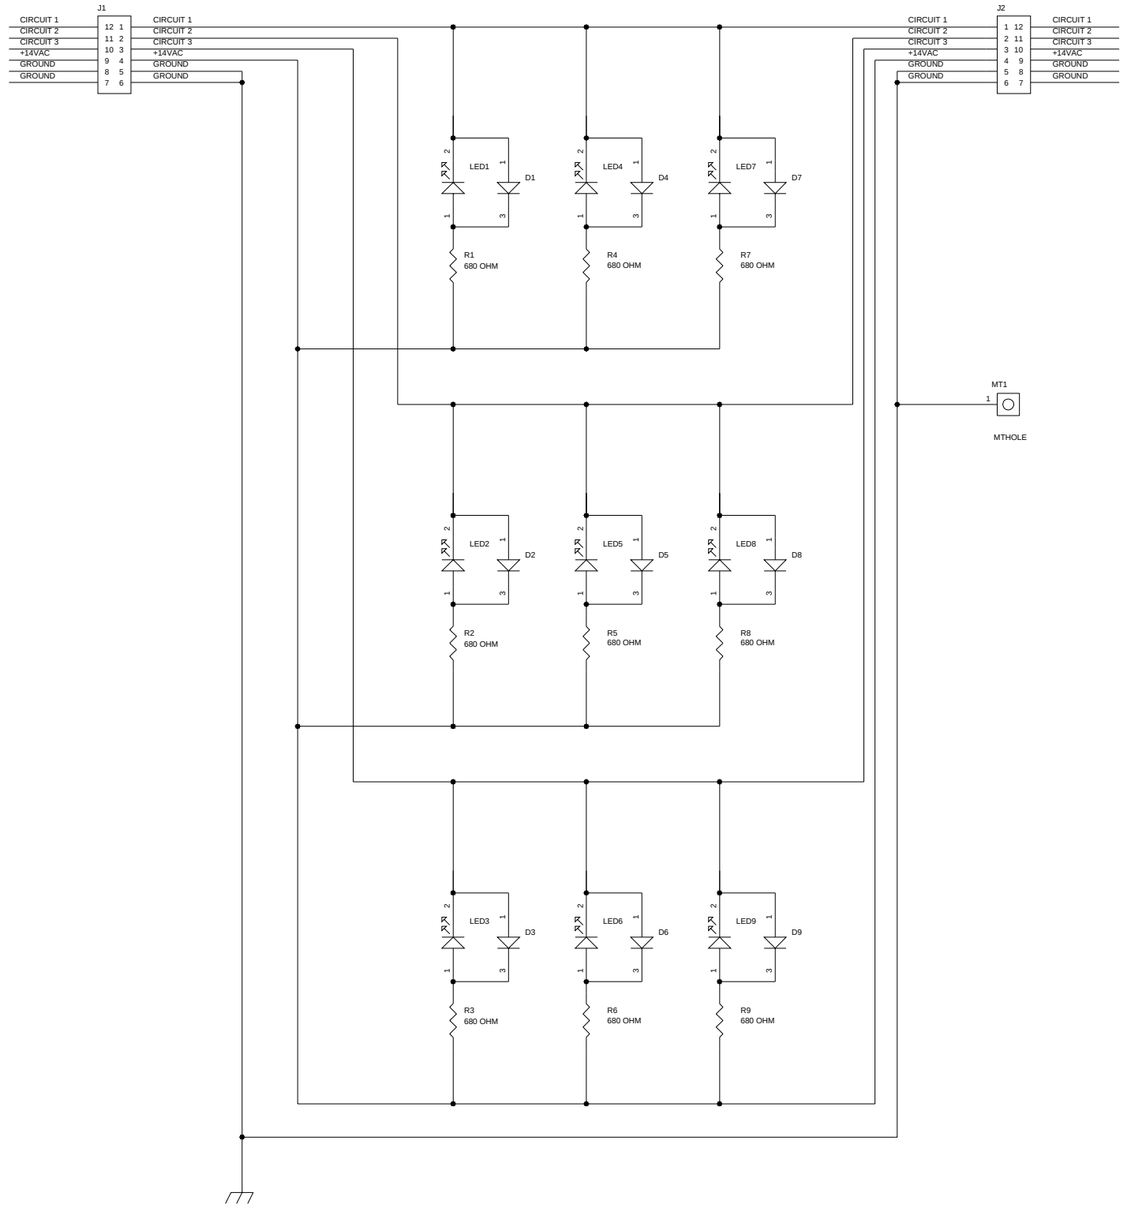

©2003 BALLY GAMING AND SYSTEMS

Power Board, Movie Star Marquee AS-03356-0557

|| ☑Upright

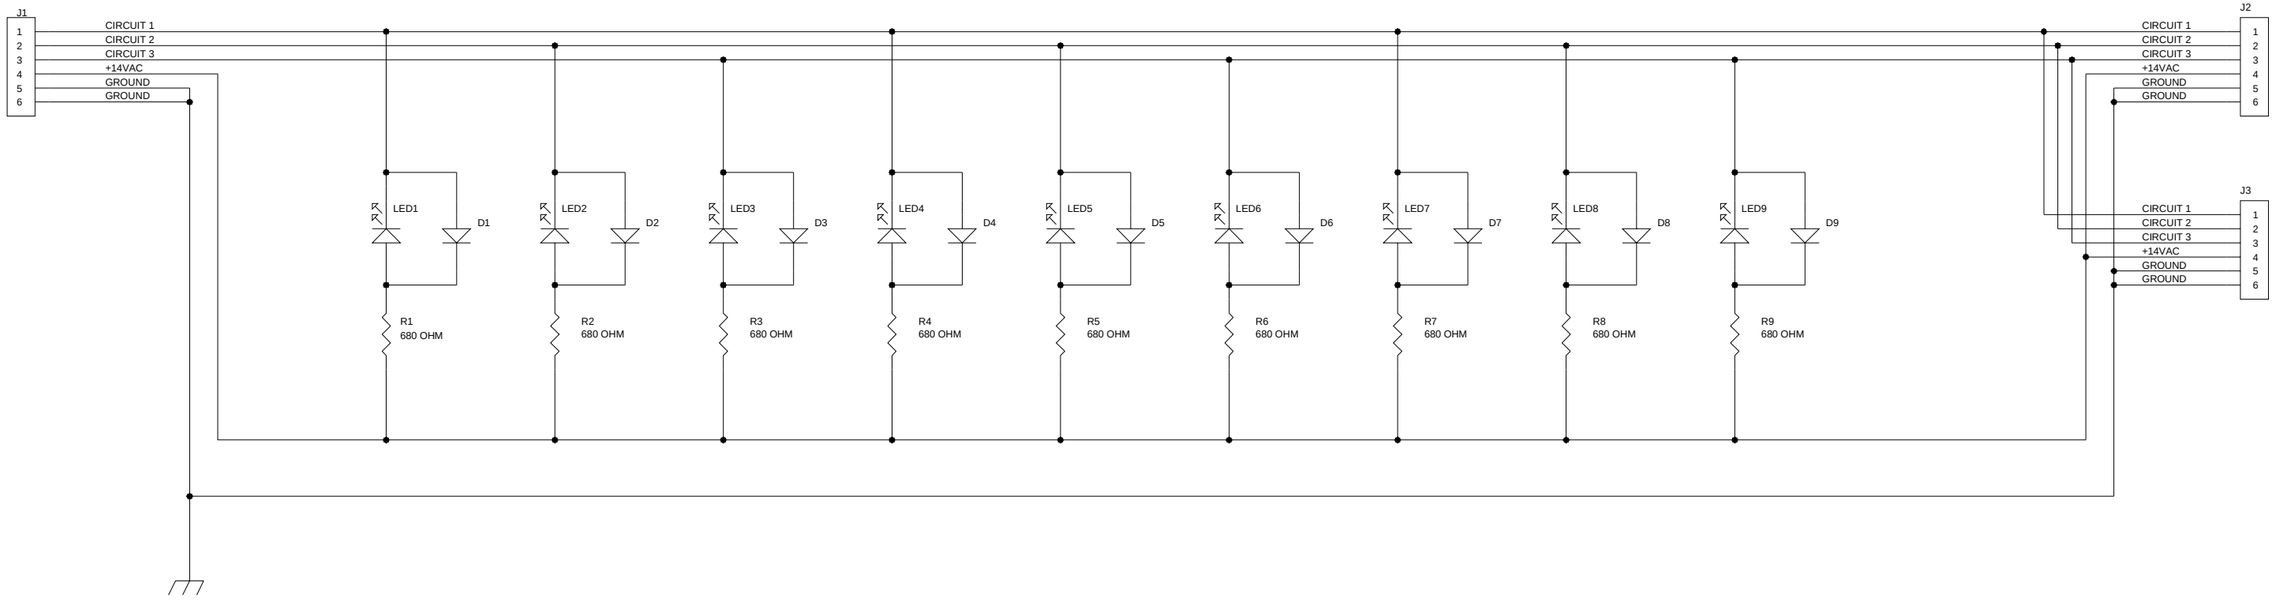

©2003 BALLY GAMING AND SYSTEMS