# Ajax

**AJAX Device Configuration**

GCXONE supports AJAX integration for centralized alarm reception. AJAX hubs containing NVRs, intrusion panels, and other alarm-triggering objects can be integrated with GCXONE for centralized alarm management.

**Key Features of AJAX Integration**

1. Supported Device Types:

- AJAX Hub
- AJAX NVR

2. Supported Functionality:

- Discovery
- Alarm reception only — no live streaming, playback, or PTZ features

3. Alarm Transmission Protocol:

- SIA (Security Industry Association Protocol)

**How AJAX Works in GCX-ONE:**

AJAX Hub / AJAX NVR:

1. The AJAX Hub acts as a container for multiple alarm objects such as intrusion panels, NVRs, and other sensors.
2. In GCXONE, you can add either:

- AJAX Hub: For AJAX manufactured cameras
- AJAX NVR: For third-party cameras

3. All alarms from Hub or NVR objects are received collectively under this device in GCXONE.

**Configuration Steps**

**1. Obtain Hub ID or Device ID**

1. Hub ID is required for adding an AJAX Hub
2. Device ID is required for adding an AJAX NVR

- Both must be collected from the AJAX client application specific to the customer's Hub

**Important: **

When entering the Hub ID or Device ID:

- GCXONE performs an existence check using the NXGEN API key.

- The customer must invite NXGEN to their AJAX Hub through the AJAX client application. Without this invitation, GCXONE cannot verify or link to the Hub or NVR.

### 2. Add AJAX Device in GCXONE

****Step 1: ****Navigate to the Devices tab

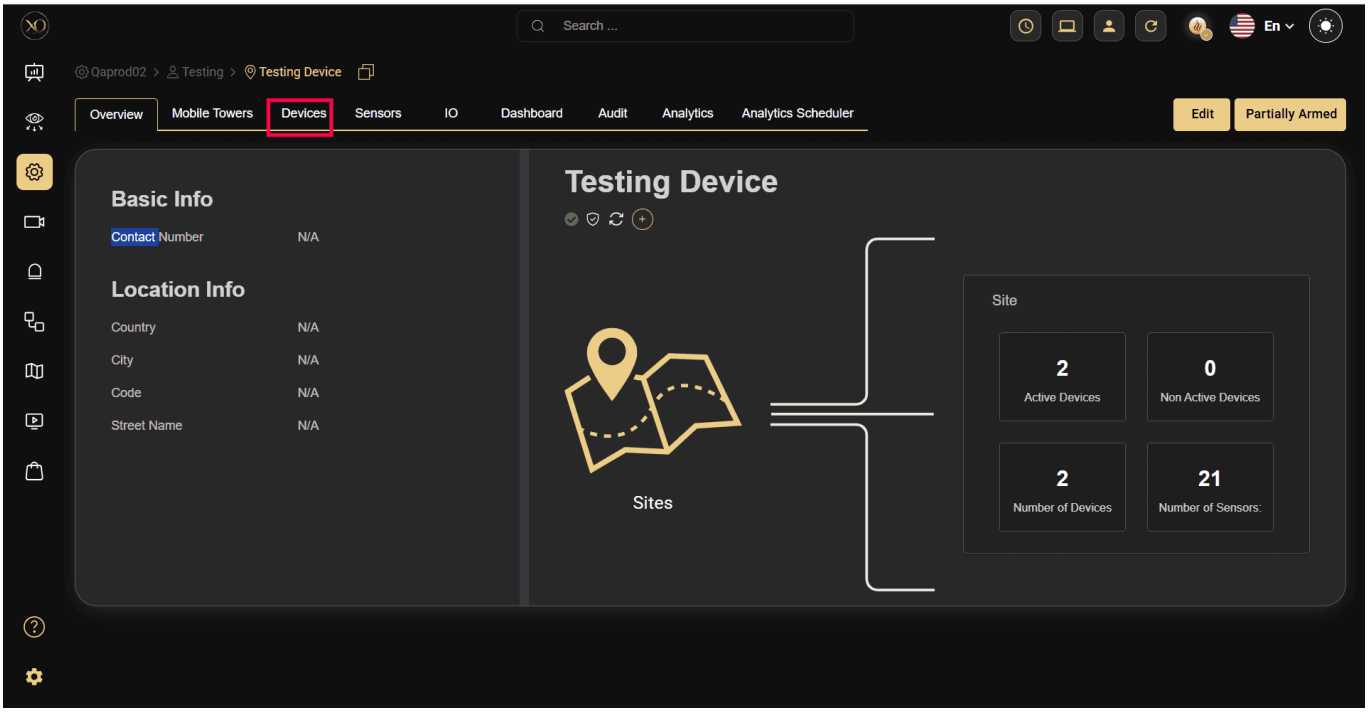


****Step 2: ****Click the Add button

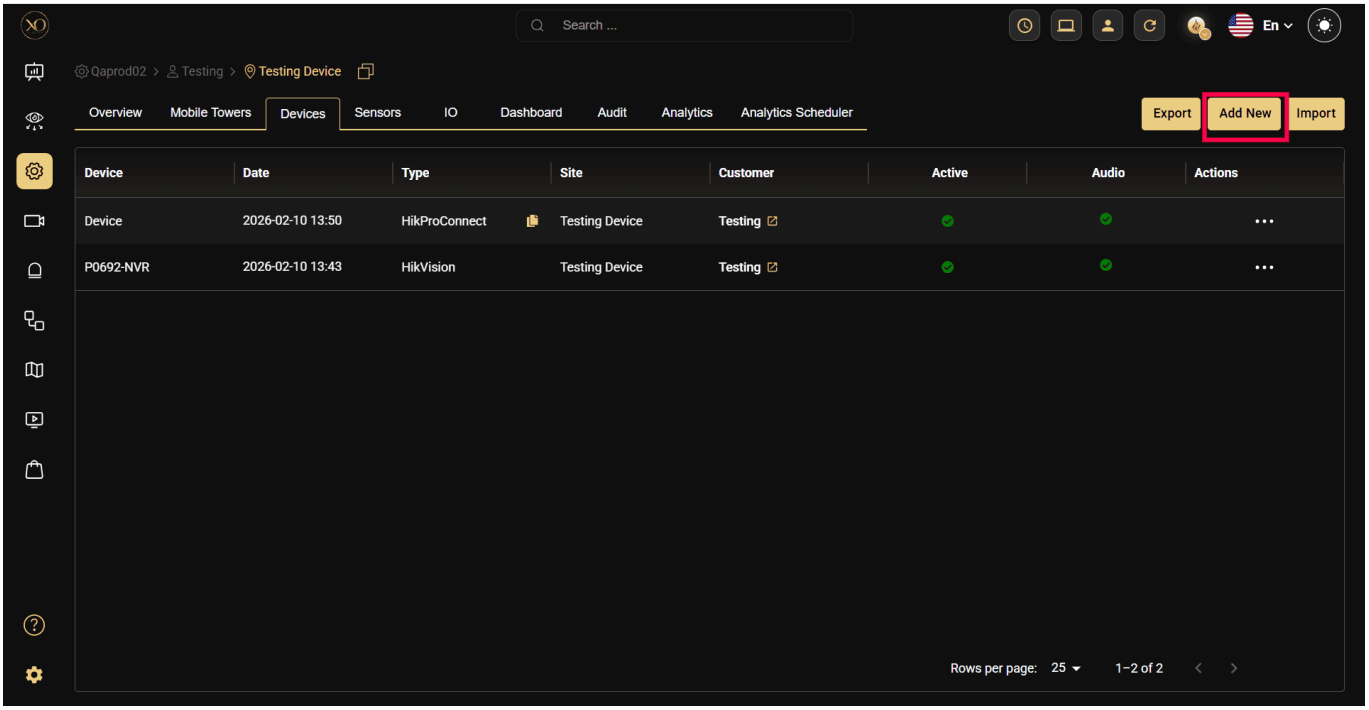

****Step 3: ****The Add Device dialog will be displayed

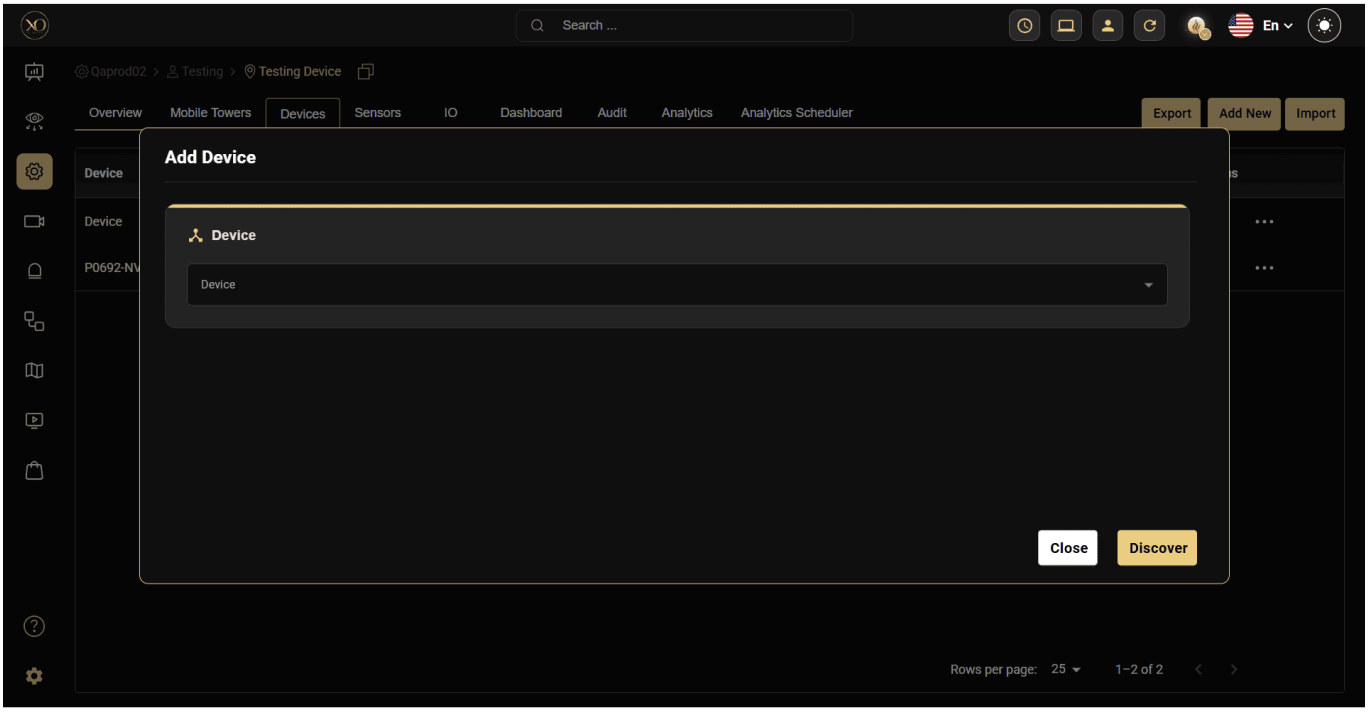


****Step 4: ****In the dialog, open the Device dropdown and select AJAX Hub or AJAX NVR

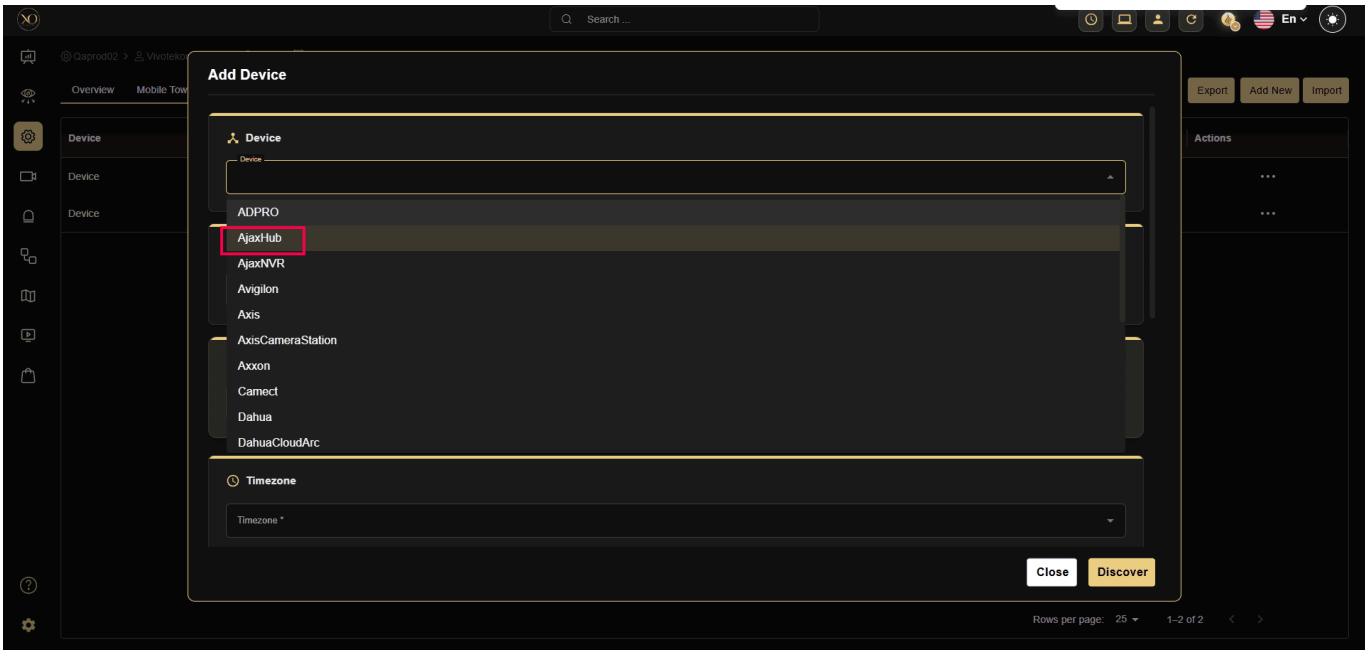

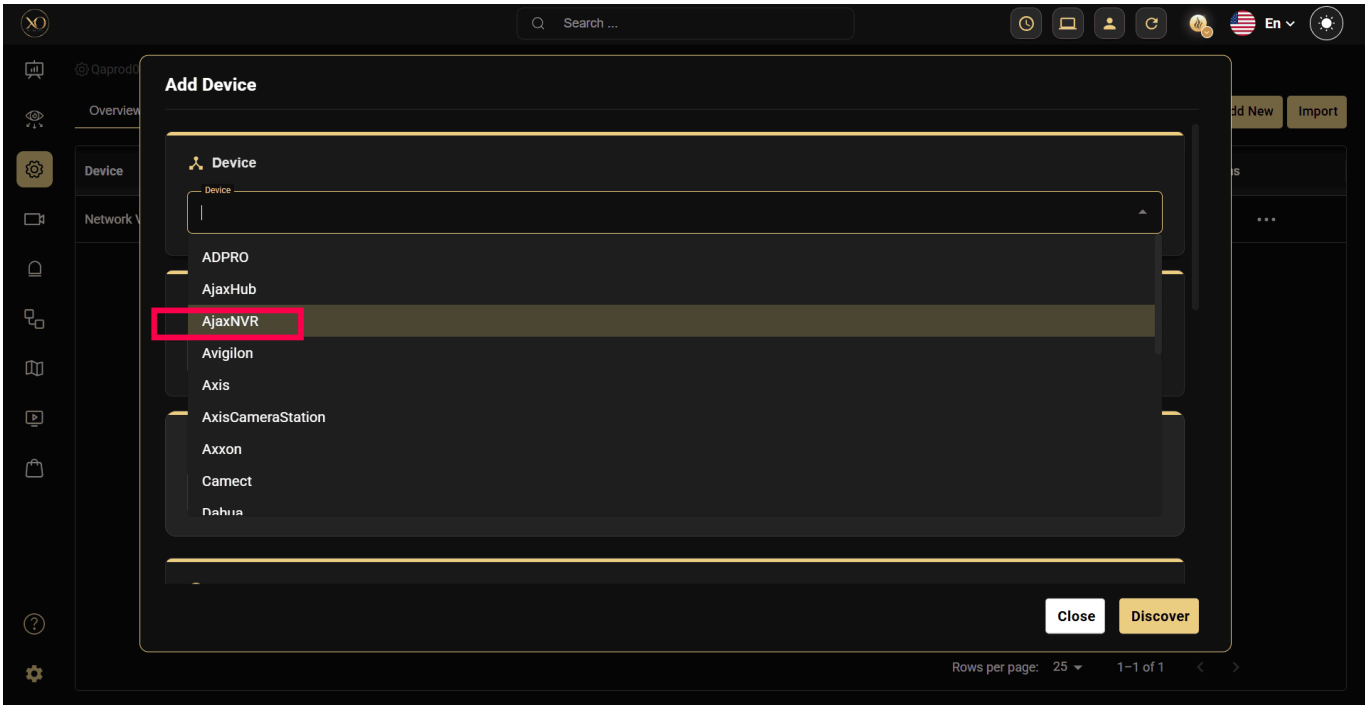


---

****Step 5: ****Enter all required fields:

- Name
- Time Zone
- Hub ID (for AJAX Hub)
- Device ID (for AJAX NVR)

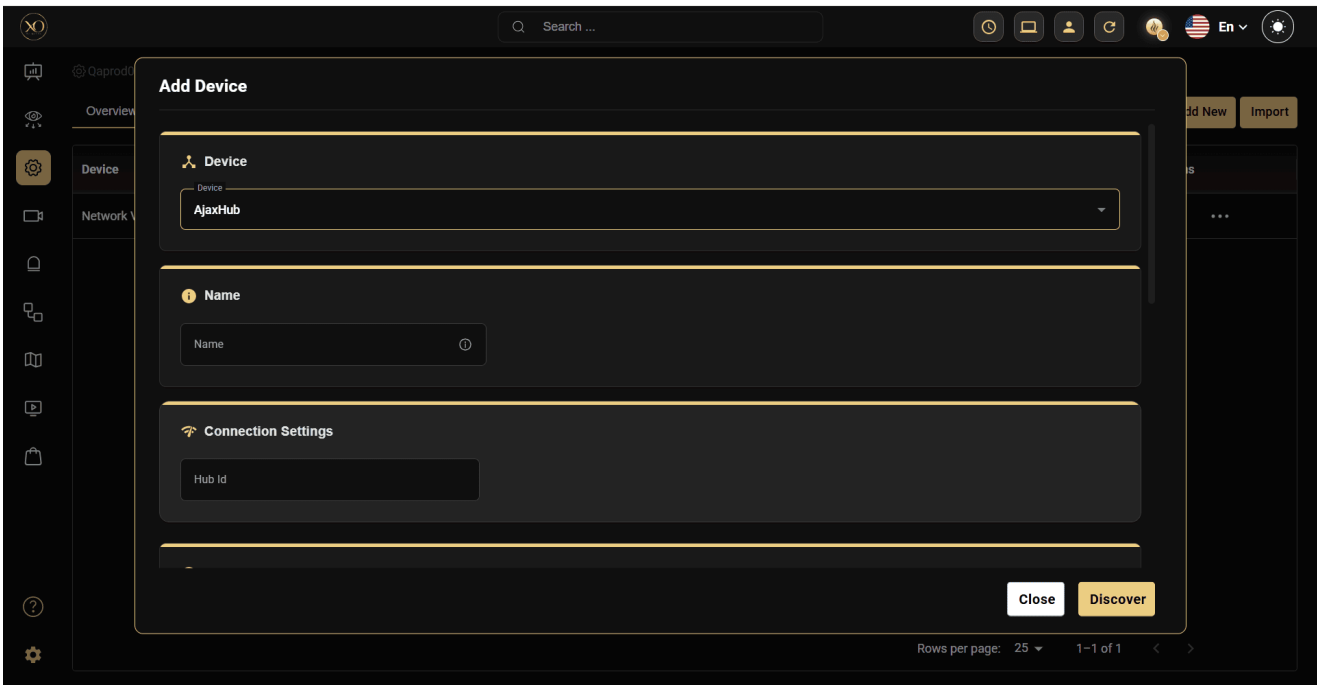

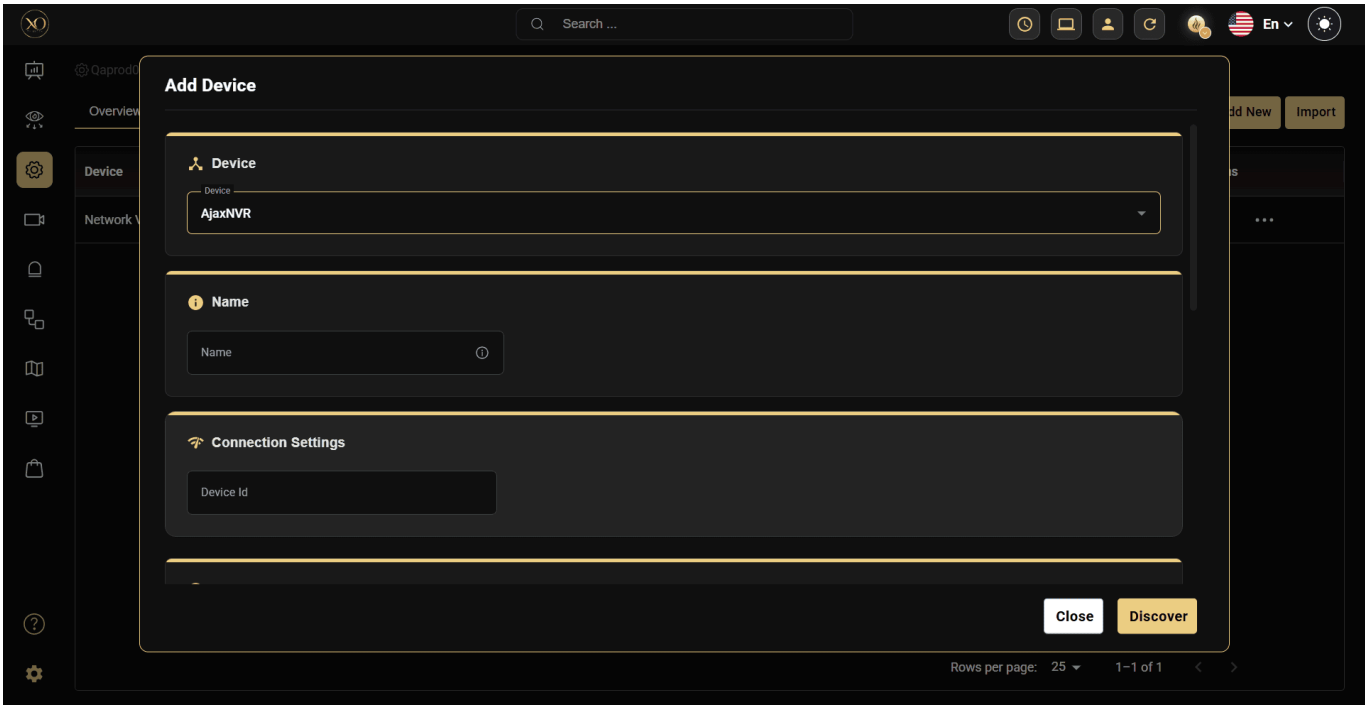


****Step 6: ****Click Discover.

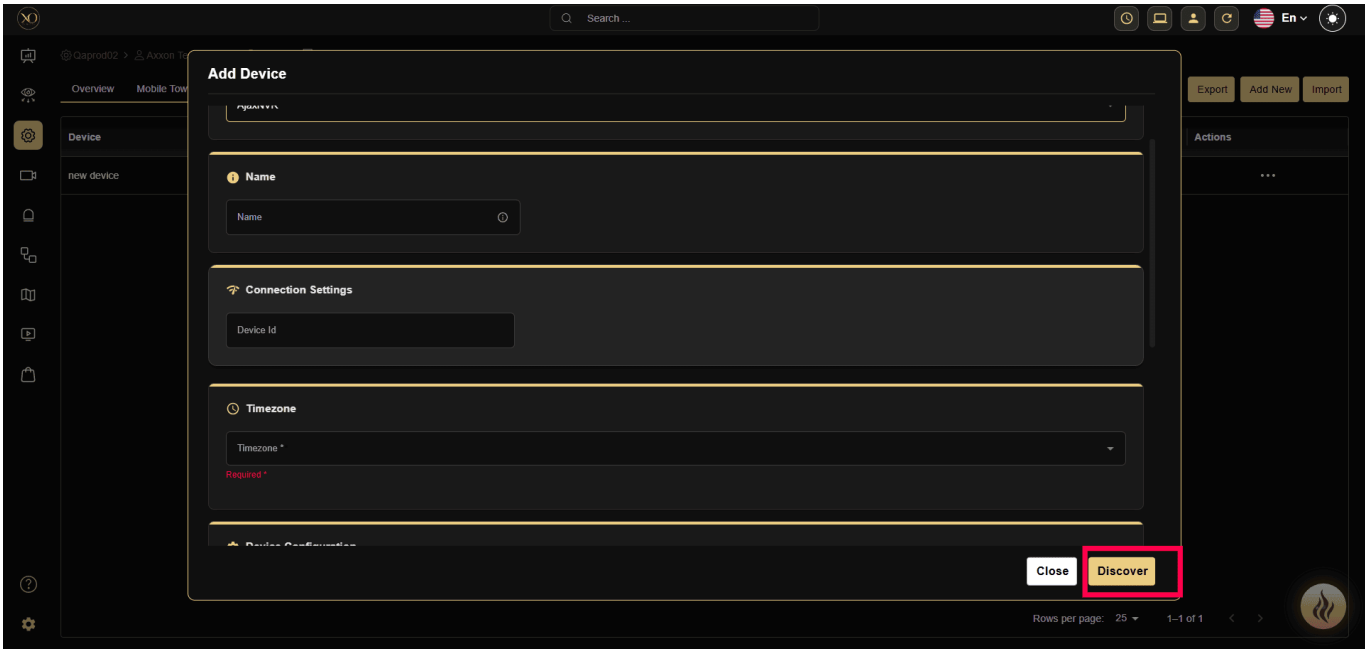


- The platform will connect to and verify the Hub or NVR.
- On success:
  - For Hub: All devices associated with the Hub will be automatically fetched and displayed

- For NVR: All cameras associated with the NVR will be automatically fetched and displayed

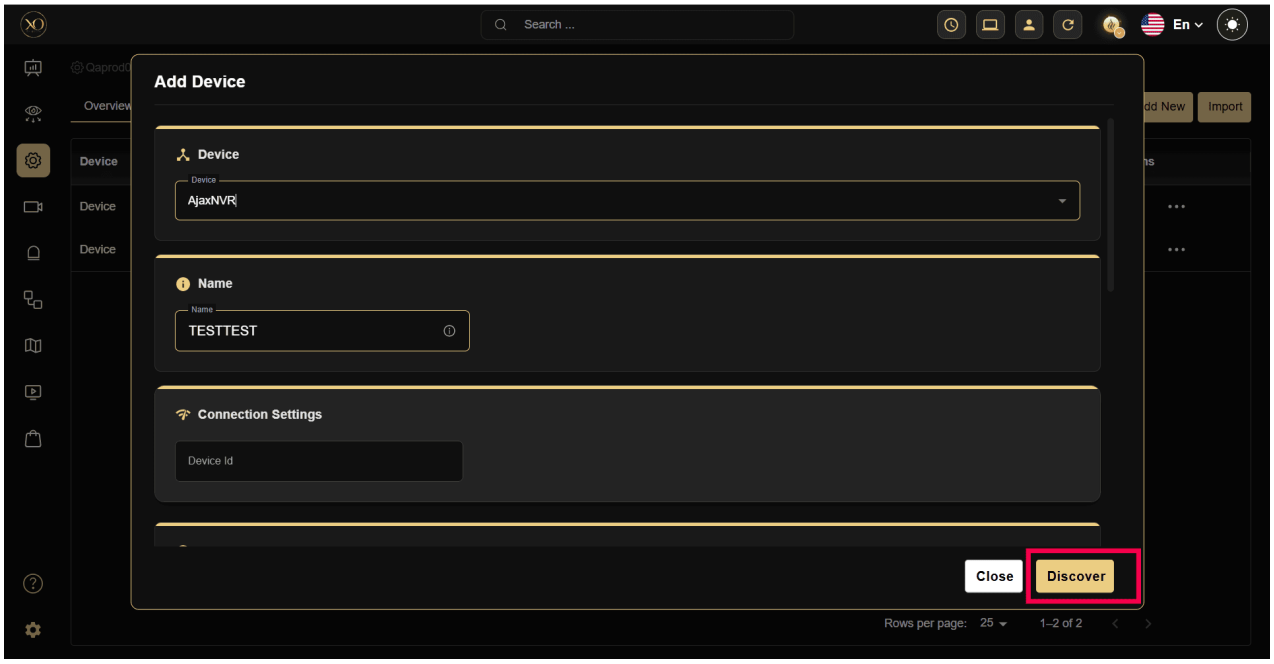


Review the discovered devices or cameras and confirm the details.

**Step 7: **Once the device is successfully discovered, click Save

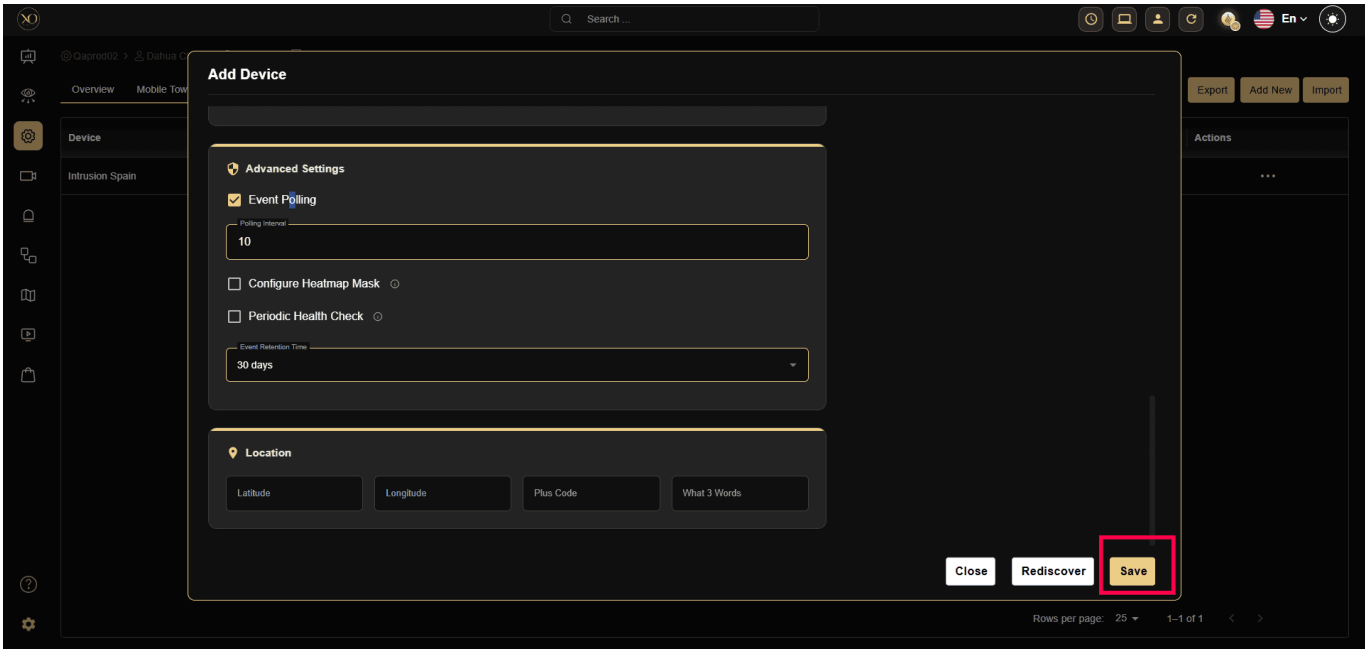


### 3. Configure SIA Alarm Receiver (AJAX Client)

After adding the device:

- Locate your newly registered AJAX device in the device list
- Click the View button beside the device
- On the device overview page, the required SIA configuration information will be displayed

---

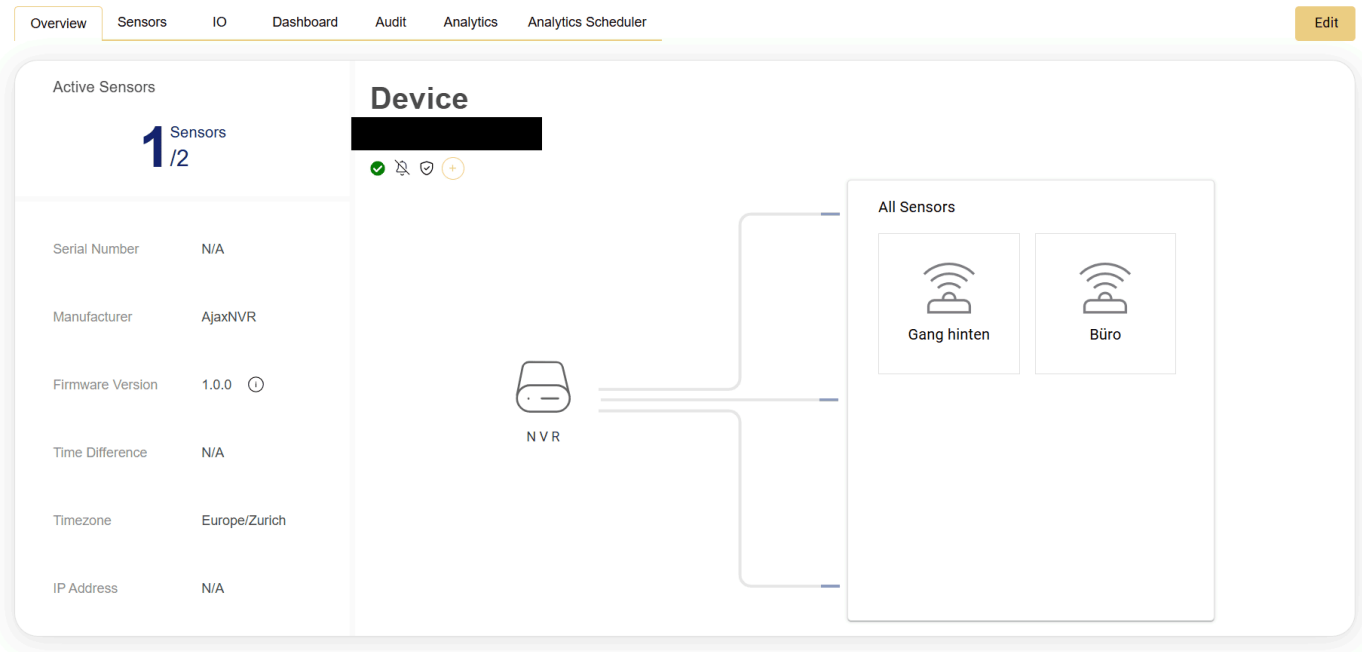


### 4. Configure in AJAX Client

- Receiver IP/PORT: Configure at Company Level in the AJAX client
- Encryption Key: Configure at Company Level in the AJAX client
- Account Number: Configure at Object Level in the AJAX client for the Hub or relevant alarm object
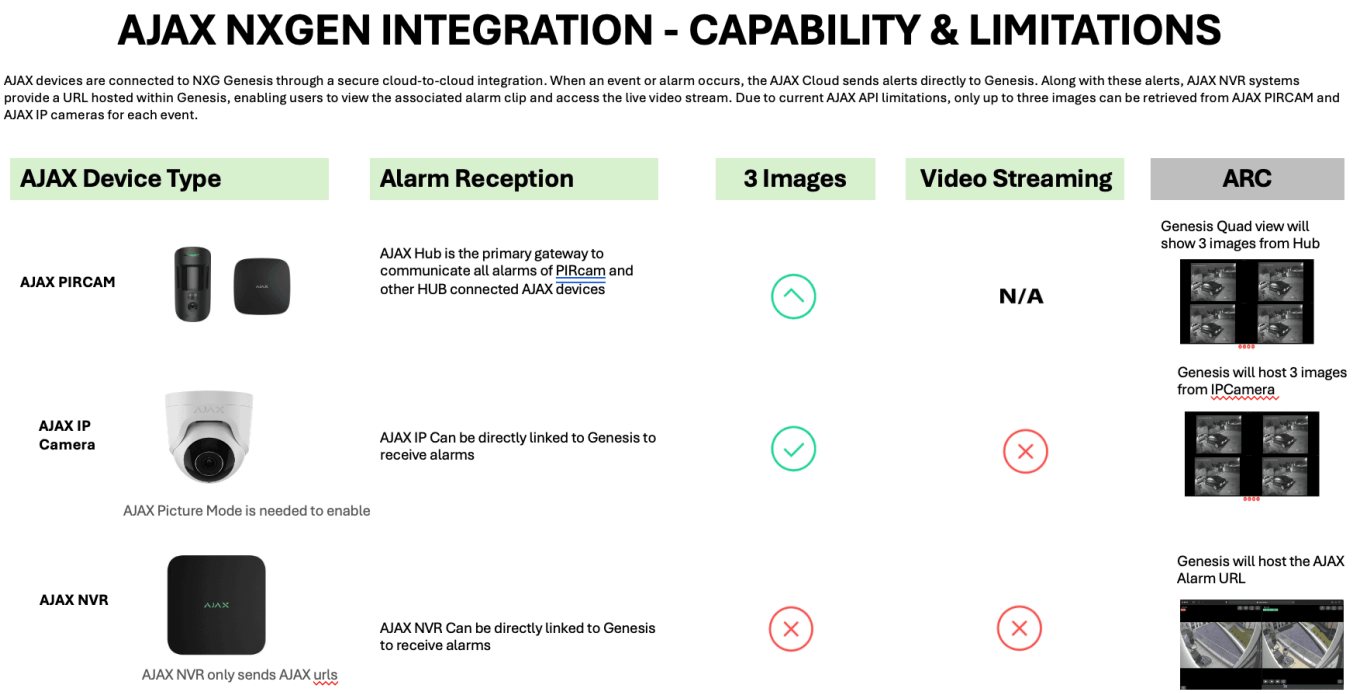
For detailed receiver configuration instructions, refer to the AJAX Integration Guide.