Ajax

AJAX Device Configuration

GCXONE supports AJAX integration for centralized alarm reception. AJAX hubs containing NVRs, intrusion panels, and other alarm-triggering objects can be integrated with GCXONE for centralized alarm management.

Key Features of AJAX Integration

1. Supported Device Types:

- AJAX Hub
- AJAX NVR

2. Supported Functionality:

- Discovery
- Alarm reception only — no live streaming, playback, or PTZ features

3. Alarm Transmission Protocol:

- SIA (Security Industry Association Protocol)

How AJAX Works in GCX-ONE:

AJAX Hub / AJAX NVR:

1. The AJAX Hub acts as a container for multiple alarm objects such as intrusion panels, NVRs, and other sensors.
2. In GCXONE, you can add either:

- AJAX Hub: For AJAX manufactured cameras
- AJAX NVR: For third-party cameras

3. All alarms from Hub or NVR objects are received collectively under this device in GCXONE.

Configuration Steps

1. Obtain Hub ID or Device ID

1. Hub ID is required for adding an AJAX Hub
2. Device ID is required for adding an AJAX NVR

- Both must be collected from the AJAX client application specific to the customer's Hub

**Important: **

When entering the Hub ID or Device ID:

- GCXONE performs an existence check using the NXGEN API key.

- The customer must invite NXGEN to their AJAX Hub through the AJAX client application. Without this invitation, GCXONE cannot verify or link to the Hub or NVR.

2. Add AJAX Device in GCXONE

****Step 1: ****Navigate to the Devices tab

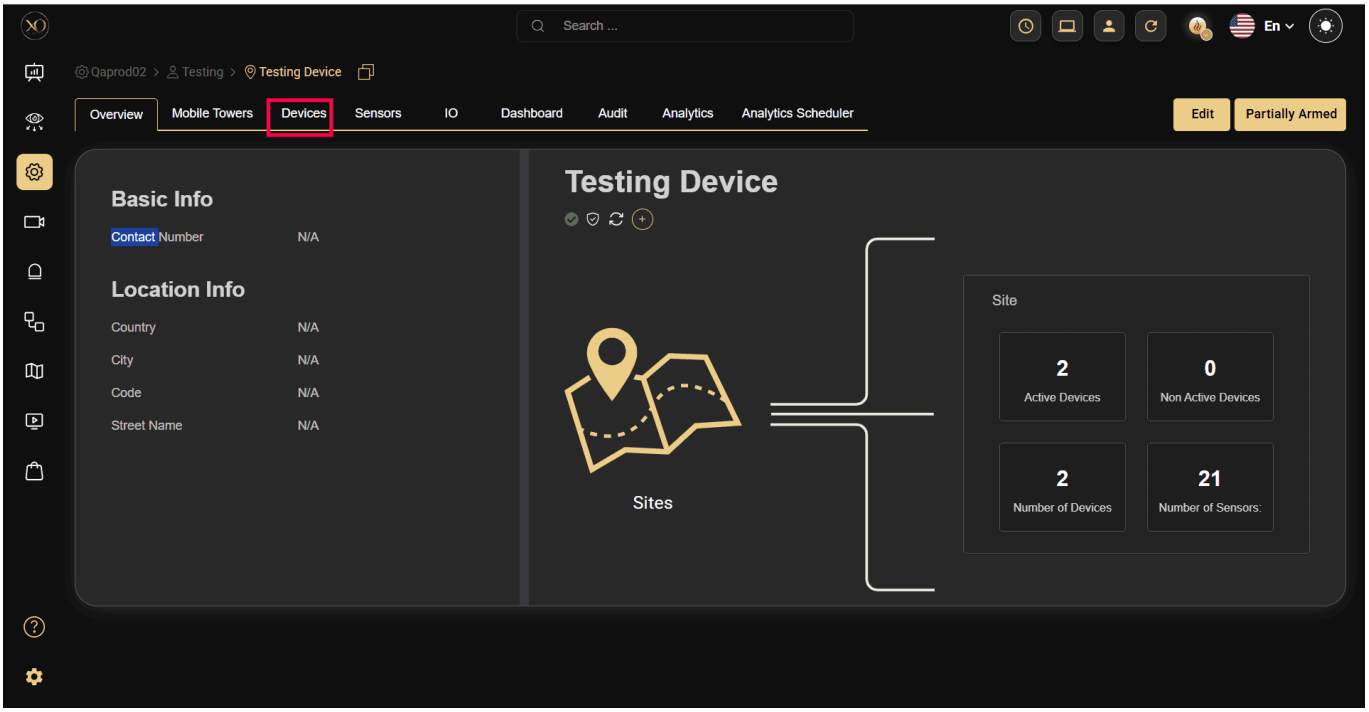

****Step 2: ****Click the Add button

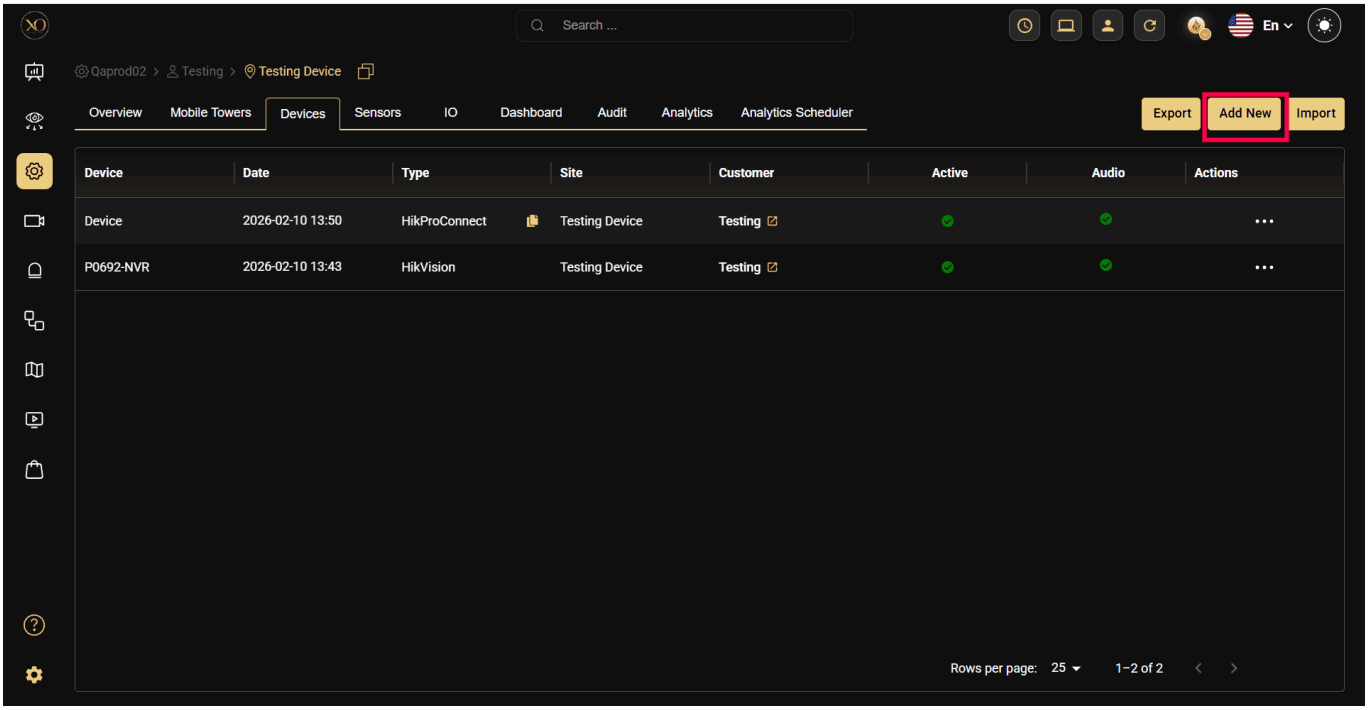

****Step 3: ****The Add Device dialog will be displayed

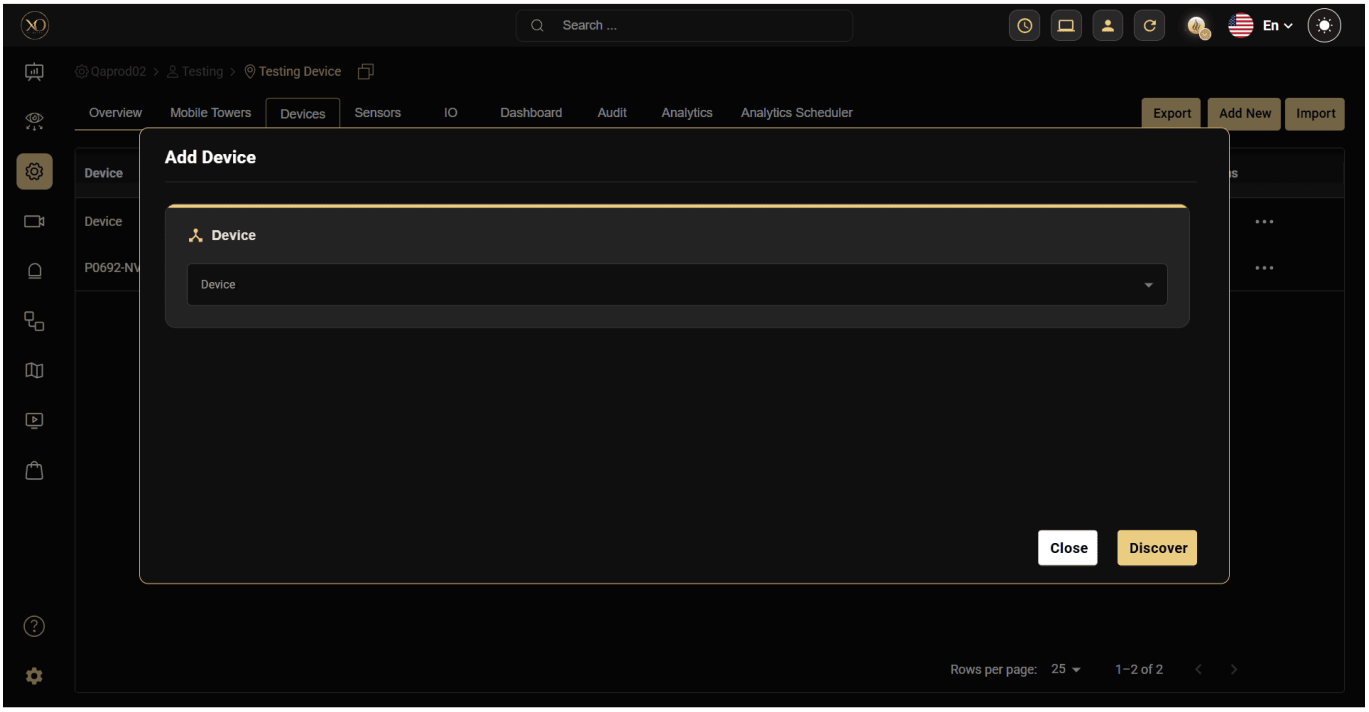

****Step 4: ****In the dialog, open the Device dropdown and select AJAX Hub or AJAX NVR

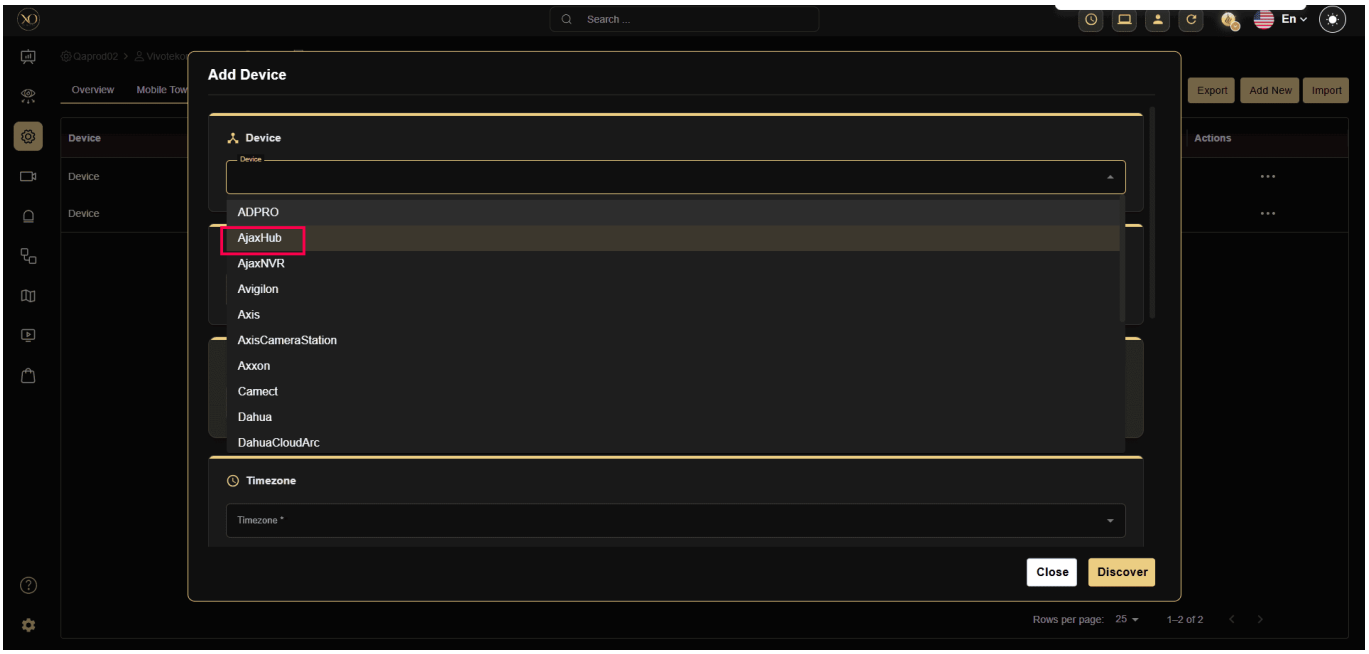

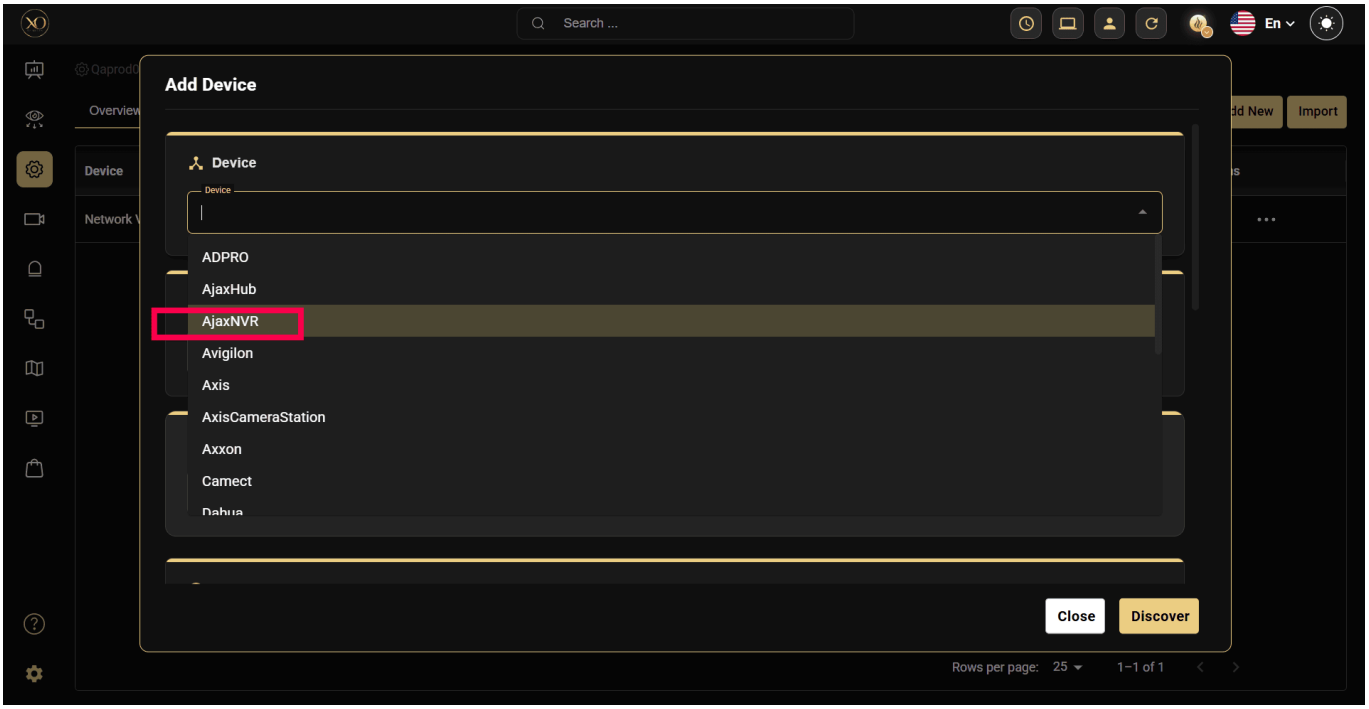

****Step 5: ****Enter all required fields:

- Name
- Time Zone
- Hub ID (for AJAX Hub)
- Device ID (for AJAX NVR)

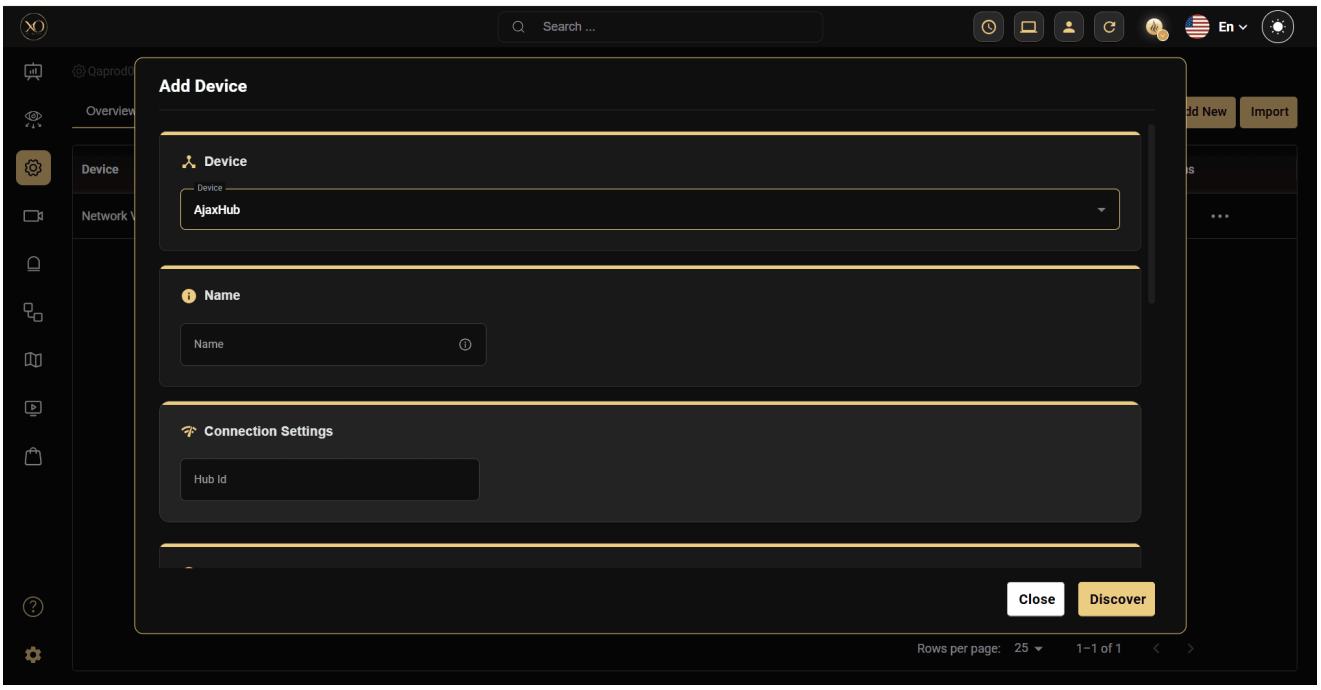

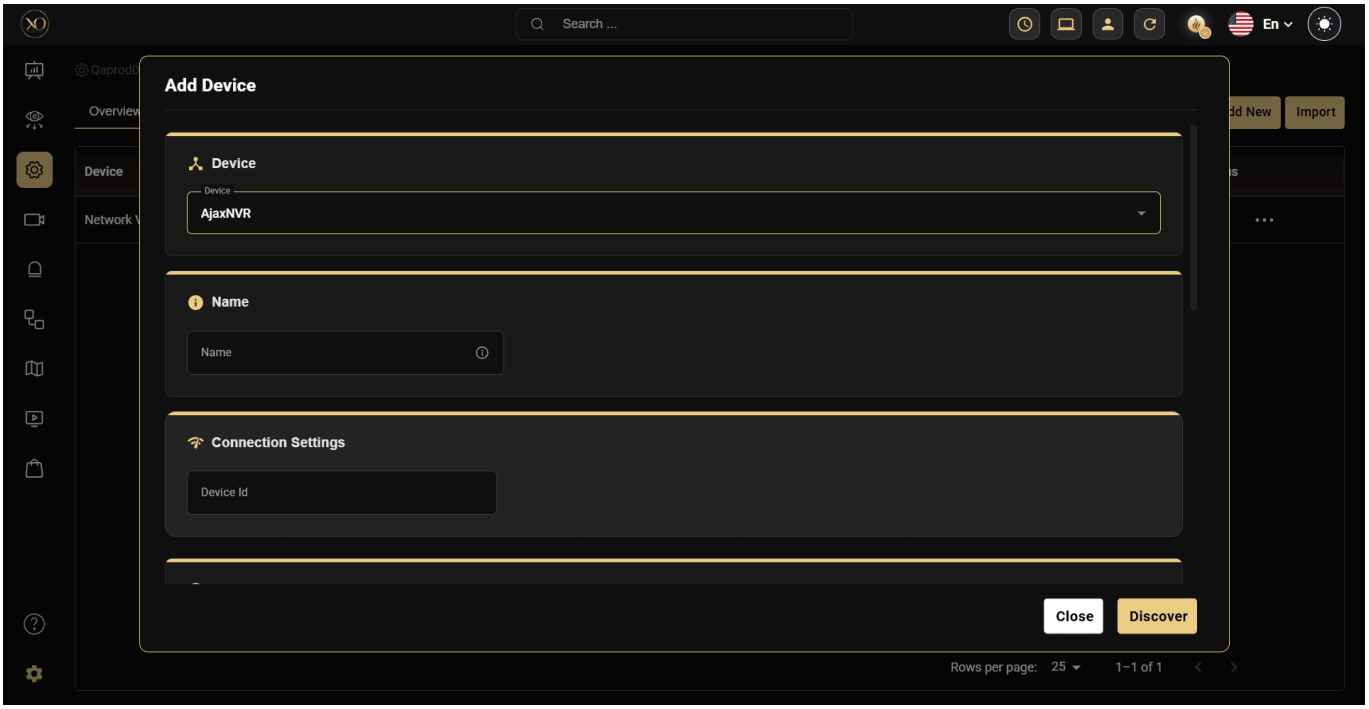

****Step 6: ****Click Discover.

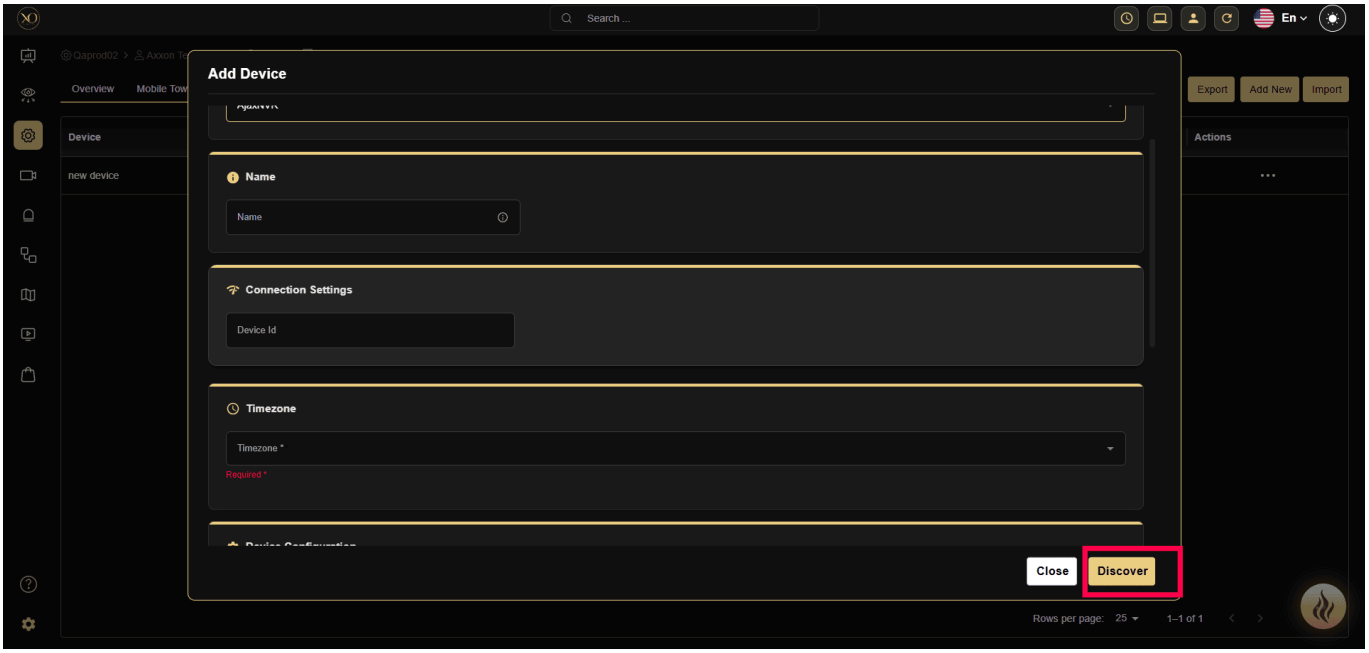

- The platform will connect to and verify the Hub or NVR.
- On success:
  - For Hub: All devices associated with the Hub will be automatically fetched and displayed

- For NVR: All cameras associated with the NVR will be automatically fetched and displayed

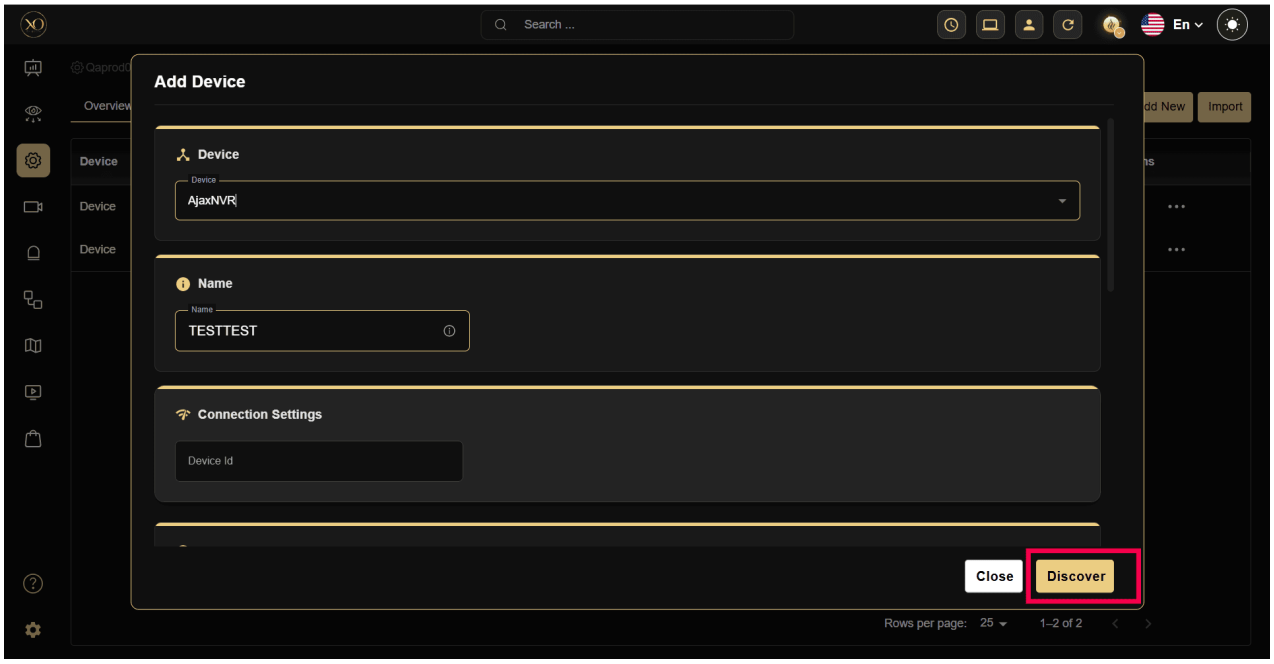

Review the discovered devices or cameras and confirm the details.

**Step 7: **Once the device is successfully discovered, click Save

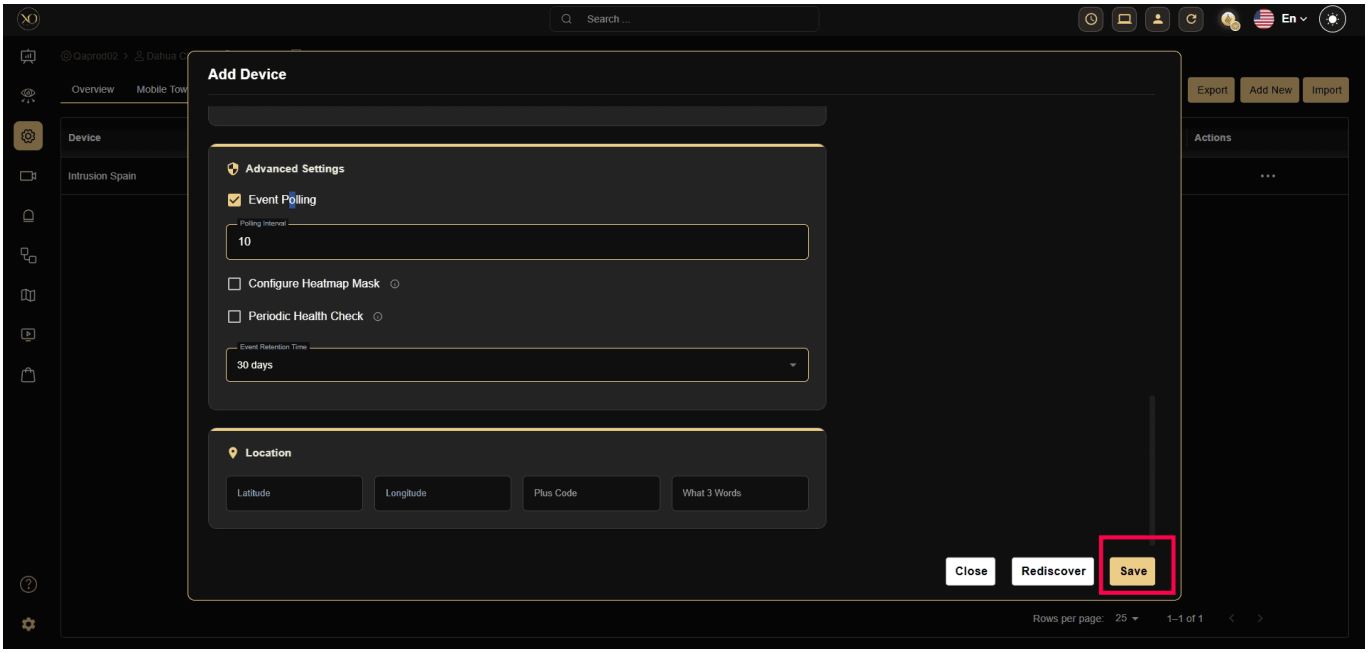

3. Configure SIA Alarm Receiver (AJAX Client)

After adding the device:

- Locate your newly registered AJAX device in the device list
- Click the View button beside the device
- On the device overview page, the required SIA configuration information will be displayed

---

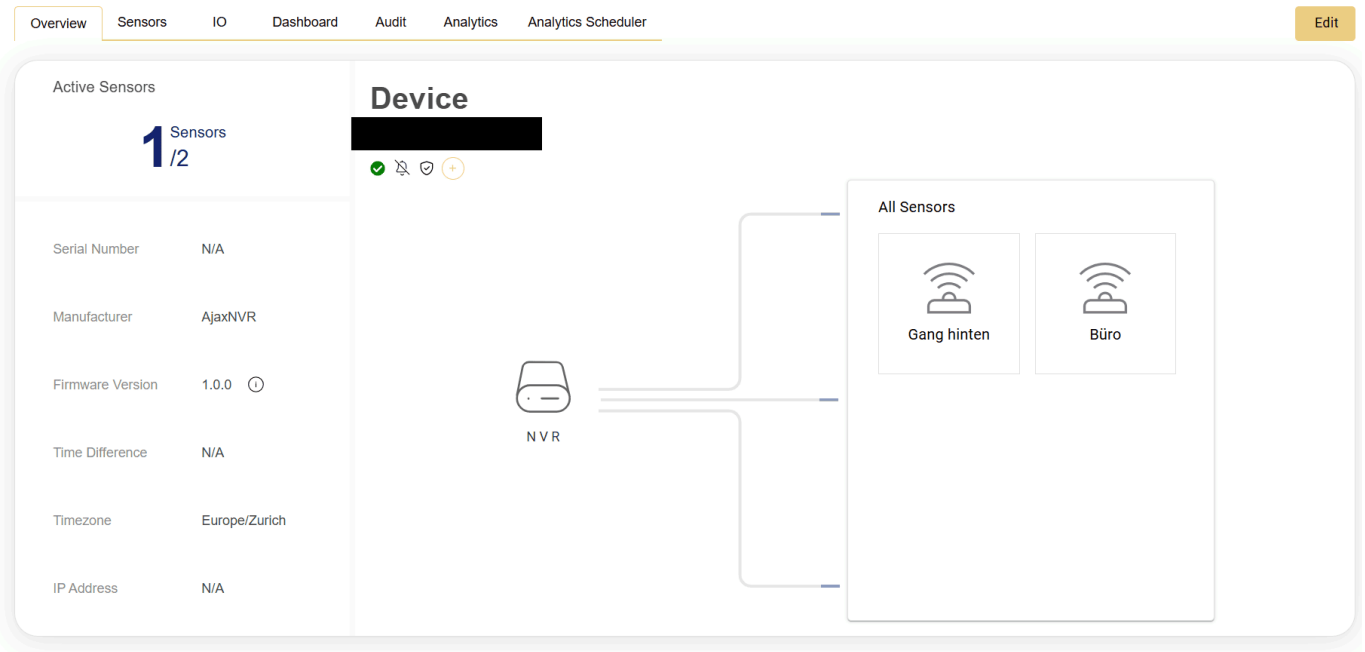

4. Configure in AJAX Client

- Receiver IP/PORT: Configure at Company Level in the AJAX client
- Encryption Key: Configure at Company Level in the AJAX client
- Account Number: Configure at Object Level in the AJAX client for the Hub or relevant alarm object
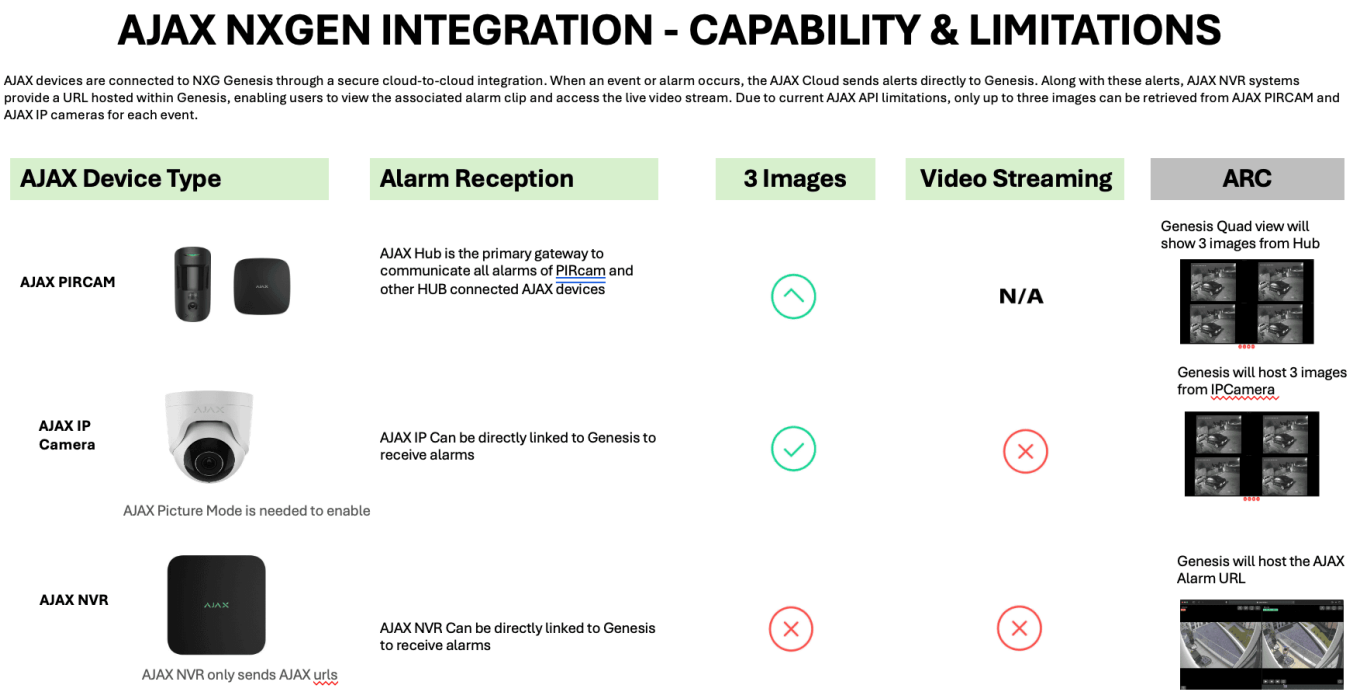
For detailed receiver configuration instructions, refer to the AJAX Integration Guide.