XC6209 Series

ETR03006-010

High Speed LDO Regulators Low ESR Cap. Compatible, Output ON/OFF Control

■GENERAL DESCRIPTION

The XC6209 series are highly precise, low noise, positive voltage LDO regulators manufactured using CMOS processes. The series achieves high ripple rejection and low dropout and consists of a voltage reference, an error amplifier, a current limiter and a phase compensation circuit plus a driver transistor.

Output voltage is selectable in 0.05V increments within a range of 0.9V ~ 6.0V.

The series is also compatible with low ESR ceramic capacitors which give added output stability. This stability can be maintained even during load fluctuations due to the excellent transient response of the series. The current limiter's foldback circuit also operates as a short protect for the output current limiter and the output pin.

The CE function enables the output to be turned off, resulting in greatly reduced power consumption.

■APPLICATIONS

- ●Smart phones / Mobile phones
- ●Portable game consoles
- ●Digital still cameras / Camcorders
- ●Digital audio equipments
- ●Reference voltage sources
- ●Multi-function power supplies

■FEATURES

Maximum Output Current	: 150mA (300mA=XC6209 E to H types)
Dropout Voltage	: 60mV @ 30mA : 200mV @ 100mA
Maximum Operating Voltage	: 2.0V ~ 10V
Output Voltage Range	: 0.9V ~ 6.0V(0.05V increments)
Highly Accurate	: ±2% (V_{OUT}>1.5V) ±30mV (V_{OUT}≦1.5V)
Low Power Consumption	: 25μA (TYP.)
Standby Current	: Less than 0.1μA (TYP.)
High Ripple Rejection	: 70dB (10kHz)
Operating Ambient Temperature	: -40℃~ 85℃
Low ESR Capacitor Compatible	: Ceramic capacitor
Packages	: SOT-25 USP-6B SOT-89-5
Environmentally Friendly	: EU RoHS Compliant, Pb Free

■TYPICAL APPLICATION CIRCUIT

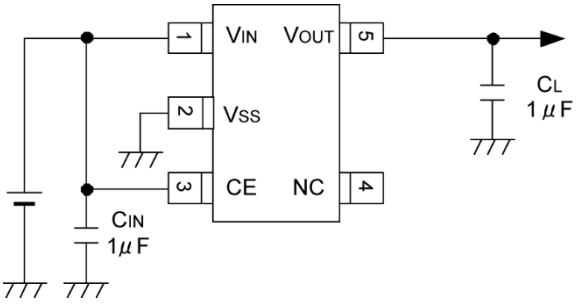

■TYPICAL PERFORMANCE CHARACTERISTICS

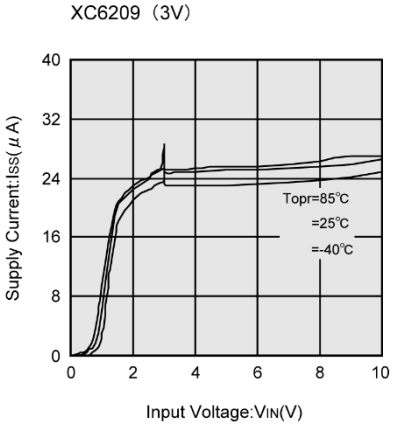

■PIN CONFIGURATION

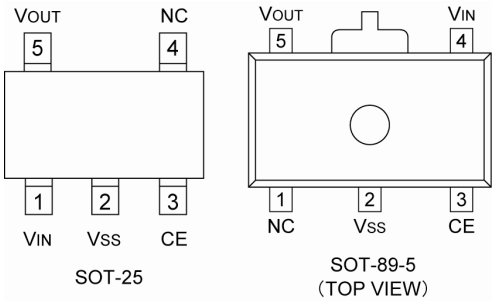



*The dissipation pad for the USP-6B package should be solder-plated in recommended mount pattern and metal masking so as to enhance mounting strength and heat release. If the pad needs to be connected to other pins, it should be connected to the VSS pin.

■PIN ASSIGNMENT

PIN NUMBER			PIN NAME	FUNCTIONS
SOT-25	SOT-89-5	USP-6B		
1	4	1	VIN	Input
2	2	5	VSS	Ground
3	3	6	CE	ON/OFF Control
4	1	2,4	NC	No Connection
5	5	3	VOUT	Output

■FUNCTIONS

TYPE	CE	OPERATIONAL STATE
Type A, B, E, F	H	ON
	L	OFF
Type C, D, G, H	H	OFF
	L	ON

H=High Level
L=Low Level

■PRODUCT CLASSIFICATION

●Ordering Information
XC6209①②③④⑤⑥-⑦

DESIGNATOR	ITEM	SYMBOL	DESCRIPTION
①	Type of Regulator CE Pin Logic	A	150mA, Active High, Pull-down resistor built-in (*2) (Semi-custom)
		B	150mA, Active High, No pull-down resistor (Standard)
		C	150mA, Active Low, Pull-up resistor built-in (*2) (Semi-custom)
		D	150mA, Active Low, No pull-up resistor (Semi-custom)
		E	300mA (*1), Active High, Pull-down resistor built-in (*2) (Semi-custom)
		F	300mA (*1), Active High, No pull-down resistor (Standard)
		G	300mA (*1), Active Low, Pull-up resistor built-in (*2) (Semi-custom)
		H	300mA (*1), Active Low, No pull-up resistor (Semi-custom)
②③	Output Voltage	09～60	Output Voltage Range: 0.9V～6.0V e.g. : 3.0V⇒②=3, ③=0
		30～60	For 1% product, output voltage range is 3.0V～6.0V.
④	Output Voltage Accuracy	2	0.1V increments, Accuracy: ±2% (*3) e.g.: 2.80V⇒②=2, ③=8, ④=2
		1	0.1V increments, Accuracy: ±1% e.g.: 3.00V⇒②=3, ③=0, ④=1
		A	0.05V increments, Accuracy: ±2% (*3) e.g.: 2.85V⇒②=2, ③=8, ④=A
		B	0.05V increments, Accuracy: ±1% e.g.: 3.05V⇒②=3, ③=0, ④=B
⑤⑥-⑦ (*4)	Packages (Order Unit)	MR-G	SOT-25 (3,000/Reel)
		PR-G	SOT-89-5 (1,000/Reel)
		DR-G	USP-6B (3,000/Reel)

(*1) The maximum output current of type E~H depends on setting output voltage.
(*2) With the pull-up resistor or pull-down resistor built-in types, the supply current during operation will increase by V_{IN} / 2MΩ (TYP.).
(*3) The output voltage accuracy is ±30mV at $V_{OUT} \leqq 1.5V$.
(*4) The “-G” suffix denotes Halogen and Antimony free as well as being fully EU RoHS compliant.

■BLOCK DIAGRAM

XC6209 Type A, E

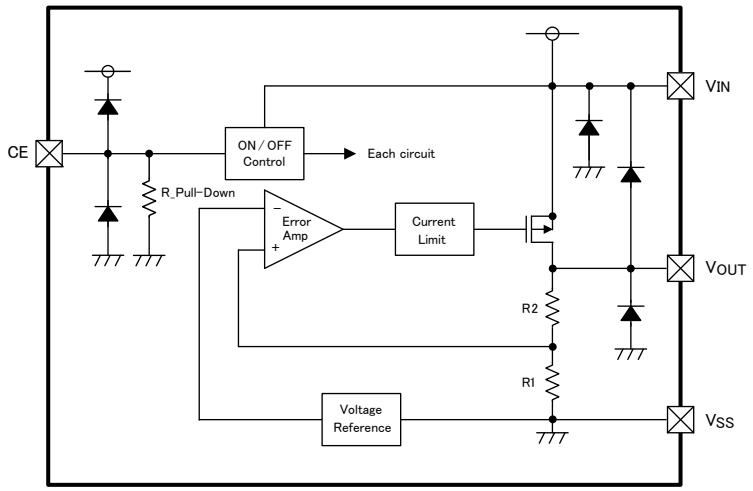

XC6209 Type B, D, F, H

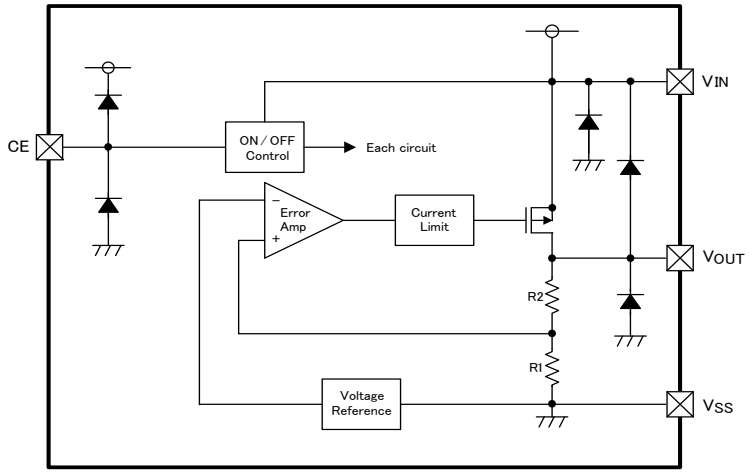

XC6209 Type C, G

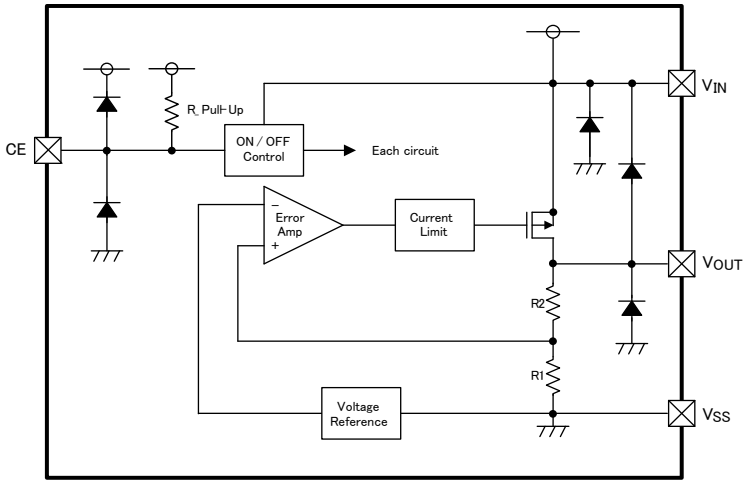

* Diodes inside the circuits are ESD protection diodes and parasitic diodes.

■ABSOLUTE MAXIMUM RATINGS

Ta=25℃

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V_{IN}	12.0	V
Output Current		I_{OUT}	500 (*1)	mA
Output Voltage		V_{OUT}	V_{SS} - 0.3 ~ V_{IN} + 0.3	V
CE Input Voltage		V_{CE}	V_{SS} - 0.3 ~ V_{IN} + 0.3	V
Power Dissipation	SOT-25	Pd	250	mW
			600(PCB mounted)(*2)	
	SOT-89-5		500	
			1300(PCB mounted)(*2)	
	USP-6B		120	
			1000(PCB mounted)(*2)	
Operating Ambient Temperature		Topr	-40 ~ 85	℃
Storage Temperature		Tstg	-55 ~ 125	℃

■ELECTRICAL CHARACTERISTICS

XC6209 (Type A, B)

Ta=25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage (2%)(*5)	$V_{OUT(E)}$ (*3)	I_{OUT}=30mA	$V_{OUT(T)}$(*2)×0.98	$V_{OUT(T)}$ (*2)	$V_{OUT(T)}$(*2)×1.02	V	①
Output Voltage (1%)(*6)			$V_{OUT(T)}$(*2)×0.99		$V_{OUT(T)}$(*2)×1.01		
Maximum Output Current	I_{OUTMAX}	-	150	-	-	mA	①
Load Regulation	$\triangle V_{OUT}$	1mA≦I_{OUT}≦100mA	-	15	50	mV	①
Dropout Voltage (*4)	Vdif1	I_{OUT}=30mA	E-1			mV	①
	Vdif2	I_{OUT}=100mA	E-2			mV	
Supply Current (Type A)	I_{DD}	V_{CE}=V_{IN}=$V_{OUT(T)}$+1.0V When V_{OUT}≦0.95V, V_{IN}=V_{CE}=2.0V	-	28	55	μA	②
Supply Current (Type B)			-	25	50		
Stand-by Current	I_{STB}	V_{IN}=$V_{OUT(T)}$+1.0V,V_{CE}=V_{SS} When V_{OUT}≦0.95V, V_{IN}=2.0V	-	0.01	0.10	μA	②
Line Regulation	$\triangle V_{OUT}$/ ($\triangle V_{IN}$・V_{OUT})	$V_{OUT(T)}$+1.0V≦V_{IN}≦10V When V_{OUT}≦0.95,2.0V=V_{IN}≦10V I_{OUT}=30mA When V_{OUT}≦1.75V, I_{OUT}=10mA	-	0.01	0.20	%/V	①
Input Voltage	V_{IN}		2	-	10	V	-
Output Voltage Temperature Characteristics	$\triangle V_{OUT}$/ ($\triangle$Topr・V_{OUT})	I_{OUT}=30mA -40℃≦Topr≦85℃	-	100	-	ppm/℃	①
Power Supply Rejection Ratio	PSRR	V_{IN}=[$V_{OUT(T)}$+1.0]V+1.0Vp-p_{AC} When V_{OUT}≦1.5V, V_{IN}=2.5V+1.0Vp-p_{AC} I_{OUT}=50mA, f=10kHz	-	70	-	dB	④
Current Limit	Ilim	V_{IN}=$V_{OUT(T)}$+1.0V, V_{CE}=V_{SS} When V_{OUT}≦1.75, V_{IN}=$V_{OUT(T)}$+2.0V	-	300	-	mA	①
Short Current	I_{SHORT}	V_{IN}=$V_{OUT(T)}$+1.0V, V_{CE}=V_{SS} When V_{OUT}≦1.75, V_{IN}=$V_{OUT(T)}$+2.0V	-	50	-	mA	①
CE "H" Level Voltage	V_{CEH}	-	1.6	-	V_{IN}	V	①
CE "L" Level Voltage	V_{CEL}	-	-	-	0.25	V	①
CE "H" Level Current (Type A)	I_{CEH}	V_{IN}=V_{CE}=$V_{OUT(T)}$+1.0V, When V_{OUT}≦0.95V, V_{IN}=V_{CE}=2.0V	0.8	-	5.0	μA	②
CE "H" Level Current (Type B)			-0.1		0.1		
CE "L" Level Current	I_{CEL}	V_{IN}=$V_{OUT(T)}$+1.0V,V_{CE}=V_{SS} When V_{OUT}≦0.95V, V_{IN}=2.0V	-0.1	-	0.1	μA	②

*1: Unless otherwise stated, V_{IN}=$V_{OUT(T)}$+1.0V. If V_{OUT} is less than 0.95V, V_{IN}= 2.0V.

*2: $V_{OUT(T)}$ is Nominal output voltage

*3: $V_{OUT(E)}$ is Effective output voltage

(I.e. the output voltage when "$V_{OUT(T)}$+1.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).

*4: Vdif={V_{IN1}-V_{OUT1}}

V_{OUT1} is the voltage equal to 98% of the output voltage whenever an amply stabilized $V_{OUT(T)}$+1.0V is input for every I_{OUT}.

V_{IN1} is the input voltage when V_{OUT1} appears while input voltage is gradually decreased.

*5: If $V_{OUT(T)}$ is less than 1.45V, $V_{OUT(T)}$ -30mV (MIN.), $V_{OUT(T)}$ + 30mV (MAX.)

*6: Only for the $V_{OUT(T)}$ is more than 3.0V products.

■ELECTRICAL CHARACTERISTICS

XC6209 (Type C, D) Ta=25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage (*5)(2%)	$V_{OUT(E)}$ (*3)	I_{OUT}=30mA	$V_{OUT(T)}$(*2)×0.98	$V_{OUT(T)}$(*2)	$V_{OUT(T)}$(*2)×1.02	V	①
Output Voltage (*6)(1%)			$V_{OUT(T)}$(*2)×0.99		$V_{OUT(T)}$(*2)×1.01		
Maximum Output Current	I_{OUTMAX}	-	150	-	-	mA	①
Load Regulation	ΔV_{OUT}	1mA≦I_{OUT}≦100mA	-	15	50	mV	①
Dropout Voltage (*4)	Vdif1	I_{OUT}=30mA	-	E-1		mV	①
	Vdif2	I_{OUT}=100mA	-	E-2			
Supply Current (Type C)	I_{DD}	V_{IN}=$V_{OUT(T)}$+1.0V When V_{OUT}≦0.95V, V_{IN}=2.0V V_{CE}=V_{SS}	-	28	55	μA	②
Supply Current (Type D)			-	25	50		
Stand-by Current	I_{STB}	V_{IN}=$V_{OUT(T)}$+1.0V, V_{CE}=V_{IN} When V_{OUT}≦0.95V, V_{IN}=V_{CE}=2.0V	-	0.01	0.10	μA	②
Line Regulation	ΔV_{OUT}/(ΔV_{IN}・V_{OUT})	$V_{OUT(T)}$+1.0V≦V_{IN}≦10 V V_{OUT}≦0.95V is 2.0V≦V_{IN}≦10V I_{OUT}=30mA When V_{OUT}≦1.75V, I_{OUT}=10mA	-	0.01	0.20	%/V	①
Input Voltage	V_{IN}	-	2	-	10	V	-
Output Voltage Temperature Characteristics	ΔV_{OUT}/(ΔTopr・V_{OUT})	I_{OUT}=30mA -40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
Power Supply Rejection Ratio	PSRR	V_{IN}=[$V_{OUT(T)}$+1.0]V+1.0Vp-p_{AC} When V_{OUT}≦1.5V, V_{IN}=2.5V+1.0Vp-p_{AC} I_{OUT}=50mA, f=10kHz	-	70	-	dB	④
Current Limit	Ilim	V_{IN}=$V_{OUT(T)}$+1.0V, V_{CE}=V_{SS} When V_{OUT}≦1.75V, V_{IN}=$V_{OUT(T)}$+2.0V	-	300	-	mA	①
Short Current	I_{SHORT}	V_{IN}=$V_{OUT(T)}$+1.0V, V_{CE}=V_{SS} When V_{OUT}≦1.75V, V_{IN}=$V_{OUT(T)}$+2.0V	-	50	-	mA	①
CE "H" Level Voltage	V_{CEH}	-	1.6	-	V_{IN}	V	①
CE "L" Level Voltage	V_{CEL}	-	-	-	0.25	V	①
CE "H" Level Current	I_{CEH}	V_{CE}=V_{IN}=$V_{OUT(T)}$+1.0V When V_{OUT}≦0.95V, V_{CE}=V_{IN}=2.0V	-0.1	-	0.1	μA	②
CE "L" Level Current (Type C)	I_{CEL}	V_{IN}=$V_{OUT(T)}$+1.0V, V_{CE}=V_{SS} When V_{OUT}≦0.95V, V_{IN}=2.0V	-5.0	-	-0.8	μA	②
CE "L" Level Current (Type D)			-0.1	-	0.1		

*1: Unless otherwise stated, V_{IN}=$V_{OUT(T)}$+1.0V. If V_{OUT} is less than 0.95V, V_{IN}= 2.0V.

*2: $V_{OUT(T)}$ is Nominal output voltage

*3: $V_{OUT(E)}$ is Effective output voltage

(I.e. the output voltage when "$V_{OUT(T)}$+1.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).

*4: Vdif={V_{IN1}-V_{OUT1}}

V_{OUT1} is the voltage equal to 98% of the output voltage whenever an amply stabilized $V_{OUT(T)}$+1.0V is input for every I_{OUT}.

V_{IN1} is the input voltage when V_{OUT1} appears while input voltage is gradually decreased.

*5: If $V_{OUT(T)}$ is less than 1.45V, $V_{OUT(T)}$ -30mV (MIN.), $V_{OUT(T)}$ + 30mV (MAX.)

*6: Only for the $V_{OUT(T)}$ is more than 3.0V products.

■ELECTRICAL CHARACTERISTICS (Continued)

XC6209 (Type E,F)

Ta=25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage (2%)(*5)	$V_{OUT(E)}$(*3)	I_{OUT}=30mA	$V_{OUT(T)}$(*2)x0.98	$V_{OUT(T)}$ (*2)	$V_{OUT(T)}$(*2)x1.02	V	①
Output Voltage (1%)(*6)			$V_{OUT(T)}$(*2)x0.99		$V_{OUT(T)}$(*2)x1.01		
Maximum Output Current	I_{OUTMAX}	V_{IN}=E-3(*7)	E-4	-	-	mA	①
Load Regulation	ΔV_{OUT}	1mA≦ I_{OUT} ≦100mA	-	15	50	mV	①
Load Regulation 2	ΔV_{OUT2}	1mA≦ I_{OUT} ≦300mA	-	-	100	mV	①
Dropout Voltage (*4)	Vdif1	I_{OUT}=30mA	E-1			mV	①
	Vdif2	I_{OUT}=100mA	E-2			mV	
Supply Current (Type E)	I_{DD}	V_{CE}=V_{IN}=$V_{OUT(T)}$+1.0V When V_{OUT}≦0.95V, V_{CE}=V_{IN}=2.0V	-	28	55	μA	②
Supply Current (Type F)				25	50		
Stand-by Current	I_{STB}	V_{IN}=$V_{OUT(T)}$+1.0V, V_{CE}=V_{SS} When V_{OUT}≦0.95V, V_{CE}=V_{IN}=2.0V	-	0.01	0.10	μA	②
Line Regulation	ΔV_{OUT}/ (ΔV_{IN}·V_{OUT})	$V_{OUT(T)}$+1.0V≦V_{IN}≦10V When V_{OUT}≦0.95V, 2.0V≦V_{IN}≦10V I_{OUT}=30mA V_{OUT}≦1.75V, I_{OUT}=10mA	-	0.01	0.20	%/V	①
Input Voltage	V_{IN}	-	2	-	10	V	-
Output Voltage Temperature Characteristics	ΔV_{OUT}/ (ΔTopr·V_{OUT})	I_{OUT}=30mA -40℃≦Topr≦85℃	-	100	-	ppm/℃	①
Power Supply Rejection Ratio	PSRR	V_{IN}={$V_{OUT(T)}$+1.0}V+1.0Vp-p_{AC}, When V_{OUT}≦1.5V, V_{IN}=2.5V+1.0Vp-p_{AC}, I_{OUT}=50mA, f=10kHz	-	70	-	dB	④
Current Limit	Ilim	V_{IN}=$V_{OUT(T)}$+1.0V, V_{CE}=V_{IN}, When V_{OUT}≦1.75V, V_{IN}=$V_{OUT(T)}$+2.0V	-	380	-	mA	①
Short Current	I_{SHORT}	V_{IN}= $V_{OUT(T)}$+1.0V, V_{CE}=V_{IN}, When V_{OUT}<1.75V, V_{IN}=$V_{OUT(T)}$+2.0V	-	50	-	mA	①
CE "H" Level Voltage	V_{CEH}	-	1.6	-	V_{IN}	V	①
CE "L" Level Voltage	V_{CEL}	-	-	-	0.25	V	②
CE "H" Level Current (Type E)	I_{CEH}	V_{IN}=V_{CE}=$V_{OUT(T)}$+1.0V When V_{OUT}≦0.95V, V_{IN}=V_{CE}=2.0V	0.8	-	5.0	μA	②
CE "H" Level Current (Type F)			-0.1	-	0.1		
CE "L" Level Current	I_{CEL}	V_{IN}=$V_{OUT(T)}$+1.0V, V_{CE}=V_{SS} When V_{OUT}≦0.95V, V_{IN}=2.0V	-0.1	-	0.1	μA	②

*1: Unless otherwise stated, V_{IN}=$V_{OUT(T)}$+1.0V. If V_{OUT} is less than 0.95V, V_{IN}= 2.0V.

*2: $V_{OUT(T)}$ is Nominal output voltage

*3: $V_{OUT(E)}$ is Effective output voltage

(I.e. the output voltage when "$V_{OUT(T)}$+1.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).

*4: Vdif={V_{IN1}-V_{OUT1}}

V_{OUT1} is the voltage equal to 98% of the output voltage whenever an amply stabilized $V_{OUT(T)}$+1.0V is input for every I_{OUT}.

V_{IN1} is the input voltage when V_{OUT1} appears while input voltage is gradually decreased.

*5: If $V_{OUT(T)}$ is less than 1.45V, $V_{OUT(T)}$ -30mV (MIN.), $V_{OUT(T)}$ + 30mV (MAX.)

*6: Only for the $V_{OUT(T)}$ is more than 3.0V products.

*7: Please refer to the "Dropout Voltage" table.

■ELECTRICAL CHARACTERISTICS (Continued)

XC6209 (Type G, H)

Ta=25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage (*5)(2%)	$V_{OUT(E)}$ (*3)	I_{OUT}=30mA	$V_{OUT(T)}$(*2)×0.98	$V_{OUT(T)}$(*2)	$V_{OUT(T)}$(*2)×1.02	V	①
Output Voltage (*6)(1%)			$V_{OUT(T)}$(*2)×0.99		$V_{OUT(T)}$(*2)×1.01		
Maximum Output Current	I_{OUTMAX}	V_{IN}=E-3 (*7)	E-4	-	-	mA	①
Load Regulation	ΔV_{OUT}	1mA≦I_{OUT}≦100mA	-	15	50	mV	①
Load Regulation 2	ΔV_{OUT2}	1mA≦I_{OUT}≦300mA	-	-	100	mV	①
Dropout Voltage (*4)	Vdif1	I_{OUT}=30mA	-	E-1		mV	①
	Vdif2	I_{OUT}=100mA	-	E-2			
Supply Current (Type G)	I_{DD}	V_{IN}=$V_{OUT(T)}$+1.0V When V_{OUT}≦0.95V, V_{IN}=2.0V, V_{CE}=V_{SS}	-	28	55	μA	②
Supply Current (Type H)			-	25	50		
Stand-by Current	I_{STB}	V_{IN}=$V_{OUT(T)}$+1.0V, V_{CE}=V_{IN} When V_{OUT}≦0.95V, V_{CE}=V_{IN}=2.0V	-	0.01	0.10	μA	②
Line Regulation	ΔV_{OUT}/(ΔV_{IN}・V_{OUT})	$V_{OUT(T)}$+1.0V≦V_{IN}≦10V When V_{OUT}≦0.95V, 2.0V≦V_{IN}≦10V I_{OUT}=30mA When V_{OUT}≦1.75V, I_{OUT}=10mA	-	0.01	0.20	%/V	①
Input Voltage	V_{IN}	-	2	-	10	V	–
Output Voltage Temperature Characteristics	ΔV_{OUT}/(ΔTopr・V_{OUT})	I_{OUT}=30mA -40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
Power Supply Rejection Ratio	PSRR	V_{IN}=[$V_{OUT(T)}$+1.0]V+1.0Vp-p_{AC} When V_{OUT}≦1.5V, V_{IN}=2.5V+1.0Vp-p_{AC} I_{OUT}=50mA, f=10kHz	-	70	-	dB	④
Current Limit	Ilim	V_{IN}=$V_{OUT(T)}$+1.0V, V_{CE}=V_{SS} When V_{OUT}≦1.75V, V_{IN}=$V_{OUT(T)}$+2.0V	-	380	-	mA	①
Short Current	I_{SHORT}	V_{IN}=$V_{OUT(T)}$+1.0V, V_{OUT}=V_{SS} When V_{OUT}≦1.75V, V_{IN}=$V_{OUT(T)}$+2.0V	-	50	-	mA	①
CE "H" Level Voltage	V_{CEH}	-	1.6	-	V_{IN}	V	①
CE "L" Level Voltage	V_{CEL}	-	-	-	0.25	V	①
CE "H" Level Current	I_{CEH}	V_{CE}=V_{IN}=$V_{OUT(T)}$+1.0V When V_{OUT}≦0.95V, V_{CE}=V_{IN}=2.0V	-0.1	-	0.1	μA	②
CE"L" Level Current (Type G)	I_{CEL}	V_{IN}=$V_{OUT(T)}$+1.0V, V_{CE}=V_{SS} When V_{OUT}≦0.95V, V_{IN}=2.0V	-5.0	-	-0.8	μA	②
CE"L" Level Current (Type H)			-0.1	-	0.1		

*1: Unless otherwise stated, V_{IN}=$V_{OUT(T)}$+1.0V. If V_{OUT} is less than 0.95V, V_{IN}= 2.0V.

*2: $V_{OUT(T)}$ is Nominal output voltage

*3: $V_{OUT(E)}$ is Effective output voltage
(I.e. the output voltage when "$V_{OUT(T)}$+1.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).

*4: Vdif={V_{IN1}-V_{OUT1}}
V_{OUT1} is the voltage equal to 98% of the output voltage whenever an amply stabilized $V_{OUT(T)}$+1.0V is input for every I_{OUT}.
V_{IN1} is the input voltage when V_{OUT1} appears while input voltage is gradually decreased.

*5: If $V_{OUT(T)}$ is less than 1.45V, $V_{OUT(T)}$ -30mV (MIN.), $V_{OUT(T)}$ + 30mV (MAX.)

*6: Only for the $V_{OUT(T)}$ is more than 3.0V products.

*7: Please refer to the “Dropout Voltage” table.

■ELECTRICAL CHARACTERISTICS (Continued)

●Dropout Voltage

Voltage Accuracy 2% products

Ta=25℃

SYMBOL	E-0		E-1		E-2	
PARAMETER / NOMINAL OUTPUT VOLTAGE	OUTPUT VOLTAGE (V) (2%)		DROPOUT VOLTAGE 1 (mV) (I_{OUT}=30mA)		DROPOUT VOLTAGE 2 (mV) (I_{OUT}=100mA)	
	V_{OUT}		Vdif1		Vdif2	
$V_{OUT(T)}$	MIN.	MAX.	TYP.	MAX.	TYP.	MAX.
0.90 *	0.870	0.930	1100	1110	1150	1200
0.95 *	0.920	0.980				
1.00 *	0.970	1.030	1000	1010	1050	1100
1.05 *	1.020	1.080				
1.10 *	1.070	1.130	900	910	950	1000
1.15 *	1.120	1.180				
1.20 *	1.170	1.230	800	810	850	900
1.25 *	1.220	1.280				
1.30 *	1.270	1.330	700	710	750	800
1.35 *	1.320	1.380				
1.40 *	1.370	1.430	600	610	650	700
1.45 *	1.420	1.480				
1.50 *	1.470	1.530	500	510	550	600
1.55 *	1.519	1.581				
1.60 *	1.568	1.632	400	410	500	550
1.65 *	1.617	1.683				
1.70 *	1.666	1.734	300	310	400	450
1.75 *	1.715	1.785				
1.80 *	1.764	1.836	200	210	300	400
1.85 *	1.813	1.887				
1.90 *	1.862	1.938	120	150	280	380
1.95 *	1.911	1.989				
2.00	1.960	2.040	80	120	240	350
2.05	2.009	2.091				
2.10	2.058	2.142				330
2.15	2.107	2.193				
2.20	2.156	2.244				
2.25	2.205	2.295				
2.30	2.254	2.346				310
2.35	2.303	2.397				
2.40	2.352	2.448				
2.45	2.401	2.499				
2.50	2.450	2.550	70	100	220	290
2.55	2.499	2.601				
2.60	2.548	2.652				
2.65	2.597	2.703				
2.70	2.646	2.754				
2.75	2695	2.805				
2.80	2.744	2.856				270
2.85	2.793	2.907				
2.90	2.842	2.958				
2.95	2.891	3.009				
3.00	2.940	3.060	60	90	200	250
3.05	2.989	3.111				
3.10	3.038	3.162				
3.15	3.087	3.213				
3.20	3.136	3.264				
3.25	3.185	3.315				
3.30	3.234	3.366				
3.35	3.283	3.417				
3.40	3.332	3.468				
3.45	3.381	3.519				
3.50	3.430	3.570				
3.55	3.479	3.621				

* The input voltage 2.0V (MIN.) is needed to operate the IC. 2.0V-$V_{OUT(T)}$ of dropout voltage is needed at minimum.

■ELECTRICAL CHARACTERISTICS (Continued)

●Dropout Voltage (Continued)

Voltage Accuracy 2% products

Ta=25℃

SYMBOL	E-0		E-1		E-2	
PARAMETER / NOMINAL OUTPUT VOLTAGE	OUTPUT VOLTAGE (V) (2%)		DROPOUT VOLTAGE 1 (mV) (I_{OUT}=30mA)		DROPOUT VOLTAGE 2 (mV) (I_{OUT}=100mA)	
	V_{OUT}		Vdif1		Vdif2	
$V_{OUT(T)}$	MIN.	MAX.	TYP.	MAX.	TYP.	MAX.
3.60	3.528	3.672	60	90	200	250
3.65	3.577	3.723				
3.70	3.626	3.774				
3.75	3.675	3.825				
3.80	3.724	3.876				
3.85	3.773	3.927				
3.90	3.822	3.978				
3.95	3.871	4.029				
4.00	3.920	4.080		80	180	230
4.05	3.969	4.131				
4.10	4.018	4.182				
4.15	4.067	4.233				
4.20	4.116	4.284				
4.25	4.165	4.335				
4.30	4.214	4.386				
4.35	4.263	4.437				
4.40	4.312	4.488				
4.45	4.361	4.539				
4.50	4.410	4.590				
4.55	4.459	4.641				
4.60	4.508	4.692				
4.65	4.557	4.743				
4.70	4.606	4.794				
4.75	4.655	4.845				
4.80	4.704	4.896				
4.85	4.753	4.947				
4.90	4.802	4.998				
4.95	4.851	5.049				
5.00	4.900	5.100	50	70	160	210
5.05	4.949	5.151				
5.10	4.998	5.202				
5.15	5.047	5.253				
5.20	5.096	5.304				
5.25	5.145	5.355				
5.30	5.194	5.406				
5.35	5.243	5.457				
5.40	5.292	5.508				
5.45	5.341	5.559				
5.50	5.390	5.610				
5.55	5.439	5.661				
5.60	5.488	5.712				
5.65	5.537	5.763				
5.70	5.586	5.814				
5.75	5.635	5.865				
5.80	5.684	5.916				
5.85	5.733	5.967				
5.90	5.782	6.018				
5.95	5.831	6.069				
6.00	5.880	6.120				

■ELECTRICAL CHARACTERISTICS (Continued)

●Output Voltage

Voltage Accuracy 1% products

SYMBOL	E-0	
NOMINAL OUTPUT VOLTAGE	OUTPUT VOLTAGE (V) (1%)	
	V_{OUT}	
$V_{OUT(T)}$	MIN.	MAX.
3.00	2.970	3.030
3.05	3.020	3.081
3.10	3.069	3.131
3.15	3.119	3.182
3.20	3.168	3.232
3.25	3.218	3.283
3.30	3.267	3.333
3.35	3.317	3.384
3.40	3.366	3.434
3.45	3.416	3.485
3.50	3.465	3.535
3.55	3.515	3.586
3.60	3.564	3.636
3.65	3.614	3.687
3.70	3.663	3.737
3.75	3.713	3.788
3.80	3.762	3.838
3.85	3.812	3.889
3.90	3.861	3.939
3.95	3.911	3.990
4.00	3.960	4.040
4.05	4.010	4.091
4.10	4.059	4.141
4.15	4.109	4.192
4.20	4.158	4.242
4.25	4.208	4.293
4.30	4.257	4.343
4.35	4.307	4.394
4.40	4.356	4.444
4.45	4.405	4.494
4.50	4.455	4.545

SYMBOL	E-0	
NOMINAL OUTPUT VOLTAGE	OUTPUT VOLTAGE (V) (1%)	
	V_{OUT}	
$V_{OUT(T)}$	MIN.	MAX.
4.55	4.505	4.596
4.60	4.554	4.646
4.65	4.604	4.697
4.70	4.653	4.747
4.75	4.703	4.798
4.80	4.752	4.848
4.85	4.802	4.899
4.90	4.851	4.949
4.95	4.901	5.000
5.00	4.950	5.050
5.05	4.000	5.101
5.10	4.049	5.151
5.15	4.099	5.202
5.20	4.148	5.252
5.25	5.198	5.303
5.30	5.247	5.353
5.35	5.297	5.404
5.40	5.346	5.454
5.45	5.396	5.505
5.50	5.445	5.555
5.55	5.495	5.606
5.60	5.544	5.656
5.65	5.594	5.707
5.70	5.643	5.757
5.75	5.963	5.808
5.80	5.742	5.858
5.85	5.792	5.909
5.90	5.841	5.959
5.95	5.891	6.010
6.00	5.940	6.060

●Conditions

SYMBOL	E-3	E-4
CONDITIONS, SPEC.	INPUT VOLTAGE (V)	MAXIMUM OUTPUT CURRENT (mA)
NOMINAL OUTPUT VOLTAGE (V)	V_{IN}	MIN.
0.90 ~ 0.95	2.5	260
1.00 ~ 1.05	2.5	260
1.10 ~ 1.15	2.6	270
1.20 ~ 1.25	2.7	290
1.30 ~ 1.35	2.8	300
1.40 ~ 1.45	2.9	
1.50 ~ 1.95	3.0	
2.00 ~ 6.00	$V_{OUT(T)}$ + 1.0	

* $V_{OUT(T)}$ is Nominal output voltage value.

■OPERATIONAL EXPLANATION

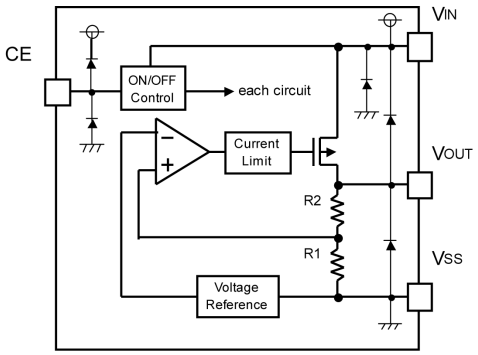

Output voltage control with the XC6209 series:

The voltage divided by resistors R1 & R2 is compared with the internal reference voltage by the error amplifier.

The P-channel MOSFET, which is connected to the VOUT pin, is then driven by the subsequent output signal. The output voltage at the VOUT pin is controlled & stabilized by a system of negative feedback.

The current limit circuit and short protect circuit operate in relation to the level of output current. Further, the IC's internal circuitry can be shutdown via the CE pin's signal.

<Low ESR Capacitors>
With the XC6209 series, a stable output voltage is achievable even if used with low ESR capacitors as a phase compensation circuit is built-in. In order to ensure the effectiveness of the phase compensation, we suggest that an output capacitor (C_L) is connected as close as possible to the output pin (V_{OUT}) and the V_{SS} pin. Please use an output capacitor with a capacitance value of at least 1 μF. Also, please connect an input capacitor (C_{IN}) of 1 μF between the V_{IN} pin and the V_{SS} pin in order to ensure a stable power input.
Stable phase compensation may not be ensured if the capacitor runs out capacitance when depending on bias and temperature. In case the capacitor depends on the bias and temperature, please make sure the capacitor can ensure the actual capacitance.

<Current Limiter, Short-Circuit Protection>
The XC6209 series includes a combination of a fixed current limiter circuit & a foldback circuit, which aid the operations of the current limiter and circuit protection. When the load current reaches the current limit level, the fixed current limiter circuit operates and output voltage drops. As a result of this drop in output voltage, the foldback circuit operates, output voltage drops further and output current decreases. When the output pin is shorted, a current of about 50mA flows.

<CE Pin>
The IC's internal circuitry can be shutdown via the signal from the CE pin with the XC6209 series. In shutdown mode, output at the V_{OUT} pin will be pulled down to the V_{SS} level via R1 & R2. The operational logic of the IC's CE pin is selectable (please refer to the selection guide). Note that as the standard XC6209B type is ' Active High /No Pull Down', operations will become unstable with the CE pin open. Although the CE pin is equal to an inverter input with CMOS hysteresis, with either the pull-up or pull-down options, the CE pin input current will increase when the IC's in operation.
We suggest that you use this IC with either a VIN voltage or a VSS voltage input at the CE pin. If this IC is used with the correct specifications for the CE pin, the IC will operate normally. However, supply current may increase as a result of through current in the IC's internal circuitry

■NOTES ON USE

1. For temporary, transitional voltage drop or voltage rising phenomenon, the IC is liable to malfunction should the ratings be exceeded.
2. Where wiring impedance is high, operations may become unstable due to noise and/or phase lag depending on output current. Please strengthen V_{IN} and V_{SS} wiring in particular.
3. Please wire the input capacitor (C_{IN}) and the output capacitor (C_L) as close to the IC as possible.
4. The IC is controlled with constant current start-up. Start-up sequence control is requested to draw a load current after even nominal output voltage rising up the output voltage.
5. Torex places an importance on improving our products and their reliability.
   We request that users incorporate fail-safe designs and post-aging protection treatment when using Torex products in their systems.

■TEST CIRCUITS

Circuit ①

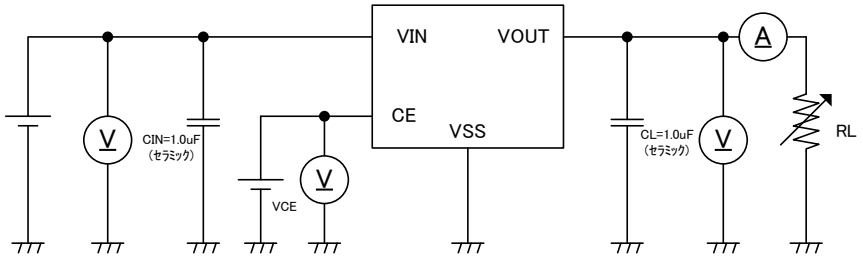

Circuit ②

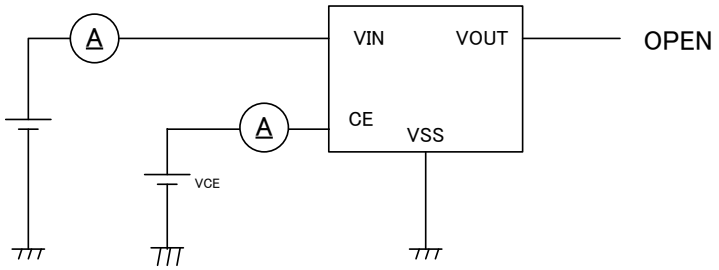

Circuit ③

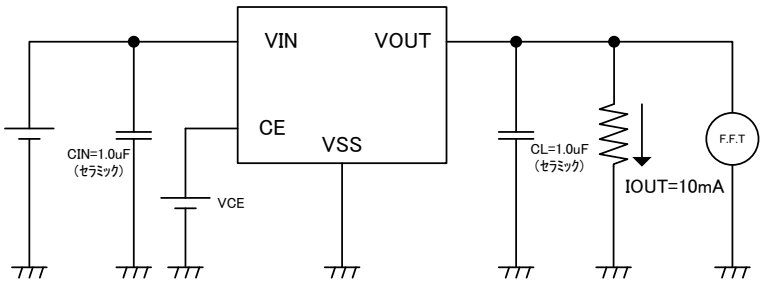

Circuit ④

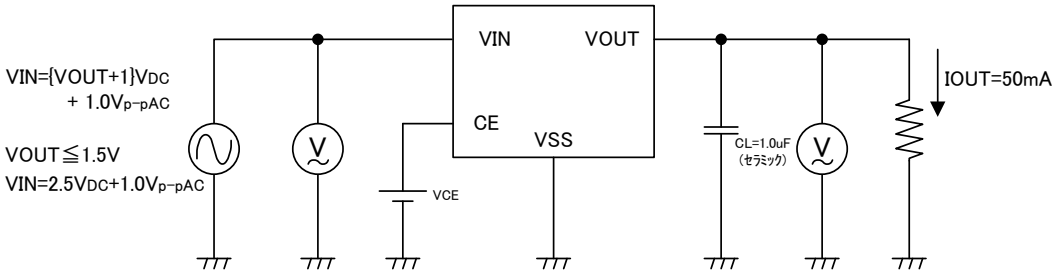

* Each Test Circuit, V_{CE} (CE pin Voltage)

Active

XC6209, Type A, B, E, F: $V_{CE}=V_{IN}$

XC6209, Type C, D, G, H: $V_{CE}=V_{SS}$

Stand-by

XC6209, Type A, B, E, F: $V_{CE}=V_{SS}$

XC6209, Type C, D, G, H: $V_{CE}=V_{IN}$

■TYPICAL PERFORMANCE CHARACTERISTICS

(1) Output Voltage vs. Output Current

XC6209B302

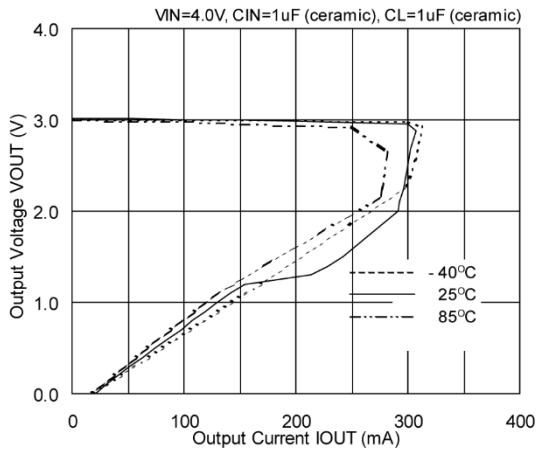

XC6209B302

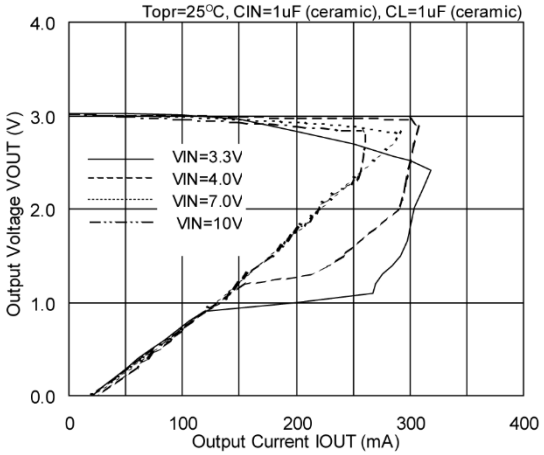

XC6209F302

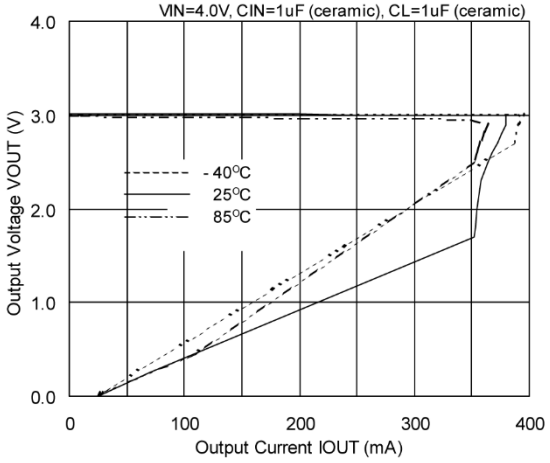

XC6209F302

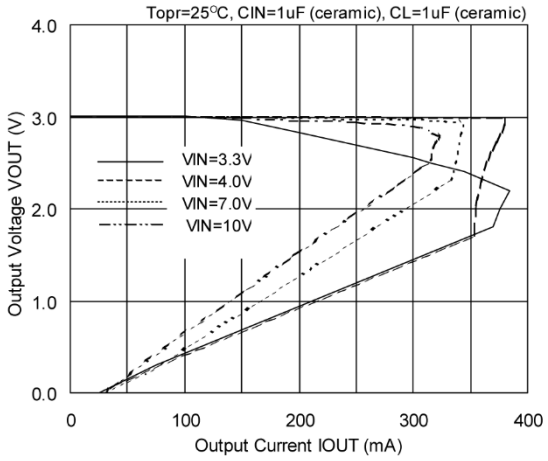

XC6209B122

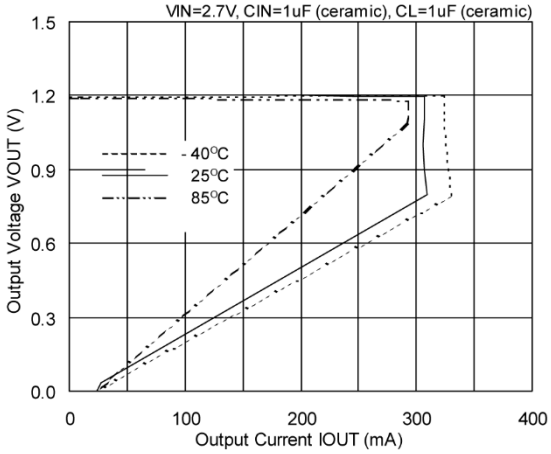

XC6209B122

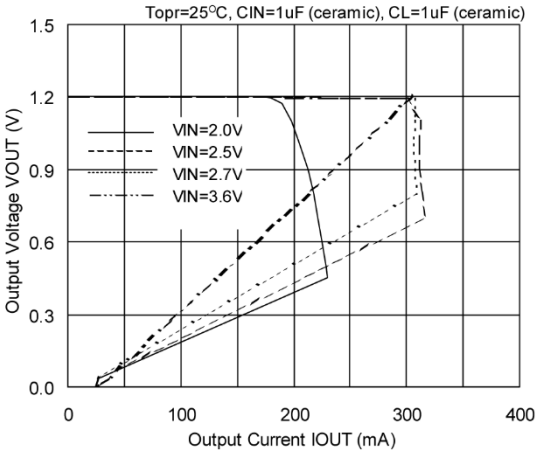

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(1) Output Voltage vs. Output Current (Continued)

XC6209F122

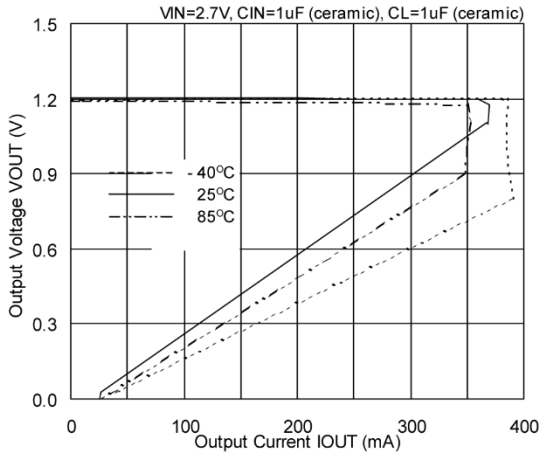

XC6209F122

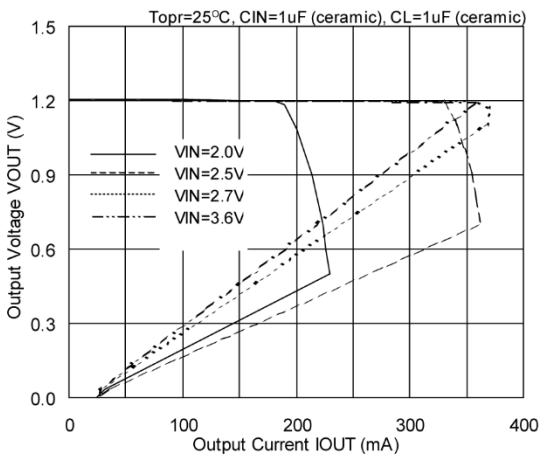

(2) Output Voltage vs. Input Voltage

XC6209F302

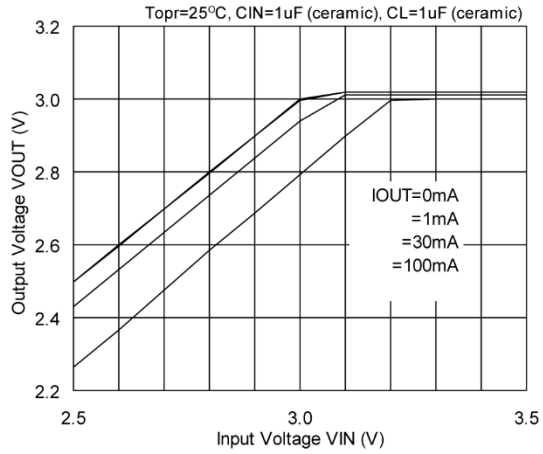

XC6209F302

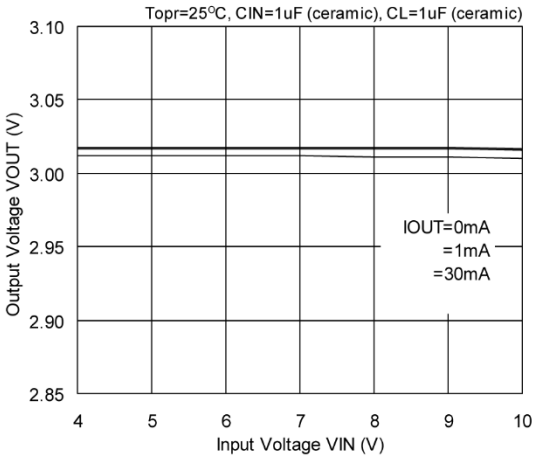

XC6209F122

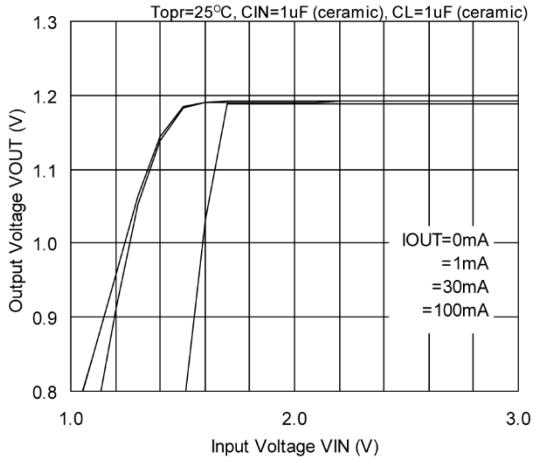

XC6209F122

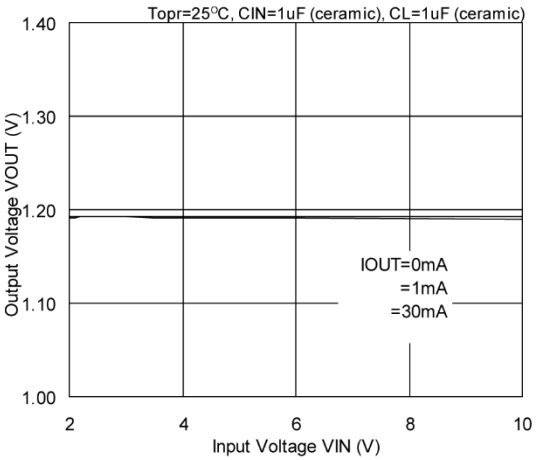

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(3) Dropout Voltage vs. Output Current

XC6209B302

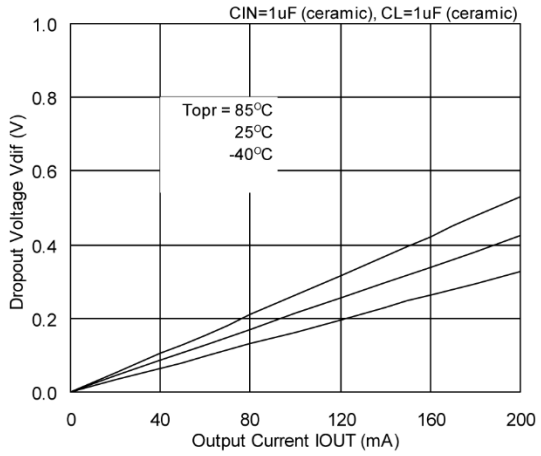

XC6209F302

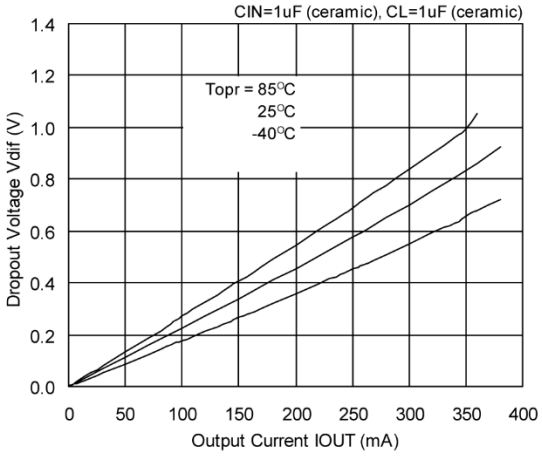

XC6209B122

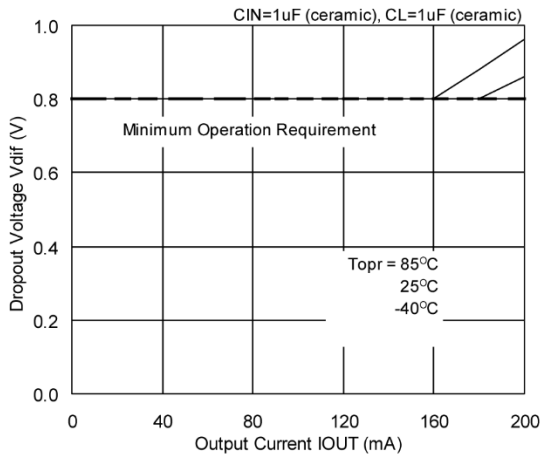

XC6209F122

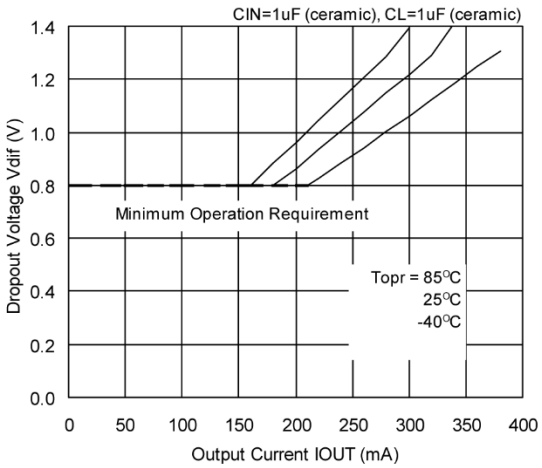

(4) Supply Current vs. Input Voltage

XC6209F302

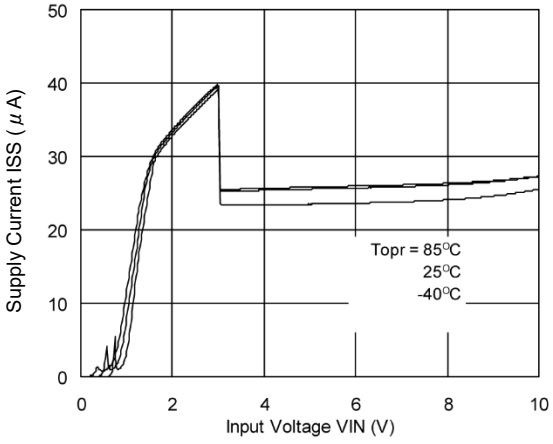

XC6209F122

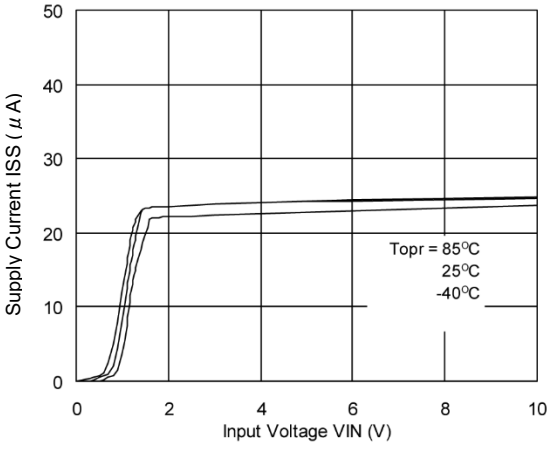

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(5) Output Voltage vs. Ambient Temperature

XC6209B/F302

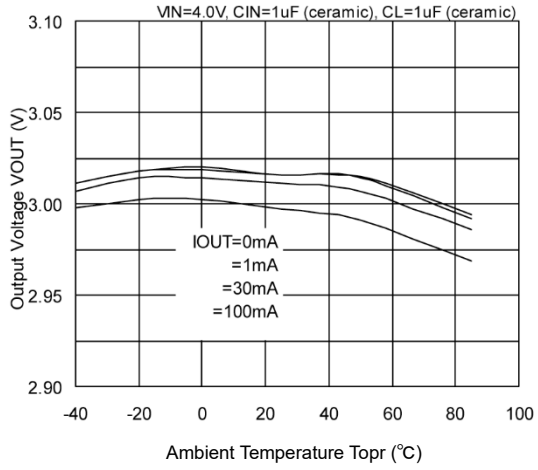

XC6209B/F122

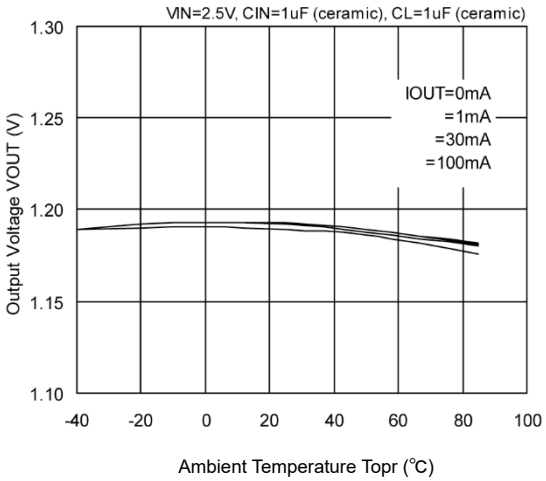

(6) Supply Current vs. Ambient Temperature

XC6209B/F302

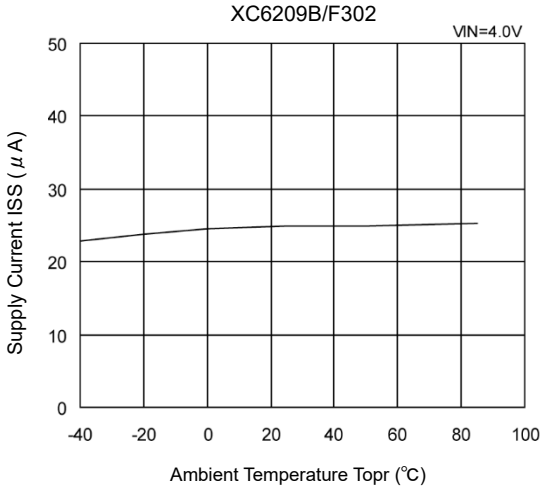

XC6209B/F122

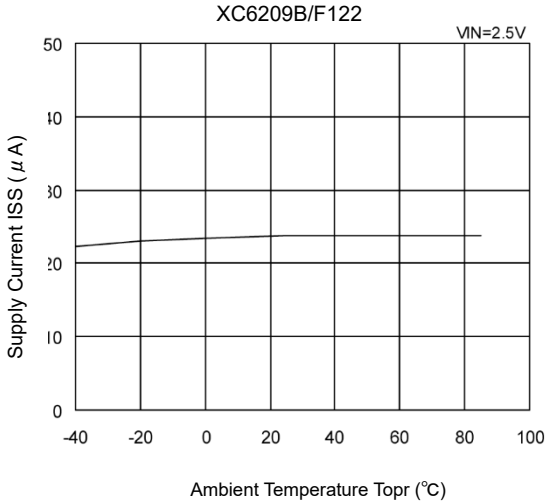

(7) P-ch Driver Transistor Characteristics

XC6209B/F

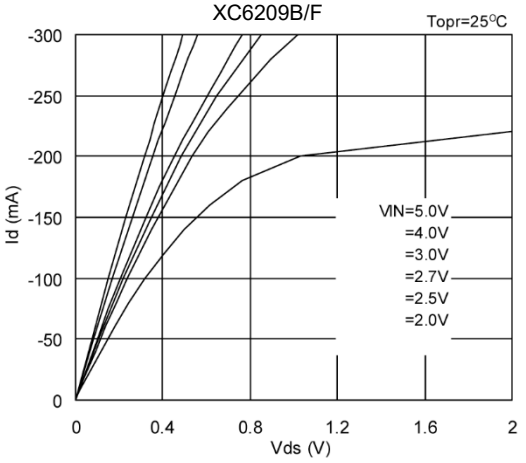

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(8) Input Transient Response

XC6209B/F302

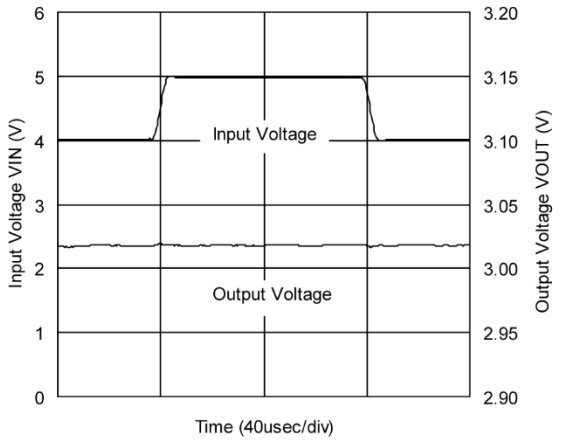

XC6209B/F302

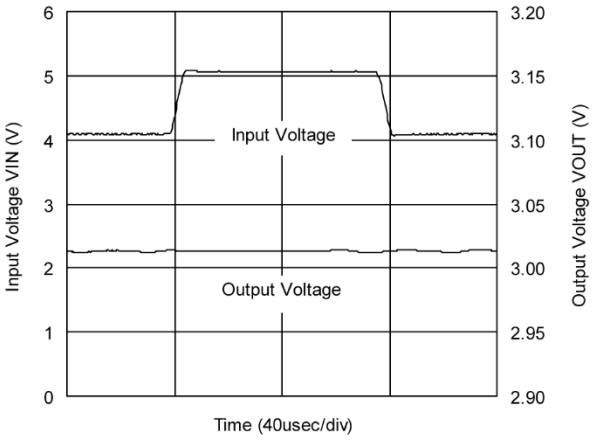

XC6209B/F302

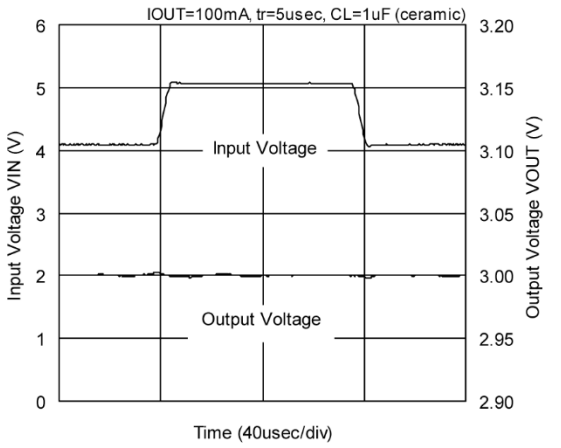

XC6209B/F122

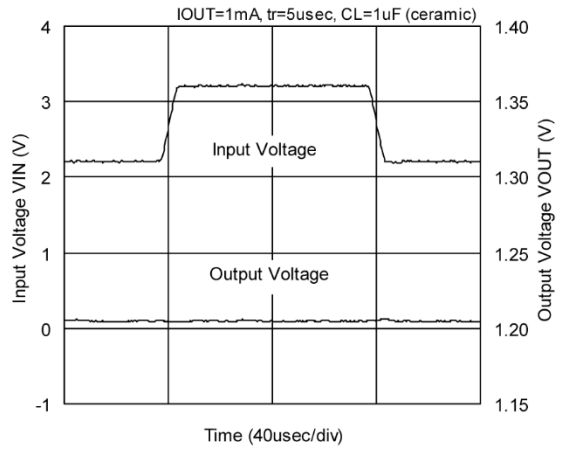

XC6209B/F122

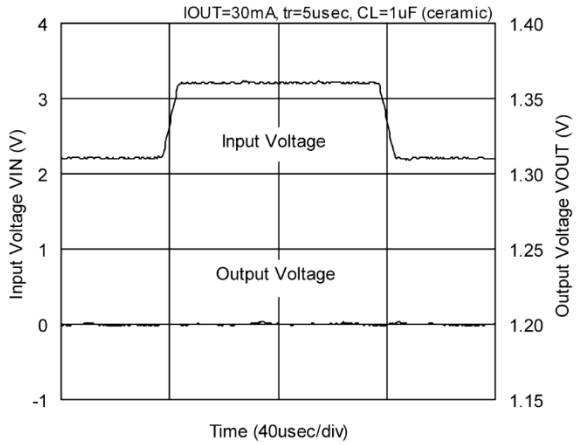

XC6209B/F122

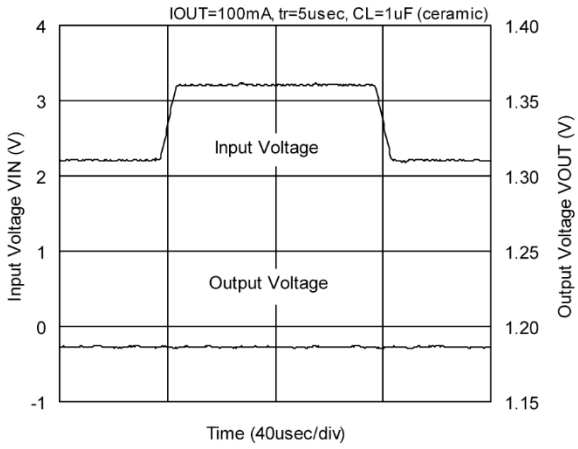

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(9) Load Transient Response

XC6209B/F302
VIN=4.0V, tr=tf=5usec,
CIN=1uF (ceramic), CL=1uF (ceramic)

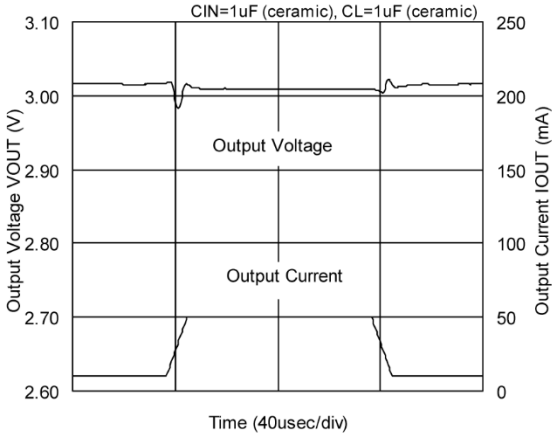

XC6209B/F302
VIN=4.0V, tr=tf=5usec,
CIN=1uF (ceramic), CL=2.2uF (ceramic)

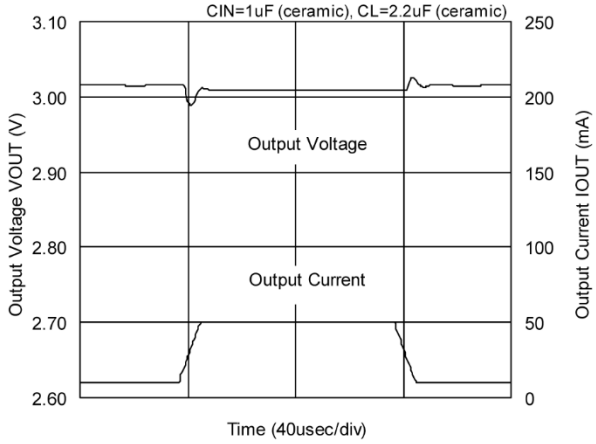

XC6209B/F302
VIN=4.0V, tr=tf=5usec,
CIN=1uF (ceramic), CL=1uF (ceramic)

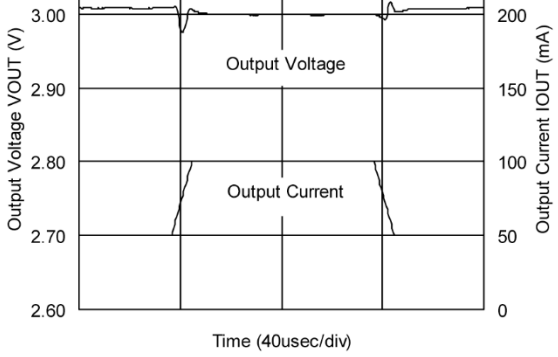

XC6209B/F302
VIN=4.0V, tr=tf=5usec,
CIN=1uF (ceramic), CL=2.2uF (ceramic)

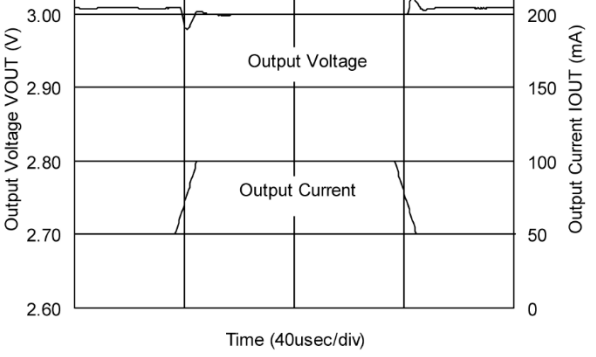

XC6209B/F302
VIN=4.0V, tr=tf=5usec,
CIN=1uF (ceramic), CL=1uF (ceramic)

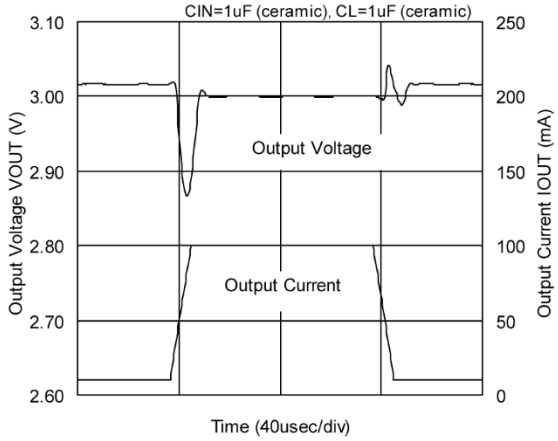

XC6209B/F302
VIN=4.0V, tr=tf=5usec,
CIN=1uF (ceramic), CL=2.2uF (ceramic)

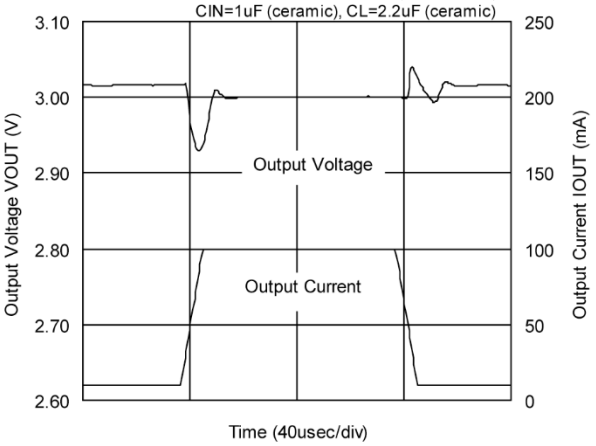

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(9) Load Transient Response (Continued)

XC6209B/F122

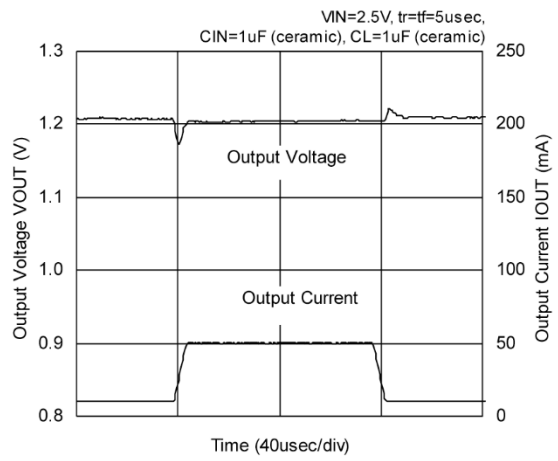

XC6209B/F122

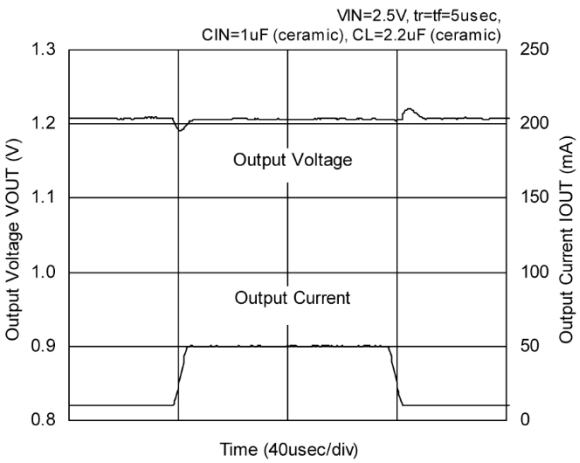

XC6209B/F122

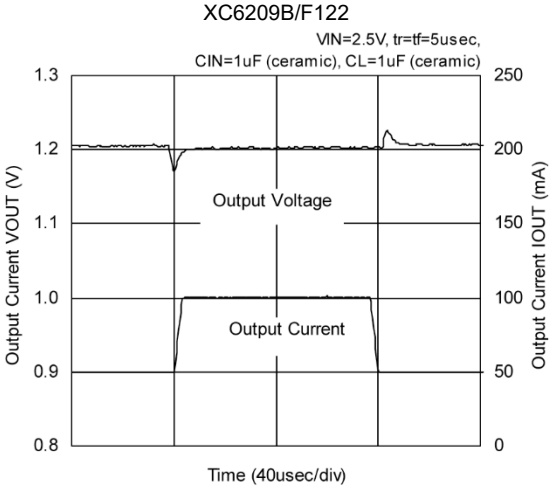

XC6209B/F122

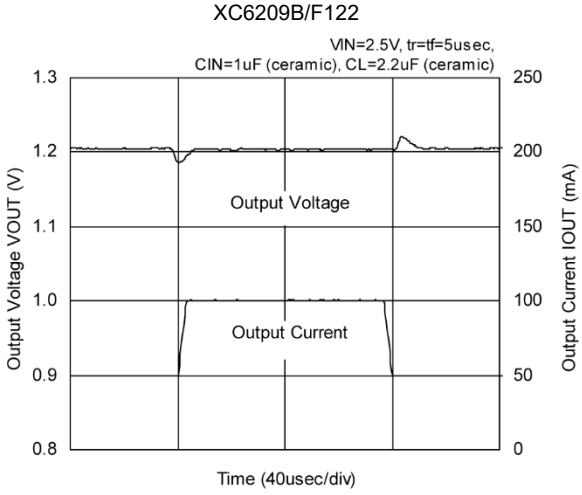

XC6209B/F122

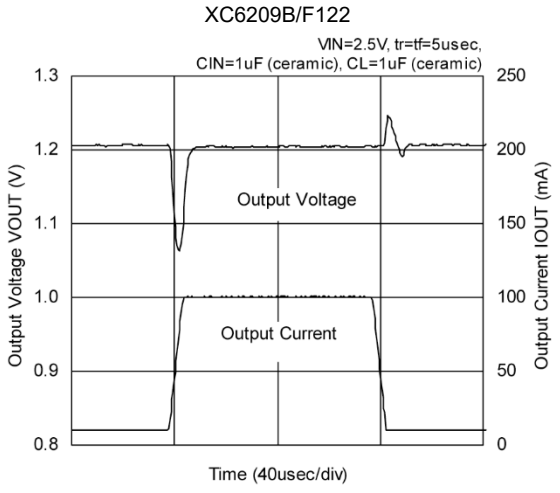

XC6209B/F122

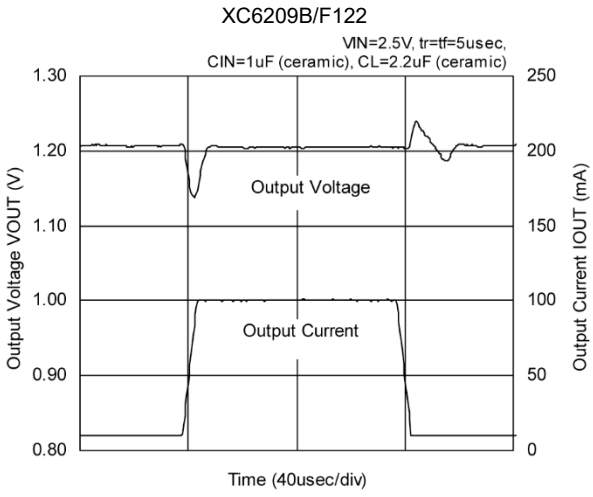

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(10) Ripple Rejection Rate

XC6209B/F302

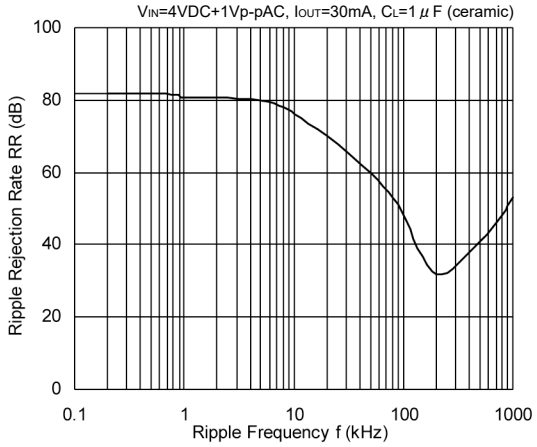

XC6209B/F122

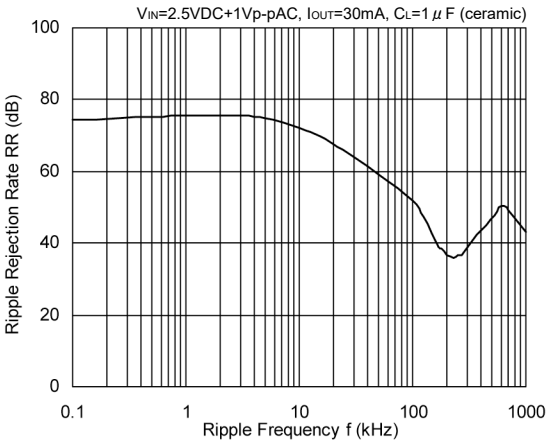

■PACKAGING INFORMATION

For the latest package information go to, www.torexsemi.com/technical-support/packages

PACKAGE	OUTLINE / LAND PATTERN	THERMAL CHARACTERISTICS
SOT-25	SOT-25 PKG	SOT-25 Power Dissipation
SOT-89-5	SOT-89-5 PKG	SOT-89-5 Power Dissipation
USP-6B	USP-6B PKG	USP-6B Power Dissipation

■MARKING RULE

●SOT-25 & SOT-89-5



SOT-25
(TOP VIEW)



SOT-89-5
(TOP VIEW)

① represents product series

MARK	PRODUCT SERIES
9	XC6209xxxxxx

② represents type of regulator

MARK				PRODUCT SERIES
VOUT 0.1V INCREMENTS		VOUT 0.05V INCREMENTS		
VOLTAGE= 0.1～3.0V	VOLTAGE= 3.1～6.0V	VOLTAGE= 0.15～3.05V	VOLTAGE= 3.15～6.05V	
V	A	E	L	XC6209Axxxxx
X	B	F	M	XC6209Bxxxxx
Y	C	H	N	XC6209Cxxxxx
Z	D	K	P	XC6209Dxxxxx
V	A	E	L	XC6209Exxxxx
X	B	F	M	XC6209Fxxxxx
Y	C	H	N	XC6209Gxxxxx
Z	D	K	P	XC6209Hxxxxx

③ represents integer of the output voltage

MARK	OUTPUT VOLTAGE (V)				MARK	OUTPUT VOLTAGE (V)			
0	-	3.1	-	3.15	F	1.6	4.6	1.65	4.65
1	-	3.2	-	3.25	H	1.7	4.7	1.75	4.75
2	-	3.3	-	3.35	K	1.8	4.8	1.85	4.85
3	-	3.4	-	3.45	L	1.9	4.9	1.95	4.95
4	-	3.5	-	3.55	M	2.0	5.0	2.05	5.05
5	-	3.6	-	3.65	N	2.1	5.1	2.15	5.15
6	-	3.7	-	.3.75	P	2.2	5.2	2.25	5.25
7	-	3.8	-	3.85	R	2.3	5.3	2.35	5.35
8	0.9	3.9	0.95	3.95	S	2.4	5.4	2.45	5.45
9	1.0	4.0	1.05	4.05	T	2.5	5.5	2.55	5.55
A	1.1	4.1	1.15	4.15	U	2.6	5.6	2.65	5.65
B	1.2	4.2	1.25	4.25	V	2.7	5.7	2.75	5.75
C	1.3	4.3	1.35	4.35	X	2.8	5.8	2.85	5.85
D	1.4	4.4	1.45	4.45	Y	2.9	5.9	2.95	5.95
E	1.5	4.5	1.55	4.55	Z	3.0	6.0	3.05	-

④ represents production lot number
0 to 9, A to Z reversed character of 0 to 9 and A to Z repeated
(G, I, J, O, Q, W excluded)

■MARKING RULE (Continued)

●USP-6B



USP-6B
(TOP VIEW)

①, ② represents product series

MARK		PRODUCT SERIES
①	②	
0	9	XC6209AxxxDx

③ represents type of regulator

MARK	TYPE	PRODUCT SERIES
A	CE pin, Active High pull-down resistor built in	XC6209AxxxDx
B	CE pin, Active High no pull-down resistor built in	XC6209BxxxDx
C	CE pin, Active Low pull-up resistor built in	XC6209CxxxDx
D	CE pin, Active Low no pull-up resistor built in	XC6209DxxxDx

④ represents integer of output voltage

MARK	VOLTAGE (V)	PRODUCT SERIES
3	3.X	XC6209x3xxDx
5	5.X	XC6209x5xxDx

⑤ represents decimal number of output voltage

MARK	VOLTAGE (V)	PRODUCT SERIES	MARK	VOLTAGE (V)	PRODUCT SERIES
0	X.0	XC6209xx0xDx	A	X.05	XC6209xx0ADx
1	X.1	XC6209xx1xDx	B	X.15	XC6209xx1ADx
2	X.2	XC6209xx2xDx	C	X.25	XC6209xx2ADx
3	X.3	XC6209xx3xDx	D	X.35	XC6209xx3ADx
4	X.4	XC6209xx4xDx	E	X.45	XC6209xx4ADx
5	X.5	XC6209xx5xDx	F	X.55	XC6209xx5ADx
6	X.6	XC6209xx6xDx	H	X.65	XC6209xx6ADx
7	X.7	XC6209xx7xDx	K	X.75	XC6209xx7ADx
8	X.8	XC6209xx8xDx	L	X.85	XC6209xx8ADx
9	X.9	XC6209xx9xDx	M	X.95	XC6209xx9ADx

⑥ Represents production lot number
0 to 9, A to Z repeated (G, I, J, O, Q, W excluded)
Note: No character inversion used.

1. The product and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.

2. The information in this datasheet is intended to illustrate the operation and characteristics of our products. We neither make warranties or representations with respect to the accuracy or completeness of the information contained in this datasheet nor grant any license to any intellectual property rights of ours or any third party concerning with the information in this datasheet.

3. Applicable export control laws and regulations should be complied and the procedures required by such laws and regulations should also be followed, when the product or any information contained in this datasheet is exported.

4. The product is neither intended nor warranted for use in equipment of systems which require extremely high levels of quality and/or reliability and/or a malfunction or failure which may cause loss of human life, bodily injury, serious property damage including but not limited to devices or equipment used in 1) nuclear facilities, 2) aerospace industry, 3) medical facilities, 4) automobile industry and other transportation industry and 5) safety devices and safety equipment to control combustions and explosions. Do not use the product for the above use unless agreed by us in writing in advance.

5. Although we make continuous efforts to improve the quality and reliability of our products; nevertheless Semiconductors are likely to fail with a certain probability. So in order to prevent personal injury and/or property damage resulting from such failure, customers are required to incorporate adequate safety measures in their designs, such as system fail safes, redundancy and fire prevention features.

6. Our products are not designed to be Radiation-resistant.

7. Please use the product listed in this datasheet within the specified ranges.

8. We assume no responsibility for damage or loss due to abnormal use.

9. All rights reserved. No part of this datasheet may be copied or reproduced unless agreed by Torex Semiconductor Ltd in writing in advance.

TOREX SEMICONDUCTOR LTD.