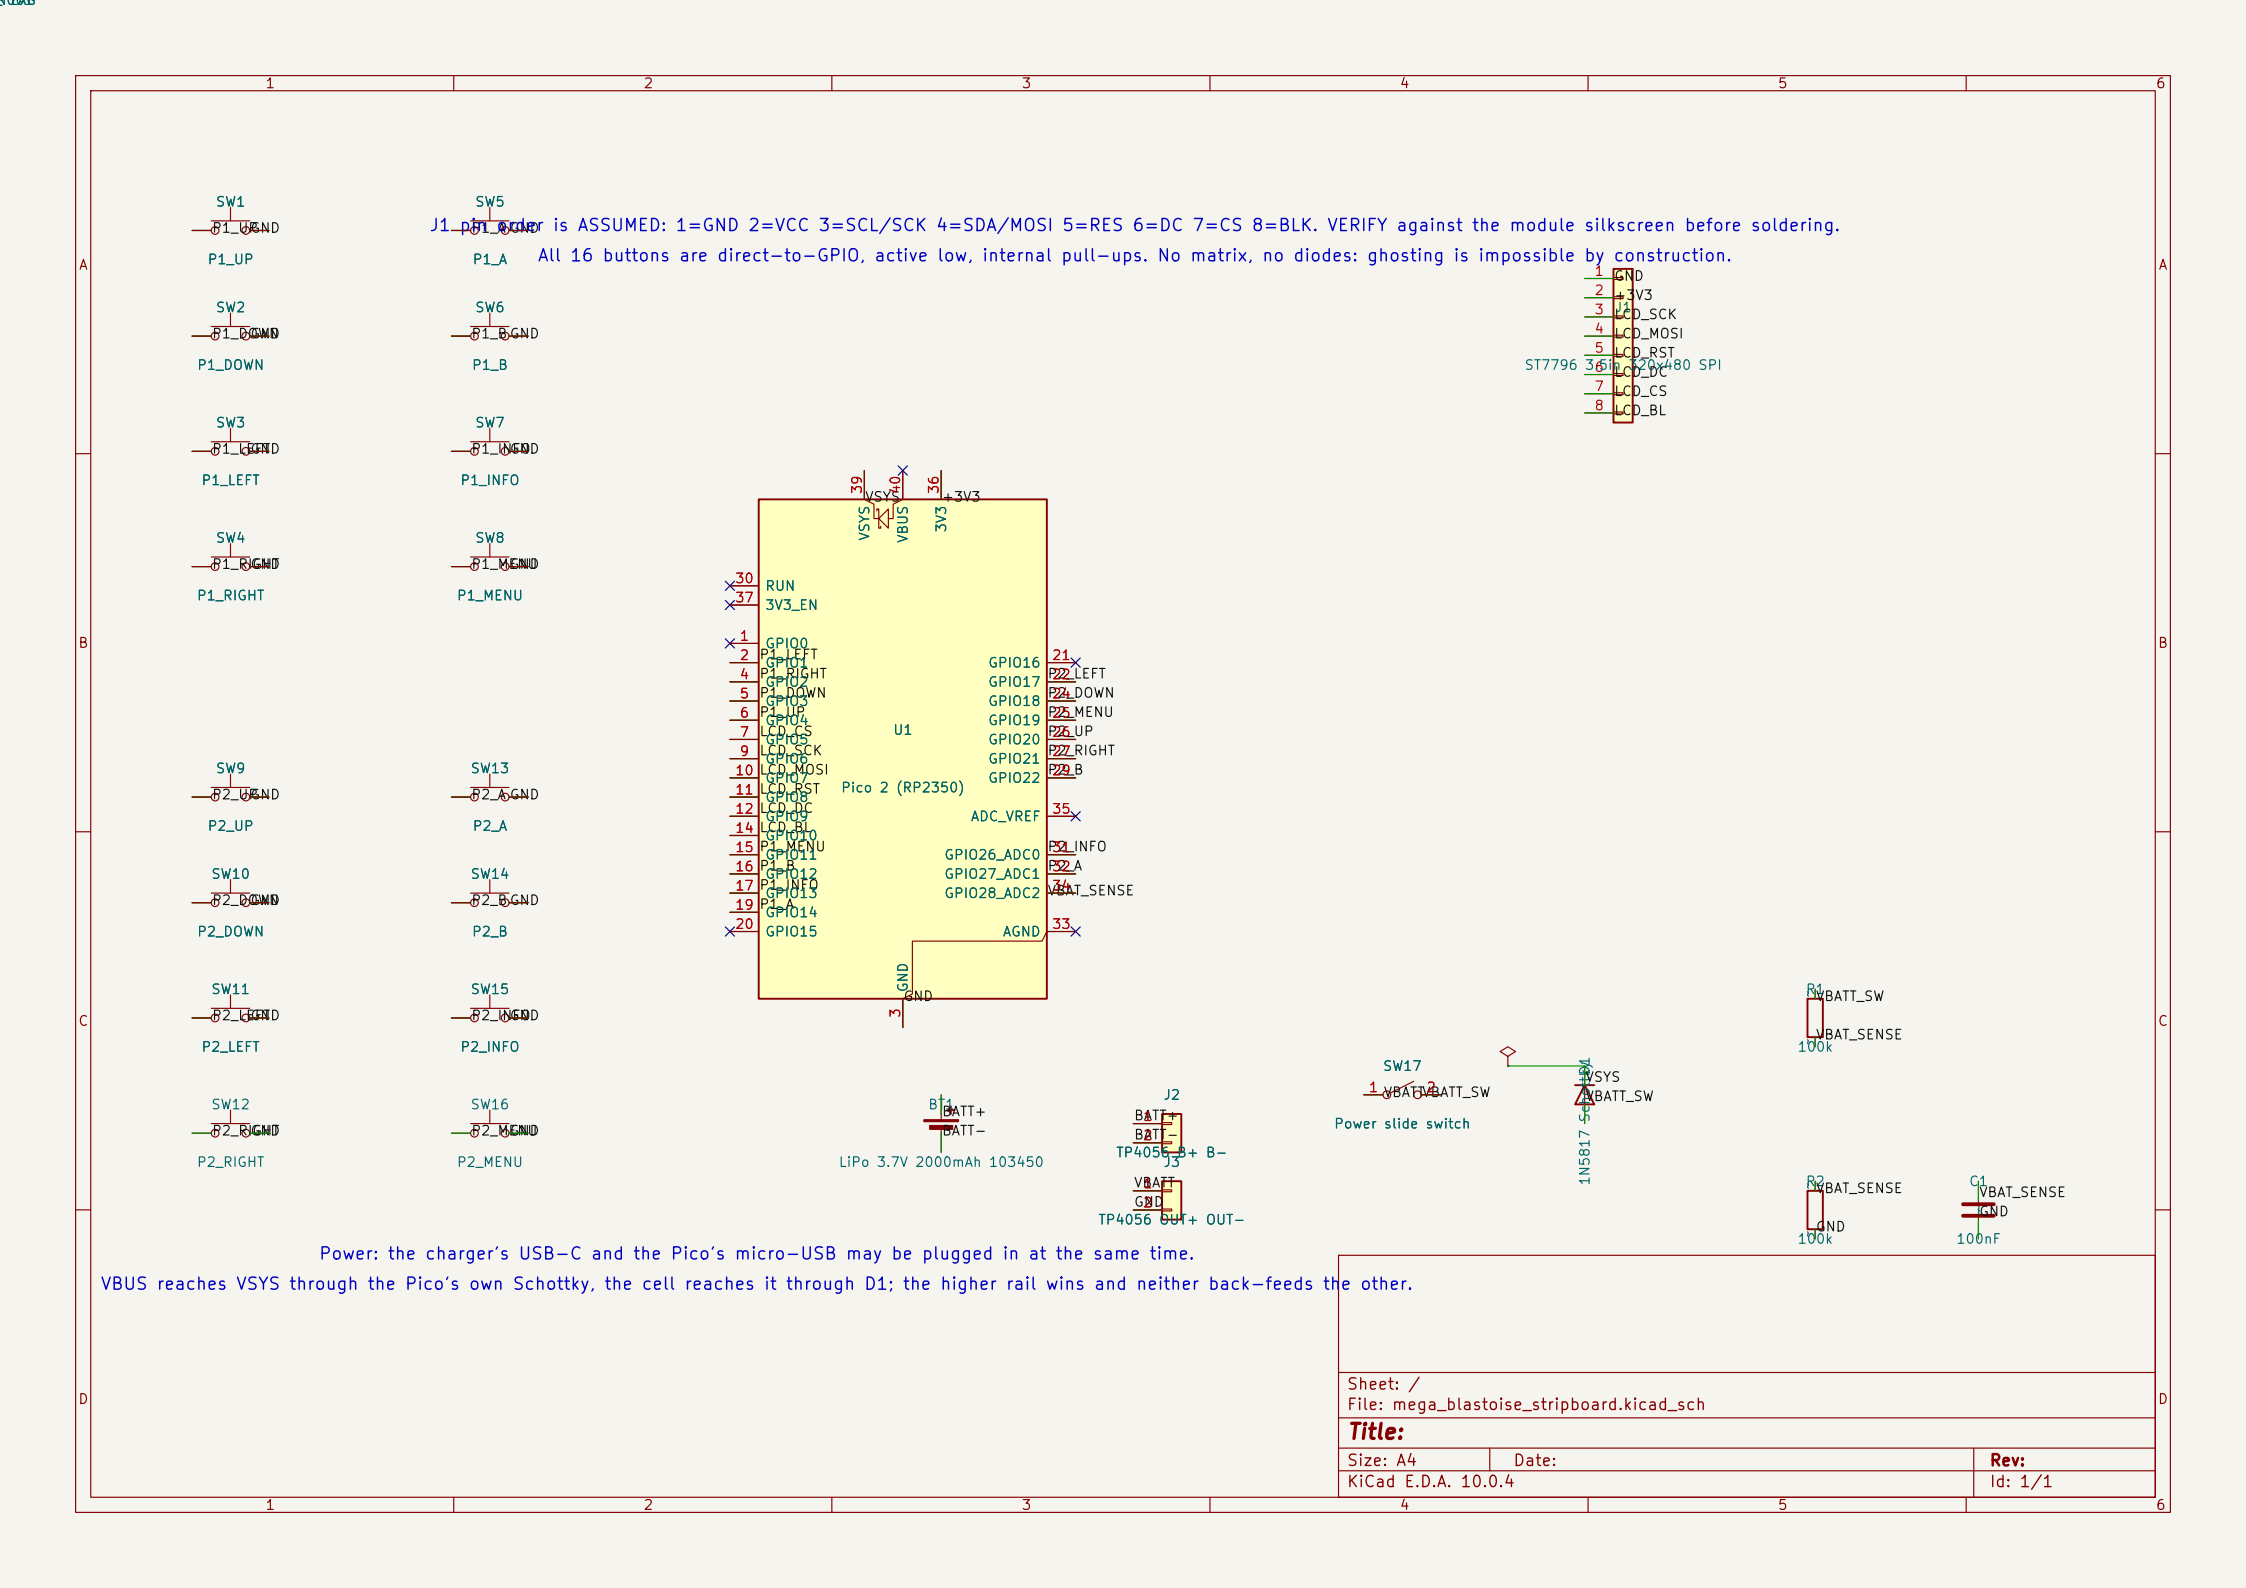

J1 pinout is ASSUMED: 1=GND 2=VCC 3=SCL/SCK 4=SDA/MOSI 5=RES 6=DC 7=CS 8=BLK. VERIFY against the module silkscreen before soldering.
All 16 buttons are direct-to-GPIO, active low, internal pull-ups. No matrix, no diodes: ghosting is impossible by construction.
ST7796 3.5" 320×480 SPI
Pico 2 (RP2350)
U1
LiPo 3.7V 2000mAh 103450
TP4056 OUT+ OUT-
TP4056 B+ B-
Power slide switch
1N5817 Schottky
100k
100k
100nF
Power: the charger's USB-C and the Pico's micro-USB may be plugged in at the same time.
VBUS reaches VSYS through the Pico's own Schottky, the cell reaches it through D1; the higher rail wins and neither back-feeds the other.
Sheet: /
File: mega_blastoise_stripboard.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 10.0.4
Id: 1/1