




J2B1
DE15_Socket_HighDensity_MountingHoles



External PSU




Power Out




U1 YD-RP2040 TypeC Black Clone			
GP_0	1	GP0	40 +5V_VOUT
GP_1	2	GP1	39 Vin
GND	3	GND	38 GND
GP_2	4	GP23	37
GP_3	5	GP3	36
GP_4	6	GP29	35 GP_29
GP_5	7	GP28	34
GND	8	GND	33 GND
GP_6	9	GP6	32
GP_7	10	GP7	31
GP_8	11	GP8	30 RUN
GP_9	12	GP9	29 GP_22
GND	13	GND	28 GND
GP_10	14	GP10	27 GP_21
GP_11	15	GP11	26 GP_20
GP_12	16	GP12	25 GP_19
GP_13	17	GP13	24 GP_18
GND	18	GND	23 GND
CLOCK	19	GP14	22 DATA2
LATCH	20	GP15	21 DATA1
		GP16	

Keyboard Interface

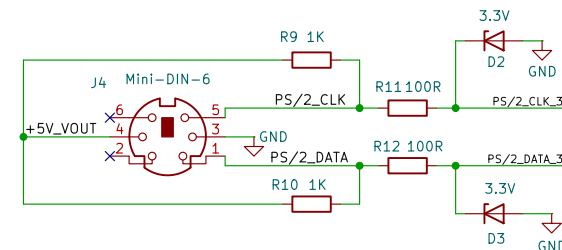


2-битный VGA R2R DAC


2-2-2 (RGB222) палитра

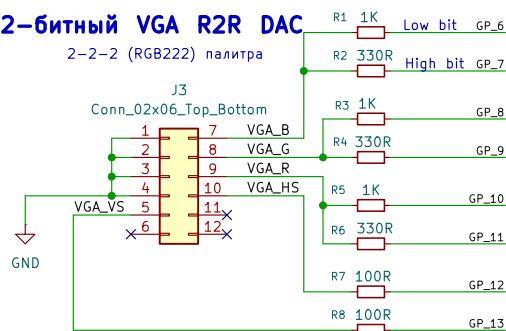


Audio-In Interface

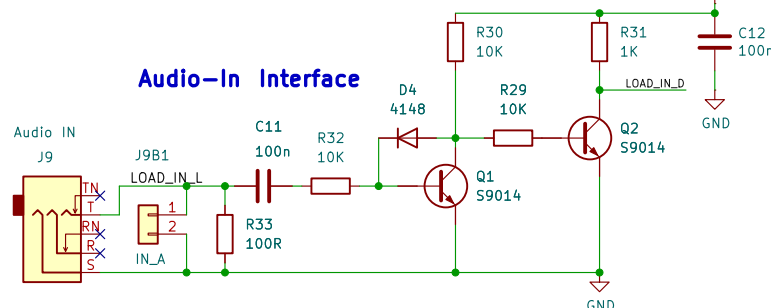


Audio-Out Interface

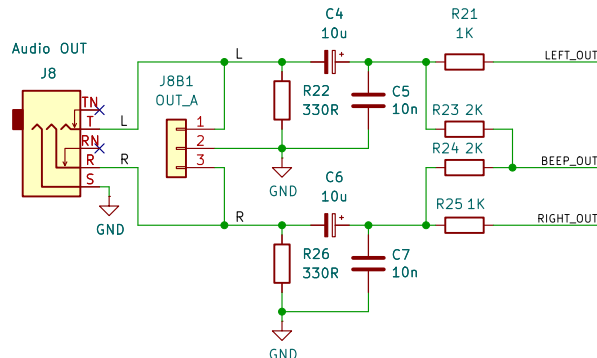


MicroSD Card

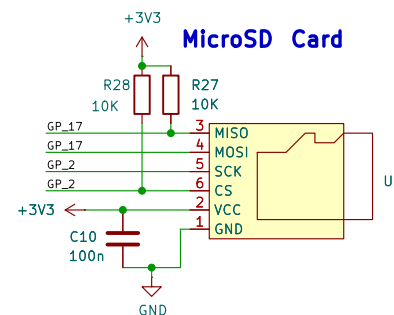

Dendy Joysticks 1

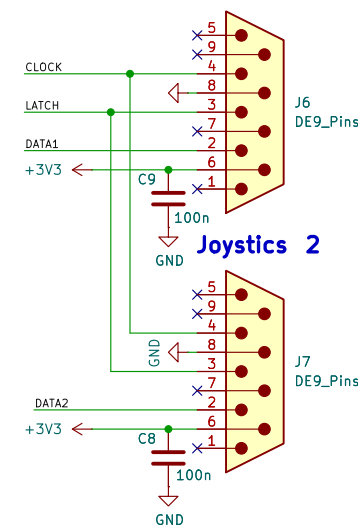

Joysticks 2

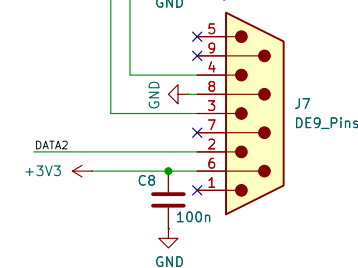

External Connector

J5 Conn_02x20_Odd_Even			
GND	1	GP_14	CLOCK
GND	3	GP_15	LATCH
GND	5	GP_16	DATA1
GND	7	GP_17	DATA2
GND	9	GP_18	
GND	11	GP_19	
GND	13	GP_20	
GND	15	GP_21	
LOAD_IN_D	17	GP_22	
GND	19	GP_23	
RIGHT_OUT	21	GP_24	
LEFT_OUT	23	GP_25	
BEEP_OUT	25	GP_26	
GND	27	GP_27	
PS/2_DATA_3V	29	GP_28	
PS/2_CLK_3V	31	GP_29	
GND	33	GP_30	
GND	35	GP_31	
GND	37	GP_32	
+5V	39	GP_33	

Alex Snigir

Sheet: /

File: rp2040_black_vga.kicad_sch

Title: Murmulator on RP2040 (black clone) module with VGA

Size: A4

Date:

Rev: v1.0

KiCad E.D.A. 10.0.3

Id: 1/1