


COMPACT SCISSOR LIFT - GENERAL ARRANGEMENT

OPERATING RANGE: 20° TO 60° RATED PAYLOAD: 10 kg CENTERED

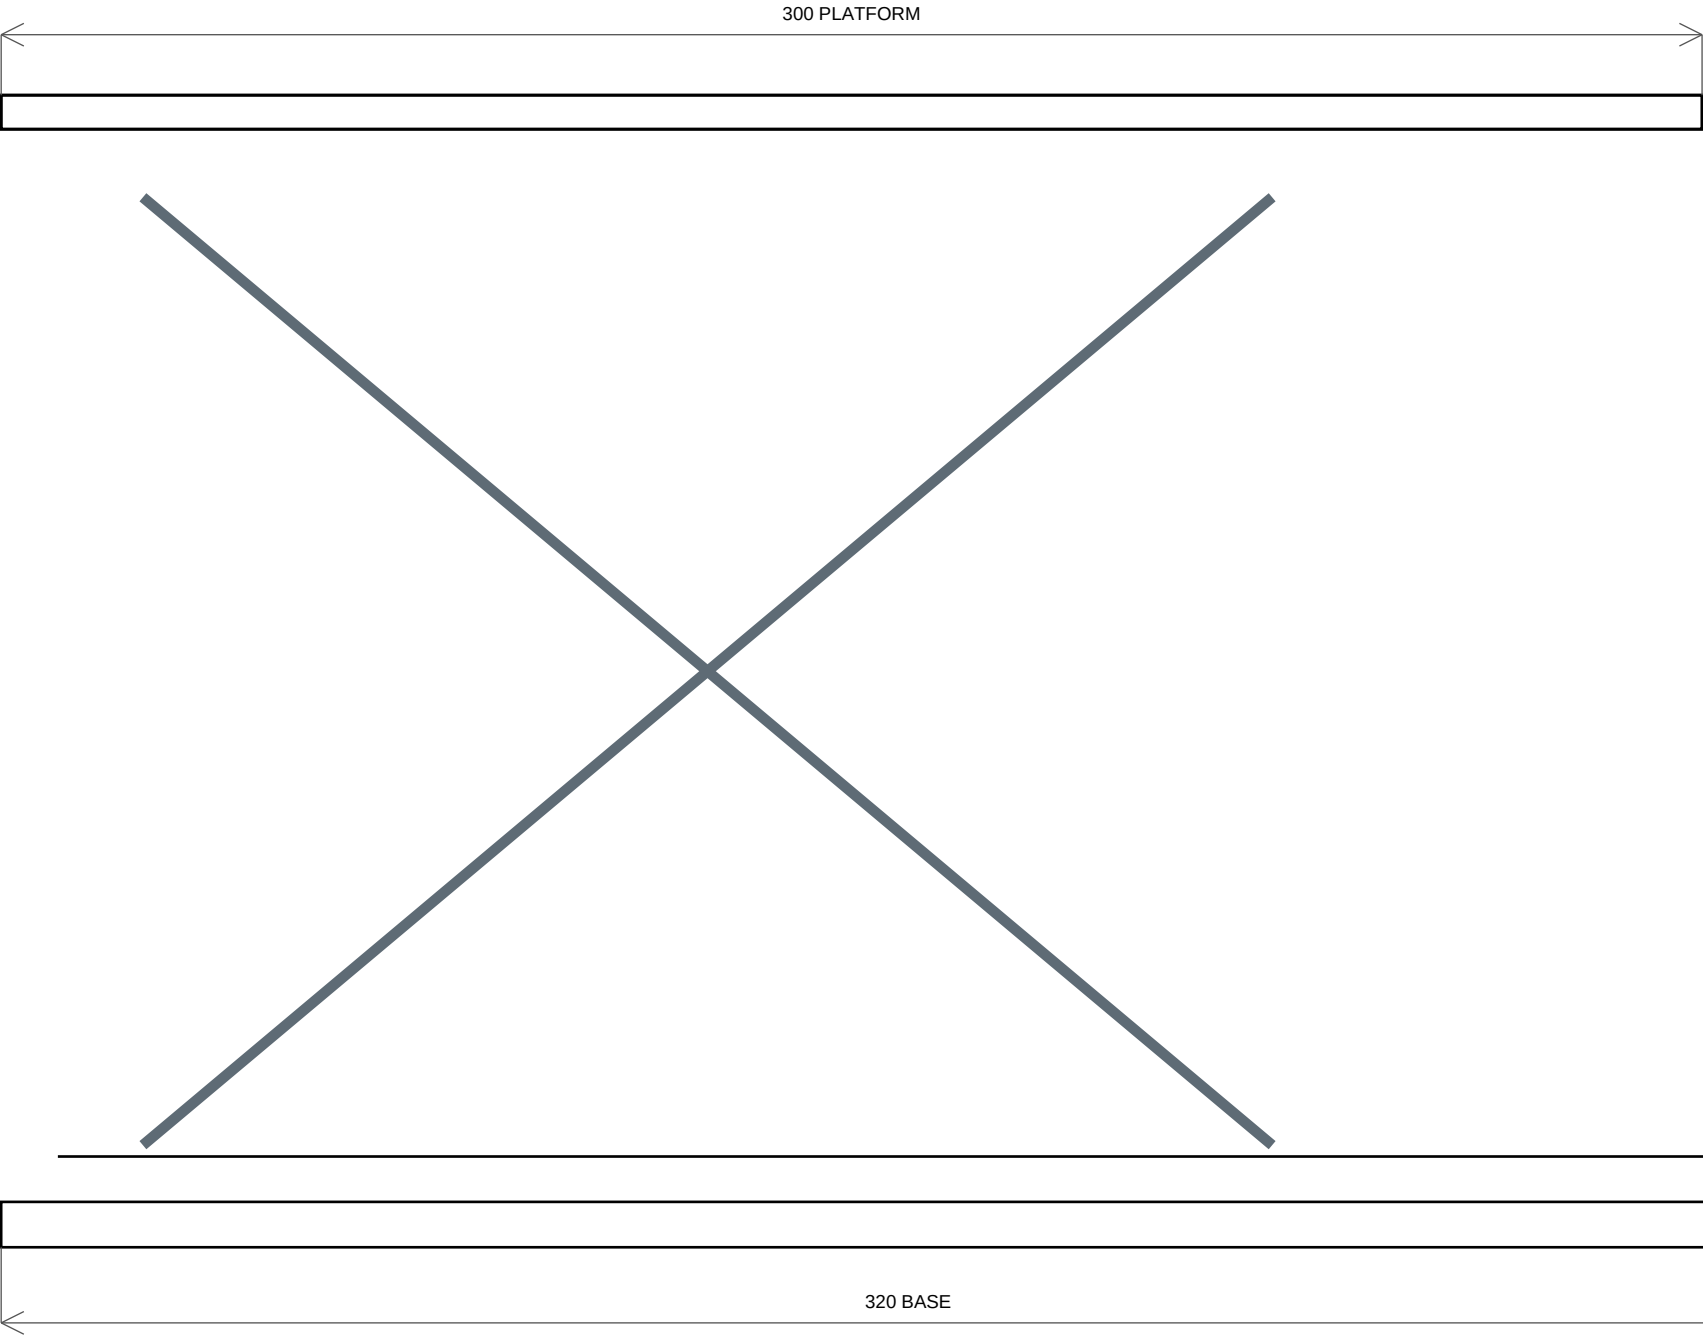


BOM - SUMMARY

ITEM	DESCRIPTION	QTY
1	Base Plate	1
2	Top Platform	1
3	Scissor Arm	4
4	Pivot Pins	10
5	Lead Screw / Nut	1 set
6	Brackets / sliders	as shown

GENERAL ARRANGEMENT	SHEET 1 / 4
PART / DOC: GA-001 REV: A	UNITS: mm SCALE: NTS

SCISSOR ARM - SL-003

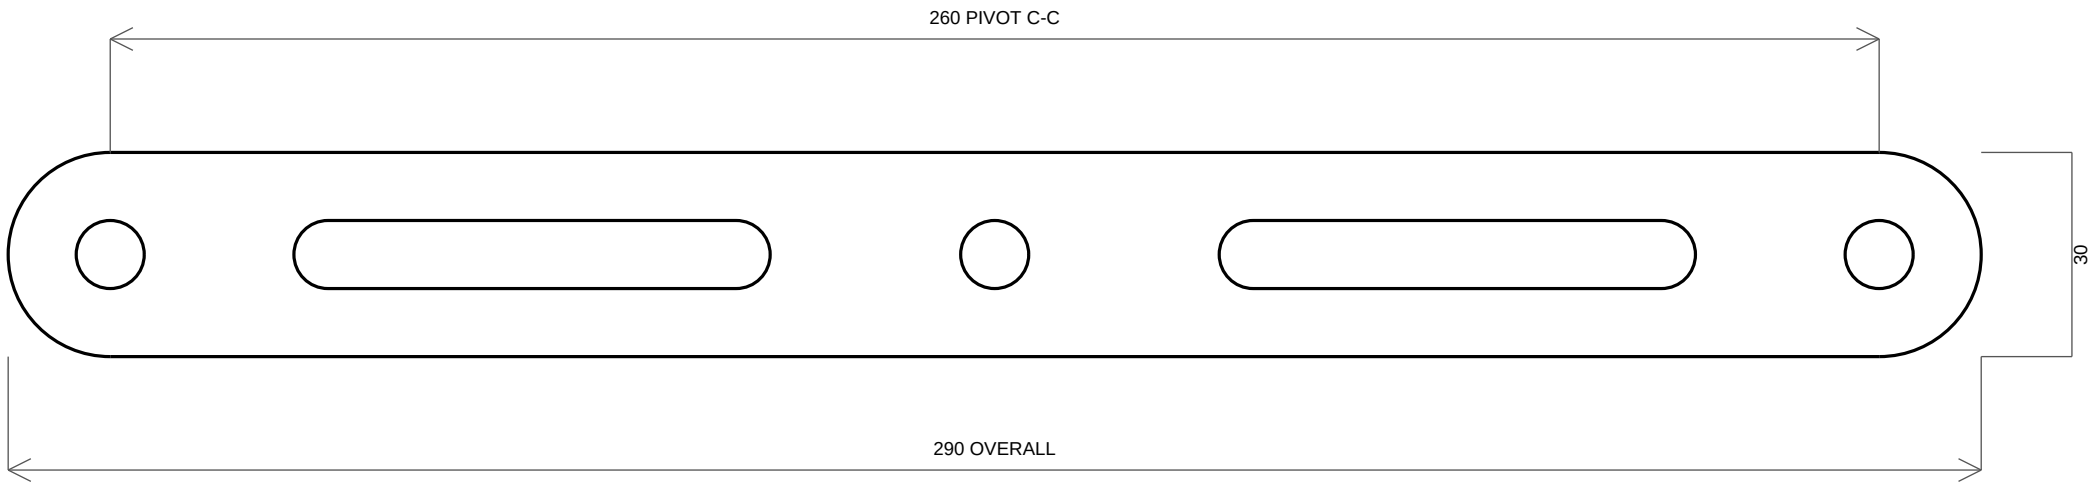


THICKNESS: 6 PIVOT HOLES: Ø10 THRU MATERIAL: MILD STEEL (CONCEPT)

SLOTS: 70 x 10 TYP. BREAK SHARP EDGES / DEBURR AFTER CUTTING

SCISSOR ARM	SHEET 2 / 4
PART / DOC: SL-003 REV: A	UNITS: mm SCALE: NTS


TOP PLATFORM - SL-002

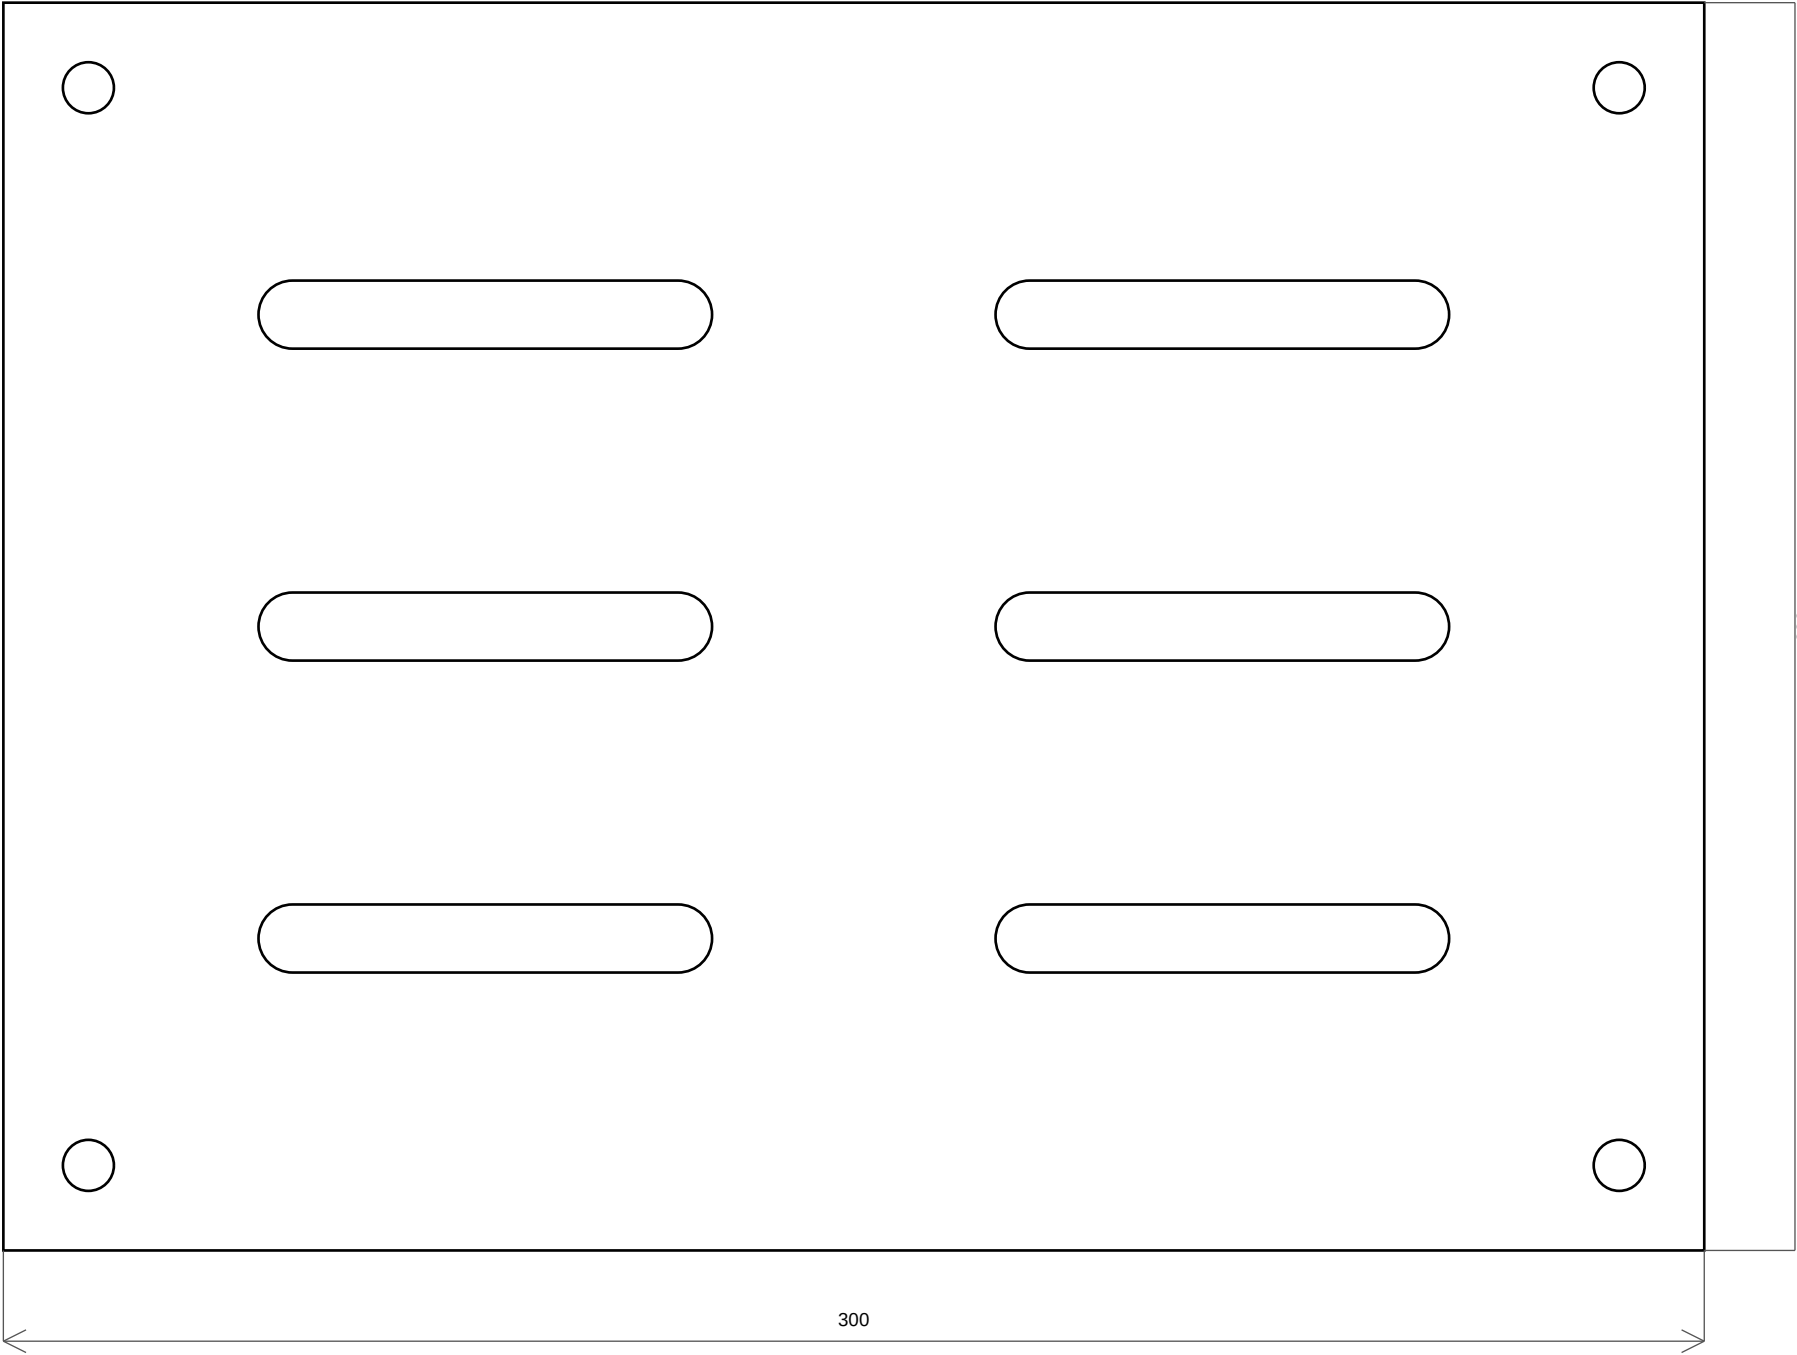

THICKNESS: 6 6x SLOTS 80 x 12 4x MOUNTING HOLES Ø9

TOP PLATFORM	SHEET 3 / 4
PART / DOC: SL-002 REV: A	UNITS: mm SCALE: NTS

BASE PLATE - SL-001

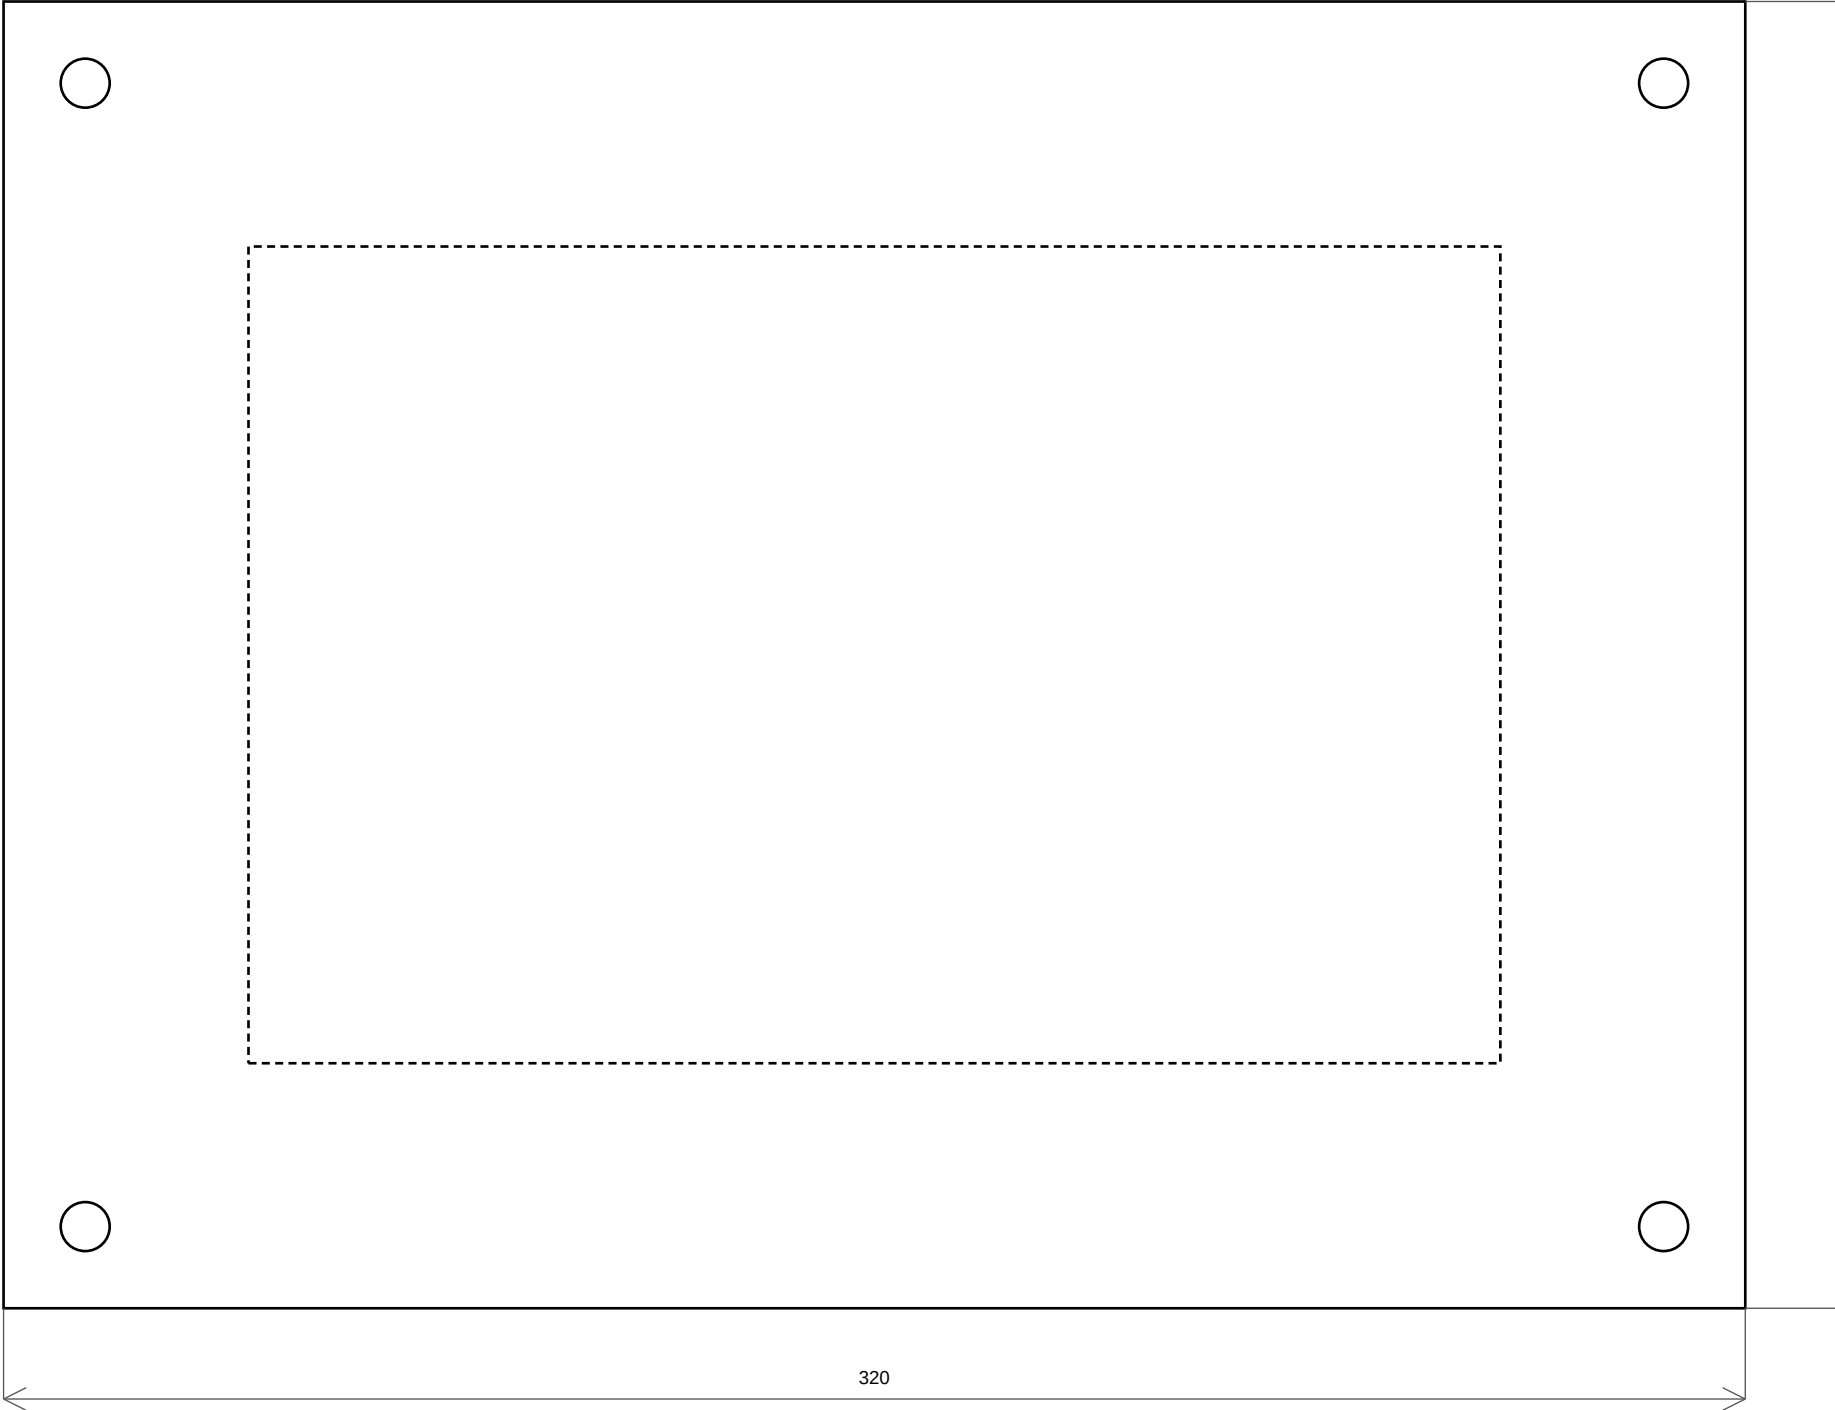

THICKNESS: 8 4x MOUNTING HOLES Ø9 CENTRAL POCKET / MACHINING PER CAD MODEL

BASE PLATE	SHEET 4 / 4
PART / DOC: SL-001 REV: A	UNITS: mm SCALE: NTS