

Hat SPK2

SKU:U055-B



Description

Hat SPK2 is a speaker designed for use with the M5StickC PLUS, featuring a built-in MAX98357 digital audio I2S amplifier IC and a 1W speaker. It supports audio input with 16-bit, 32kHz to 192kHz sampling rates and includes built-in short-circuit and over-temperature protection, making it suitable for various audio application scenarios.

Features

- High-quality audio output: Supports 16-bit, 32kHz to 192kHz sampling rate audio input
- Multiple output modes: Includes mono and stereo, as well as I2S, left-aligned, and right-aligned audio input formats
- Stability and reliability: Built-in short-circuit and over-temperature protection
- Programming platforms: Arduino, UIFlow

Includes

- 1 x Hat SPK2
- 1 x Sticker

Applications

- Audio speaker
- Television
- Car audio
- Smart speaker


Specifications

Specification	Parameter
Power Output	Max 3.2W
Signal-to-Noise Ratio	103dB
Total Harmonic Distortion	0.1%
Power Supply Voltage	4.5V-5.5V
Operating Temperature Range	0 ~ 40°C
Audio Input Format	I2S, Left-Justified, Right-Justified
Sampling Rate	8kHz ~ 96kHz
Control Interface	I2S
Product Size	24.0 x 18.6 x 13.7mm
Product Weight	4.6g
Package Size	136.0 x 92.0 x 13.0mm
Gross Weight	8.1g

Datasheets


Schematics

[Hat SPK2 Schematics PDF](#)

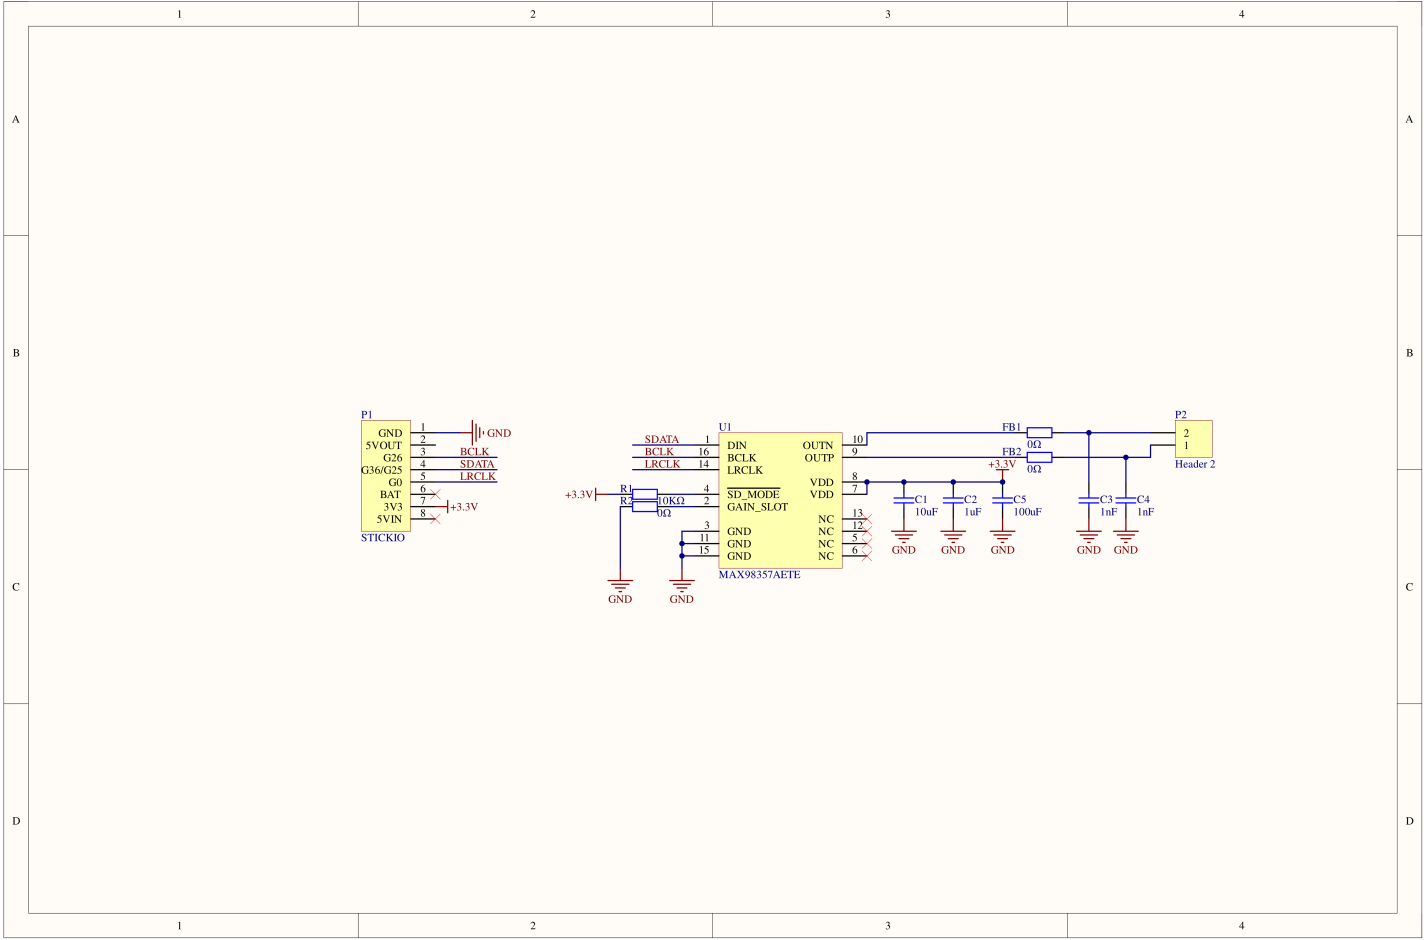

Model Size

[Hat SPK2 Model Size PDF](#)

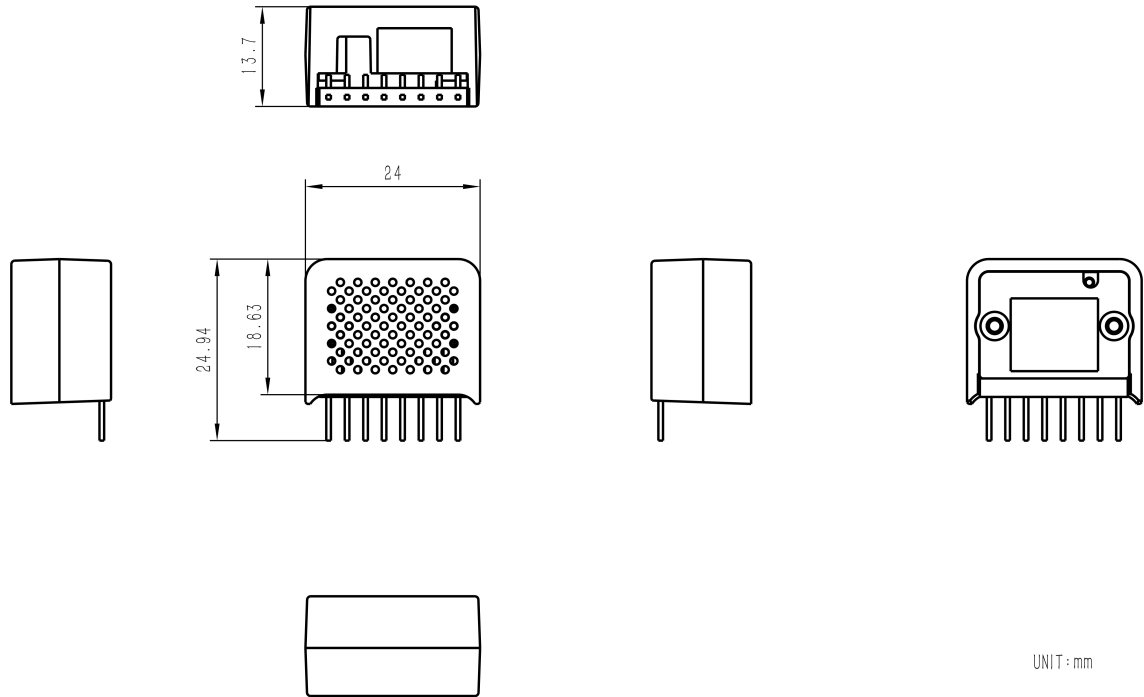

Softwares

Arduino

- [Hat SPK2 Example](#)

UiFlow1

- [Hat SPK2 UiFlow1 Docs](#)

UiFlow2

- [Hat SPK2 UiFlow2 Docs](#)

Product Comparison

Product Comparison Table



Hat SPK2



Hat SPK

Output Power	Max 3.2W	Max 3W
Signal-to-Noise Ratio	103dB	85dB
Distortion Rate	0.1%	10%
Power Supply Voltage	4.5V-5.5V	2.5V-5.5V
Input Audio Format	I2S, Left-aligned, Right-aligned	Mono