Development Assistant

Purpose: Demonstrate the function of each command.

Process:

Step 1. Run the software "Development Assistant".


1. Connect the terminal with the computer by the serial interface.


Note: Please use "USB2.0 to RS232 converter" if there is no RS232 port on your computer.

2. Complete the connection and switch on power. (The voltage range is from 4.5V to 20V, Suggesting working voltage is 12V.)

3. Install the toolbox (.exe format file) on your computer, and then run it.

4. Click "Development Assistant".

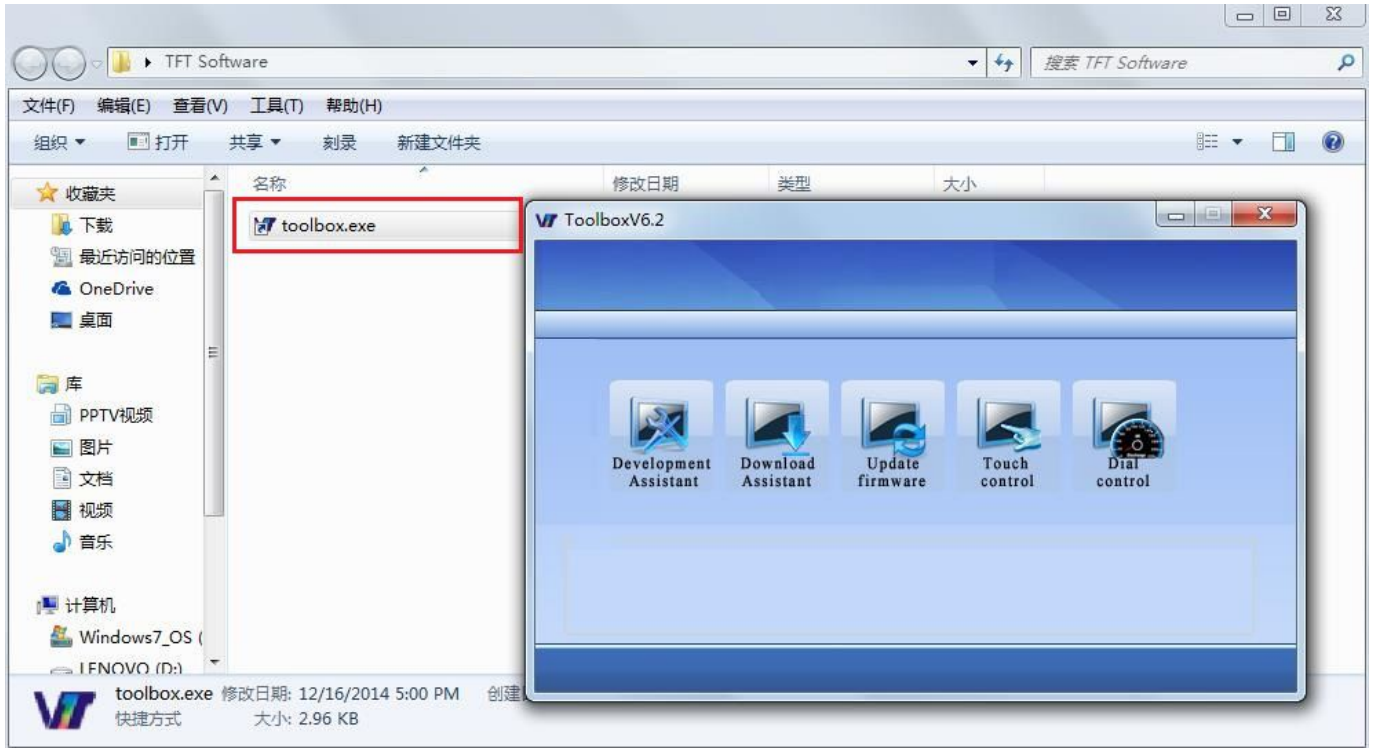

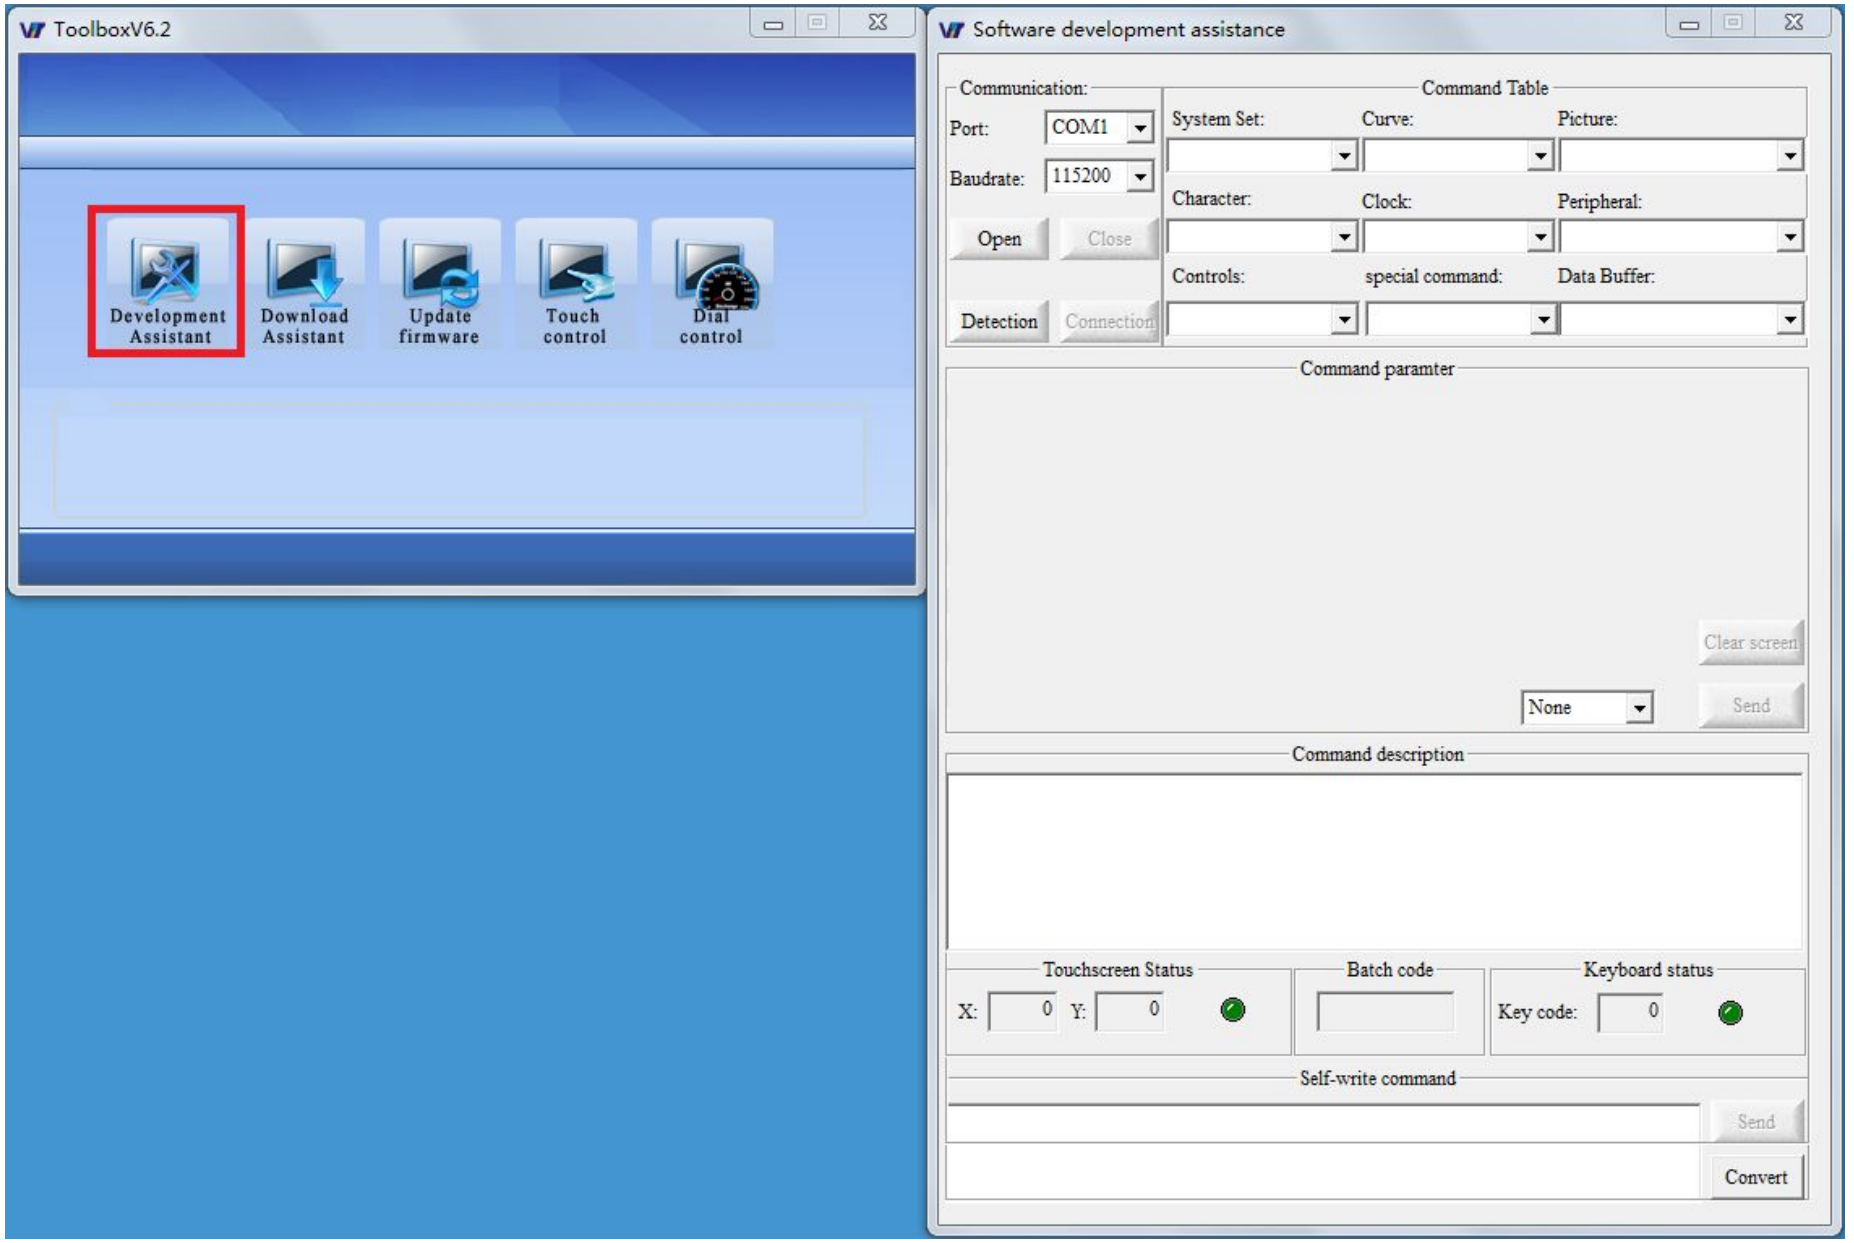
ToolboxV6.2
Development Assistant
Download Assistant
Update firmware
Touch control
Dial control
Software development assistance
Communication:
Port:
COM1
Baudrate:
115200
Open
Close
Detection
Connection
Command Table
System Set:
Curve:
Picture:
Character:
Clock:
Peripheral:
Controls:
special command:
Data Buffer:
Command paramter
Clear screen
None
Send
Command description
Touchscreen Status
X:
0
Y:
0
Batch code
Keyboard status
Key code:
0
Self-write command
Send
Convert


Step 2. Overview of the software — 4 working areas

Part 1. Handshake Area:
Build the communication between the computer with terminal.

Part 2. Command Area:
Test the Text command, Picture command, Curve, Command, Peripheral command, etc.

Part 3. Command Description Area:
Show the detailed command description.

Part 4. Self-write Command Area:
Write the command by yourself and send it to the terminal.

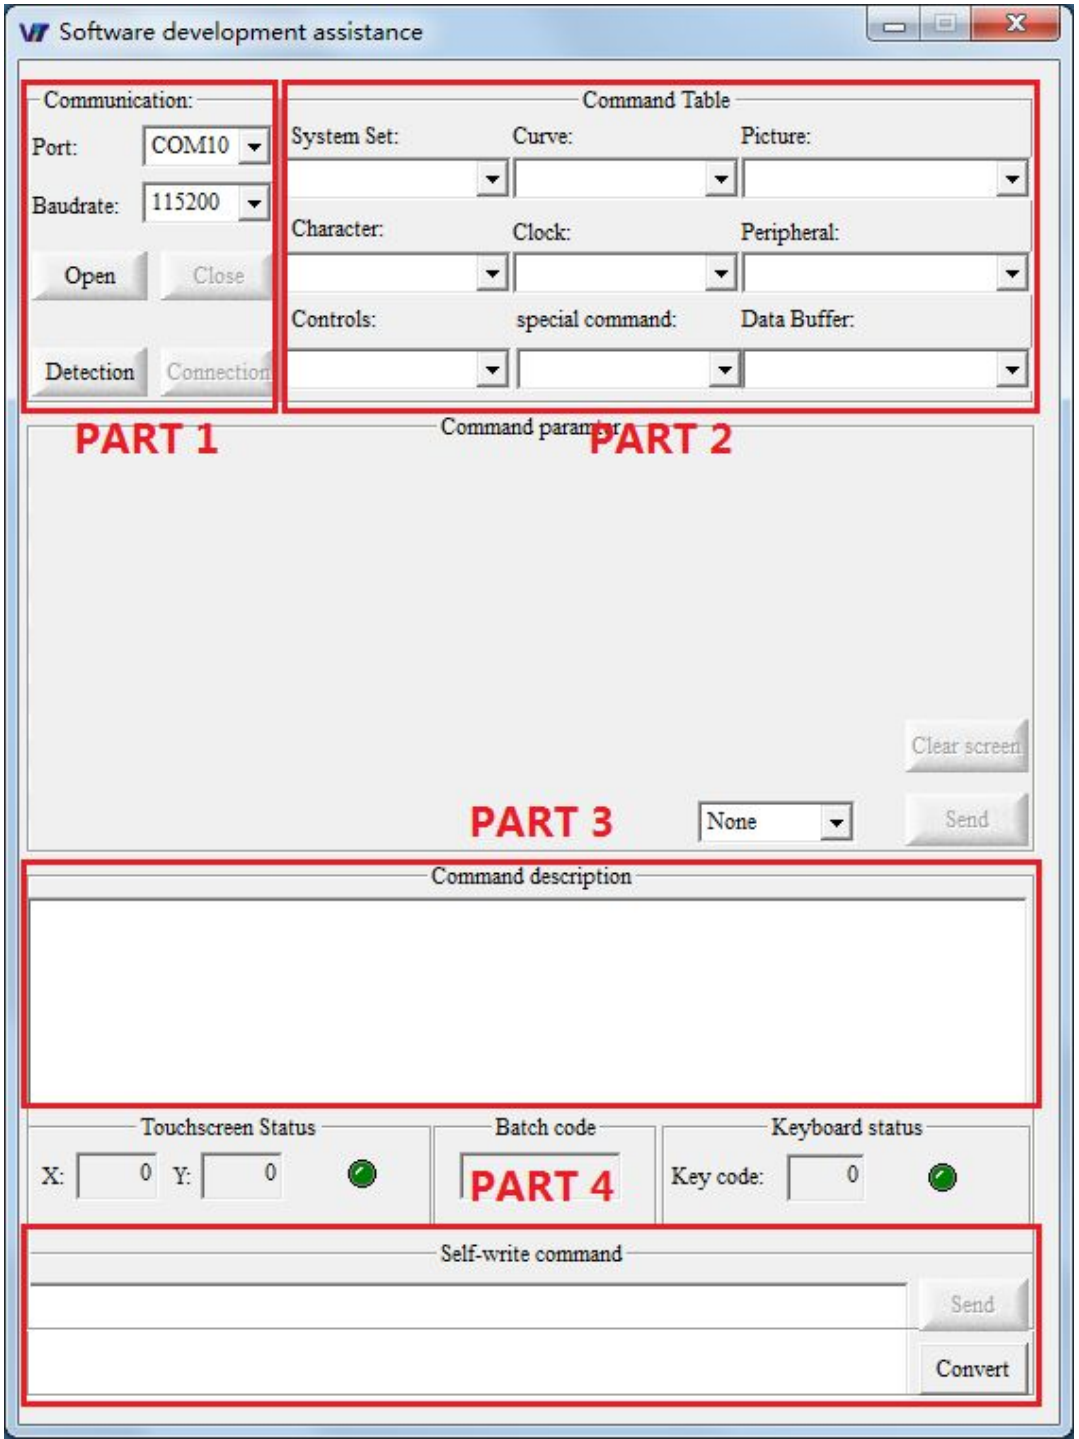

Step 3. Build communication with computer
"The handshake process"

1. Select the "Port".


2. Select the "Baudrate".
Note: the default baudrate is 115200.

3. Click "Open" Button.

4. Click "Connection" Button.

5. Here Jumps a Dialog box "Communicate Successful".

Note: Please perform the "Handshake" process each time.

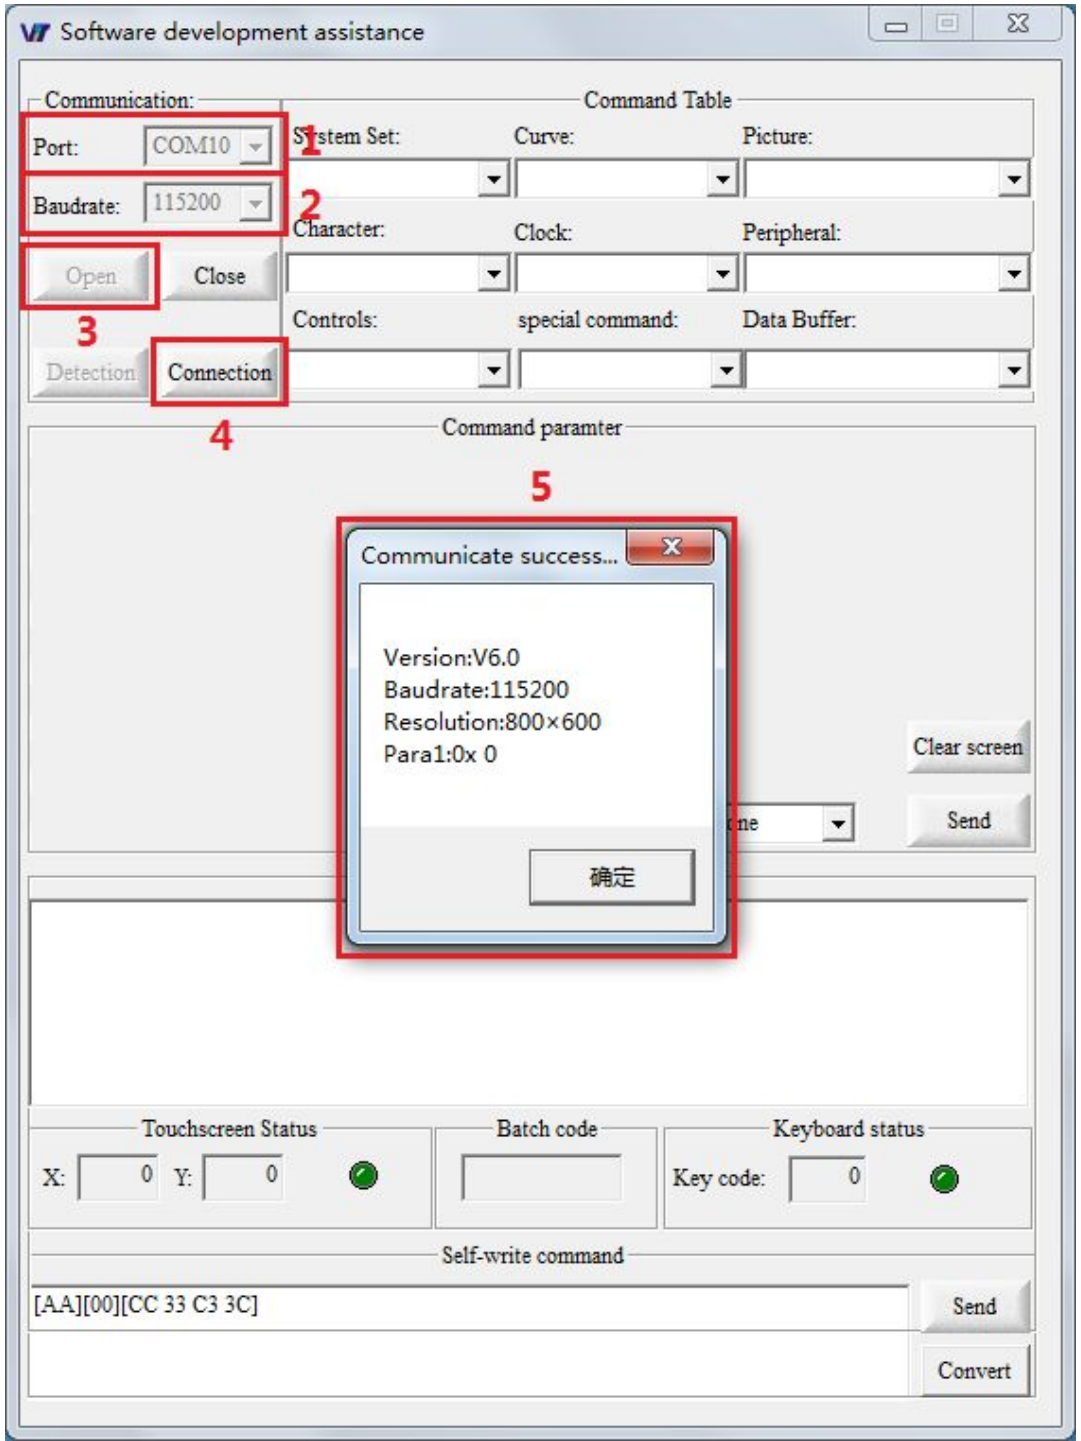


Step 4. Command Area and Command Description

1. Select the Command.
For example: Image display, Set Fcolour & Bcolour, Text box, etc.

2. Fill the parameter.
For example: Coordinate, Colour code, String, Sequence, Number, etc.

3. Click "Send" Button.
The command you set will be sent to terminal.


4. Detailed Command Description.

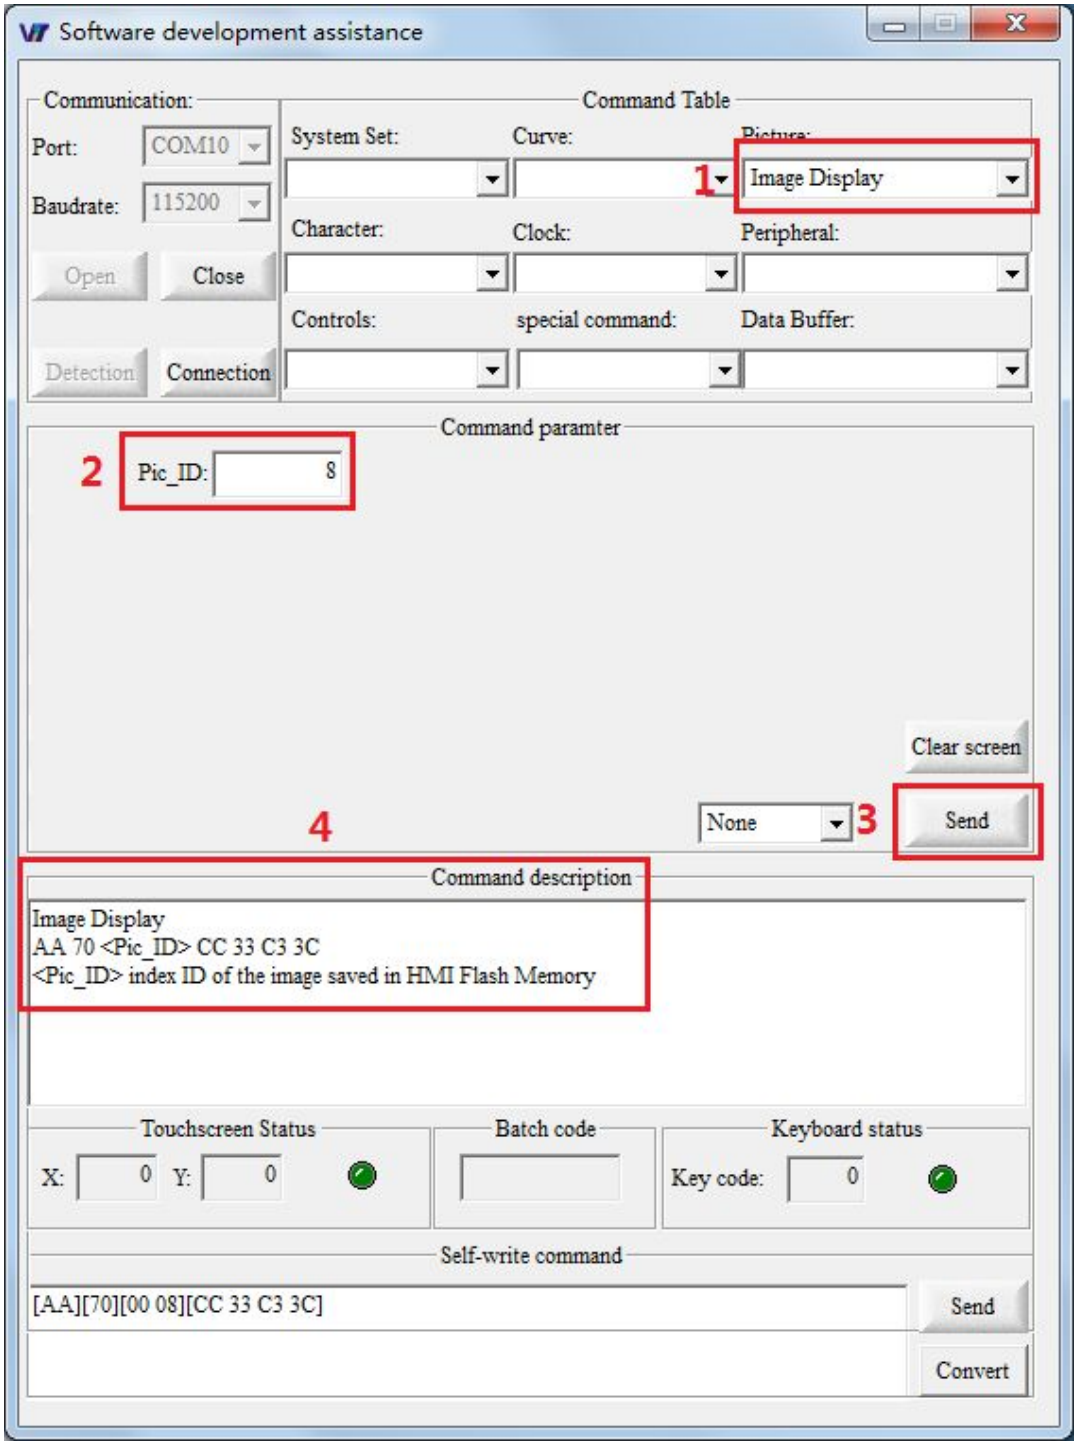

Step5. Self-write command — Practice to use the commands

Each Command includes the Frame Head (1), Command code (2), String (3) and Frame End (4).

Note: For more details, please check the "Chief Command Set" and "Command set" document in "02-Command Sets" folder.

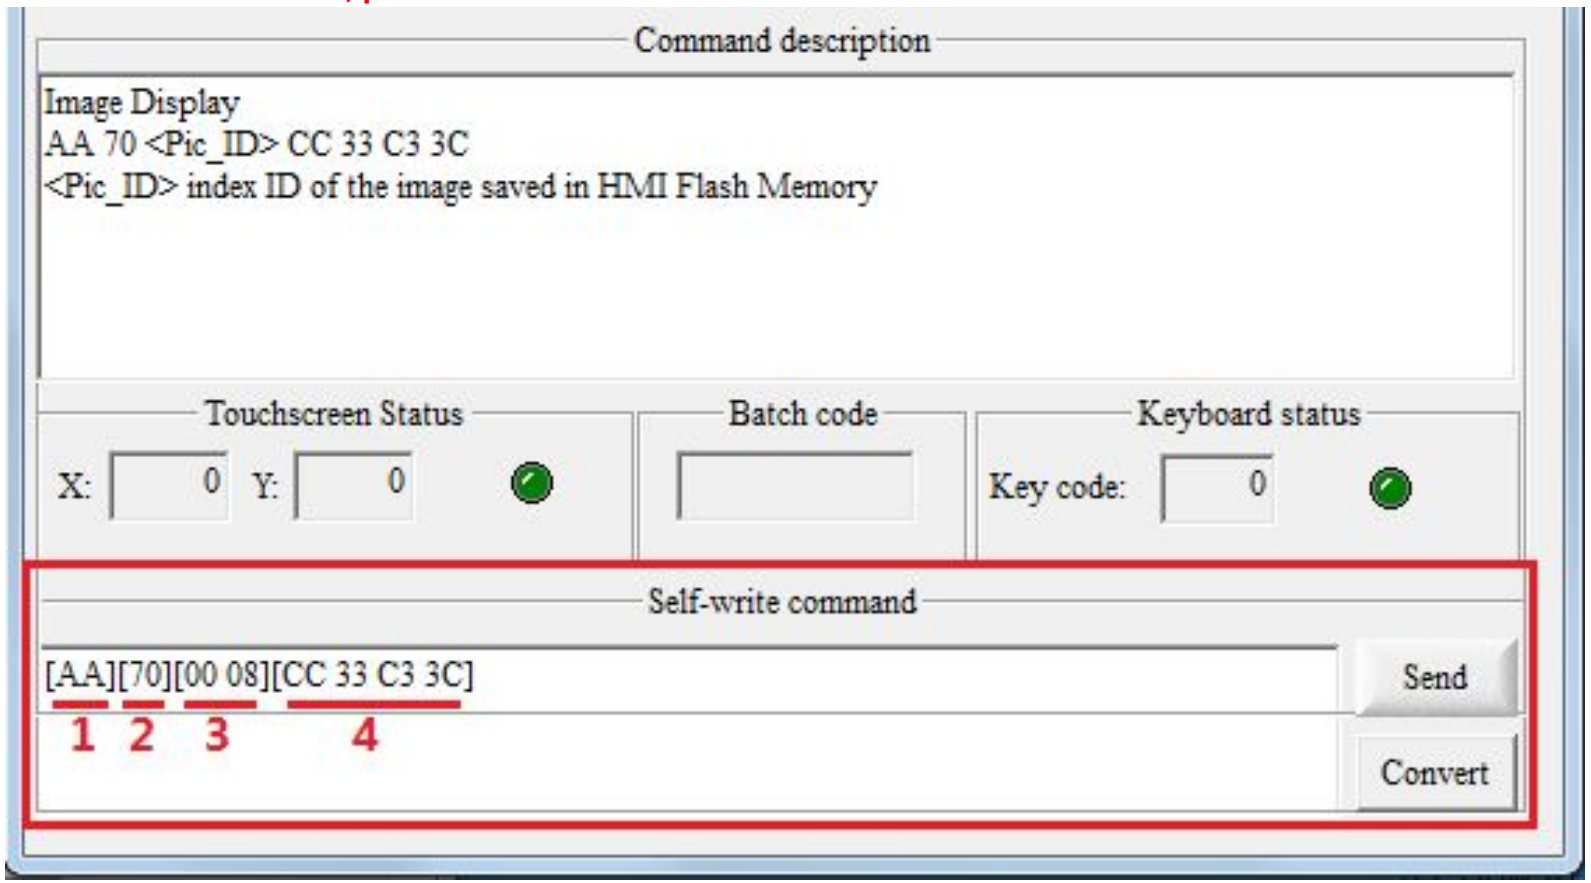

Should you have any technical questions, please feel free to contact us.