STONE **Professional Credible and Successful**

Download Assistant

Purpose: Download images & application files into the terminal, and modify the working mode preset.


Run the software "Download Assistant".


1. Connect the terminal with the computer by USBmini port.

Please note: The driver for USBmini port should be installed firstly. (One is for Windows 7 system, the other is for Window XP system)

2. Plug the power supply by DB9 cable. (The voltage range is from 4.5V to 20V, suggesting working voltage is 12V.)

3. Click "Download Assistant" to run it.

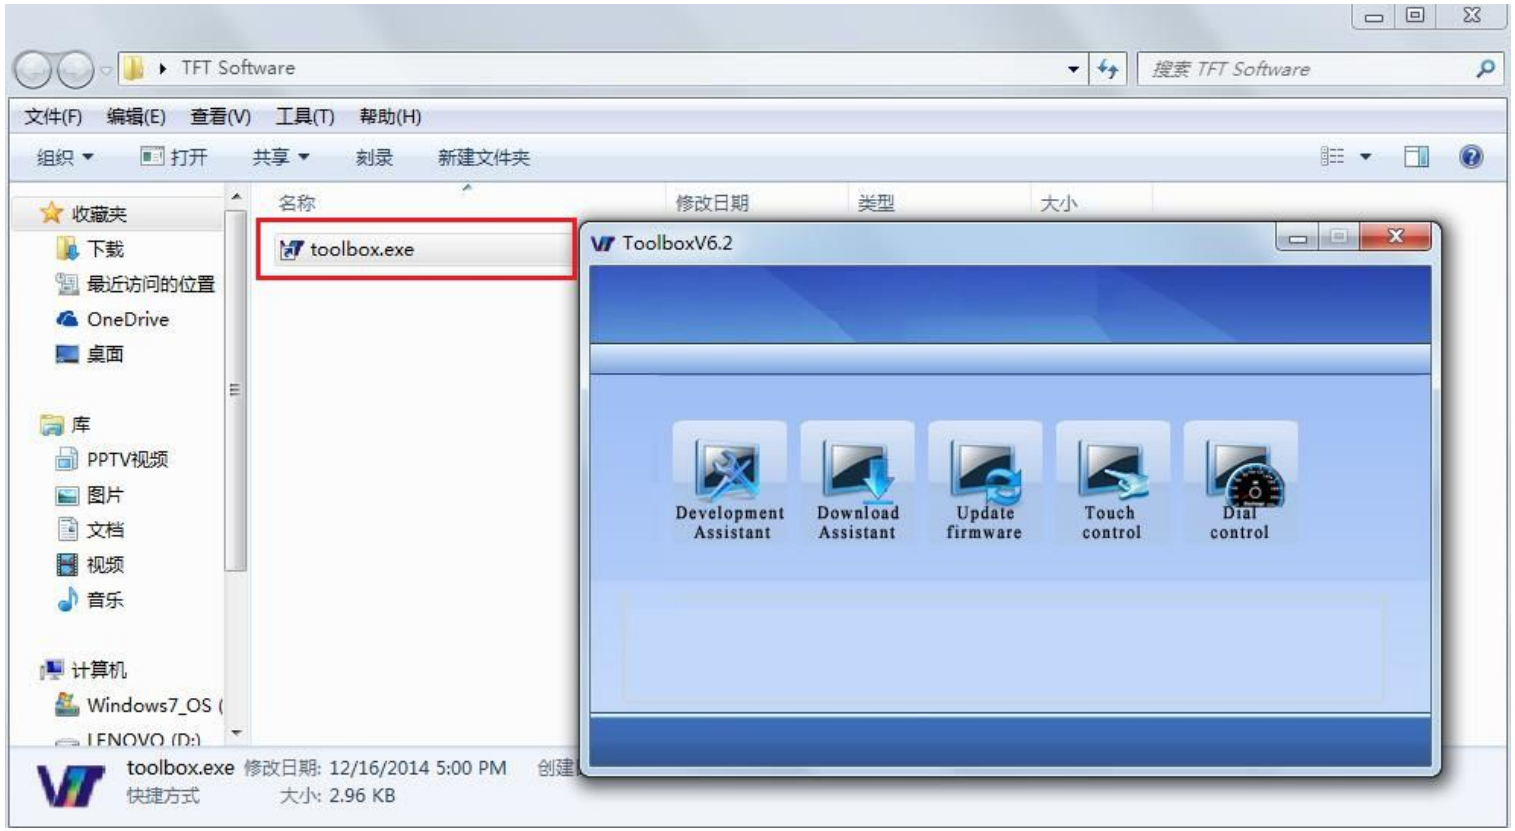

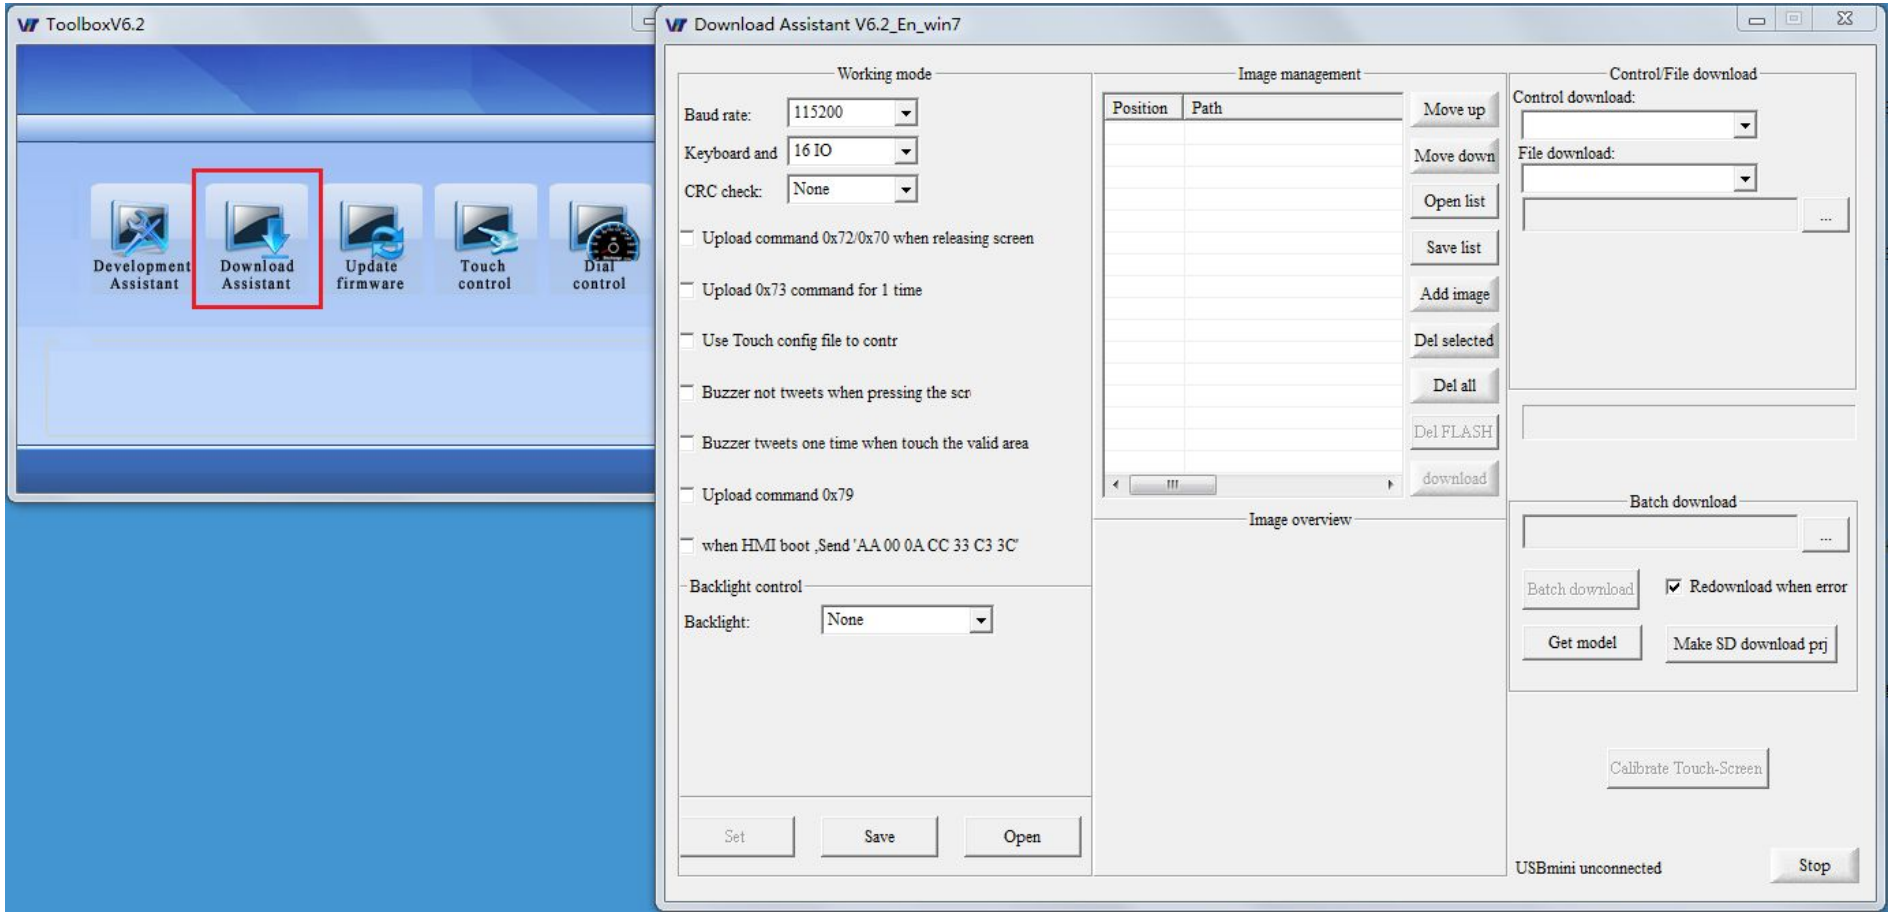
ToolboxV6.2
Development Assistant
Download Assistant
Update firmware
Touch control
Dial control
Download Assistant V6.2_En_win7
Working mode
Baud rate: 115200
Keyboard and 16 IO
CRC check: None
Upload command 0x72/0x70 when releasing screen
Upload 0x73 command for 1 time
Use Touch config file to contr
Buzzer not tweets when pressing the scr
Buzzer tweets one time when touch the valid area
Upload command 0x79
when HMI boot ,Send 'AA 00 0A CC 33 C3 3C'
Backlight control
Backlight: None
Set
Save
Open
Image management
Position
Path
Move up
Move down
Open list
Save list
Add image
Del selected
Del all
Del FLASH
download
Image overview
Control/File download
Control download:
File download:
Batch download
Batch download
Redownload when error
Get model
Make SD download prj
Calibrate Touch-Screen
USBmini unconnected
Stop


4. Overview of the software --- 4 working areas (see picture as below)

Part 1. Working mode area: Set working mode.

Part 2. Image management area: You can select one image or a list that you want to download into the terminal.

Part 3. Control File download area: Control files and other files downloading.


Part 4. Batch downloading area: Download files by SD card.

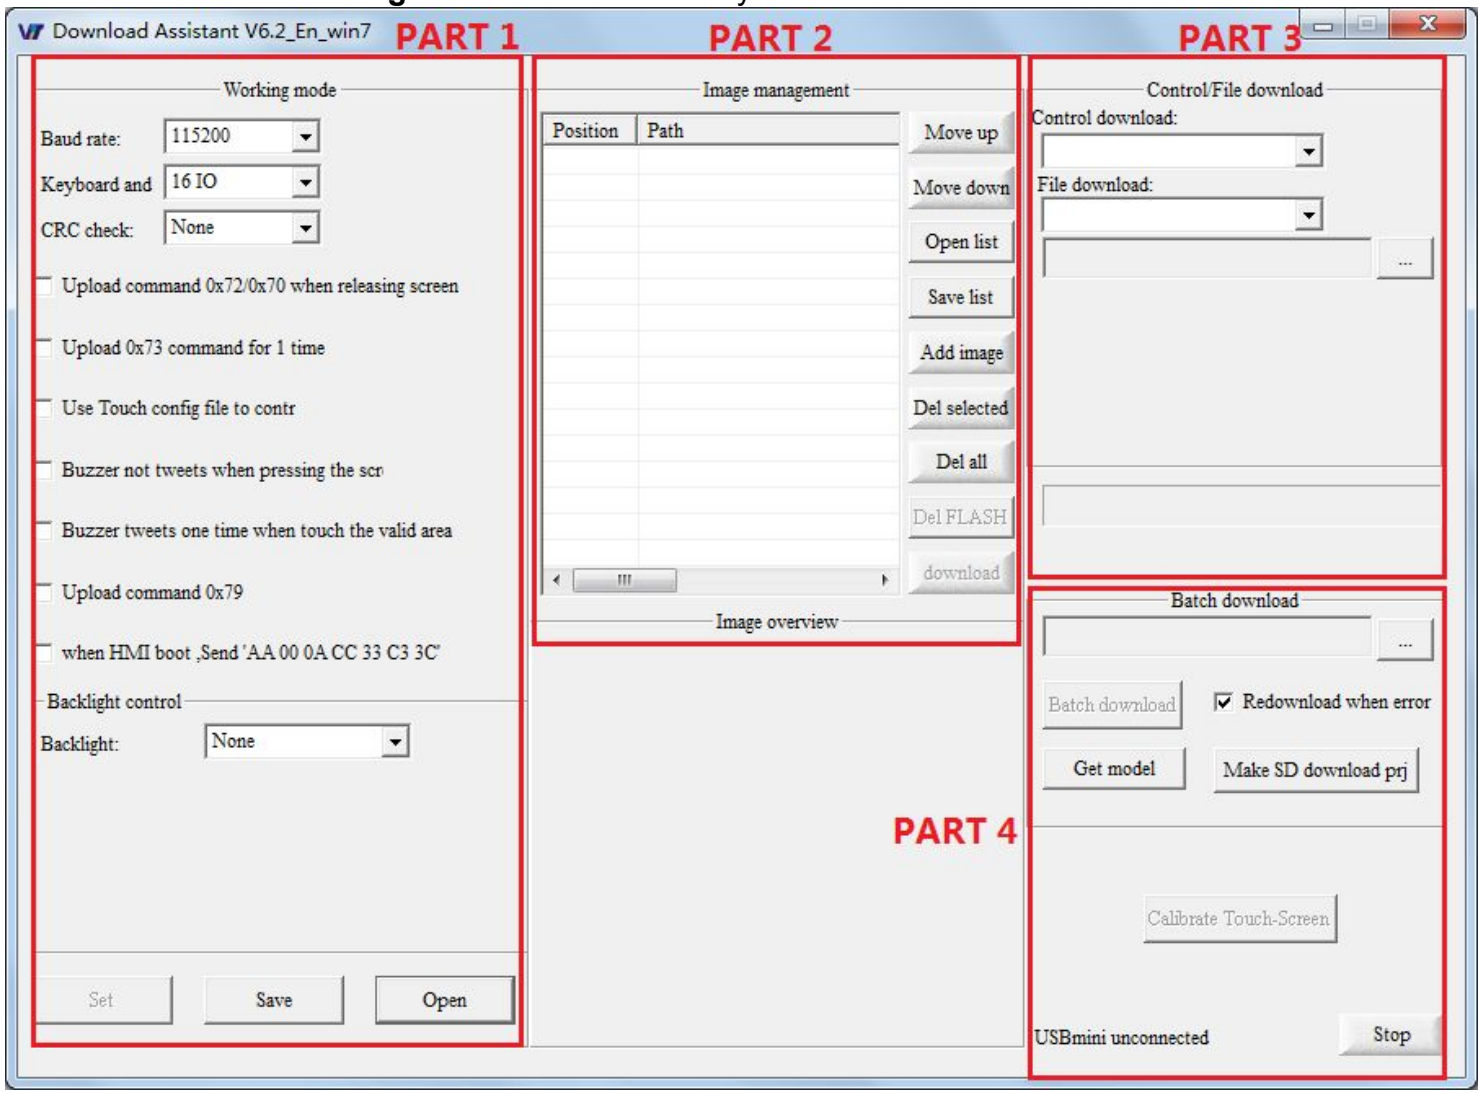

PART 1. Working Mode Setting

You could set the working mode of Touch function, Baud rate, Keyboard function, CRC function, Buzzer and Backlight.

Note: The working mode should be set through USBmini port.

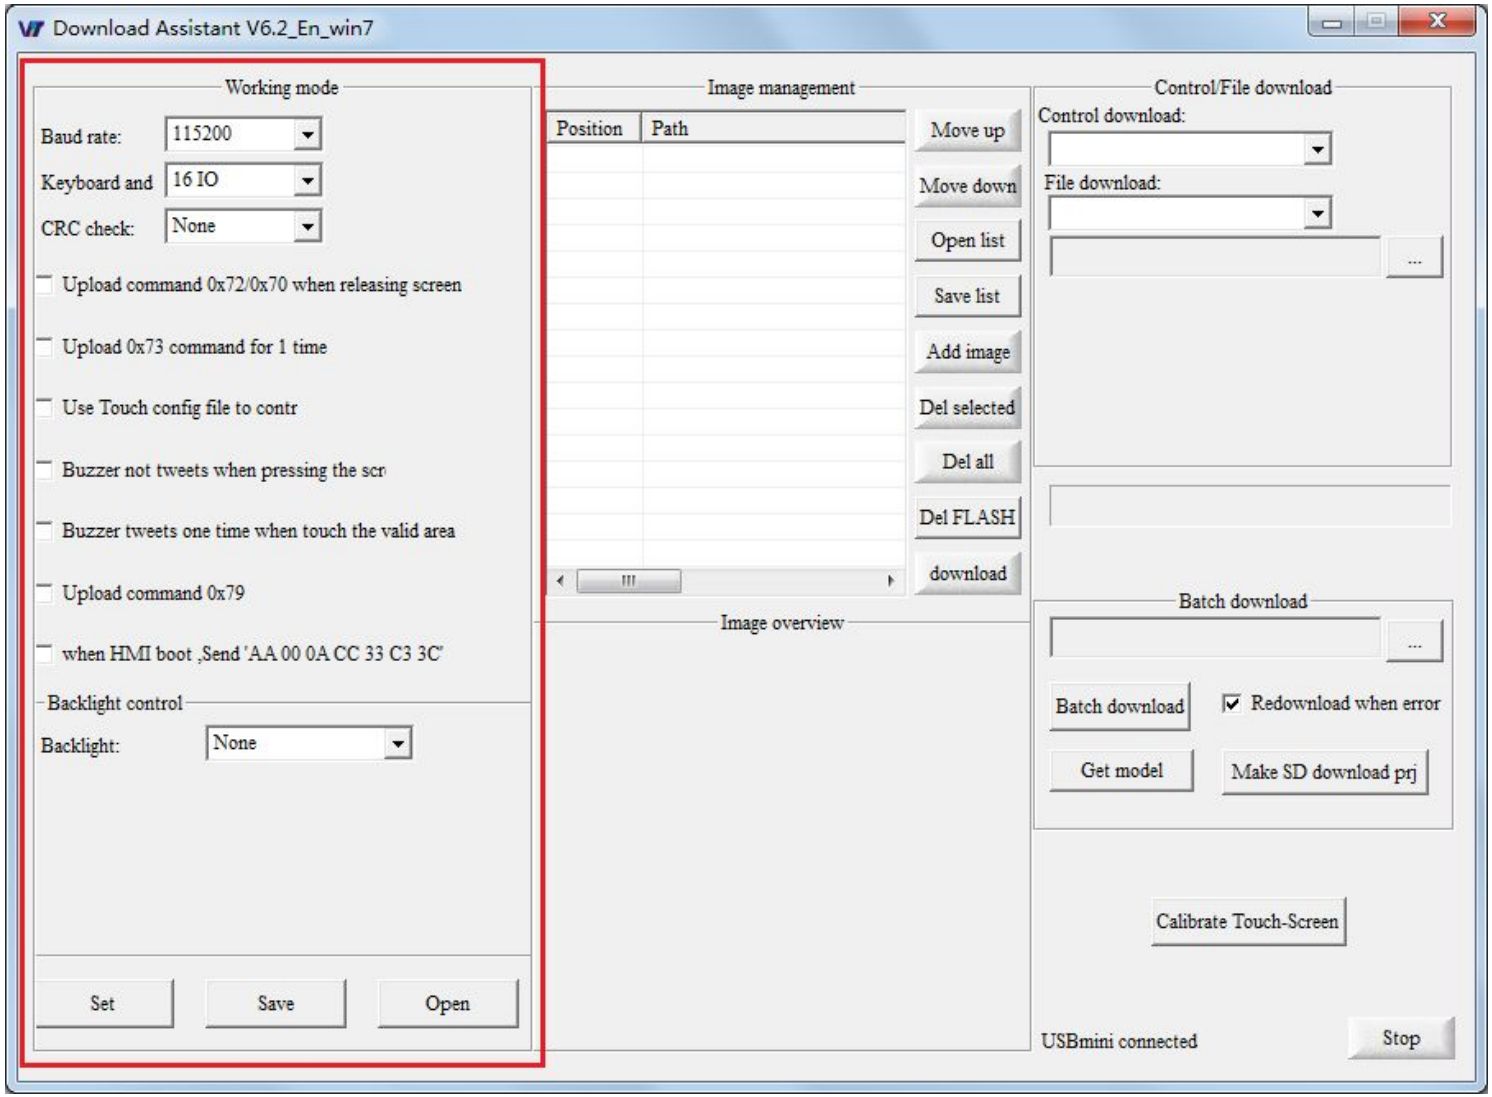

PART 2. Process of downloading image

1. Check whether it appears “USBmini connected”. (See 01 in the picture-04)

2. Image selection. (See 02,03 in the picture-04)

A. If you want to download a group of images, please choose “Yes”.

B. If you only want to download several images, please choose “No”.

Note: A. It is better to use “bmp” format image file.

B. The resolution of images should be same with the screen’s.

For example: 3.5” screen is 320x240, so the image must be 320x240.

3. Choose the image.

A. If you want to download a group of images, you only need to select the first image (Image-00), and then click the “Open” button. Finally, the images will be added from 00 to end automatically.

Note: Please name the sequence number of image firstly. (Like 00, 01, 02, 03 etc)


B. If you only want to download several images, please choose the images you want.

4. Please choose the storage position.


Note: The initial storage position is ‘00’. **(See 04 in the Picture-05)**

5. Click “Download” Button. (See 05 in the Picture-05)


Note: The images should be downloaded through the USBmini port.



Picture-04

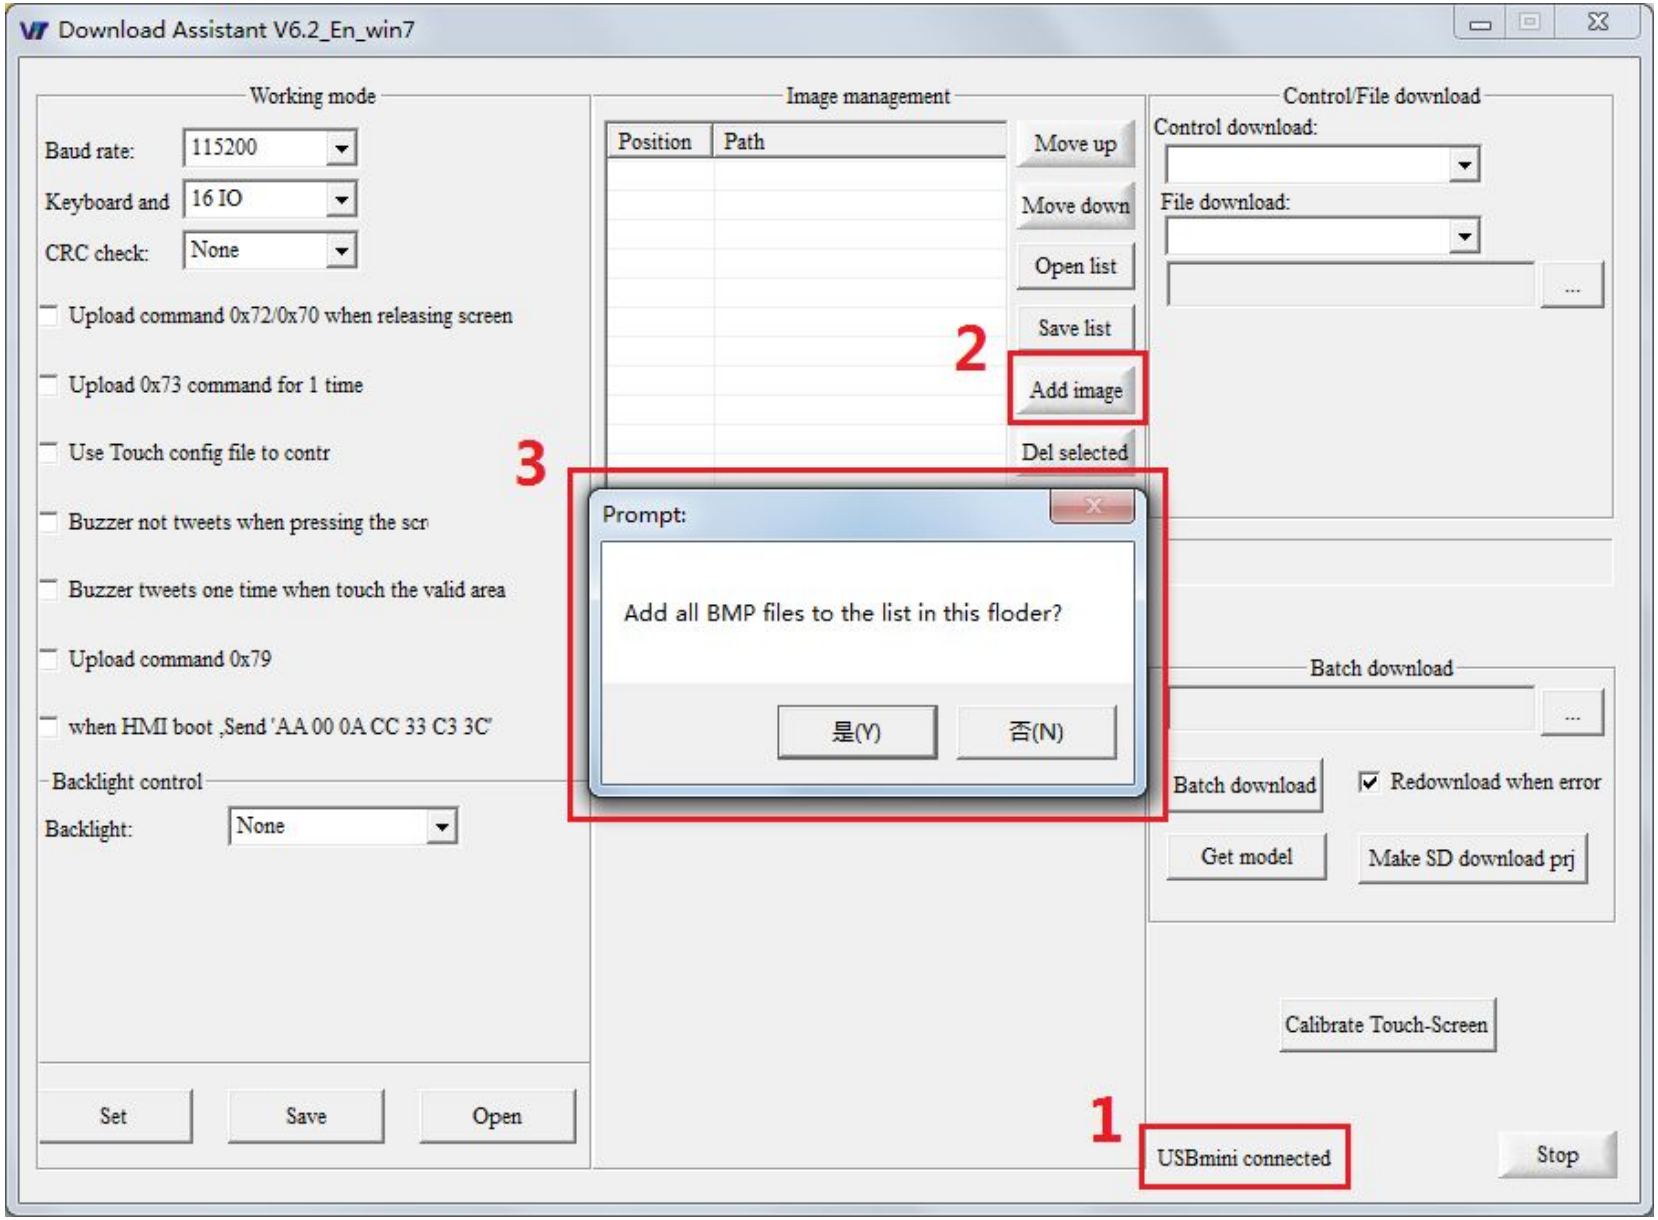
Download Assistant V6.2_En_win7
Working mode
Baud rate:
115200
Keyboard and
16 IO
CRC check:
None
Upload command 0x72/0x70 when releasing screen
Upload 0x73 command for 1 time
Use Touch config file to contr
Buzzer not tweets when pressing the scr
Buzzer tweets one time when touch the valid area
Upload command 0x79
when HMI boot ,Send 'AA 00 0A CC 33 C3 3C'
Backlight control
Backlight:
None
Set
Save
Open
Image management
Position
Path
Move up
Move down
Open list
Save list
Add image
Del selected
2
3
Prompt:
Add all BMP files to the list in this floder?
是(Y)
否(N)
Control/File download
Control download:
File download:
Batch download
Batch download
Redownload when error
Get model
Make SD download prj
Calibrate Touch-Screen
1
USBmini connected
Stop

Picture-05

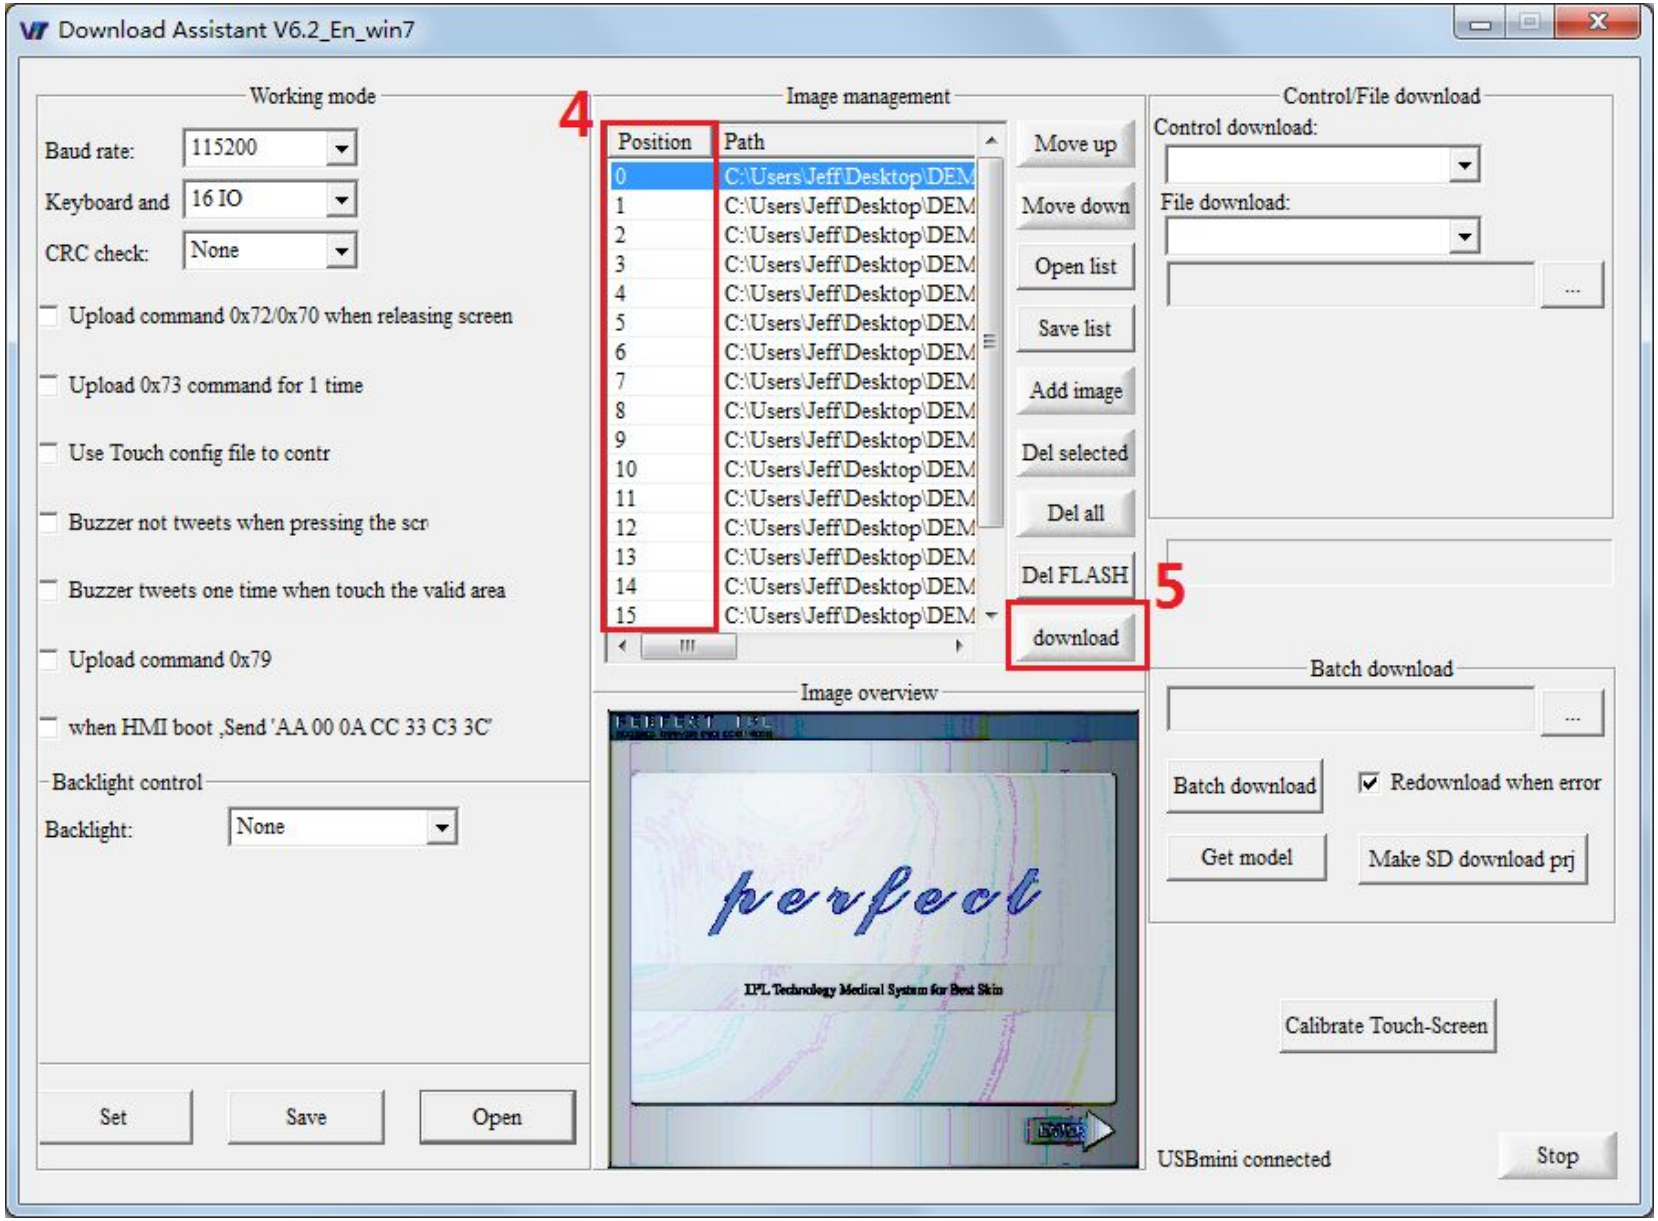
Download Assistant V6.2_En_win7
Working mode
Baud rate: 115200
Keyboard and 16 IO
CRC check: None
Upload command 0x72/0x70 when releasing screen
Upload 0x73 command for 1 time
Use Touch config file to contr
Buzzer not tweets when pressing the scr
Buzzer tweets one time when touch the valid area
Upload command 0x79
when HMI boot ,Send 'AA 00 0A CC 33 C3 3C'
Backlight control
Backlight: None
Set
Save
Open
4
Image management
Position
Path
0 C:\Users\Jeff\Desktop\DEM
1 C:\Users\Jeff\Desktop\DEM
2 C:\Users\Jeff\Desktop\DEM
3 C:\Users\Jeff\Desktop\DEM
4 C:\Users\Jeff\Desktop\DEM
5 C:\Users\Jeff\Desktop\DEM
6 C:\Users\Jeff\Desktop\DEM
7 C:\Users\Jeff\Desktop\DEM
8 C:\Users\Jeff\Desktop\DEM
9 C:\Users\Jeff\Desktop\DEM
10 C:\Users\Jeff\Desktop\DEM
11 C:\Users\Jeff\Desktop\DEM
12 C:\Users\Jeff\Desktop\DEM
13 C:\Users\Jeff\Desktop\DEM
14 C:\Users\Jeff\Desktop\DEM
15 C:\Users\Jeff\Desktop\DEM
Move up
Move down
Open list
Save list
Add image
Del selected
Del all
Del FLASH
download
Image overview
perfect
IPL Technology Medical System for Best Skin
Control/File download
Control download:
File download:
...
5
Batch download
...
Batch download
Redownload when error
Get model
Make SD download prj
Calibrate Touch-Screen
USBmini connected
Stop

6. How to adjust the resolution of the image?


It's quite easy, the drawing software of Windows can just help.

1. Choose "Image" option, and Select "Tension/Twist" option.

2. Set the percentage in Horizontal & Vertical.


For example: if the original image is 800x600, multiply 80%, the image will change to 640x480.

3. Click "OK" button.

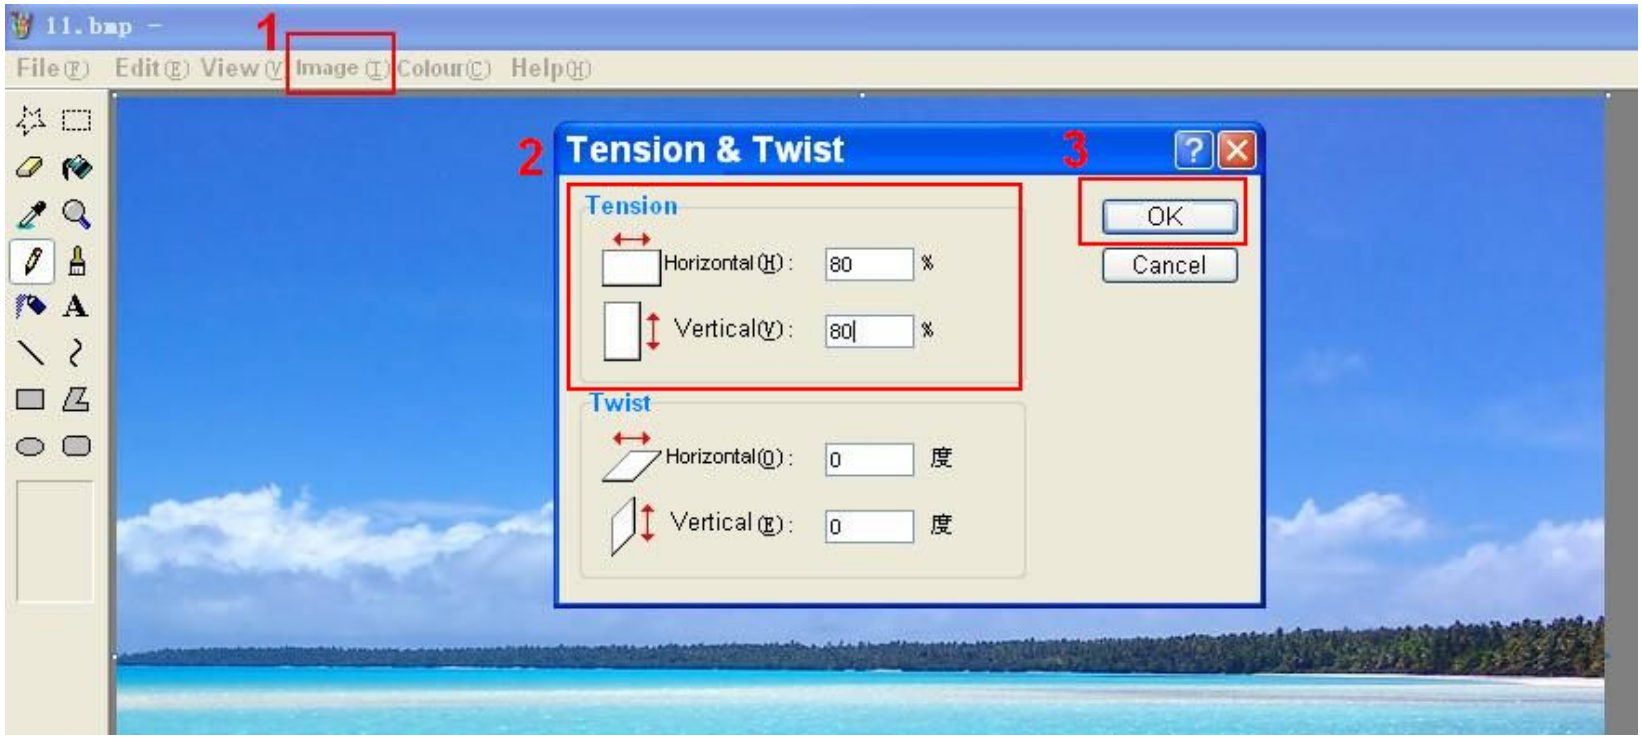

PART 3. Process of downloading application files

1. Select the “Download Icon File”, “Download Touch-control File”, “Download Custom Font” option.
2. Choose the Icon file(.txt), Touch file(.txt), Font file(.dzk).
3. Click “Download” Button. Note: The application files should be downloaded through the USBmini port.

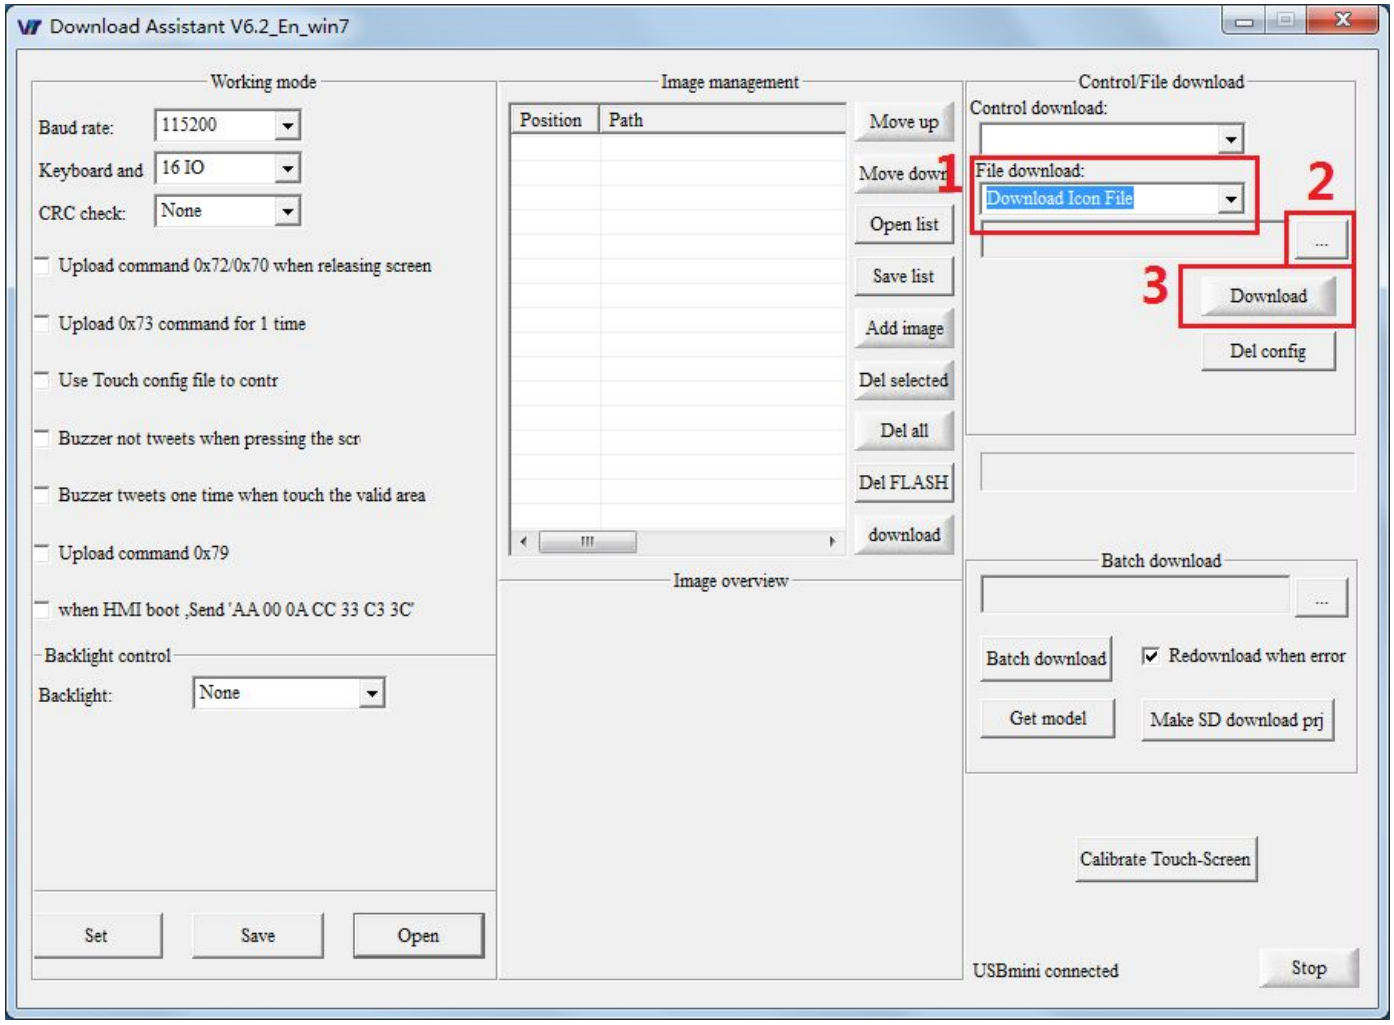

PART 4. SD card Downloading

Note: a. The Batch downloading are suitable for batch production.
b. The example file in the folder of Batch Downloading Project should be deleted before you copy your application files into the folders.
c. All the folder name and file name in Batch Downloading Project can't be changed.
d. The SD card should be less than or equal to 2GB.

Process


1. Copy all files into different folder of the Batch Downloading Project according to their categories

Such as: 1. Images and List File are saved into "Image File" folder.
Note: The image should be ".bmp" format file, and its resolutions should be same with the screen's.
The List File created by touch-control software must be necessary.
2. Touch file is saved into "Touch Control Configuration File" folder
3. Icon file is saved into "Icon Configuration File" folder
4. Font file is saved into "Custom Font Library" folder
Note: The storage position of font file can be set in the file name.
For example: **00-**Arial_12_24.dzk
5. Working mode 0xE0 command is defined in Custom Instruction file.


2. Open Download Software and Create the SD batch downloading file.

1. Choose the "Batch download" Button. **(See 01 in the Picture-09)**
2. Select the "Batch download project" folder where you save the files. **(See 02 in the Picture-09)**
3. Click "YES" button. **(See 03 in the Picture-09)**
4. Click "Make SD project" button. **(See 04 in the Picture-09)**
5. Testing. If clicking "Batch Download" button, all of files in "Batch download project" can be downloaded into memory through the mini USB directly, So it can test whether the batch downloading file works well. **(See 05 in the Picture-09)**

Picture-09

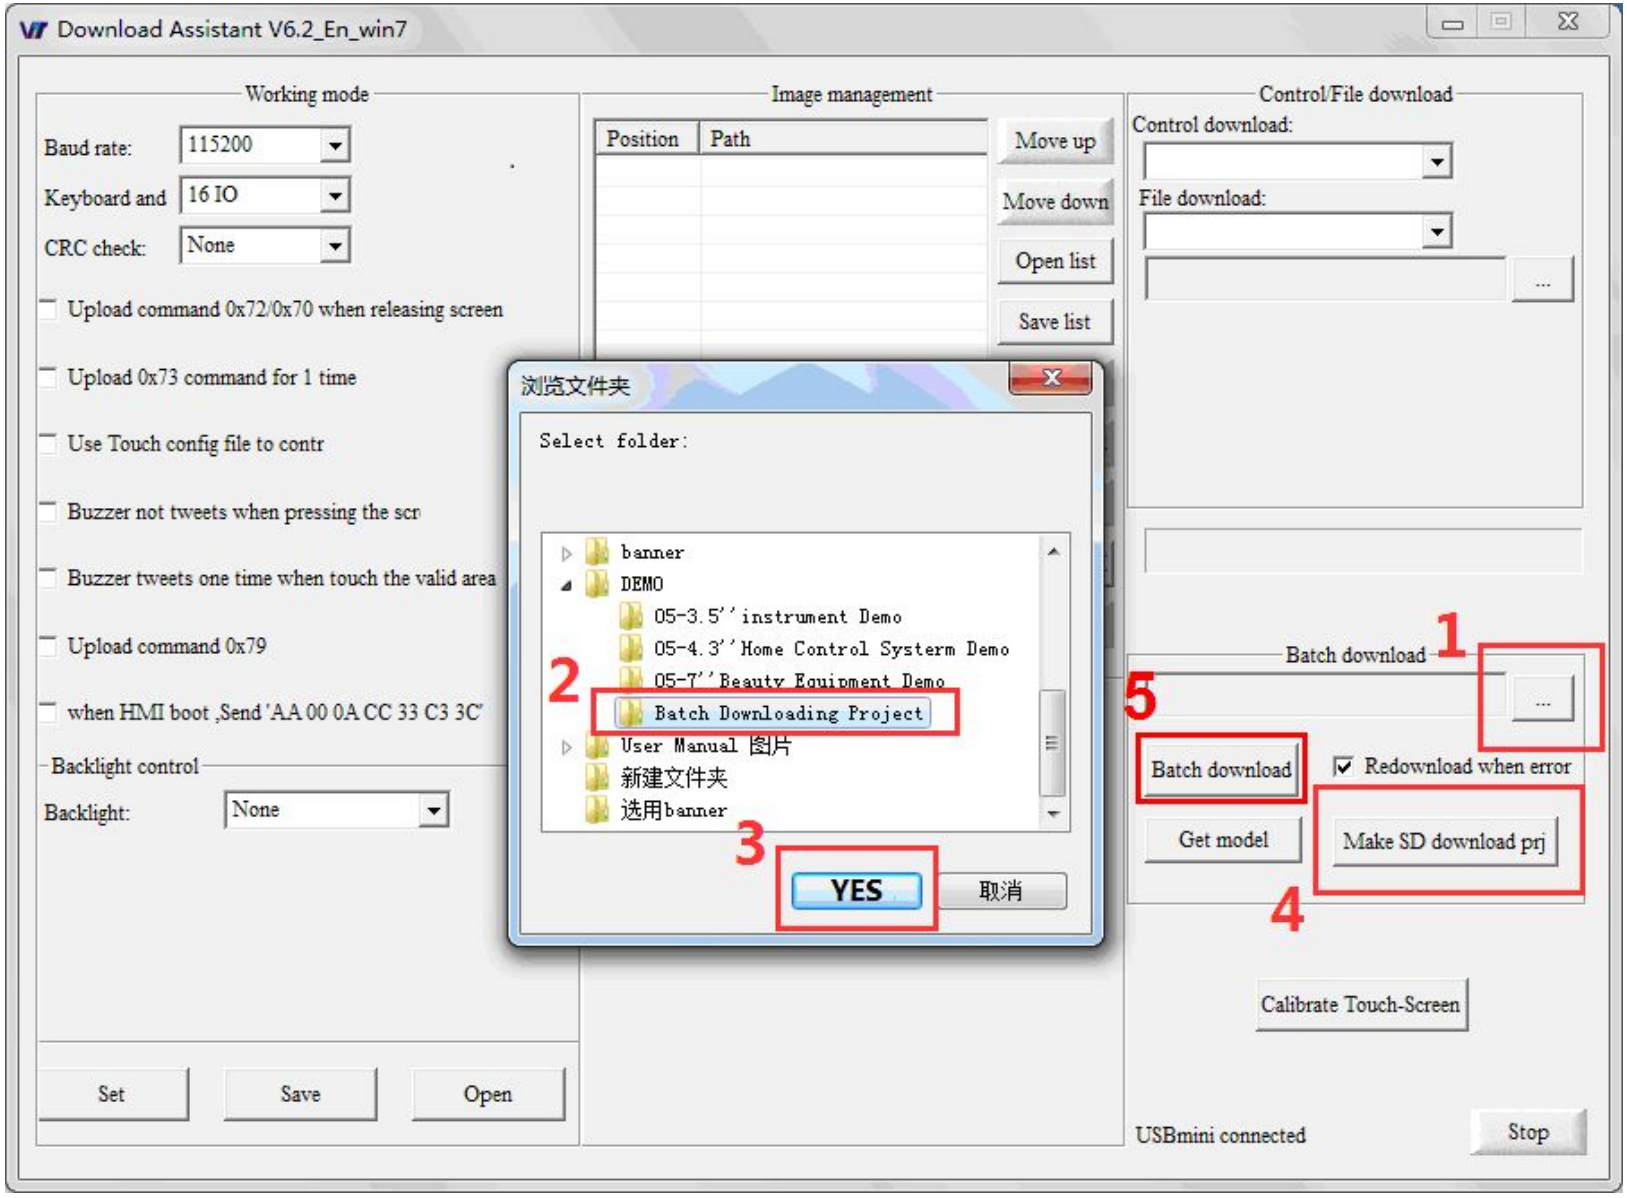
Download Assistant V6.2_En_win7
Working mode
Baud rate: 115200
Keyboard and 16 IO
CRC check: None
Upload command 0x72/0x70 when releasing screen
Upload 0x73 command for 1 time
Use Touch config file to contr
Buzzer not tweets when pressing the scr
Buzzer tweets one time when touch the valid area
Upload command 0x79
when HMI boot ,Send 'AA 00 0A CC 33 C3 3C'
Backlight control
Backlight: None
Set
Save
Open
Image management
Position
Path
Move up
Move down
Open list
Save list
浏览文件夹
Select folder:
banner
DEMO
05-3.5''instrument Demo
05-4.3''Home Control Systerm Demo
05-7''Beauty Equipment Demo
Batch Downloading Project
User Manual 图片
新建文件夹
选用banner
YES
取消
2
3
Control/File download
Control download:
File download:
Batch download
1
5
Batch download
Redownload when error
Get model
Make SD download prj
4
Calibrate Touch-Screen
USBmini connected
Stop

3. Then the software will create a “VIEWTECH” folder in “Batch Downloading Project”, Please find it.
4. Only Copy the “VIEWTECH” folder into TF card.
5. Plug the SD card on PCB and don’t plug the power. Like the picture below.
6. Plug the power supply, then all files will be stored automatically into the memory one by one.
   After finishing, the screen will show the first image.

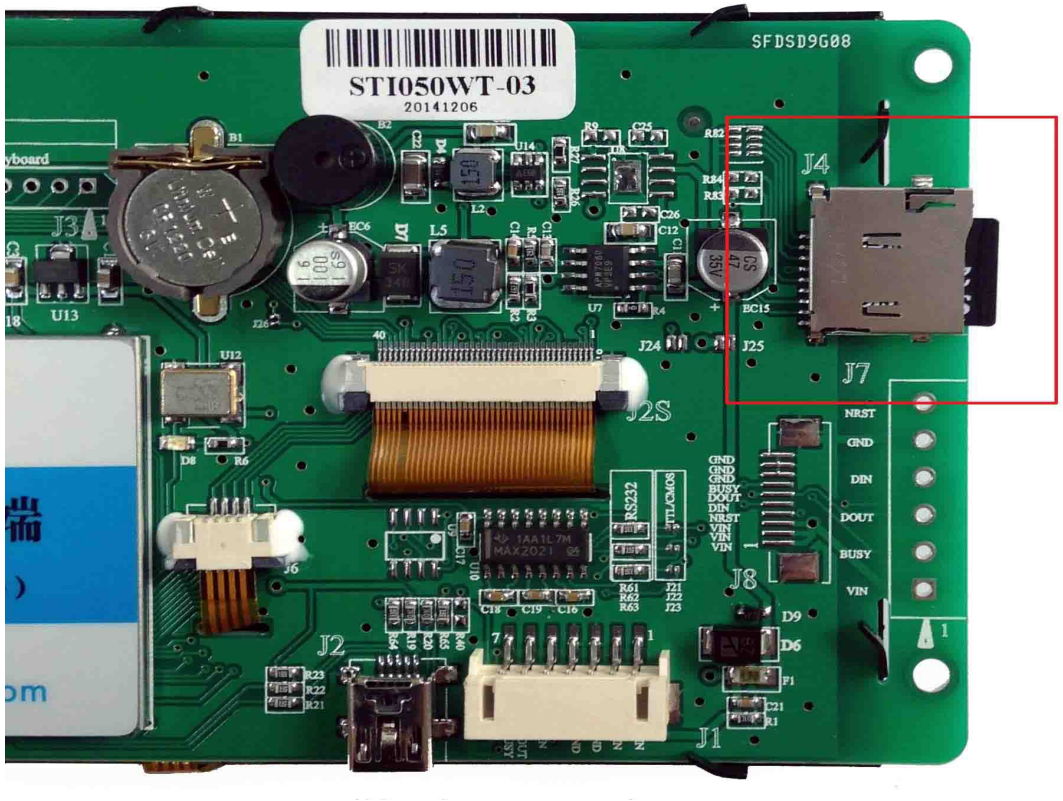

Should you have any technical questions, please feel free to contact us.