

NumberOfPositions attribute, see [Section 1.13.10, “Multi Position Details”](#).

1.13.7.1. Switches with long-press detection support (MSL feature flag set)

This switch (with feature flags MS & MSL both set) SHALL generate either a sequence of two or three (depending on how long the switch is pressed) events for one interaction cycle, in the order given below and illustrated in the figure below.

- Upon a short press:
 - Generate InitialPress
 - If the MSR feature flag is set and the AS feature flag is NOT set, generate ShortRelease after the previous event, when release is detected.
 - If the MSM feature flag is set, generate MultiPressComplete(1) after the previous event(s).
- Upon a long press (or very long press):
 - Generate InitialPress
 - Generate LongPress after the previous event, when long press is detected
 - Generate LongRelease (and NOT MultiPressComplete(1)) after the previous event, when switch release is detected.

A LongPress event SHALL be generated exactly once for this case and SHALL NOT be repeated, irrespective how long the switch is pressed.

The image shows a time representation of the state of the switch (low=not pressed, high=pressed) with the colored dots indicating the various events generated at that moment in time.

Long presses, feature flags: MS & MSL

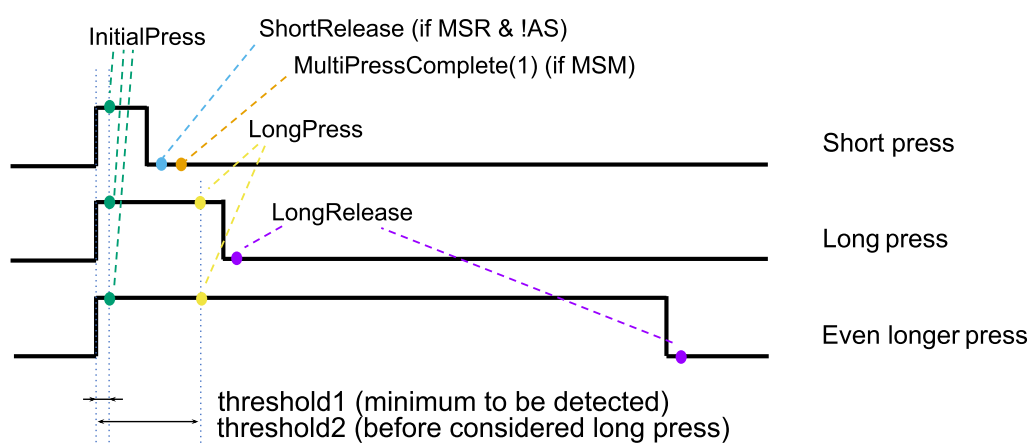


Figure 3. Switch device with MSL feature flag set (single press case)