

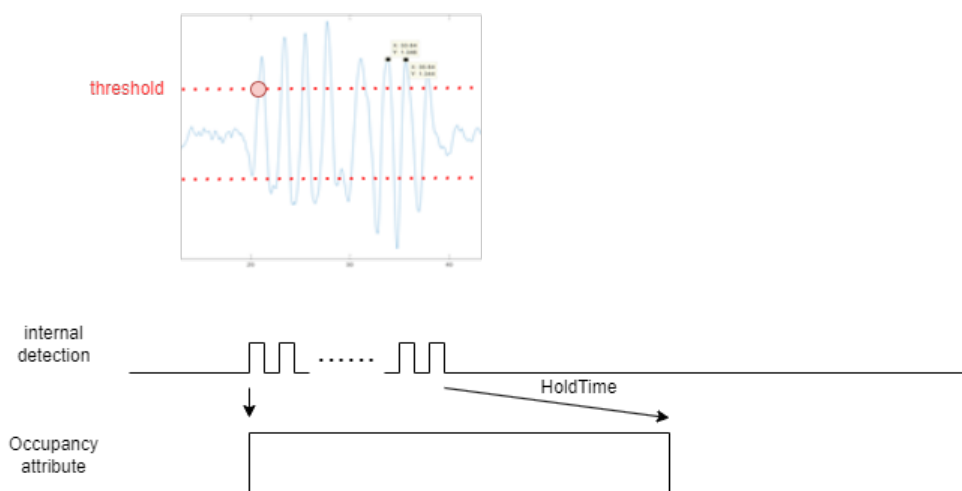
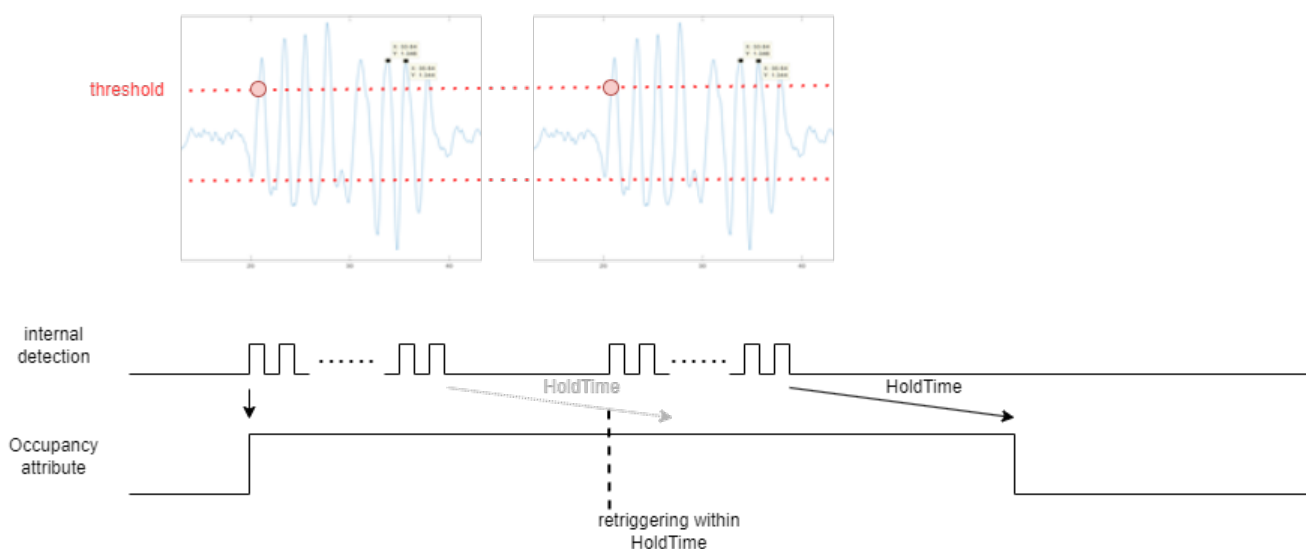
single trigger case*multiple trigger case*

Figure 13. Processing of PIR signal towards Occupancy attribute using HoldTime

2.7.6.4. HoldTimeLimits Attribute

This attribute SHALL indicate the server's limits, and default value, for the HoldTime attribute.

2.7.6.5. Attributes to support legacy implementations

The following 3 sets of 3 attributes each were used in ClusterRevision ≤ 4 to indicate timings and conditions to tune the reporting by the sensor - separately for each of the three sensor modalities defined in that revision. In ClusterRevision ≥ 5 , these are replaced by the HoldTime attribute (shared for all modalities). A server with ClusterRevision ≥ 5 MAY (under the conformance conditions stated in the attributes table above) provide these attributes for backward compatibility with clients implementing a cluster revision ≤ 4 . When doing so, the provided values for these legacy *OccupiedToUnoccupied attributes SHALL follow the values in the HoldTime attribute when updated, and vice-versa, such that any present *OccupiedToUnoccupiedDelay attribute maintains equality to HoldTime.