

AGNEXT



SENSENEXT

Temperature Monitoring Solution



Wireless sensor nodes

Temperature range	Minus 55 to positive 125
Relative humidity	0 to 100 % RH
Probe	Temperature & RH inbuilt. Extra slot for external temperature probe
Battery	Non-rechargeable batteries with life of 1 year with sample frequency of 1
Certification	STQC calibrated
Display	On Mobile App
Communication	WiFi
Memory backup	Storage on Cloud server free for 3 months
Operating temperature range	Ambient temperature
Operating Relative humidity range	Ambient humidity





Gateway

Communication	SIM network
Power	240V
Probe	External temperature and RH probe in case only 1 sensor is required at one location
Power back-up	3 hours when catering to multiple device, 1 month when operating standalone. Data frequency of 1 minute
Controller	ON/OFF controller
Frequency	50Hz
Communication Interface	NA
Control Output	NA. A separate control module can be provided to take corrective actions
Operating temperature range	Ambient temperature
Operating Relative humidity range	Ambient humidity






Android application features

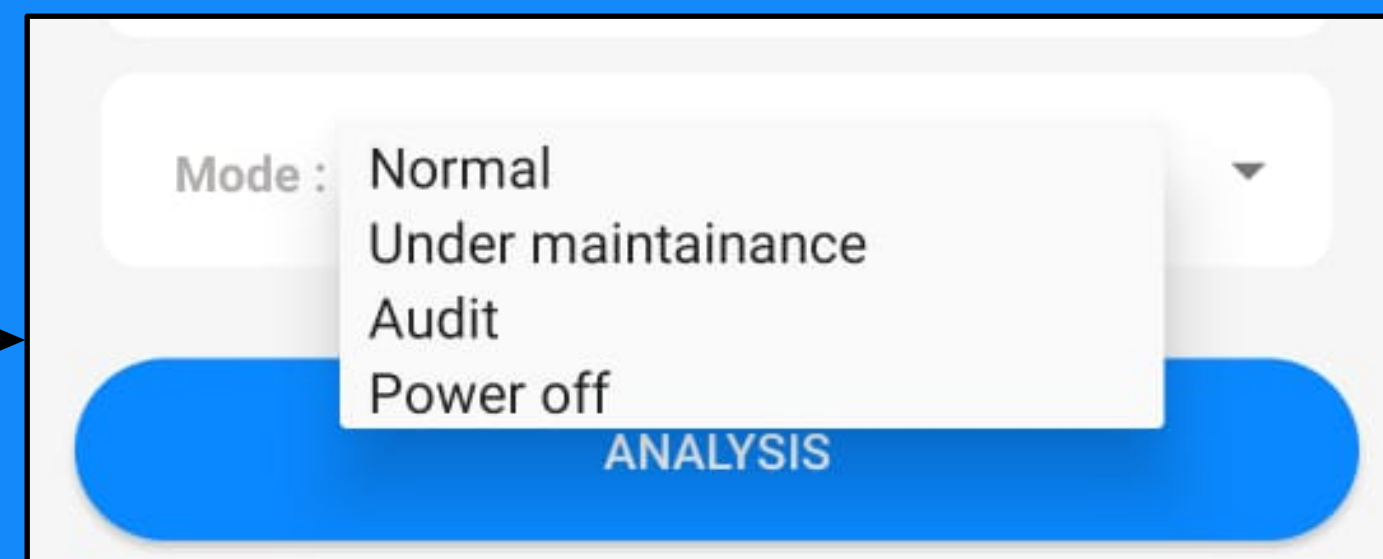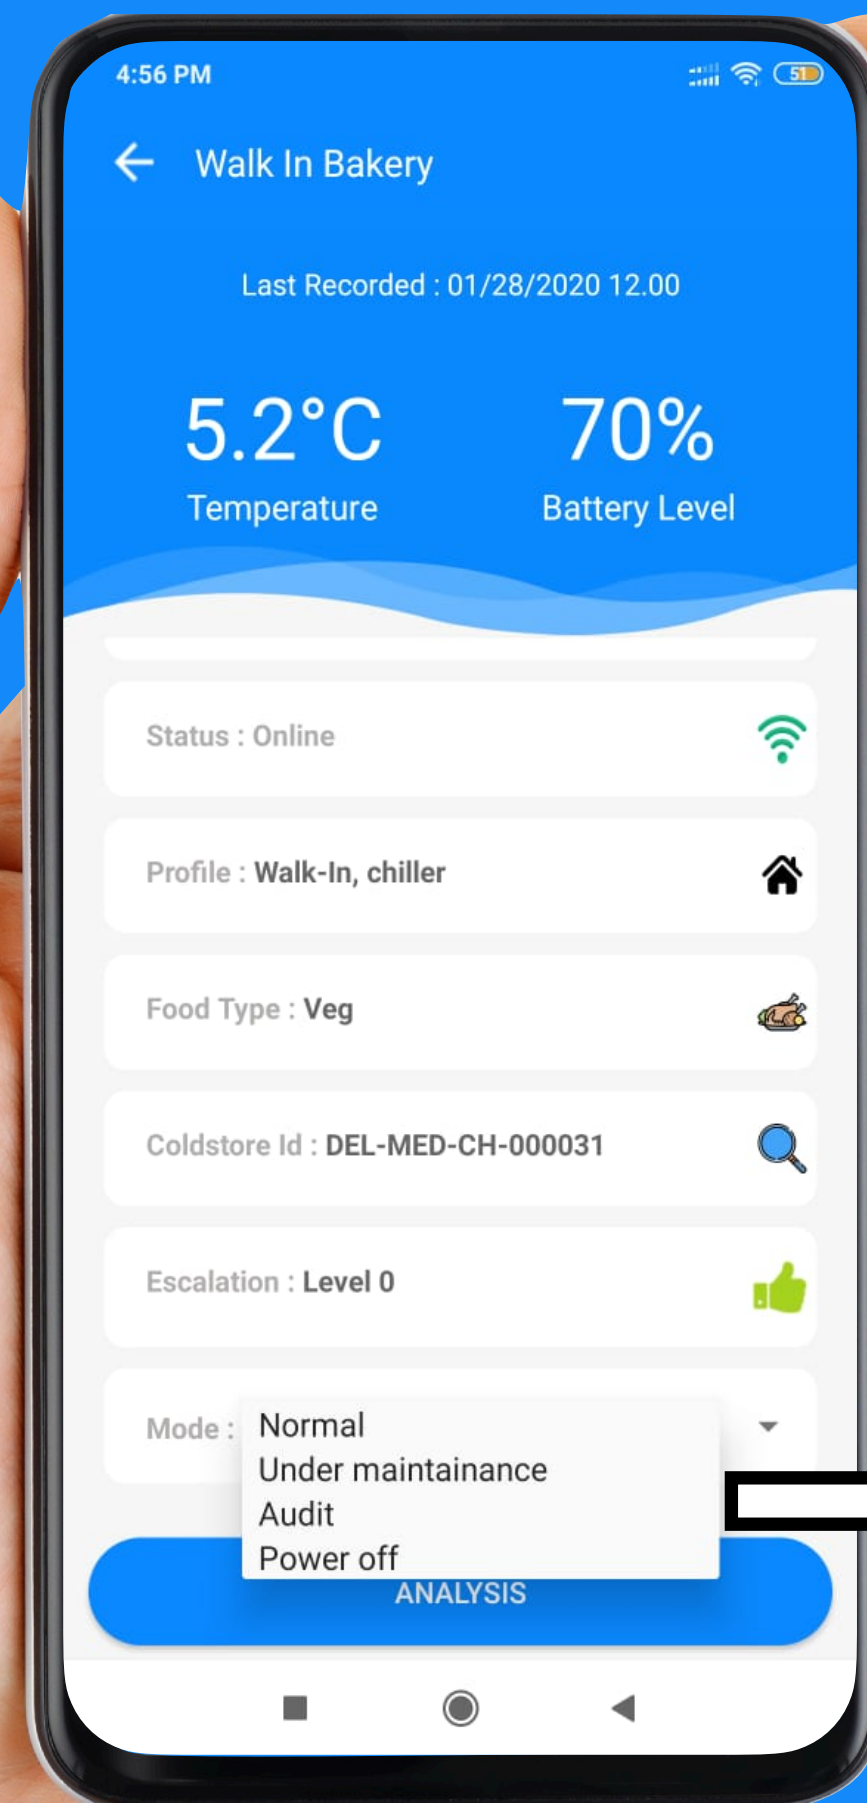


1. **Four different modes added in operator app based on feedback and observations**
2. **In all conditions except “Normal”, user does not receive unnecessary alerts and mails**
3. **No need of turning off the SenseNext device**
4. **Data not lost, allows management to see the reason for escalation in the web dashboard**

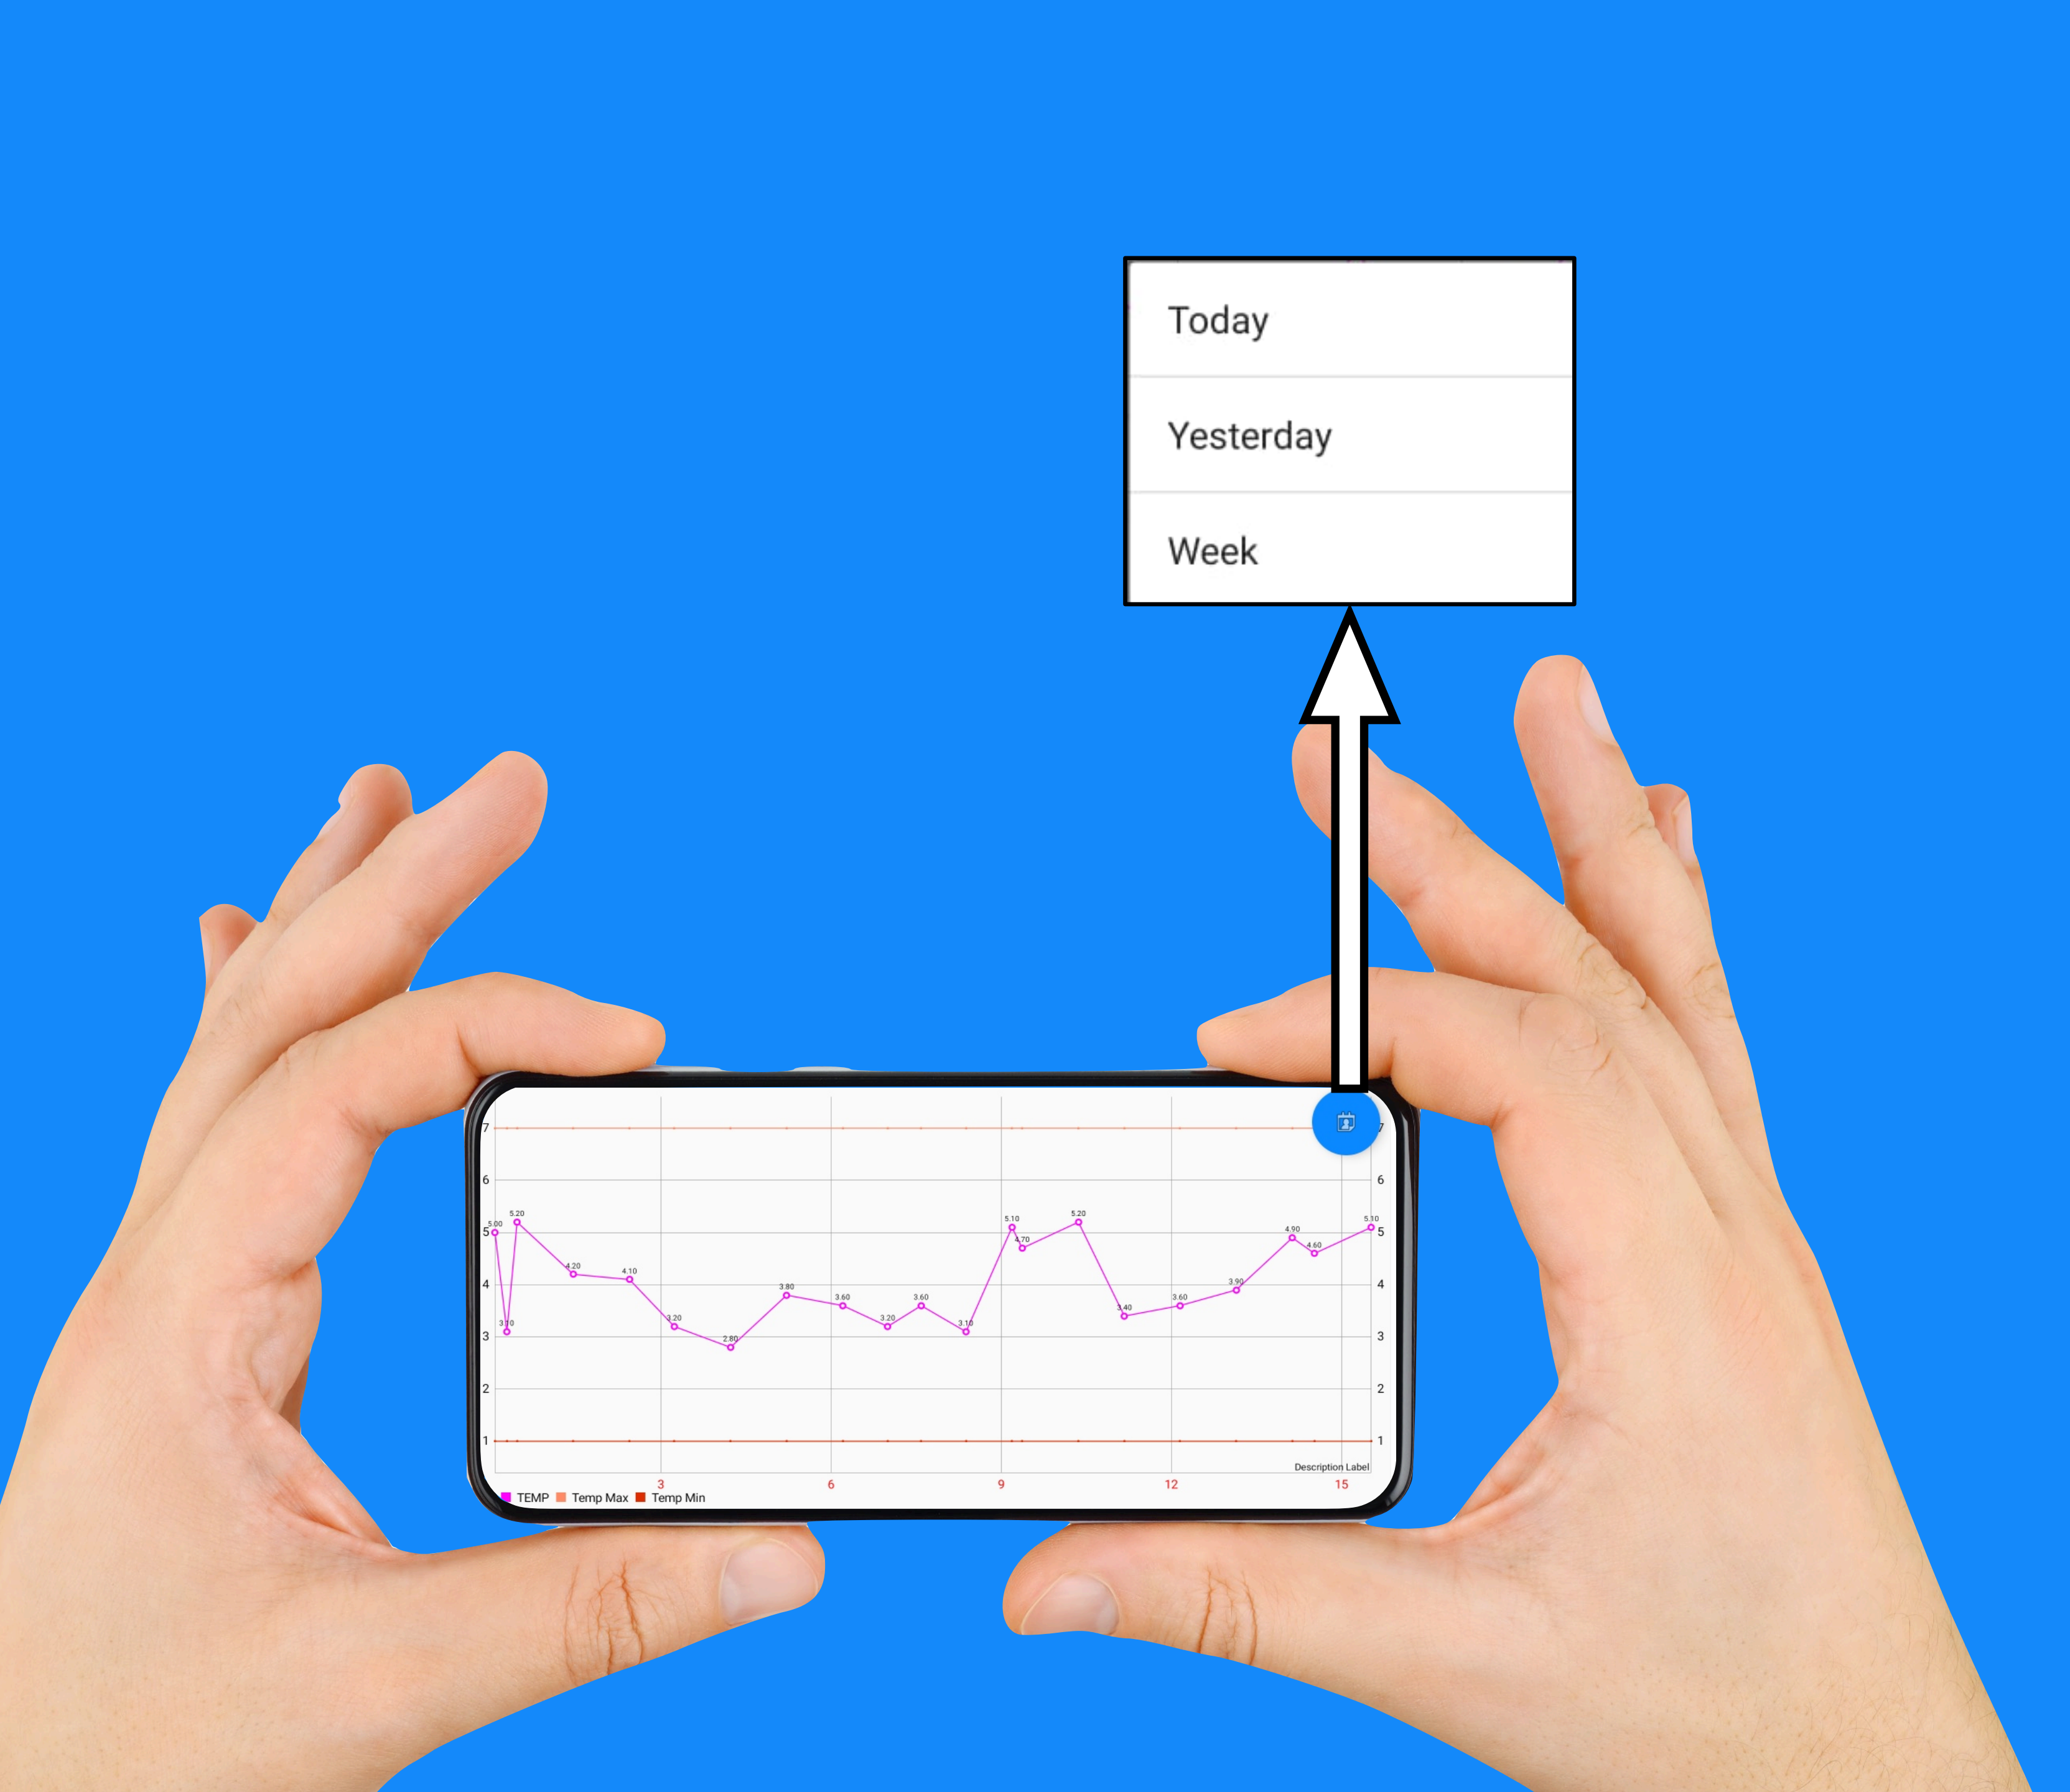

Analysis of temperature

Operators at the sites can see data upto a week.

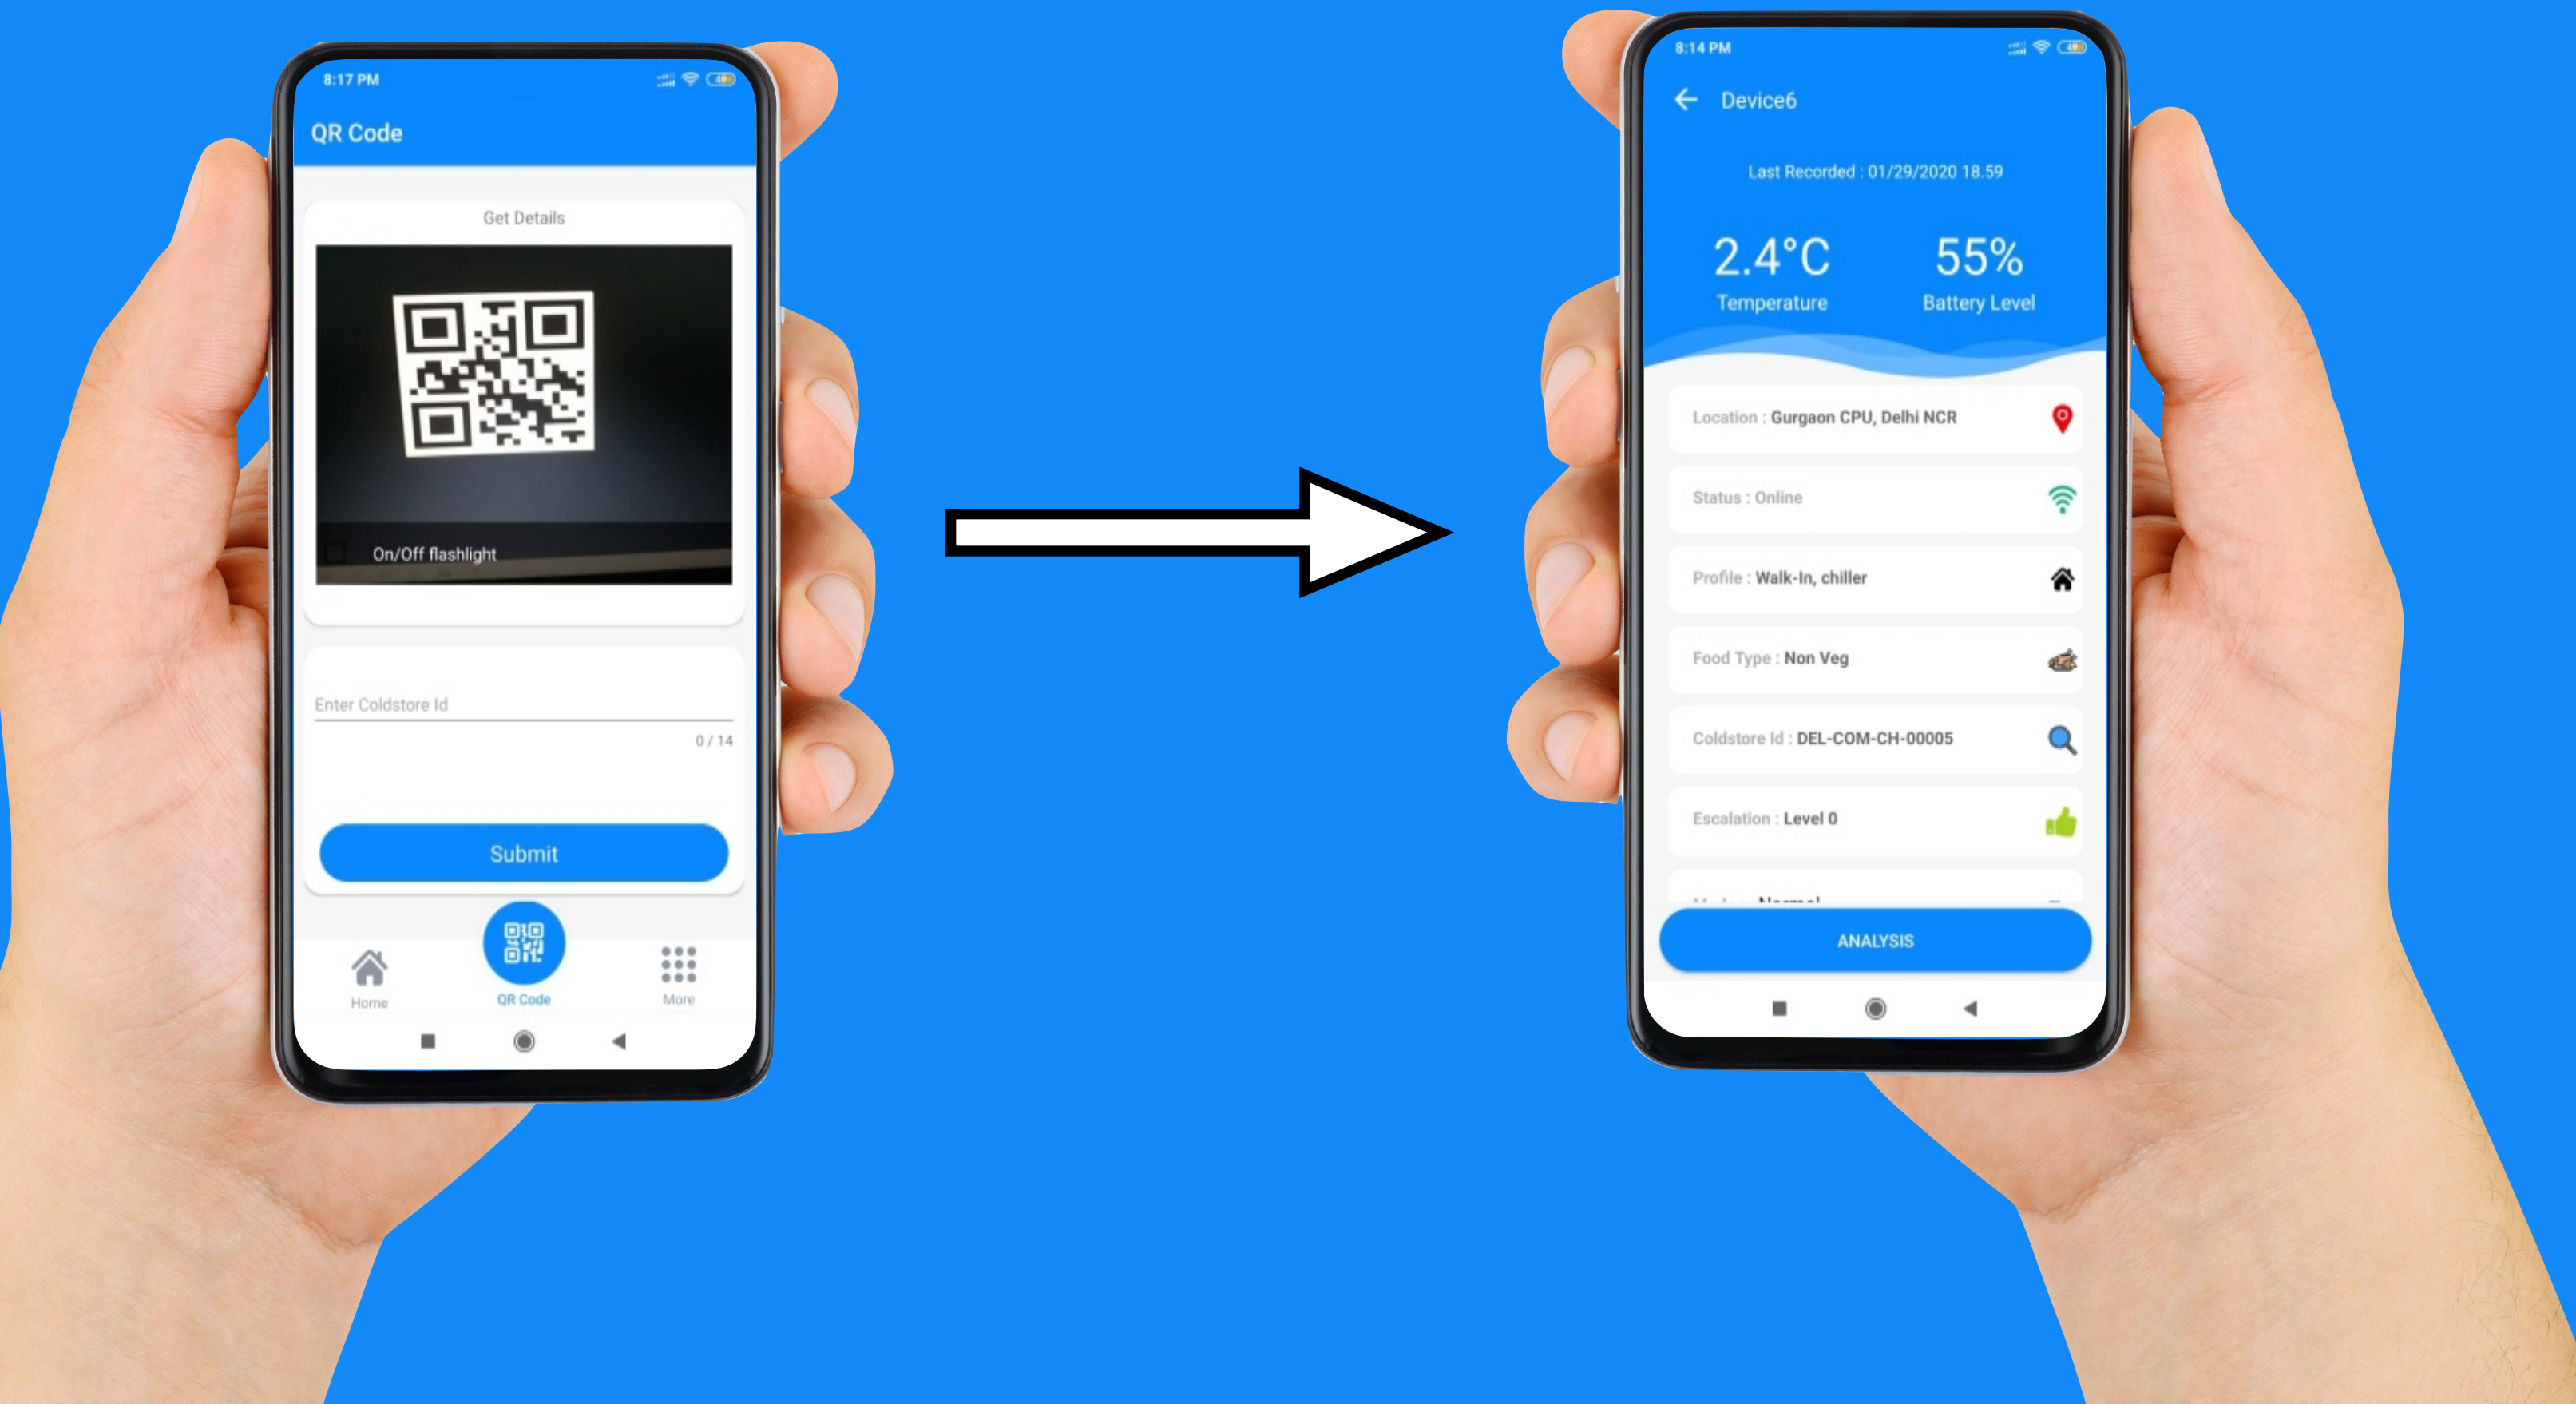


QR code scan

Any official/ operator having the android app in his phone can instantly view the details by QR code scanner




Features and benefits of Web Dashboard

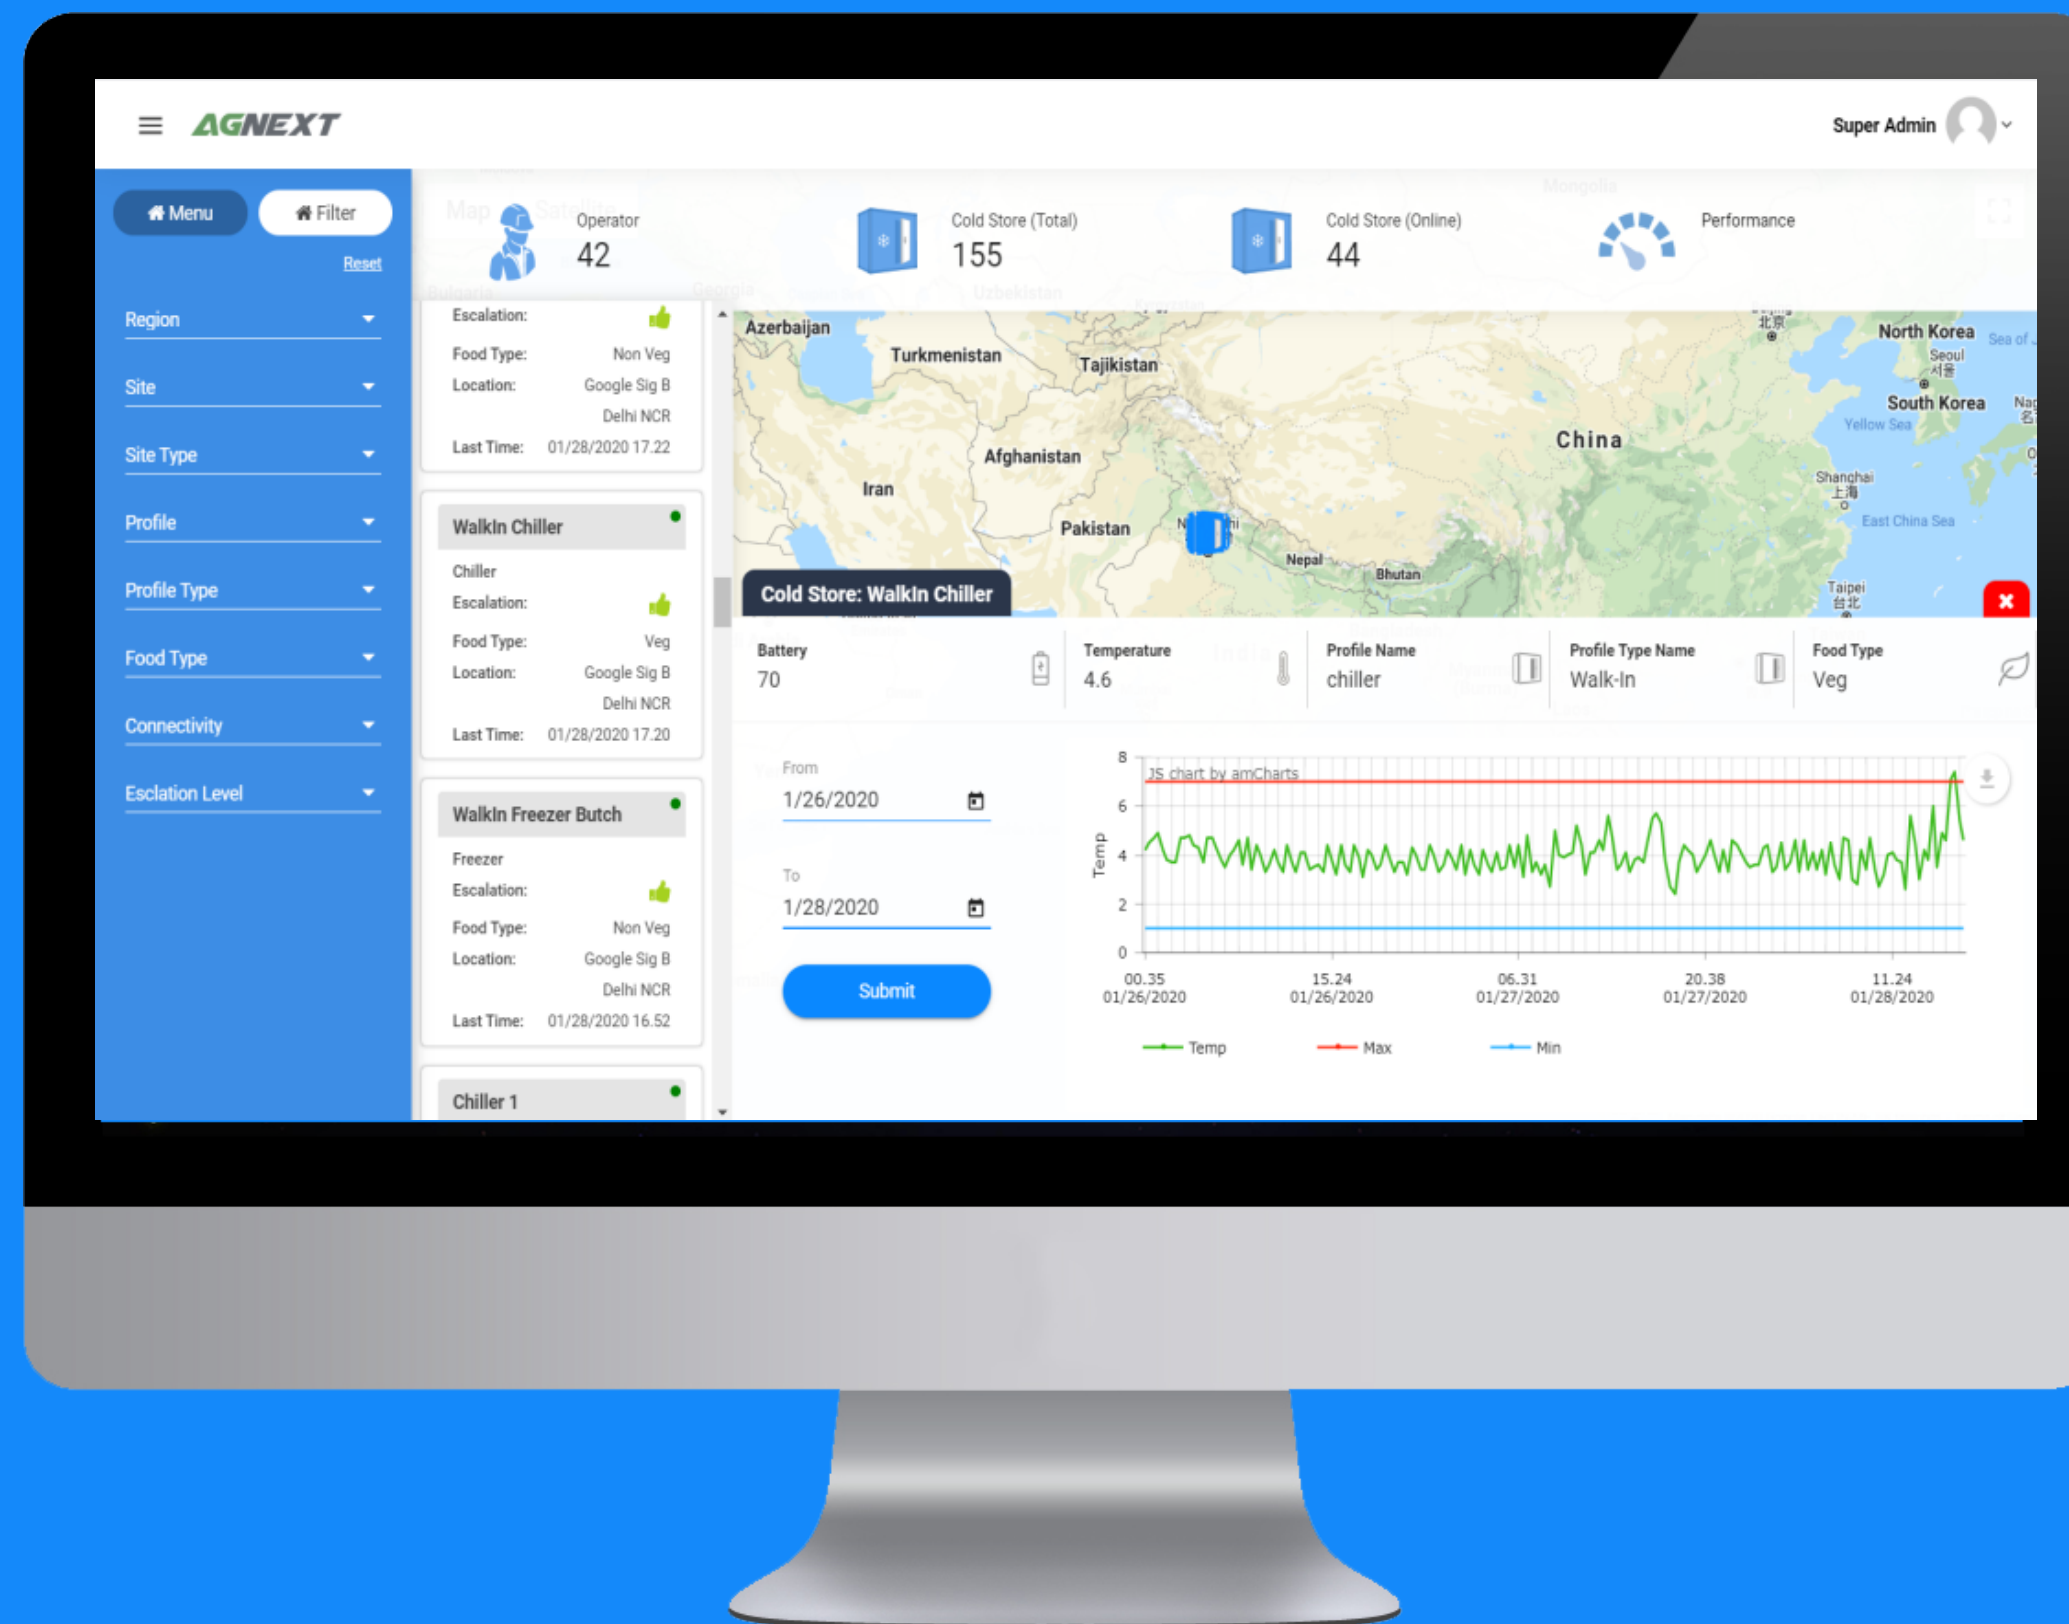

Map view

1. Visualization of all chillers and freezers on the map
2. Number of online devices
3. Details available on clicking any icon
4. Instant analysis of chillers and freezers through graphs
5. Different types of filters based on geography, food type, chiller/freezer type, profile type like walk in, 2 door, 4 door, chest

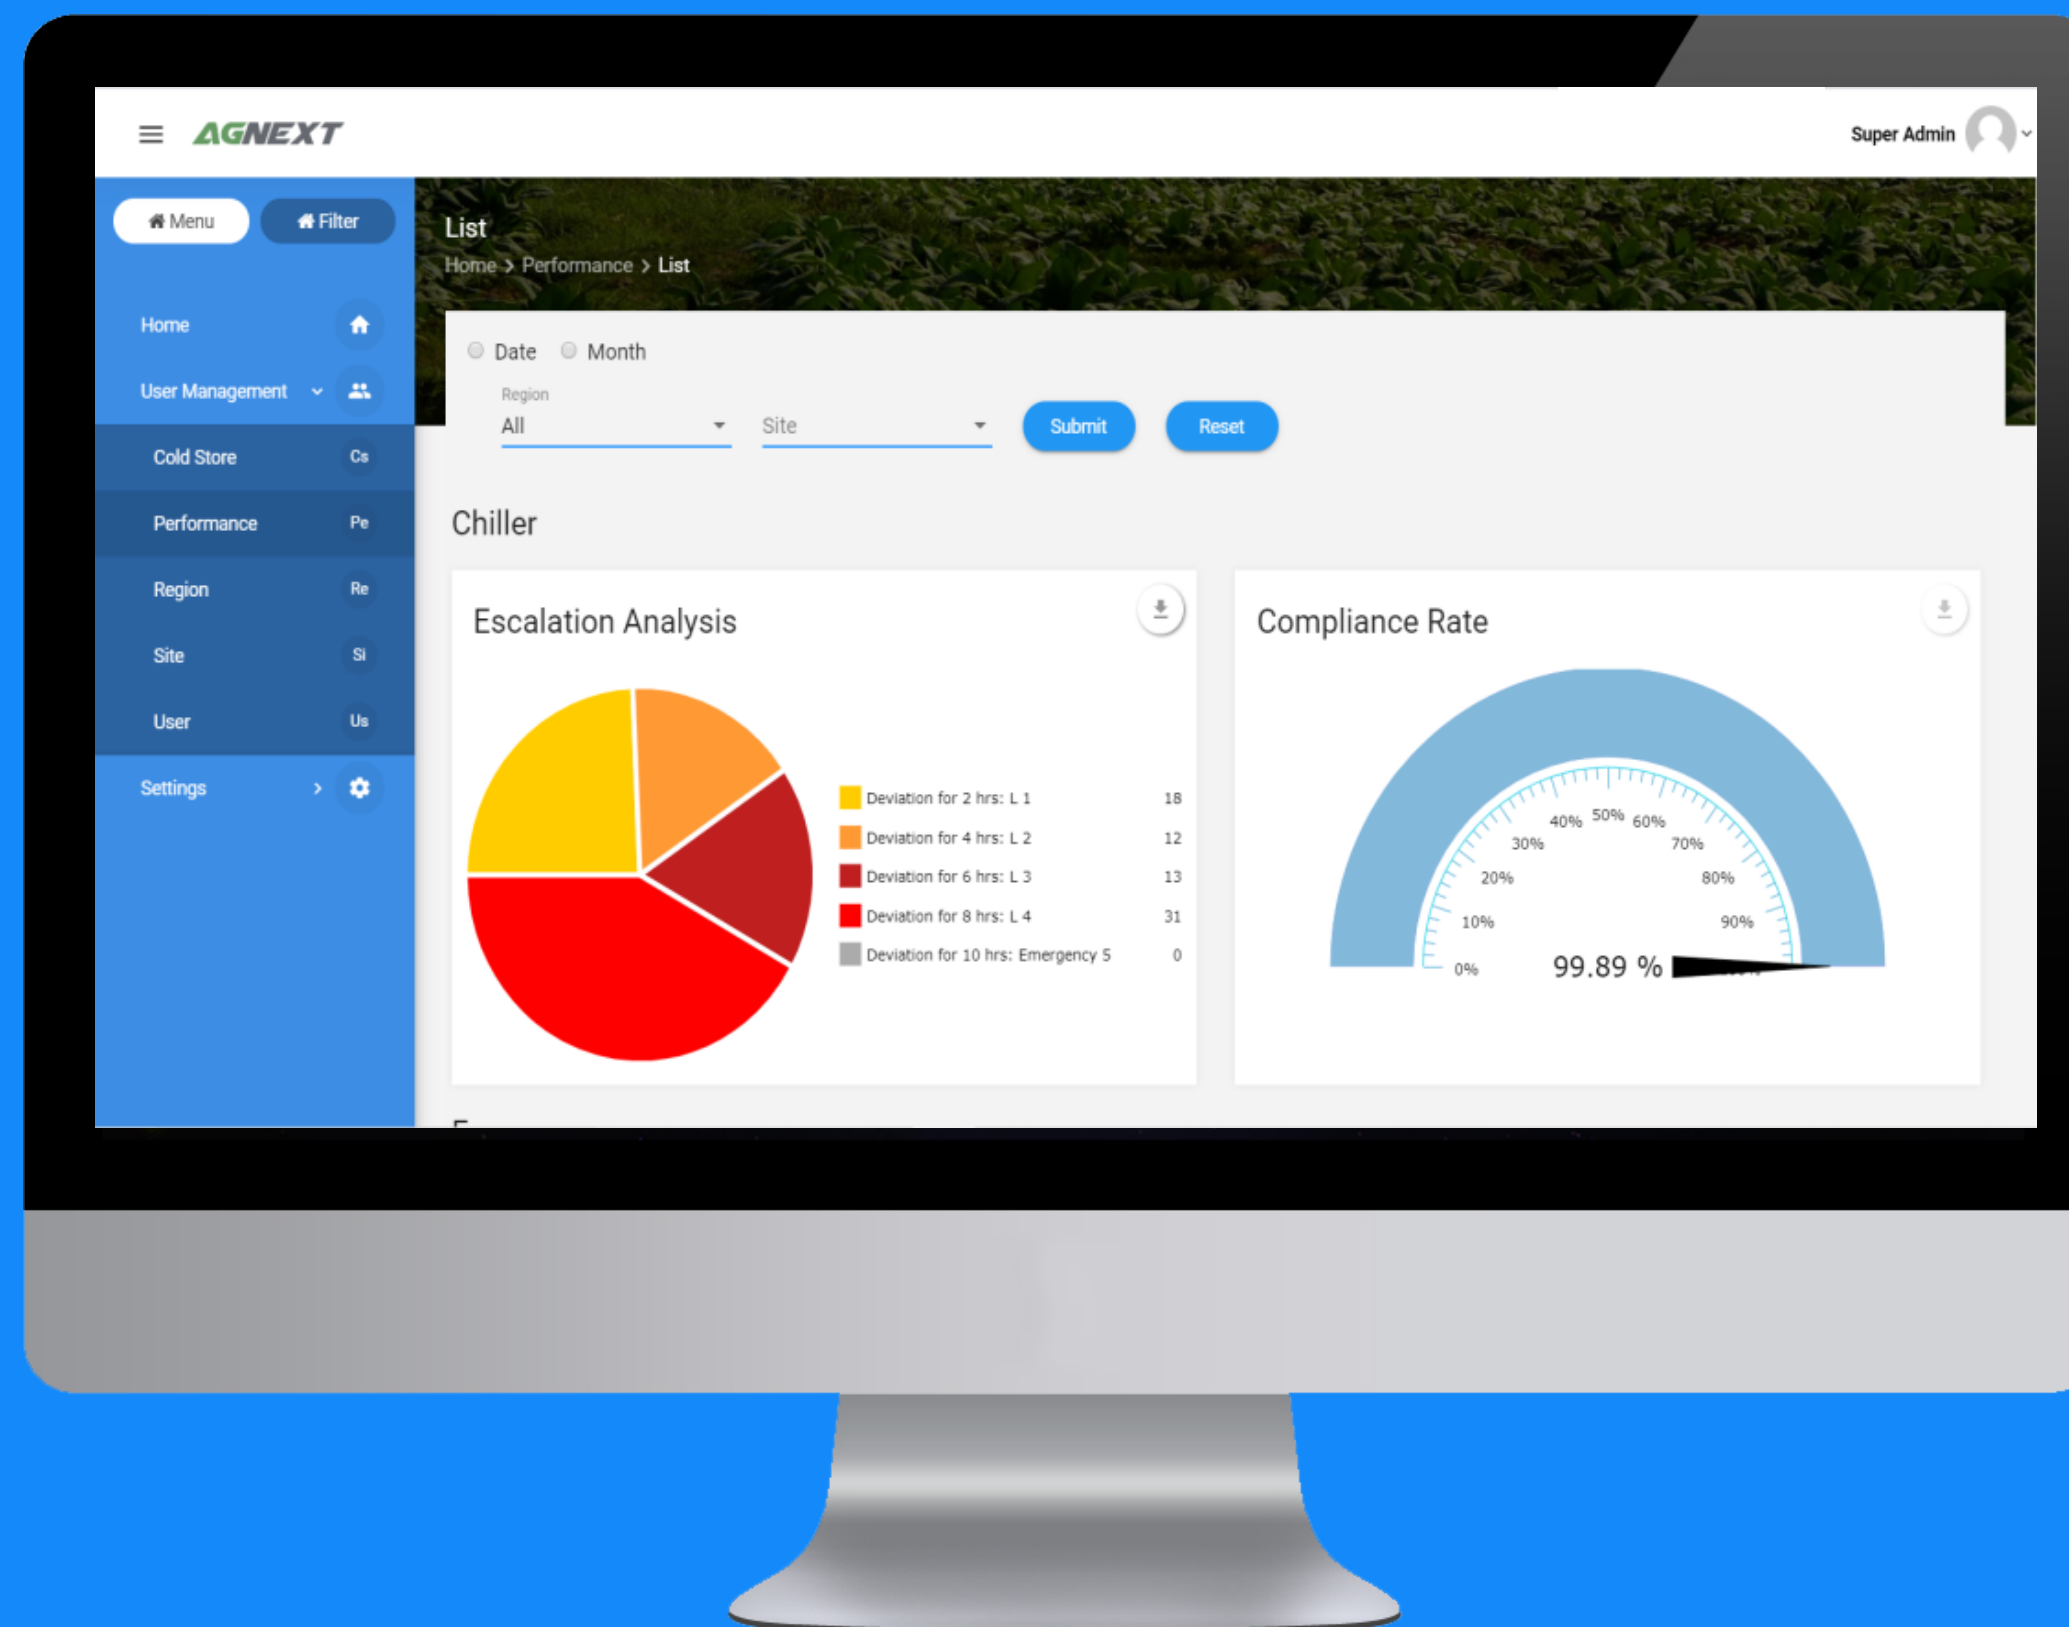

Performance – Compliance rate and escalation analysis


Escalation analysis shows the number of devices with respective level of escalation .

Compliance rate shows the percentage of devices having temperature in desired range.

For chiller : 2 to 8 °C


For Freezer : -30 to -15 °C

***Note - these temperature ranges can be customised.**

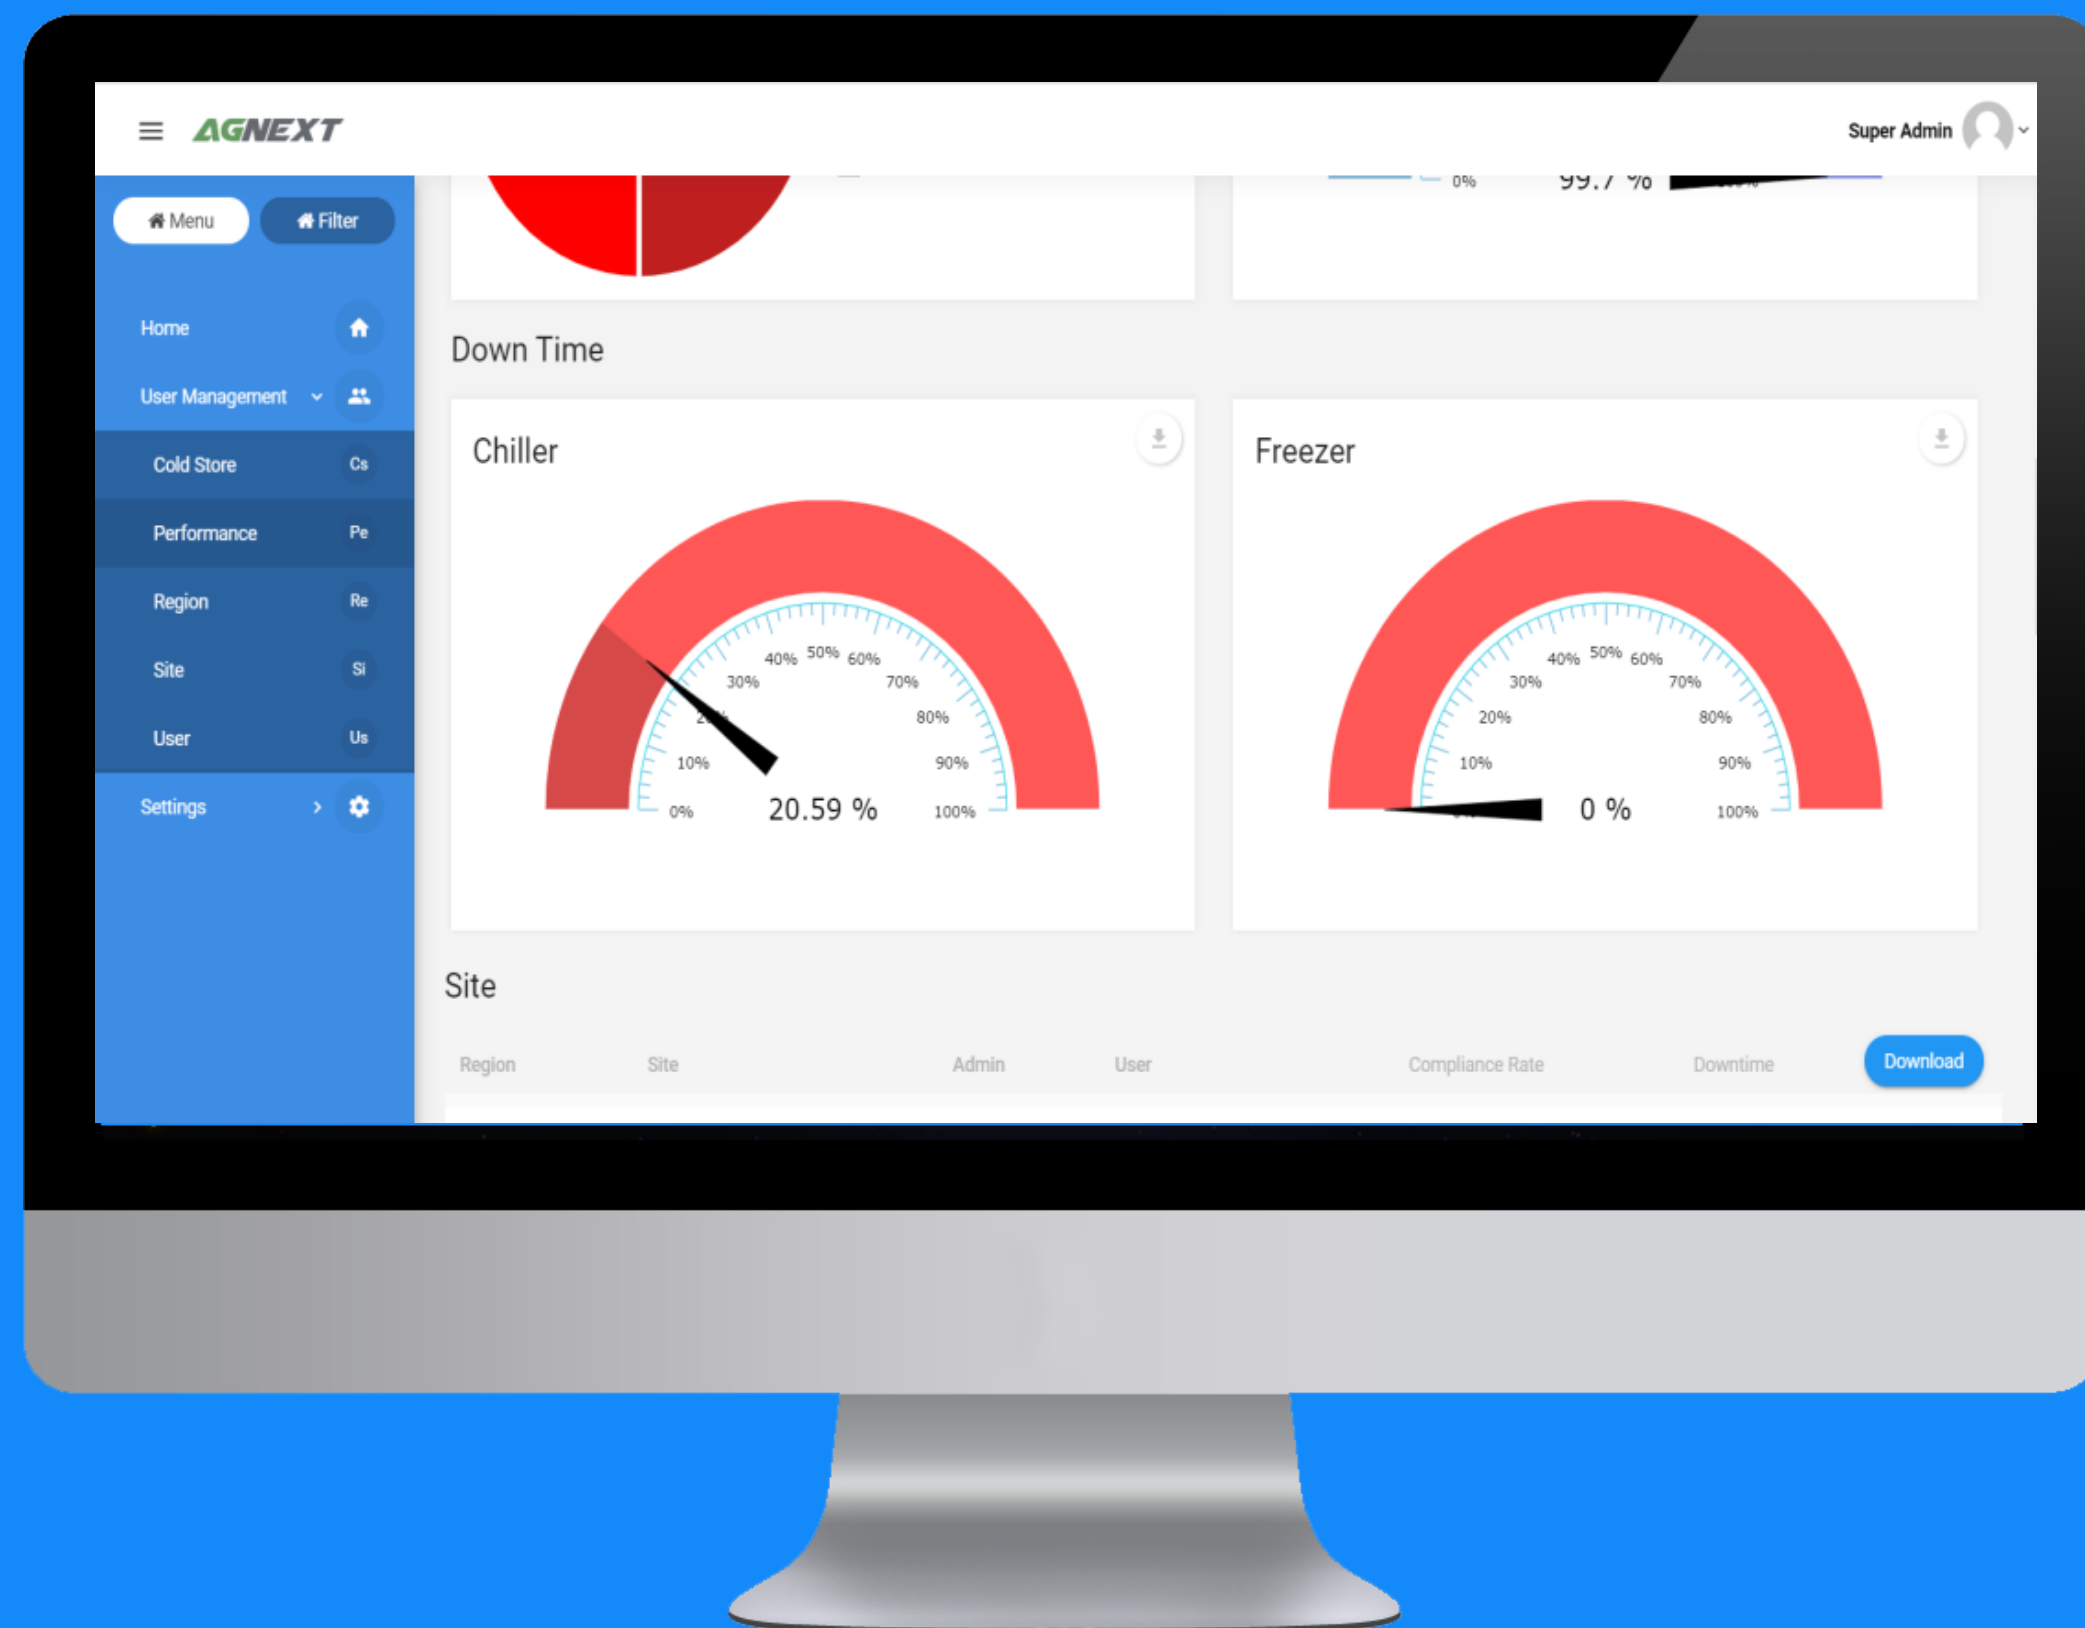

Performance – Downtime analysis

Downtime analysis shows the efficiency fo the SenseNext data loggers.

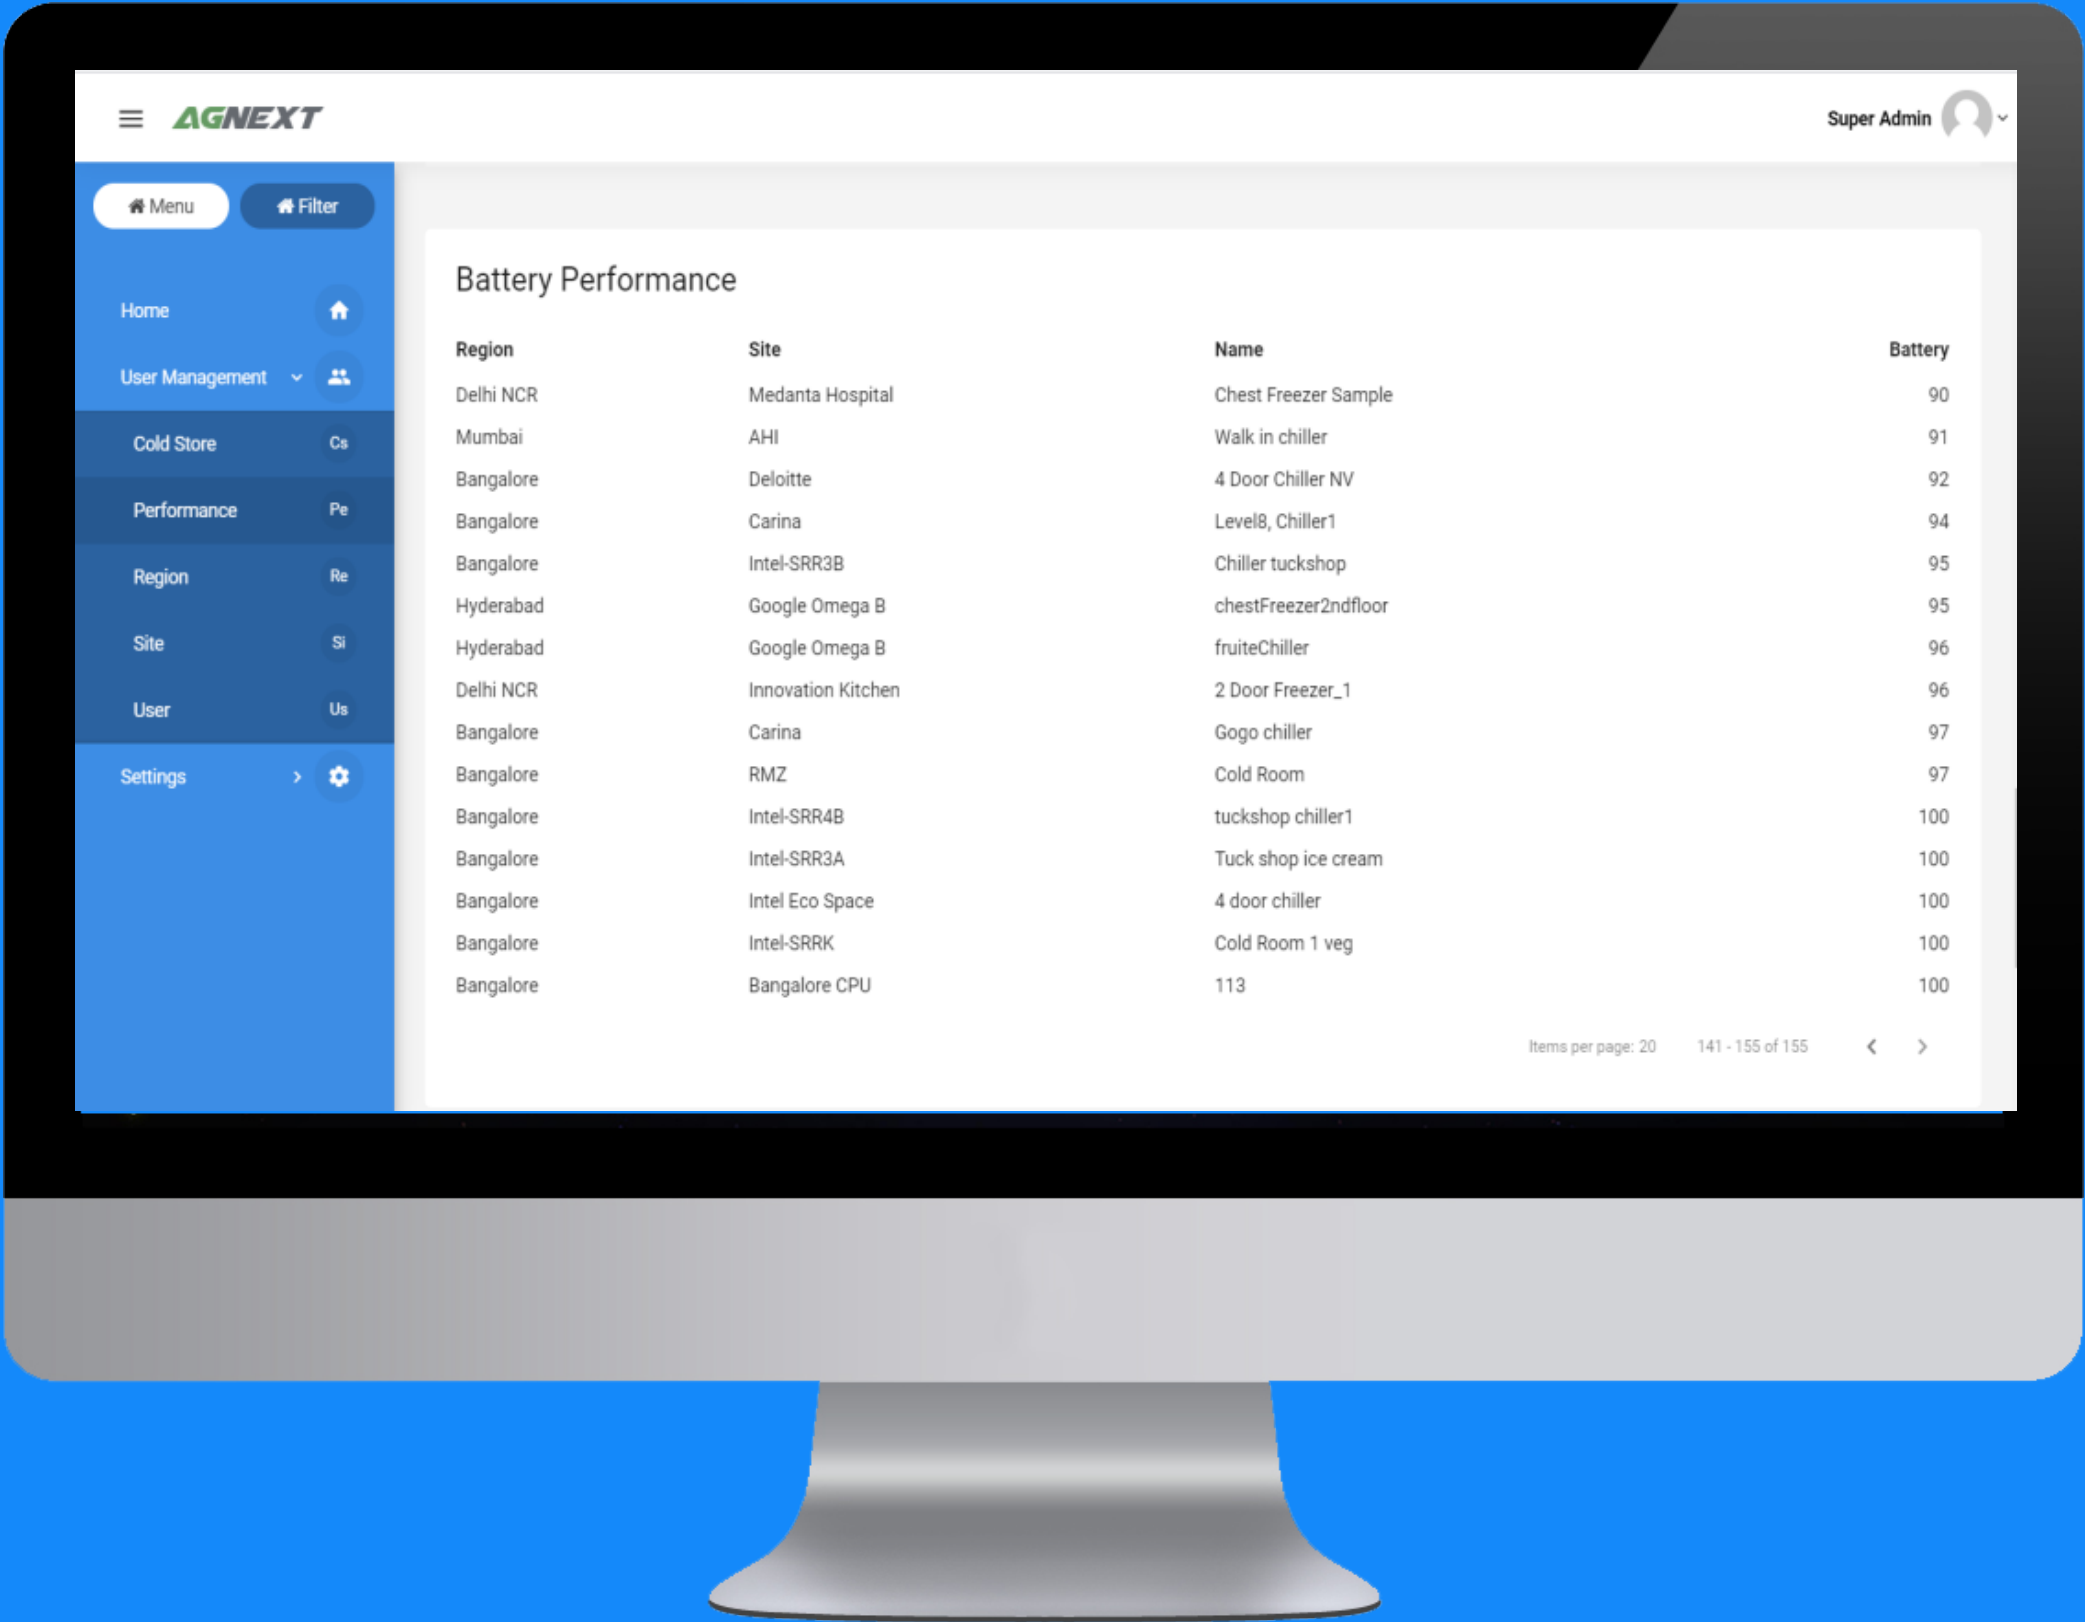

Performance – Battery performance


Quick analysis on battery percentage of all the SenseNext devices



Integration with ERP system



Escalation matrix

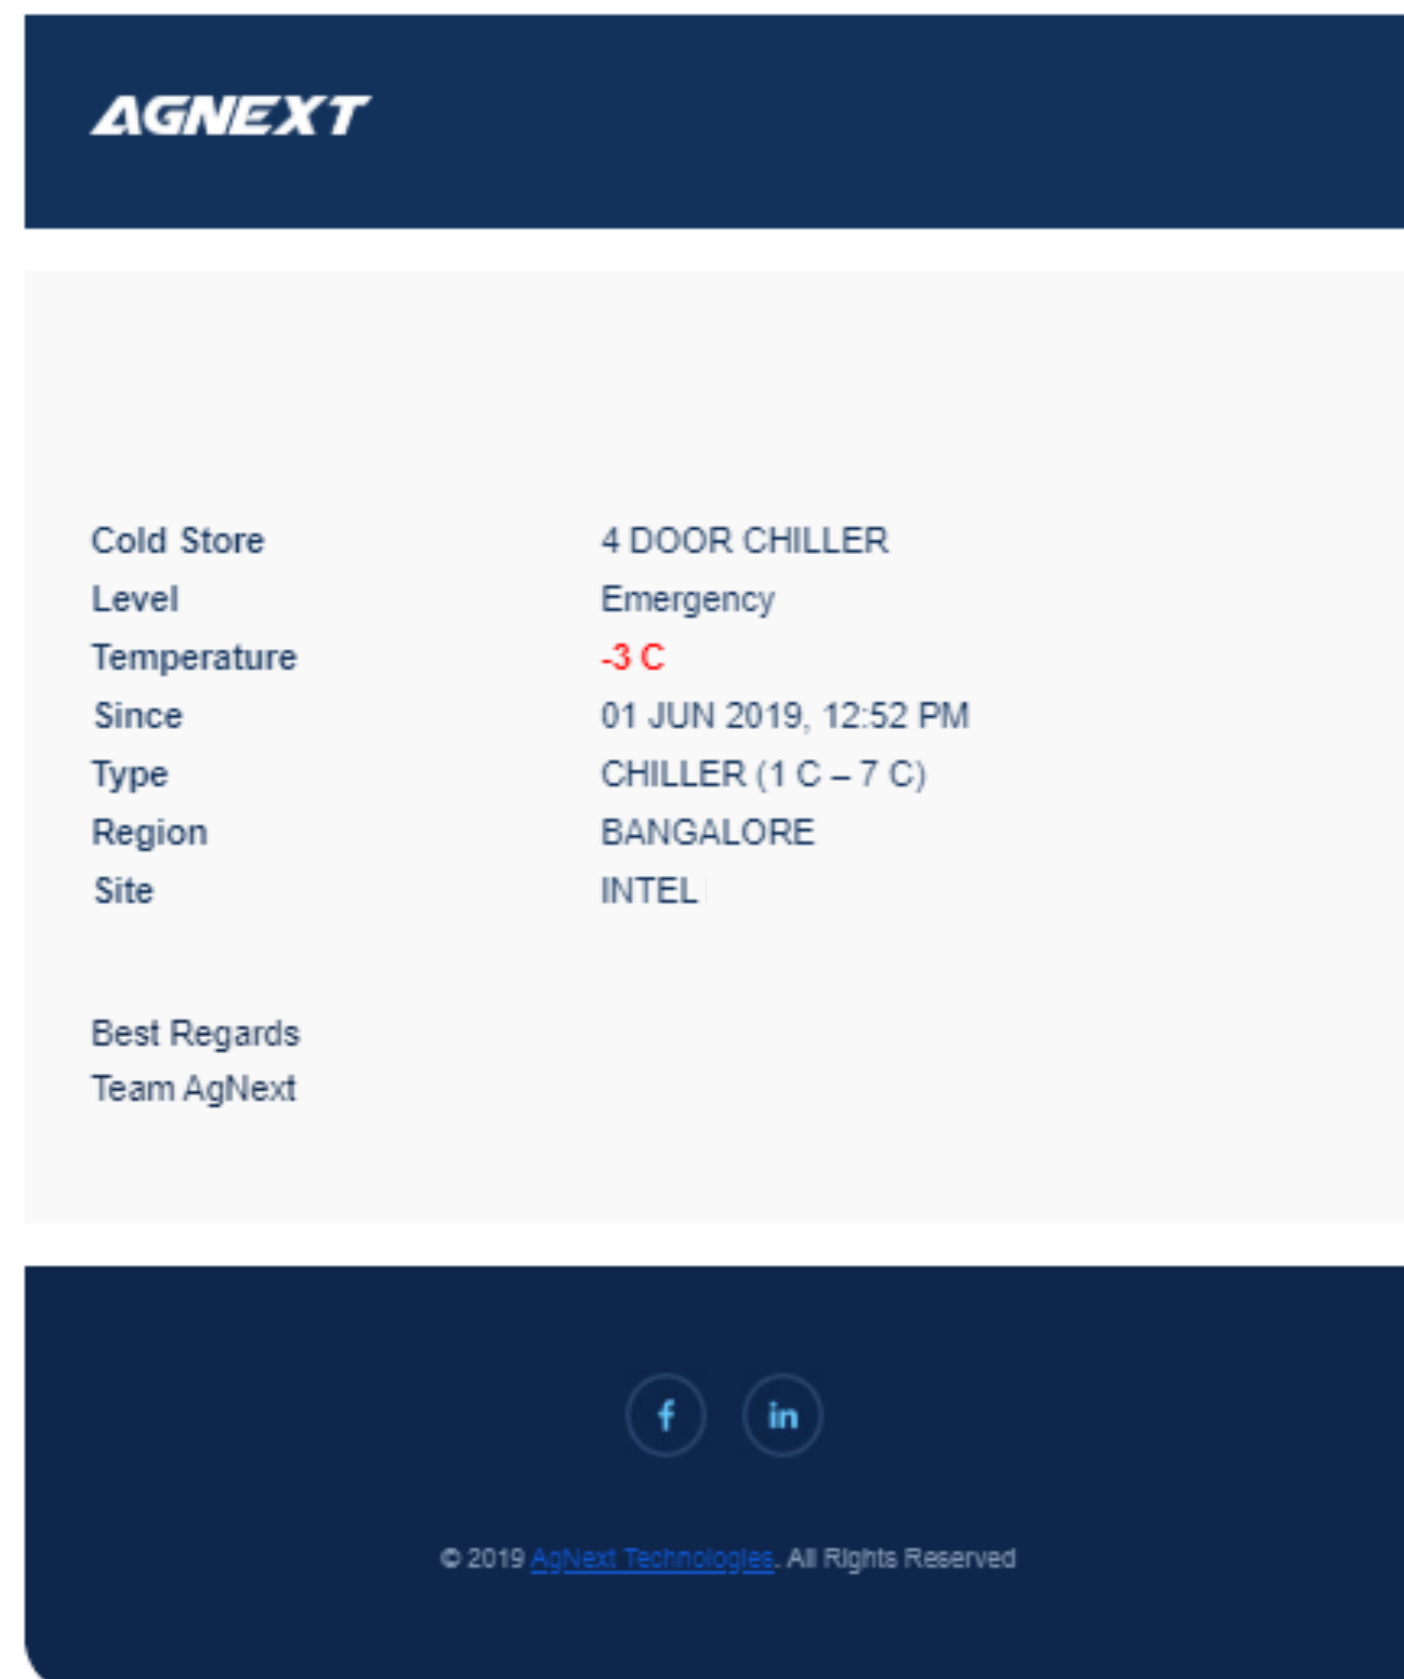

Escalation alert mechanism

- Alerts are sent to operators and management through push notifications and mails
- Alerts for different levels can be defined with a time combination
- Mails can be integrated with internal ticketing system for the management

AGNEXT

Cold Store	4 DOOR CHILLER
Status	OFFLINE
Since	01 JUN 2019, 12:52 PM
Type	CHILLER (1 C – 7 C)
Region	BANGALORE
Site	INTEL

Best Regards
Team AgNext



© 2019 [AgNext Technologies](#). All Rights Reserved

Offline alerts

➔ Operators and management can be notified for any device going offline