



SKYSHIELD TECHNOLOGY

Aerial intelligence, deployed in three minutes.


Aircraft, ground station and video analytics — built as one system.

THE SYSTEM


Ravin VTOL UAV. Launches vertically from any clear ground, cruises as a wing, lands back on its tail. No runway, no launcher, no recovery net.

SkyShield GCS. Mission planning with terrain-aware altitudes, 3D review over real terrain, live map and video, and payload control in one desktop application.


AI-based video analytics. GPU detection on the live feed — people and vehicles found, counted, tracked and rule-checked against operator-defined zones in real time.

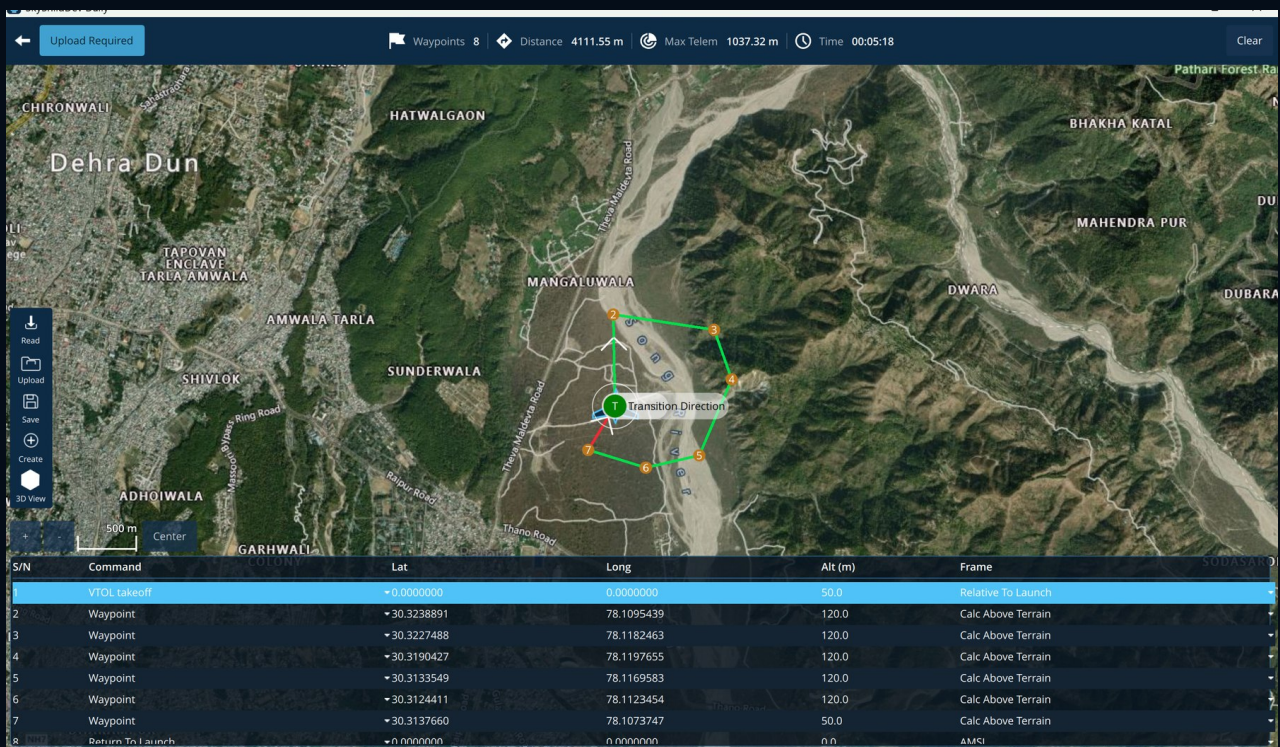

Plan View — mission and editable item table.

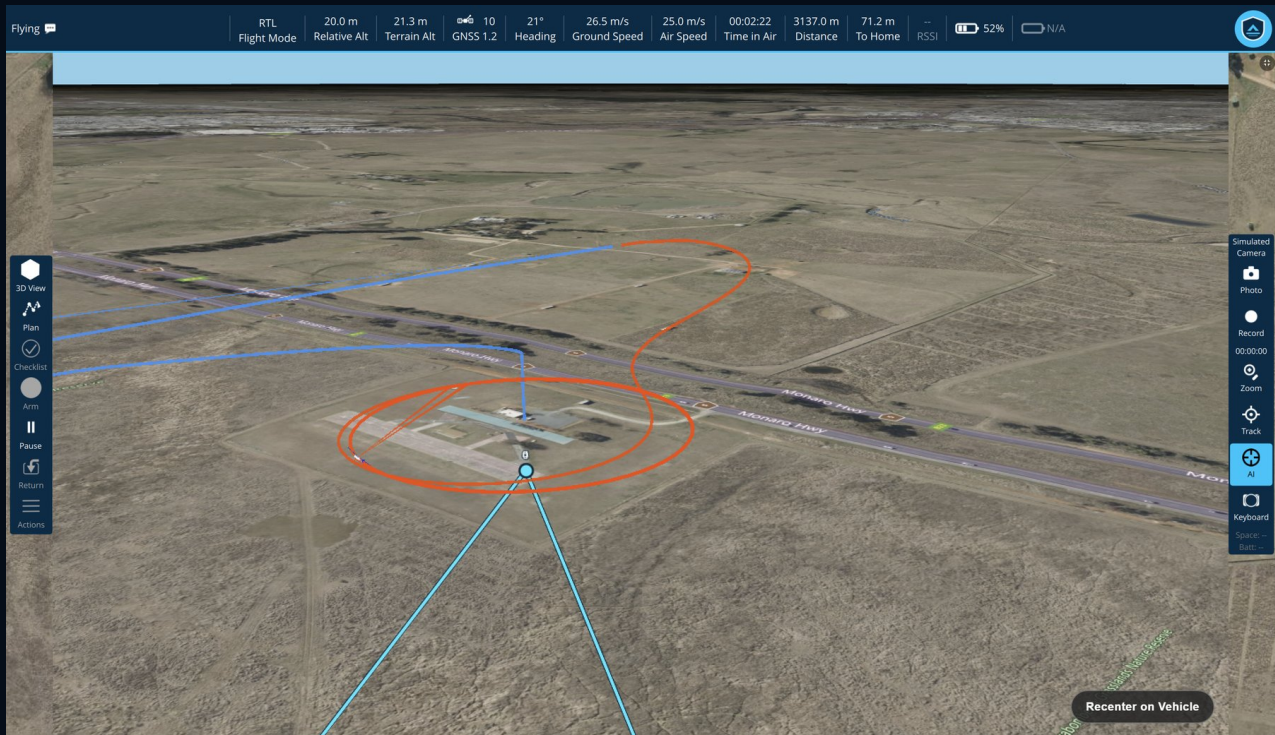

Live flight over real terrain in the 3D view.

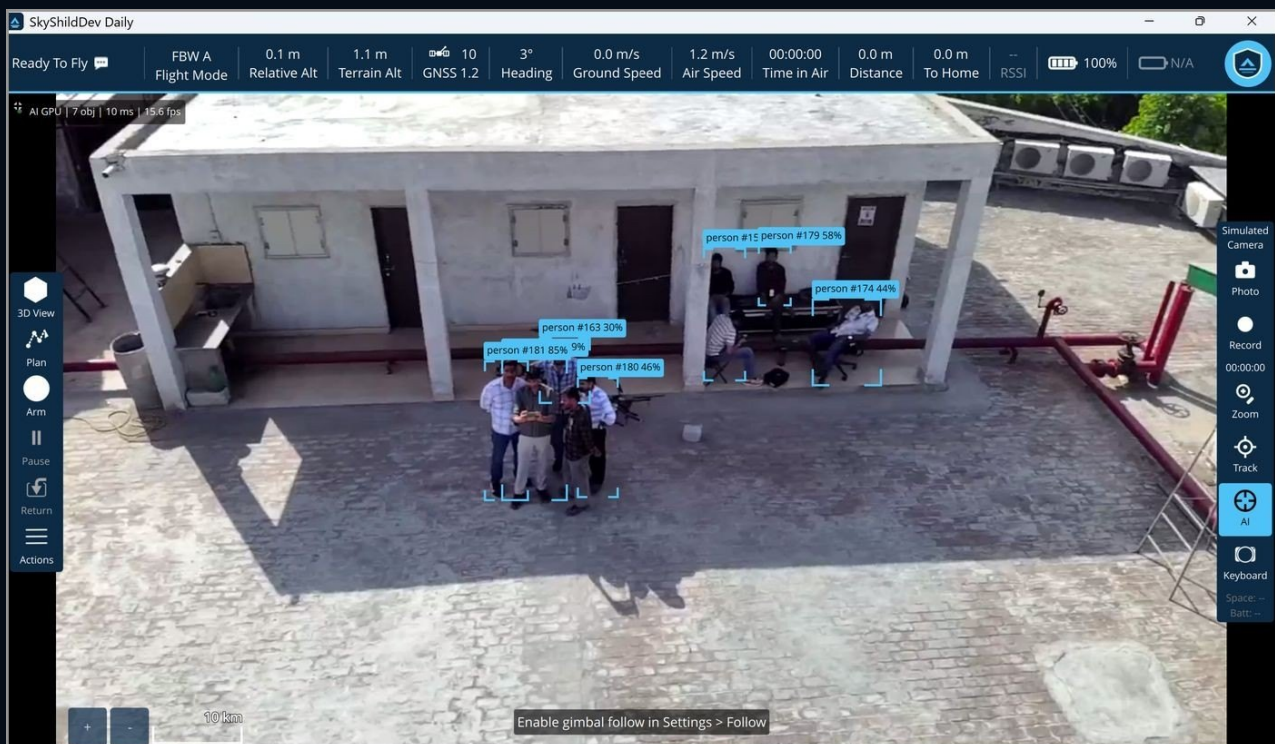

Detection running on the live feed inside the station.

AIRCRAFT SPECIFICATION

Configuration

VTOL tailsitter

Max takeoff weight

6 kg

Wingspan

1.5 m

Flight endurance	Up to 2 hours
Field deployment	Under 3 minutes
Crew	1 operator

PROGRAMME STATUS

Operational. Ground station planning and live flight; GPU video analytics with zones and rules; in-house model training on aerial imagery.

In development. Navigation resilience in degraded GNSS environments; multi-aircraft tasking from a single operator station.

Specification is indicative and subject to change. Issued 2026. contact@skyshield.tech