SKYSHIELD TECHNOLOGY

Aerial intelligence, deployed in three minutes.


Aircraft, ground station and video analytics — built as one system.

THE SYSTEM

Ravin VTOL UAV. Launches vertically from any clear ground, cruises as a wing, lands back on its tail. No runway, no launcher, no recovery net.

SkyShield GCS. Mission planning with terrain-aware altitudes, 3D review over real terrain, live map and video, and payload control in one desktop application.


AI-based video analytics. GPU detection on the live feed — people and vehicles found, counted, tracked and rule-checked against operator-defined zones in real time.

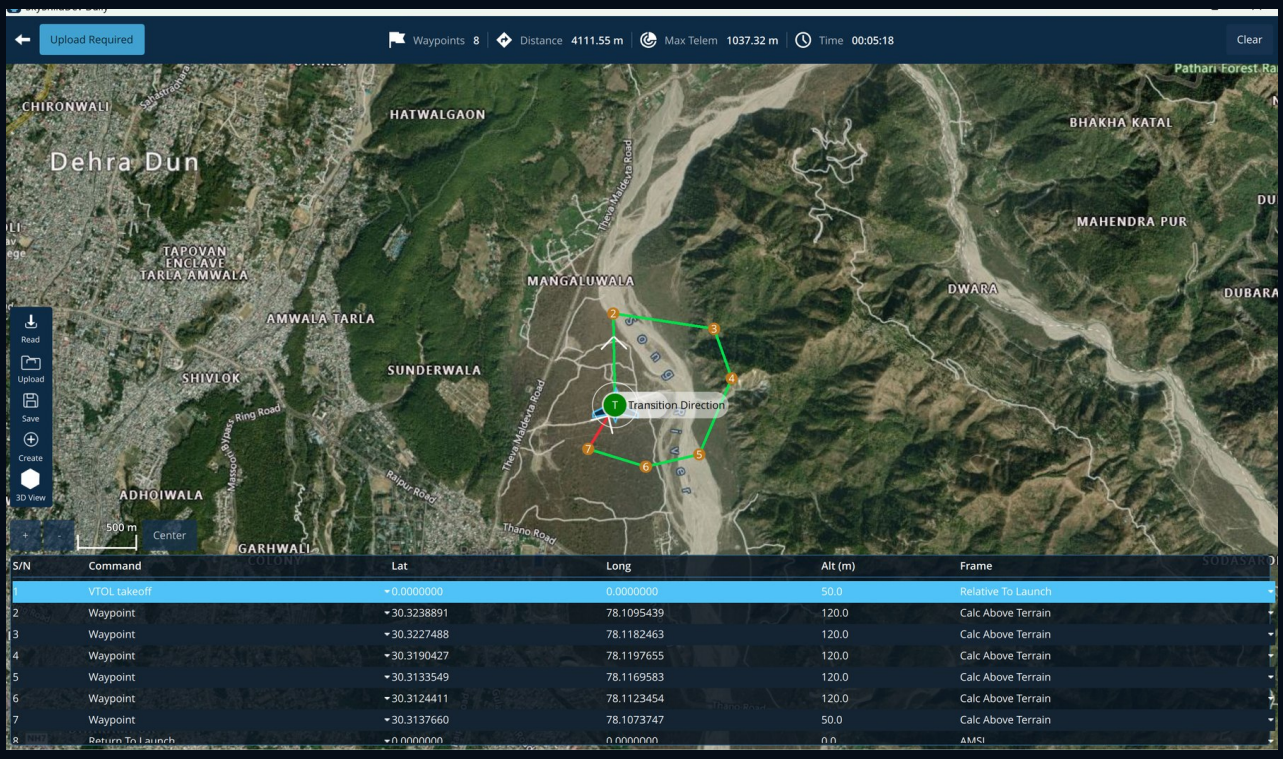


S/N	Command	Lat	Long	Alt (m)	Frame
1	VTOL takeoff	0.0000000	0.0000000	50.0	Relative To Launch
2	Waypoint	30.3238891	78.1095439	120.0	Calc Above Terrain
3	Waypoint	30.3227488	78.1182463	120.0	Calc Above Terrain
4	Waypoint	30.3190427	78.1197655	120.0	Calc Above Terrain
5	Waypoint	30.3133549	78.1169583	120.0	Calc Above Terrain
6	Waypoint	30.3124411	78.1123454	120.0	Calc Above Terrain
7	Waypoint	30.3137660	78.1073747	50.0	Calc Above Terrain
8	Return To Launch	0.0000000	0.0000000	0.0	AMSL

Plan View — mission and editable item table.

aman@skyshieldtech.in

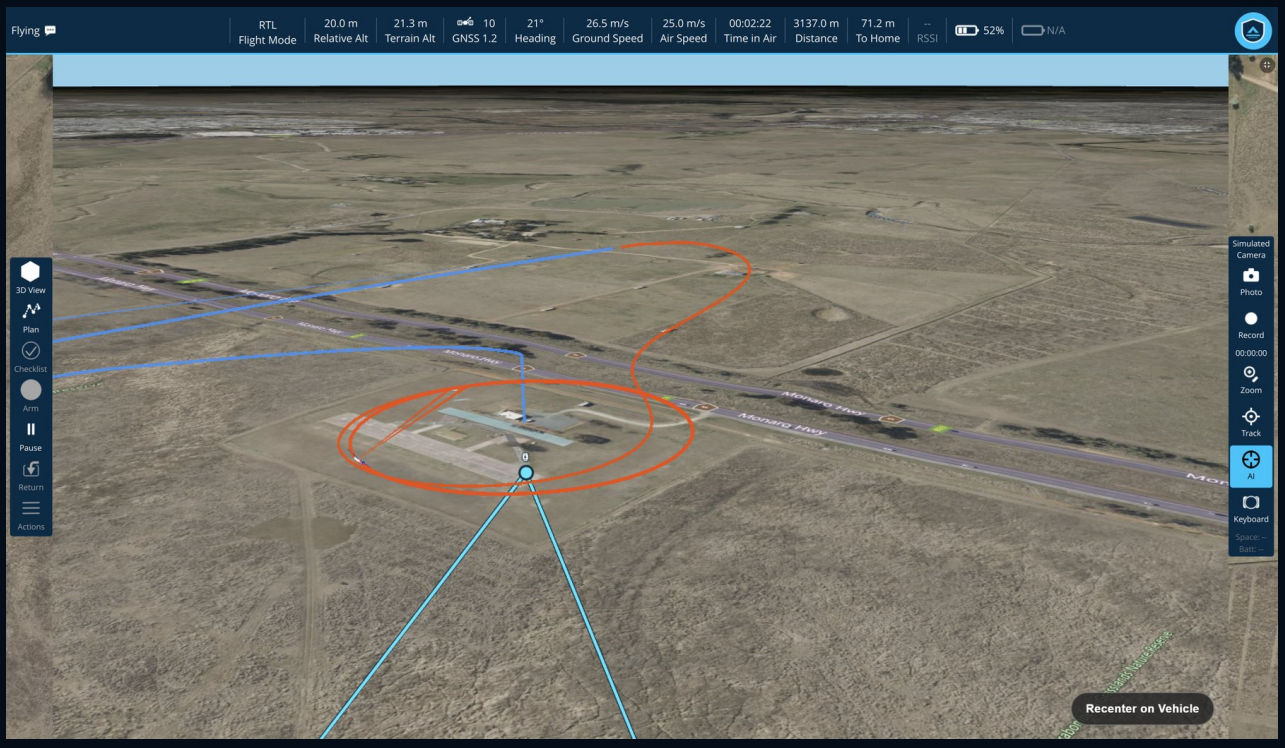

Live flight over real terrain in the 3D view.

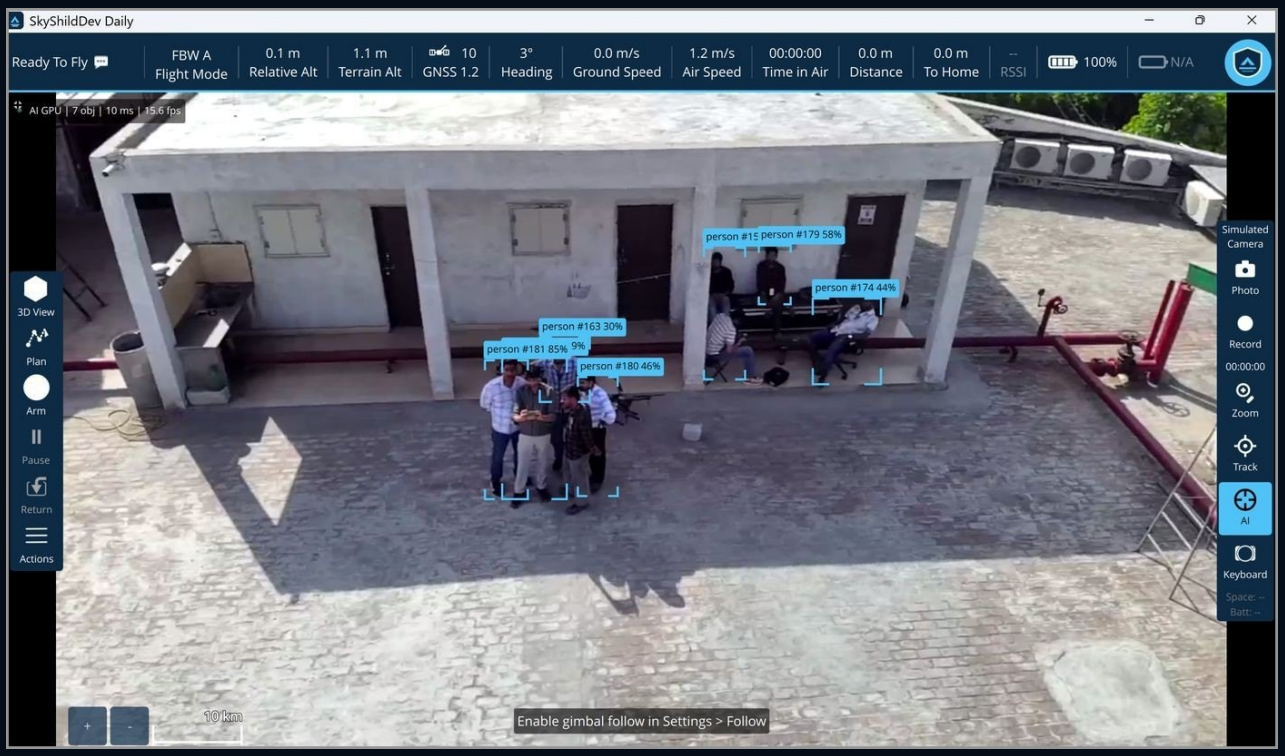

Detection running on the live feed inside the station.

AIRCRAFT SPECIFICATION

Configuration	**VTOL tailsitter**
Max takeoff weight	**6 kg**
Wingspan	**1.5 m**

Flight endurance	**Up to 2 hours**
Field deployment	**Under 3 minutes**
Crew	**1 operator**

PROGRAMME STATUS

Operational. Ground station planning and live flight; GPU video analytics with zones and rules; in-house model training on aerial imagery.

In development. Navigation resilience in degraded GNSS environments; multi-aircraft tasking from a single operator station.

Specification is indicative and subject to change. Issued 2026. aman@skyshieldtech.in