


Heat Shrinkable Live End Cap

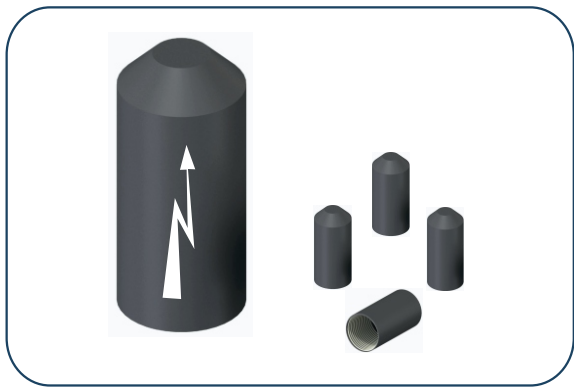

AEX's Heat Shrink End Sealing Caps are designed to seal and insulate the live ends of Power Cables.

AEX Heat Shrink End Caps are made from high-quality Cross-linked Polyolefin material that is halogen-free. It contains a minimum of 2.5% carbon to protect it from ultraviolet rays.





The Caps are coated inside with Hot melt adhesive which melts and flows throughout the shrinking process creating a reliable moisture seal that is also fungus and weather-resistant.

KEY FEATURES AND BENEFITS:

- Small end caps are used to seal each core separately. The bigger end cap marked with Live Flash Symbol shall be installed over the cores insulated with the small caps.
- Live End Sealing Kit, i.e., a combination of Caps in a kit, for insulating energized Power Cables up to 1000V.

Technical Properties		
Test Description	Nominal Value	Test Method
Tensile Strength	12 N/mm ² (min.)	ASTM D638
Elongation	350% (min.)	ASTM D638
Water Absorption	0.50% (max.)	ASTM D570
Density	1.00 ±0.2 gm/cm ³	ASTM D792
Hardness	45 +/- 10 Shore D	ASTM D2240
Low Temperature Flexibility	No Cracking	ASTM G154
Thermal Ageing 150°C for 168 hrs.		
Tensile Strength	10 N/mm ² (min.)	ASTM D638
Elongation	300% (min.)	ASTM D638
Di-electric Strength	12 kV/mm. (min.)	ASTM D149
Volume Resistivity	1x10 ¹⁴ Ohm.cm (min.)	ASTM D257

Product Dimensions				
Product Description	4 x 1.5 - 6mm ²	4 x 4 - 35mm ²	4 x 50 - 150mm ²	4 x 150 - 300mm ²
Outer Cap - Product Code	AECL 25/8L	AECL 40/15L	AECL 55/25L	AECL 75/35L
Supplied Dia. (Min.)	25	40	55	75
Free Recovered Dia (Max.)	8	15	25	35
Supplied Length (Min.)	75	120	170	180
Free Recv. Thick. (±10%)	2.5	3.5	3.4	4.0
Inner Cap - Product Code	AECL 6/2	AECL 12/4	AECL 20/7.5	AECL 40/15
Supplied Dia. (Min.)	6	12	20	40
Free Recovered Dia (Max.)	2	4	7.5	15
Supplied Length (Min.)	25	40	55	90
Free Recv. Thick. (±10%)	2.0	2.3	2.3	3.3

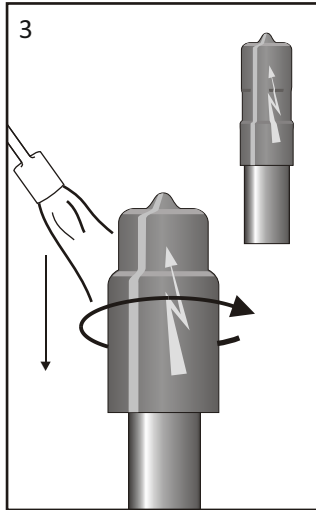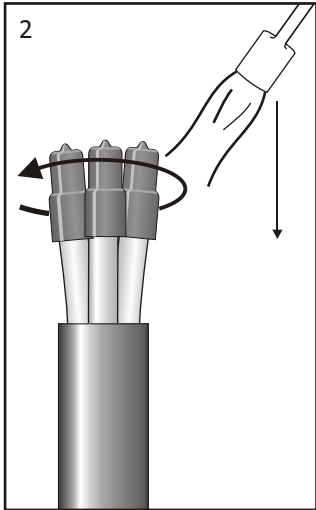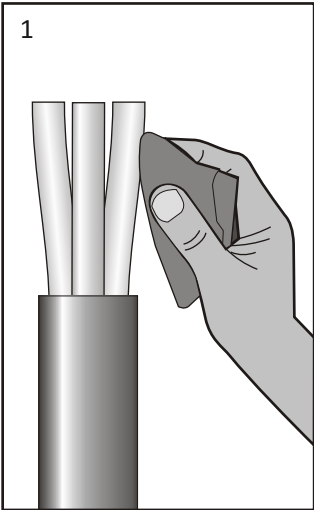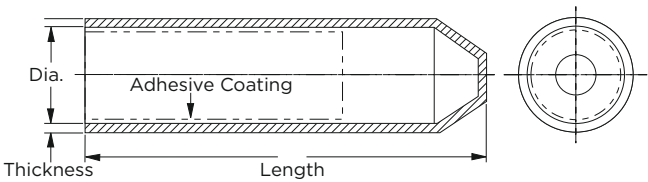

1. Clean and de-grease cable cores.
2. Place the smaller caps over the end of the cable cores. Apply outer 3-4 inch tip of the flame with a rapid brushing motion.
3. Place the outer cap over the cores installed with smaller caps. Apply the flame with a rapid brushing motion. Installation of cable cap completed.