# LedEngin, Inc.

# 10W Emitter on Standard MCPCB Option

# LZ4-2xxx10



### **Key Features**

- Typical Thermal Resistance for MCPCB adds only 2°C/W
- Multiple mounting options
- MCPCB contains 4 Zener Diodes for enhanced ESD protection

#### **Available Products**

Table 1:

Colors	10W Part Number	Emitter Link <sup>[1]</sup>	Pin Out Table <sup>[2]</sup>
Red	LZ4-20R110		Table 3
Deep Red	LZ4-20R210		Table 3
Green	LZ4-20G110		Table 3
Blue	LZ4-20B210		Table 3
Amber	LZ4-20A110		Table 3
Cool White	LZ4-20CW10		Table 3
Neutral White	LZ4-20NW10		Table 3
Warm White	LZ4-20WW10		Table 3
RGB	LZ4-20MC10		Table 4
RGBA	LZ4-20MA10		Table 5
Dental Blue	LZ4-20DB10		Table 3
Dental Blue + UV	LZ4-20D110		Table 6
UV	LZ4-20UA10		Table 3

#### Notes

- 1. Click on Emitter Link for emitter data sheet.
- 2. See appropriate MCPCB pin out table on Pages 3 and 4.

### Description

The LZ4-2xxx10 Standard MCPCB option provides a convenient method to mount LedEngin's 10W emitters. The six recessed features allow the use of M3 or #4 screws to attach the MCPCB to a heat sink. The MCPCB also contains Zener diodes for enhanced ESD protection.

# RΘ<sub>J-B</sub> Lookup Table

Table 2:

Product	Typical Emitter RΘ <sub>J-C</sub>	+	Typical MCPCB RO <sub>c-B</sub>	=	Typical Emitter + MCPCB RΘ <sub>J-B</sub> <sup>[1]</sup>
10W	2.7°C/W	+	2°C/W	=	4.7°C/W

#### Note for Table 2:

# Emitter on Standard MCPCB Dimensions (mm)

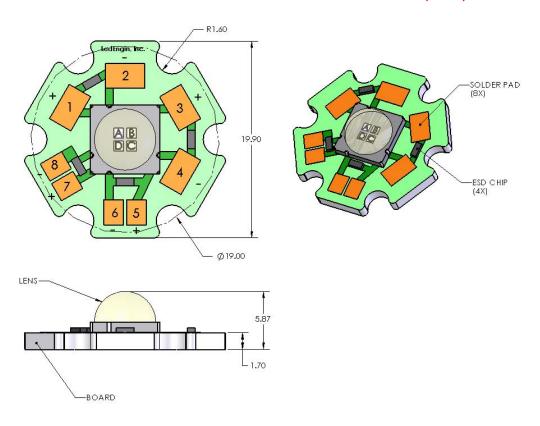


Figure 1: Standard MCPCB outline dimensions (mm).

#### Note for Figure 1:

- 1. Unless otherwise noted, the tolerance =  $\pm$  0.20 mm.
- Slots in MCPCB are for M3 or #4 mounting screws.
- 3. LedEngin recommends using plastic washers to electrically insulate screws from solder pads and electrical traces.
- 4. Electrical connection pads on MCPCB are labeled "+" for Anode and "-" for Cathode for each LED die.
- 5. LedEngin recommends using thermally conductive tape or adhesives when attaching MCPCB to a heat sink.

<sup>1.</sup>  $R\Theta_{J-B}$  is the combined thermal resistance from the LED die junction to the Aluminum core on MCPCB  $(R\Theta_{J-C} + R\Theta_{C-B} = R\Theta_{J-B})$ .

# Single Color MCPCB Pin Out

[LZ4-20R110, LZ4-20R210, LZ4-20G110, LZ4-20B210, LZ4-20A110, LZ4-20CW10 LZ4-20NW10, LZ4-20WW10, LZ4-20DB10, LZ4-20UA10]

Table 3:

Pa	d# LED	Die Function	,
	u# LLD	Die i diletioi	· · · · · · · · · · · · · · · · · · ·
	1 A	Anode	
	2 A	Cathode	
	3 B	Anode	
	4 B	Cathode	
	5 C	Anode	
	6 C	Cathode	
7	7 D	Anode	
3	3 D	Cathode	

### **RGB MCPCB Pin Out**

[LZ4-20MC10]

Table 4:

Pad #	LED Die	Color	Function	
1	А	Green 2	Anode	
2	А	Green 2	Cathode	
3	В	Red	Anode	
4	В	Red	Cathode	
5	С	Green 1	Anode	
6	С	Green 1	Cathode	
7	D	Blue	Anode	
8	D	Blue	Cathode	

### **RGBA MCPCB Pin Out**

[LZ4-20MA10]

Table 5:

Pad #	LED Die	Color	Function	
1	A	Blue	Anode	
2	Α	Blue	Cathode	
3	В	Red	Anode	
4	В	Red	Cathode	
5	С	Green	Anode	
6	С	Green	Cathode	
7	D	Amber	Anode	
8	D	Amber	Cathode	

# 3 Dental Blue + 1 UV MCPCB Pin Out

# [LZ4-20D110]

#### Table 6:

Pad #	LED Die	Color	Function	
1	Α	UV	Anode	
2	А	UV	Cathode	
3	В	Dental Blue 1	Anode	
4	В	Dental Blue 1	Cathode	
5	С	Dental Blue 2	Anode	
6	С	Dental Blue 2	Cathode	
7	D	Dental Blue 3	Anode	
 8	D	Dental Blue 3	Cathode	

### **Company Information**

The LZ1-2xxx10 LED emitter on MCPCB is developed, manufactured, and marketed by LedEngin, Inc., located in Santa Clara, CA. LedEngin is a global leader in advanced high-power LED emitters and light-source modules. LedEngin provides total solutions from 3W to 15W in single packages with ultra-small footprints in all colors from Cool White, Warm White, Neutral White, Red, Green, Blue, Amber, RGB, RGBA, Dental Blue and UV. LedEngin supports customers to generate solid-state lighting designs that conserve natural resources. LedEngin is focused on differentiated Ultra High-Brightness LED solutions for diverse global markets using its patent-pending package designs and manufacturing processes. LedEngin offers catalog as well as full custom solutions to enable flexible system designs for its customers. LedEngin is dedicated to long-term win-win partnering with its customers and suppliers.

LedEngin reserves the right to make changes to improve performance without notice.

Please contact <u>Sales@ledengin.com</u> or (408) 492-0620 for more information.