

PROJECT BUTTON HR–V0 ELECTRICAL V3 CONNECTED CANDIDATE

Separate RESET and ARM, two PNOZ stages, dual watchdog contacts, external adapters, redundant actuator interruption.

01 External listed sources and DC boundaries

File: 01_external_sources.kicad_sch

02 Dual–channel E–stop and RESET eligibility

File: 02_estop_eligibility.kicad_sch

03 Distinct ARM and watchdog eligibility

File: 03_arm_watchdog_eligibility.kicad_sch

04 Contactor coils, mirror contacts and EDM

File: 04_contactor_edm.kicad_sch

05 Redundant actuator–power interruption

File: 05_actuator_interruption.kicad_sch

06 Protected actuator branches and central DYNAMIXEL star injection

File: 06_branches_and_injection.kicad_sch

07 Independent watchdog power, controller and drivers

File: 07_watchdog_control.kicad_sch

08 Calculated dual–channel 24 V watchdog feedback

File: 08_watchdog_feedback_interface.kicad_sch

09 Compute, debug and control terminals

File: 09_compute_and_control_terminals.kicad_sch

10 U2D2, actuator ports and bonding boundary

File: 10_actuator_interfaces.kicad_sch

11 Watchdog PCB external connectors

File: 11_watchdog_pcb_connectors.kicad_sch







12 Watchdog PCB test access

File: 12_watchdog_pcb_test_access.kicad_sch

V2.1 PRESERVED; V3 IS A CONNECTED CANDIDATE PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION Project Button		
Sheet: / File: project–button–v3.kicad_sch		
Title: PROJECT BUTTON HR–V0 ELECTRICAL V3 CONNECTED CANDIDATE		
Size: A3	Date: 2026–08–07	Rev: V3–P1.3
KiCad E.D.A. 10.0.5		Id: 1/13

01 External listed sources and DC boundaries

Factory-sealed adapters eliminate project-built mains wiring.

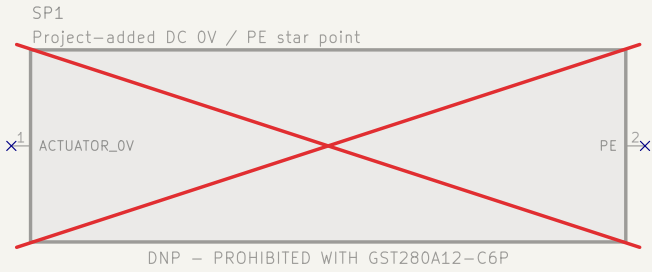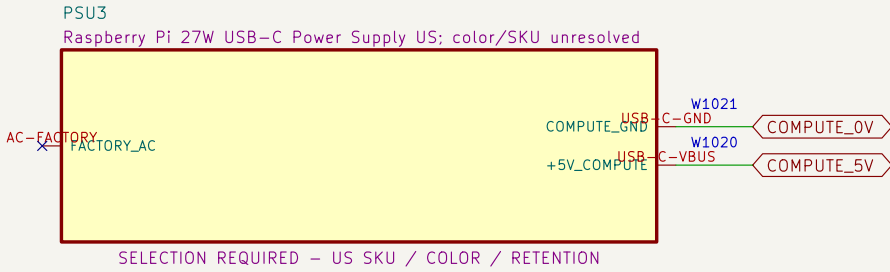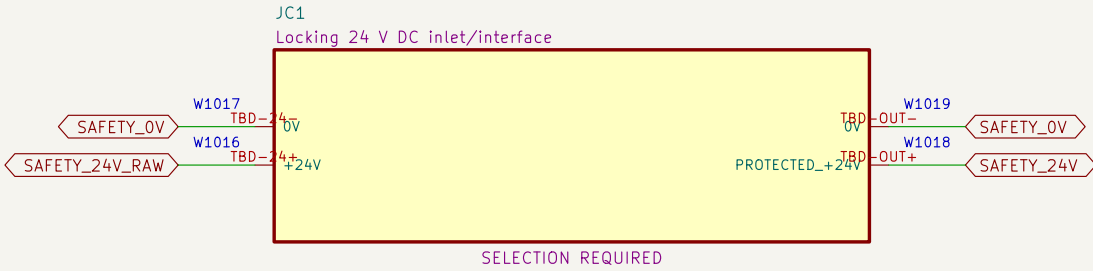
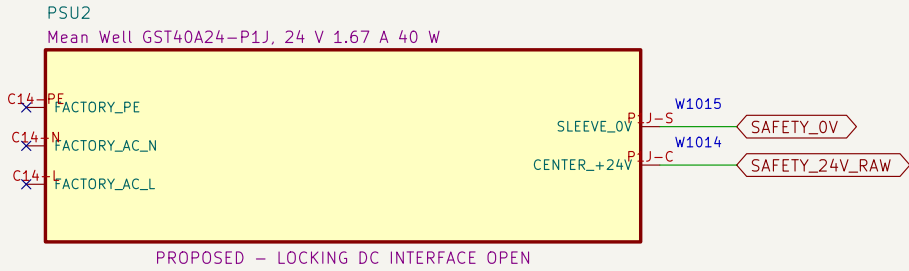
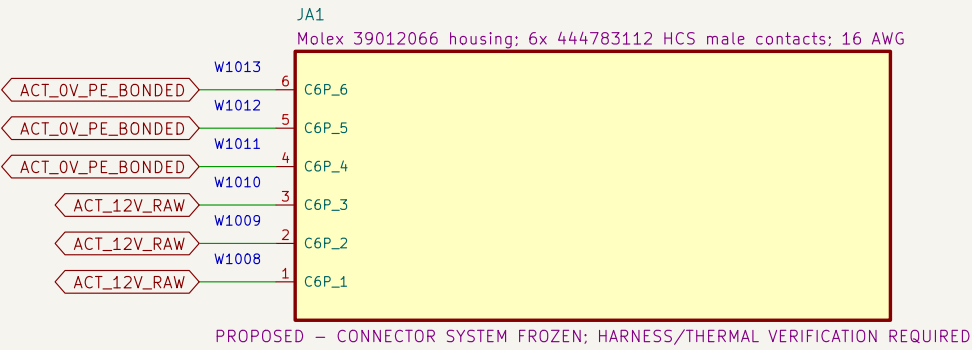
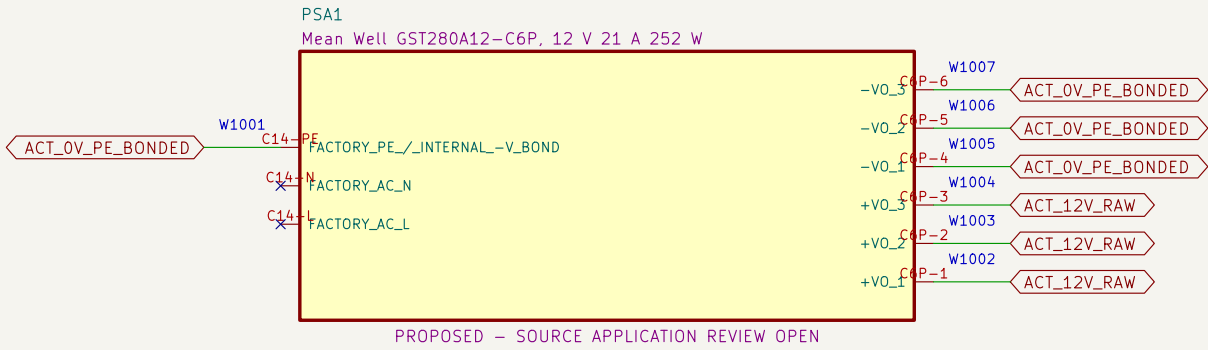


NOTE 1: All AC conductors shown are factory boundaries, not project-built wiring.

NOTE 2: Site cords, receptacles, GFCI/code basis and source application review remain open.

02 Dual-channel E-stop and RESET eligibility

Each SR1 input return contains one E-stop NC and one watchdog NO contact; RESET cannot energize K1/K2.

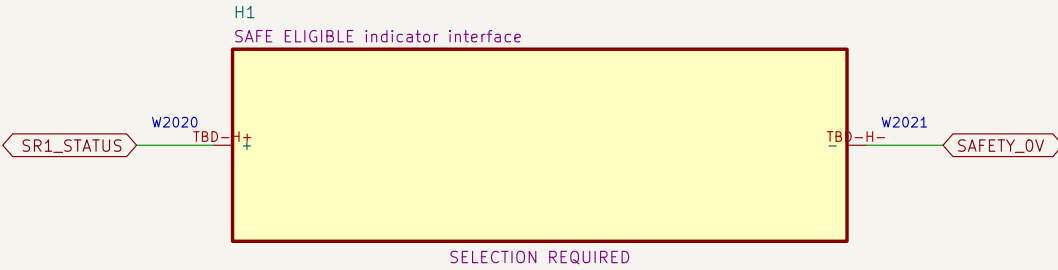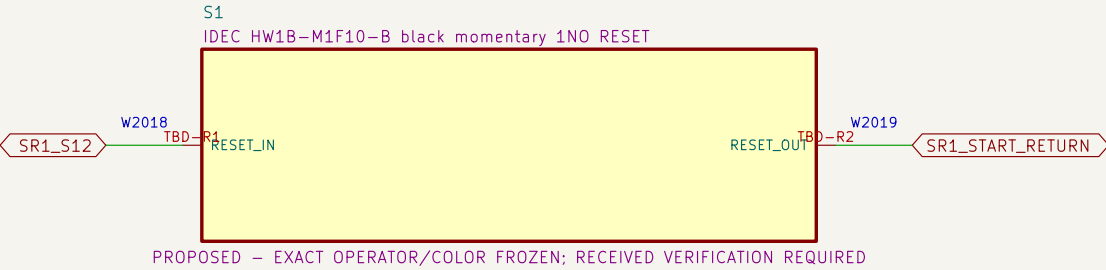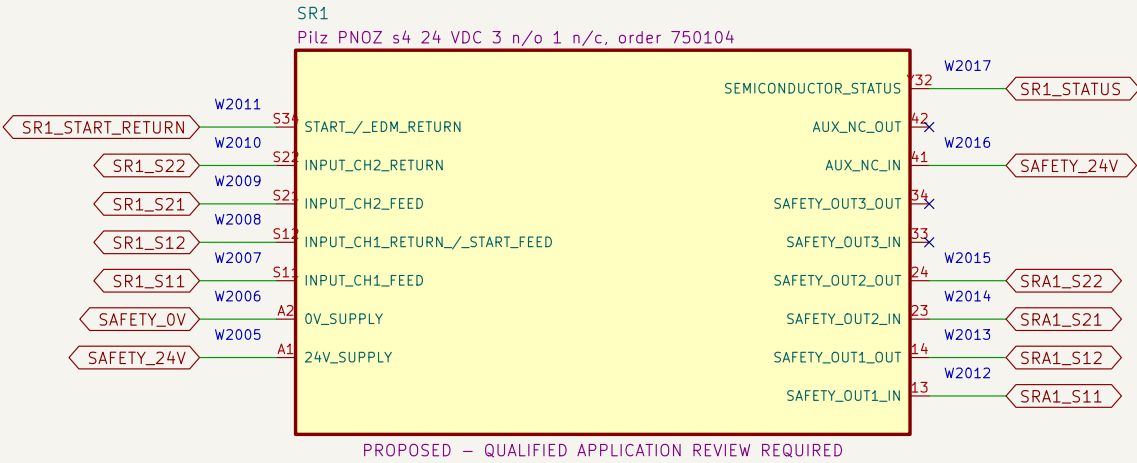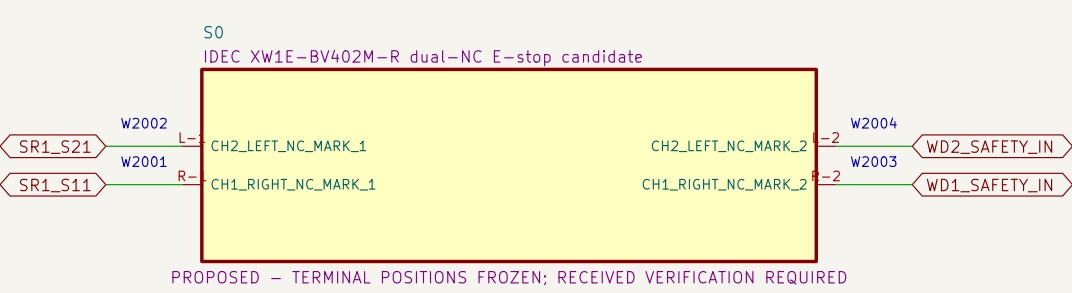


NOTE 1: Heartbeat loss opens both SR1 input returns; recovery alone cannot restore the monitored RESET stage.

NOTE 2: RESET release may make SR1 eligible, but SRA1 and K1/K2 remain de-energized until a later ARM.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED		
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION		
Project Button		
Sheet: /02 Dual-channel E-stop and RESET eligibility/ File: 02_estop_eligibility.kicad_sch		
Title: PB HR-V0 V3-P1.3 – 02		
Size: A3	Date: 2026-08-07	Rev: V3-P1.3
KiCad E.D.A. 10.0.5		Id: 3/13

03 Distinct ARM and watchdog eligibility

SRA1 requires SR1 eligibility, two watchdog channels, EDM proof and a new ARM action.

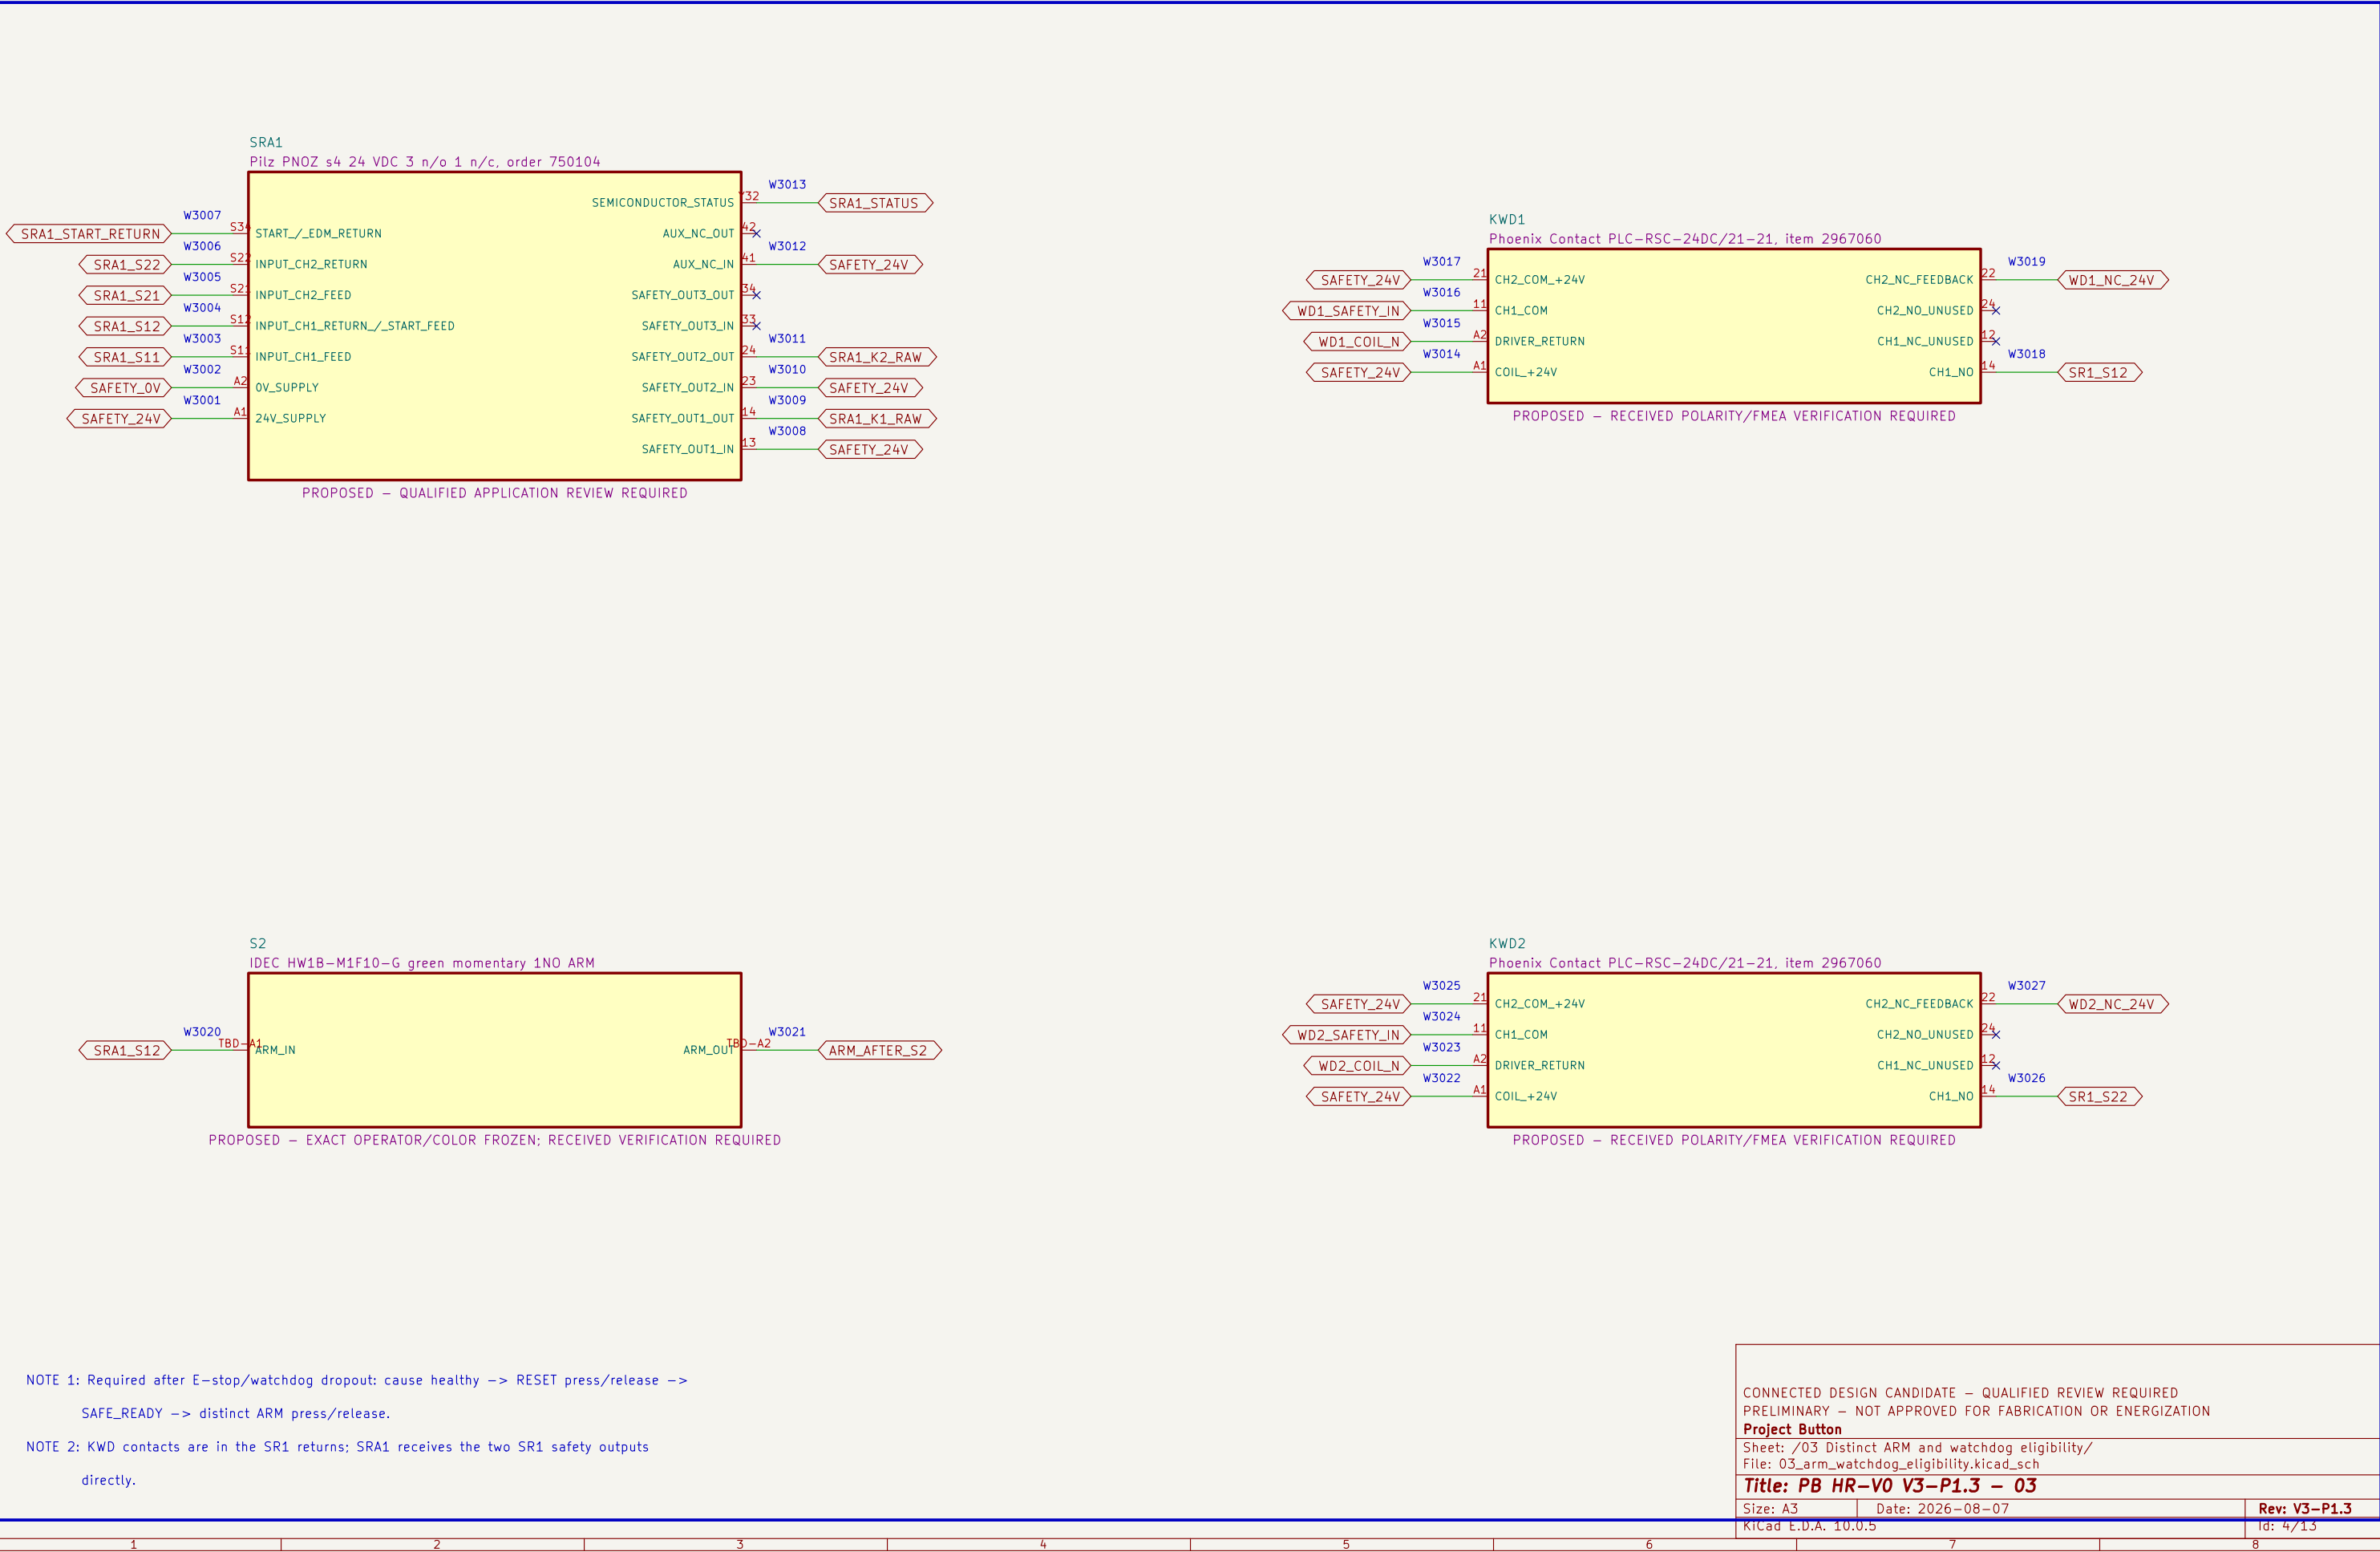

K1 and K2 are distinct final elements; their mirror contacts form the monitored restart return.

K1
Schneider TeSys D LC1D25BD, 24 VDC coil

K2
Schneider TeSys D LC1D25BD, 24 VDC coil

FSR1
SRA1 output-contact protection for K1 coil

FSR2
SRA1 output-contact protection for K2 coil

PROPOSED – CATALOG DC ENVELOPE FOUND; CRITICAL-CURRENT AND APPLICATION CONFIRMATION REQUIRED; TEST REQUIRED

SELECTION REQUIRED

NOTE 1: SRA1 outputs are separately protected before K1 and K2 coils; exact protection remains selection required.

NOTE 2: Loaded DC interruption, suppression behavior, mirror-contact use and coordination require qualified review.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION
Project Button
Sheet: /04 Contactor coils, mirror contacts and EDM/
File: 04_contactor_edm.kicad_sch
Title: PB HR-V0 V3-P1.3 – 04
Size: A3 Date: 2026-08-07 Rev: V3-P1.3
KiCad E.D.A. 10.0.5 Id: 5/13

Diagram illustrating the electrical connections for two contactors, K1 and K2, and their associated protection devices, FSR1 and FSR2.

Contactor K1: Schneider TeSys D LC1D25BD, 24 VDC coil.

- Inputs:** SAFETY_24V (W4004, 13), ARM_AFTER_S2 (W4003, 21), SAFETY_OV (W4002, A2), K1_A1 (W4001, A1).
- Outputs:** AUX_NO_OUT (W4006, 14) to K1_STATUS; MIRROR_NC_OUT (W4005, 22) to EDM_K1_OUT.

Contactor K2: Schneider TeSys D LC1D25BD, 24 VDC coil.

- Inputs:** SAFETY_24V (W4010, 13), EDM_K1_OUT (W4009, 21), SAFETY_OV (W4008, A2), K2_A1 (W4007, A1).
- Outputs:** AUX_NO_OUT (W4012, 14) to K2_STATUS; MIRROR_NC_OUT (W4011, 22) to SRA1_START_RETURN.

Protection Devices:

- FSR1:** SRA1 output-contact protection for K1 coil. Input: SRA1_K1_RAW (W4013, 1). Output: K1_A1 (W4014, 2).
- FSR2:** SRA1 output-contact protection for K2 coil. Input: SRA1_K2_RAW (W4015, 1). Output: K2_A1 (W4016, 2).

Notes:


- NOTE 1: SRA1 outputs are separately protected before K1 and K2 coils; exact protection remains selection required.
- NOTE 2: Loaded DC interruption, suppression behavior, mirror-contact use and coordination require qualified review.

Legend:

- PROPOSED – CATALOG DC ENVELOPE FOUND; CRITICAL-CURRENT AND APPLICATION CONFIRMATION REQUIRED; TEST REQUIRED
- SELECTION REQUIRED

Metadata:

- CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED
- PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION
- Project Button
- Sheet: /04 Contactor coils, mirror contacts and EDM/
- File: 04_contactor_edm.kicad_sch
- Title: PB HR-V0 V3-P1.3 – 04
- Size: A3 | Date: 2026-08-07 | Rev: V3-P1.3
- KiCad E.D.A. 10.0.5 | Id: 5/13

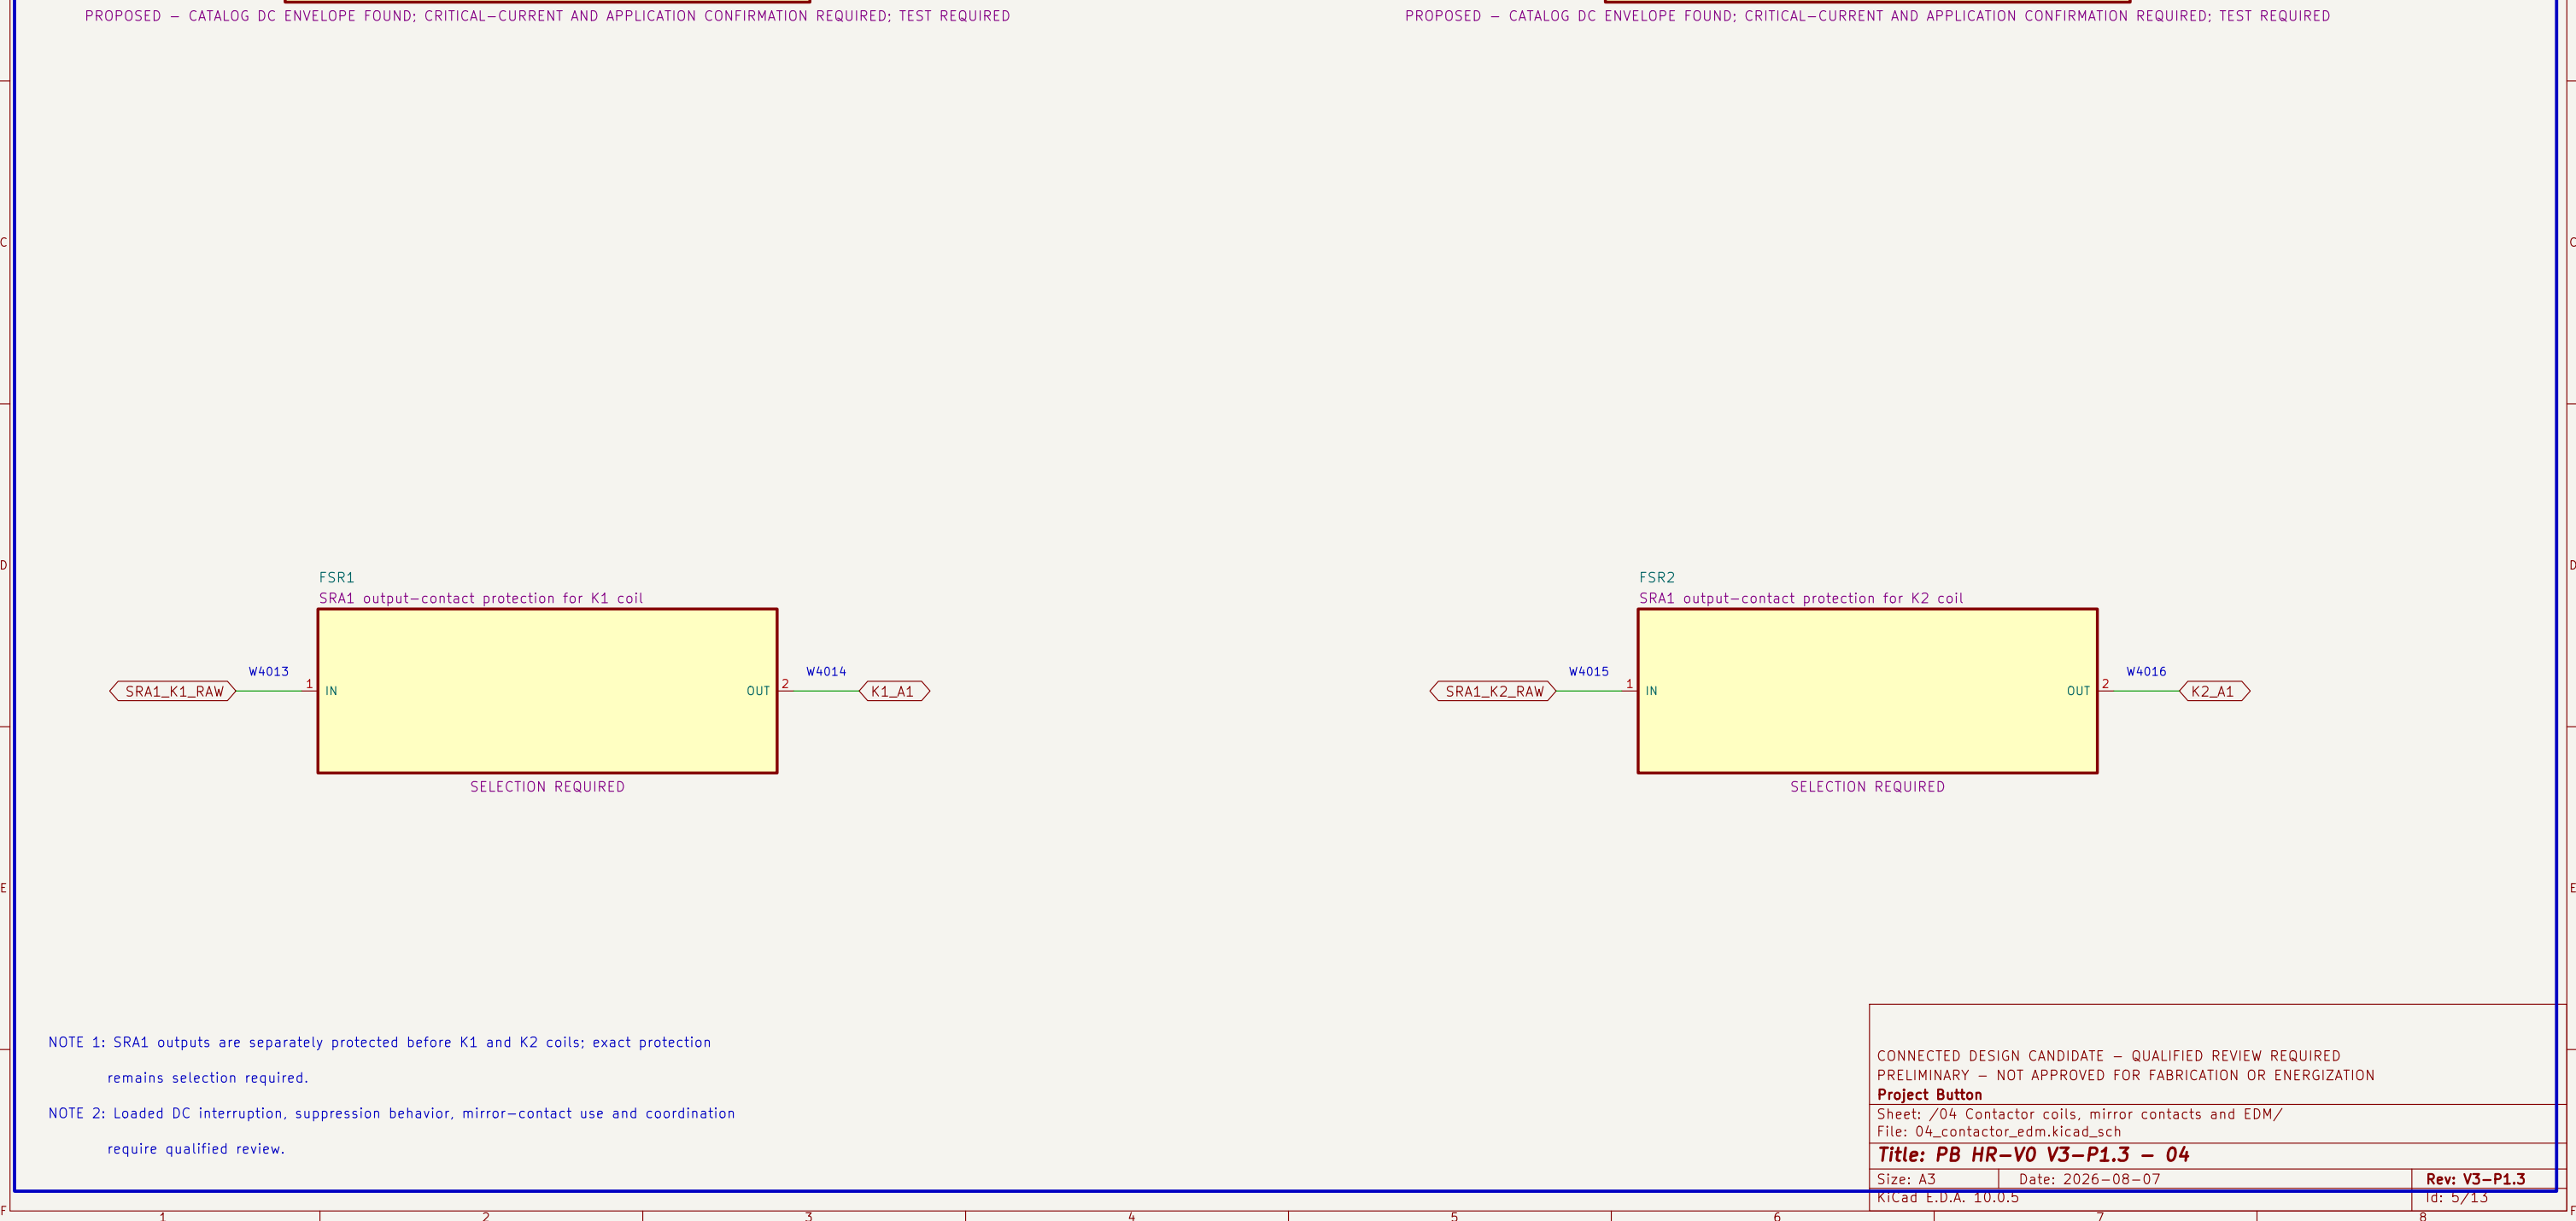

FSR1
SRA1 output-contact protection for K1 coil

FSR2
SRA1 output-contact protection for K2 coil


SELECTION REQUIRED

SELECTION REQUIRED

NOTE 1: SRA1 outputs are separately protected before K1 and K2 coils; exact protection remains selection required.

NOTE 2: Loaded DC interruption, suppression behavior, mirror-contact use and coordination require qualified review.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION Project Button		
Sheet: /04 Contactor coils, mirror contacts and EDM/ File: 04_contactor_edm.kicad_sch		
Title: PB HR-V0 V3-P1.3 – 04		
Size: A3	Date: 2026-08-07	Rev: V3-P1.3
KiCad E.D.A. 10.0.5		Id: 5/13

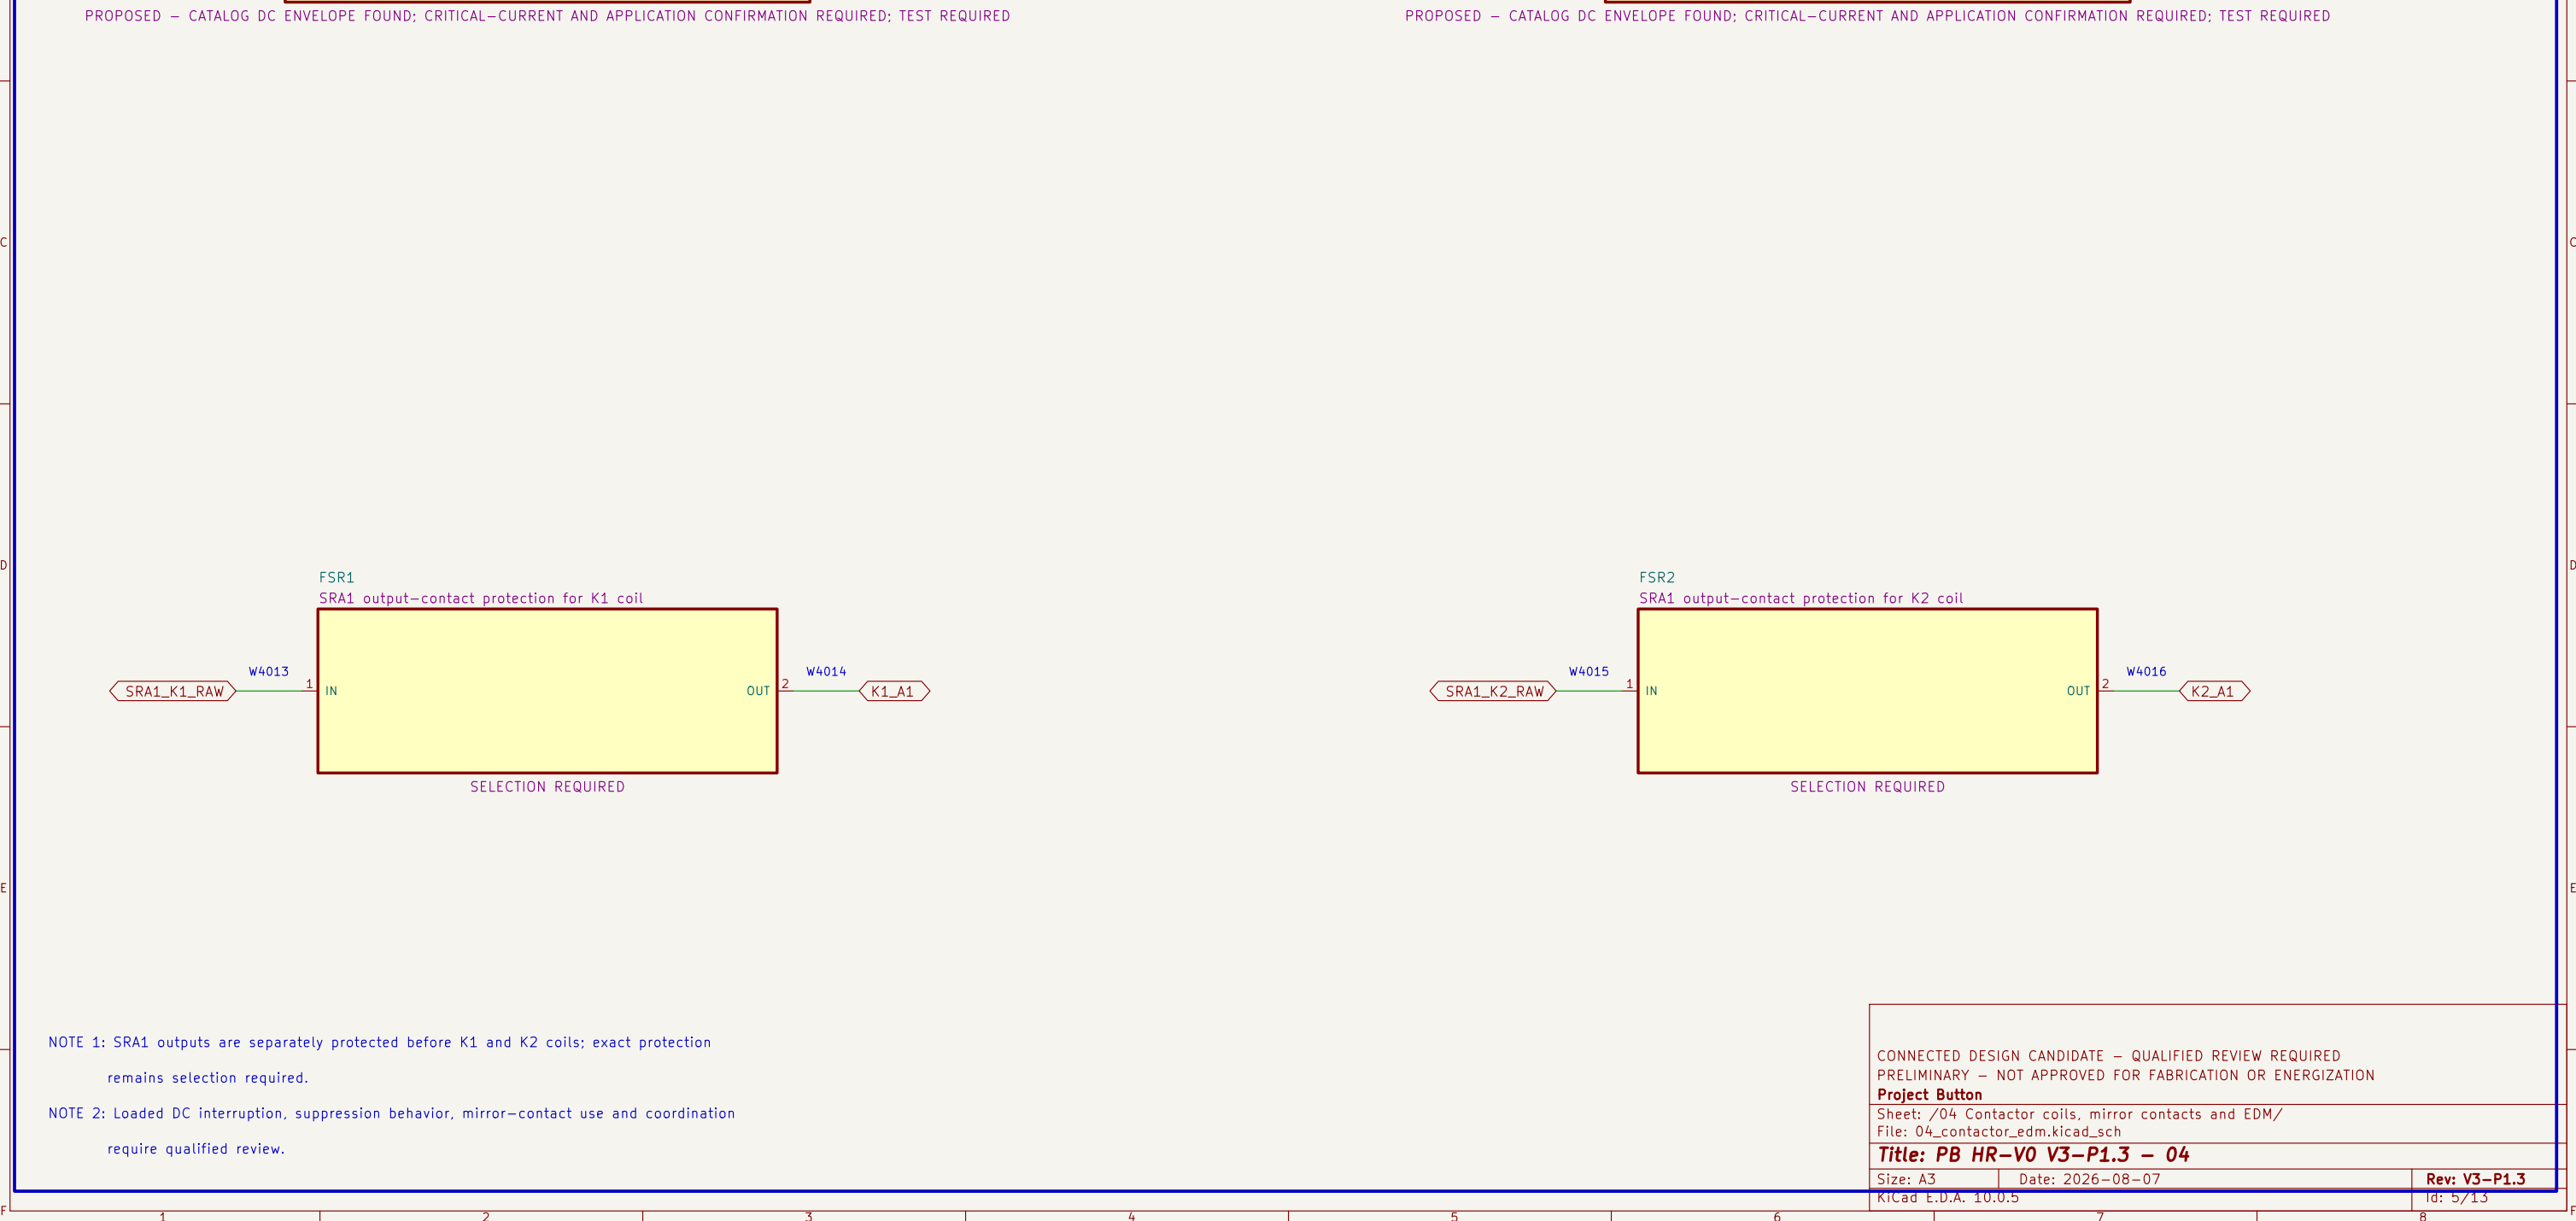

FSR1
SRA1 output-contact protection for K1 coil

W4013 1 IN OUT 2 W4014 K1_A1

SELECTION REQUIRED

FSR2
SRA1 output-contact protection for K2 coil

W4015 1 IN OUT 2 W4016 K2_A1

SELECTION REQUIRED

NOTE 1: SRA1 outputs are separately protected before K1 and K2 coils; exact protection remains selection required.

NOTE 2: Loaded DC interruption, suppression behavior, mirror-contact use and coordination require qualified review.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION Project Button		
Sheet: /04 Contactor coils, mirror contacts and EDM/ File: 04_contactor_edm.kicad_sch		
Title: PB HR–V0 V3–P1.3 – 04		
Size: A3	Date: 2026–08–07	Rev: V3–P1.3
KiCad E.D.A. 10.0.5		Id: 5/13



NOTE 1: SRA1 outputs are separately protected before K1 and K2 coils; exact protection remains selection required.

NOTE 2: Loaded DC interruption, suppression behavior, mirror-contact use and coordination require qualified review.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED	
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION	
Project Button	
Sheet: /04 Contactor coils, mirror contacts and EDM/ File: 04_contactor_edm.kicad_sch	
Title: PB HR-V0 V3-P1.3 – 04	
Size: A3	Date: 2026-08-07
KiCad E.D.A. 10.0.5	Rev: V3-P1.3 Id: 5/13



NOTE 1: SRA1 outputs are separately protected before K1 and K2 coils; exact protection remains selection required.

NOTE 2: Loaded DC interruption, suppression behavior, mirror-contact use and coordination require qualified review.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED	
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION	
Project Button	
Sheet: /04 Contactor coils, mirror contacts and EDM/ File: 04_contactor_edm.kicad_sch	
Title: PB HR-V0 V3-P1.3 – 04	
Size: A3	Date: 2026-08-07
KiCad E.D.A. 10.0.5	Id: 5/13

NOTE 2: Loaded DC interruption, suppression behavior, mirror-contact use and coordination require qualified review.							Project Button Sheet: /04 Contactor coils, mirror contacts and EDM/ File: 04_contactor_edm.kicad_sch Title: PB HR-V0 V3-P1.3 - 04 Size: A3 Date: 2026-08-07 Rev: V3-P1.3 KiCad E.D.A. 10.0.5 Id: 5/13	
---	--	--	--	--	--	--	---	--

Size: A3 Date: 2026-08-07 Rev: V3-P1.3	
KiCad E.D.A. 10.0.5 Id: 5/13	

NOTE 2: Loaded DC interruption, suppression behavior, mirror-contact use and coordination require qualified review.							Project Button Sheet: /04 Contactor coils, mirror contacts and EDM/ File: 04_contactor_edm.kicad_sch Title: PB HR-V0 V3-P1.3 - 04 Size: A3 Date: 2026-08-07 Rev: V3-P1.3 KiCad E.D.A. 10.0.5 Id: 5/13	
---	--	--	--	--	--	--	---	--

NOTE 2: Loaded DC interruption, suppression behavior, mirror-contact use and coordination require qualified review.							Sheet: /04 Contactor coils, mirror contacts and EDM/ File: 04_contactor_edm.kicad_sch	
							Title: PB HR-V0 V3-P1.3 - 04	
							Size: A3	Rev: V3-P1.3
							Date: 2026-08-07	
							KiCad E.D.A. 10.0.5	Id: 5/13

require qualified review.							Title: PB HR-V0 V3-P1.3 – 04 Size: A3 Date: 2026-08-07 Rev: V3-P1.3 KiCad E.D.A. 10.0.5 Id: 5/13		
---------------------------	--	--	--	--	--	--	--	--	--

	Size: A3	Date: 2026-08-07		Rev: V3-P1.3
KiCad E.D.A. 10.0.5				Id: 5/13





1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464

05 Redundant actuator–power interruption

Source protection, service disconnect and all three poles of K1 then K2 are represented in series.

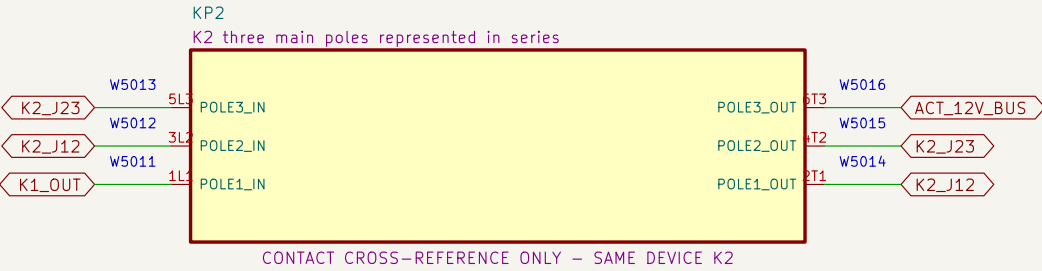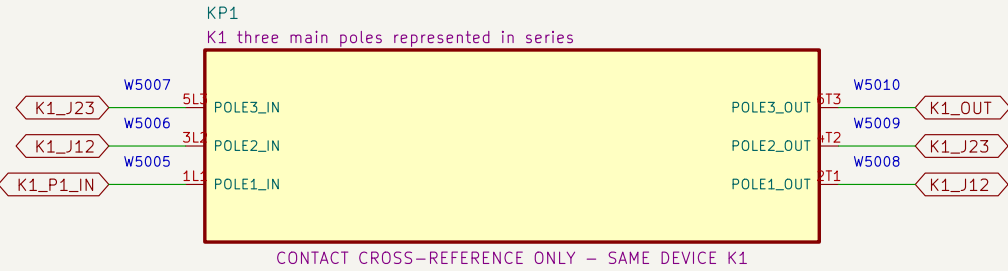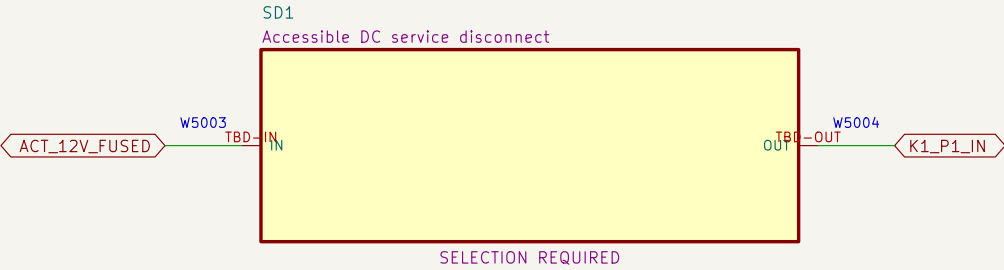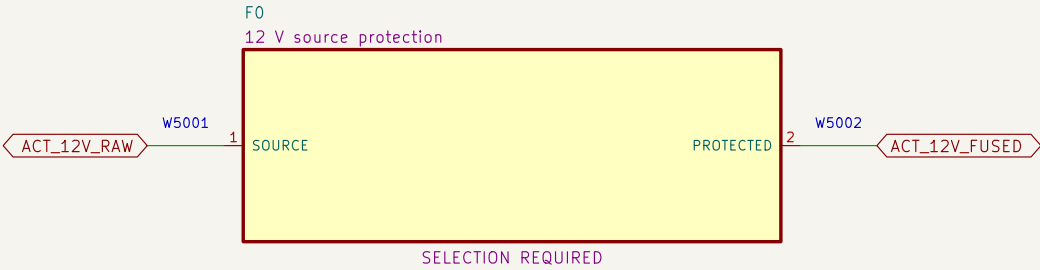

NOTE 1: Series jumpers: K1 2T1→3L2, 4T2→5L3, 6T3→K2 1L1; repeat through K2 to ACT_12V_BUS.

NOTE 2: No fuse, disconnect, conductor, connector or contactor application is released without fault–current evidence.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION
Project Button




Sheet: /05 Redundant actuator–power interruption/
File: 05_actuator_interruption.kicad_sch

Title: PB HR–V0 V3–P1.3 – 05

Size: A3	Date: 2026–08–07	Rev: V3–P1.3
KiCad E.D.A. 10.0.5		Id: 6/13

06 Protected actuator branches and central DYNAMIXEL star injection

Each actuator has a separate protected VDD branch; U2D2 pin 2 and inter-actuator VDD paths are omitted.

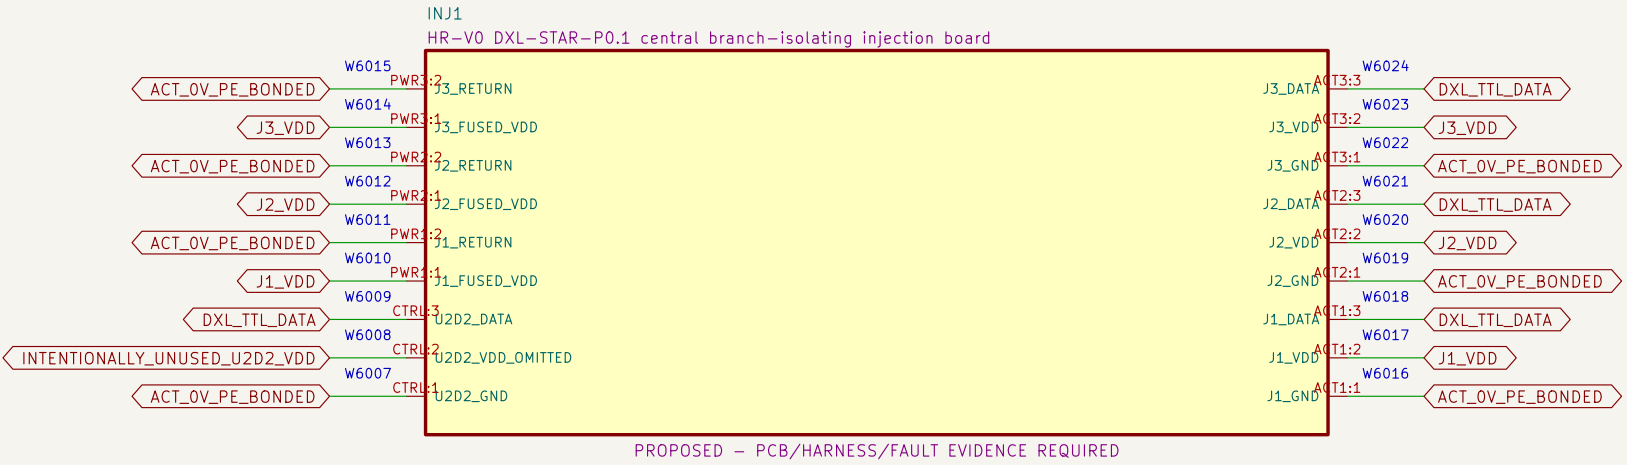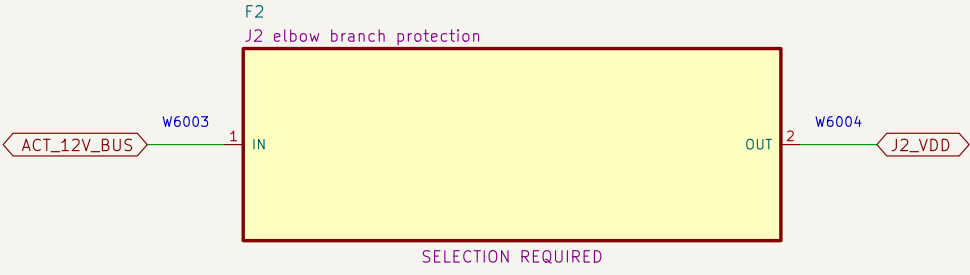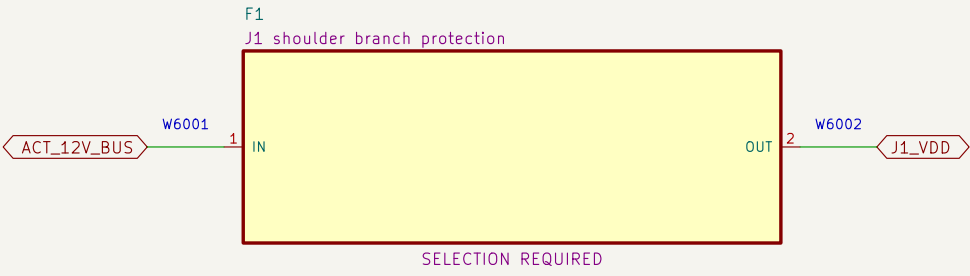

NOTE 1: INJ1 is a fixed central star; U2D2 pin 2 is unrouted and J1/J2/J3 positive rails never join.

NOTE 2: Exact actuator cables, branch returns, enclosure, continuity, isolation, signal-integrity, pull and no-backfeed tests remain release gates.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION


Project Button
Sheet: /06 Protected actuator branches and central DYNAMIXEL star injection/
File: 06_branches_and_injection.kicad_sch

Title: PB HR-V0 V3-P1.3 – 06

Size: A3	Date: 2026-08-07	Rev: V3-P1.3
KiCad E.D.A. 10.0.5		Id: 7/13


07 Independent watchdog power, controller and drivers

The ordinary watchdog controller and drivers receive no safety–integrity credit by assertion.

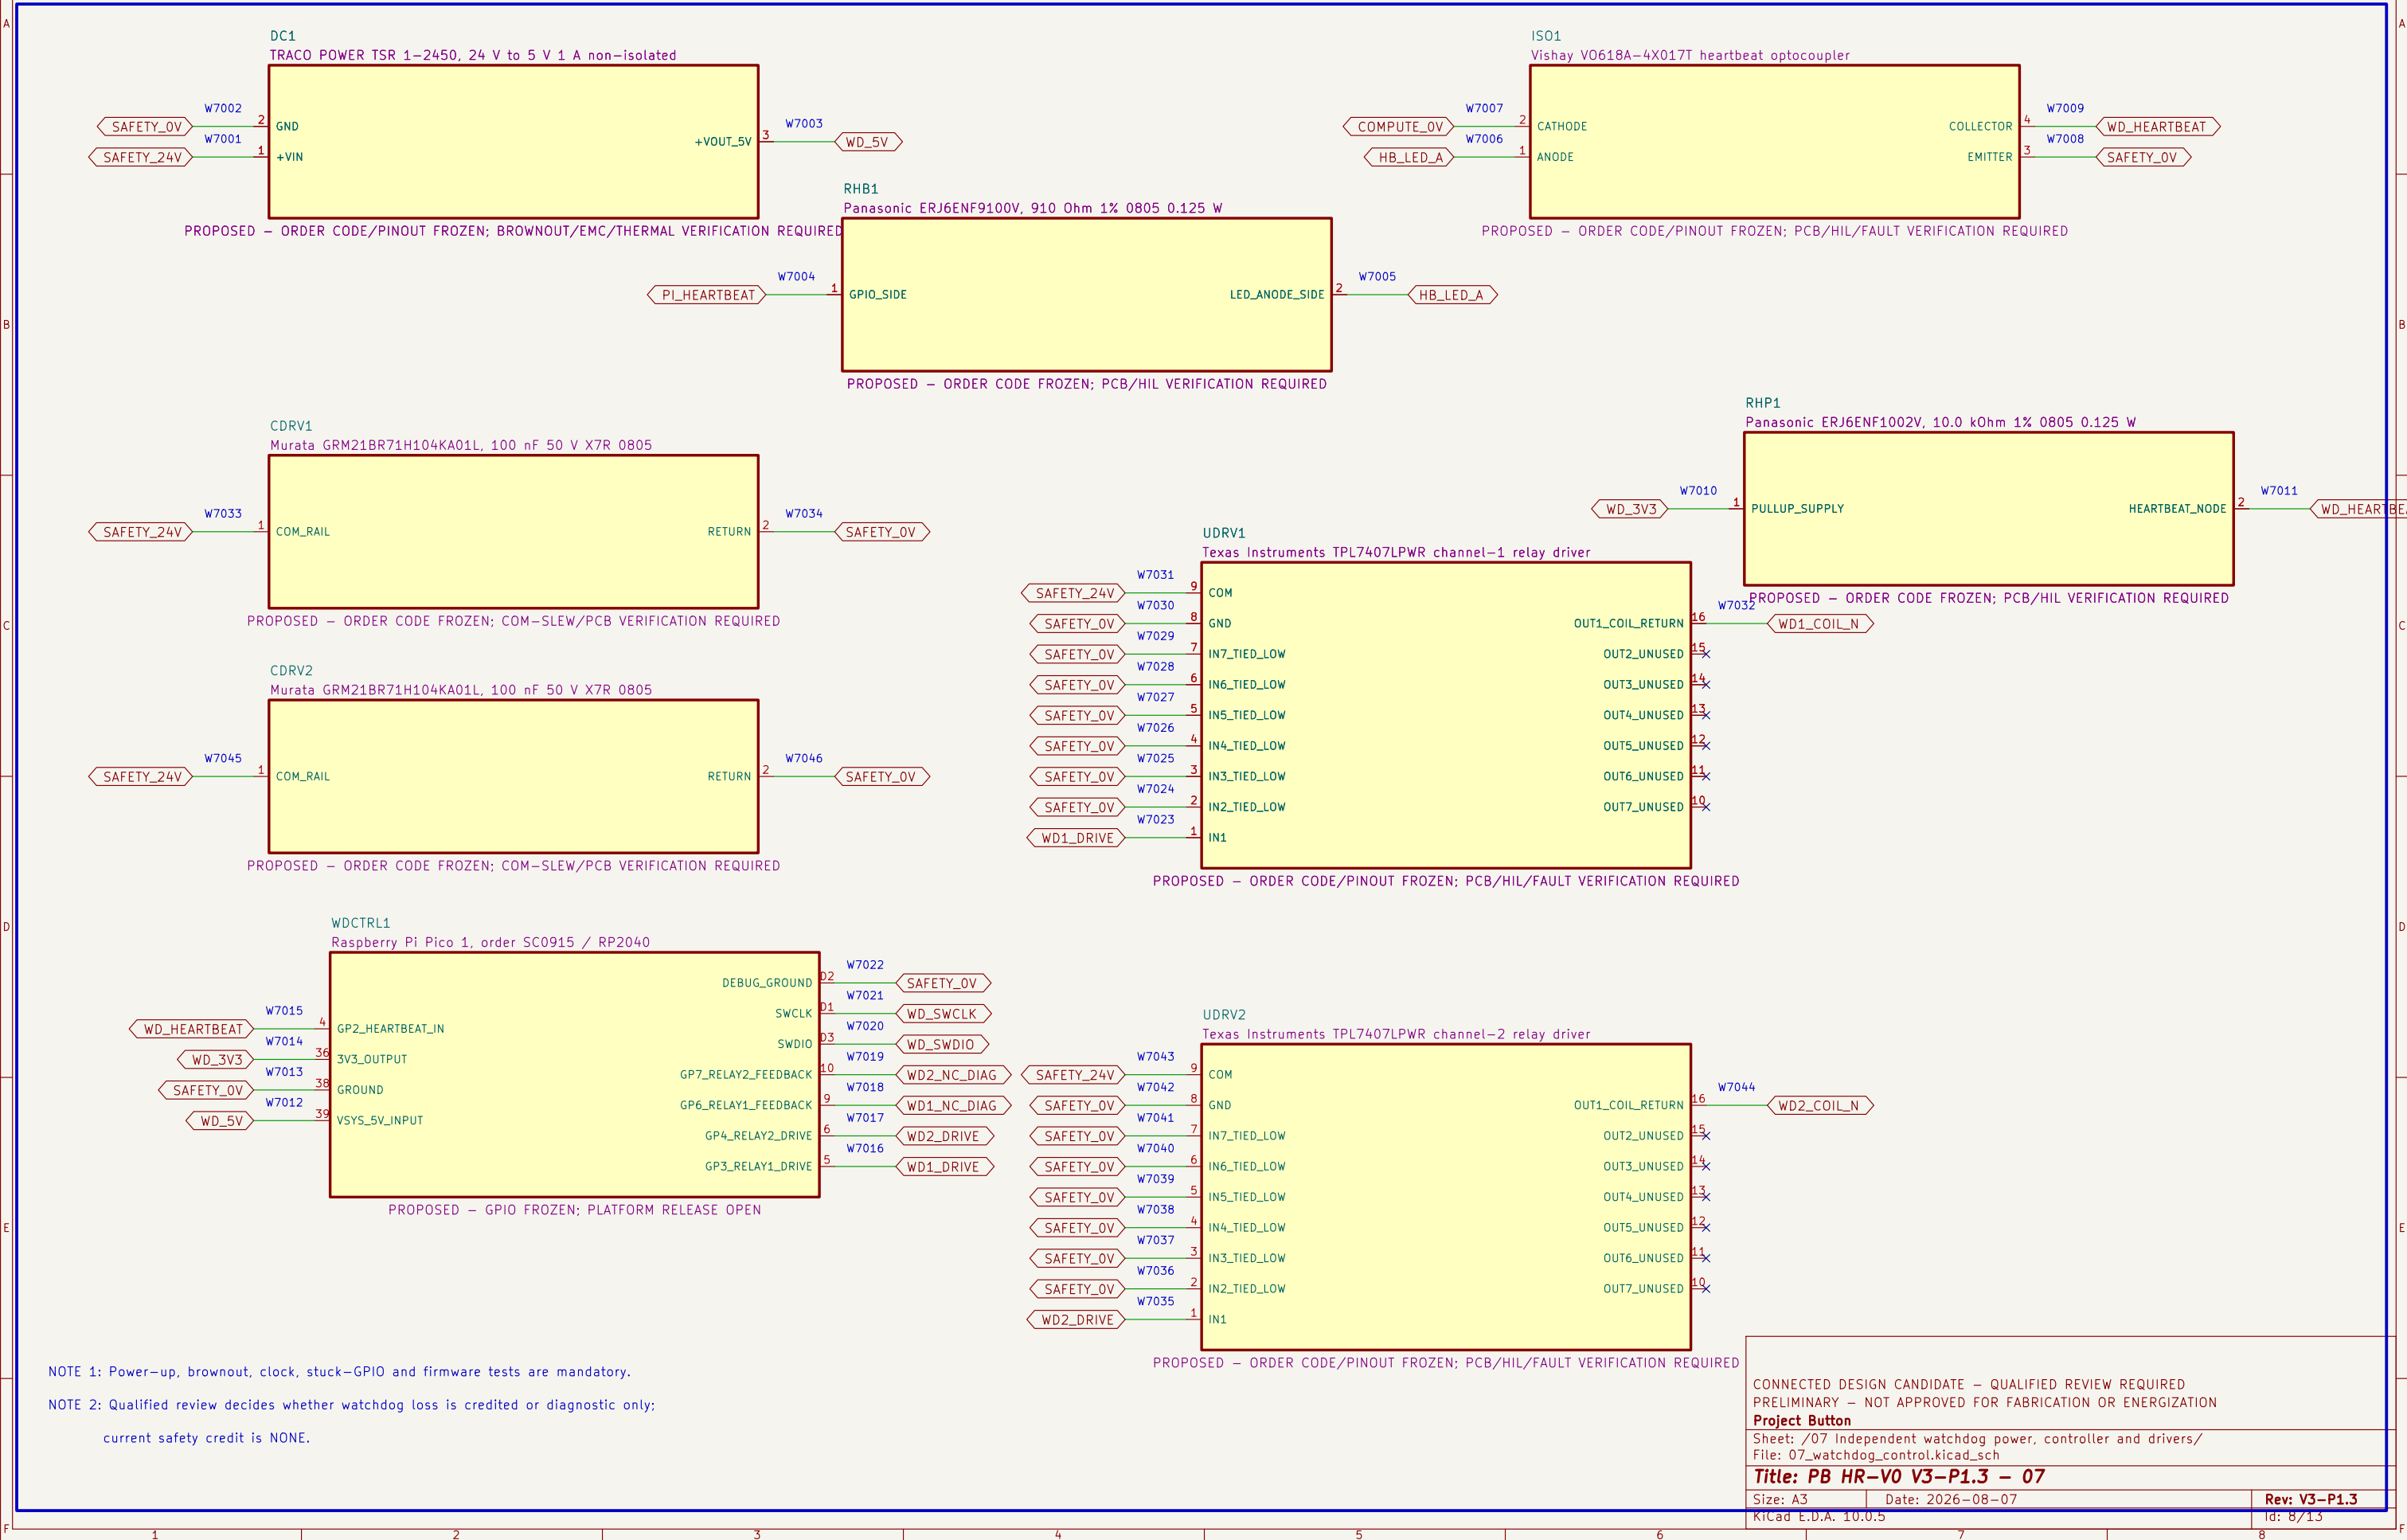

08 Calculated dual-channel 24 V watchdog feedback

ISO1212DBQ converts both relay NC diagnostics to default-low 3.3 V logic; no isolation or safety credit is claimed.

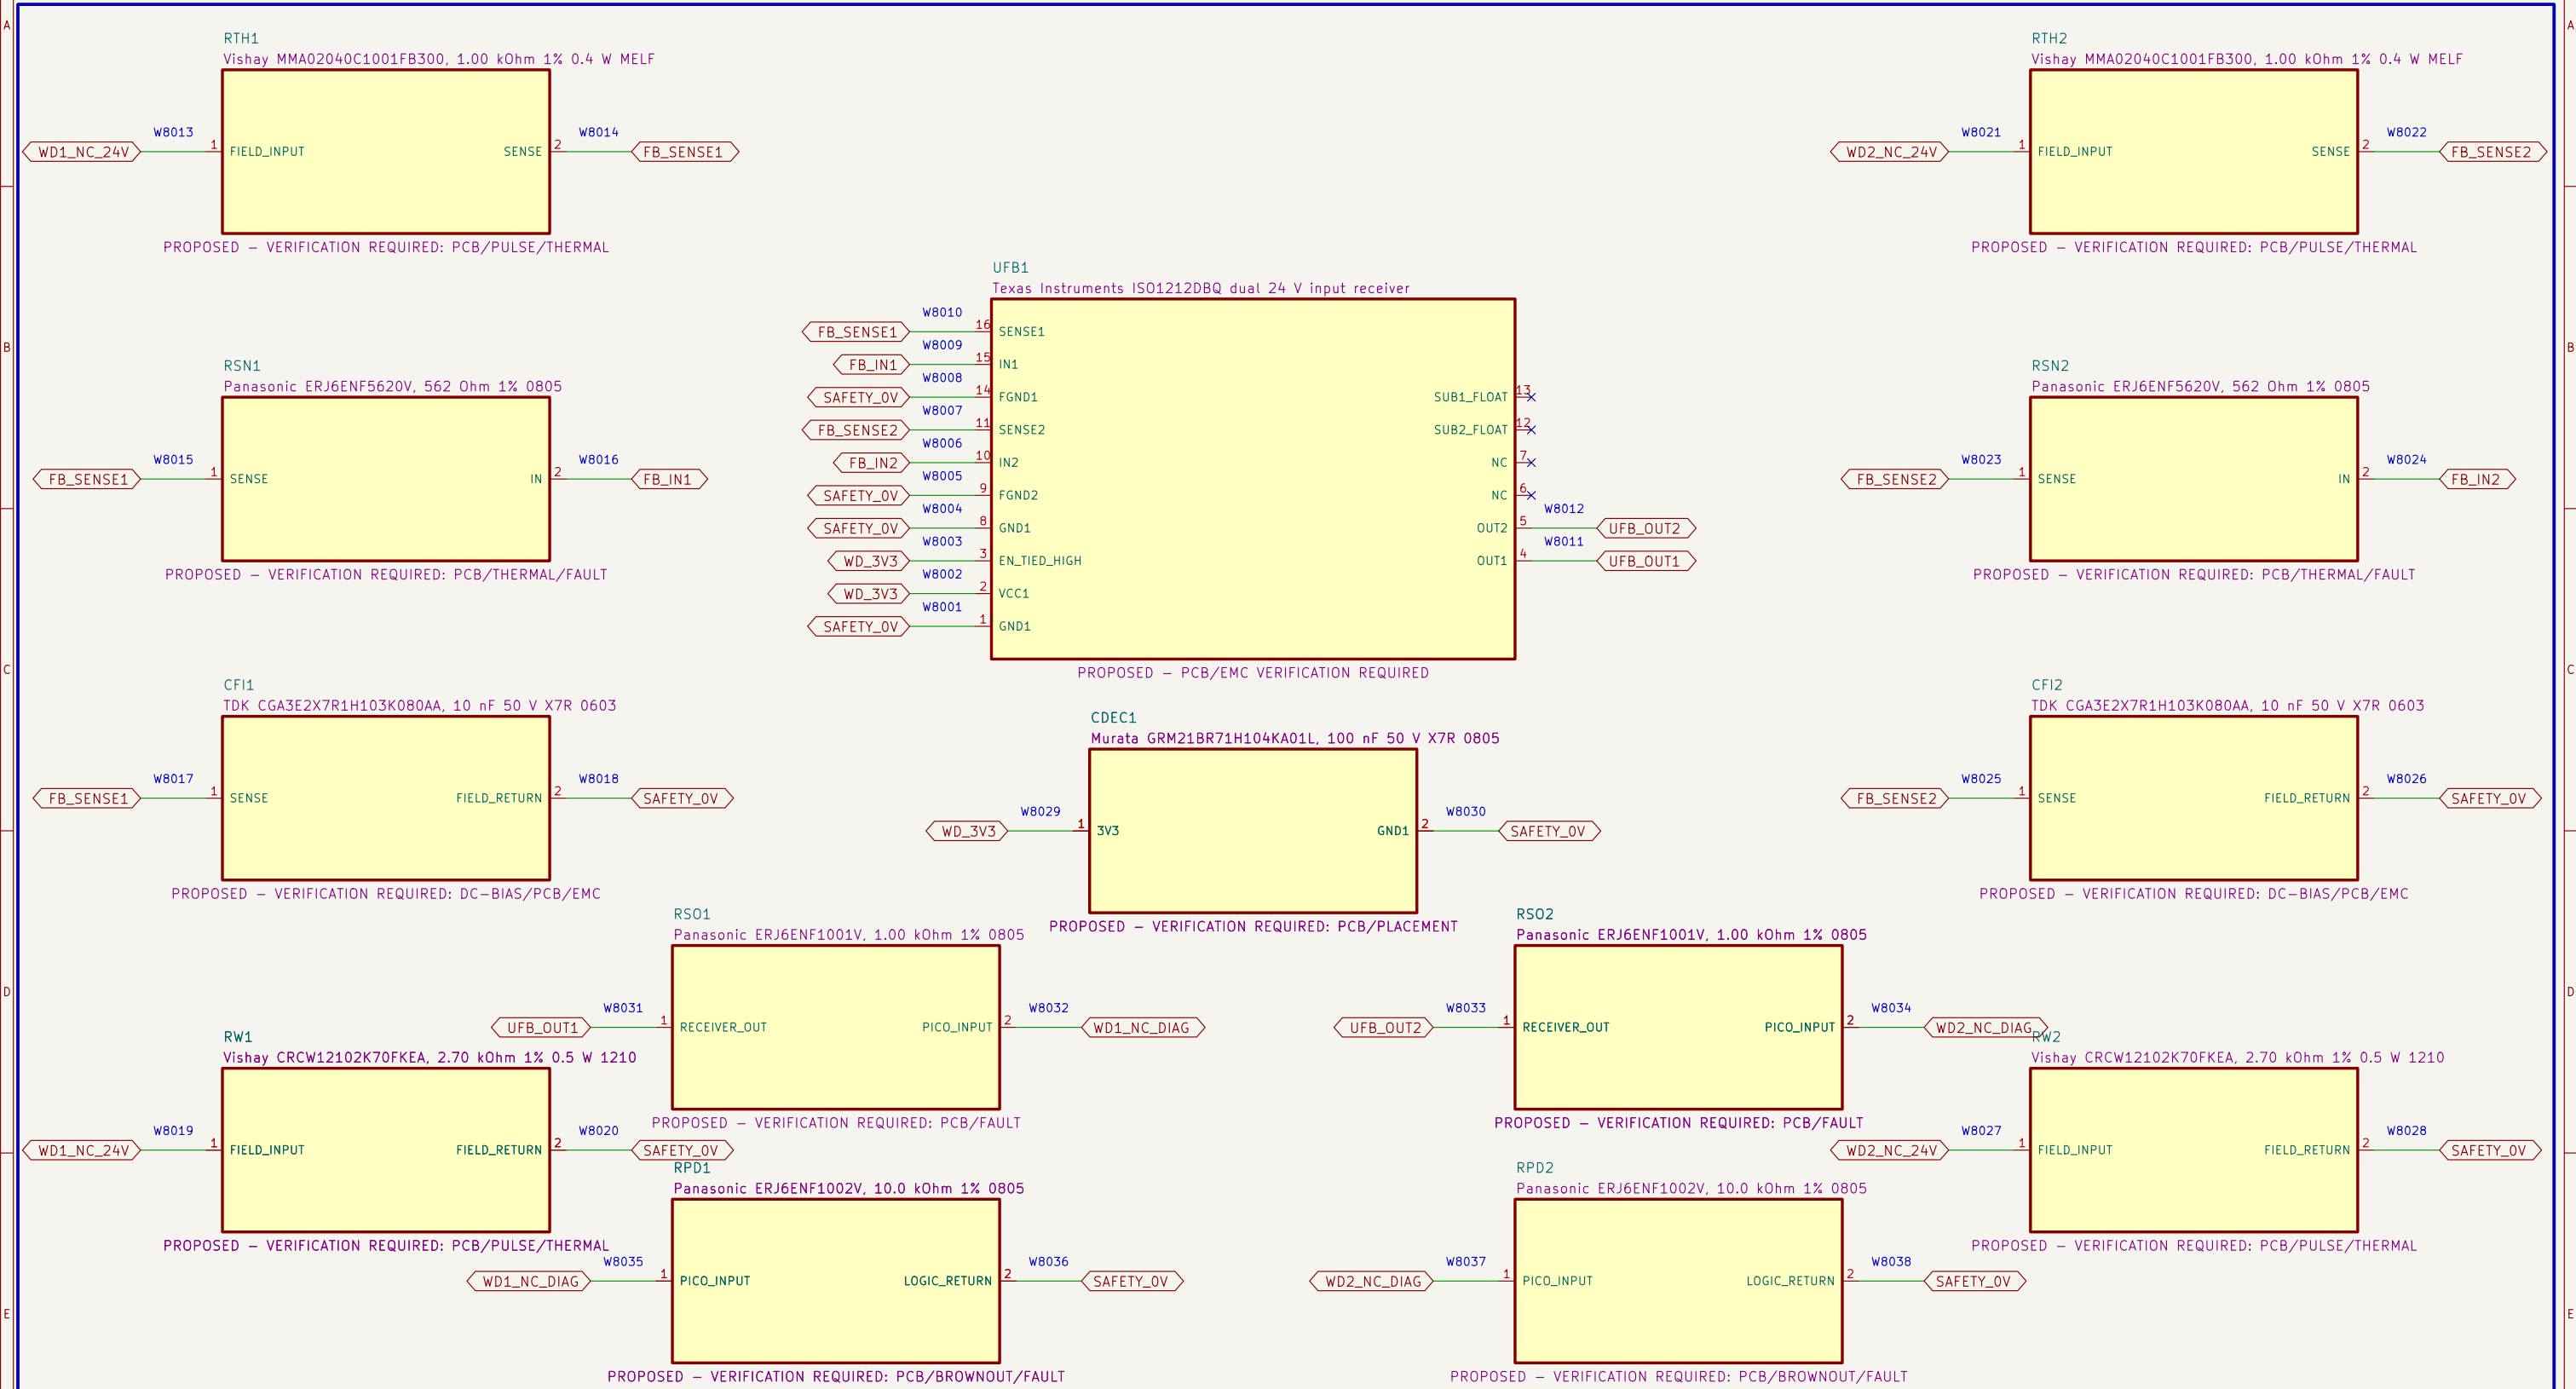

NOTE 1: Type-3 values: RTHR=1.00 kOhm, RSENSE=562 Ohm, CIN=10 nF; calculated wetting load is 2.70 kOhm 1% 0.5 W per channel.

NOTE 2: Both grounds are SAFETY_OV; the ISO1212 barrier is not credited. Passive identities are frozen; PCB, derating, EMC and fault tests remain open.




CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION
Project Button
Sheet: /08 Calculated dual-channel 24 V watchdog feedback/
File: 08_watchdog_feedback_interface.kicad_sch

Title: PB HR-V0 V3-P1.3 – 08

Size: A3	Date: 2026-08-07	Rev: V3-P1.3
KiCad E.D.A. 10.0.5		Id: 9/13

09 Compute, debug and control terminals

High-level compute and diagnostic wiring have no authority to bypass or restore the safety chain.

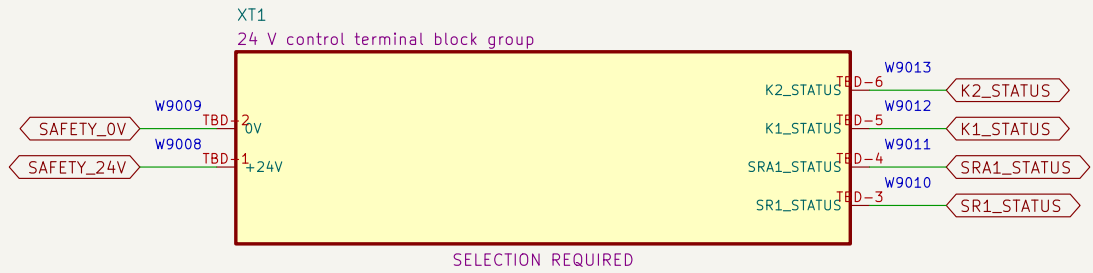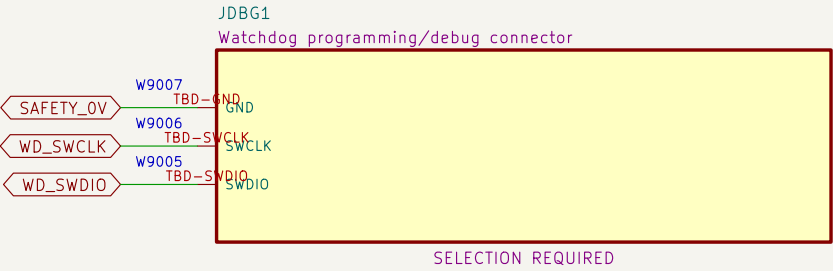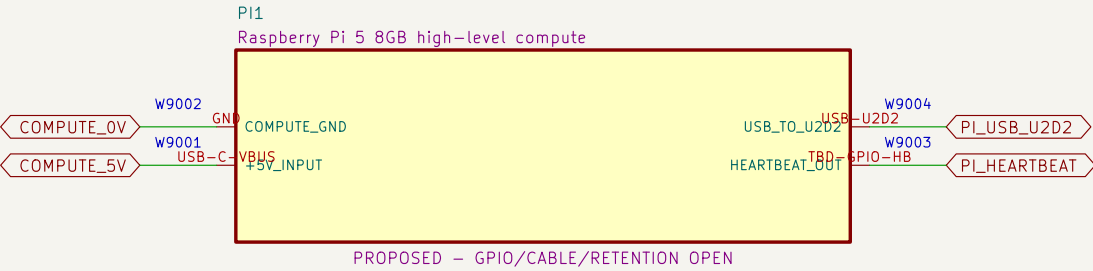


NOTE 1: Programming/debug connections must not enable outputs during operation.

NOTE 2: Terminal family, markers, conductor range, torque and enclosure layout remain selection required.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED		
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION		
Project Button		
Sheet: /09 Compute, debug and control terminals/ File: 09_compute_and_control_terminals.kicad_sch		
Title: PB HR-V0 V3-P1.3 – 09		
Size: A3	Date: 2026-08-07	Rev: V3-P1.3
KiCad E.D.A. 10.0.5	Id: 10/13	




10 U2D2, actuator ports and bonding boundary

The U2D2 cable carries DATA and GND only; protected VDD is injected at each actuator.

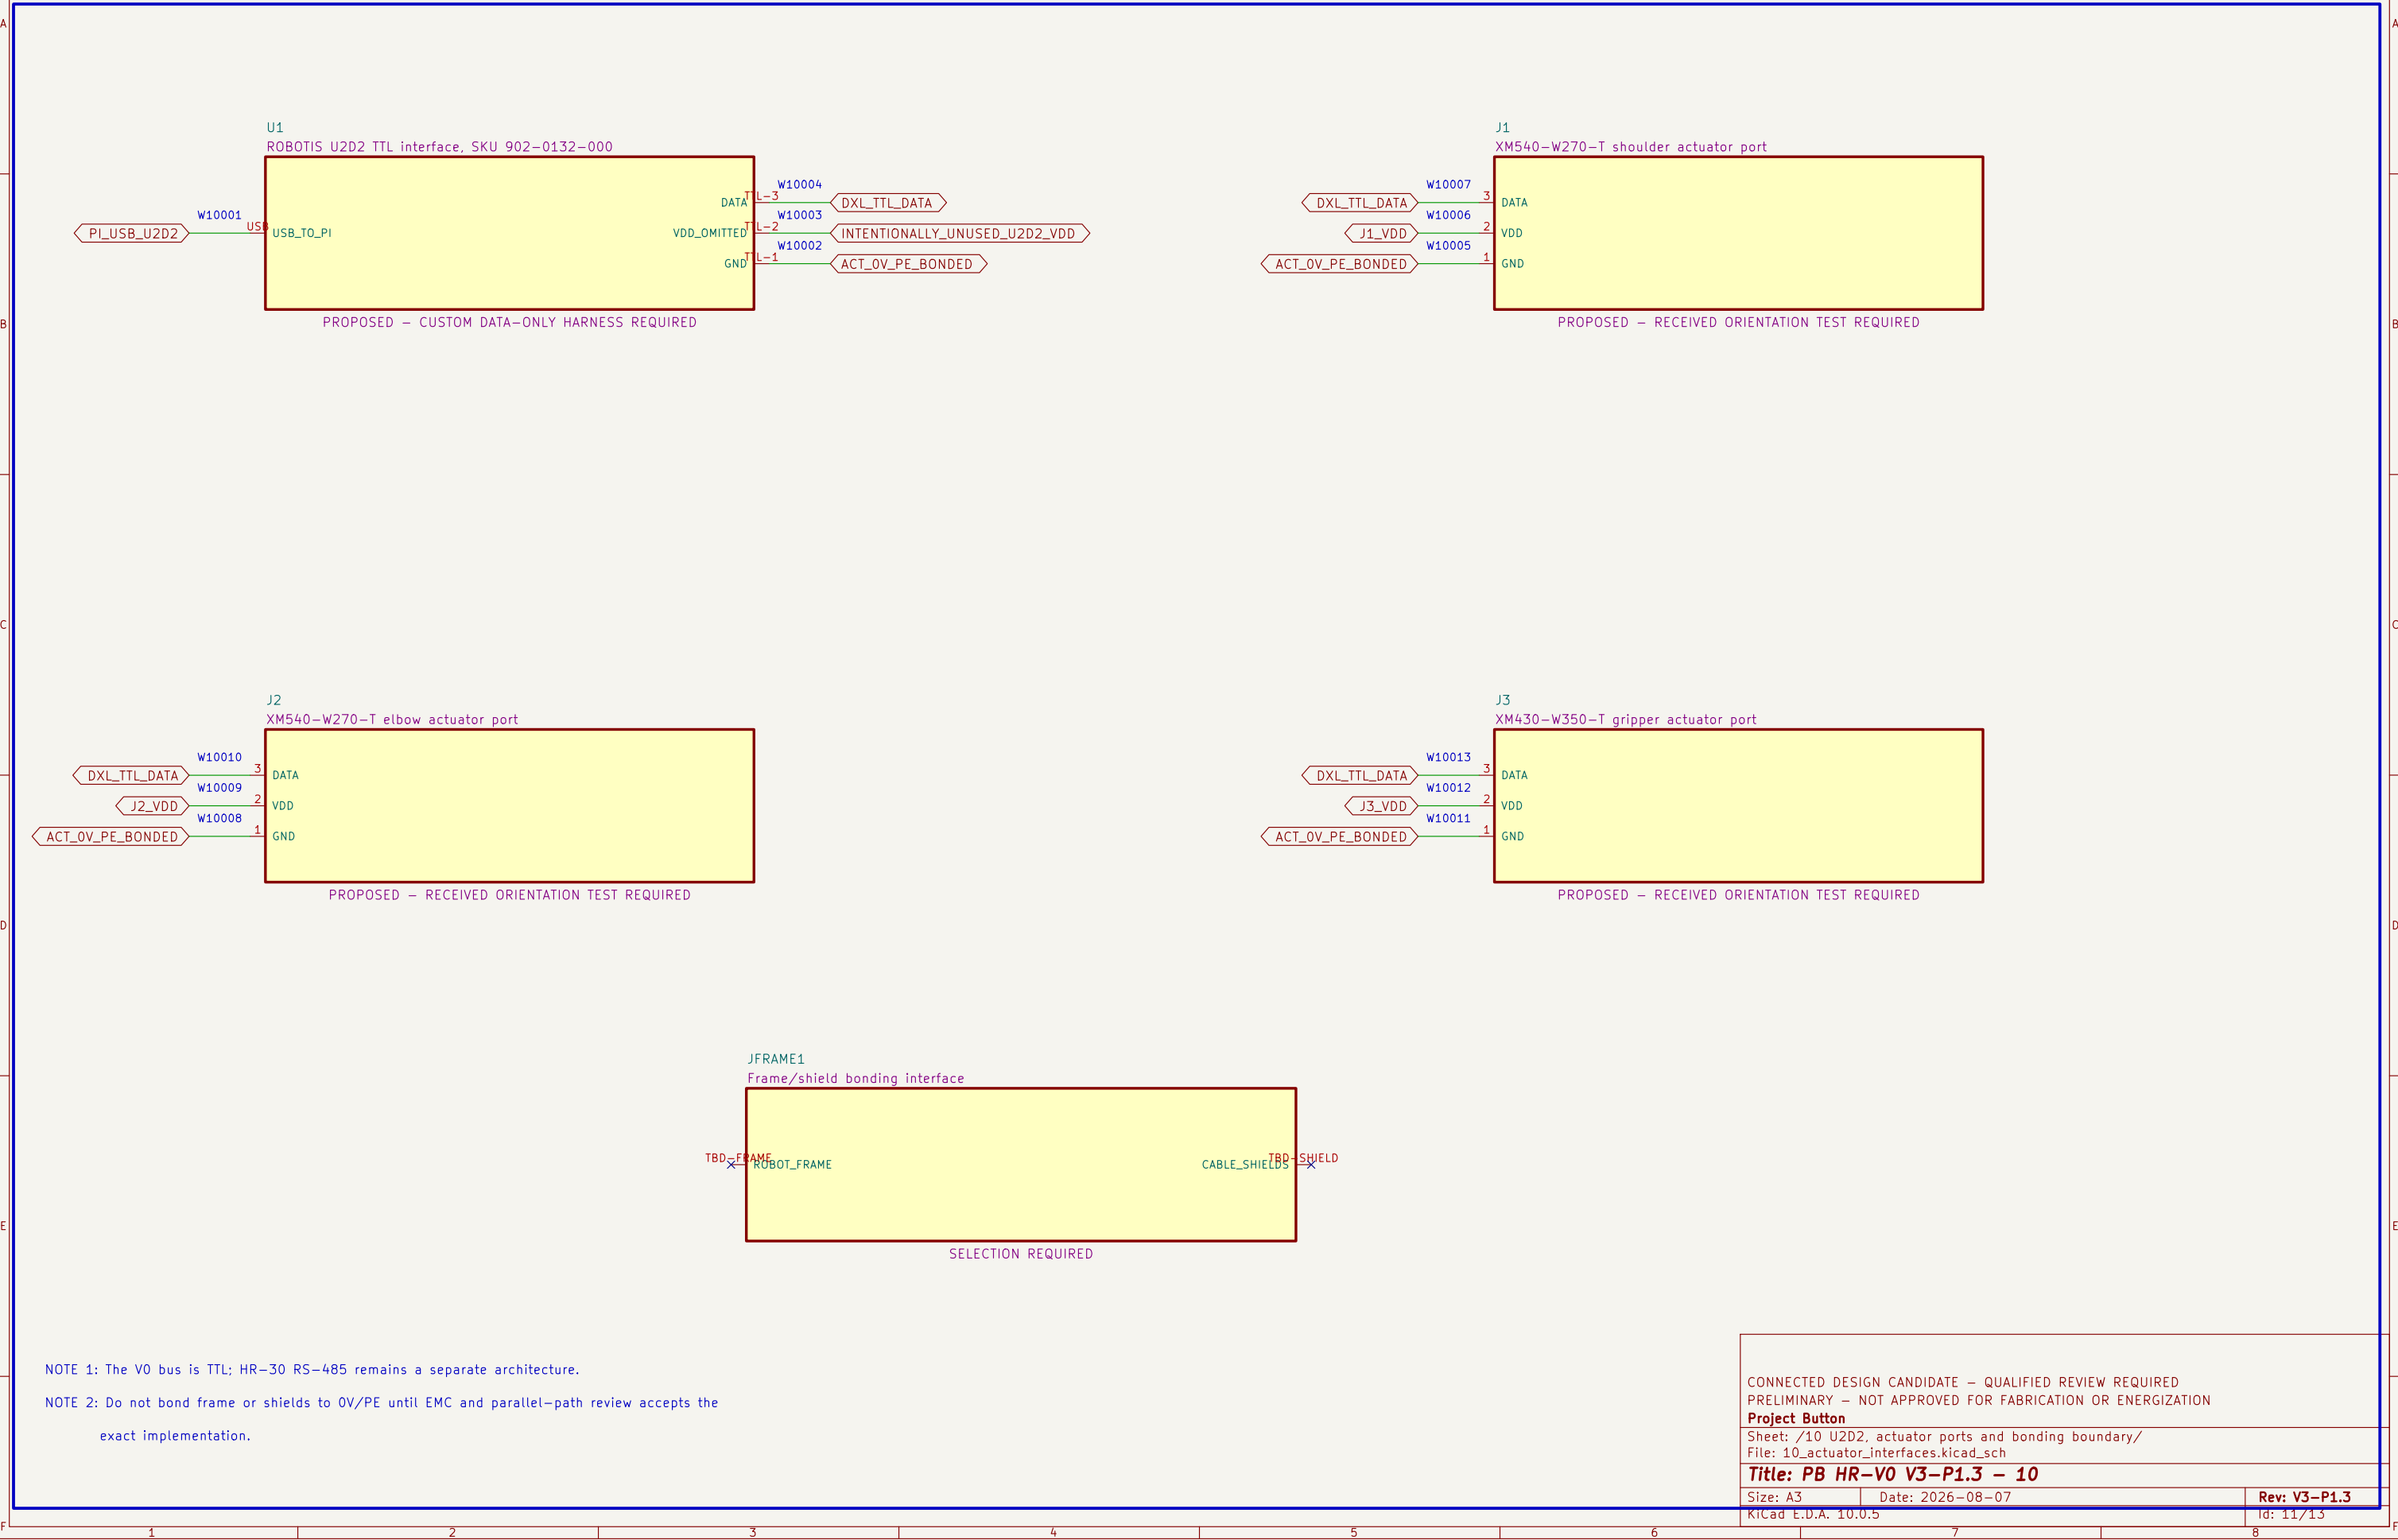

11 Watchdog PCB external connectors

Exact PCB terminal–block candidates and project pin allocations define the board boundary; harness release remains open.

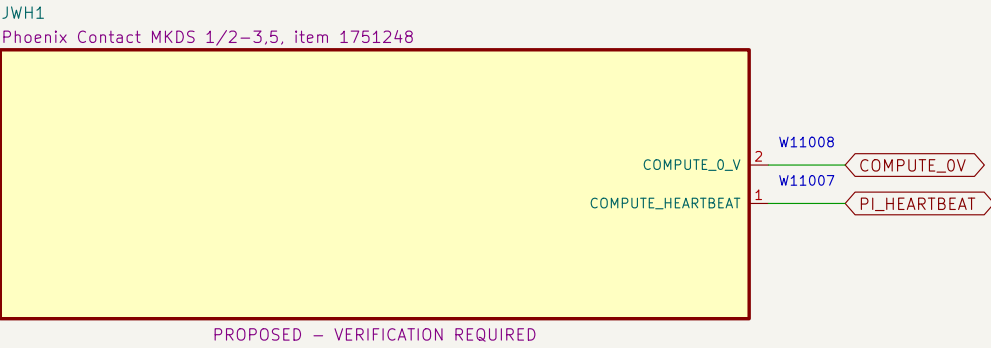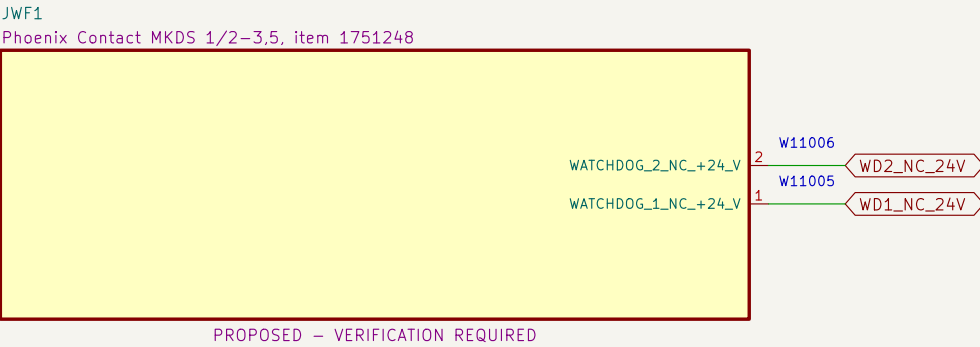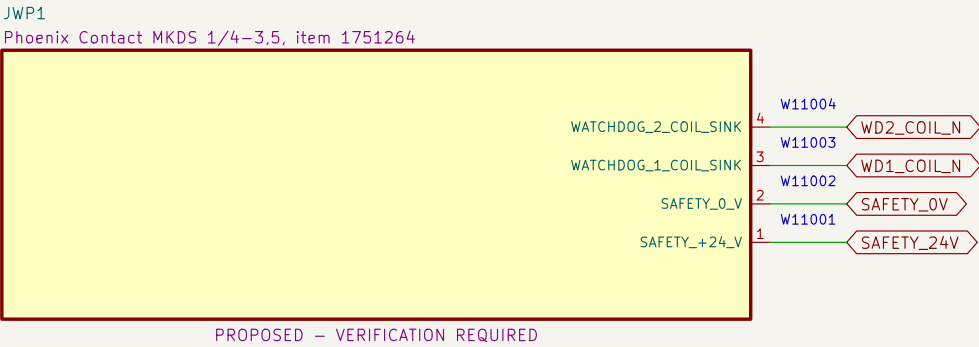


NOTE 1: Terminal numbering follows the PCB footprint and must be confirmed against received parts before wiring.

NOTE 2: Nominal terminal ratings do not release branch protection, conductor, ferrule, harness, enclosure or thermal application.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED		
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION		
Project Button		
Sheet: /11 Watchdog PCB external connectors/		
File: 11_watchdog_pcb_connectors.kicad_sch		
Title: PB HR–V0 V3–P1.3 – 11		
Size: A3	Date: 2026–08–07	Rev: V3–P1.3
KiCad E.D.A. 10.0.5	Id: 12/13	

12 Watchdog PCB test access

Exact clip-compatible test terminals expose controlled nodes without granting safety or operating authority.

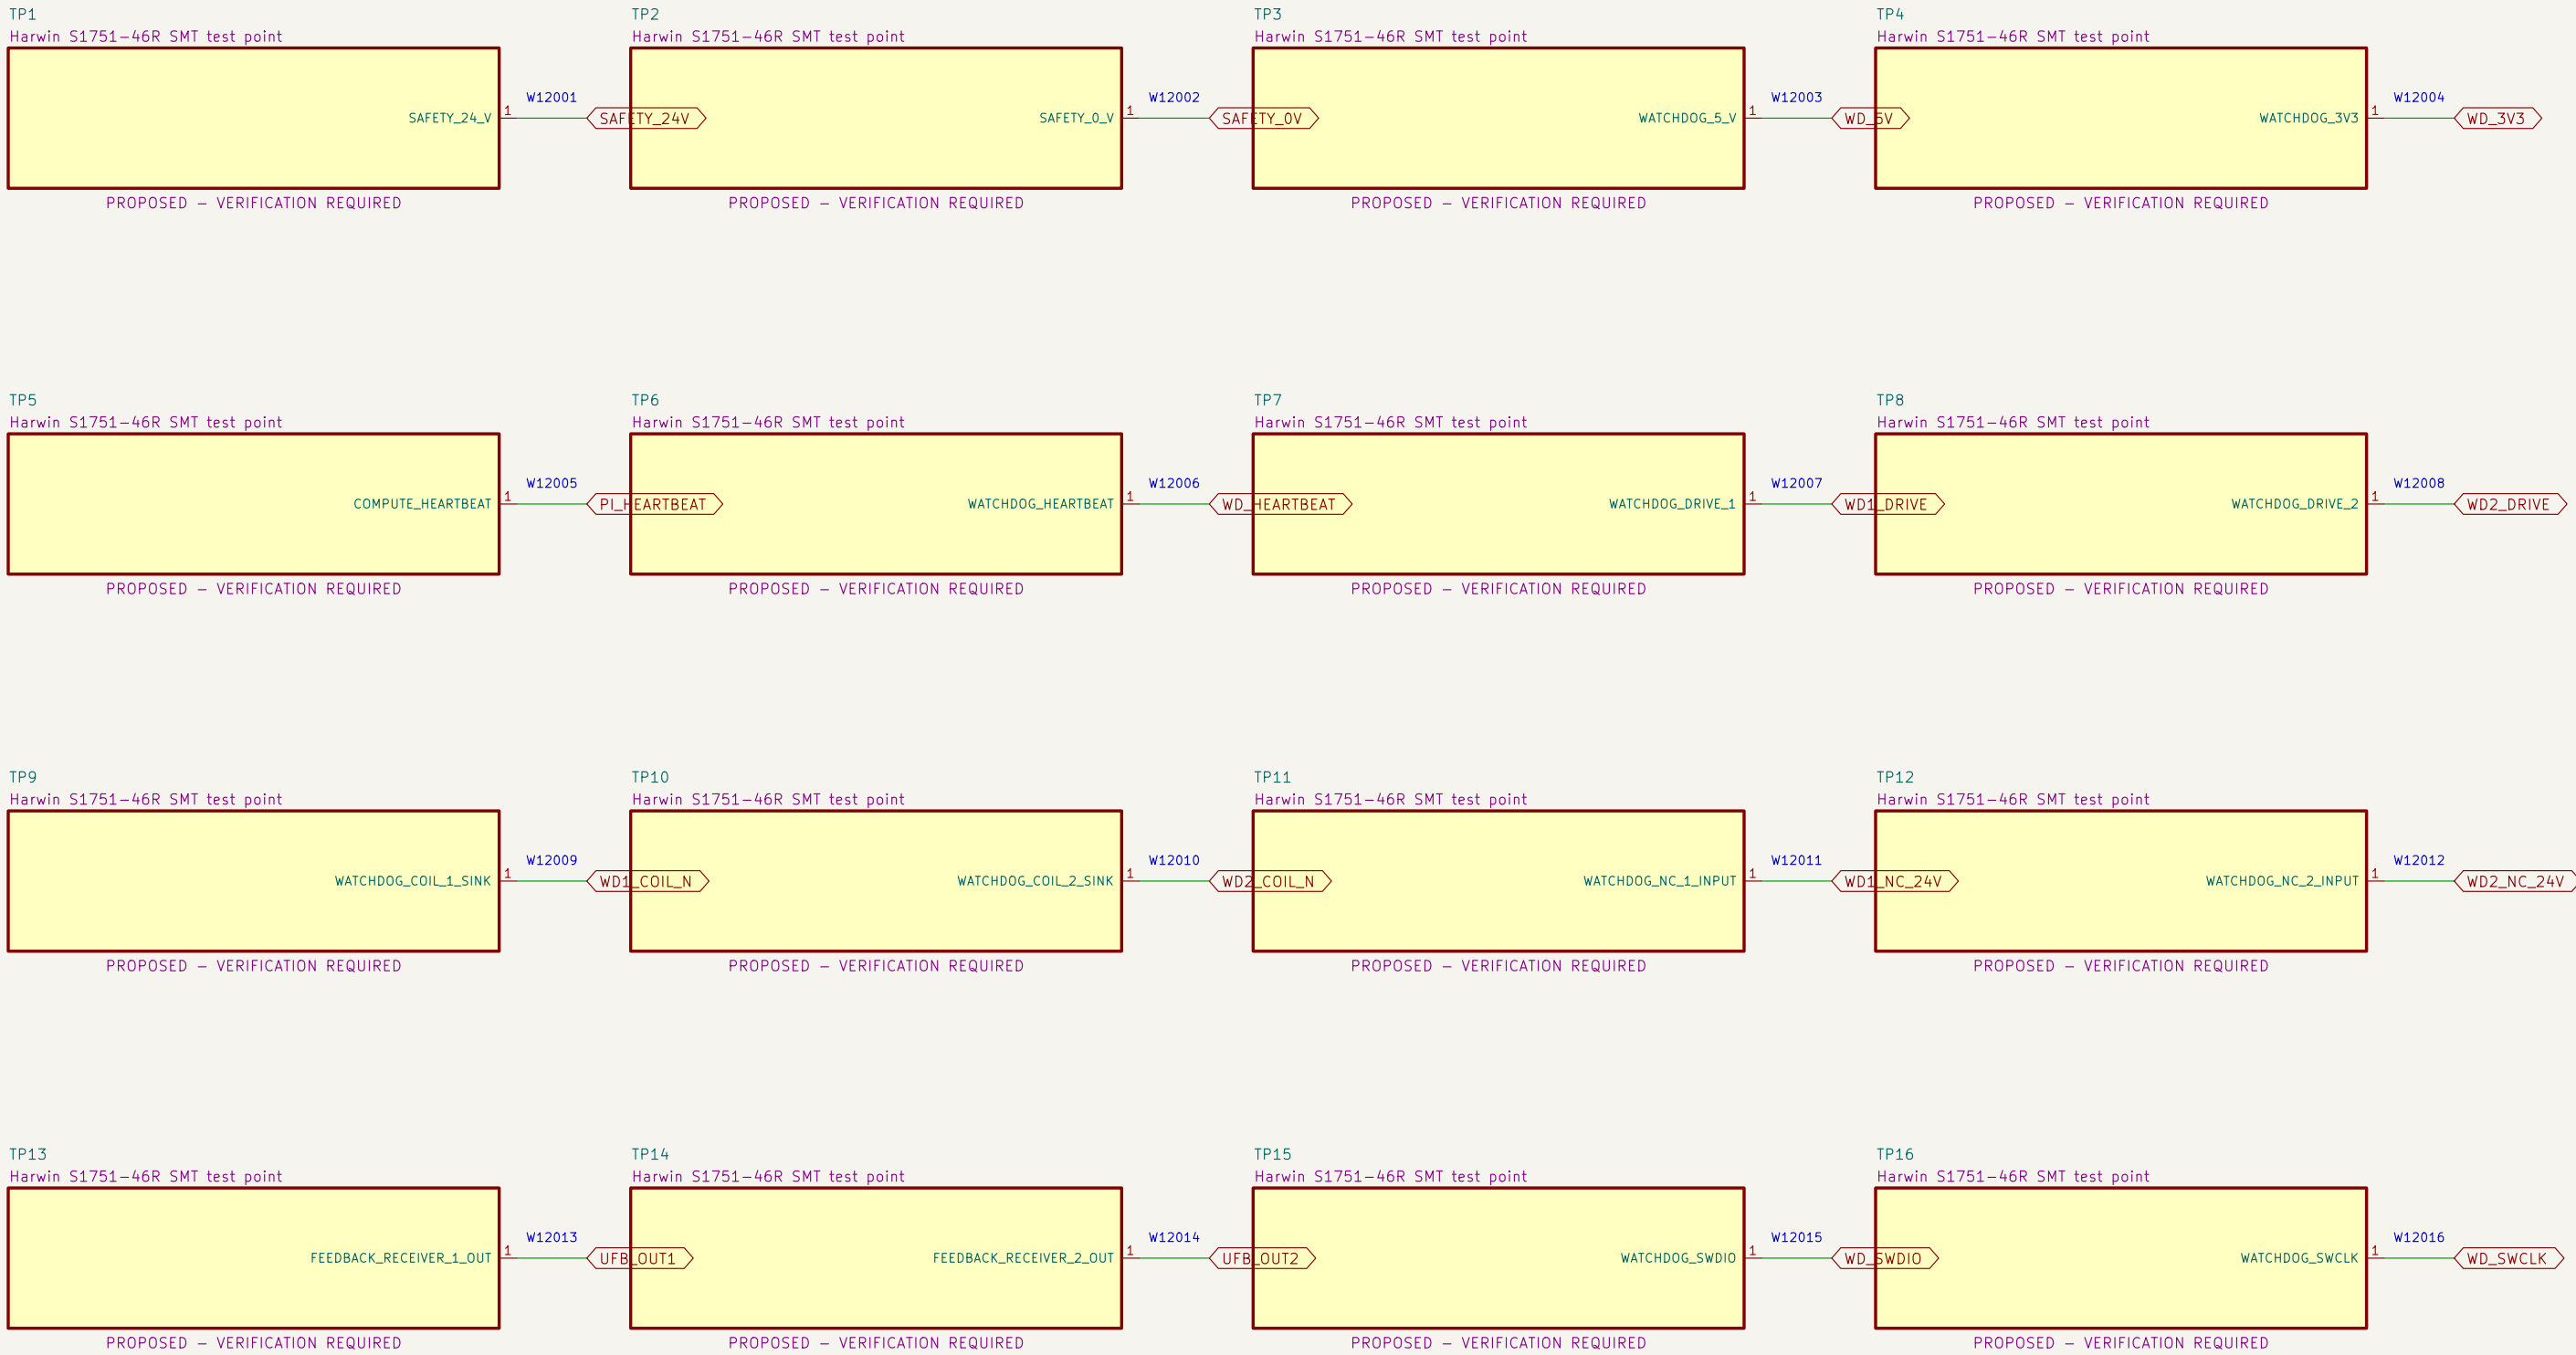

NOTE 1: Test terminals are diagnostic features only; they provide no safety integrity or bypass authority.

NOTE 2: Verify clip clearance with guards, harnesses and power removed before any live measurement procedure is released.

CONNECTED DESIGN CANDIDATE – QUALIFIED REVIEW REQUIRED
PRELIMINARY – NOT APPROVED FOR FABRICATION OR ENERGIZATION

Project Button

Sheet: /12 Watchdog PCB test access/
File: 12_watchdog_pcb_test_access.kicad_sch

Title: PB HR-V0 V3-P1.3 – 12

Size: A3

Date: 2026-08-07

Rev: V3-P1.3

KiCad E.D.A. 10.0.5

Id: 13/13