






















PANELBOARD MH112 SCHEDULE																		
600A MCB, 480Y/277V, 3 PHASE, 4 WIRE, 14 KAIC MINIMUM, SURFACE MOUNTED																		
LOAD SERVED	LOAD (AMPS)			BRKR TRIP	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED		
	A	B	C				A	B	C				A	B	C			
ACCH-1	107			150	2	1				2	2	150	-			ACCH-2 1		
		107											-					
			107												-			
ACCH-3	107			150	2	7				8	4	80	69			DOAS-1		
		107												69				
			107												69			
CRAH-1	56			75	4	13				14	4	75	56			CRAH-2		
		56												56				
			56												56			
CRAH-3 1	-			75	4	19				20	4	75	56			CRAH-4		
	-	-												56				
	-		-												56			
DWH-1	4			15	12	25				26	12	15	-			CHWP-2 1		
		4												-				
			4												-			
CHWP-1	5			15	12	31				32			-			SPACE ONLY		
		5												-				
			5												-			
PANEL ML112 VIA XFMR TM1	64			125	1	37				38			-			SPACE ONLY		
		58												-				
			59												-			
TOTAL	343	337	338										181	181	181	TOTAL		
TOTAL CONNECTED AMPS A: 524 B: 518 C: 519																		

PANELBOARD NOTES:

- 1 LOAD IS SHOWN DELETED TO ACCOUNT FOR REDUNDANCY OF SIMILAR LOAD CONNECTED.
LOAD WILL NOT BE CONNECTED AT SAME TIME OF OTHER LOADS.

PANELBOARD ML112A SCHEDULE																	
100A MLO, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																	
LOAD SERVED	LOAD (AMPS)			BRKR	WIRE	CKT TRIP SIZE	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED	
	A	B	C				A	B	C				A	B	C		
FCU-1	2.4			15	12	1				2	12	15	2.4			FCU-2	
		2.4												2.4			
			2.4												2.4		
FCU-3	2.4			15	12	7				8	12	20	11			FCU-4	
		2.4												11			
			2.4												11		
FCU-5	11			20	12	13				14	12	20	11			FCU-6	
		11												11			
			11												11		
FCU-7	11			20	12	19				20	12	15	4.6			FCU-8	
		11												4.6			
			11												4.6		
EUH-11	7			20		25				26		20	0			SPARE	
		7												28		20	0
SPARE			0	20		29				30		20			0		SPARE
SPACE ONLY	-					31				32			-				SPACE ONLY
SPACE ONLY		-				33				34				-			SPACE ONLY
SPACE ONLY			-			35				36					-		SPACE ONLY
SPACE ONLY	-					37				38			-				SPACE ONLY
SPACE ONLY		-				39				40				-			SPACE ONLY
SPACE ONLY			-			41				42					-		SPACE ONLY
TOTAL	33	33	27										29	29	29		TOTAL
TOTAL CONNECTED AMPS A: 62 B: 62 C: 56																	

PANELBOARD ML112 SCHEDULE																	
225A MCB, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																	
LOAD SERVED	LOAD (AMPS)			BRKR TRIP	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED	
	A	B	C				A	B	C				A	B	C		
EUH-1	10			20	12	1				2	12	20	10			EUH-2	
		10													10		
EUH-3			10	20	12	5				6	12	20			10	EUH-4	
	10												10				
EUH-5		10		20	12	9				10	12	20		10		EUH-6	
			10												10		
EUH-7	10			20	12	13				14	12	20	10			EUH-8	
		10													10		
EUH-9			10	20	12	17				18	12	20			7	EUH-10	
	10												7				
EF-3		6		15	12	21				22	12	20		2		EF-1/EF-2	
EF-4			6	15	12	23				24	12	20			4	EF-5,6,7,8	
HEAT TRACE	5			20	12	25				26	12	20	2			EYEWASH HORN/STROBE	
RP-1		1		15	12	27				28	12	20		2		F.O. CONTROL PANEL	
WASTEWATER TANK ALARM			2	20	10	29				30	12	20			4	F.O. OVERFLOW PUMP	
SPARE	0			20		31				32	12	20	2			F.O. TRANSFER PUMP	
SPARE		0		20		33				34	12	20		3		F.O. POLISHING UNIT	
SPARE			0	20		35				36	12	20			8	RECEPTS RM 112	
PANEL ML112A	62			100	2	37				38	12	20	5			RECEPTS RM 113,114	
		62								40	12	20			5		RECEPTS RM 115
			56							42		20				0	
TOTAL	107	99	94										46	42	43	TOTAL	
TOTAL CONNECTED AMPS A: 153 B: 141 C: 137																	

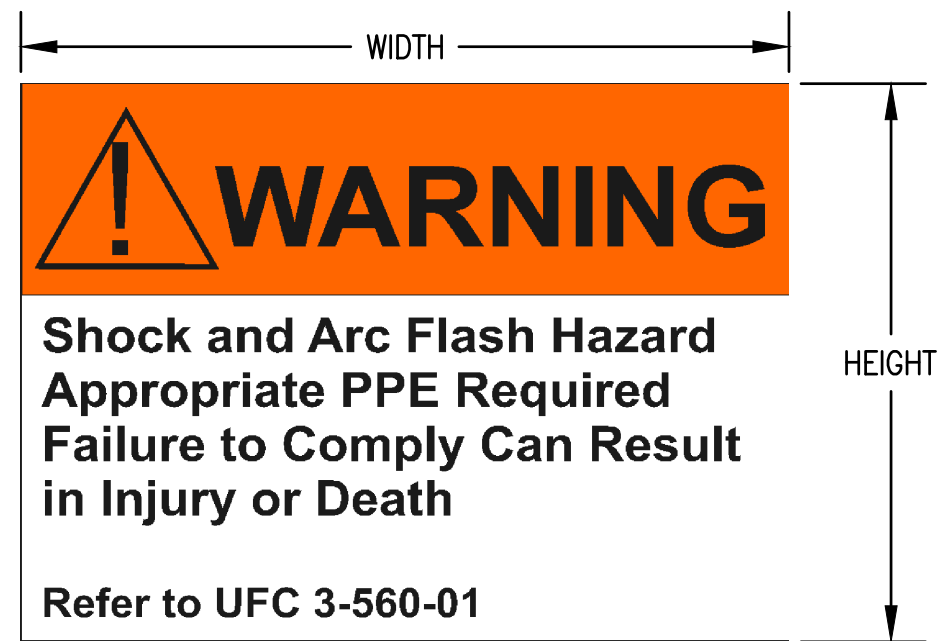

NOTES:

1. PROVIDE SELF-ADHESIVE VINYL LABEL TO AFFIX TO ELECTRICAL EQUIPMENT TO WARN OF ARC FLASH HAZARDS.
2. THE LABEL FORMAT AND TEXT SHALL BE IN ACCORDANCE WITH THE FIGURE.
3. THE LABEL SHALL BE LOCATED ON THE EQUIPMENT TO BE CLEARLY VISIBLE TO QUALIFIED PERSONS BEFORE EXAMINATION, ADJUSTMENT, SERVICING, OR MAINTENANCE OF THE EQUIPMENT.
4. THE SIZE OF THE LABEL SHALL BE:

EQUIPMENT TYPE	HEIGHT	WIDTH
INDOOR	50mm	75mm
OUTDOOR	100mm	150mm
5. A DOWNLOADABLE WINDOWS METAFILE IS AVAILABLE ON THE WHOLE BUILDING DESIGN GUIDE WEBSITE ([WWW.WBDG.ORG](http://www.wbdg.org)) FOR USE IN A LABEL MAKING MACHINE.
 - A. THE FILE IS LOCATED ON THE "NAVFAC CADD DETAILS" PAGE. TO NAVIGATE TO THIS LOCATION FOLLOW: [HOME](#) > [DOCUMENTS & REFERENCES](#) > [CCB](#) > [CADD LIBRARY](#) > [NAVFAC CADD RESOURCES](#) > [NAVFAC CADD DETAILS](#).
 - B. ALTERNATIVELY, TYPE IN THE FOLLOWING ADDRESS IN INTERNET EXPLORER:
[HTTP://WWW.WBDG.ORG/CCB/BROWSE_CAT.PHP?o=78&c=232](http://www.wbdg.org/CCB/BROWSE_CAT.PHP?o=78&c=232)

ARC FLASH WARNING LABEL

SKETCH DATE	JANUARY 2008	STYLE	AF-1
-------------	--------------	-------	------

SHEET		DESCRIPTION		DATE		APPR	
							
FOR COMMANDER NAVFAC ACTIVITY D. EVANS VIA EMAIL SATISFACTORY TO DATE 01/15/2026 DES CAB DRAW CAB ☒ CHK SEK PM/DM MJD/ATP BRANCH MANAGER SEK DES PROD DIR WBF FIRE PROTECTION ENGINEER DSN							
APPROVED A/E INFO							
DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC PLANNING, DESIGN AND CONSTRUCTION INDROUK VA VARIOUS LOCATIONS VARIOUS LOCATIONS JOINT MARITIME FACILITY ELECTRICAL PANELBOARD SCHEDULES							
SCALE: NONE ELECTROFECT NO.: 1838720 CONSTR. CONTR. NO. NAVFAC DRAWING NO. 14157214 SHEET 152 OF 170 EP603							

FILE NAME: Y:\OCONUS\MultipleSites\2024_1783264_P1360_IAMF\B_Design\DWG\SHEET\13_ELEC\PT1360_1783264_EP604.dwg LAYOUT NAME: EP604 - PDU-1A Panelboard Schedules PLOTTED: Tuesday, January 20, 2026 - 12:16pm USER: eric.helton

D

C

B

A

PDU-1A TECH POWER A TO PFE-1 EQUIPMENT																
400A MLO, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																
LOAD SERVED	LOAD (AMPS)			BRKR TRIP	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED
	A	B	C				A	B	C				A	B	C	
PFE-1 - INPUT A	25			40		1				2		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
PFE-1 - INPUT A	25			40		7				8		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
PFE-1 - INPUT A	25			40		13				14		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
PFE-1 - INPUT A	25			40		19				20		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
PFE-1 - INPUT A	25			40		25				26		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
PFE-1 - INPUT A	25			40		31				32		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
PFE-1 - INPUT A	25			40		37				38		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
TOTAL	175	175	175										175	175	175	TOTAL
TOTAL CONNECTED AMPS A: 350 B: 350 C: 350																

NOTE: LOADS IN AMPERES SHOWN ARE APPROXIMATE FOR EQUIPMENT SIZING PURPOSE ONLY. EQUIPMENT CIRCUITS FROM LOAD SIDE OF CIRCUIT BREAKER PROVIDED BY OTHERS.

PDU-1A TECH POWER A TO PFE-3 EQUIPMENT																
400A MLO, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																
LOAD SERVED	LOAD (AMPS)			BRKR TRIP	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED
	A	B	C				A	B	C				A	B	C	
PFE-3 - INPUT A	25			40		1				2		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
PFE-3 - INPUT A	25			40		7				8		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
PFE-3 - INPUT A	25			40		13				14		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
PFE-3 - INPUT A	25			40		19				20		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
PFE-3 - INPUT A	25			40		25				26		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
PFE-3 - INPUT A	25			40		31				32		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
PFE-3 - INPUT A	25			40		37				38		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
TOTAL	175	175	175										175	175	175	TOTAL
TOTAL CONNECTED AMPS A: 350 B: 350 C: 350																

NOTE: LOADS IN AMPERES SHOWN ARE APPROXIMATE FOR EQUIPMENT SIZING PURPOSE ONLY. EQUIPMENT CIRCUITS FROM LOAD SIDE OF CIRCUIT BREAKER PROVIDED BY OTHERS.

PDU-1A TECH POWER A TO PFE-2 EQUIPMENT																
400A MLO, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																
LOAD SERVED	LOAD (AMPS)			BRKR TRIP	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED
	A	B	C				A	B	C				A	B	C	
PFE-2 - INPUT A	25			40		1				2		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
PFE-2 - INPUT A	25			40		7				8		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
PFE-2 - INPUT A	25			40		13				14		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
PFE-2 - INPUT A	25			40		19				20		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
PFE-2 - INPUT A	25			40		25				26		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
PFE-2 - INPUT A	25			40		31				32		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
PFE-2 - INPUT A	25			40		37				38		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
TOTAL	175	175	175										175	175	175	TOTAL
TOTAL CONNECTED AMPS A: 350 B: 350 C: 350																

FILE NAME: Y:\OCONUS\MultipleSites\2026_1783264_P1360_IAMF\B_Design\DWGS\Sheet\13_ELEC\PT1360_1783264_EP605.dwg LAYOUT NAME: EP605 - PDU-2A and PDU-AB Panelboard Schedules PLOTTED: Tuesday, January 20, 2026 - 12:16pm USER: erichter

PDU-2A TECH POWER A TO PFE-4 EQUIPMENT																
400A MLO, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																
LOAD SERVED	LOAD (AMPS)			BRKR TRIP	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED
	A	B	C				A	B	C				A	B	C	
PFE-4 - INPUT A	25			40		1				2		40	25			PFE-4 - INPUT A
		25												25		
			25												25	
PFE-4 - INPUT A	25			40		7				8		40	25			PFE-4 - INPUT A
		25												25		
			25												25	
PFE-4 - INPUT A	25			40		13				14		40	25			PFE-4 - INPUT A
		25												25		
			25												25	
PFE-4 - INPUT A	25			40		19				20		40	25			PFE-4 - INPUT A
		25												25		
			25												25	
PFE-4 - INPUT A	25			40		25				26		40	25			PFE-4 - INPUT A
		25												25		
			25												25	
PFE-4 - INPUT A	25			40		31				32		40	25			PFE-4 - INPUT A
		25												25		
			25												25	
PFE-4 - INPUT A	25			40		37				38		40	25			PFE-4 - INPUT A
		25												25		
			25												25	
TOTAL	175	175	175										175	175	175	TOTAL
TOTAL CONNECTED AMPS A: 350 B: 350 C: 350																

NOTE: LOADS IN AMPERES SHOWN ARE APPROXIMATE FOR EQUIPMENT SIZING PURPOSE ONLY. EQUIPMENT CIRCUITS FROM LOAD SIDE OF CIRCUIT BREAKER PROVIDED BY OTHERS.

PDU-AB TECH POWER TO COMMS EQUIPMENT																
225A MLO, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																
LOAD SERVED	LOAD (AMPS)			BRKR TRIP	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED
	A	B	C				A	B	C				A	B	C	
COMMS EQUIPMENT	20			30		1				2		30	20			COMMS EQUIPMENT
		20												20		
COMMS EQUIPMENT			20	30		5				6		30			20	COMMS EQUIPMENT
	20													20		
COMMS EQUIPMENT		20		30		9				10		30		20		COMMS EQUIPMENT
			20												20	
COMMS EQUIPMENT	20			30		13				14		30	20			COMMS EQUIPMENT
		20												20		
COMMS EQUIPMENT			20	30		17				18		30			20	COMMS EQUIPMENT
	20													20		
SPACE ONLY		0		-		21				22		-		0		SPACE ONLY
			0												0	
SPACE ONLY	0			-		25				26		-	0			SPACE ONLY
		0												0		
SPACE ONLY			0	-		29				30		-			0	SPACE ONLY
	0													0		
SPACE ONLY		0		-		33				34		-		0		SPACE ONLY
			0												0	
RECEPTS RM 116	8			20	12	37				38		-	0			SPACE ONLY
RECEPTS RM 116		8		20	12	39				40		-		0		SPACE ONLY
SPACE ONLY			0	-		41				42		-			0	SPACE ONLY
TOTAL	88	88	80										80	80	80	TOTAL
TOTAL CONNECTED AMPS A: 168 B: 168 C: 160																

NOTE: LOADS IN AMPERES SHOWN ARE APPROXIMATE FOR EQUIPMENT SIZING PURPOSE ONLY. EQUIPMENT CIRCUITS FROM LOAD SIDE OF CIRCUIT BREAKER PROVIDED BY OTHERS.

PDU-2A TECH POWER A TO MISSION CONFIG EQUIPMENT																
400A MLO, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																
LOAD SERVED	LOAD (AMPS)			BRKR TRIP	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED
	A	B	C				A	B	C				A	B	C	
MISSION CONFIG - INPUT A	25			40		1				2		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
MISSION CONFIG - INPUT A	25			40		7				8		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
MISSION CONFIG - INPUT A	25			40		13				14		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
PFE-1 - INPUT A	25			40		19				20		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
PFE-1 - INPUT A	25			40		25				26		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
PFE-1 - INPUT A	25			40		31				32		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
PFE-1 - INPUT A	25			40		37				38		40	25			PFE-1 - INPUT A
		25												25		
			25												25	
TOTAL	175	175	175										175	175	175	TOTAL
TOTAL CONNECTED AMPS A: 0 B: 0 C: 0																








FILE NAME: Y:\OCONUS\MultipleSites\2024_1783264_P1360_IAMF\B_Design\DWG\Sheets\13_ELEC\PT1360_1783264_EP606.dwg LAYOUT NAME: EP606 - PDU-1B Panelboard Schedules PLOTTED: Tuesday, January 20, 2026 - 12:16pm USER: erichterian

D





C

B








A

PDU-1B TECH POWER B TO PFE-1 EQUIPMENT																
400A MLO, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																
LOAD SERVED	LOAD (AMPS)			BRKR TRIP	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED
	A	B	C				A	B	C				A	B	C	
PFE-1 - INPUT B	25			40		1				2		40	25			PFE-1 - INPUT B
		25												25		
			25												25	
PFE-1 - INPUT B	25			40		7				8		40	25			PFE-1 - INPUT B
		25												25		
			25												25	
PFE-1 - INPUT B	25			40		13				14		40	25			PFE-1 - INPUT B
		25												25		
			25												25	
PFE-1 - INPUT B	25			40		19				20		40	25			PFE-1 - INPUT B
		25												25		
			25												25	
PFE-1 - INPUT B	25			40		25				26		40	25			PFE-1 - INPUT B
		25												25		
			25												25	
PFE-1 - INPUT B	25			40		31				32		40	25			PFE-1 - INPUT B
		25												25		
			25												25	
PFE-1 - INPUT B	25			40		37				38		40	25			PFE-1 - INPUT B
		25												25		
			25												25	
TOTAL	175	175	175										175	175	175	TOTAL
TOTAL CONNECTED AMPS A: 350 B: 350 C: 350																

NOTE: LOADS IN AMPERES SHOWN ARE APPROXIMATE FOR EQUIPMENT SIZING PURPOSE ONLY. EQUIPMENT CIRCUITS FROM LOAD SIDE OF CIRCUIT BREAKER PROVIDED BY OTHERS.

PDU-1B TECH POWER B TO PFE-3 EQUIPMENT																
400A MLO, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																
LOAD SERVED	LOAD (AMPS)			BRKR TRIP	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED
	A	B	C				A	B	C				A	B	C	
PFE-3 - INPUT A	25			40		1				2		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
PFE-3 - INPUT A	25			40		7				8		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
PFE-3 - INPUT A	25			40		13				14		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
PFE-3 - INPUT A	25			40		19				20		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
PFE-3 - INPUT A	25			40		25				26		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
PFE-3 - INPUT A	25			40		31				32		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
PFE-3 - INPUT A	25			40		37				38		40	25			PFE-3 - INPUT A
		25												25		
			25												25	
TOTAL	175	175	175										175	175	175	TOTAL
TOTAL CONNECTED AMPS A: 350 B: 350 C: 350																

NOTE: LOADS IN AMPERES SHOWN ARE APPROXIMATE FOR EQUIPMENT SIZING PURPOSE ONLY. EQUIPMENT CIRCUITS FROM LOAD SIDE OF CIRCUIT BREAKER PROVIDED BY OTHERS.


PDU-1B TECH POWER B TO PFE-2 EQUIPMENT																
400A MLO, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																
LOAD SERVED	LOAD (AMPS)			BRKR TRIP	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED
	A	B	C				A	B	C				A	B	C	
PFE-2 - INPUT A	25			40		1				2		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
PFE-2 - INPUT A	25			40		7				8		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
PFE-2 - INPUT A	25			40		13				14		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
PFE-2 - INPUT A	25			40		19				20		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
PFE-2 - INPUT A	25			40		25				26		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
PFE-2 - INPUT A	25			40		31				32		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
PFE-2 - INPUT A	25			40		37				38		40	25			PFE-2 - INPUT A
		25												25		
			25												25	
TOTAL	175	175	175										175	175	175	TOTAL
TOTAL CONNECTED AMPS A: 350 B: 350 C: 350																

PANELBOARD GL115 SCHEDULE																	
60A MCB, 208Y/120V, 3 PHASE, 4 WIRE, 10 KAIC MINIMUM, SURFACE MOUNTED																	
LOAD SERVED	LOAD (AMPS)			BRKR TRIP	WIRE SIZE	CKT NO.	PHASE			CKT NO.	WIRE SIZE	BRKR TRIP	LOAD (AMPS)			LOAD SERVED	
	A	B	C				A	B	C				A	B	C		
GENERATOR AUX. LOADS	5			20	12	1				2	12	20	5			GENERATOR AUX. LOADS	
GENERATOR AUX. LOADS		5		20	12	3				4	12	20		5		GENERATOR AUX. LOADS	
GENERATOR AUX. LOADS			5	20	12	5				6	12	20			5	GENERATOR AUX. LOADS	
SPARE	0			20		7				8		20	0			SPARE	
SPARE		0		20		9				10		20		0		SPARE	
SPARE			0	20		11				12		20			0	SPARE	
SPACE ONLY	0			-		13				14		-	0			SPACE ONLY	
SPACE ONLY		0		-		15				16		-		0		SPACE ONLY	
SPACE ONLY			0	-		17				18		-			0	SPACE ONLY	
TOTAL	5	5	5										5	5	5	TOTAL	
TOTAL CONNECTED AMPS A: 10 B: 10 C: 10																	


NOTE: LOADS IN AMPERES SHOWN ARE APPROXIMATE FOR EQUIPMENT SIZING PURPOSE ONLY. EQUIPMENT CIRCUITS FROM LOAD SIDE OF CIRCUIT BREAKER PROVIDED BY OTHERS.

NAVJAG METRIC DRAWFORM REVISION: 01 OCTOBER 2018

FILE NAME: Y:\OCONUS\MultipleSites\2024_1783264_P1360_JMFB\B_Design\DWG\Sheet\13_ELEC\PT1360_1783264_EG201.dwg LAYOUT NAME: EG201 - Exterior LPS Elevations PLOTTED: Tuesday, January 20, 2026 - 12:17pm USER: efc:herlon

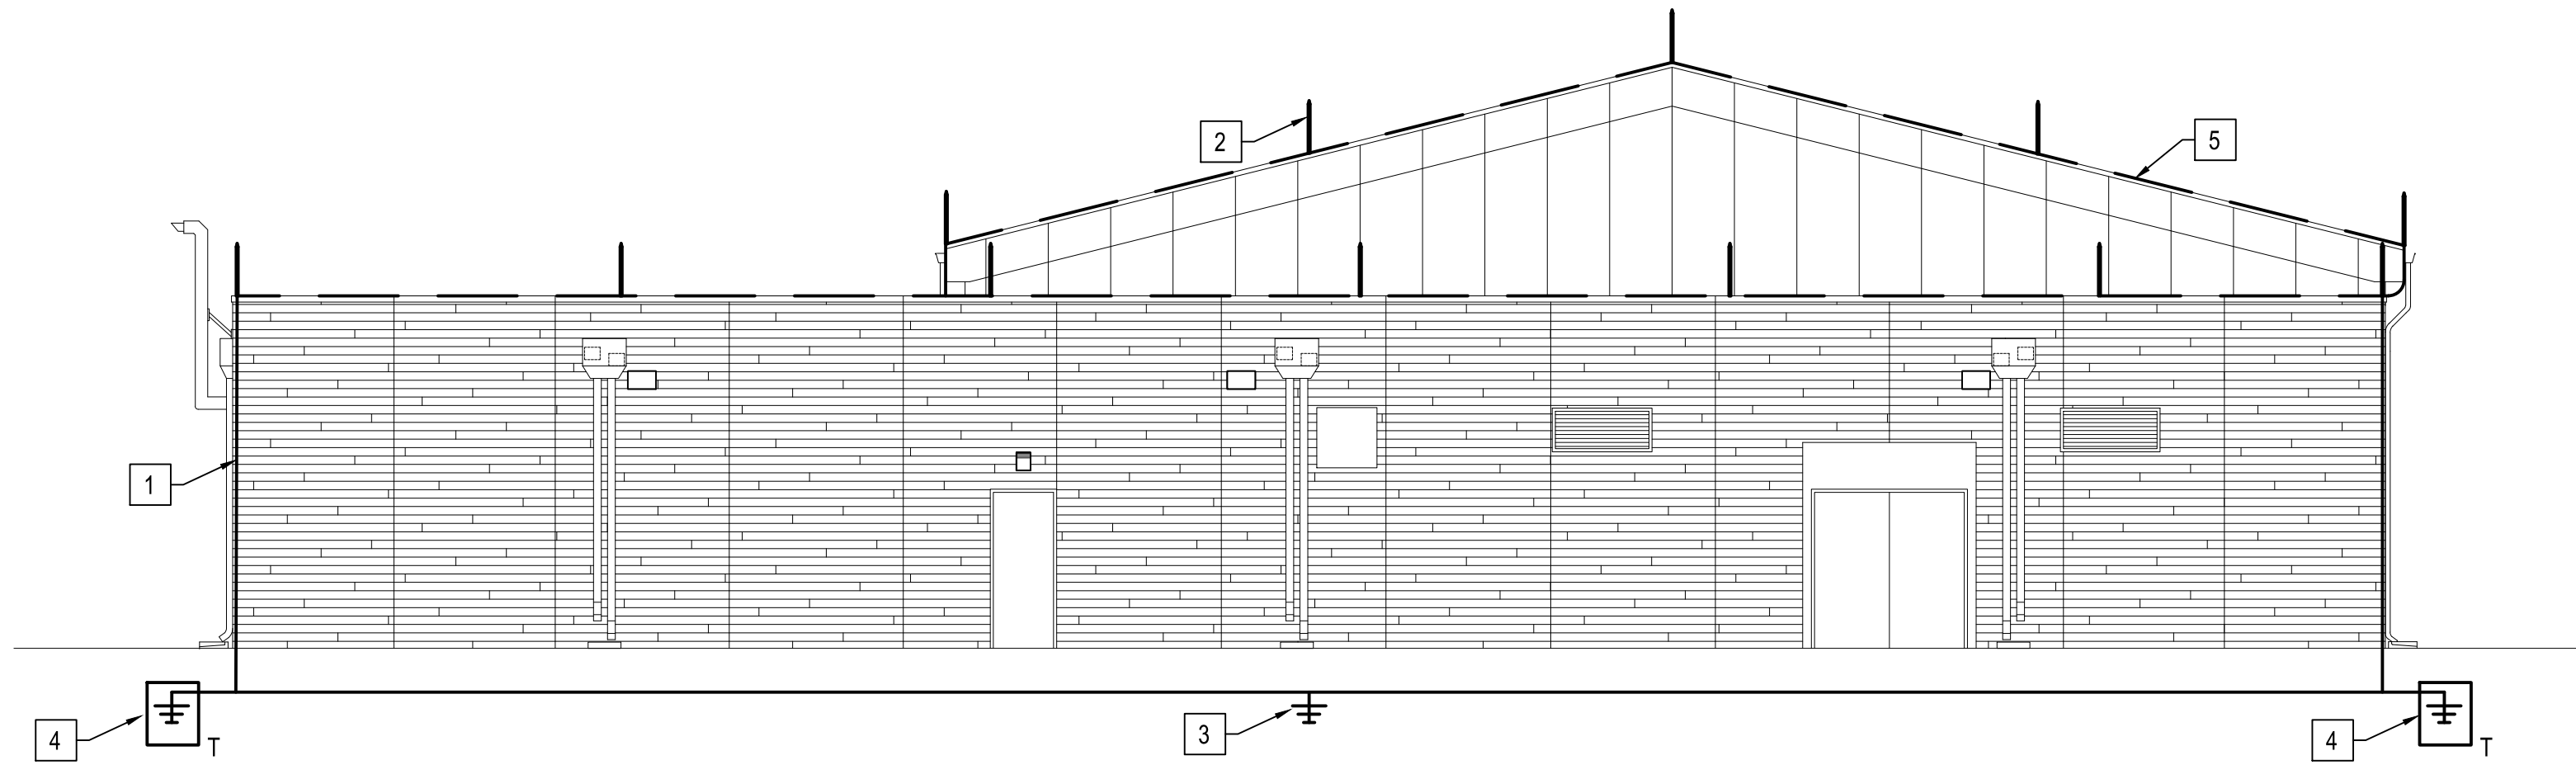

NORTH ELEVATION - LIGHTNING PROTECTION SYSTEM
SCALE: 1:100

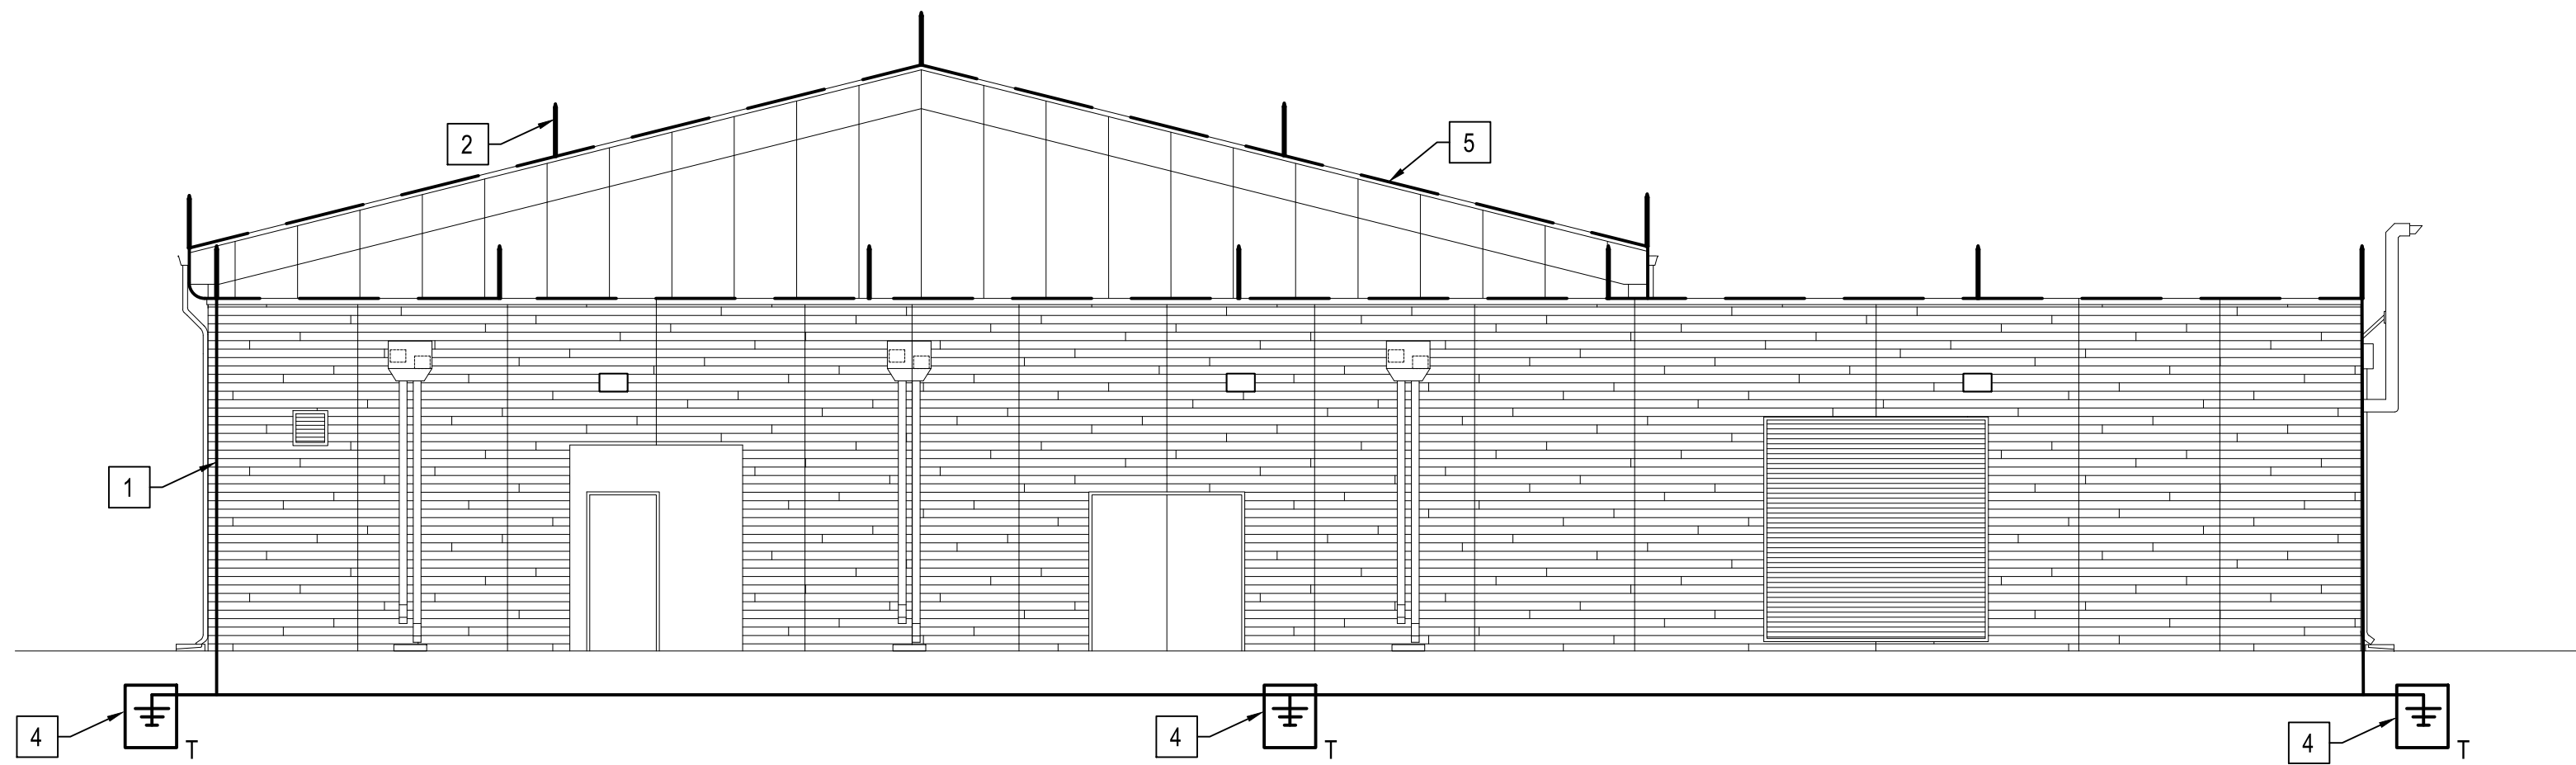

SOUTH ELEVATION - LIGHTNING PROTECTION SYSTEM
SCALE: 1:100

GENERAL SHEET NOTES

1. PROVIDE ALL ELECTRICAL INSTALLATIONS IN ACCORDANCE WITH THE CANADIAN INSTALLATION CODE FOR LIGHTNING PROTECTION SYSTEMS (CAN/CSA B72), AS WELL AS ADDITIONAL REQUIREMENTS LISTED IN THE SPECIFICATIONS.




SHEET KEYNOTES

1. LIGHTNING PROTECTION SYSTEM DOWN CONDUCTOR, TYPICAL. SEE SHEET EG101 ELECTRICAL GROUNDING PLAN FOR CONTINUATION.
2. ROOF-MOUNTED LIGHTNING PROTECTION SYSTEM AIR TERMINAL, TYPICAL.
3. GROUND ROD, CONNECTED TO COUNTERPOISE WITH EXOTHERMIC WELD.
4. GROUND ROD WITH ACCESSIBLE TEST WELL HANDHOLE, CONNECTED TO COUNTERPOISE WITH EXOTHERMIC WELD.
5. ROOF-MOUNTED LIGHTNING PROTECTION SYSTEM CONDUCTOR, TYPICAL.

GRAPHIC SCALE




APPROVED	A/E INFO
FOR COMMANDER NAVFAC	
ACTIVITY	
D. EVANS VIA EMAIL	
SATISFACTORY TO	DATE 01/15/2026
DES CMB	DRW CMB
PM/DM	MJD/ATP
BRANCH MANAGER	SEK
DES PROD DIR	WBF
FIRE PROTECTION ENGINEER	DSN
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC	
PLANNING, DESIGN AND CONSTRUCTION	
NORFOLK, VA	
VARIOUS LOCATIONS	
VARIOUS LOCATIONS	
JOINT MARITIME FACILITY	
EXTERIOR LPS ELEVATIONS	
SCALE:	AS NOTED
APPROVED NO.:	1838720
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO.	14157221
SHEET	159 OF 170
EG201	

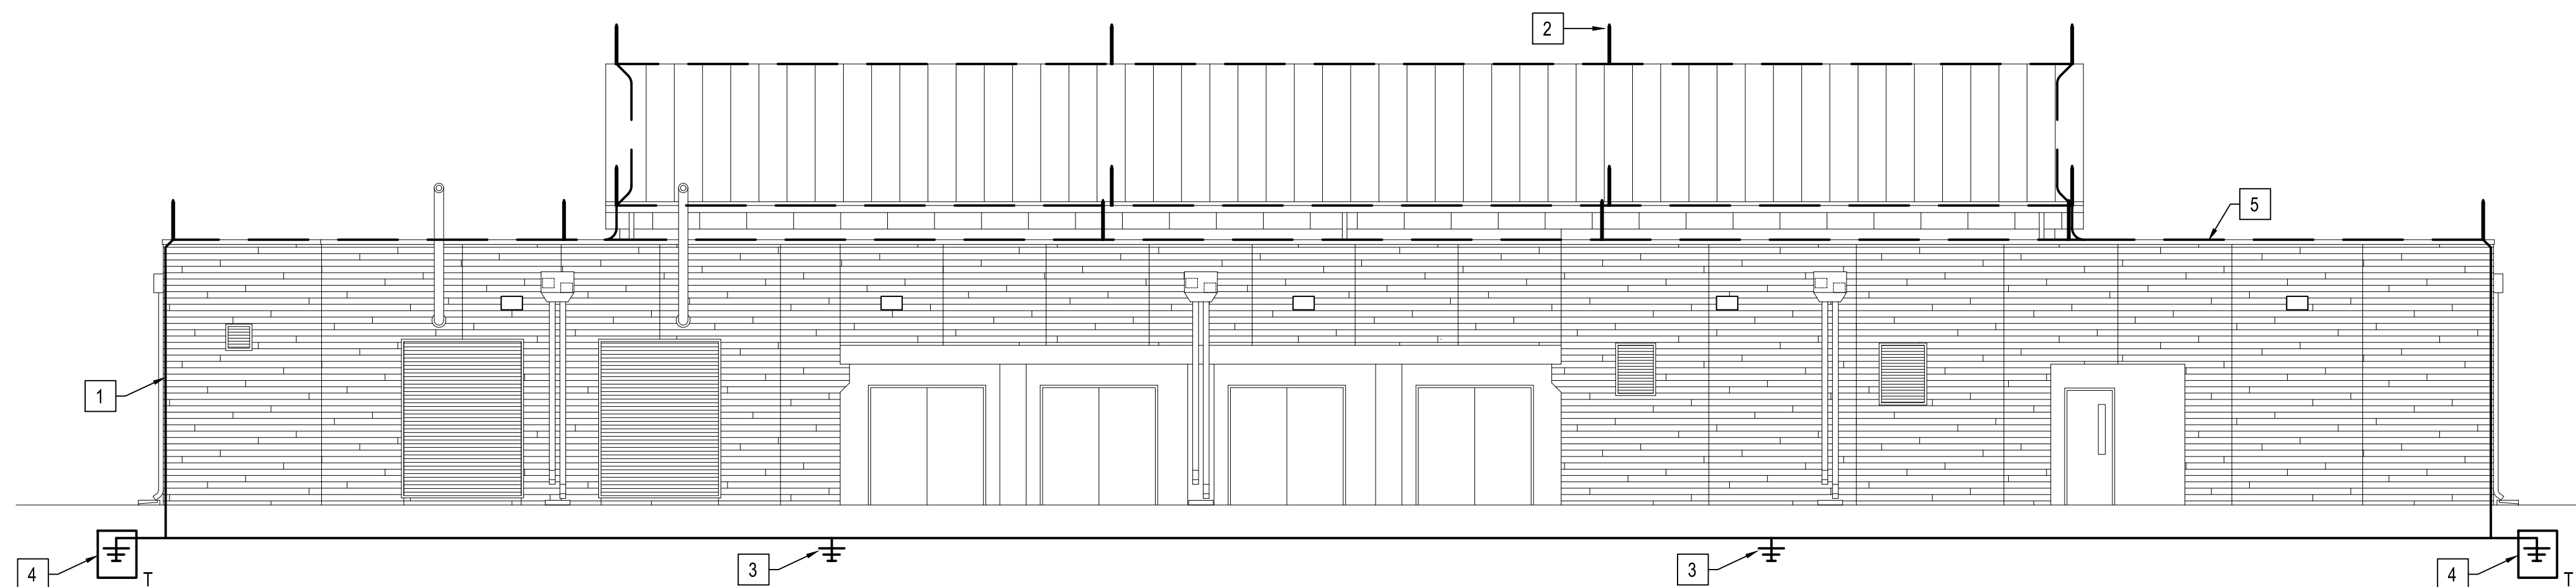

EAST ELEVATION - LIGHTNING PROTECTION SYSTEM

SCALE: 1:100

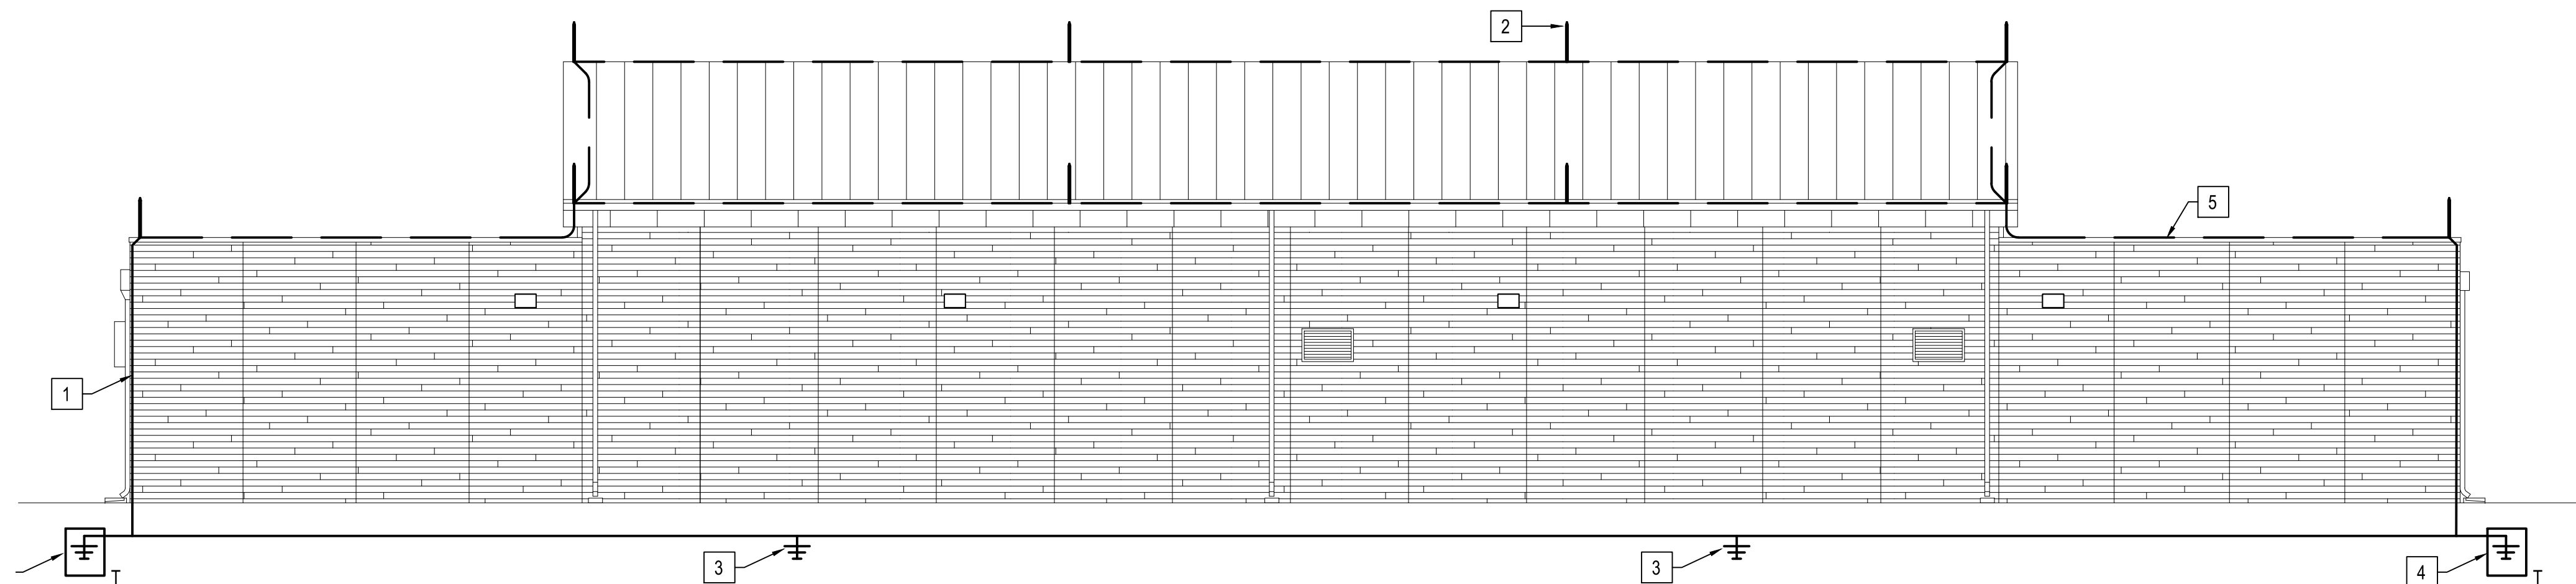

WEST ELEVATION - LIGHTNING PROTECTION SYSTEM

SCALE: 1:100

GENERAL SHEET NOTES

1. PROVIDE ALL ELECTRICAL INSTALLATIONS IN ACCORDANCE WITH THE CANADIAN INSTALLATION CODE FOR LIGHTNING PROTECTION SYSTEMS (CAN/CSA B72), AS WELL AS ADDITIONAL REQUIREMENTS LISTED IN THE SPECIFICATIONS.



SHEET KEYNOTES

1. LIGHTNING PROTECTION SYSTEM DOWN CONDUCTOR, TYPICAL. SEE SHEET EG101 ELECTRICAL GROUNDING PLAN FOR CONTINUATION.
2. ROOF-MOUNTED LIGHTNING PROTECTION SYSTEM AIR TERMINAL, TYPICAL.
3. GROUND ROD, CONNECTED TO COUNTERPOISE WITH EXOTHERMIC WELD.
4. GROUND ROD WITH ACCESSIBLE TEST WELL HANDHOLE, CONNECTED TO COUNTERPOISE WITH EXOTHERMIC WELD.
5. ROOF-MOUNTED LIGHTNING PROTECTION SYSTEM CONDUCTOR, TYPICAL.

GRAPHIC SCALE





1. AIR TERMINAL SPACING SHALL CONFORM TO NFPA 780 REQUIREMENTS.
2. MATERIAL COMPATIBILITY SHALL CONFORM TO NFPA 780 REQUIREMENTS.
3. MATERIAL CLASS SHALL CONFORM TO NFPA 780 REQUIREMENTS.
4. AIR TERMINALS SHALL BE UL LISTED.

C

20. —

1. AIR TERMINAL SPACING SHALL CONFORM TO NFPA 780 REQUIREMENTS.
2. MATERIAL COMPATIBILITY SHALL CONFORM TO NFPA 780 REQUIREMENTS.
3. MATERIAL CLASS SHALL CONFORM TO NFPA 780 REQUIREMENTS.
4. AIR TERMINALS SHALL BE UL LISTED.



1. AIR TERMINAL SPACING SHALL CONFORM TO NFPA 780 REQUIREMENTS.
2. MATERIAL COMPATIBILITY SHALL CONFORM TO NFPA 780 REQUIREMENTS.
3. MATERIAL CLASS SHALL CONFORM TO NFPA 780 REQUIREMENTS.
4. AIR TERMINALS SHALL BE UL LISTED.

[illegible]

REV



1. AIR TERMINAL SPACING SHALL CONFORM TO NFPA 780 REQUIREMENTS.
2. MATERIAL COMPATIBILITY SHALL CONFORM TO NFPA 780 REQUIREMENTS.
3. MATERIAL CLASS SHALL CONFORM TO NFPA 780 REQUIREMENTS.
4. AIR TERMINALS SHALL BE UL LISTED.

C



1. MATERIAL COMPATIBILITY SHALL CONFORM TO NFPA 780.
2. BONDING DISTANCES SHALL COMPLY WITH NFPA 780 & UL96A REQUIREMENTS.

A

CONCLUSIONS



1. MATERIAL COMPATIBILITY SHALL CONFORM TO NFPA 780 .
2. NO BEND OF CONDUCTOR SHALL FORM A FINAL INCLUDED ANGLE OF LESS THAN 90° NOR SHALL THERE BE A BEND RADIUS LESS THAN 200mm


NOTES

[illegible]


REV



A

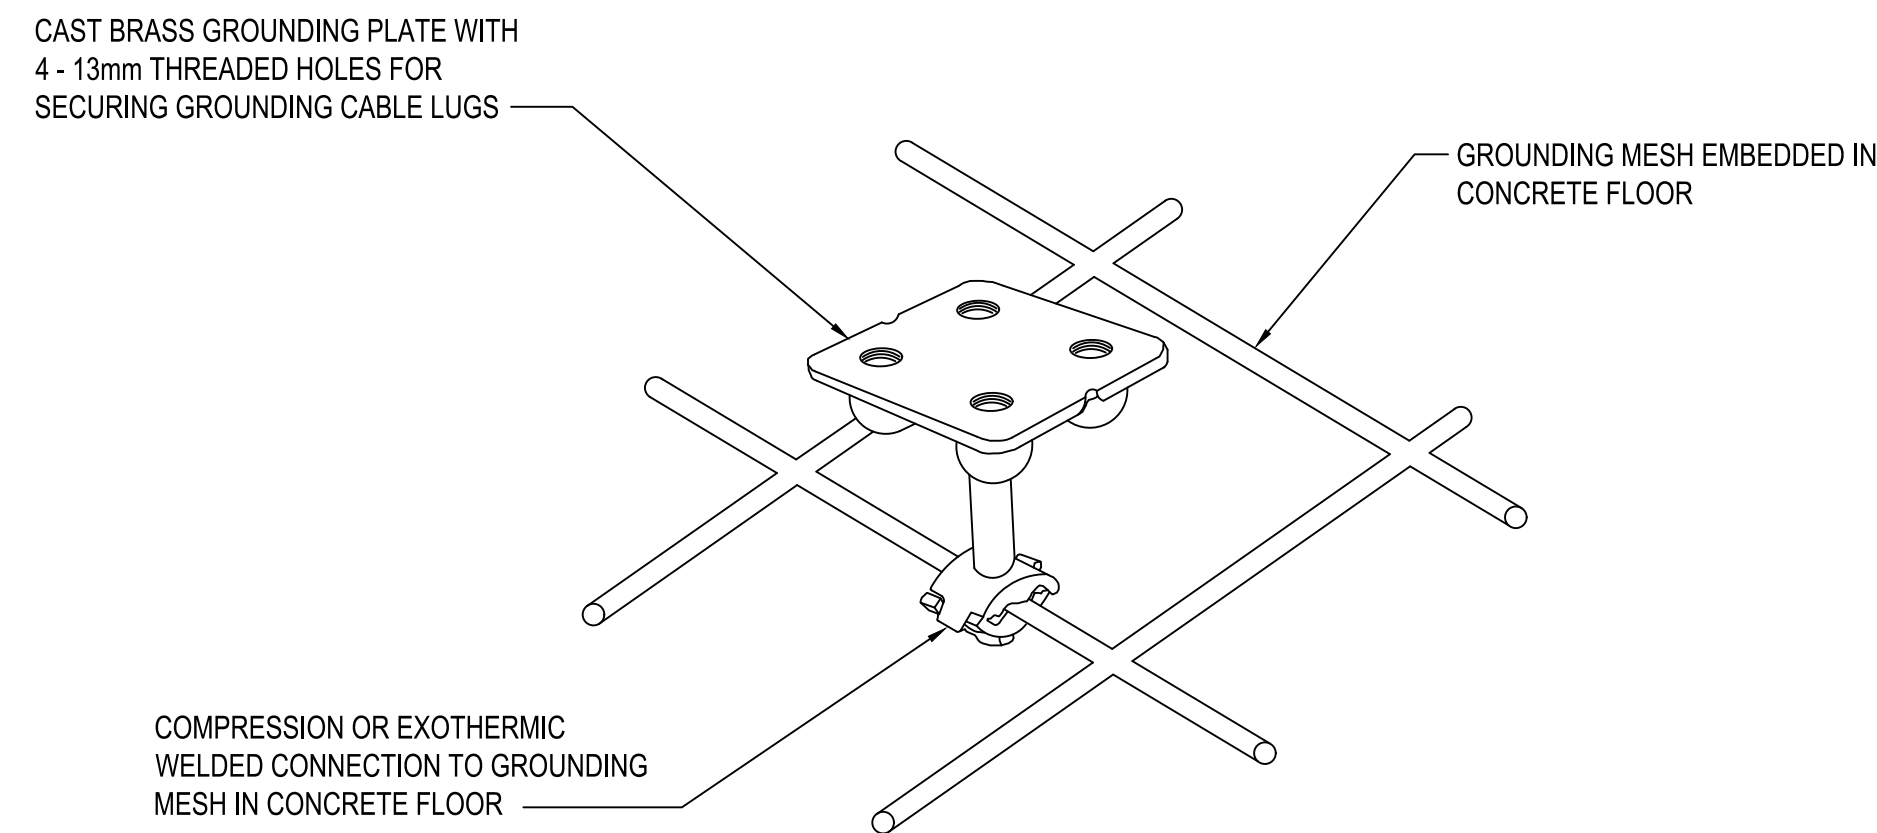


C1 SIGNAL REFERENCE GROUND CONNECTOR IN CONCRETE FLOOR
SCALE: NONE

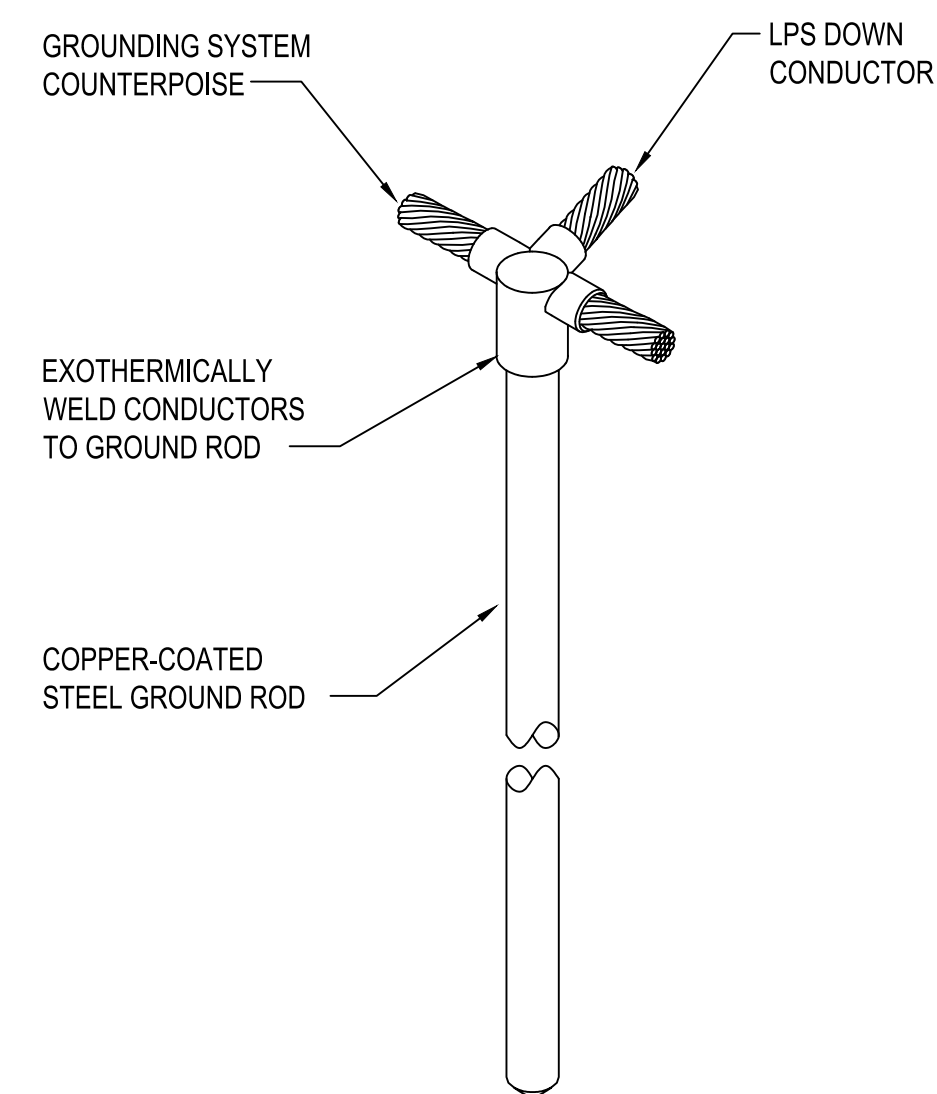

GROUND ROD

REVISED:	JUNE 2011	LIGHTNING PLATE:	LP-14
----------	-----------	------------------	-------

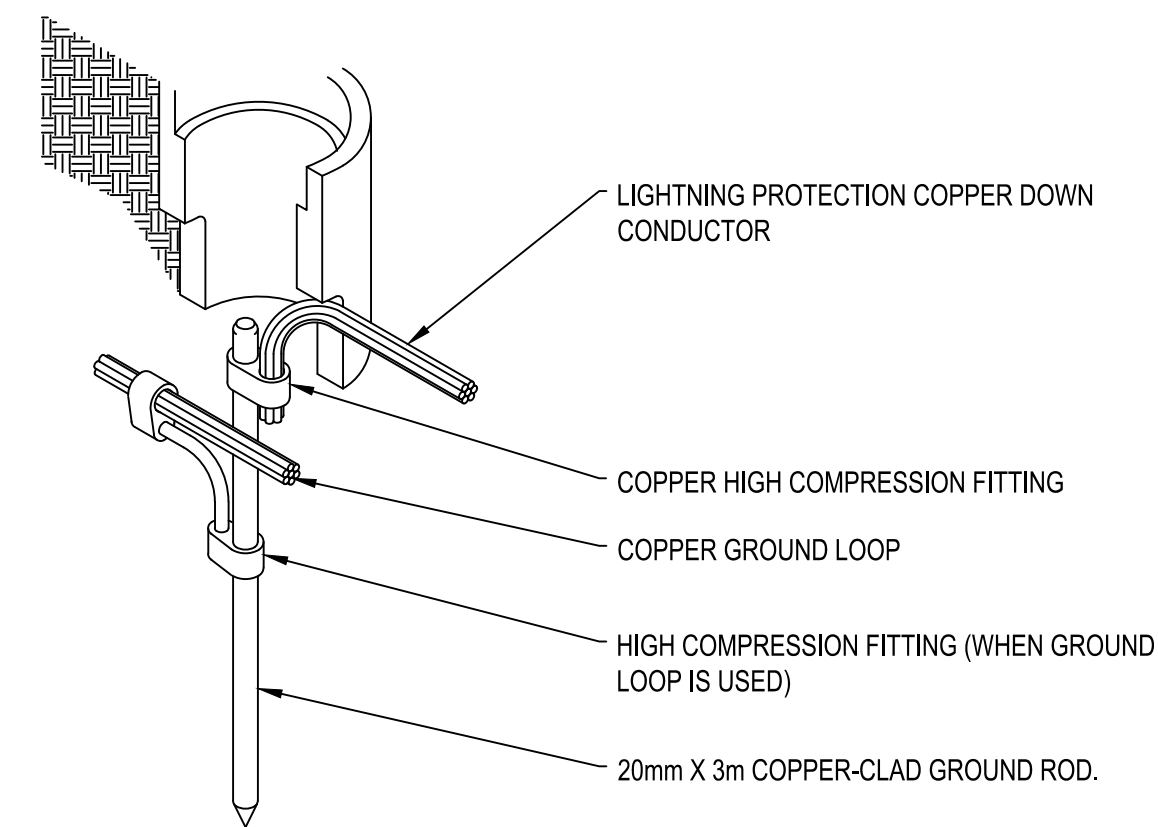


NOTES:

1. ALUMINUM LIGHTNING PROTECTION CONDUCTORS SHALL NOT COME INTO DIRECT CONTACT WITH EARTH.
2. WHERE MATERIAL COMPATIBILITY REQUIRES THE USE OF ALUMINUM DOWN CONDUCTORS THEY SHALL BE TERMINATED AT A UL LISTED BIMETALLIC FITTING A MINIMUM OF 450mm ABOVE GRADE. A COPPER CONDUCTOR SHALL BE UTILIZED BETWEEN THE BIMETALLIC FITTING AND THE GROUND SYSTEM CONNECTION.


GROUND TERMINATION DETAIL

REVISED:	JUNE 2011	LIGHTNING PLATE:	LP-15
----------	-----------	------------------	-------

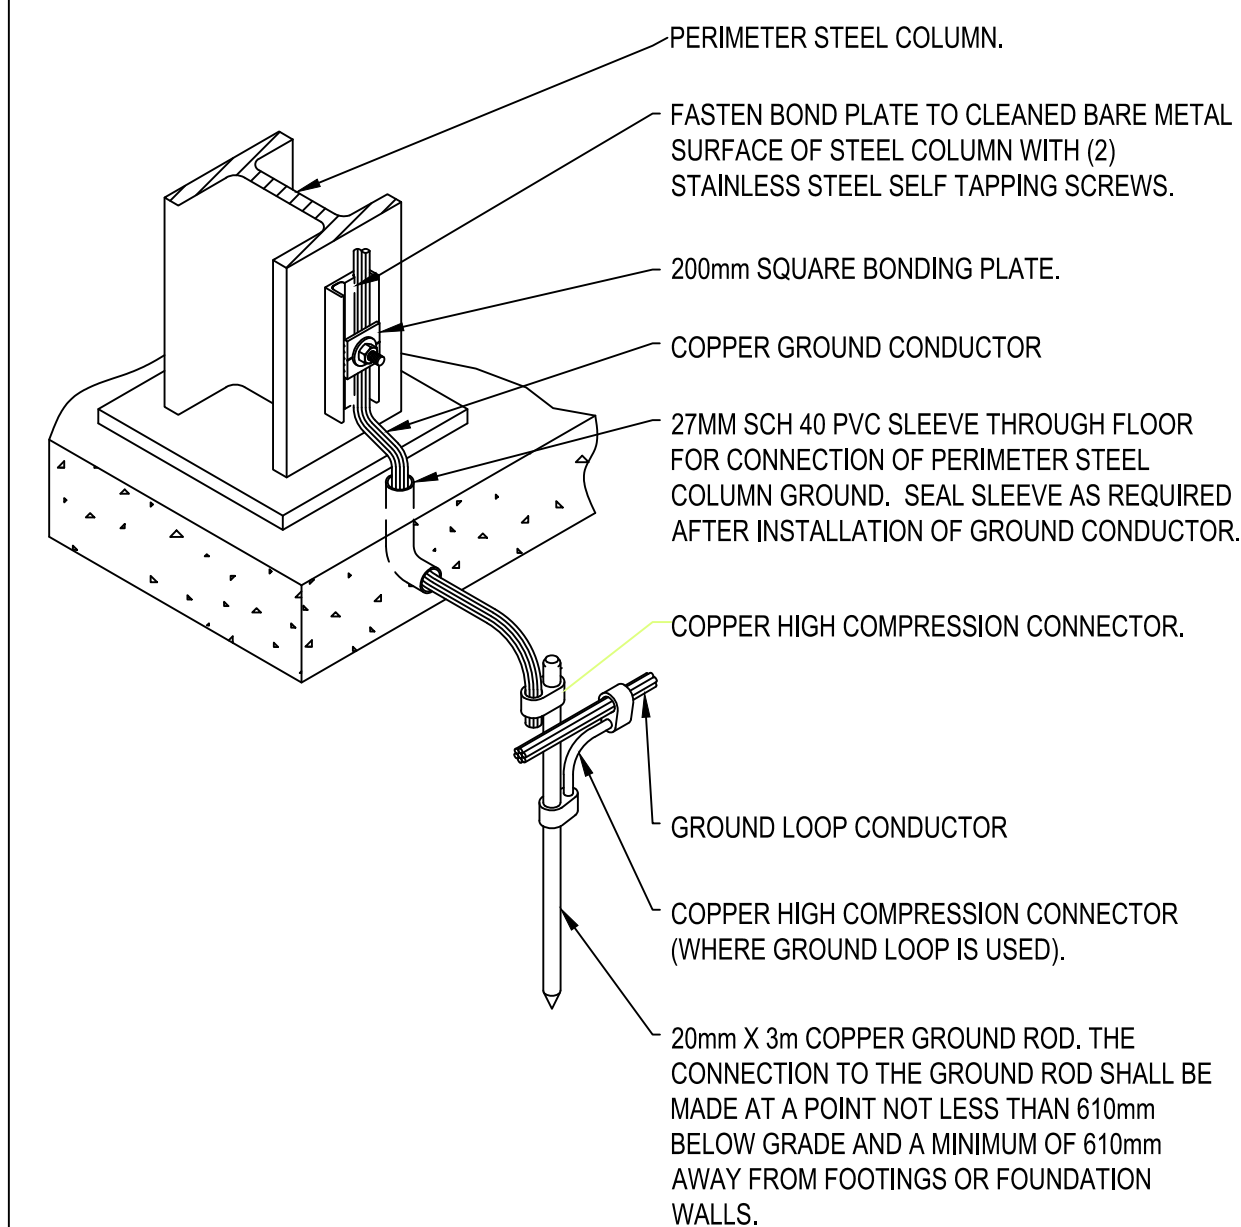


STRUCTURAL STEEL GROUNDING

REVISED:	JUNE 2011	LIGHTNING PLATE:	LP-17
----------	-----------	------------------	-------

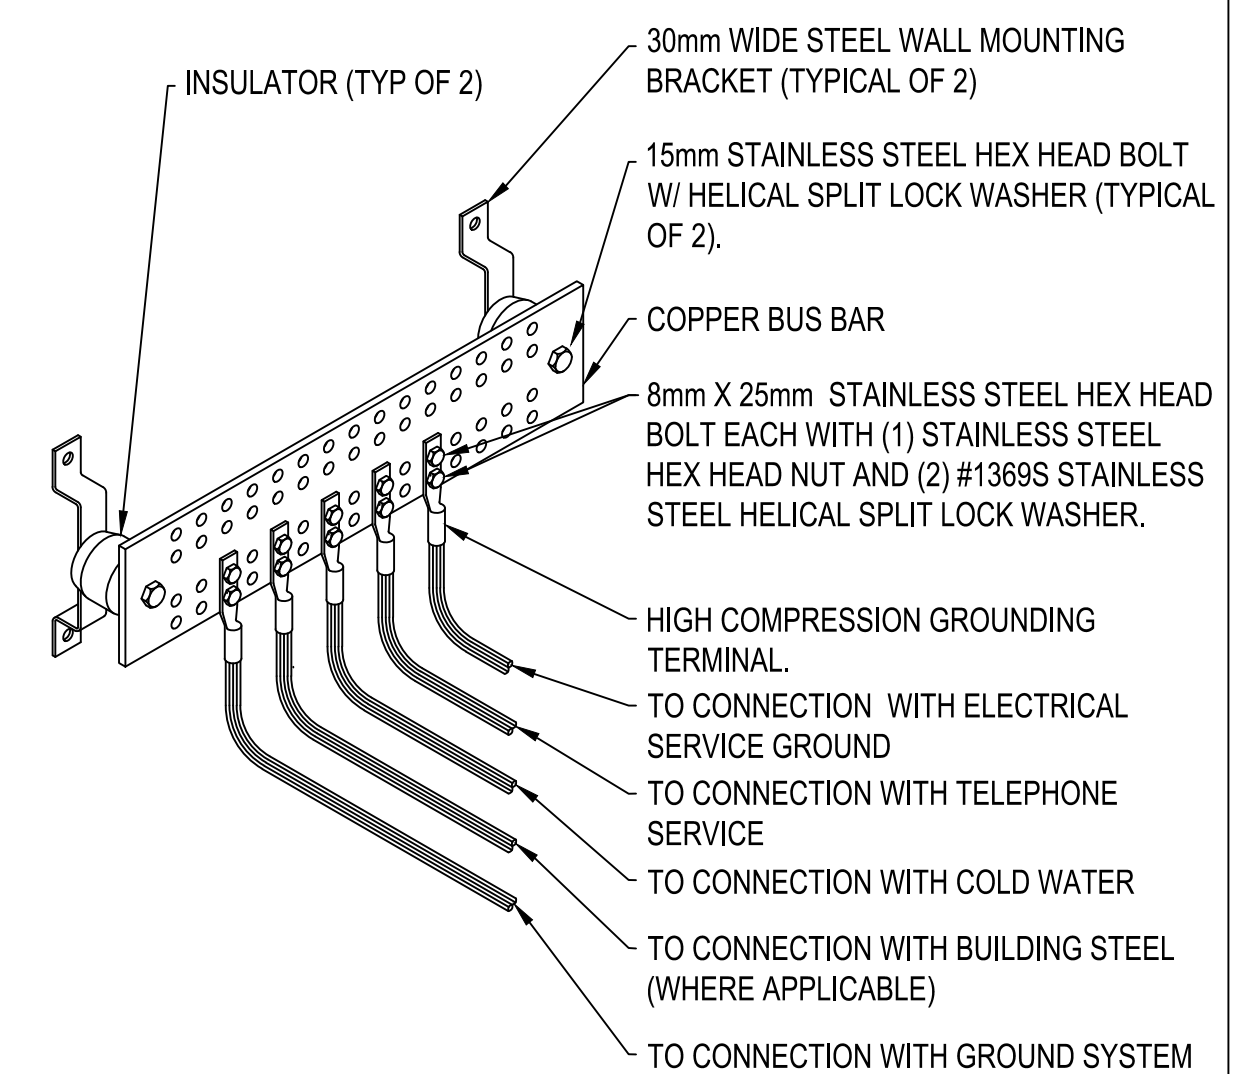

POTENTIAL EQUALIZATION BONDING

REVISED:	JUNE 2011	LIGHTNING PLATE:	LP-21
----------	-----------	------------------	-------



A/E INFO

ANDER NAFAC

EVANS VIA EMAIL				
RY TO	DATE	01/15/2026		
GMB	DRW	GMB	CHK	SEK
MJD/ATP				
MANAGER	SEK			
D DIR	WBF			
TECTION ENGINEER	DSN			

PLANNING, DESIGN AND CONSTRUCTION	VARIOUS LOCATIONS	NORFOLK VA
VARIOUS LOCATIONS		
JOINT MARITIME FACILITY		
GROUNDING AND LPS DETAILS		

NONE
CT NO.: 1838720
CONTR. NO.
DRAWING NO.
14157224
162 OF 170
EG502

FILE NAME: Y:\OCONUS\MultipleSites\2024_1783264_P1360_JAMFAB_Design\DWG\Sheet\13_ELEC\TN101.dwg LAYOUT NAME: TN101 - Telecommunications and Overhead Cable Tray Plan PLOTTED: Tuesday, January 20, 2026 - 12:18pm USER: enrichefion

TELECOMMUNICATIONS AND OVERHEAD CABLE TRAY PLAN

SCALE: 1:100



GENERAL SHEET NOTES

- A. PROVIDE ALL TELECOMMUNICATIONS INSTALLATIONS IN ACCORDANCE WITH THE CANADIAN CSA GROUP (CAN/CSA-T527, 528, 529 AND 530), AS WELL AS ADDITIONAL REQUIREMENTS LISTED IN THE SPECIFICATIONS.
- B. SEE SHEETS E-501 FOR TYPICAL WORKSTATION AND PRINTER OUTLET DETAILS AND CONFIGURATIONS.

SHEET KEYNOTES

- SEE "OPS EQUIPMENT ROOM 116 UNDERFLOOR CABLE TRAY PLAN" ON SHEET TN401.
- SEE "ENLARGED OUTSIDE CABLING ENTRANCE DETAIL" ON SHEET TN401 FOR ADDITIONAL WORK THIS AREA.
- PLYWOOD BACKBOARD ON TWO LONG WALLS IN TELECOMM. ROOM, 5450 LONG, FROM 300 AFF TO 2440 AFF.
- 300 WIDE X 50 DEEP, OVERHEAD, BASKET OR LADDER-TYPE CABLE TRAY. INSTALL ABOVE LAY-IN CEILING AT 3150 AFF TO BOTTOM.
- 300 WIDE X 50 DEEP, OVERHEAD, BASKET OR LADDER-TYPE CABLE TRAY. COORDINATE MOUNTING HEIGHT WITH OTHER CABLE TRAY PROVIDED IN ROOM UNDER NOTE 1 ABOVE.
- TRANSITION CABLE TRAY TO CONDUIT WHEN PASSING THROUGH INTERIOR PARTITION. SEAL OPENING TO MAINTAIN ALL RATINGS OF PARTITION.
- LOCATE JUNCTION BOX ABOVE LAY-IN CEILING AND ROUTE 25 EMPTY CONDUIT TO JUST BELOW ROOF FOR INSTALLATION OF ROOF-MOUNTED GPS ANTENNA CABLING BY OTHERS.
- SEE "ENLARGED ROOM 110 TELECOMMUNICATIONS PLAN ON SHEET TN401 FOR ADDITIONAL WORK THIS AREA.

GRAPHIC SCALE


1:100 0 1000 5000 10000mm




DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
PLANNING, DESIGN AND CONSTRUCTION
VARIOUS LOCATIONS
JOINT MARITIME FACILITY
TELECOMMUNICATIONS AND OVERHEAD CABLE TRAY PLAN

SCALE: AS NOTED
APPROVED NO.: 1838720
CONSTR. CONTR. NO.
NAVFAC DRAWING NO. 14157225
SHEET 163 OF 170
TN101


FILE NAME: Y:\OCONUS\MultipleSites\2026_1783264_P1360_JMFA\B_Design\DWG\Sheet\13_ELEC\VT1360_1783264_TN501.dwg LAYOUT NAME: TN501 - Telecommunications Workstation Outlet Details PLOTTED: Tuesday, January 20, 2026 - 12:18pm USER: erichen

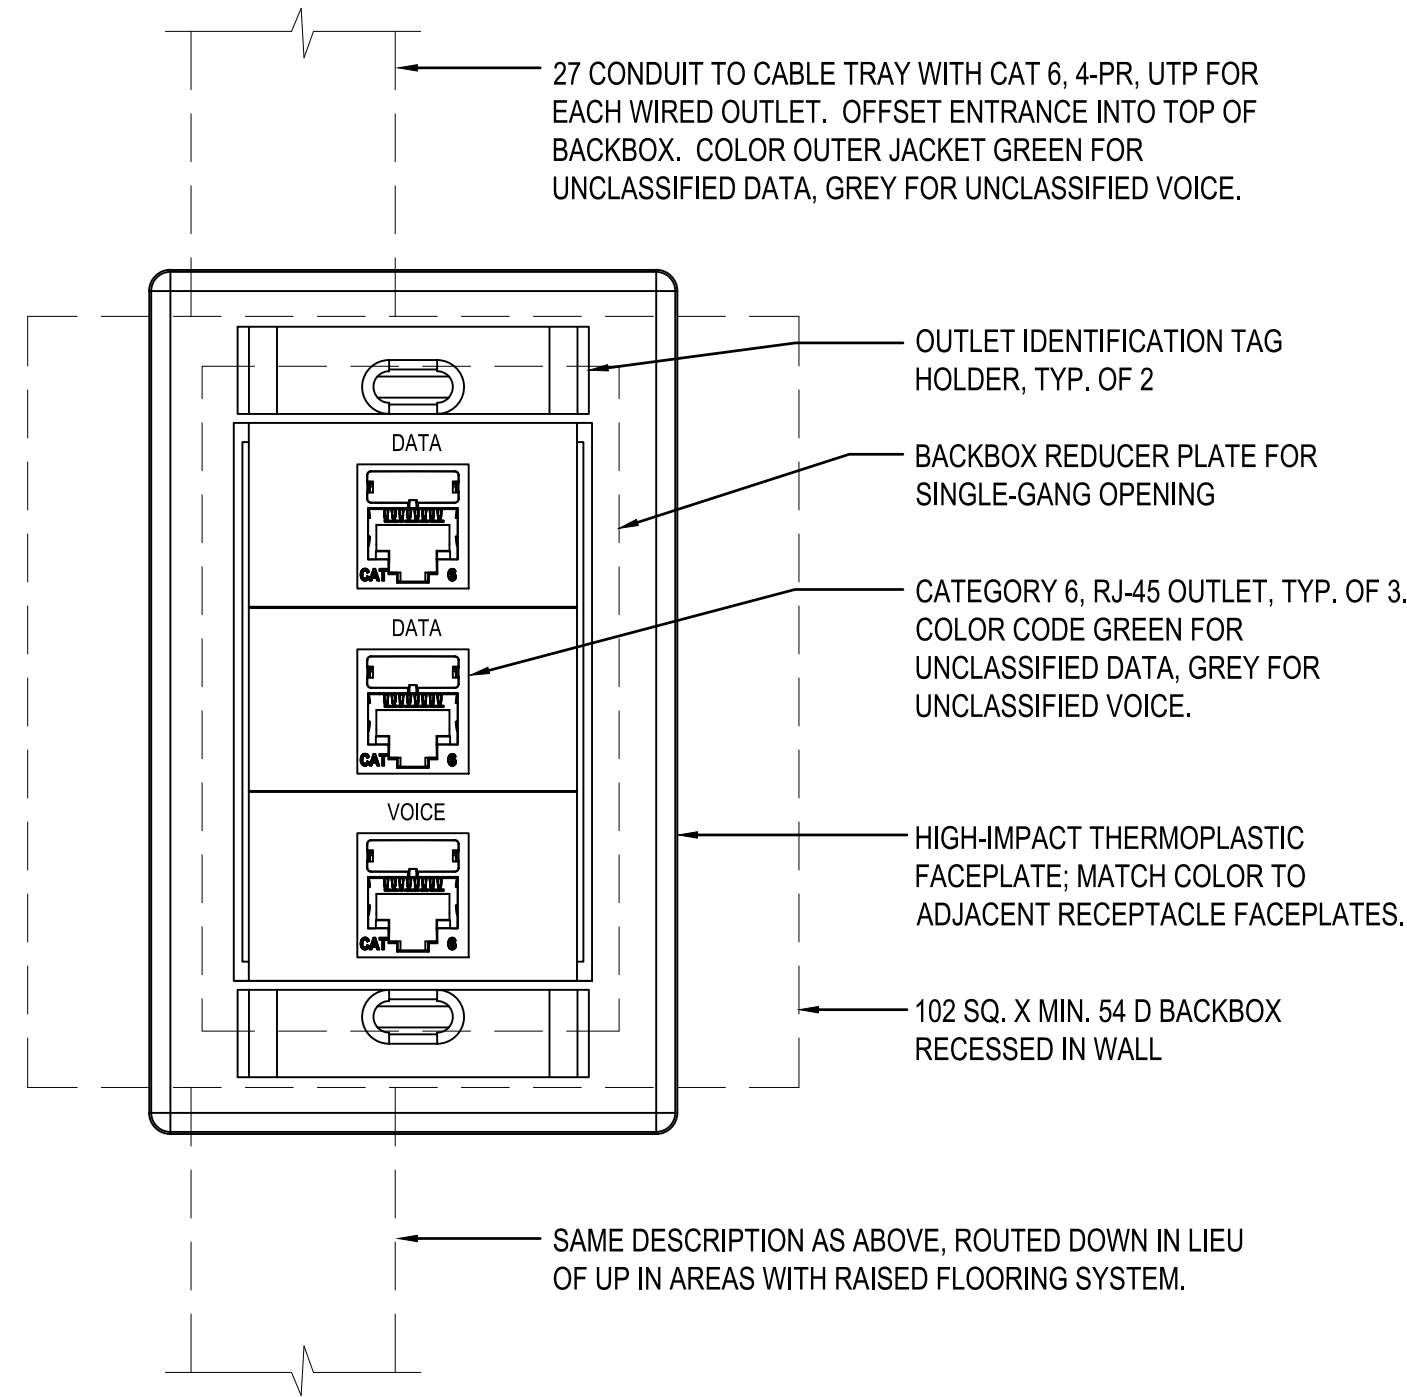


C1 WORKSTATION OUTLET TYPE 'A' - ▽^A
SCALE: NOT TO SCALE

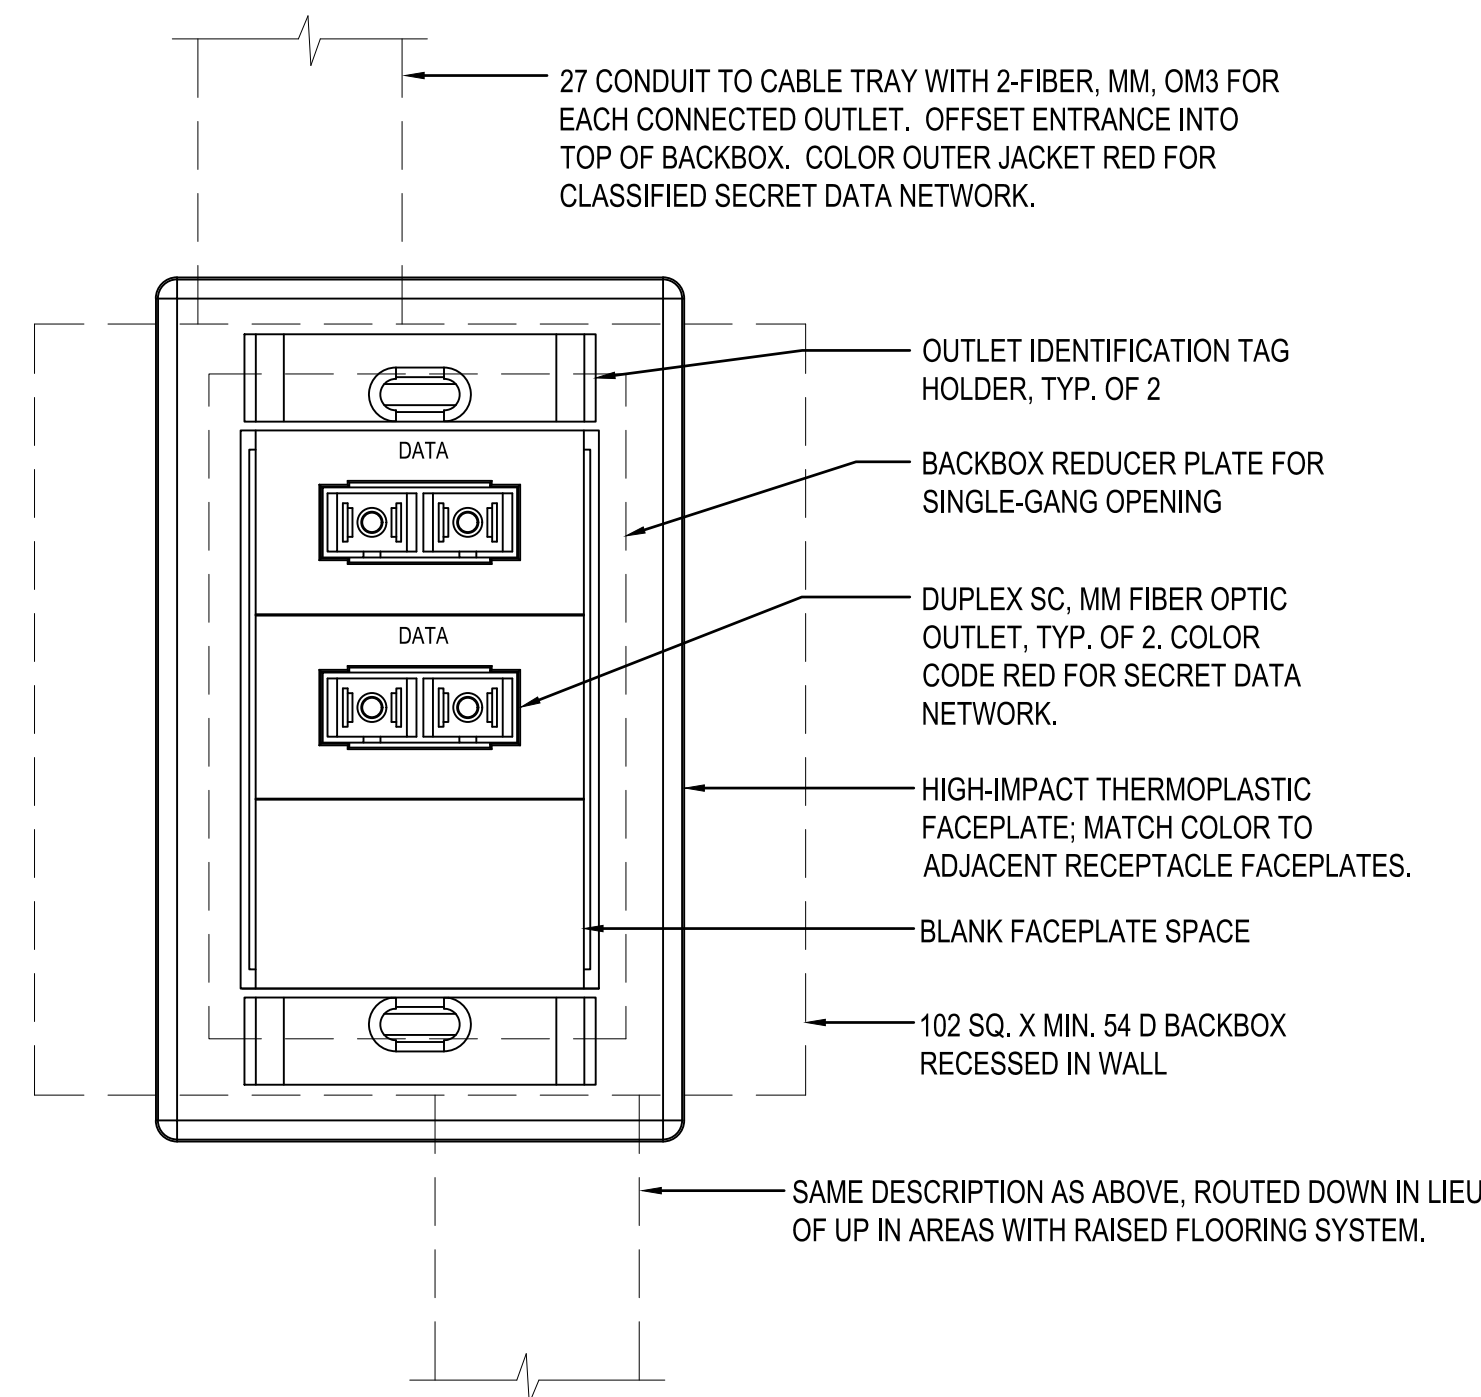

C2 WORKSTATION OUTLET TYPE 'B' - ▽^B
SCALE: NOT TO SCALE

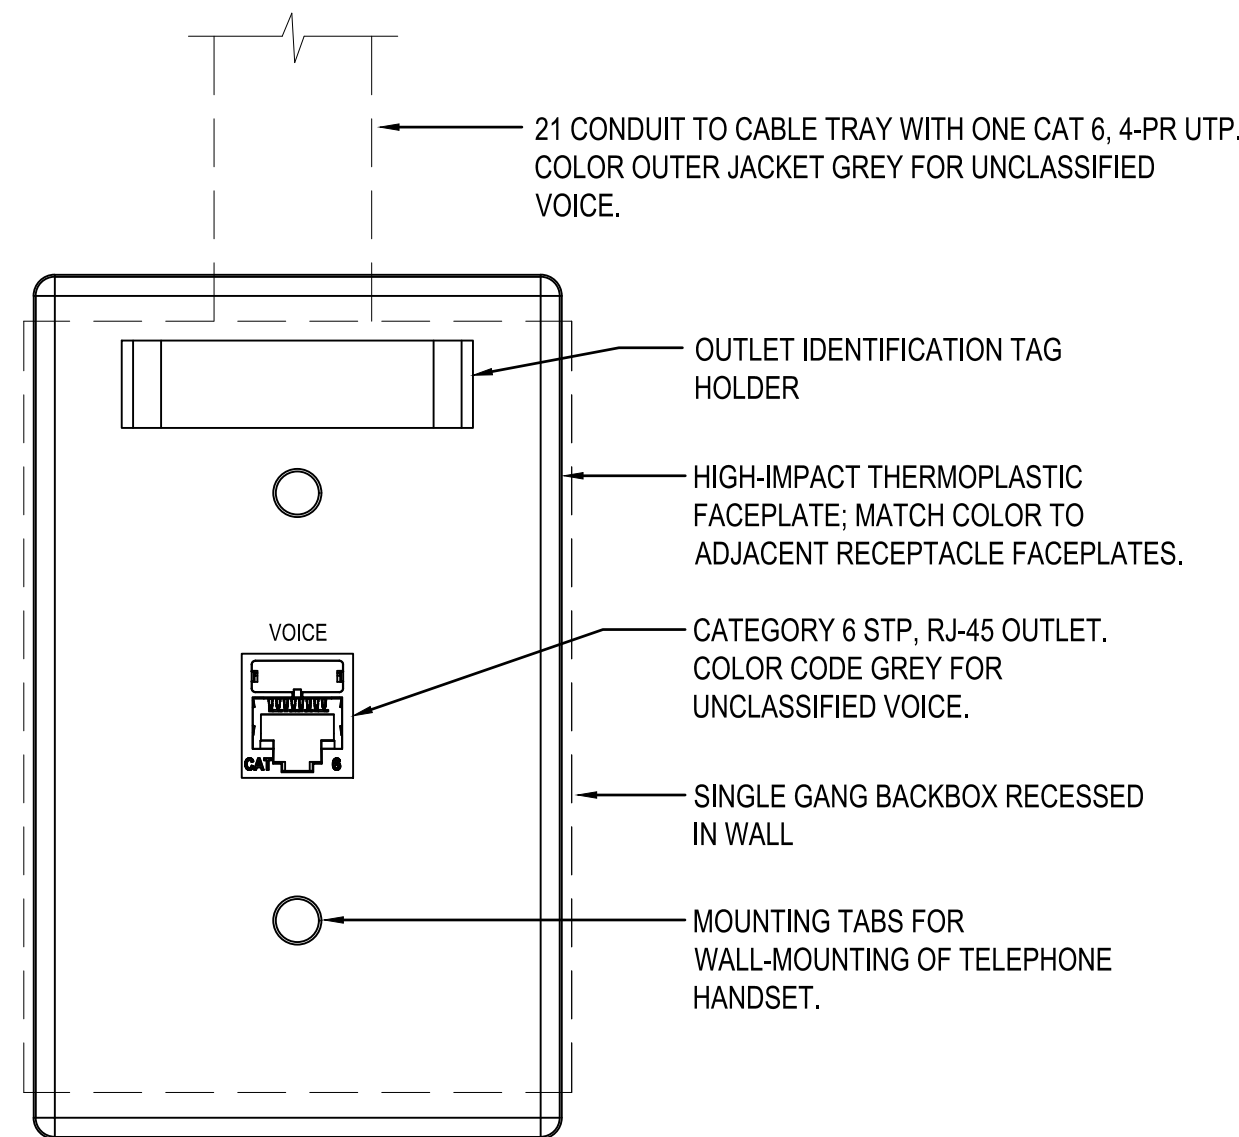

A1 WALL-MOUNTED HANDSET OUTLET - ▽
SCALE: NOT TO SCALE

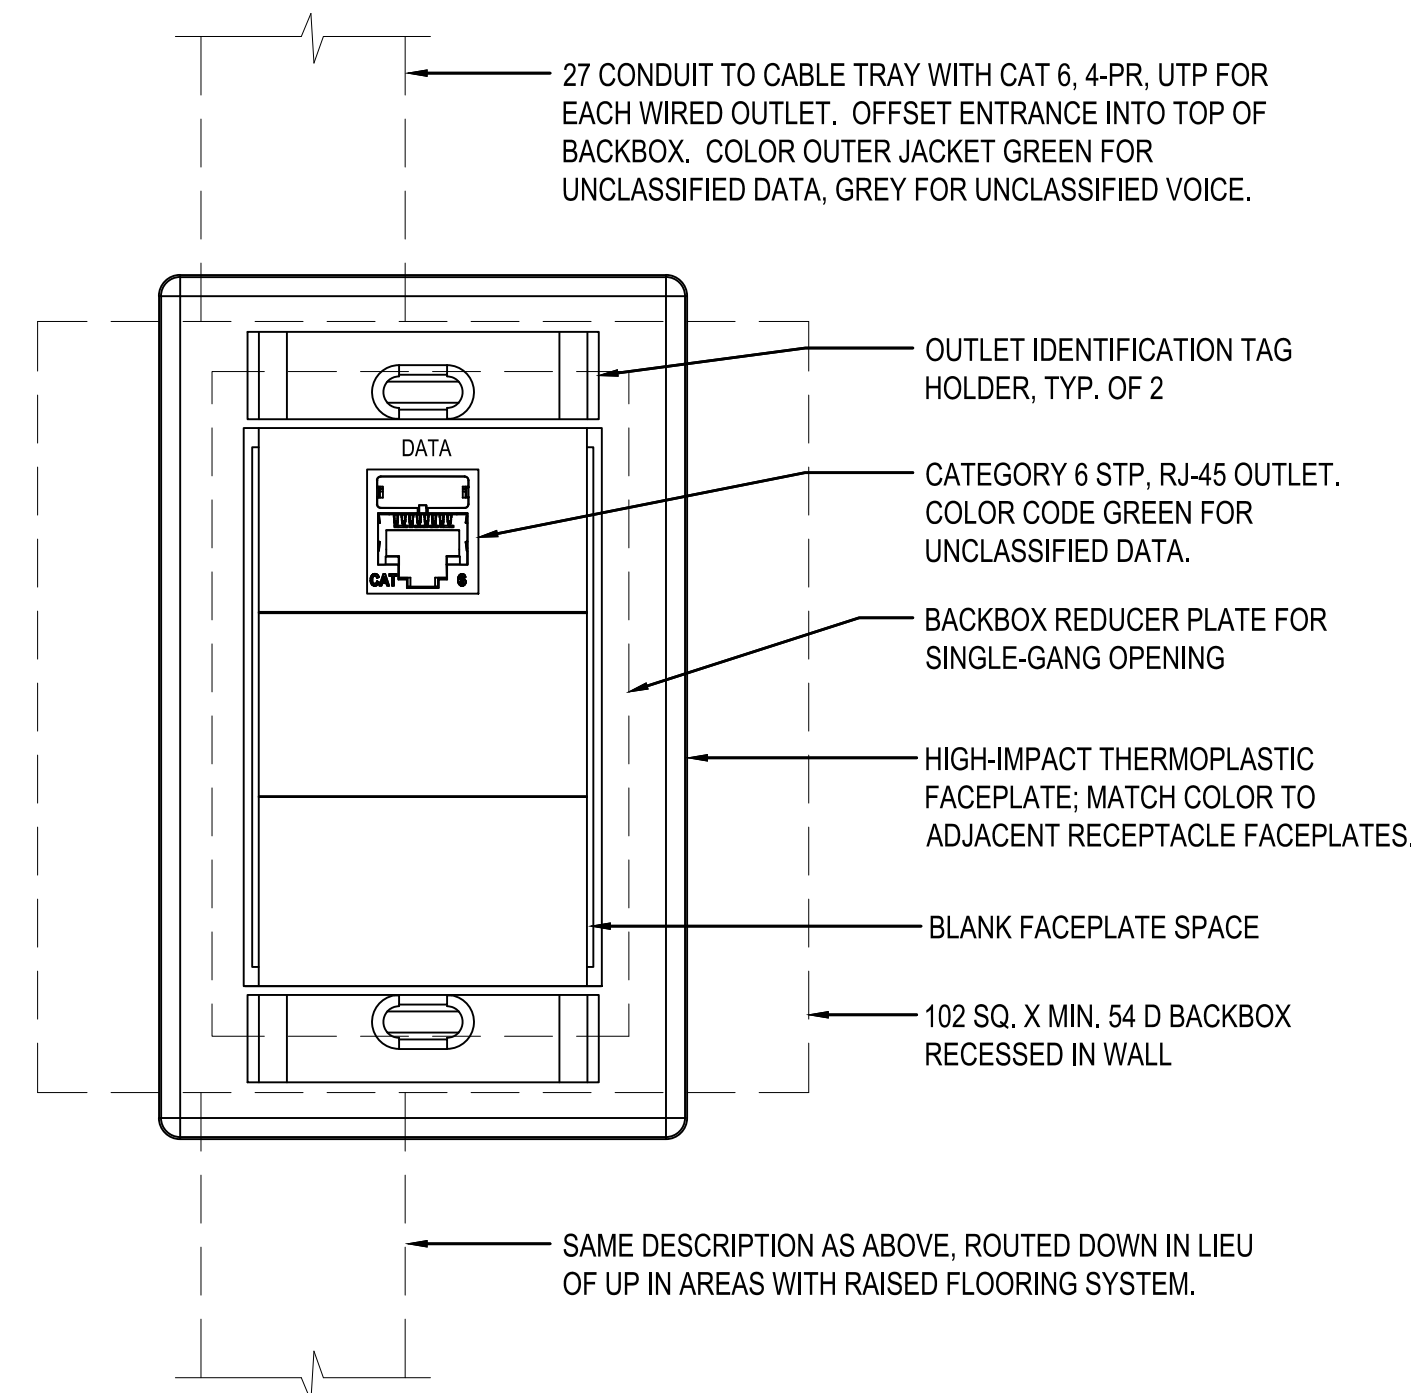

A2 NETWORK PRINTER OUTLET TYPE 'C' - ▽^C
SCALE: NOT TO SCALE




APPROVED
FOR COMMANDER NAVFAC
ACTIVITY
D. EVANS VIA EMAIL
SATISFACTORY TO DATE 01/15/2026
DES CAB DRW CAB CHK SEK
PM/DM MJD/ATP
BRANCH MANAGER SEK
DES PROD DIR WBF
FIRE PROTECTION ENGINEER DSN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - ATLANTIC
PLANNING, DESIGN AND CONSTRUCTION
VARIOUS LOCATIONS
VARIOUS LOCATIONS
JOINT MARITIME FACILITY
TELECOMMUNICATIONS WORKSTATION OUTLET DETAILS


SCALE: NONE
APPROVED NO. 1838720
CONSTR. CONTR. NO.
NAVFAC DRAWING NO. 14157227
SHEET 165 OF 170
TN501

NAVFAC METRIC DRAWING REVISION: 01 OCTOBER 2018

FILE NAME: Y:\OCONUS\MultipleSites\2024_1783264_P1360_JAUFAB_Design\DWG\Sheet\13_ELEC\PT1360_1783264_TN601.dwg LAYOUT NAME: TN601 - Telecommunications Riser Diagrams PLOTTED: Tuesday, January 20, 2026 - 12:18pm USER: enricheiden

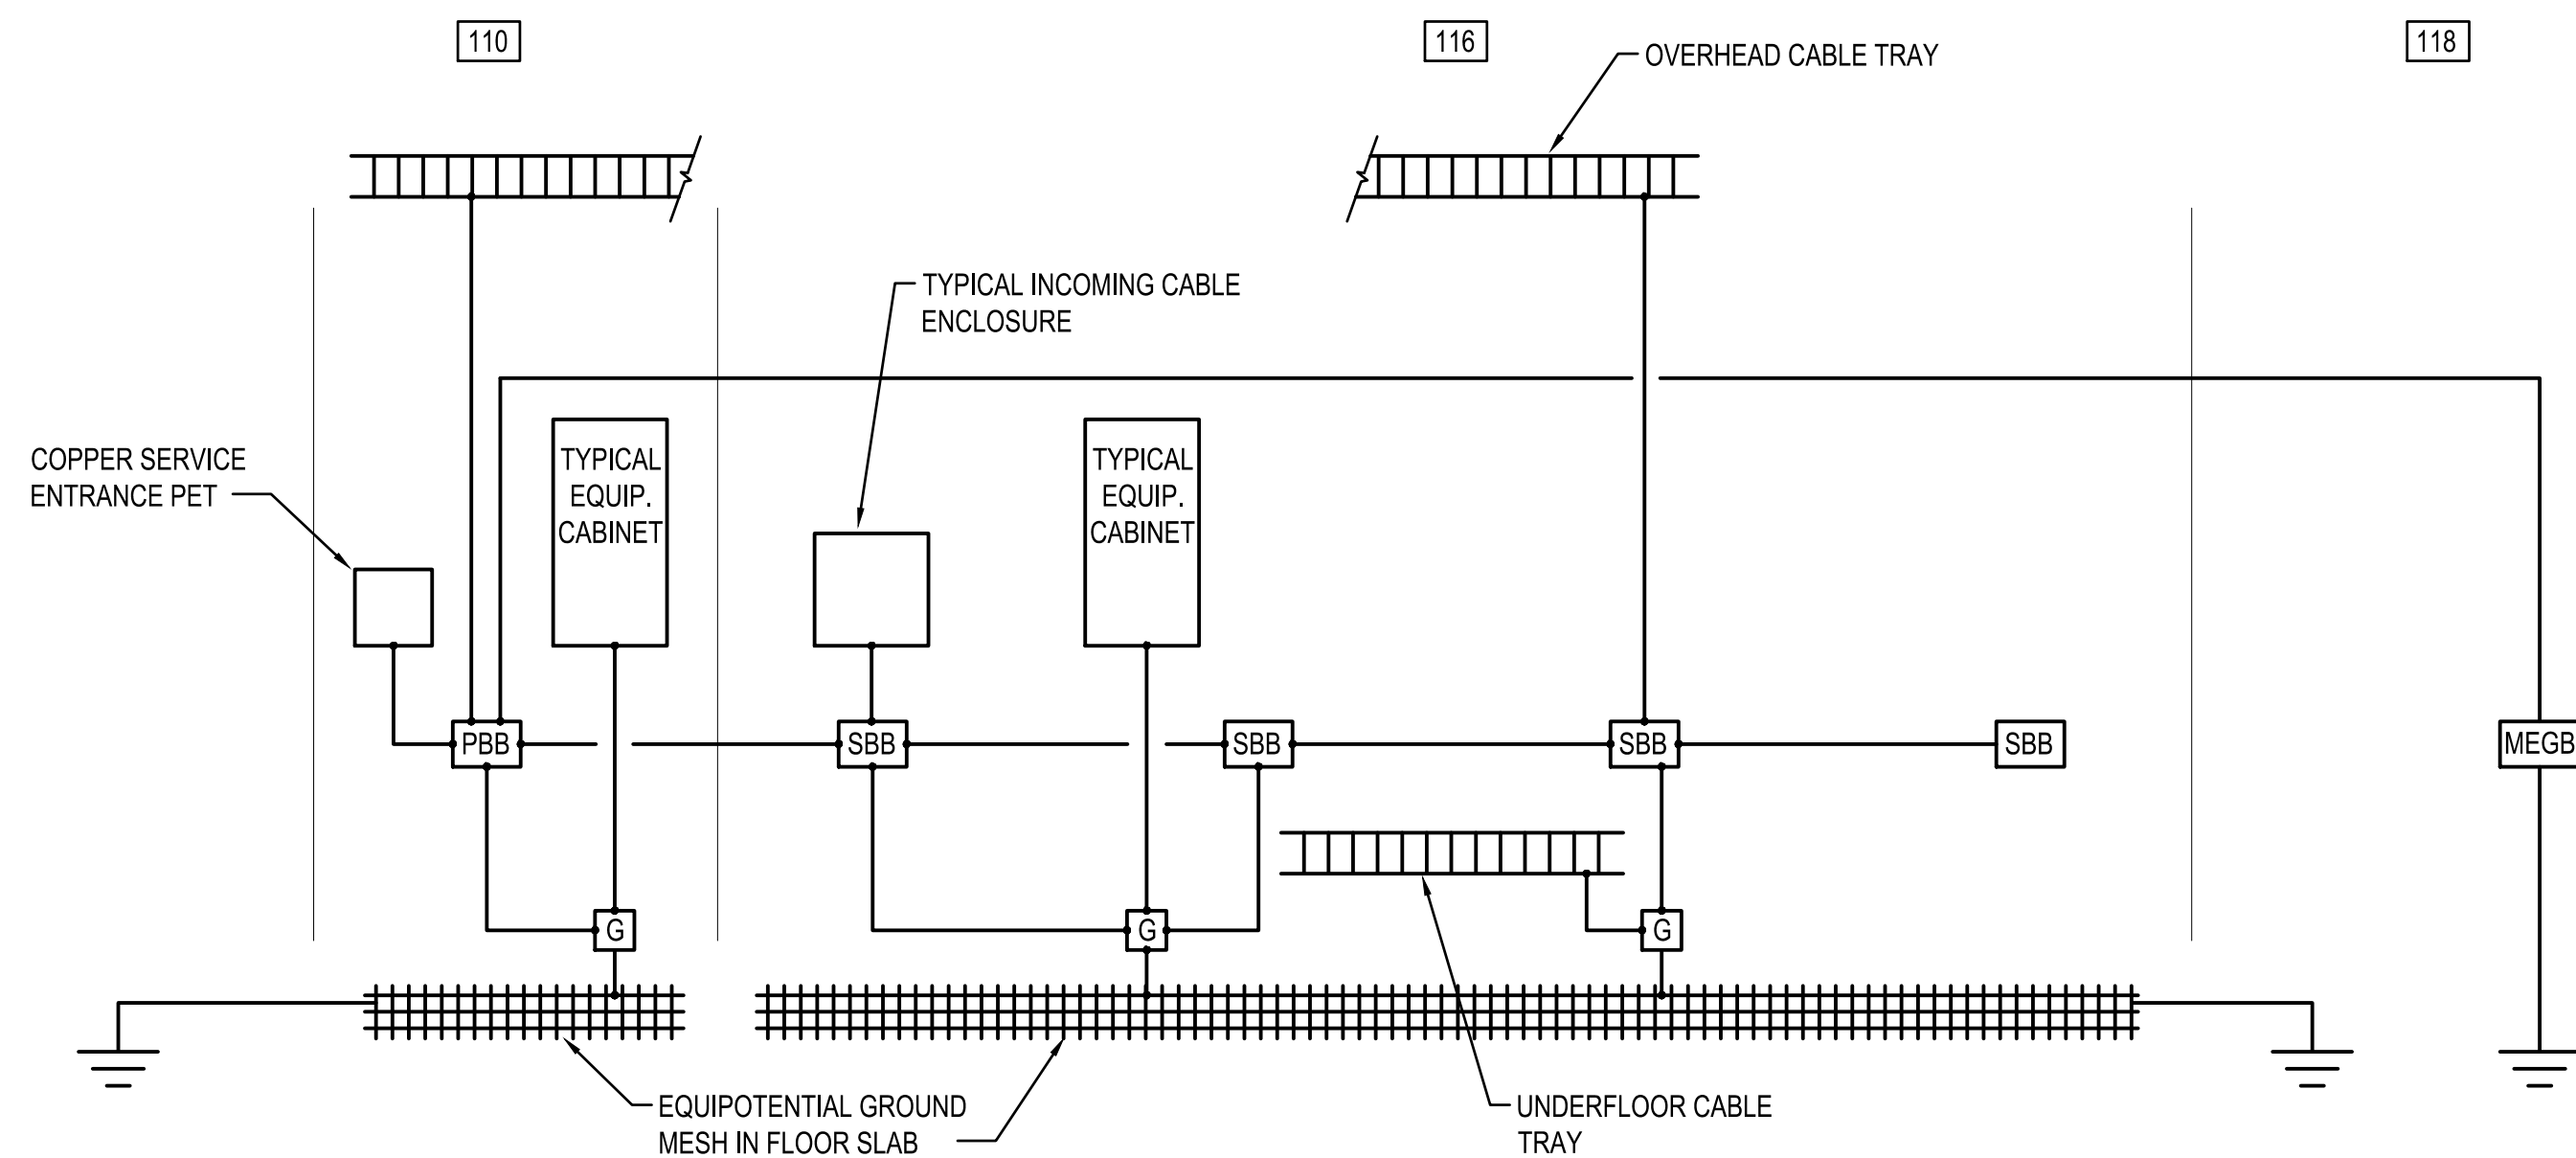

C1 TELECOMMUNICATIONS GROUNDING RISER DIAGRAM
SCALE: NONE

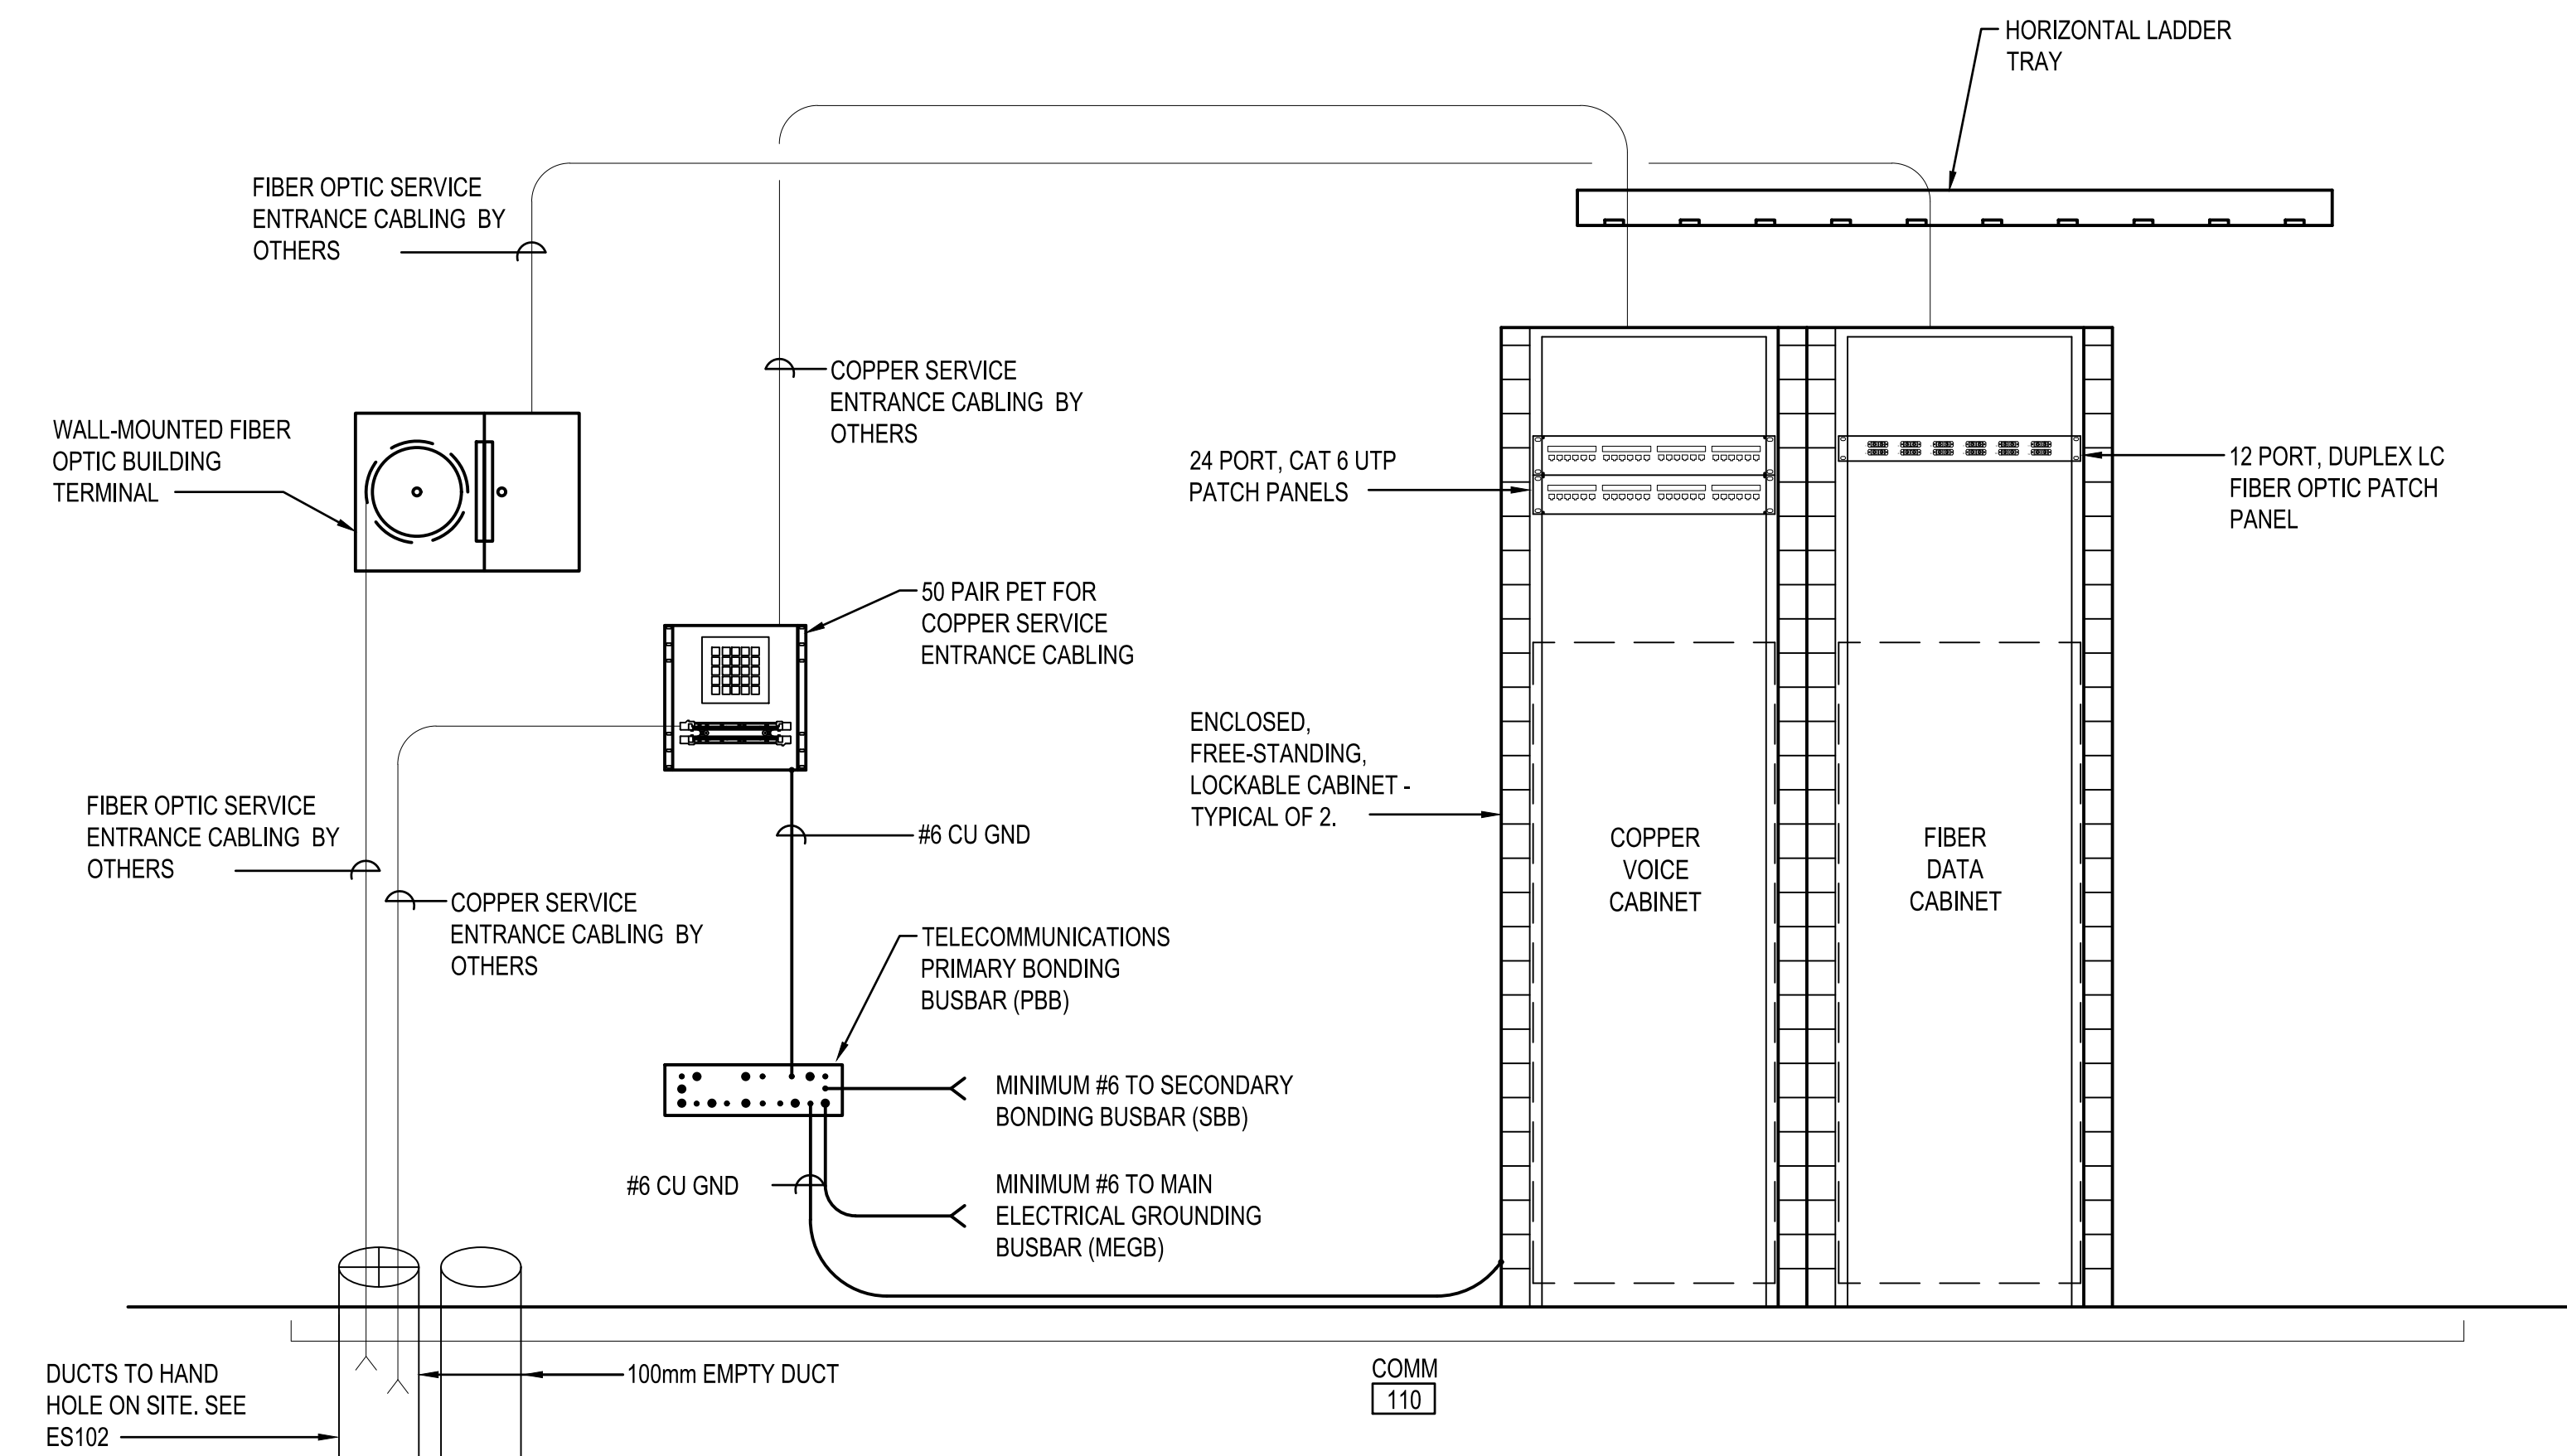

A1 TELECOMMUNICATIONS RISER DIAGRAM
SCALE: NONE

ROUTE CONDUIT BACK TO CABLE TRAY IN
COMM ROOM 110 AND PROVIDE PLASTIC
BUSHING ON CONDUIT END, TYPICAL


ROUTE CONDUIT BACK TO CABLE TRAY IN
OPS ROOM 116 AND PROVIDE PLASTIC
BUSHING ON CONDUIT END, TYPICAL

27mm C WITH 2 - CAT 6,
4-PR, UTP, TYPICAL

A
TYPICAL
UNCLASSIFIED
WORKSTATION

27mm C WITH 2 - 2
STRAND MM FOC,
TYPICAL

B
TYPICAL
CLASSIFIED
WORKSTATION



APPROVED
FOR COMMANDER NAVFAC
ACTIVITY
D. EVANS VIA EMAIL
SATISFACTORY TO DATE 01/15/2026
DES CAB DRW CAB CHK SEK
PM/DM MJD/ATP
BRANCH MANAGER SEK
DES PROD DIR WBF
FIRE PROTECTION ENGINEER DSN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
PLANNING, DESIGN AND CONSTRUCTION
VARIOUS LOCATIONS
NAVFAC
NORFOLK VA
VARIOUS LOCATIONS
JOINT MARITIME FACILITY
TELECOMMUNICATIONS RISER DIAGRAMS

SCALE: NONE
EPROVECT NO.: 1838720
CONSTR. CONTR. NO.
NAVFAC DRAWING NO.
14157228
SHEET 166 OF 170
TN601

NAVFAC METRIC DRAWING REVISION: 01 OCTOBER 2018