




PP. STRAPPING MACHINE



PP - BOX - STRAPPING - ROLL



PP - STRAPPING - ROLL - PRINTED

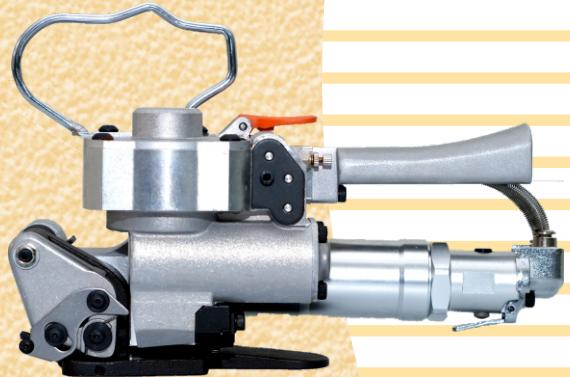

PNEUMATIC STRAPPING TOOL




PET - BOX - STRAPPING - ROLL



BOPP TAPE ROLL



POLYOLEFIN SHRINK FILM ROLL

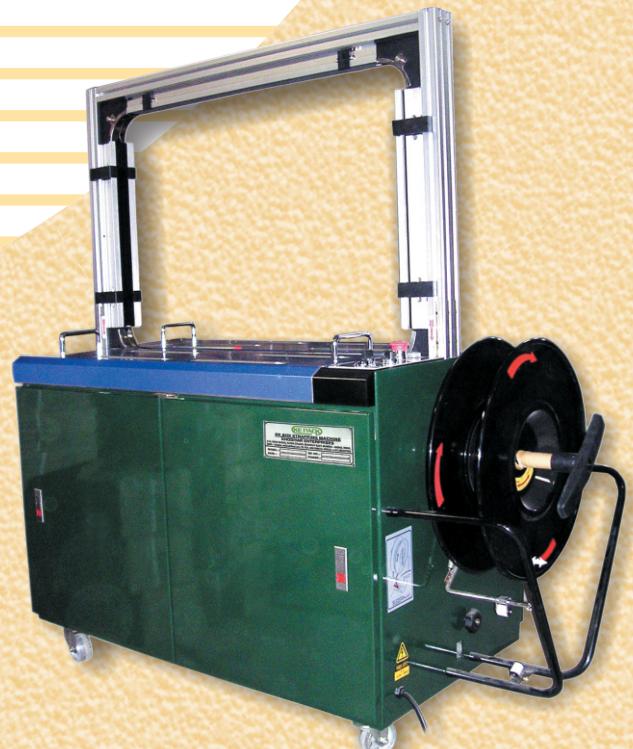

FEATURES

- SUITABLE FOR ORDINARY STRAPPING OPERATION
- EASY TO OPERATE CONVENIENT MAINTANACE
- QUALITY ELECTRO-MAGNETIC CLUTCH TRANSMISSION
- TOP SAFETY CONCERN
- STEADY HEATING SET, PREHEAT IN 45 SEC
- ADVANCE PCB CONTROL



ARCHANA ENTERPRISES

PLOT NO. 45, SR. NO. 115/7/8 2/2, AUDUMBER SOCIETY (B), KARVE NAGAR, PUNE-411 052

MOBILE : 09767859841/9284185709, EMAIL:- sales@archanapack.com, URL:- <https://archanapack.com>

BRANCH OFFICES

MUMBAI

PLOT NO. 3/10, USHA SADAN,
DATAR COLONY, NEAR GANESH
MANDIR, BHANDUP(E),
MUMBAI - 400 042

SAMBHAJINAGAR

PLOT NO. 197, GAT NO. 173,
GROWTH CENTER, CIDCO
WALUJ, MAHANAGAR-1,
SAMBHAJINAGAR - 431133

NASHIK

SHOP NO. 2, KATHE NIVAS,
SADGURU NAGAR, OPP.
SHREEJI PARK APT., MIDC,
SATPUR, NASHIK - 422 007

NASHIK

BEHIND CORPORATION BANK,
SAVALI ROAD, NEAR RTO
OFFICE, MIDC, KUPWAD,
SANGLI - 416 436

SANGLI

FLAT NO. 002, SHREE GANESH
APARTMENT UDHOJI LANE,
UDHOJI WADA, MAHAL,
NAGPUR-440 032.

NAGPUR

SEMI AUTOMATIC STRAPPING MACHINE


POWER SUPPLY	: 1 PH 230 VOLT 50 HZ 0.65 KVA
SEALING METHOD	: HEAT SEALING
SPEED	: 1.5 SEC/STRAP
STRAP WIDTH	: 6-15MM
TENSIONING FORCE	: MAXIMUM 60 KG
MIN. PACKAGE SIZE	: 60MM
DIMENSION	: L895MM*W565MM*H740MM
WEIGHT	: 90 KG



KE-51

SEMI AUTOMATIC STRAPPING MACHINE

POWER SUPPLY	: 1 PH 230 VOLT 50 HZ 0.65 KVA
SEALING METHOD	: HEAT SEALING
SPEED	: 1.5 SEC/STRAP
STRAP WIDTH	: 6-15MM
TENSIONING FORCE	: MAXIMUM 60KG
MIN. PACKAGE SIZE	: 60MM
DIMENSION	: L1510MM*W565MM*H480MM
WEIGHT	: 100 KG

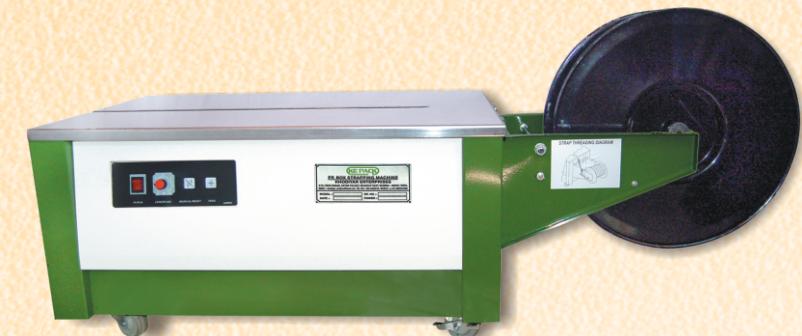

KE-101L (Floor Model)



KE-101 (Heavy Duty)

SEMI AUTOMATIC STRAPPING MACHINE

POWER SUPPLY	: 1 PH 230 VOLT 50 HZ 0.65 KVA
SEALING METHOD	: HEAT SEALING
SPEED	: 1.5 SEC/STRAP
STRAP WIDTH	: 6-15MM
TENSIONING FORCE	: MAXIMUM 60KG
MIN. PACKAGE SIZE	: 60MM
DIMENSION	: L895MM*W565MM*H740MM
WEIGHT	: 100 KG

SEMI AUTOMATIC STRAPPING MACHINE

POWER SUPPLY	: 1 PH 230 VOLT 50 HZ 0.65 KVA
SEALING METHOD	: HEAT SEALING
SPEED	: 1.5 SEC/STRAP
STRAP WIDTH	: 6-15MM
TENSIONING FORCE	: MAXIMUM 60KG
MIN. PACKAGE SIZE	: 60MM
DIMENSION	: L660MM*W460MM*H810MM
WEIGHT	: 80 KG



KE-151 (Mini Model)

SEMI AUTOMATIC STRAPPING MACHINE

POWER SUPPLY	: 1 PH 230 VOLT 50 HZ 0.65 KVA
SEALING METHOD	: HEAT SEALING
SPEED	: 1.5 SEC/STRAP
STRAP WIDTH	: 6-15MM
TENSIONING FORCE	: MAXIMUM 60KG
MIN. PACKAGE SIZE	: 60MM
DIMENSION	: L910MM*W580MM*H730MM
WEIGHT	: 100 KG



KE-201 (Extra Heavy Duty)



KE-301 (Heavy Duty)

FULLY AUTOMATIC STRAPPING MACHINE

POWER SUPPLY	: 3 PH 450 VOLT 50 HZ
POWER CONSUMPTION	: 1250 KW
SEALING METHOD	: HEAT SEALING
SPEED	: 2.4 SEC/STRAP
STRAP WIDTH	: 9, 12, 15 MM
TENSIONING FORCE	: MAX 90KG
MIN. PACKAGE SIZE	: L200MM*W200MM*H30MM
ARCH SIZE	: W850MM*H600MM
DIMENSION	: L1440MM*W640MM*H1535MM
WEIGHT	: 250 KG

FEATURES

- PP STRAP SKIPS AUTOMATICALLY AND FEED STRAP AUTOMATICALLY
- TRANSMITTING WITH LOWER NOISE SOUND
- MACHINE HAS CHECK BUZZER WHEN PP STRAP CONSUMPTION
- THE SENSOR SIGNAL INSPECT FOR STRAP STORAGE TANK