



Université
de Toulouse

THÈSE

En vue de l'obtention du

DOCTORAT DE L'UNIVERSITÉ DE TOULOUSE

Délivré par :

l'Institut National des Sciences Appliquées de Toulouse (INSA de Toulouse)

Présentée et soutenue le *Date de défense (29/10/2021)* par :

AMANDINE MAYIMA

**Endowing the Robot with the Abilities to Control and Evaluate its
Contribution to a Human-Robot Joint Action**

JURY

SILVIA ROSSI	Professeure Associée	Rapportrice
PETER FORD DOMINEY	Directeur de Recherche	Rapporteur
RACHID ALAMI	Directeur de Recherche	Directeur de Thèse
AURÉLIE CLODIC	Ingénierie de Recherche	Directrice de Thèse
SIMON LACROIX	Directeur de Recherche	Membre du Jury
GUY HOFFMAN	Professeur Associé	Membre du Jury
ELISABETH PACHERIE	Directrice de Recherche	Membre du Jury

École doctorale et spécialité :

MITT : Informatique et Télécommunications

Unité de Recherche :

Laboratoire d'Analyse et d'Architecture des Systèmes (LAAS-CNRS)

Directeur(s) de Thèse :

Rachid ALAMI et Aurélie CLODIC

Rapporteurs :

Silvia ROSSI et Peter Ford DOMINEY

Abstract

Robots will interact more and more with humans in the future and thus will need to be endowed with the pertinent abilities. We are still far from having autonomous robots among humans and able to smoothly collaborate with them but the work of this thesis is a contribution bringing the community a bit closer to this goal.

When humans collaborate to achieve a task together, numerous neurocognitive mechanisms come into play, more than we would have thought at first glance. Some of these mechanisms are also triggered in humans' minds when they interact with robots as they are essential to a successful collaboration. Therefore, it is important for roboticists designing robots that will closely interact with humans to be aware of and take into account the humans mental states and sensorimotor functions involved in controlling and smoothing collaborative task performance. However, this does not imply that robots have to be endowed with the same mechanisms since being able to collaborate with humans does not mean to imitate them. What is key to roboticists is to understand how humans work and to design robots that will adapt.

Consequently, this manuscript starts with an immersion in philosophy and social and cognitive psychology. We develop key elements for collaboration such as joint action, commitment and shared plans. Then, we explore Belief-Desire-Intention (BDI) and cognitive robotic architectures which have inspired us to design our own architecture in which, JAHRVIS — the main contribution of this thesis — endows a robot with the abilities not only to control, but also to evaluate its joint action with a human.

JAHRVIS (Joint-Action based Human-Aware supeRVISe) is what we call a supervision system, *i.e.*, it embeds the robot high-level decisions, controls its behavior and tries to react to contingencies, always considering the human it is interacting with. It is able to do so by taking into account shared plans, human mental states, its knowledge about the current state of the environment, and human actions. The module to monitor and recognize these actions is model-based and allows to take into account a potentially unreliable perception of the human. JAHRVIS is designed in such a way that it is generic enough to handle various kinds of tasks. It can also manage different kinds of human-robot shared plans as input: shared plans for which actions might not be allocated to an agent at planning time and objects might be referred to with a semantic query, and conditional shared plans which anticipate different possibilities for the human decision/action.

Not only JAHRVIS controls the robot contribution to a collaborative task, it also tries to evaluate if the interaction is going well or not. It is possible thanks to a set of metrics we have built and a method to aggregate them. We claim that having a robot with this ability allows it to enhance and make more pertinent its decision-making processes. The evaluation of the Quality of Interaction (QoI) relies on a model of interaction, considered at three levels: the interaction session level, the tasks level and the actions level. In future work, this granularity will allow the

robot to know precisely on what level it needs to act when a low QoI is assessed. Indeed, for instance, a task can be of poor quality while the session can still be considered as going well.

JAHRVIS has been integrated in a cognitive robotic architecture and effectively deployed to achieve several collaborative and service tasks in a real environment such as a direction-giving task in a Finnish mall and a two-agents task inspired from psychology. These tasks demonstrated the robot's abilities related to perspective-taking, planning, knowledge representation with theory of mind, manipulation, and communication.

Keywords: Human-Robot interaction, Joint Action, Decision making, Quality of Interaction

Résumé

Dans le futur, les robots interagiront chaque jour un peu plus avec les humains et devront donc être dotés des capacités adéquates. Nous sommes encore loin de robots autonomes parmi les humains, capables de collaborer sans problème avec eux, mais le travail de cette thèse est une contribution qui rapproche un peu plus la communauté de cet objectif.

Lorsque des personnes collaborent pour réaliser une tâche ensemble, de nombreux mécanismes neurocognitifs entrent en jeu, plus qu'il n'y paraît à première vue. Certains de ces mécanismes sont aussi activés quand un humain interagit avec un robot et non plus avec un autre humain, car ils sont essentiels à une collaboration réussie. Il est donc important que les roboticiens qui conçoivent des robots destinés à interagir étroitement avec les humains soient conscients de cela et qu'ainsi ils prennent en compte les états mentaux des humains et les fonctions sensori-motrices impliquées dans le contrôle et la fluidité de l'exécution des tâches collaboratives. Toutefois, cela ne signifie pas que les robots doivent être dotés de ces mêmes mécanismes, car être capable de collaborer avec les humains ne signifie pas les imiter. Ce qui est essentiel pour les roboticiens, c'est de comprendre comment les humains travaillent et de concevoir des robots qui s'adapteront.

Par conséquent, ce manuscrit commence par une immersion dans la philosophie et la psychologie sociale et cognitive. Nous développons les éléments clés de la collaboration tels que l'action conjointe, l'engagement et les plans partagés. Ensuite, nous explorons les architectures "croyance-désir-intention" (Belief-Desire-Intention en anglais) et les architectures robotiques cognitives qui nous ont inspirés pour concevoir notre propre architecture dans laquelle, JAHRVIS - la principale contribution de cette thèse - dote un robot des capacités de non seulement de contrôler, mais aussi d'évaluer son action conjointe avec un humain.

JAHRVIS (Joint-Action based Human-Aware supeRVisor) est ce que nous appelons un système de supervision, c'est-à-dire qu'il prend les décisions haut niveau du robot, contrôle son comportement et tente de réagir aux imprévus, en tenant toujours compte de l'humain avec lequel il interagit. Il peut le faire en se basant sur les plans partagés qu'il génère, les états mentaux de l'humain, sa connaissance de l'état actuel de l'environnement et les actions de l'humain. Le module de surveillance et de reconnaissance de ces actions est basé sur un modèle et permet au robot de prendre en compte une perception potentiellement peu fiable. JAHRVIS est conçu de manière à être suffisamment générique pour gérer différents types de tâches. Il peut également gérer différents types de plans partagés homme-robot en entrée : des plans partagés pour lesquels les actions peuvent ne pas être attribuées à un agent au moment de la planification et pour lesquels les objets peuvent être référencés par une requête sémantique, et des plans partagés conditionnels qui anticipent différentes possibilités pour la décision/action humaine.

JAHRVIS ne se contente pas de contrôler la contribution du robot à une tâche

collaborative, il essaie également d'évaluer si l'interaction se déroule bien ou non. Cela est possible grâce à un ensemble de métriques et à une méthode pour les agréger que nous avons conçu. Nous affirmons que le fait de doter un robot de cette capacité lui permet d'améliorer et de rendre plus pertinent son processus de prise de décision. L'évaluation de la qualité d'interaction (QoI) repose sur un modèle d'interaction à trois niveaux : le niveau de la session d'interaction, le niveau des tâches et le niveau des actions. Dans les travaux futurs, cette granularité permettra au robot de savoir précisément à quel niveau il doit agir lorsqu'une faible QoI est évaluée. En effet, par exemple, une tâche peut être de mauvaise qualité alors que la session peut encore être considérée comme se déroulant bien.

JAHRVIS a été intégré dans une architecture robotique cognitive et déployé efficacement pour réaliser plusieurs tâches de collaboration et de service dans un environnement réel, comme une tâche de guidage dans un centre commercial finlandais et une tâche à deux agents inspirée de la psychologie. Ces tâches ont démontré les capacités du robot en matière de prise de vue, de planification, de représentation des connaissances avec théorie de l'esprit, de manipulation et de communication.

Mots clés : Interaction Homme-Robot, Action Jointe, Prise de décision, Qualité d'Interaction

Acknowledgments

A faire en dernier :-)

Contents

Introduction	1
1 Human, Robot and Interaction Models: the Funding Principles of a Decision-Making System for Human-Robot Collaboration	3
1.1 Social interactions	4
1.1.1 How to define a social interaction?	4
1.1.2 Structure of a social interaction	5
1.2 Human-Robot Social Interactions	7
1.2.1 Interaction lengths	7
1.2.2 Interactions divided in phases	8
1.2.3 Hierarchical interactions	9
1.2.4 Patterns of Interaction	10
1.3 Around the Joint Action Concept	12
1.3.1 How to define Joint Action?	12
1.3.2 Two possible segmentations around Joint Action	13
1.3.3 What is necessary for Joint Action?	15
1.3.4 Communication	24
1.3.5 Theory of Mind	26
1.4 When the interaction goes wrong	28
1.5 Human-Robot Interaction and Joint Action	29
1.5.1 Joint Attention in HRI	29
1.5.2 Communication to Facilitate Coordination in HRI	30
1.5.3 Theory of Mind in HRI	31
1.5.4 Failures in HRI	31
1.6 Architectures for Collaborative Robots, Decision and Execution	33
1.6.1 Architectures for Collaborative Robots	33
1.6.2 Supervision for Human-Robot Interactions	35
1.7 Challenges	35
2 Joint Action-based Human-Aware supeRVISeR: JAHRVIS	37
2.1 The Role and Features of JAHRVIS	38
2.2 An Overview of our Robotic Architecture	39
2.2.1 Situation Assessment	40
2.2.2 Knowledge Base	41
2.2.3 Motion Planner	41
2.2.4 Task Planner	41
2.2.5 Supervision	41
2.3 Representation of a H-R collaborative activity	42
2.3.1 Representation of a Human-Robot Interaction Session	43
2.3.2 Collaborative Tasks, Subtasks and Actions	44

2.4	A BDI Framework as a Base of JAHRVIS Architecture	45
2.4.1	The Choice of the Framework	45
2.4.2	Programming with Jason	46
2.4.3	Jason Integration with ROS	50
2.5	The Architecture of JAHRVIS	52
2.6	A robot controlling its contribution to a human-robot joint action	53
2.6.1	Knowledge Representations and Management	54
2.6.2	Interaction Session Management	60
2.6.3	Human Actions Monitoring	61
2.6.4	Shared Plans Handling	67
2.6.5	Action Execution Management	70
2.6.6	Communication management	70
2.6.7	Future work	70
2.7	A robot evaluating its contribution to a human-robot joint action	71
2.7.1	Introduction	71
2.7.2	Related work	72
2.7.3	The Quality of Interaction (QoI)	74
2.7.4	A set of metrics	75
3	A direction-giving robot in a mall	83
3.1	Introduction	84
3.2	Related work	86
3.3	Rationale	87
3.4	Designing direction-giving behavior in a shopping mall	89
3.4.1	What we learnt from humans	89
3.4.2	Design of the collaborative task for a direction-giving robot	90
3.5	The deliberative architecture	92
3.5.1	Environment representation	93
3.5.2	Perceiving the partner	97
3.5.3	Managing the robot's resources	97
3.5.4	Describing the route to follow	98
3.5.5	Planning a shared visual perspective	100
3.5.6	Navigate close to human	102
3.5.7	Robot execution control and supervision in a joint action context	103
3.6	A robot in the wild	108
3.6.1	Pepper in Ideapark	108
3.6.2	The deliberative architecture embedded in a physical robot	109
3.7	Integration and test of the QoI Evaluator	114
3.7.1	QoI Evaluation at the task level	117
3.7.2	QoI Evaluation at the action level	118
3.7.3	Proof-of-Concept	120
3.7.4	Discussion on the results of the QoI Evaluator	124
3.8	User Study	125

4 The Director Task: a Psychology-Inspired Task to Assess Cognitive and Interactive Robot Architectures	127
4.1 Introduction	128
4.2 From psychology to Human-Robot Interaction	130
4.2.1 The original task	130
4.2.2 The Director Task setup	132
4.2.3 The adapted task	134
4.2.4 Additional abilities	135
4.3 Architecture and knowledge link	136
4.3.1 Storing and reasoning on symbolic statements	137
4.3.2 Assessing the world: from geometry to symbolism	138
4.3.3 Planning with symbolic facts	140
4.3.4 Managing the interaction	141
4.3.5 Speaking and understanding	142
4.4 Experiments	143
4.4.1 Pr2 as the director	144
4.4.2 Pr2 as the receiver	145
4.5 Open challenges for the community	147
4.5.1 Challenges to take up	147
4.5.2 User studies to perform	149
5 A robot in a storage room	151
Conclusion	153
A Code of JAHRVIS ROS-Jason Agents	157
A.1 Human Actions Monitoring	157
B Scaling Functions	161
B.1 Scaling of bounded metrics: Min-Max Normalization	161
B.2 Scaling of unbounded metrics: Sigmoid Normalization	162
Bibliography	165

Acronyms

BDI Belief-Desire-Intention. 3

HAM Human Actions Monitoring. 52, 54, 62, 64

HATP Hierarchical Agent-based Task Planner. 59, 67, 68, 141

HATP/EHDA Human Aware Task Planner with Emulation of Human Decisions and Actions. 59, 68

HPM Human Plan Manager. 62, 67, 68

HRI Human Robot Interaction. 27, 55, 59, 127, 131, 134

HTN Hierarchical Task Network. 42, 55, 58, 59, 68

JAHRVIS Joint Action-based Human-Aware supeRVISeOr. 3, 38, 39, 51, 50, 52, 53, 54, 55, 56, 57, 58, 59, 60, 67, 68, 114

KB Knowledge Base. 54, 55, 56, 60

MuMMER MultiModal Mall Entertainment Robot. 83, 84, 114

REG Referring Expression Generation. 127, 141, 142, 143, 147

RJA ROS-Jason Agent. 50, 51, 52, 54, 57, 62, 67

RPM Robot Plan Manager. 67, 68

SSR Semantic Spatial Representation. 96, 99, 108, 111

ToM Theory of Mind. 26, 27, 30, 67

Introduction

Contributions of the Thesis

List of Publications

Published

- Sarthou, G., Mayima, A., Buisan, G., Belhassein, K., & Clodic, A. (2021, August). The Director Task: a Psychology-Inspired Task to Assess Cognitive and Interactive Robot Architectures. In *2021 30th IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)*.
- Mayima, A., Clodic, A., & Alami, R. (2020, August). Toward a Robot Computing an Online Estimation of the Quality of its Interaction with its Human Partner. In *2020 29th IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)* (pp. 291-298).
- Singamaneni, P-T., Mayima, A., Sarthou, G., Sallami, Y., Buisan, G., Y., Belhassein, K., Waldhart, J., & Clodic, A. (2020, March). Guiding Task through Route Description in the MuMMER Project. [Video]. In *HRI '20: ACM/IEEE International Conference on Human-Robot Interaction*. (pp.643-643).
- Belhassein, K., Fernández Castro, V., & Mayima, A. (2020). A Horizontal Approach to Communication for Human-Robot Joint Action: Towards Situated and Sustainable Robotics. In *Culturally Sustainable Social Robotics*. (pp.204-214).
- Foster, M.E., Craenen, B., [...], Mayima, A., [...], Lammi, H., & Tammela, A. (2019, November). MuMMER: Socially Intelligent Human-Robot Interaction in Public Spaces. Artificial Intelligence for Human-Robot Interaction. In *Symposium (AI-HRI), AAAI Fall Symposium Series 2019*.
- Mayima, A., Clodic, A., & Alami, R. (2019, November). Evaluation of the Quality of Interaction from the robot point of view in Human-Robot Interactions. In *The 11th International Conference on Social Robotics (ICSR) (1st Edition of Quality of Interaction in Socially Assistive Robots (QISAR) Workshop)*.

Accepted

- Mayima, A., Clodic, A., & Alami, R. Towards robots able to measure in real-time the Quality of Interaction. To be published in *International Journal of Social Robotics*.

Submitted

- Fernández Castro, V., Mayima, A., Belhassen, K., Clodic, A., The Role of Commitments in Socially Appropriate Robotics. Submitted to in a volume of the Book *Serie Techno:Phil.*
- Mayima, A., Sarthou, G., Buisan, G., Singamaneni, P-T., Sallami, Y., Belhassen, K., Waldhart, J., Clodic, A., & Alami, R. Direction-giving considered as a Human-Robot Joint Action. Submitted to *User Modeling and User-Adapted Interaction (UMUAI)*.
- Belhassen, K., Fernández Castro, V., Mayima, A., Clodic, A., Pacherie, P., Guidetti, M., Alami, R., & Cochet, H. Addressing joint action challenges in HRI: Insights from psychology and philosophy. Submitted to *Acta Psychologica*.

CHAPTER 1

Human, Robot and Interaction Models: the Funding Principles of a Decision-Making System for Human-Robot Collaboration

Contents

1.1	Social interactions	4
1.1.1	How to define a social interaction?	4
1.1.2	Structure of a social interaction	5
1.2	Human-Robot Social Interactions	7
1.2.1	Interaction lengths	7
1.2.2	Interactions divided in phases	8
1.2.3	Hierarchical interactions	9
1.2.4	Patterns of Interaction	10
1.3	Around the Joint Action Concept	12
1.3.1	How to define Joint Action?	12
1.3.2	Two possible segmentations around Joint Action	13
1.3.3	What is necessary for Joint Action?	15
1.3.4	Communication	24
1.3.5	Theory of Mind	26
1.4	When the interaction goes wrong	28
1.5	Human-Robot Interaction and Joint Action	29
1.5.1	Joint Attention in HRI	29
1.5.2	Communication to Facilitate Coordination in HRI	30
1.5.3	Theory of Mind in HRI	31
1.5.4	Failures in HRI	31
1.6	Architectures for Collaborative Robots, Decision and Execution	33
1.6.1	Architectures for Collaborative Robots	33
1.6.2	Supervision for Human-Robot Interactions	35
1.7	Challenges	35

This first chapter aims at setting the context for this thesis. First, we present some related works on human-human and human-robot social interactions. These works nourished the thoughts which led to this manuscript. Then, we develop key elements for collaboration such as joint action, commitment and shared plans. Finally, we explore Belief-Desire-Intention (BDI) and cognitive robotic architectures which have inspired us to design our own architecture in which, JAHRVIS — the main contribution of this thesis — endows a robot with the abilities not only to control, but also to evaluate its joint action with a human.

1.1 Social interactions

check refs to CA

1.1.1 How to define a social interaction?

First, let's take a look at the dictionary and see how the word “interaction” is defined. According to the Oxford dictionary, an interaction is a “reciprocal action or influence” and more precisely a “communication or direct involvement with someone or something”. As for the Cambridge dictionary, it defines it as an occasion when two or more people or things communicate with or react to each other”. Those definitions can give an hint about what it an interaction between humans but they are not specific enough. Now, going through social psychology literature, one of the first attempt to define “social interaction” was by Goffman [108]. He distinguished three basic interaction units: the social occasion, the gathering and the social situation. The social occasion is an event that is temporally and spatially situated in such a way that it forms a unit that can be looked forward and back upon, by participants that are informed by the event (dinner, meeting, sport game...). The gathering refers to any set of two or more individuals who are at the moment in one another's immediate presence. It can be noted that a social occasion may include several gatherings but that gathering do not need social occasions to occur (they can happen in office spaces, street corners, restaurants...). The social situation refers to the full spatial environment that embraces interacting people. It is created as soon as people engage in interaction, when mutual monitoring occurs and ends when the next to the last person leaves. Furthermore, Goffman distinguished between focused and unfocused interaction (gathering). A focused gathering has its members that can come together to sustain a joint focus of visual and cognitive attention and are open to each other for talk. He calls it encounters or engagements. On the other hand, an unfocused gathering has its members present to one another but not engaged together (*e.g.*, persons waiting for a bus). In this same book, Goffman proposed a definition of social encounter: “an occasion of face-to-face interaction, beginning when individuals recognize that they have moved into one another's immediate presence and ending by an appreciated withdrawal from mutual participation”.

A couple of years later, Argyle wrote a book entitled Social Interaction [8], where he laid the foundations to understand social interactions. He came to the view that social interaction could be interpreted as a set of social skills, and that it may therefore be possible to train these skills the same way as manual skills are trained. For example, during an encounter between two persons, each must be able to perceive the social cues (verbal or non-verbal signals) of the other which are then filtered through the perspective each has acquired through socialization and experience. The interpretation of context and social cues is then applied to arrive at a definition of the situation, which in turn guides both behavior and action.

Then, Rummel proposed a definition of a few words: “Social interactions are the acts, actions, or practices of two or more people mutually oriented towards each other’s selves. It is behavior that tries to influence or take into account another’s subjective experiences or intentions” [235].

The elements brought here, trying to define what is an interaction and more precisely a social interaction, are chosen among a large amount of work. It is possible to find different definitions.

1.1.2 Structure of a social interaction

Most of the research about interaction and social interaction belongs to the field of social psychology. As for the structure of a social interaction, it is more from the field of Conversation Analysis (CA) which mixes sociology, anthropology, linguistics, speech-communication and psychology.

Robinson makes a review of the work that has been done about *overall structural organization* [231]. Most of the time in the literature, overall structural organization is discussed in terms of “the overall structural organization of entire, single occasions of interaction”. Then, the *overall structural organization* term is generally used to talk about one particular (albeit large) unit of interaction. However, many different types of interactional units can have an overall structural organization. For example, Schegloff encouraged to recognize “‘overall structural organization’ not as something for the unit ‘a single conversation’ (or encounter, or session, etc.) alone, but for units like turns, actions and courses of action (like answering or telling), sequences, and who knows what else as well” [250]. He also mentioned that every unit of organization should probably have a local organization and a global organization. Here, the term *overall structural organization* refers to “the overall structural organization of entire, single occasions of interaction”.

Robinson tells us that this concept has received relatively little analytic attention and thus is still not well understood [231]. Indeed, research has been more focused on analyzing the organization of individual sequences of action such as turn-takings or conversation openings. Several terms have been used to talk about a *supra-sequential coherence*: big package, set of pre-organized sequences, (social) activity, project of activity or plan of action. Sacks gave the following definition for the overall structural organization of single occasions of interaction: it “deals, roughly, with beginnings and endings, and how beginnings work to get from beginnings to

something else, and how, from something else, endings are gotten to. And also the relationship - if there is one - between beginnings and endings” [236, p. 157]. Robinson summarized research about the subject by saying that single occasions of interaction (in a generic or context-free sense) are normatively organized as: (1) beginning with an opening (2) ending with a closing and (3) having “something” in between opening and closing” which can be referred to as topics [231].

1.1.2.1 Opening

Openings are used to begin an encounter. One of the main reference on the subject is the work of Schegloff [249]. Openings and related issues vary depending on the nature of interactions. For example, opening of a phone call to a family member or a friend will be organized as follow: (1) summons-answer (the one calling talks first) (2) identification/recognition of each other (3) greetings and (4) how-are-you. Whereas, in primary-care medical visits, opening is sequenced as: (1) greeting (2) securing patients’ identities (2) retrieving and reviewing patients’ records and (4) embodying readiness (sitting down and facing one another). More examples from the literature can be found in (Robinson, 2012).

Another work, by Kendon [149], focuses on the greeting part, but more precisely the greeting behavior with the associated non-verbal cues. The greeting behavior is divided in three main phases: the distance salutation, the approach and the close salutation. The distance salutation only occurs if the greeters are far enough such as they need to get closer if they wish to continue the interaction. This phase starts after one or both participants sight one another and at least one of them identifies a wish to engage in a greeting. In case one of the participant has not seen the other one, he signals his presence by vocalizing the other one’s name or by clearing his throat. Then, they orient their bodies towards each other and exchange glances in a subtle acknowledgement that the greeting is desired by both. During this phase, people can also wave or give a sign with their head (*e.g.*, nod). The approach is divided into two sub-phases: the distant approach and the final approach. During the distant approach, people tend to look away whereas when the final approach starts (the greeters are 3 meters or less from one another), they look back at each other and, they smile. Finally, there is the close salutation, the most normalized phase of the greeting. It happens when people are 1,5 meters or less from each others. Then, they can have a non-contact close salutation during which people exchange verbal greetings, or they can hand-shake or embrace (or do something else according to their culture). The greeting is over.

1.1.2.2 Topics

Episodes of interaction vary a lot in their contextualized nature, which leads to a large variety of topics and sequences of topics. Interactions that happen in ordinary or institutional contexts can be pre-organized around one or more topics. Robinson gave examples such as an emergency call or an expected call back by a friend to discuss an expected single item of business [231].

1.1.2.3 Closing

Schegloff is one of the reference on closing as well [252]. A closing can be divided into two phases: the topic termination and the leave-taking. The topic termination has a pre-closing statement which signals to the partner the wish to close the conversation. Then, the leave-taking follows the pre-closing statement and its response and, includes the goodbye exchange. Finally, the partners break co-presence, *i.e.*, physically walk apart.¹ In the context of a phone call, Clark and French defined this co-presence breaking as the *contact termination* when people hang up [71].

With regards to non-verbal cues, Knapp *et al.* listed and analyzed them [159]. The more frequent are eye contact breaking, head nodding, leaning toward the partner and positioning in the direction of the way of leaving.

1.2 Human-Robot Social Interactions

Now that we have seen how social interactions look like when happening between humans, we are going to see the different ways the human-robot interaction field divided and categorized interactions. It is possible to define an interaction according to its length as we will show in Section 1.2.1. Then, inside the interaction, what are the different temporal phases? We will see it in Section 1.2.2. Next, in Section 1.2.3, we will take an interest in a different way to segment interactions: with hierarchical levels. Finally, some authors proposed some interaction patterns, we will present a few in Section 1.2.4.

1.2.1 Interaction lengths

Short-term Interactions Zheng *et al.* defined a *short-term interaction* [304] based on the Unified Theories of Cognition of Newell [204]. A short-term interaction corresponds to the “cognitive band” of cognition, during which they focus on individual utterances and speech acts for interactions that last for tens of seconds. They left aside longer-term interactions that can be in the “rational band” (minutes to hours) or the “social band” (days to months). Gaschler *et al.* deployed a bartender robot and defined a short-term interaction as being a customer ordering a drink – from the attention request towards the bartender to the closing of interaction by payment and exchange of polite phrases [98]. Iocchi *et al.* used the *short-term* to refer to short interactions and that are focused on only one particular communicative objective, avoiding long and complex interactions [137]. Sanelli *et al.* gave three characteristics to a short-term human-robot interaction: (1) users are not familiar with the robot (2) each interaction happens with a different user (3) interaction is short in time. Then, the robot has not memory of past interactions [238].

¹It is not explicitly mentioned in [252] but they precise in a footnote that it would not make sense if the parties remain in co-presence after having been through the closing sequence.

Long-term Interactions A survey [178] has been done by Leite *et al.* about long-term human-robot interactions, where long-term means, most of the time, several interactions between the same human and robot. They defined four contexts for which social robot² for long-term interaction have been designed: health care and therapy, education, work environment and public spaces, and people’s homes.

For example, Kanda *et al.* performed a field trial at an elementary school in Japan for two months [143]. The children were able to interact with the robot for 32 days in total, during 30 minutes after lunch. The robot could switch between one hundred pre-defined behaviors (*e.g.*, hugging, shaking hand or singing) but not all of them were available during the first interactions with a human. Indeed, they had integrated a pseudo-development mechanism, *i.e.*, the more a child interacts with the robot, the more different behaviours the robot displays to that child. Also, the robot confided personal-themed matters to children who have often interacted with it (*e.g.*, “I don’t like the cold”). These abilities allowed the robot to maintain the children’s interest even after the first week whereas in a first experiment where the robot’s behavior was the same all along the two months, most children stopped to interact with the robot from the second week.

In their discussion, Kanda *et al.* raised an interesting question: “ How Long Should ‘Long-Term’ Be?” They found out that some authors consider that two months is a long-term interaction. They also pointed that some Human-Computer Interaction studies on long-term interaction last five weeks. In their survey, Leite *et al.* gave their point of view, which seems well-thought. They argued that it is more important to look at the number of interaction sessions and the length of these sessions (a five minutes-interaction is different from a one hour-interaction). For them, an interaction can be considered as long-term when the user becomes familiarized with the robot to a point that their perception of such robot is not biased by the novelty effect anymore. This definition raises another question: when does user’s familiarization with the robot become stable? But we will not discuss it here.

1.2.2 Interactions divided in phases

Among works on short-term or long-term interactions, some authors divided interactions in phases which have sometimes similarities with the phases of social interactions described in Section 1.1.

Gockley *et al.* divided an interaction in three phases: greeting, core of the interaction and departure [107]. In the greeting phase, Valerie, the robot receptionist, greets people who might be interested in engaging in conversation. Thus, people are classified into “attentional” states:

- present (people a bit far and moving): Valerie doesn’t pay attention to them
- attending (people closer): Valerie greets them

²actually, some of the robots featured in the survey are not social robots such as a Roomba or the Personal Exploration Rover (PER)

- engages (people next to the desk but on the side): Valerie acknowledges their presence but does not expect input from them
- interacting (people in front of the keyboard): Valerie prompts them for input if they are not typing.

In the core of interaction, either Valerie can tell her (fictive) story or chat. Her story is subjective and evolve over time. It is about her social life, her lounge singing career, her therapy business, and her job as a receptionist. Furthermore, Valerie has a chatbot system which is very simple. Finally, inputs from visitors are from a keyboard, for easier control and reliability. Finally, at departure, when a person leaves the “interacting” region, Valerie signals the end of the interaction by saying “goodbye”.

Kidd and Breazeal presented robot which is a weigh loss coach [156]. They introduced here the notion of states of relationship. They are three: initial (for the first few days of interaction), normal, repair. According to the state of relationship, the robot answers/questions/speech will not be the same. Kasap and Magnenat-Thalmann designed their system so, to each user, corresponds an interaction session [148]. Each session is composed of four dialogue phases: welcome, warm up, teach and farewell. The system has a memory of users and past interactions. In the memory, is recorded the context (initial state and goal), contents (events) and the outcome (goal succeeded or not). A bit similar to the relationship state defined by Kidd and Breazeal [156], they defined a notion that they call relationship level. It is computed based of the emotional interactions from the episodic memory associated to a user. It influences the mood level of the robot and then the facial expression and the speech.

In the work around the bartender robot [98], they divided the interaction in three phases (or states) but from two different viewpoints, the of the customer and the one of the bartender. From the customer viewpoints, the phases are: (1) attention request towards bartender (2) ordering of one or more beverages, and (3) closing of interaction by payment and exchange of polite phrases. Then, in reaction of each phases, there are the ones from the bartender viewpoint: (1) acknowledging the attention request, (2) serving the ordered drink, and (3) asking for payment. They left open the possibility to have sub-phases inside phases.

We can also find, in Lee *et al.*’ work [176], the notion of structure of interaction: interactions start with the vendor identifying the customer, greeting and engaging in small talk with the customer, engaging in the snack transaction, and then enacting social leave-taking.

1.2.3 Hierarchical interactions

Not only, interactions can be divided in phases but also in levels. For example, Dautenhahn and colleagues [80, 207] defined two levels of approach for interactions, a global one and a local one. The *global level approach* defines a unit of interaction as being relatively large (long sequences of interaction or large units of interaction), such as the script for a greeting as described by Kendon in [149]. At this level,

an interaction may be seen as a unit similar to a schema or script, in the computer/cognitive science senses of these terms. They named this level of interaction a “Global Interactional Unit (GIU)”. Furthermore, a GIU can be divided in phases, each of which has associated behaviors. Behaviors have meaning and their meaning depends on the phase in which they occur, the context (*e.g.*, a ‘wave hello’ vs. a ‘wave goodbye’). Their *local level approach* is a much smaller unit, often as simple as an action and a response to that action. They claimed that this view of interaction has the advantage of greater flexibility and robustness compared to the globally structured view. Flexibility is a result of the possibility of specifying acts that may occur in many global interactional structures. But, as contextual details are ignored, the ability to assign a specific meaning to an action is lost.

In his thesis, Kuo insists about this flexibility and the re-usability [170]. A lower level of design is more appropriate for reuse. For him, a unit of interaction corresponds to an “interaction cue” (or social cue) that a robot can perceive and act upon or express in an interaction. These cues can be verbal, non-verbal, or a combination of both (multi-modal interaction). A complete episode of interaction should be constructed through composition of interaction cues with some common patterns repeated over the course of the interaction (*e.g.*, awareness of human presence).

1.2.4 Patterns of Interaction

Before talking about design patterns or interaction patterns, Goffman argued that human interactions follow a specific “order” and characterized a number of patterns in which people interact, such as how greetings unfold and how people leave an interaction [109].

Kahn *et al.* introduced design patterns [141], that they will later called interaction patterns in [142], inspired from computer science. They proposed rules to follow using them and eight patterns. The two main ideas to retain is that a sequence of patterns has to be well ordered and that patterns can be hierarchical. The 8 patterns:

- The initial introduction: largely scripted, conventionally-established verbal and behavioral repertoire to recognize the other, inquire politely about the other, engage in some physical acknowledgment (*e.g.*, handshake)
- Didactic communication: one-way communication of information
- In motion together: walk together
- Personal interests and history: sharing of personal interests and history with others
- Recovering from mistakes: creates the potential for both parties to maintain a social affiliation following the mistake
- Reciprocal turn-taking in game contextual: taking turns with one another when playing games
- Physical intimacy: to engage in holding or touching or embracing
- Claiming unfair treatment or wrongful harms: allows to make claim to its moral standing

Following the same idea and going further, Sauppé and Mutlu introduced the interaction blocks [245]. Compared to Kahn's work, they created a pattern language and a tool/environment to design human-robot interaction. To conceive their patterns, they collected and analyzed data from 5 kinds of interaction scenarios: Conversation, Collaboration, Instruction, Interview and Storytelling. Then, they identified common interaction structures, which served as "design interaction patterns":

- Introductory monologue: A short introduction can be used to introduce other participants to a scenario by giving an overview of the remainder of the interaction or it can be a greeting for example.
- Question and Answer: A question is a sentence meant to elicit information from other participants. An answer is the response to a question that aims to satisfy the questioning participant's curiosity.
- Generic Comment and Personal Comment: A comment is a short statement offering the speaker's opinion. Comments are either generic (*e.g.*, , "Wow") or personal (*e.g.*, , "I tried that and didn't like it").
- Monologue and Generic Comment: A monologue is a longer form of speech during which no response is expected. (*e.g.*, telling of a story). Although monologues expect no response, listeners may occasionally offer unsolicited commentary.
- Instruction and Action: An instruction is a command offered by one participant to direct the actions of another participant. The proper response to this instruction is often an action, although the action might follow the instruction with a delay depending on whether it is an appropriate time to perform that action
- Finished Comment: Upon the completion of the goals of the scenario, one or more of the participants will note that the scenario is completed by offering a finished comment.
- Wait: One pattern implicit in all scenarios involving two or more participants is the wait pattern.

Finally, they designed a software to easily implement those patterns in a robot.

In his thesis, Kuo criticizes Kahn's work [170]. He says that these patterns involve sequences of interaction cues and should be decomposed to a lower level for detailed design and reuse. He proposed his own patterns:

- Human presence detection: detect when there is a person who might be interested in
- Showing interest for interaction: express the robot's awareness of a user's presence around it and its interest and willingness to interact
- User's attention on the robot: Know when a user is paying attention to the robot in an interaction and its information on its screen
- User identification by face: Provides the fundamental block for personal service and social interaction by recognizing the human counterpart in an interaction

He checked the validity of his patterns with the analysis of Problem statement, Context of Use, Interaction Modality, Combination with Other Patterns, Technical Performance and Limitations, User Feedback and User's Perception, Resulting Interactive Behavior.

Finally, Peltason and Wrede also based their work on design patterns from computer science, specifically applied to dialogue here [215]. To name a few of them: Simple action request, Interaction opening, Interaction closing, Clarification. During interaction, the registered patterns are employed in a flexible way by admitting that patterns can be interrupted by other patterns and possibly resumed later which leads to interleaving patterns. By default, simpler patterns are permitted to be nested within temporally extended patterns.

1.3 Around the Joint Action Concept

Often, multiple concepts are addressed when referring to collaborative tasks: collaboration, cooperation, coordination, joint action, joint activity, shared/joint attention, shared/joint intention, shared plan, shared/common/joint goal, (joint) commitment, engagement, mental states, theory of mind, mutual knowledge... However, many terms and definitions, whether inside a field³ or between fields do not reach a consensus. This can be quite confusing, especially for roboticists for which it is initially not the range of expertise. Thus, we will first give an overview of the more characteristic definitions of what is Joint Action. Then, we will present a non-exhaustive set of notions related to Joint Action.

A part of this work on Joint Action, realized in the context of the JointAction4HRI project⁴, is the result of the collaborative work with Kathleen Belhassein, a PhD student in psychology, and Víctor Fernández Castro, a post-doctoral researcher in philosophy. It has been the subject of a publication in the book Culturally Sustainable Social Robotics [28], a publication under submission at Acta Psychologica [29] and a publication under submission in a volume of the Book Serie Techno:Phil [91].

1.3.1 How to define Joint Action?

An important number of social interactions and encounters are encompassed by the notion of joint action. Broadly considered, joint action is any form of social interaction whereby two agents or more coordinate their actions in order to pursue a joint goal. However, the notion of joint action has particularly been subject to debate in philosophy and psychology. For instance, according to Sebanz *et al.* [258, p. 70], “joint action can be regarded as any form of social interaction whereby two or more individuals coordinate their actions in space and time to bring about a change in the environment.”; while other authors [58, 76, 93, 286, 212] resist the idea that instances of mere coordination – *e.g.*, two partners walking side by side –

³Here, philosophy, psychology or robotics

⁴<https://jointaction4hri.laas.fr/>

constitute a joint action, considering that it requires some necessary conditions like sharing goals and intentions.

Moreover, while the notion of joint action is used interchangeably with the notion of collaboration or cooperation for some authors such as Becchio *et al.* [22] and Kobayashi *et al.* [162], other authors establish a hierarchy of interactions depending on the processes involved [5, 63]. According to Amici and Bietti [5], for example, coordination is a fast low-level process of behavioral matching and interactional synchrony which could, but not necessarily, facilitate middle-level processes like cooperation (where some individuals bear certain costs to provide benefits to others) or high-level processes like joint action, which requires other resources like turn-taking and alignment of linguistic resources during dialogue.

If we look at Sebanz and colleagues definition of joint action, it could be considered as a kind of activity based on the usual sense of this term. Thus, some authors use the concept “joint activity” interchangeably with “joint action” [283, 111] while others see the joint activity composed of joint actions [69, 158]. Clark says that “Joint activities advance mostly through joint actions”. He defines the properties of a joint activity among which there are: it is carried out by 2 or more participants, each participant has a public role or they try to establish and achieve joint goals, and they may have private goals. He also highlights the need for coordination: “What makes an action a joint one, ultimately, is the coordination of individual actions by two or more people. There is coordination of both *content*, what the participants intend to do, and *processes*, the physical and mental systems they recruit in carrying out those intentions” [69, p .59].

In this manuscript, the word joint action will be used to indifferently refer to an activity/task composed of several (joint) actions, *i.e.*, a high level joint action or as a single action, but in both cases it will imply that it is a “social interaction social interaction where two or more individuals coordinate their actions in pursuit of a common goal” [61].

1.3.2 Two possible segmentations around Joint Action

Before going through the mechanisms involved in joint action, we will briefly present two segmentations of joint action: a temporal segmentations, *i.e.*, the different phases a joint action goes through, and a cognitive model for human agency *i.e.*, the different neurocognitive levels that are involved in joint action. It seemed necessary to present these two segmentations as the processes related to joint action described in Section 1.3.3 are sometimes involved in one phase/level but not in another. However, we will not go through these details as it is not necessarily relevant to the rest of the manuscript.

1.3.2.1 Temporal segmentation of Joint Action

As a joint action is a form of social interaction, it can also be divided in three phases as presented in Section 1.1.2: an initiation, a body and a closing [121]. Each phase

a role; the initial phase establishes among other things the joint commitment, *i.e.*, who is to participate, in what roles, what actions will be performed, and when and where they will be performed different roles for the participants [70]. Then, in the body they coordinate to perform their goal. Finally, “to complete a joint action, participants first need to arrive at the mutual conviction that they are both indeed ready to terminate it” [121], if they achieved their goal for example.

At a lower level of joint action, the level of action and not social interaction, joint action can be seen as a process with two phases: planning and execution. Curioni *et al.* proposed a model, specifying what happens in each phase [79]:

- planning:
 - expectations on partner’s intentionality
 - selecting action possibilities
 - establishing commitment
- execution:
 - aligning attention to objects and events
 - maintaining commitment

1.3.2.2 Neurocognitive segmentation of Joint Action

To describe the levels of the neurocognitive mechanisms involved in joint action, we will base ourselves on the conceptual framework of action established by Pacherie [211]. This framework is particularly relevant for the rest of manuscript as it has a lot similarities with the three-layered robotic architecture that will be described in Section 2.2, as noticed in [74]. It is based on a dynamic model of intentions and distinguishes:

- A distal intentions level (D-intentions) in charge of the dynamics of decision making, temporal flexibility and high level rational guidance and monitoring of action;
- A proximal intentions level (P-intentions) that inherits a plan from the previous level and whose role is to anchor this plan in the situation of action, this anchoring has to be performed at two levels: temporal anchoring and situational anchoring;
- A motor intentions level (M-intentions), which encodes the fine-grained details of the action (corresponding to what neuroscientists call motor representations), is responsible for the precision and smoothness of action execution, and operates at a finer time scale than either D-intentions or P-intentions

This model of action has then been enriched with the specificities of joint action in [212], integrating at each levels the representations and processes associated to the joint action partner. We will not go through the details of it here but they will be mentioned all along Section 1.3.3.

1.3.3 What is necessary for Joint Action?

Leaving aside the debate on the concept of joint action, we aim to focus on the mechanisms that enable the consecution of joint actions. What we found to be the mechanism on which every author (or almost) agrees on to say that it is required for a joint action is the *coordination*. This mechanism itself is supported by other cognitive and sensorimotor processes. Also, philosophers introduced another concept involved in joint action which is the *shared intention*. In Figure 1.1, we made an attempt to represent, in a non-exhaustive way, a number of these processes and how they are connected to each other.

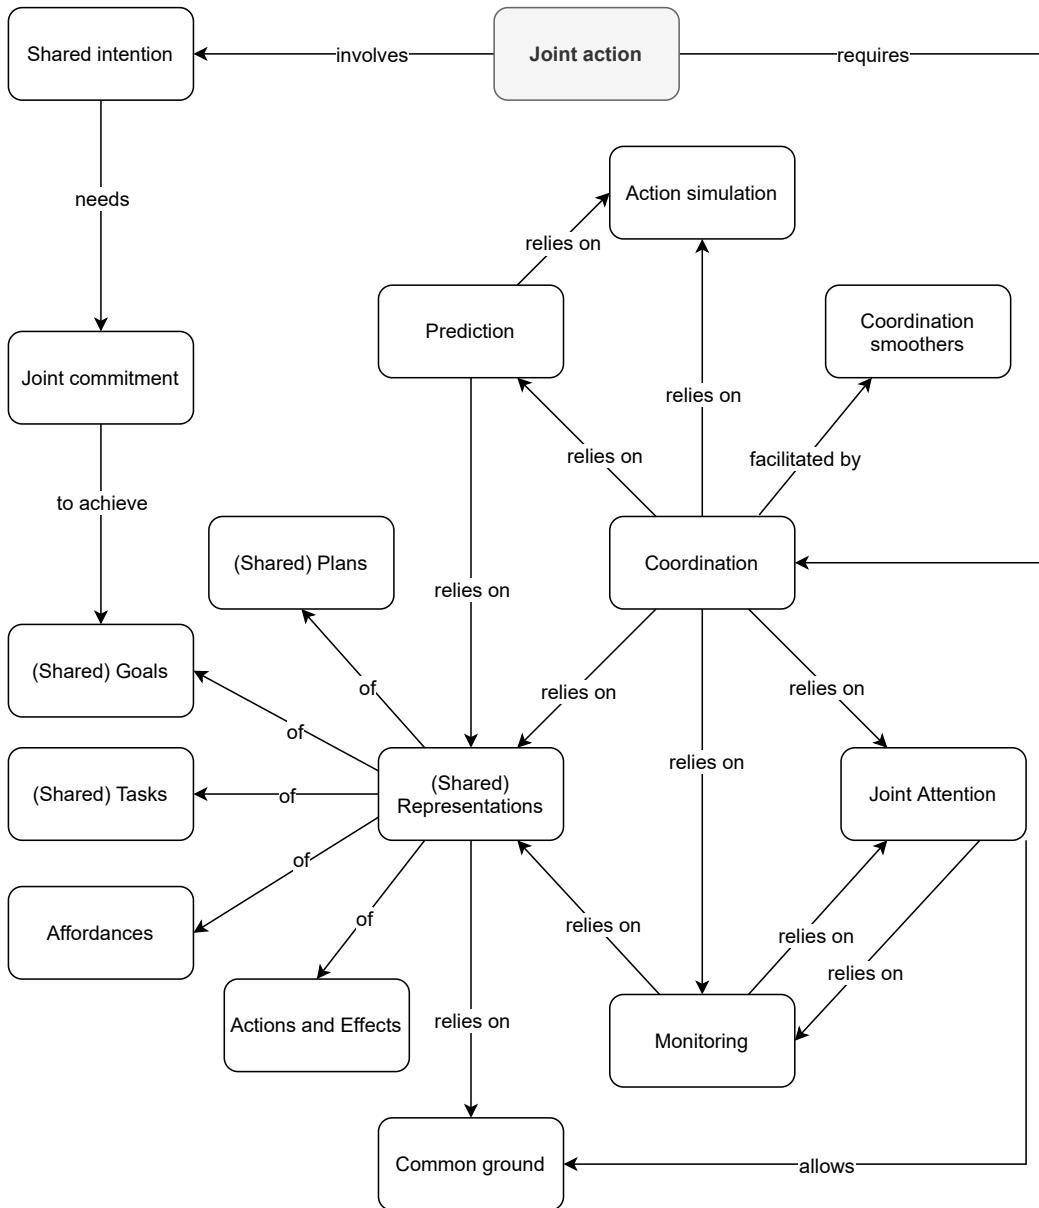


Figure 1.1: Overview of a non-exhaustive set of processes related to joint action

We will first present the concepts of *shared intention* and *joint commitment* and then we will talk about what it is *coordination* and the mechanisms on which it depends. Some concepts are highlighted with italics to show how interrelated there are between them.

1.3.3.1 Shared Intention

First, before coming to the concept of shared intention, what is an intention? We are going to take a look at three definitions, first from a philosopher, then from computer scientists and finally from psychologists.

Sometimes, we talk about intention to refer to something we do intentionally (action) or to refer to things we intend to do (mental state). Thus, Bratman distinguishes both [38] associating the first possibility to what he calls present-directed intention (I may intend to start my car now) and the latter to future-directed intention (I may intend to start my car later today). But, “when I am starting my car it may seem natural to say that I no longer intend to start it, I am starting it” [38, p. 379]. He chose to concentrate on future-direction intentions rather than present-directed intentions when referring to intentions.

Cohen and Levesque based their definition of intention on this view of Bratman [75]. They added the notions of commitment and goal: “An intention is defined as a commitment to act in a certain mental state: An agent intends relative to some conditions to do an action just in case she has a persistent goal (relative to that condition) of having done the action, and, moreover, having done it, believing throughout that she is doing it” [76, p. 496].

The definition of Tomasello *et al.* includes the notion of plan since they defined an intention as “a plan of action the organism chooses and commits itself to in pursuit of a *goal*. An intention thus includes both a means (action *plan*) as well as a *goal*” [286, p. 676].

Now that we have a clearer idea of an intention, we can focus on shared intention. We will start again with Bratman [41]. He considers that two agents have the shared intention to J if and only if:

1. (a) [agent X] intend that [they] J and (b) [agent Y] intend that [they] J.
2. [agent X] intend that [they] J in accordance with and because of 1a, 1b, and meshing subplans of 1a and 1b; [agent Y] intend that [they] J in accordance with and because of 1a, 1b, and meshing subplans of 1a and 1b.
3. 1 and 2 are *common knowledge* between [them].

Tomasello *et al.* refer to shared intentionality (“we” intentionality) and joint intention [286]. For them, it refers to collaborative interactions in which participants have a shared goal (*shared commitment*) and coordinated action roles for pursuing that shared goal. This definition is based on the works of Gilbert [104], Searle [257] and Tuomela [291]. Bratman referred to Searle and Tuomela about their definition of “we-intention”, highlighting the difference with shared intention. “we-intention” or

“collective intention” are intention of an individual concerning a group’s or collective’s activity, and there can be such intention even though there is only one individual (falsely believing others are involved) [41]. Whereas a shared intention necessarily involves at least two persons. Thus, for Tomasello *et al.*, what Bratman calls shared intention, is actually closer to what they call joint intention and not shared intentionality. Indeed, in their view of joint intention, each partner’s “representation of the intention [...] contains both self and other”, as we can see in their illustration, reproduced in Figure 1.2. For them, joint intention involves *shared goals* with and coordinated action *plans*. Some authors such as Tollefsen use joint intention and shared intention interchangeably [283].

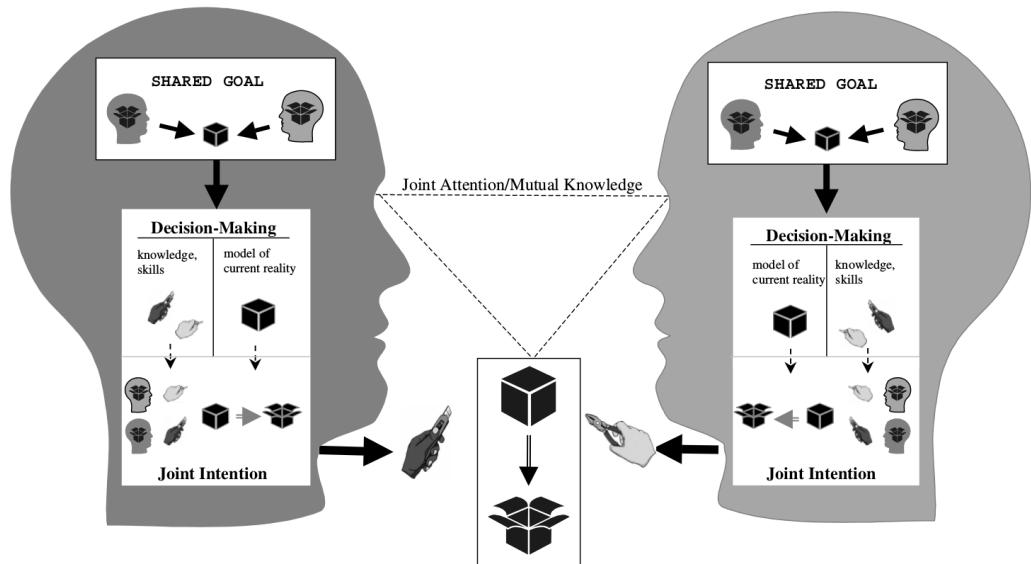


Figure 1.2: Illustrative example of a collaborative activity by Tomasello *et al.* [286]. Here the humans have a shared goal to open the box together. They choose a means to perform it which takes into account the other capabilities and so form a joint intention.

Cohen and Levesque took their inspiration from Bratman’s definition of shared intention as their view of joint intention for artificial agents, considering joint intention as a future-directed *joint commitment* to perform a collective action while in a joint (or shared) mental state.

1.3.3.2 Joint Commitment

Commitments can be understood as “a triadic relation among two agents and an action, where one of the agents is obligated to perform the action as a result of having given an assurance to the other agent that she would do so, and of the other agent’s having acknowledged that assurance under conditions of common knowledge” [194, p. 756]. Commitments are not necessarily established through promises or even explicit verbal communication [175, 246, 268], however, this basic

definition allows us to see the fundamental component of a commitment. But why are commitments important for joint action?

In philosophy and psychology, many authors have emphasized the importance of commitments for joint action such as Cohen and Levesque [76], Clark [70], Gilbert [105], Bratman [42], Michael and Pacherie [193], Roth [233] or Siposova *et al.* [268].

For instance, in philosophy, Gilbert [105] and Bratman [42] have largely argued about the requirements for people to establish shared intentions and their role in explaining social coordination. While Bratman has argued that shared intentions can be understood as an aggregation of individual intentions which only requires individual commitments with general standards of rationality, Gilbert has argued that shared intentions are essentially tied to joint commitments. According to her, two or more persons share an intention to do something if and only if they are jointly committed to intend as a body to do it [105]. In other words, joint actions require the people involved to impose obligations to each other. Further, Roth has argued that joint action requires the participants to be committed to the activity in the Gilbert's sense, which also implies contralateral commitments that hold across the other participants in the shared activity [233]. For instance, if Sue and Jack agree on going for a walk together, they share a commitment to carry out the shared action but also, they assume an individual contralateral commitment to keep pace with each other. In brief, commitments are essential for the establishment of joint and individual intentions during shared activities.

In psychology, several authors, such as Clark [70], Michael *et al.* [195] or Siposova *et al.* [268], have studied how implicit and explicit communication are used to establish commitments and their importance for coordinated actions. For example, Clark has emphasized how partners use communicative exchanges like projective pairs, where one of the participants proposes a particular goal to another (Let's do G! Should we do that?), who then accepts or rejects the proposal [70]. Those exchanges are pervasive in human-human coordinated actions and they serve to negotiate goals, plans and social roles which are translated into an amalgamate of different types of commitments that are necessary for the execution of the general *joint goal*. Michael *et al.* suggest that people often use investment of effort in a task as an implicit cue for making the perceiver aware that we expect him to behave collaboratively which often triggers a sense of commitment that motivates actions [195]. Furthermore, Siposova *et al.* have found that humans use implicit cues like gaze signals to communicate an agreement or commitment to carry out a task their partner intends to perform [268].

To summarize about joint commitment, we retain the words of Gilbert [106, p. 7]: “a joint commitment is a commitment of the two or more people involved. It is, more fully, a commitment by two or more people of the same two or more people”, keeping in mind that it “is not the case that [agent X] and [agent Y] are jointly committed if and only if [agent X is] personally committed in some way and [agent Y is] also” as the agents “are jointly committed to [J] as a body”.

1.3.3.3 Coordination

Coordination is a central mechanism to distinguish individual actions from joint actions. There has been an important deal of conceptual and empirical work investigating this process, such as the one of Knoblich *et al.* [161] and the one of Pacherie [212]. Coordination relies on several mechanisms, which are not necessarily intentional (emergent coordination [161]), including for example perception-action matching [37], perception of joint affordances [223] or action simulation [259]. As for intentional coordination – sometimes referred to as planned coordination [161] –, it requires the partners: (i) to represent their own and others' actions, as well as the consequences of these actions, (ii) to represent the hierarchy of sub-goals and sub-tasks of the plan, (iii) to generate predictions of their joint actions, and (iv) to monitor the progress toward the joint goal in order to possibly compensate or help others to achieve their contributions [212]. From Section 1.3.3.4 to Section 1.3.3.10, we present a non-exhaustive set of mechanisms on which relies coordination. We chose the ones that seemed: to be the most mentioned in the philosophy and psychology literatures, to obtain consensus about their involvement in coordination and to be relevant to Human-Robot Interaction.

1.3.3.4 (Shared) Representations

As stated by Sebanz *et al.*, joint action depends on the ability to share representations [258]. Representation sharing is present at different levels, *i.e.*, agents can share representations of objects, events, actions, goals, plans and tasks [212, 292]. These representations enable, among other things, the prediction (see Section 1.3.3.9) of other's actions.

Representation of (Shared) Tasks A task can be described at multiple grains or levels of abstraction [77], the same action can be described as both ‘putting a piece of toast in one’s mouth’ and ‘maintaining an adequate supply of nutrients’. A used definition in psychology is that “a task consists of producing an appropriate action (*e.g.*, conveying to mouth) in response to a stimulus (*e.g.*, toast in a particular context)” [198, p. 1]. Sebanz *et al.* extended this definition with the possibility to execute more than one action when responding to a stimulus [260].

How to share a task? Sebanz *et al.* proposed that “sharing a task representation or corepresenting a task then means that an individual represents at least one rule that states the stimulus conditions under which a coactor should perform a certain action” [260, p. 1235]. In another paper, in the context of joint action, Sebanz *et al.* evoked studies showing the formation of shared representations during collaborative tasks, *i.e.*, an agent knows what the other should do and represents it in a functionally equivalent way to their’s own. They concluded that it allowed individuals “to extend the temporal horizon of their action planning, acting in anticipation of others’ actions rather than simply responding” [258, p. 73].

Representation of (Shared) Goals Goal has two meanings leading sometimes to ambiguities: the state-to-reach of the environment (external goal) and the mental representation of a desired state (internal goal) [286]. It is interesting to be aware of this double meaning.

Several authors highlighted the need of the representation of a shared goal for joint action such as Pacherie [212], Tomasello *et al.* [286] or Cohen and Levesque [76]. Sometimes they use the terms common goal [256], joint goal or joint persistent goal. Based on Braman [40], Tomasello *et al.* affirmed that “there is a shared goal in the sense that each participant has the goal that we (in mutual knowledge) do X together” and that “each interactant has goals with respect to the other’s goals” [286]. Pacherie listed as a condition for joint action that each agent has to represent their goals and their coagents goals [212].

Representation of (Shared) Plans A intention is sometimes defined as a plan of actions that an agent chooses to achieve a given goal [286, 146]. As for shared goals, Tomasello *et al.* and Pacherie highlighted the need for an agent to represent “their own subplans and the meshing parts of the subplans of others, and some of what they represent is to be performed by others” [212, p. 353].

Representations of plans and shared plans are more studied by computer scientists than by philosophers and psychologists, proposing computational models that we will not present here. Grosz and Kraus demonstrated that shared (collaborative) plans should not be treated as the sum of individual plans but as plans necessitating from the agents joint intentions, a mutual belief of how to perform the task and eventually individual or shared plans to perform the task’s actions [115].

Representation of Actions and Effects Studies showed that when an agent observes an action, a corresponding representation in their action system is activated [230]. Sebanz *et al.* affirmed that representation sharing is essential to joint action, specially action representations, as “individuals could be ‘on the same page’ action-wise by sharing representations of actions and their underlying goals” [258, p. 71]. Pacherie evokes the need of agents to have the ability to have not only a representation of actions to be performed, self’s and other’s, but also their consequences [212].

Affordances The concept of affordances has been introduced in 1966⁵ by Gibson, a psychologist, who presented his theory in [103]. He coined the term to refer to what the environment has to offer to the animal (individual), “what it provides or furnishes, either for good or ill”. Then, the term and concept became popular and have been used in other fields than the original one (ecological psychology) such as cognitive psychology, human-computer interaction or design. Osborne discussed in his thesis [210], among other things, the history of the word and the different uses and meaning there are nowadays (see also two reviews on affordances [139, 11]).

⁵<https://www.merriam-webster.com/dictionary/affordance>

The definition that is commonly used in HCI/HRI has been introduced by Norman, a design researcher, in 1988 which claimed that “affordance refers to the perceived and actual properties of the thing, primarily those fundamental properties that determine just how the thing could possibly be used” [1, p. 9]. Thus, it became associated to the term *action possibilities*.

What about affordances when people are in a joint action? Richardson *et al.* showed that when acting together, people take into account not only their motor affordances but also the ones of their partners, helping to decide whether to perform a joint action or an individual action with an object [229]. Thus, Knoblich *et al.* called *common affordance* “when two agents have similar action repertoires and perceive the same object [will likely] engage in similar actions because the object affords the same action for both of them” [161, p. 63], enabling coordination as agents perceive the same objects at the same time. They called *joint affordance* when “objects have an affordance for two or more people collectively [(a two-handled saw)] which is not necessarily an affordance for any of them individually”.

1.3.3.5 Joint Attention

We will start with two complementary definitions of *attention*. The first one is from Tomasello *et al.* who say “attention may thus be thought of as intentional perception (selective attention)” [286]. The second one is from Kaplan and Hafner [146] who define attention as “the temporally-extended process whereby an agent concentrates on some features of the environment to the (relative) exclusion of others”. They distinguish two situations for which the process can occur: passive attention when a salient event happens and thus automatically triggers the attention of the agent, and active attention the agent is involved in an intentionally directed process and must actively select particular features of its environment.

What happens to this process in the context of a joint action? We then talk about *joint attention*. To perform a joint action, partners need a common goal. Indeed, joint action requires that individuals plan and perform their actions according to their predictions about the other’s actions to reach this goal. Joint attention is a key feature for this purpose, playing a crucial role in “being and acting together” [284], as it allows the partners to establish and share a perceptual common ground, necessary to initiate the joint action but also for individuals already engaged in a joint action to coordinate successfully.

Despite this agreement to affirm that joint attention is important for joint action, Siposova stated that “there is still surprisingly little agreement on exactly what joint attention is and how it is achieved” [267]. While for some authors, two agents orienting their attention towards the same referent is a sufficient criterion to speak about joint attention [54], others like Pacherie precised that “the phenomenon of joint attention involves more than just two people attending to the same object or event”. A classic way to define joint attention is the ability to coordinate our attention to the same object of interest (*e.g.*, as shown by Bakeman and Adamson [12]), enabling us to integrate others’ attentional focus and therefore to experience the

world together as described by Tomasello [284]. “The attentional focus of the two persons must be truly joint in the sens that both participants are *monitoring* the other’s attention to the outside entity”, thus joint attention cannot exist without mutual knowledge [287, p. 106].

To complete this view of joint attention, we can mention Carpenter and Liebal that highlighted the need (1) to develop mutual knowledge of this coordinated attention, and (2) to represent the other agent’s intentional states [59] or Kaplan and Hafner that make the notion of *goal* appear in their definition, describing joint attention as (1) a coordinated and collaborative coupling between intentional agents where (2) the goal of each agent is to attend to the same aspect of the environment [146].

Joint attention can either be explained with basic learning mechanisms – lean joint attention – or as “the result of particular cognitive operations or second-order representational competencies” [222], *i.e.*, what Tomasello and Carpenter called socio-cognitive abilities of shared intentionality [285] – rich joint attention. Kaplan and Hafner noticed in 2006 that current research in HRI about joint attention tended to focus on “surface behaviors”, like simultaneous looking or coordinated behaviors [146] which corresponds to lean joint attention.

Finally, sometimes it is possible to see references to “shared attention” in the literature, which can be confusing for the reader when no precision or definition is given. Some authors use the two words interchangeably, while some consider that there is a difference between both. There are especially two works mentioning this fact and making a distinction, the one of Emery [89] and a bit later the one of Triesch *et al.* [290]. They define joint attention as two people having the same focus of attention while they define shared attention as a more complex form of communication where each agent knows on what the other agent is focused. We can notice that it is quite similar to the definitions of joint attention we gave above.

1.3.3.6 Common Ground

Common ground, or common knowledge or mutual knowledge, or mutual belief, these are the words to refer to the same general idea – used by some authors interchangeably [68, 69] – but sometimes with nuances like for joint attention. Lewis, a philosopher, claims that a proposition P is commonly known among two agents if the proposition is known by the two agents and both agents know that agent A can draw the same conclusions from P that agent B can and vice-versa. [183]. In another famous formulation of philosophers [255] and psychologists [280], common knowledge must be understood as the recursive belief in which S knows P, Y knows P, S knows that Y knows P, Y knows that S knows P, S knows that Y knows that S knows P, and so on. The subject does not necessarily represent the whole line of reasoning beforehand but should be able to infer it. Thus, we can assume that from the individual point of view, common knowledge or common ground is the information that one may reasonably assume that one and her partner know and they can also know or infer that the other knows. For our purpose, such informa-

tion may include goals and sub-goals, intentions (see [40]), ways to proceed, facts on the environment (see joint attention in Section 1.3.3.5), appropriate scripts and roles, and any other type of information necessary or relevant for the joint action. Cohen and Levesque, computer scientists, consider mutual knowledge about a *joint persistent goal* P, such as “it is true (and mutual knowledge) that until they come to mutually believe that P is true, that P will never be true, or that [the condition] Q is false, they will continue to mutually believe that they each have P as a weak achievement goal relative to Q and with respect to the team” [76, p. 499].

1.3.3.7 Monitoring

An agent can monitor multiple things related to a task: a goal, an action, a task-progress, mistakes, another agent, an object... Vesper *et al.* showed that a agent typically monitor the task-progress in order to determine whether the current state of the joint action and the desired outcome are aligne [293]. Pacherie named the monitoring of the progress towards the joint goal as a condition for agent to share a proximal intention [212]. Monitoring the task-progress is not enough. An agent also needs to monitor its partner, especially through joint attention that we presented in Section 1.3.3.5, as attention is a monitoring process and joint attention can be seen as the co-actors’ ability to monitor each other’s gaze and attentional states [89]. Then, it is also closely related to the shared representations we presented in Section 1.3.3.4. Indeed, shared task representations enables the monitoring of the individual actions [161]. Sebanz *et al.* mentioned “action observation” which seems to be an equivalent to the term monitoring⁶. Action observation and thus monitoring is based on action representations and allows to predict (see Section 1.3.3.9) what others are going to do next [258]. Finally, “monitoring is useful to detect mistakes or unexpected outcomes in one’s own or one’s partner’s performance, enabling one to quickly react and adapt accordingly”.

1.3.3.8 Action Simulation

Sebanz *et al.* highlighted the need of action simulation for agents to coordinate [259, 161]. Action simulation is the process allowing an agent to predict the timing and outcomes of the given action, by observing the action and applying predictive models of the action in their motor system. Thus, an agent can predict other agents’ actions in real time [300].

1.3.3.9 Predictions

For Pacherie, there are three types of predictions: self-predictions, other-predictions, joint predictions. Self-predictions are the predicted consequences of the agent’s own actions. Other-predictions are the actions, goals, motor and proximal intentions of their coagent and their consequences. Joint predictions are the

⁶<https://www.merriam-webster.com/thesaurus/monitoring>

agents' prediction of the joint effects of their own and others' actions. These predictions allow agents to "decide on their next moves, including moves that may involve helping others achieve their contributions to the joint goal (triadic adjustment)" [212, pp. 354-355]. Sebanz *et al.* support the same idea, claiming that predictions, based either on action observation or on shared representations, "allow one to prepare actions in responses to events" [258, p. 73].

1.3.3.10 Coordination Smoothers

Coordination smoothers, as their name implies, are one way to facilitate coordination. They are defined as the changes in an agent's own behavior to ease the interaction with another one [293]. For example, an agent may exaggerate their movements, making them easier to predict for their partner. The change of behavior may concern not only one's own behavior but also the use of objects according to their affordance. Coordination smoothers can be produced automatically such as a nod or be intentional [193].

1.3.4 Communication

An important part of human psychological devices involved in joint action is communicative, serving different purposes – *e.g.*, negotiating, guiding, questioning [10, 68, 271] and leading to mobilize different types of information. This flexibility allows us to provide information about the relevant objects involved in a task, but also about the emotional or cognitive states of the participants.

Sometimes, people are in situations where social norms, conventions, or scripts are available to regulate our social interactions [248, 6, 60]. For instance, as customers, we usually know how to interact with a waiter in a restaurant because the parties involved know some clear rules of etiquette, social norms and knowledge of how to proceed that regulate the interaction to achieve the joint goal of having a meal. However, even when these rules and norms exist, human interactions require signaling and communicating different types of information regarding the initiation, maintenance, or the exit of joint action, the acknowledgment of roles assignation, or specificities regarding preferences, goals, and subs-tasks.

According to Michael and Pacherie, participants can face three sources of uncertainty during joint action, which can overlap and influence each other [193]. First, motivational uncertainty refers to the uncertainty of not knowing whether or not the partner is motivated to engage in the overall joint action, a particular goal, or sub-goal, or her degree of motivation. Second, instrumental uncertainty refers to the state of not knowing the other participant's instrumental beliefs on how to proceed, *i.e.*, which roles to assume or when and where to act. Finally, common ground uncertainty emerges when instrumental beliefs and motivations are not mutually manifested. Thus, even if the participants share a goal or agree on how to proceed, they might not know that this is the case. Any communicative act or strategy is directed to reduce common ground uncertainty, making mutually manifest a piece

of information that can involve instrumental or motivational states, aspects of the environment, goals, or other relevant information for the consecution of the joint action. In a minimal sense, then, communicative strategies can be defined as overt stimuli generated to activate, add up or update the common ground and knowledge related to a particular joint action.

The recognition of the other as a potential partner for joint action can be carried out by verbal and/or non-verbal communicative cues, which can be more or less explicit at different stages of the interaction. The inferential processes at play in such context have originally been explored in the frame of pragmatic theories, in particular through the notions of relevance [271] or Grice's maxims of conversation [113].

Interestingly, humans often establish communicative strategies to facilitate information exchange before the joint action itself. The establishment of *mutual recognition* is fundamental for the initiation of the joint action but also strongly influences its deployment. For instance, establishing mutual recognition facilitates the assignment of roles, which also determines the communicative strategies used during the execution of the action.

Verbal One can engage in communication employing so-called *recognitives* or *observatives*, speech acts whose main function is to call another person's attention upon herself, or other aspects of the context in order to make her aware that recognition is in place.

An example of recognitives is *vocatives*, like greetings that are precisely used to call a person upon herself. Vocatives can enable mutual recognition and facilitate role assignment in some contexts (*e.g.*, "Welcome to our restaurant!" in the previous example). Moreover, vocatives are often followed by other speech acts like questions that can help to set the sub-tasks or goals of the joint action (*e.g.*, "What can I do for you today?"). Another example of recognitives is acknowledgments, whose function is to make the other aware that you recognize or take on what they say (*e.g.*, answering "thank you" to the vocative "welcome"). They allow individuals to acknowledge each other's recognition and to ensure the fact that joint action will take place is mutually shared.

The other types of speech act relevant for mutual recognition are observatives, which serve to identify a potential joint goal by directing the other's attention toward a specific object or event in the near environment. For instance, imagine two hunters searching for prey; when one calls the other "Hey, a deer!", they can start coordinating to capture the animal. Such speech acts can facilitate the recognition of the other as a potential partner for the joint action and then trigger the set of expectations and anticipations necessary to coordinate and perform the action.

Non-verbal *Joint attention* is a kind of communication process, as explained in Section 1.3.3.5, it allows the partners to establish and share a perceptual common ground.

We can also find non-verbal modalities of communication analogous to recognitive or observatives. For instance, communication can stem from subtle cues like the mere reaction to the presence of the other with a frown movement or the search for eye contact. As Brinck and Balkenius [51] argue, by making eye contact, one individual is attending to the other attending to the first, which can implicitly be regarded as a joint commitment to interact in most social contexts. Likewise, acts of acknowledgements can be performed non-verbally as well: people often direct each other's attention toward external objects or events through non-verbal reference, whether it involves vocalizations, gestures, and/or gazing [19, 174, 50]. Non-verbal reference includes four essential actions: a *preparatory behavior* that draws the observer's attention to the sender, a *communicative-intent indicating behavior* to signal the sender's attempt to share attention and interact face-to-face with the observer; a *referential behavior*, to orient the other's attention in the direction of the target object or event; and an *essentially intentional behavior* that orients back the attention to oneself to make sure they understand the act [50, p. 122-123].

To illustrate non-verbal communication during the execution of joint action, we can take the example of the a study on the exaggeration of behavior. In Sacheli *et al.* experiments (see also Vesper and Richardson [294]), for instance, two participants had to synchronously grasp an object in an imitative vs. complementary way, each by acting as a Leader or a Follower. The results showed that when acting as leaders, participants tend to give information to their partners about the action to be performed by accentuating some kinematic parameters and reducing the variability of movements, then increasing their predictability by the follower.

1.3.5 Theory of Mind

Theory of Mind (ToM) refers to the ability to represent others' intentions, beliefs, knowledge, goals, *i.e.*, their *unobservable mental states* [220, 219]. Thus, this concept is related to some presented above. Indeed, common knowledge requires ToM as “to know what another knows and to be capable of making the sorts of inferences required for common knowledge, one must have an understanding of others (or an understanding of a particular person) in terms of thoughts and beliefs” [283, p. 82]. And thus, shared intention, as stated by Pacherie, “having a shared intention typically presupposes cognitively and conceptually demanding theory of mind skills” [213, p. 1817]. Moreover, some authors showed that ToM development and functioning relied on joint attention [270, 56]. Finally, it has been shown that ToM improves joint planning and so increases the ability to cooperate in joint activity [9]. We can note that Westby and Robinson explained that recent research about ToM, showed that ToM is not only to understand what others think, know, believe or intend (cognitive ToM) but that another part of ToM involves thinking about and experiencing the emotions of others (affective ToM) [298]. In this manuscript, we will leave aside the latter.

As for common knowledge (see Section 1.3.3.6), there is an infinite number of levels, or orders to ToM. Most often, the focus is on the first and the second orders.

Perner and Wimmer defined the “first-order belief attribution” as the estimation of one’s beliefs (*e.g.*, I think she thinks that) and the “second-order belief attribution” as the estimation of what one thinks about what another person is thinking or feeling (*e.g.*, I think she thinks I think that) [216]. Based on the same principle, Flavell *et al.* proposed levels of role-taking where the Level 1 is defined as “S thinks (knows, predicts or whatever) that O has such-and-such belief (attitude, feeling, etc.) about something (X), about S himself, about O himself or about some other individual or group (O_1)” (*e.g.*, “I know how you feel (about something or someone)”). The level 2 is defined as “S thinks that O is aware of (unaware of, dislikes, etc.) S’s or O_1 ’s thoughts (feelings, perceptions, etc.) regarding X, S, O or O_1 ” (*e.g.*, “I’m sure you know what I think about Bill”) [95, pp. 49–51].

ToM is also closely related to another notion that we have not mentioned yet but that is of interest in HRI: perspective-taking which is mostly studied in psychology, sociology and neurology. These fields study how people understand each others and refer to it in different ways: social perspective-taking or role-taking, perspective-taking or empathy [81]. Sometimes, ToM and perspective-taking are used interchangeably, as by Charlop-Christy and Daneshvar defining perspective-taking as an elementary aspect of ToM [65] or ToM can be a synonym of “cognitive perspective-taking” [15]. While, some authors, like Westby and Robinson, differentiated them and showed that perspective-taking is an element among others of ToM [298]. Actually, the perspective-taking to which they referred is the one called visual perspective-taking which is a type of perceptual perspective-taking. Indeed, perspective-taking, as ToM has several dimensions. Some authors distinguish between *perceptual perspective-taking*, referring to the inference that one makes regarding another person’s visual, auditory, or other perceptual experience, and *conceptual perspective-taking*, referring to the inference that one makes regarding another’s internal experience such as his thoughts, desires, attitudes, plans [187]. Other distinguish two other dimensions: “*cognitive perspective-taking* may be defined as the ability to infer the thoughts or beliefs of another agent, while *affective perspective-taking* [or emotional [132]] may be defined as the ability to infer the emotions or feelings of another agent” [120]. According to the task, they can be requirements for ToM [132]. Cognitive perspective-taking is central to communication, particularly in the creation and understanding of referring expression (*i.e.*, a word or phrase to identify an object) [165].

Another element of ToM that we will discuss here is the ability to attribute false belief to others, *i.e.*, make the distinction between the reality and what one can believe about the world [82], as tasks demonstrating this ability have been extensively used to test theory of mind of individuals, such as the task created by Wimmer and Perner [299] and then extended by Baron-Cohen *et al.* which is the most famous false belief task, the Sally–Anne test [299, 17]. In the experiment, children are presented two characters, Sally (who has a basket) and Anne (who has a box). Then, Sally departs, leaving a object A in her basket. While Sally is away, Anne removes the object and hides it in her box. Children are asked to predict, on Sally’s return to the room, where Sally will look for the object. Authors used to

claim that children being able to answer to this question had ToM whereas others did not. Nowadays, it has been shown that false belief tasks are not enough to assess ToM [33, 297].

1.4 When the interaction goes wrong

Until now, we have seen the elements facilitating or essential to joint action, but what happens when things go wrong? Things might go wrong because of an error, a mistake, a slip...These words may look like synonym but we can actually make a distinction between them. In this section, we will present of the classification that has been done. Then, another subject to take interest to is: there's been something wrong but how to repair now?

1.4.0.1 Error classification

Reason published a book entitled Human error [227], basing his work, among other things, on Norman [206] and Rasmussen [226]. He classified errors into three categories: *slips*, *lapses* and *mistakes*. All of them are considered as failures. Additionally to these three, he established another kind of failures: the *violations*, which are not errors. He defined slips as attentional failures, *i.e.*, it can be because the agent has been inattentive to the action, not doing the right attentional monitoring (*e.g.*, to take the wrong object and not the one they intended to take). It generally happens with frequently performed actions. Lapses are memory failures, *i.e.*, an agent forget to perform their action (*e.g.*, to go get an object in a shelve and not go back with it because something felt and disturbed the agent). The last type of errors is mistakes, being intentional failures. They happen when an agent choose an action to perform but it is not the appropriate one to reach their goal. Finally, violations are considered as failures but not as errors, being intentional transgression of a rule or a procedure. This classification is illustrated with Figure 1.3.

1.4.0.2 Repair strategies

In psychology or philosophy, there are not a lot of works on what happens once an error has been made during a joint action. Conversation Analysis investigated repair, which is a way to correct a misunderstanding or an error during an interaction or an action. The ability to engage in repair is essential in interaction: errors and misunderstandings are likely to arise and must be corrected if the goal of the interaction is to be successful. Generally, they are classified in four categories in CA [251, 301]:

- Self-initiated self-repair: Repair is both initiated and carried out by the responsible of the trouble
- Other-initiated self-repair: The responsible of the trouble takes care of the repair himself but the trouble have been pointed out by the other

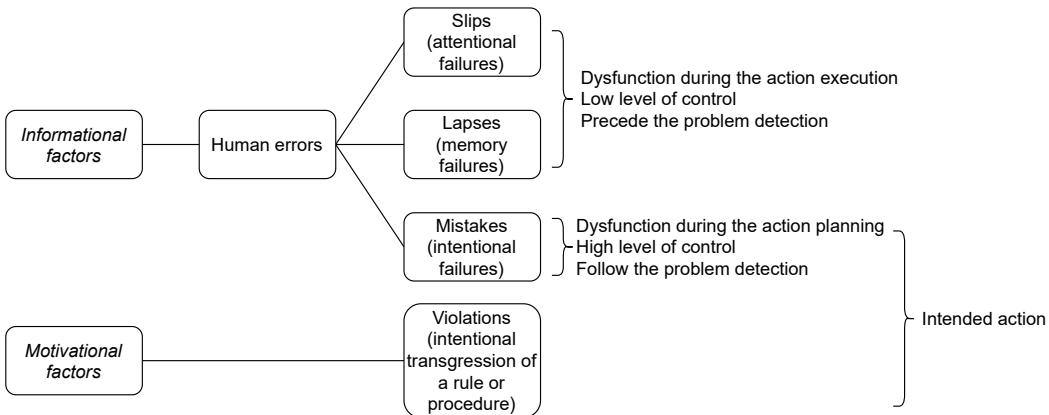


Figure 1.3: Summary and simplification of the failure classification (Generic Error-Modelling System (GEMS) and violations) developed by Reason [227]. (Illustration by Kathleen Belhassein)

- Self-initiated other-repair: The responsible of the trouble signals that a repair is needed and get the other one to repair (*e.g.*, he forgot a name and asks for help to remember)
- Other-initiated other-repair: The one not responsible of the trouble initiates and carries out the repair. This is closest to what is conventionally understood as “correction”.

1.5 Human-Robot Interaction and Joint Action

The study of human-human joint action is important to understand how to make robots better companions and partners for humans. However, it does not mean that they should imitate humans, as they are machines, they have their own abilities and have to develop their own strategies [36] (*e.g.*, displaying arrow on the floor while navigating [62, 78]).

In the context of the JointAction4HRI project, a non-exhaustive review of existing robotic systems integrating but also recognizing in humans joint action mechanisms has been done, focusing on joint attention, communication to facilitate coordination, repairs strategies and commitments.

1.5.1 Joint Attention in HRI

Joint attention is essential to joint action (see Section 1.3.3.5). Some authors showed that a robot initiating (*i.e.*, triggering the attention focus of the partner on the object of interest) [133], responding to (*i.e.*, gaze following of the partner’s gaze or gesture) [303], and ensuring joint attention (*i.e.*, monitoring of the other’s attention) [130] improves the task performance and is perceived as more natural. Thus, human pointing gesture recognition as been investigated such as in [205] or eye-gaze signaling (*e.g.*, [273] or see review [2]).

1.5.2 Communication to Facilitate Coordination in HRI

As seen in Section 1.3.4, communication is important for joint action. It is useful to negotiate, guide, question or realign the beliefs between agents as divergences might occur [76]. Here, we will see how robot can do to communicate and understand communication about their internal state or the human partner one, and about intentions.

Internal state communication – Expressions It is not always obvious for the human to know what the robot is “thinking”, *i.e.*, to know in what state is the robot. The robot also needs to be able to recognize human internal states, emotions. Roboticists developed different ways to do so. We found that robot communicating their internal state using lights, dialogue, gestures/moves or facial expressions has been developed. Some of them are also able to analyze human face or voice to detect their emotion or expression. Kim and Kwon designed a robot using all these features to generate expressions according to its knowledge about the task execution state [157]. Expressions are generated based on a set of criteria. For example, when the robot computes that it is in unexpected state, it generates surprise. Moreover, they endowed the robot the ability to discriminate between the human partner’s happiness, sadness and anger. In the same spirit, we can find a robot recognizing and generating expressions through voice, in relation to the task state and goal [253]. Finally, we have to mention the work of Breazeal which investigated a lot display of emotions/expressions in human-robot interaction. We can distinguish two types of communication: (1) a robot, which has a caregiver, has a motivation system to regulate the interaction intensity of its caregiver allowing it to express eight emotions with facial expressions [49, 48], (2) a robot has the ability to recognize four communication intent (approval, attentional bid, prohibition, soothing) and to react to them through speech [46, 47].

Communication of intentions As explained in Section 1.3.3.10, coordination smoothers facilitate the prediction and legibility of a partner’s action. Investigation about how the robot could communicate its intention during navigation has been done. Some authors chose to have the robot communicating its intention using lights [275], comparing this method with a communication using the head orientation and finding it better [189]. Others worked on making the robot navigation legible, improving its predictability by the human [87, 3]. A last method to communicate navigation intention is by projecting arrows on the floor as well as a map [62, 78]. Not only robot navigation should be legible but also its gestures, when handing over an object to the human [269], or opening a door [277] for example. Finally, a lot of works can be found on human gestures recognition so the robot could predict human’s action intentions (*e.g.*, [18, 64]).

1.5.3 Theory of Mind in HRI

Theory of Mind (ToM) is related to joint action as shown in Section 1.3.5. One of the first work to bind robotics and ToM is Scassellati [247]. He proposed a model of a ToM implementation for a robot, inspired by two models from psychology: Leslie’s Model of Theory of Mind [182] and Baron-Cohen’s Model of Theory of Mind [16]. His model focused on two abilities: to make the distinction between animate and inanimate visual stimuli (following Leslie’s perceptual world division into animate and inanimate spheres), and to identify gaze direction (enabling the shared attention mechanism as emphasized by Baron-Cohen).

Over the years, others tried to tackle this issue, especially focusing on perspective-taking abilities. For example, Hiatt and colleagues designed and implemented a model simulating a human with the ability to deal with false beliefs [126]. They demonstrated it with the Sally–Anne test presented in Section 1.3.5. Milliez *et al.* endowed a robot with the ability to pass the Sally–Anne test, constructing a semantic representation of the world based on its estimation of the human’s point of view [197].

Perspective-taking abilities have been used in robotics for several purposes. Berlin *et al.* presented a simulated robot able to take the visual perspective of a human teacher (the virtual camera) and showed how this ability could be used for learning in human-robot interaction [31]. Hiatt *et al.* presented a humanoid robot reasoning on possible beliefs the human partner could have endowing the robot with the ability to deal with uncertainty about the estimation of the human’s beliefs [124]. In another work, perspective-taking allows the robot to solve ambiguous references to an object [232]. Others make use of perspective-taking to improve human action recognition [140]. Endowing a robot with a perspective-taking ability can also serve to support the implementation of an autobiographical memory (a meaningful stored knowledge acquired during interactions) [218]. Finally, it can also be a way to help the robot to elaborate plans, adding communication actions to solve divergent beliefs [296], to explain plans to the human with a level of details depending on their knowledge [196] or to manage shared plans execution [84].

1.5.4 Failures in HRI

Honig and Oron-Gilad studied the different types of failures that could happen during a human-robot interaction and proposed a classification of these [129] based on a meticulous review, illustrated with Figure 1.4.

1.5.4.1 Communicating about Failures

When something unexpected happens during the interaction, either because of a human failure, a robot failure or an external event, robots might need to communicate about it. We saw three most common ways to communicate about a failure: facial expressions and speech. We can notice a less common way proposed by Kwon *et*

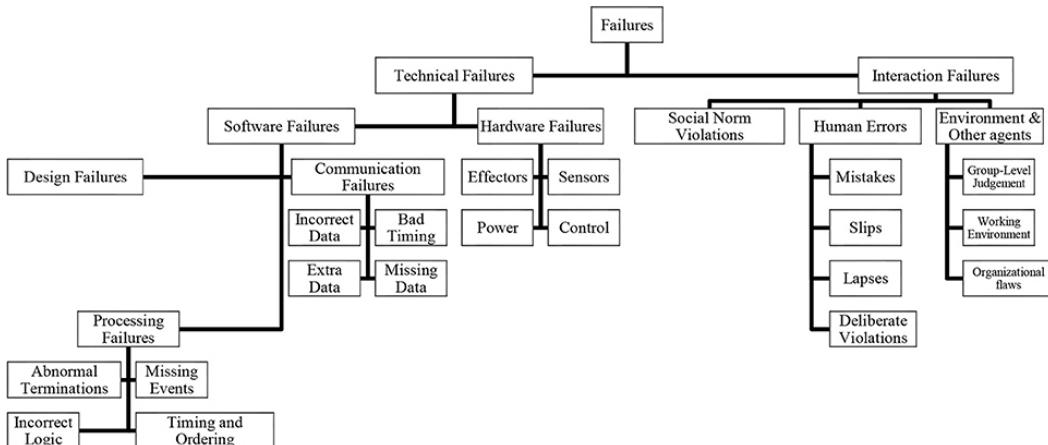


Figure 1.4: Classification of failures in HRI, realized by Honig and Oron-Gilad [129].

al. which developed a robot communicating about its incapability to execute a manipulation tasks thanks to the execution of an “attempt motion”, expressing what it cannot do and why to its human partner (*e.g.*, lifting its elbow to communicate that it is trying to lift the cup, but the cup is too heavy for it) [171].

Facial expressions Breazeal and colleagues investigated the expression of the robot’s confusion through facial expressions. For example, in [46, 47] humans take into account the robot expressive feedback to assess when the robot “understand” them. If the wrong expression appeared, they often speak in an exaggerated way to correct the “misunderstanding”. Hamacher *et al.* developed a robot displaying a facial expression after having dropped an egg when preparing an omelet with a human [117]. Reyes *et al.* proposed a robot displaying a negative facial expression when an error occurs [228]. In work by Silva *et al.*, the robot decision-making and error detection/handling processes are influenced by the perceived human emotions and the robot can display facial expressions when the human persists in an error [265].

Speech Most of the time, when speech is involved, it is not only to communicate about the failure but also to initiate a repair strategy.

1.5.4.2 Robot Repair Strategies

To communicate about a failure is not enough to be able to continue the task or the interaction. A collaborative robot needs repair strategies. Some authors proposed simple strategies while some others developed more complex ones. In [184], when the robot detects a failure in its understanding of the human utterance and gesture, it triggers its repair mechanism that leads the robot to ask questions to the human in order to help it disambiguate the utterance/gesture. In [199], there were two possibilities when a failure happened: the human had an “assistance opportunity” (*i.e.*, failure case that caused no risk to person or property) before the failure

occurrence or not. People were more willing to help the robot in case of failure with an assistance opportunity. Knepper *et al.* proposed a robot, when encountering a failure, able to request help from a human – which might not be aware of the context. After receiving help, it resumes its autonomous task execution [160]. Lee *et al.* compared three recovering strategies after a robot failure (but based on videos and not a real robot) to see which one was preferred by the humans: (1) apology (*i.e.*, robot apologies for service failure), (2) compensation (*i.e.*, robot provides compensation, such as an exchange, a refund, or a discount coupon), (3) option (*i.e.*, robot provides human with alternative actions to achieve their goals) [177]. All strategies had a positive effect (even if not the same). Spexard *et al.* developed three repair strategies according to the type of failure for their robot: (1) when the robot encounters an internal issue, it informs the human about the break-down and asking them a reboot or to contact a technician, (2) it can generate appropriate speech related to error messages from its sensor, *e.g.*, the robot informs the human of the reason why it can not move and asks them for help, and (3) the robot asks for a reset if it thinks that the information it has about a human does not seem to be right [272]. Mutlu *et al.* performed a user study to compare three repair strategies in a task where the robot gives instructions to the human in an assembly task [203]. The strategies are: (1) “no repair” (*i.e.*, the robot detects an error but waits without answering to the human’s questions), (2) “simple repair” (*i.e.*, the robot answers by yes or no to the human yes/no questions, for other questions it repeats the instruction), and (3) “humanlike-repair” (*i.e.*, the robot gives the appropriate information to human, triggered either by a human request, or failure or hesitancy detection). The last strategy was the preferred one by the participants.

1.6 Architectures for Collaborative Robots, Decision and Execution

Robots are machine which need to perceive, decide and act. There are multiple ways to endow a robot with such abilities, with different levels of complexity. When a robot has a complex and generic software architecture, based on models which might be inspired from other fields like psychology, philosophy, neurology, it is referred to as cognitive robot or autonomous robots or intelligent robot...We are interested in such architectures but designed to be implemented in collaborative robots. And, we take an interest in a particular function of these architecture: the decision-making, the supervision of the task, of the interaction.

1.6.1 Architectures for Collaborative Robots

“An integrated cognitive architecture can be defined as a single system that is capable of producing all aspects of behaviour, while remaining constant across various domains and knowledge bases” [67, p. 104]. Kotseruba and Tsotsos reviewed cognitive architectures starting 40 years ago until nowadays. They accounted around

three hundred of them and chose to focus their review on 84 [164]. However, the term ‘cognitive architecture’ often refers to an architecture modeling human cognition and what interest us is to endow robots with cognitive and interactive abilities, not always basing ourselves on human cognition.

Some cognitive architectures such as ACT-R has been adapted for human-robot interaction (ACT-R/E) [288]. The architecture aims at simulating how humans think, perceive and act in the world, strongly based on theory of mind. It is interesting but to understand humans is not enough to make the robot a good collaborators for them, as it lacks abilities concerning the human-aware task and action execution.

A very complete architecture, CRAM, dealing with problems such as manipulation, perception, plans or beliefs management has been developed by Beetz *et al.* [25]. However, this architecture is more designed for a robot acting alone than a robot acting in collaboration with a human.

The work of Scheutz and colleagues is compelling, as they proposed a generic architecture, DIARC, for cognitive robots collaborating with humans [253, 254]. In this context, it handles perception, dialogue and different kind of actions. But, there are not real modeling and taking into account of the human at each level of the architecture.

Another architecture worth to be mentioned is the DAC-h3 architecture by Moulin-Frier, Fischer *et al.*, inspired from biology [202]. It is designed for a robot maintaining social interactions with humans, able to tell narratives and to acquire knowledge thanks to its interactions with humans. As it is mainly dedicated to knowledge acquisition and expression, it lacks planning and execution abilities.

Finally, there is the architecture developed and implemented by Lemaignan and colleagues for collaborative robots. All deliberative components of the architecture are human-aware [181], *i.e.*, all of components except the sensorimotor layer. This architecture is based on the philosophical BDI model developed by Bratman [39, 43]. It has 3 main concepts defined as the following in computer science:

- *Beliefs*: They are a representation of the agent’s knowledge about the world. “[They] can be viewed as the informative component of system state” [225, p. 313]. It is not the word “knowledge” that has been chosen to define this concept because what the agent perceives of the environment is in fact the likely state of the environment. There is no certainty, its sensors are not accurate or could malfunction. This way of distinguish knowledge and beliefs is one that can be found in the literature of distributed computing [173].
- *Desires*⁷: They are a representation of the motivational state of the system. They provide “information about the objectives to be accomplished or, more generally, what priorities or payoffs are associated with the various current objectives” [225].

⁷In one of the first implementation, PRS, “Goals” notion was used instead of “Desires” [100], then they use it in a interchangeable way in [99] and finally choose “Desires” [225] with the definition given in the AI literature, *e.g.*, desires can be many at any instant and may be mutually incompatible. Therefore, a goal will be a chosen desire [75] and concurrent goals are consistent.

- *Intentions:* They are a representation of the currently chosen course of action (plan). It is the deliberative component of the system. The selected course(s) of action are determined with a deliberative function, according to the beliefs and desires [225].

1.6.2 Supervision for Human-Robot Interactions

The supervision component is the binder of a robotic architecture. Without it, there is no task, no interaction happening. Indeed, what we define by ‘supervision’ is the higher level of the architecture, the process involving decision-making, eventually based on plans, and action execution and monitoring. When speaking about joint action, we think it is the component that should handle coordination, communication, monitoring, repair strategies and eventually joint attention and common ground alignment, based on shared representations.

We can find in the literature multiple works proposing components with a part of these features. The ones that we will present have been a source of inspiration, from far or close, for the contributions of this manuscript. We will start with the oldest one, Shary, which has been developed in our laboratory. It is a component dedicated to supervision for human-robot interactions, with a strong emphasis on communication, allowing to execute shared plans and to monitor human and robot actions [72]. Chaski is a task-level executor, focusing on coordination and decision-making. It takes as input shared plans with deadlines and minimize the human idle time when executing of this plans [261]. There is also Pike an online executive that unifies intention recognition and plan adaptation to deal with temporal uncertainties during Shared Plan execution [147]. Görür and colleagues developed a robot able to handle unexpected human behavior, the first one being the human doing an action irrelevant to the task and the second one being the human not wanted the robot assistance [116, 110]. For this, they developed a human model and have a monitoring of human’s actions and endow the robot with the abilities to be reactive and proactive. Similarly, Baraglia *et al.* proposed a reactive and proactive robot, being able to help when requested by the human or when detected [14]. Iocchi *et al.* presented a framework which generate and execute robust plans for service robots [136]. It allows to not explicitly represent all possible situations would face (*e.g.*, low battery means the robot should not navigate) and also to face unpredicted situations where an action failed with no alternative solutions. They implemented it by separating the state variables needed at both planning and execution and the one needed at execution time only. Finally, Devin *et al.* implemented a supervisor allowing the robot to estimate the human’s mental state about the environment and the states of the goals, plans and actions, while executing shared plans [84].

1.7 Challenges

needed ? don't know
what to put inside...

CHAPTER 2

Joint Action-based Human-Aware supeRVISeR: JAHRVIS

Contents

2.1	The Role and Features of JAHRVIS	38
2.2	An Overview of our Robotic Architecture	39
2.2.1	Situation Assessment	40
2.2.2	Knowledge Base	41
2.2.3	Motion Planner	41
2.2.4	Task Planner	41
2.2.5	Supervision	41
2.3	Representation of a H-R collaborative activity	42
2.3.1	Representation of a Human-Robot Interaction Session	43
2.3.2	Collaborative Tasks, Subtasks and Actions	44
2.4	A BDI Framework as a Base of JAHRVIS Architecture	45
2.4.1	The Choice of the Framework	45
2.4.2	Programming with Jason	46
2.4.3	Jason Integration with ROS	50
2.5	The Architecture of JAHRVIS	52
2.6	A robot controlling its contribution to a human-robot joint action	53
2.6.1	Knowledge Representations and Management	54
2.6.2	Interaction Session Management	60
2.6.3	Human Actions Monitoring	61
2.6.4	Shared Plans Handling	67
2.6.5	Action Execution Management	70
2.6.6	Communication management	70
2.6.7	Future work	70
2.7	A robot evaluating its contribution to a human-robot joint action	71
2.7.1	Introduction	71
2.7.2	Related work	72

2.7.3 The Quality of Interaction (QoI)	74
2.7.4 A set of metrics	75

2.1 The Role and Features of JAHRVIS

We defined two roles for Joint Action-based Human-Aware supeRVisor (JAHRVIS), the Supervision component: to be able to control the robot’s actions and behavior in a human-robot joint action, and to be able to evaluate if this interaction is going well or not. This latter should enhance the decision-making, giving an additional data to take into account.

JAHRVIS is a supervision system, *i.e.*, it embeds the robot high-level decisions, controls its behavior and tries to react to contingencies, always considering the human it is interacting with. It is able to do so by taking into account shared plans, human mental states, its knowledge about the current state of the environment, and human actions. The module to monitor and recognize these actions is model-based and allows to take into account a potentially unreliable perception of the human. JAHRVIS is designed in such a way that it is generic enough to handle various kinds of tasks. It can also manage different kinds of human-robot shared plans as input: shared plans for which actions might not be allocated to an agent at planning time and objects might be referred to with a semantic query, and conditional shared plans which anticipate different possibilities for the human decision/action. This modality dedicated to decision-making and control will be presented in Section 2.6.

Not only JAHRVIS controls the robot contribution to a collaborative task, it also tries to evaluate if the interaction is going well or not. It is possible thanks to a set of metrics we have built and a method to aggregate them. We claim that having a robot with this ability allows it to enhance and make more pertinent its decision-making processes. The evaluation of the Quality of Interaction (QoI) relies on a model of interaction, considered at three levels: the interaction session level, the tasks level and the actions level. In future work, this granularity will allow the robot to know precisely on what level it needs to act when a low QoI is assessed. Indeed, for instance, a task can be of poor quality while the session can still be considered as going well. QoI principles and metrics will be described in Section 2.7.

A part of the control features presented here is inspired from Sandra Devin [83]. Indeed, we intended to pursue her work, re-implementing a part of her software using a more friendly framework, *i.e.*, with Jason instead of if/else statements in C++, giving our software more flexibility, readability and genericness. Then, to go further, we developed JAHRVIS, a more complete approach of a supervision component dedicated to HRI which tries to satisfy multiple objectives:

- **Be generic.** The objectives developed in the rest of list are to reach for most collaborative tasks. Thus, it seemed essential to us to develop a software not

dedicated to a particular human-robot task but able to handle plans for varied tasks.

- **Consider the human partner.** In HRI, the human and the robot are partners. As seen in Section 1.3, partners perform better when taking the other into account. Thus, by considering human abilities, perspective and mental states, the supervisor makes the robot a better partner for the human.
- **Leave some decisions to the human.** In some cases, it is not useful, nay counterproductive that the robot plans all the human action parameters beforehand, who should execute a given action when it does not matter, or the order in which some actions should be executed. Thus, we propose a supervisor handling two types of plan allowing to latitude to human decisions and actions: conditional plans, and plans extending “Agent X” shared plans [85].
- **Monitor human actions.** To monitor the plan progress, the robot should be able to monitor the human, *i.e.*, recognize their actions or be able to tell if they are idle.
- **Handle contingencies.** The robot has a shared plan but it is not sure that the human has exactly the same, or failures can happen (see Section 1.4). Therefore, sometimes not everything is like the robot had planned. Thus, it should be able to handle a certain amount of contingencies.
- **Do relevant communications.** As stated in Section 1.3.4, communication is one of the key of collaboration. Therefore, it is important to endow the robot with the ability to perform relevant communication actions, verbal and non-verbal.
- **Considerate the interaction session level** A robot dedicated to collaborative tasks, in a real-life context, will interact with humans outside or between these tasks. We propose to consider this fact by defining what we called *interaction sessions*. An interaction session gives a frame to the interaction and allow to take into account a number of facts from one task to another or from one session to another.
- **Evaluate the quality of the interaction.** Enriching the robot knowledge with a good estimation about how the interaction is going, can enhance its decision-making process and thus, its social behaviour.
- **Adapt to the human experience, abilities or preferences.** Humans are all different, because of their experience, abilities or preferences among other things. A robot taking into account its previous interactions with a human (*e.g.*, behaving differently with a novel user or an experienced user) or adapting to their abilities (*e.g.*, some people cannot climb stairs, a robot guide can indicate the elevator instead) will improve the efficiency and the quality of the interaction, and the user’s experience.

2.2 An Overview of our Robotic Architecture

In this section, we will shortly present an overview of the robotic architecture that has been developed inside the RIS team of LAAS-CNRS. The purpose of this

overview is to give the reader inform the reader about the inputs available for the supervision software, JAHRVIS. Two instantiations of this architecture for two different tasks will be described in Chapter 3 and Chapter 4. This architecture model, shown in Figure 2.1, is a descendant of the architecture developed by Lemaignan and colleagues [181], mentioned in Section 1.6.1.

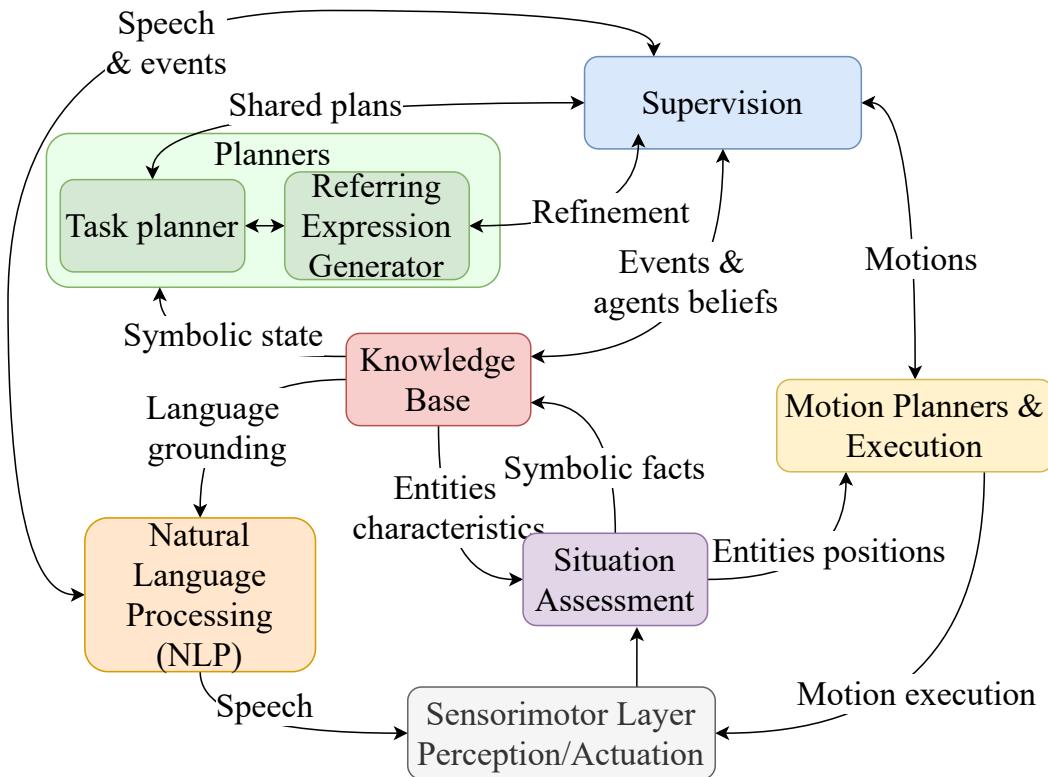


Figure 2.1: Overview of the RIS architecture

2.2.1 Situation Assessment

The Situation Assessment has two roles:

1. to gather different perceptual information and build an internal geometric representation of the world, composed of objects and agents; from this world representation, the module runs reasoning processes to interpret it in terms of symbolic statements between the objects themselves and between the involved agents and the objects,
2. estimate the human's perspective and build an estimation of their world representation; it is the first step allowing to implement the theory of mind principles [17]

Thus, the Situation Assessment outputs data, which we call *symbolic facts*, such as *isOnTopOf(cube_1, cube_3)* or *isReachableBy(cube_2, human_0)*.

2.2.2 Knowledge Base

During an interaction, each agent has their knowledge base, as they can have belief divergences. A Knowledge Base is divided into two parts :

1. The *semantic* part is in charge of representing the environment elements meaning, the objects' and agents' types, their applicable properties, the descriptions and parameters of the actions, a part of the language model with verbs or pronouns, and their names in natural language. Besides, it is also in charge of representing the current symbolic world-state (the computed facts) and thus the instantiation of the concepts in terms of physical (*e.g.*, this particular block) or abstract (*e.g.*, this particular action instance) entities.
2. The *episodic* part is a timeline, keeping track of the symbolic facts computed over time.

The Supervisor can subscribe to a given type of fact, allowing to receive every fact update of this type (*e.g.*, the Supervisor can ask to receive every update (addition or deletion) of any fact belonging to the type *isOnTopOf(Cube, Table)*). It can also query a information when needed (*e.g.*, the Supervisor can ask the human understandable name of pick_action which is pick).

2.2.3 Motion Planner

The Motion Planner allows the robot to execute actions, such as pick and place, and also to navigate in its environment. To do so, it generates a plan for the move when requested by the Supervisor and then execute it. It sends feedbacks about the current execution, *e.g.*, when something goes wrong or estimated remaining time of execution.

2.2.4 Task Planner

The Task Planner can generate a shared plan in which each agent, human and robot, has actions of the task assigned to them, depending on some criteria. However, the human is neither an agent that the planner can directly control or an agent that will know the complete plan. Thus, it allows the robot to plan by emulating the human decision, action, and reaction processes.

2.2.5 Supervision

The Supervision is the puppet master of the system, embedding the robot high-level decisions, controls its behavior and tries to react to contingencies, always considering the human it is interacting with. It is not standalone, relying on the components described above to be able to take decisions, be aware of the environment and make the robot moves.

After giving an overview of the components on which the supervision relies, we present the context in which we place ourselves for human-robot collaboration.

2.3 Representation of a H-R collaborative activity

modifs à faire

It is possible to describe and decompose a Human-Robot collaborative activity in various ways. For all the following definitions, we place ourselves in the context of one-to-one human-robot interactions, however we believe that the scheme can be extended to multi-human multi-robot contexts. We draw our inspiration from the literature of sociology and robotics to define a model of interaction with three layered levels: interaction session, tasks and actions; as illustrated in Fig. 2.2. We chose to represent collaborative tasks and their decomposition using the Hierarchical Task Network (HTN) [102] representation which is often used in cognitive robotics [134, 172, 52] and because it allows to deal with goal-based and situation-based activities at different levels of hierarchy such as task, subtasks and actions and consequently to consider different level of granularity. In the example of a task with an overall bad Quality of Interaction, it would be interesting to know that in fact it is only a particular action or subtask ruining it. Indeed, the other parts of the task can be ok, or on the opposite, a particular subtask or action can have performed very well among the others. We need and use this granularity also on three levels defined (interaction session, tasks and actions) to finely evaluate the Quality of Interaction, as a task can be of poor quality but the session is globally going well.

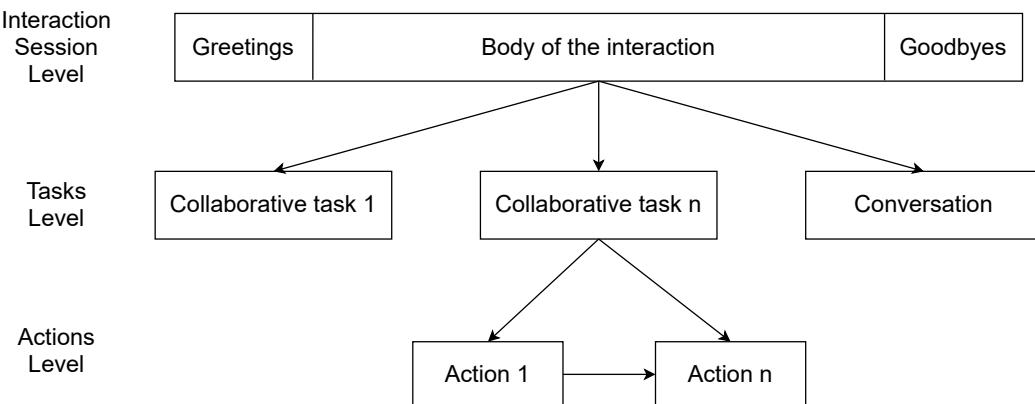


Figure 2.2: The hierarchical structure of an interaction session. The highest level is the interaction session. The second level is composed of the tasks. They are included in the body of interaction of the interaction session and, two types of tasks are considered and may overlap, collaborative and conversational tasks. With this representation, a task can be recursively refined as subtasks until reaching the last level, the actions level, which is considered as atomic. Subtasks are not considered as a “real” level of the interaction session, specially to evaluate the QoI, as it may exist or not according to the task.

2.3.1 Representation of a Human-Robot Interaction Session

We define an **interaction session** as the period during which the robot and a human interact together and are engaged. It is divided in three parts, following the structure proposed by Robinson [231] as presented in Section 1.2: the greetings, the body of the interaction and the goodbyes. First, *the greetings* corresponds to the period where an agent starts an interaction by initiating it with another agent. The interaction session lasts as long as the interactants are maintaining the interaction through conversation and collaborative tasks performance which corresponds to the *body of interaction*. Finally it ends when at least one of the interactants is disengaged, either by abruptly ending the interaction or by closing the interaction as described by Schegloff and Sacks [252], it corresponds to “the goodbyes”. For example, for an entertainment robot in a mall, an *interaction session* starts when a person signals to the robot that they want to engage, by greeting it or by approaching it and looking at it. The body of interaction is composed of conversation and eventually direction-giving tasks and, the session lasts until the person says goodbye or leaves. This is the nominal case and, the duty of the robot is to contribute to maintain the session alive until the human decide to close it. However, in some (extreme) cases, the robot might decide to close the interaction by itself.

Social interactions and collaborative tasks involve engagement. There is no unique definition of what it means to be engaged. We chose one that is frequently used and has been proposed by Sidner and Lee [262]: “Engagement is the process by which two (or more) participants establish, maintain and end their perceived connection during interactions they jointly undertake”. The robot must be able to exhibit its engagement and disengagement and also to assess them with respect to its human partner. We defined three states for the body of interaction, corresponding to what is happening during the latter: conversation (*i.e.*, a social chit-chat or a goal negotiation, without any physical action performed except communicative gestures), collaborative task (*i.e.*, both agents executing actions in order to achieve a shared goal) or idle phases (*i.e.*, the agents are not chatting or performing a collaborative task together but remain engaged in the interaction session, it happens in-between active interaction phases). For each of these three states, the way to exhibit the engagement varies (*e.g.*, in a conversation, an agent looking at their partner displays their engagement; during a task, an agent correctly performing their action is a way to demonstrate their engagement). That is why there is a need to define what behavior the robot has to exhibit in each state and what behavior it should expect from the human in each state, as these behaviors are usually very specific (*e.g.*, in a direction-giving task, the robot keeps its head oriented toward its partner’s face to demonstrate its engagement in conversation and idle contexts and when it gives a direction it expects the human to look at the direction it is showing; in a stack task, when the robot gives an instruction it expects the human to take a given cube).

lien avec commitment
chap 1

2.3.2 Collaborative Tasks, Subtasks and Actions

Tasks compose the body of the interaction of an interaction session as shown in Fig. 2.2. We distinguish conversation (*i.e.*, agents engage in dialogue to exchange ideas, to ask questions, and to resolve differences) from collaborative tasks (*i.e.*, agents work as partners, collaborating to perform tasks and to achieve common goals). We will not develop more on conversation since it is not the main focus of this paper, assessing the QoI of social dialog being another work.

In collaborative tasks, the robot and the human are committed to achieve a goal together, involving joint actions and shared plans [115]. When a human and a robot perform a task together, as described by Bauer *et al.* [21], we could say that the robot has the intent to help the human, so the human’s intention becomes its own intention. Then, they have the joint intention to reach a common goal and, as shown by Michael and Salice [194], they have a commitment to the joint activity, leading to perform joint actions. Therefore, during its evaluation and decision-making processes, the robot has to take into account that the human and itself should remain engaged all along an interaction session for the tasks to be successful and both have to manage and contribute to maintain expectations about what the other is doing.

The elements composing a *task* are: a goal, a plan and involved agents. A plan is needed to realize a goal. There are many ways to generate a plan. But no matter the way (using a planner to anticipate execution or relying on a reactive planning scheme), a plan is a sequence of **subtasks** which are sequences of actions – *subtasks* are not considered as a “real” level of the interaction session, specially to evaluate the QoI, as it may exist or not according to the task.

Actions are the elementary items of tasks manipulated by the high-level robot supervision controller. They cannot be decomposed further by it (*e.g.*, placement and motion planning are achieved by a lower control system not described here). It is usual to describe an action with its preconditions, its effects and, the agents and entities implied in its execution (*e.g.*, in plans written in PDDL (Planning Domain Definition Language) [101]). We add to this description the notion of expected reactions (which can themselves be actions) from the other agents once the action is executed.

In our model, an agent (human or robot) is a contributor to the task and has a mental state as described by Devin *et al.* [84]. The mental state is a set of facts representing, from the agent point of view, the current world state, the state of the goal and the current task state. Since we are interested here by the robot situation assessment and decisional processes, the mental state of the human is built and managed by the robot as an estimation of the beliefs of the human [197, 125, 276].

2.4 A BDI Framework as a Base of JAHRVIS Architecture

2.4.1 The Choice of the Framework

Restart from scratch or base oneself work on an existing software? This is the question which has been studied at the beginning of this thesis work about the implementation of the supervision software. It was possible (1) to develop the wanted features using the code¹ of the previous PhD student working on the supervision, Sandra Devin, (2) to choose among existing software dedicated to decision and execution for Human-Robot Interaction, (3) to choose among existing software dedicated to decision and execution for robotic platforms, and (4) to develop a new software from scratch.

The obvious drawback of (4) is that it takes a lot of time to start a new software from scratch and that it often leads to reinvent the wheel. Then, first we looked at existing solutions. Concerning the possibility (1), she had developed interested features but the code is not modular and it was difficult to add new features or to do modification of the existing ones without breaking everything. Thus, there was the solutions (2) and (3) left. When looking for existing software to manage human-robot interactions, we could find any open-source one with a minimum of features, documentation and not entirely dedicated to a given task. Therefore, we turned ourselves toward robotic frameworks. We compared existing open-source decision-making and execution software for robots. To cite a few, there is the PetriNetPlans library introduced by Ziparo *et al.* [305] which is a framework for planning and execution. Beetz *et al.* developed CRAM, a software implementing reasoning mechanisms that can infer control decisions [25]. A framework to implement hierarchical state machines is available among ROS libraries, SMACH², defined as “task-level architecture for rapidly creating complex robot behavior”. Finally, there are several implementations of the BDI model presented in Section 1.6 such as JAM [131], Jadex [44], SPARK [201], dMARS [86], OpenPRS [135] or Jason [35].

Our choice went to SMACH because its compatibility with ROS and its facility to be used. However, after having built a first prototype with it, we realized the limitations of the framework, as it became more and more difficult to program complex robot behaviors, state machine were not enough powerful. Thus, we returned to the drawing board, minus one option. After a comparison considering potential compatibility with ROS, possible integration with the other software of our architecture, availability of documentation, users’ feedbacks, maintenance, and possibility of code modifications, our choice went to Jason designed by Bordini *et al.* [35] which is a Java interpreter of AgentSpeak created by Rao [224]. It has the advantage to be a BDI (Beliefs, Desires, Intentions) (see Section 1.6.1) agent-oriented framework, fitting with our architecture. BDI frameworks are primarily focused on practical reasoning, *i.e.*, the process of deciding, step by step, which

¹<https://github.com/laas/supervisor>

²<http://wiki.ros.org/smach>

action to perform to reach a goal. It allows more modularity than state machines to handle contingencies and events. It also facilitates reasoning on agents’ – humans and robot – beliefs. We chose this framework among the BDI ones and not another because it is implemented in Java and thus was compatible with rosjava³ (*i.e.*, ROS implementation in Java), it is still developed and maintained, it is well documented (theoretically [35] and implement-ally⁴) which allows source code understanding and modifications, and there is a mailing list for users and its archives available⁵.

2.4.2 Programming with Jason

As said above, Jason is a BDI-based framework, allowing what is called *agent-oriented programming*. Originally designed for multi-robot programming, it can be used for other purposes such as our. How does it work?

We explained in Section 1.6.1 that there were three main concepts to retain from the BDI model: beliefs, desires and intentions. Well, Jason’s purpose is to program agents. Thus, each agent has a beliefs, desires and intentions. The beliefs are what it perceives, acquires from other agents and computes. They can produce desires, *i.e.*, states of affairs the agent wants to achieve. Then, the agent deliberates on its desires and chose to commit to some of them, *i.e.*, the chosen desires become intentions. To satisfy its intentions, the agent executes plans leading to actions.

The programming of the behavior of an agent is in the AgentSpeakLanguage (ASL). The program is designed by a user, a programmer. A program contains, among other things, plans. These plans have actions. An action is described by a Java program, written by the Jason’s user. Then, to run, a program uses the decision loop, the *reasoning cycle*, integrated to Jason. It is possible to customize some functions of the reasoning cycle by overloading or adding Java functions of the agent’s constructors, belief base and reasoning cycle.

2.4.2.1 Agents

In the ASL program of an agent, it is possible to see plans, beliefs, achievement goal (desire) and test goal. First, let’s see a very simple example of program with the agent Bob⁶, presented in Listing 2.1. Bob has one initial (*i.e.*, given by the programmer, not acquired by perception) belief which is `happy(bob)`. A belief is a property, here `happy`, which can have whatever number of arguments (including zero), here `bob`. Then, he has one initial desire, or achievement goal, which is recognizable by `!`. And finally, he has a the plan allowing to achieve the desire `say(hello)`. A plan is triggered by an event, here `+! say(X)` (*i.e.*, the event is that the goal `say(hello)` has been added), has a context (*i.e.*, a precondition), here `happy(bob)` and has a body which contains the actions to execute, here `.print(X)` (*i.e.*, X is a non-initiated variable at first, that will take the value

³https://github.com/rosjava/rosjava_core

⁴<http://jason.sourceforge.net/api/>

⁵<https://sourceforge.net/p/jason/mailman/jason-users/>

⁶<http://jason.sourceforge.net/mini-tutorial/hello-bdi/>

`hello` when Bob will transform his desire into an intention). If we remove the initial belief `happy(bob)` from the first line, as the program is written and considering that Bob is the only agent, he cannot print `hello`, as the precondition of the plan will not be true.

```
happy(bob). \\belief
!say(hello). \\achievement goal
+!say(X) : happy(bob) <- .print(X). \\plan
```

Listing 2.1: ASL program of Bob, a Jason agent

In another example, illustrated by Listing 2.2, Bob has no initial belief nor initial goal. He has plans for two events: starting to believe he is happy and having the goal to say `hello`. We can see that there is also a program for another agent, Alice. She has an initial goal, `her`, which is to inform `bob` that he is happy. Therefore, we can see that an agent can add a belief in another agent's belief base. When Bob gets the information that he is happy, this triggers his first plan, creating for him the goal `!say(hello)`. As Bob does not believe that today is Monday, he can trigger his second plan to say `hello`. In this plan, there are three elements: a `print` action, a `wait` action and the addition of a new goal. And thus, here, we are in the presence of a recursive plan which never ends.

```
\\bob.asl
+happy(bob) : true <- !say(hello).

+!say(X) : not today(monday) <-
.print(X);
.wait(500);
!say(X).

\\alice.asl
!inform.

+!inform : true <- .send(bob,tell,happy(bob)).
```

Listing 2.2: ASL programs of Bob and Alice, two Jason agent

2.4.2.2 Actions

To give an idea of what looks like the Java program of an action, here is an example of a Java function for the action `.print` in Listing 2.3.

```
public class print extends DefaultInternalAction {
    @Override
```

```

public Object execute(TransitionSystem ts, Unifier un,
    Term[] args) throws Exception {
    String sout = argsToString(args);
    System.out.print(sout.toString() + "\n");
}
return true;
}
}

```

Listing 2.3: .print action

In Jason, there are two types of action: *environment actions* and *internal actions*. *Environment actions* allow an agent to act within its environment whereas *internal actions* are designed to be run internally within an agent such as the print action.

We have seen what looks like the program of Jason agent. Now, we are going to see how it is run by the Jason interpreter.

2.4.2.3 Reasoning cycle

Each agent has what has been coined a *reasoning cycle*, composed of 10 steps. It resembles a decision loop, running each step one by one and starting again at the first one. The steps 1 to 4 are dedicated to the belief update of the agent. The steps 5 to 10 describe the interpretation of the ASL program. In these latter, an event is selected, as well as a plan corresponding to this event and then the first formula (*e.g.*, an action or a goal) of the plan is executed. The steps are the following ones, in this order:

1. Perceiving the Environment: Each agent has a Java function called `perceive`. This function can retrieve data from a simulated environment or be customized by the programmer to get actual perception data. The function output a list of beliefs (*e.g.*, `<isOn(box1, table)[source(percept)], color(box1, red)[source(percept)]>`).
2. Updating the Belief Base: The agent's belief base is updated with the perception data. Each change in the belief base generates an event (*e.g.*, `+color(box1, red)[source(percept)]` and if later the color of the box is not perceived anymore, it will be `-color(box1, red)[source(percept)]`).
3. Receiving Communication from Other Agents: It checks if an agent received a message from another agent such as the message Bob received from Alice in Listing 2.2. A message can be a belief, a plan, a goal or a questioning on a given belief.
4. Selecting ‘Socially Acceptable’ Messages: It is a function the programmer should customize. It allows that an agent refuses messages or types of message

from some given agents.

5. Selecting an Event: Events are either perceived changes in the environment or changes in the agent's own goals. There is a queue of events and at each reasoning cycle only one is selected to be handled. The default method to select it is a FIFO but as every function of the reasoning cycle, it can be customized.
6. Retrieving all Relevant Plans: From the selected event, it tries to find all the relevant plans for this event, in the plan library, *i.e.*, the plans written by the programmer in ASL. The function tries to find the plans that can be *unified* with event, *i.e.*, the ones with their left part (the trigger) match the event. For example, if the selected event is `+color(box1,red)[source(percept)]` and in the plan library there are these six plans:

```
+position(Object,Coords) : true <- .print(Coords).
+color(Object,red) : true <- .print(nice).
+color(Object,red)[source(self)] : true <- .print(
    nice).
+color(box1,Color) : true <- .print(nice).
+color(Object,Color) : false <- .print(Color).
+color(Object,blue) : true <- .print(so-so).
```

then there are three relevant plans:

```
+color(Object,red) : true <- .print(nice).
+color(box1,Color) : true <- .print(nice).
+color(Object,Colour) : false <- .print(Colour).
```

7. Determining the Applicable Plans: It takes the list of relevant plans and sees which ones are applicable. To do so, it looks at the context (the preconditions) of the plans. The context can be beliefs, prolog-like rules, internal actions, logical expressions or booleans. If we look at the example of the previous step, there were three relevant plans. Their contexts are simple booleans. Two of them are true, the other one is false, thus the two first plans are applicable.
8. Selecting One Applicable Plan: It takes the list of applicable plans and select the one that will be elected to become an intention, *i.e.*, to be executed. As usual, this is a customizable function for which the default behavior is to take the first plan in the order of the plan library, *i.e.*, in the order written by the programmer. Still with the same example, thus, the one plan to be selected is the first one, `+color(Object,red) : true <- .print(nice)`. If the event was external, *i.e.*, from perception, it creates a new intention, adding it to the set of intentions. Then, the agent has a new *focus of attention*. If the event was internal, *e.g.*, a belief addition inside a plan, then the selected plan is added on the top of the existing intention.

9. Selecting an Intention for Further Execution: As seen in the previous step, an agent can have more than one intention in the set of intentions, each representing a different focus of attention. Then, at this step is chosen the intention of which the formula will be executed. The default function chooses the first intention of the list. After execution of the formula, the intention will go at the end of the intentions list.
10. Executing One Step of an Intention: The first formula of the selected intention is executed (this number is also customizable and the programmer can choose that an agent execute more than once formula in the same reasoning cycle). It can be an internal action, an environment action, a goal, a belief addition or deletion and two other types that will not be developed here.

Therefore, each agent has a reasoning cycle running repeatedly.

2.4.3 Jason Integration with ROS

The robotic architecture presented in Section 2.2 uses the ROS framework[221] to enable communication between its components. Thus, to be able to build a supervision software based on Jason, we needed to interface it with ROS as well. At the time, there was no available bridge between Jason and ROS, Jason being extensively used in simulation contexts. Thus, we developed our own – and at about the same moment, the Jason’s developers started to develop theirs [264] (what we realized a bit later), both using rosjava. We tackled the problem in very different ways. A user of their implementation only needs to fill one perception (topics) and one action (topics/services) manifests to link the system with ROS and then implement their agent in ASL. Thus, it is quite easy to use. However, it seems to have backlashes. Therefore, action requests are directly sent from ASL to the hardware controller, with no possibility of Java processing. Moreover, action status/result can only be boolean which is not enough for a system like ours needing to perform service queries of data to the external Knowledge Base for example. Finally, there is no bridge with action servers which are often used for motion planers for example.

A simplified Java class diagram of our implementation⁷ is presented in Figure 2.3. We defined for each Jason agent a customized Java class (ROS-Jason Agent (RJA) on the figure) which has an Agent Node, an action factory and a belief base where all beliefs are time stamped with the roscore time.

An Agent Node has an attribute, the ROS Parameter Tree, allowing to load YAML parameters from files in which, among other things, are written services, topics and action servers info, as shown in Listing 2.4, a bit similarly to the manifests of [264]. From these parameters, the Agent Node can automatically instantiate all the needed ROS components through its ROS node.

⁷<https://github.com/amdia/rjs>

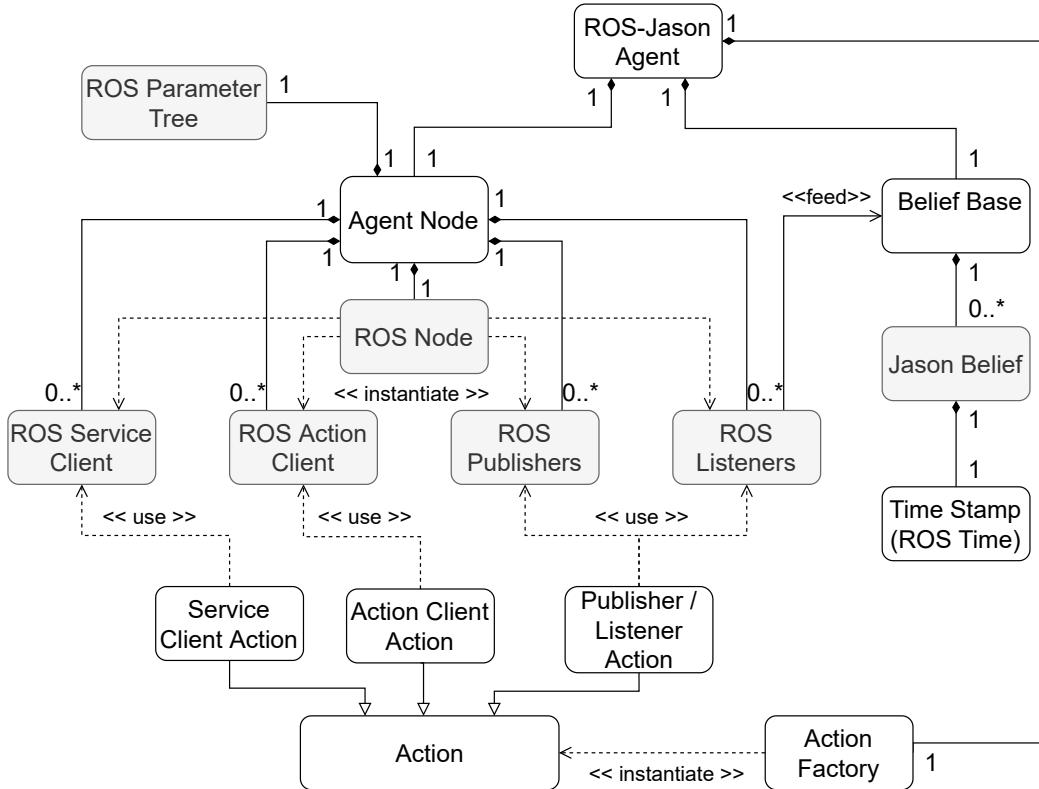


Figure 2.3: Simplified Java class diagram of our ROS-Jason implementation. In white are our customized classes and in grey the native ROS and Jason classes.

The Belief Base can receive perception updates through ROS topic listeners. Moreover, we customized⁸ the belief update function (step 2 of the reasoning cycle) so percepts are not elements that when perceived at time T are added to the belief base and disappearing when not perceived anymore at time T+1. There are updates (additions and deletions) from the external Knowledge Base, in this way, it limits the number of message exchanges, *i.e.*, instead of receiving every 500 ms during 10 seconds that the agent perceives `cube_1`, it receives for example an addition at t=18s and a deletion at t=28s.

For each belief added in the belief base, from perception or internal computation, is added a time stamp from the current ROS time. It is useful for the computation of the Quality of Interaction presented in Section 2.7 and for debugging.

An RJA has a Action Factory – abstract in the ROS-Jason framework and instantiated in JAHRVIS – containing the list of environment actions it can perform – in the case of our architecture, not all actions of this type are for the robot to act on its environment, sometimes there are queries to other components of the architecture. The Action Factory instantiates the Action called through the ASL program at execution time. An Action can either be based on either a ROS service

⁸This modification of the belief update function is not part of our ROS-Jason implementation but is on top of it, in the JAHRVIS implementation which relies on ROS-Jason.

client, or an ROS action client or a ROS publisher for the request and a ROS listener for the result.

```

services:
  onto_individual:
    name: /ontologenius/individual/robot
    type: ontologenius/OntologeniusService
  onto_class:
    name: /ontologenius/class/robot
    type: ontologenius/OntologeniusService
topics:
  mementar_occasions:
    name: /mementar/occasions/robot
    type: mementar/MementarOccasion
    function: sub
  plan_request:
    name: /planner/request_new_plan
    type: planner_msgs/PlanRequest
    function: pub
action_servers:
  plan_motion: /pr2_tasks_node/plan
  execute_motion: /pr2_tasks_node/execute

```

Listing 2.4: Example of service, topic and action server definitions in a YAML file.

2.5 The Architecture of JAHRVIS

The Joint Action-based Human-Aware supeRVISe (JAHRVIS) is implemented on top of our ROS-Jason framework. During the design of JAHRVIS, we identified seven high-level features we needed and implemented their associated processes, based on the objectives presented in Section 2.1⁹. We present JAHRVIS architecture in Figure 2.4.

For each processes (in blue in Figure 2.4), we implemented an RJA, with the wanted behavior coded in ASL and the needed customizations added in Java. Thus, internal communications between the JAHRVIS processes, and so RJAs, use Jason messages (see Section 2.4.2). External communication with the other components of the robotic architecture is based on either ROS messages, services or action clients.

Not all RJAs are active at each level of interaction defined in Section 2.3. Indeed, as its name suggests, the *Interaction Session Manager* handles interaction sessions. The *Robot* and *Human Plan Managers* handle the task level. And, the *Action Execution Manager* and the *Human Actions Monitoring* are in charge of

⁹The design of JAHRVIS was an iterative work, indeed the first version being the supervisor implemented for the task described in Chapter 3, the second one was the supervisor of the task described in Chapter 4 and the final one was the supervisor of the task described in Chapter 5

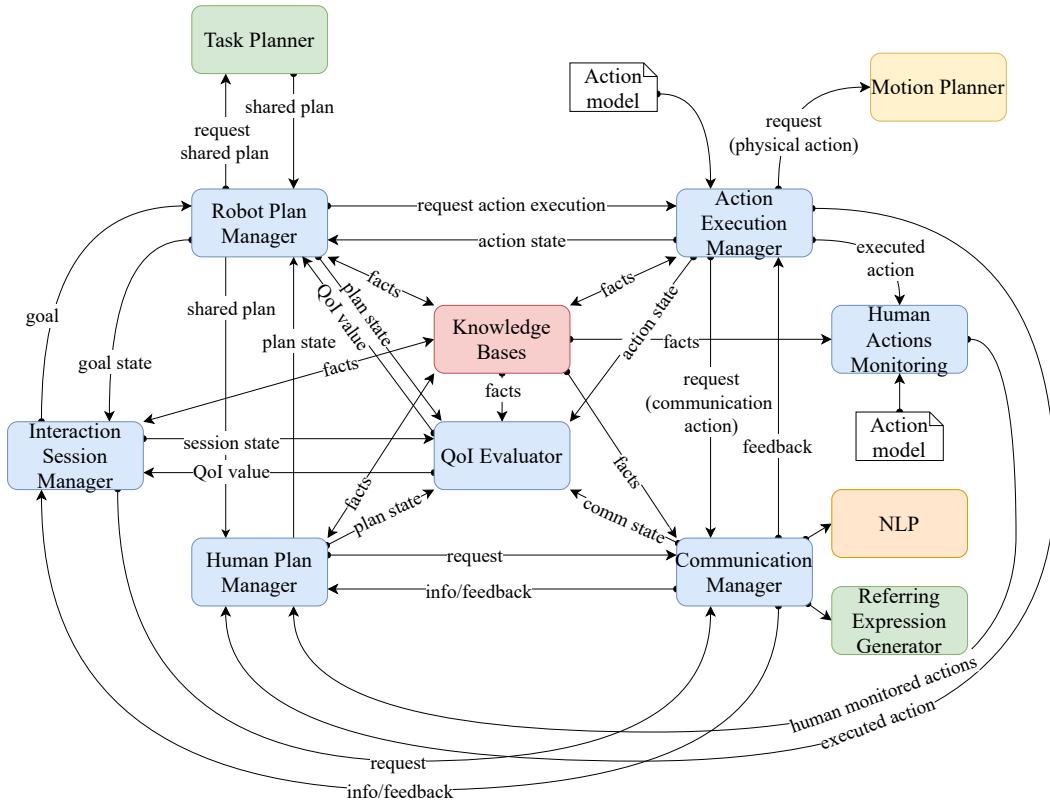


Figure 2.4: The JAHRVIS processes (in blue) and their interactions between themselves and with the other components of the architecture.

the action level. The *QoI Evaluator* and the *Communication Manager* are active at all levels. We can also make the distinction between the component dedicated to the assessment of the quality of interaction, *i.e.*, the *QoI Evaluator*, and the components dedicated to the decision-making and control, *i.e.*, all the components except the *QoI Evaluator*.

2.6 A robot controlling its contribution to a human-robot joint action

related work

The objective of this section is to present the JAHRVIS processes involved in the decision-making and the control of the robot when jointly interacting with a human. First, we present the knowledge representations used, then the Interaction Session Manager, the Human Actions Monitoring, the Shared Plans Handling composed of two processes, one for the robot and one for the human, the Action Execution Manager, and finally the Communication Manager.

2.6.1 Knowledge Representations and Management

As shown in Section 1.3.3.4 and Section 1.3.3.6, when involved in joint actions, humans have shared representations of tasks, actions, goals and have a common ground. Thus, it is important that the robot has such internal representations.

During an interaction, JAHRVIS processes use knowledge bases (KB) of two types: external and internal ones. The external knowledge bases with which we interfaced JAHRVIS are Ontogenius¹⁰ [241] for the semantic knowledge and Mementar¹¹ for the episodic one. They have been developed by Guillaume Sarthou with whom we collaborated closely. Then, each RJA has its own knowledge base that we call belief base in Jason vocabulary. It is used for knowledge which serves to JAHRVIS internal computations only.

Ontogenius allows to store common-sense knowledge (*e.g.*, a cube is an object), knowledge about the environment (*e.g.*, object_1245 is a Cube and is on top of table_2) and knowledge about activities grounded in space and time (*e.g.*, object_1245 has been put on the table_2 by robot (action ID 475)). Mementar allows to store facts and actions in a timeline (*e.g.*, action ID 475 started at 3286 seconds and was over at 3290 seconds). As stated in Section 2.2, it receives and stores facts about the current state from the Situation Assessment component. It reasons on it (*e.g.*, after receiving *isOnTopOf(cube_2, table_1)* and it computes *isUnder(table_1, cube_2)*).

To access to the knowledge stored in Ontogenius, JAHRVIS can make a request to know if a given fact exists or ask an information about a class, a property or an object instantiation. Another way is to subscribe to updates (addition or deletion) for a given fact. It is useful to keep updates about the environment and avoid to be snowed under too much data (*e.g.*, to monitor human place actions, JAHRVIS needs *isOnTopOf* but not *isUnder* so Human Actions Monitoring can subscribe to updates about this first fact). It is possible to either specify the class or individual of the subjects/objects that should be concerned by the subscription, or to receive every facts (*e.g.*, it can subscribe to receive additions of the human looking at the robot [`add`] `human_0|isLookingAt|robot` or to receive all updates about every objects that the human looks at [`?]` `human_0|isLookingAt|?`).

2.6.1.1 Action Representations

Action representations allow the robot to recognize actions, to execute actions, to monitor the human monitoring its actions and to communicate about them. We defined three of them. We chose to have one stored in Ontogenius to benefit from the reasoning features and to have the two others written in an ASL file to benefit from Jason reasoning features.

¹⁰<https://github.com/sarthou/ontogenius/>

¹¹<https://github.com/sarthou/mementar>

External Representation For the needs of JAHRVIS, we represented actions, their verbal labels and their effects in a semantic KB in the form of an ontology¹² managed by Ontogenius. We show in Figure 2.5 a representation of some actions we stored in Ontogenius using the Web Ontology Language (OWL) (see Listing 2.5) and in Figure 2.6 a representation of possible action effects.

```
:PhysicalAction rdf:type owl:Class ;
    rdfs:subClassOf :HtnAction .

:ScanAction rdf:type owl:Class ;
    rdfs:subClassOf :PhysicalAction ;
    htn_actions:hasEffect :IsScannedEffect ;
    rdfs:label '{Agent} @Scan {Pickable}' .
```

Listing 2.5: Description of ontology classes in the OWL language using the Turle syntax.

One of the advantages of using action model stored in Ontogenius is the class inheritance. It allows to define properties for one class that will be transmitted to its child classes (*e.g.*, if it exists multiple class representing a drop action, let's say `human_drop_cube` and `robot_drop_cube`, both inherit from the properties of `DropAction` such as the label used for the action verbalization). Another advantage is to be able to link classes through properties and to easily query the KB about it (*e.g.*, what are the effects of the `PickAction` and then what types of effects are they?).

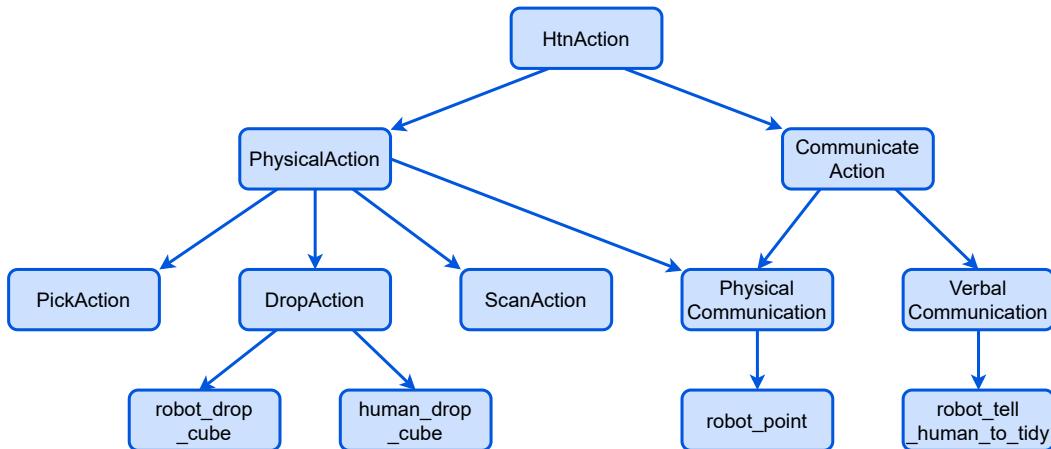


Figure 2.5: The representation of an extract of the ontology class hierarchy graph of HTN actions. Taking the class `PhysicalAction`, the middle bottom arrow has to be read as “*A DropAction is a kind of PhysicalAction*”.

As we know, when an agent perform an action, the other agent may monitor it, in order to follow the task progress and to know when the action is over. A way to know that an action is over is to check if the action effects exist or not in the current worldstate. However, effects may be perceived differently according to

¹²An ontology is a way to represent knowledge

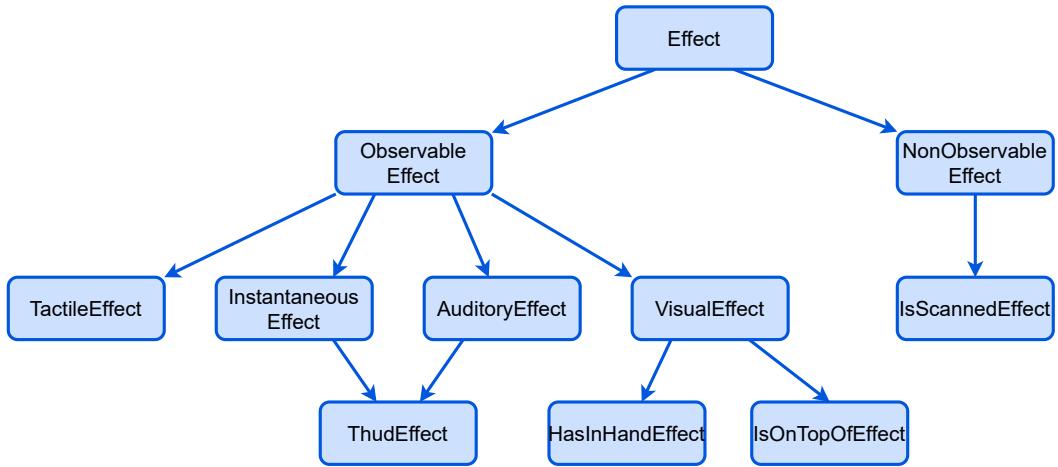


Figure 2.6: The representation of an extract of the ontology class hierarchy graph of action effects. Taking the class `ThudEffect`, the top arrows indicate that `ThudEffect` is an `InstantaneousEffect` and an `AuditoryEffect`.

the agent type as humans and robots does not have the same perception modalities (and even in one given type it can differ). In Figure 2.6, we represented a possible way to model and classify action effects. And so, because Ontogenius is designed for HRI, it is possible to have different representations for robot agents and human agents. We present now a use case with its illustration in Figure 2.7. An agent may have to perform `HeatWaterInKettleAction`. If it is performed by the human, the robot has to monitor the action effects to know if the action is over or not. However, a robot is not able to observe that a kettle has finished to boil water, thus the action has a non-observable effect for the robot. Then, probably the robot will ask the human if the action is over or will see that the human performs its next action of the plan. Now, if we place ourselves in the case where the robot is the one performing the action – with a smart kettle –, it wants to check if the human could be aware of the action end (because if they are not aware, it needs to communicate about it). The criteria JAHRVIS takes into account is, was the effect observable by the human partner? To answer this question, it first needs to know what the observable effects of `HeatWaterInKettleAction` for the human (if there are). Then, it can query the human’s belief base in Ontogenius and get the knowledge that for them, the effect of `HeatWaterInKettleAction` belongs to the class `ThudEffect` (when the kettle stops, it produces a thud) and `TactileEffect` (when the kettle boils water, it becomes hot).

Finally, as mentioned earlier and as visible in Listing 2.5, Ontogenius allows to define label classes and so label for actions. These labels are then used by JAHRVIS to communicate about the plan actions. For example, in “Agent @Scan Pickable”, elements between braces are to be instantiated at execution time by JAHRVIS communication process when needed. Then, the `at` symbol indicates that the word is a verb that should be conjugated. Verb conjugations can also be found in the KB

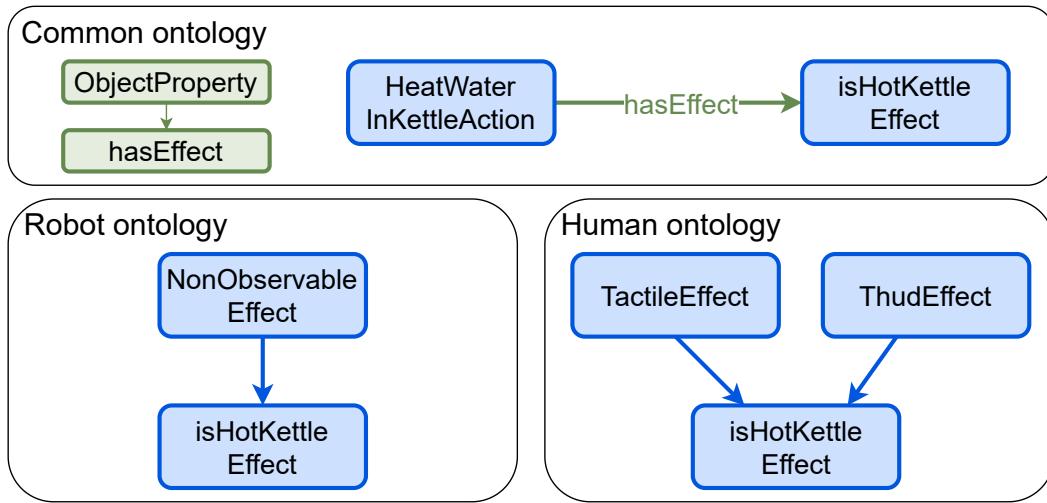


Figure 2.7: Illustration of the human and the robot having differing ontologies. Both have the common knowledge that HeatWaterInKettleAction has isHotKettleEffect as effect. However, in the robot ontology, isHotKettleEffect is defined as a NonObservableEffect whereas in the human ontology it is defined as a TactileEffect and a ThudEffect which are both ObservableEffect as shown in Figure 2.6.

as shown in Listing 2.6. Thus, the communication manager could process it leading to “I scanned the blue cube”.

```
:DropTSPSimplePresent    rdf:type owl:Class ;
                           rdfs:subClassOf :DropSimplePresent ;
                           rdfs:subClassOf :ThirdSingularPersonalForm ;
                           rdfs:label “lâche”@fr ;
                           rdfs:label “drops”@en .
```

Listing 2.6: Description of the class describing the verb Drop in the third-person present-tense, in the OWL language using the Turle syntax.

We have seen the possibilities offered by Ontologenius to JAHRVIS. Now, we present the two internal action representations, one of the human actions in order to monitor them and the other one is of the robot actions, to allow the robot to monitor the human monitoring of its actions.

Internal Representation What does JAHRVIS needs to monitor a human action? We defined a human action **Act** as: a predicate in the form of a triplet **ActPred** with its name **ActName**, the agent **AgentName** performing it and parameters **Params**; a list of preconditions **PrecondL**, a list of distinctive movements **MoveL** that the human could do when performing the action; a list of effects that we coined *progression effects* **ProgEffectL** which are action effects but not enough to rule the action end; and a list of effects that we coined *necessary effects* **NecEffectL** which are action effects existing iff the action is over. Our action model takes the form of Jason beliefs written in an ASL file, added as input of the RJA Human Action Monitoring. A human action **Act** is represented as:

```
actionModel(ActPred, PrecondL, MoveL, ProgEffectL,
    NecessEffectL).
```

with `ActPred` being:

```
ActName(AgentName, Params).
```

For example, the action Place for a human is represented as:

```
actionModel(place(Human, [Pickable, Support]),
    [hasInRightHand(Human, Pickable)],
    [rightHandMovingTowards(Human, SupportList)],
    [~hasInRightHand(Human, Pickable)],
    [isOnTopOf(Pickable, Support)]).
```

The choice to have two kinds of effects has been made in order to allow the Human Action Monitoring to be robust to a potentially unreliable perception. Indeed, for example in the case of a Place action, the perception of an object hold by a human can be jumpy, and receiving the fact that the object is not in the human's hand anymore. It could reappear a few instant later. On the other, if the robot perceives that the object has been placed on top of a support, it can assume that the action is really over. The algorithm of Human Action Monitoring will be more detailed in Section 2.6.3.

We designed a similar model for the robot actions but simpler, with only the action triplet predicate and the necessary effects, which gives:

```
actionModel(ActPred, NecessEffectL).
```

For example, the action Place for a robot is represented as:

```
actionModel(place(Robot, [Pickable, Support]),
    [~isHolding(Robot, Pickable),
    isOnTopOf(Pickable, Support)]).
```

2.6.1.2 Shared Plan Representation

As explained in Section 2.3, we represent Shared Plans using Hierarchical Task Network (HTN). This formalism allows to deal with goal-based and situation-based activities at different levels of hierarchy such as task, subtasks – abstract tasks using planning vocabulary – and actions – atomic primitive tasks – and consequently to consider different level of granularity. For example, it may be useful to JAHRVIS to be able to request a plan for a given abstract task which failed¹³. Another advantage is that it is easy then for the robot to communicate about subtasks and not only about actions without context. However, according to the task or the domain, the HTN expressiveness for this matter raises discussion. Indeed, HTN plans often make use of recursive abstract tasks which becomes useless for replanning because such abstract tasks have no semantic meaning (*e.g.*, an abstract

¹³This is future work.

task called DropAllObjects can be decomposed into a primitive task DropObject and the abstract task DropAllObjects which is itself decomposed into DropObject and DropAllObjects, etc., in this case, to say that the abstract task DropAllObjects has failed does not give a useful information).

Moreover, in the next section (see 2.6.1.3), we show how JAHRVIS feeds the episodic ontology, a timeline, with abstract and primitive task executions. It becomes humanly unreadable with recursive tasks. A concept such as the “iterative task” proposed by Martinie *et al.* [186] would be interesting if used in a HTN plan for HRI. However, there is currently no such thing, so when manipulating such plans we have two modalities:

1. the domain is written being aware of this issue and thus, JAHRVIS takes abstract tasks as input besides primitive tasks (*i.e.*, in the current work, plans generated by HATP/EHDA¹⁴)
2. the domain is written with recursive abstract tasks and thus, JAHRVIS only selects primitive tasks as tasks being part of the plan (*i.e.*, in the current work, plans generated by HATP¹⁵)

We define a shared plan as a sequence of primitive tasks having to be performed by an agent and, abstract tasks. An abstract is defined as follows:

```
abstractTask(ID, State, Name, DecompoOf).
```

where **ID** is an identification number proper to the given task, **State** is the task state estimation by the robot, **Name** is the name of the task and **DecompoOf** is the identification number (**ID**) of the abstract task that has been decomposed into other tasks, including the given task. And, a primitive task is defined as:

```
primTask(ID, State, Name, Agent, Params, Predecessors,  
DecompoOf).
```

where **ID** is an identification number proper to the given task, **State** is the task state estimation by the robot, **Name** is the name of the task, **Agent** is the name of the agent that should perform the task, **Params** is the list of parameters required for the task execution, **Predecessors** is a list of task ids which correspond to tasks needing to be achieved before the given task can start, and **DecompoOf** is the ID of the abstract task that has been decomposed into other tasks, including the given task.

We defined nine possible values for a task **State**: **planned** (needs to be done later), **todo** (needs to be done now), **ongoing** (is in progress), **executed** (is achieved), **unplanned** (is not part of the plan anymore – used with conditional plans (see Section 2.6.4)), **not_starting** (was to do but took too much time before starting), **not_finished** (started but has not been achieved), **not_seen** (executed but not observed by the other agent), **suspended** (needs to be set **unplanned**).

¹⁴Based on domains intentionally written without recursive tasks by Guilhem Buisan.

¹⁵Reuse of domains written by Sandra Devin.

So, for example, an example of plan for the Director Task presented in Chapter 4 where the robot gives instructions to the human in order to remove one cube from a shelf is:

```
abstractTask(0, "planned", "tidy_cubes", (-1)).
abstractTask(1, "planned", "tidy_one", 0).
primTask(3, "planned", "robot_congratulate",
    "robot", ["Helmet_2"], [8], 0).
primTask(4, "planned", "robot_tell_human_to_tidy",
    "robot", ["cube_BBCG","Helmet_2","throw_box_green"],
    [], 1).
abstractTask(5, "planned", "wait_for_human", 1).
abstractTask(6, "planned", "tidy", 0).
primTask(7, "planned", "human_pick_cube",
    "Helmet_2", ["cube_BBCG"], [4], 6).
primTask(8, "planned", "human_drop_cube",
    "Helmet_2", ["throw_box_green"], [9], 6).
primTask(9, "planned", "robot_wait_for_human_to_tidy",
    "robot", [], [7], 5).
primTask(11, "planned", "idle", "Helmet_2", [], [3], 0).
```

2.6.1.3 Feeding the Knowledge Base

Until now, we stayed focus on semantic knowledge going from the external KB to JAHRVIS. But, as mentioned earlier, one of the external KB is dedicated to episodic knowledge. This KB takes the form of a timeline, managed by Mementar. Whereas Ontologius feeds JAHRVIS with knowledge, the flow is inverted for the episodic data, as Mementar is fed by JAHRVIS among other components. Indeed, when an abstract or primitive task is started or achieved, this information is sent to Mementar for storage with the associated ID and time stamp. The objective is to have a history of the task proceeding. One of the possible use of such history is for the robot to refer to past events during a task when communicating. We illustrate the timeline in Figure 2.8 with the same example as the one above for the plan, one cube had to be removed by the human.

Moreover, JAHRVIS adds the semantic data associated to a task – agent and parameters – to the semantic ontology.

2.6.2 Interaction Session Management

This process handles the interaction sessions. An interaction session is triggered when a human is close enough to start a conversation and seems willing to, *i.e.*, when the fact *isEngagedWith(human_i, robot)* is added to the knowledge base and sent to JAHRVIS. In this way, the robot tries to respect people that does not want to interact with it. From there, the robot is in the first phase of the interaction session, the *greetings*. The robot says hello to the human and announces the activities it can

mettre state machine
théorique que j'ai faite
? je n'ai pas redevelopé ce module depuis
longtemps

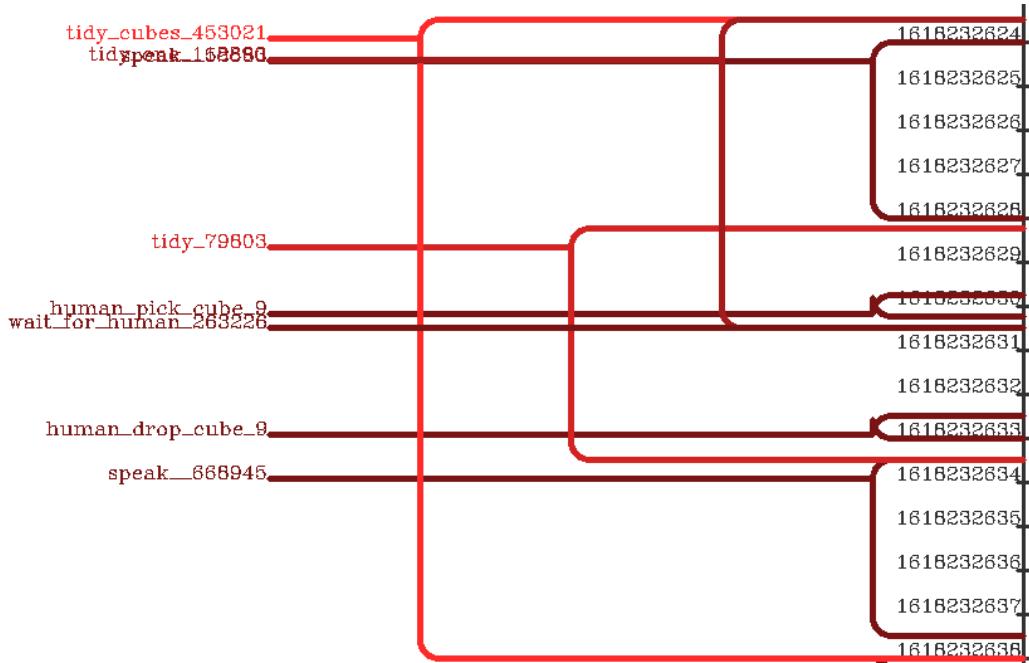


Figure 2.8: Example of timeline with the Director Task, one cube had to be removed from the shelf by the human. It has been automatically generated by Mementar after having received data from JAHRVIS.

perform with them, depending on the context they are. The interaction manager triggers the tracking of the human’s head by the robot head. This has two purposes: to signal the robot’s engagement and to monitor the human’s actions. This behavior is quite similar to the one described by Satake *et al.* [244].

An interaction session stays open as long as the human and the robot perform activities together, *i.e.*, as long as the human is engaged in the interaction. This engagement is monitored by the robot in different ways: through the predicate *isEngagedWith(human_i, robot)* during dialogue phases outside a task and through what is happening during a task. If at some point the human is not perceived for a while or the human says goodbye, then the manager ends the session. In the latter case, the robot replies with goodbyes. Finally, it returns to its home-base if it has one.

2.6.3 Human Actions Monitoring

In order to coordinate properly, humans monitor each others when they are in a joint action (see Section 1.3.3.7). The robot needs the same kind of process to be able to assess if the human is doing the action of the plan it expects or not. Existing solutions exist to monitor or recognize human actions but none of them matched all our criteria which are:

- it should be easy and quick to add a new action that the robot can monitor

faire un état de l’art rapide ?

- the process should output the action parameters
- the process should give information about the action progress, *i.e.*, model the action start and progression when possible and not only the end
- it needs to be robust to a potentially unreliable perception
- an available open-source code

Thus, we implemented our own model-based solution with an RJA dedicated to Human Actions Monitoring (HAM). It relies on the action model presented in Section 2.6.1.1 which it loads at initiation. We chose to base our action monitoring process on human movements and action effects that the robot can observe. As it needs to monitor them, it extracts the predicate types corresponding to those and subscribes to updates about these facts to Ontogenius as explained in Section 2.6.1.

Continuously, the HAM RJA monitors facts and human movements that are present in the action model, and sends to the Human Plan Manager (HPM) RJA three types of lists of facts:

- list of actions that may have started that we coined *possibly started actions*
- list of actions that may be progressing that we coined *possibly progressing actions*
- list of actions that are estimated as finished that we coined *possibly achieved actions*

Action states are updated according to received facts. When the state of an action changed to *possibly started*, *possibly progressing* or *possibly achieved*, the affected list is updated and sent to the HPM.

The algorithm we developed can be depicted in the form of a Finite State Machine representing the state of one action as shown in Figure 2.9 and is implemented in ASL (the code is available in Appendix A.1). Each transition is triggered by the addition or the deletion of a fact. Using Jason rules – they are quite similar to Prolog rules, facts are analyzed to see if they match a movement or an effect of a known action. For example, if we look at the Place action example presented in Section 2.6.1.1, it expects the fact *rightHandMovingTowards(Human, Support)* as a movement. Therefore, receiving *rightHandMovingTowards(human_4, table_2)* will match a Place action movement, however, receiving *rightHandMovingTowards(human_4, milk_bottle_2)* will not, as the *milk_bottle_2* does not belong to the *Support* class (but this fact may be useful to monitor another action).

It is not shown on the Figure for clarity reasons, but each state, except Possibly achieved, has a transition to the final state which is triggered by a timeout. All the other transitions of the state machine are described in Table 2.1.

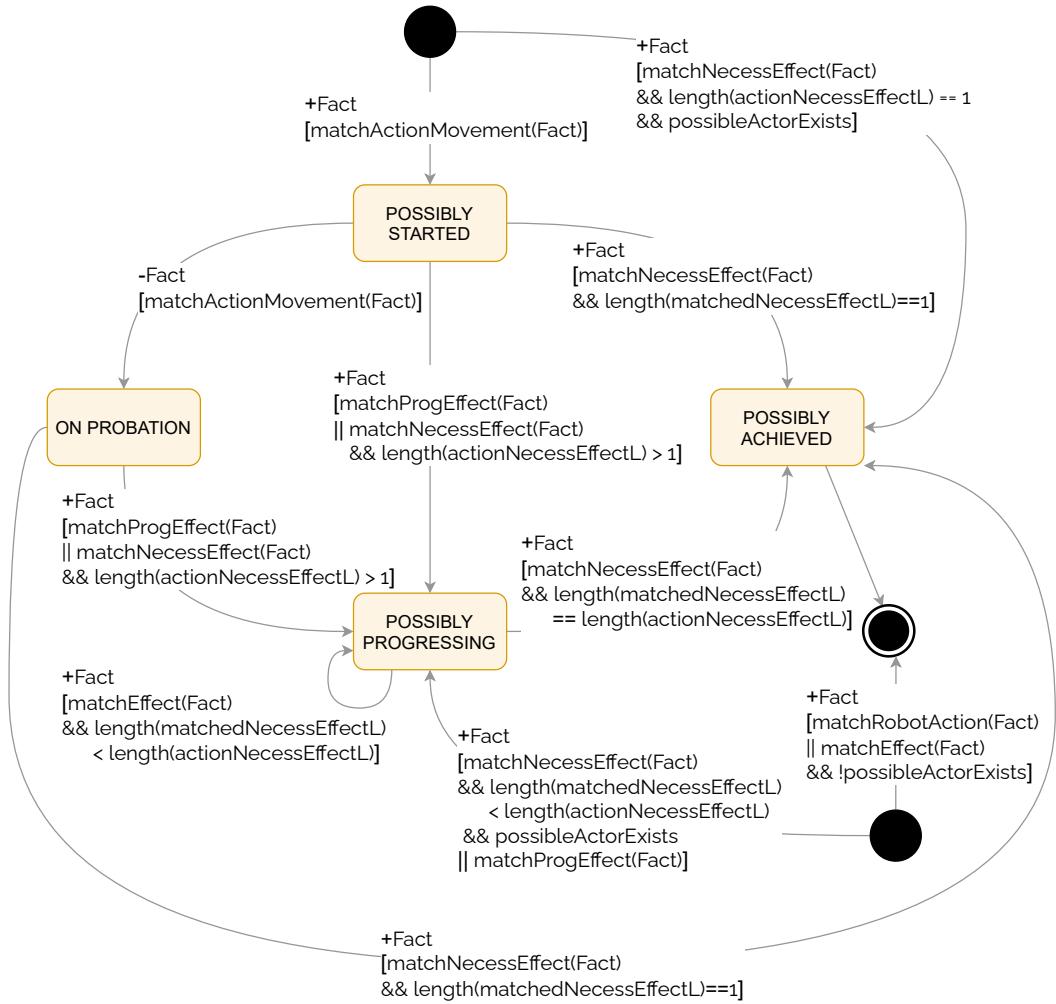


Figure 2.9: Representation of the Human Actions Monitoring (HAM) RJA in the form of a Finite State Machine representing the state of one action.

Table 2.1: Description of the Finite State Machine shown in Figure 2.9.

Current State	Input and Condition	Next State	Explanation
Initial State	+Fact [matchActionMovement(Fact)]	Possibly Started	When a fact matching a movement for a given action is received, HAM computes that the human may have initiated an action
	+Fact [matchNecessEffect(Fact) && length(actionNecessEffectL) == 1 && possibleActorExists]	Possibly Achieved	The robot may have missed the movement or the progression effect of an action because it was not looking or the perception did not detect it. Then when a necessary effect is received and that only one exists for the action, the action is estimated as achieved if it is possible to find an agent who may have performed it.
	+Fact [matchNecessEffect(Fact) && length(matchedNecessEffectL) < length(actionNecessEffectL) && possibleActorExists matchProgEffect(Fact)]	Possibly Progressing	Similarly to the case above, the robot may have missed the movement or the progression effect of an action. However, if this action has several necessary effects, the action is considered as progressing.
	+Fact [matchRobotAction(Fact) matchEffect(Fact) && !possibleActorExists]	Final State	The HAM is aware of the actions executing by the robot so it does not mismatch its action effects with the ones of another agent. If an effect matches, nothing happens. Likewise if an effect is detected but no agent could be found that might have done it.

Table 2.1: (continued)

Current State	Input and Condition	Next State	Explanation
Possibly Started	+Fact [matchProgEffect(Fact) matchNecessEffect(Fact) && length(actionNecessEffectL) > 1]	Possibly Progressing	When a fact corresponding to a progression effect of the started action is received, or it matches a necessary effect but there are more than one for this action, HAM reinforces its estimation that this action is ongoing by setting it to the progressing state.
	+Fact [matchNecessEffect(Fact) && length(matchedNecessEffectL) == 1]	Possibly Achieved	When a fact corresponding to a necessary effect is received and that there is only one for the started action, the action is considered as achieved as the robot is able to observe its effect and that it had observed the human starting it.
	-Fact [matchActionMovement(Fact)]	On Probation	When a movement fact is removed from the belief base without having observed an effect, it might mean that it was a false estimation and that the action is not starting. However, it might also be the robot perception being sporadic and so the action goes in this temporary state waiting for a potential coming effect.

Table 2.1: (continued)

Current State	Input and Condition	Next State	Explanation
On Probation	+Fact [matchProgEffect(Fact) matchNecessEffect(Fact) && length(actionNecessEffectL) > 1]	Possibly Progressing	An effect is detected and the action state is resumed.
	+Fact [matchNecessEffect(Fact) && length(matchedNecessEffectL) == 1]	Possibly Achieved	A necessary effect is detected and as there is only one for this action, it is considered as achieved.
Possibly Progressing	+Fact [matchNecessEffect(Fact) && length(matchedNecessEffectL) == length(actionNecessEffectL)]	Possibly Achieved	An necessary effect is received and in total, for this action, there was as many necessary effects received as the ones defined for this action.
	+Fact [matchEffect(Fact) && length(matchedNecessEffectL) < length(actionNecessEffectL)]	Possibly Progressing	When an action effect is received and that either it is another progressing or not the last necessary effect expected for the action, the action state remains progressing.
Possibly Achieved	-	Final State	When an action is estimated as achieved, this is its final state.

2.6.4 Shared Plans Handling

In order to correctly perform collaborative tasks with humans, the robot needs to know to do them. One way is to have a planner with a domain, computing a plan at execution time based on its current knowledge about the environment and interaction. Then, the robot must be endowed with a way to manage the execution of this recipe. As we place ourselves in the context of joint action, plans manipulated by the robot are shared plans, as presented in Section 2.6.1.2 (to differentiate from the ASL plans presented in Section 2.4.2 which code all the RJA).

We claim that the robot ability to handle and execute shared plan is enhanced when endowed with Theory of Mind (ToM) (see Sections 1.3.5 and 1.5.3), as shown by Devin [84]. It allows the robot to be aware of false beliefs or belief divergences in the human's point of view. When such things happen, it can react appropriately, either by acting or communicating. We gave the robot such ability¹⁶, *via* two processes: the Robot Plan Manager (RPM) and the Human Plan Manager (HPM) (see Figure 2.4). Therefore, the first one handles the robot's beliefs about the plan and the action execution while the second handles the human's beliefs about the plan and the communication with the human. The RJAs implementing these processes are presented in Sections 2.6.4.1 and 2.6.4.2.

As we designed JAHRVIS to be as generic as possible, it can manage different kinds of human-robot shared plans as input: (1) classical shared plans, (2) shared plans for which actions might not be allocated to an agent at planning time and objects might be referred to with a semantic query, and (3) conditional shared plans which anticipate different possibilities for the human decision/action. What we call classical shared plans are as the ones returned by Hierarchical Agent-based Task Planner (HATP) [172].

The second type of shared plans is an extension of the work of Devin about postponing some decisions from planning time to execution time about the actor of some actions and some parameters [85]. In works previous to Devin, all the actions of the computed plans were allocated and completely instantiated during plan elaboration. For example, the first action of the shared plan for a blocks building task could be:

```
primTask(7, "planned", "pick_place_cube", "robot",
["red_cube_1", "placement_1"], [4], 6).
```

We re-implemented her idea of *Agent X* in our plan managers (with some modifications, for example we do not replan once an action is allocated), enabling the choice of the agent who should perform the action at execution time when the planner has computed that both agents could do it. So we can have the planner returning:

```
primTask(7, "planned", "pick_place_cube", "AgentX",
["red_cube_1", "placement_1"], [4], 6).
```

¹⁶The robot has a first-order ToM, it estimates the human knowledge about the task but it does not compute what the human thinks of the robot knowledge about the task (second-order ToM)

In this case, according to what the robot estimates the human wants to do, the robot can allocate the action to itself or to them. Moreover, she introduced the use of the notion of object similarity: two similar objects will have the same role in the task. With this modification, the first action of the shared plan becomes

```
primTask(7, "planned", "pick_place_cube", "robot",
["red_cube", "placement"], [4], 6).
```

To have more expressiveness, we brought a new modification to the plan returned by HATP, in collaboration with Guillaume Sarthou. Indeed, instead of returning an object generic name, it returns a SPARQL query with the constraints used in the domain. Thus, keeping the same example as previously, the action becomes

```
primTask(7, "planned", "pick_place_cube", "robot",
["?0 isA Cube. ?0 hasColor red. ?0 isReachableBy ?1
NOT EXISTS { ?0 isOnTopOf ?2. ?2 isA Cube }",
"placement"], [4], 6).
```

This allows the RPM to directly request Ontogenius to get an object list matching this query and to choose among it at execution time. And, when the human performs an action with a SPARQL query as parameter, the HPM can check if the object on which the human is acting matches the query. We can see that this solution brings precision compared to the one presented by Devin. Indeed, "red_cube" does not tell that it should be reachable by an agent and that it should not be on the top of another cube yet but "?0 isA Cube. ?0 hasColor red. ?0 isReachableBy ?1 NOT EXISTS { ?0 isOnTopOf ?2. ?2 isA Cube }" does. For example, in Devin, the reachability test was added to the plan manager of the supervisor which is task specific.

Finally, the last type of shared plans we manipulated is conditional plan, generated by Human Aware Task Planner with Emulation of Human Decisions and Actions (HATP/EHDA) [52]. It is another mean to postpone decision at execution time about an agent actor or parameters. We focused on plans where branch junctions concern human decision. For example, in Figure 2.10, is shown a conditional plan computed by HATP/EHDA. The plan indicates that the robot has to ask for human help. Then, the human will either get the coffee or fill the water. Thus, at planning time, the choice of human actions is not made, but thanks to the conditional plan, both possible solutions are planned and it is up to JAHRVIS to follow the proper one depending on the human action detected during execution.

JAHRVIS could be used to execute plans from other HTN planners than HATP and HATP/EHDA by adding a Java class to format abstract and primitive tasks as presented in Section 2.6.1.1 – HATP and HATP/EHDA have a dedicated Java class each, for action formatting, but their plans are handled with the same code in the plan managers.

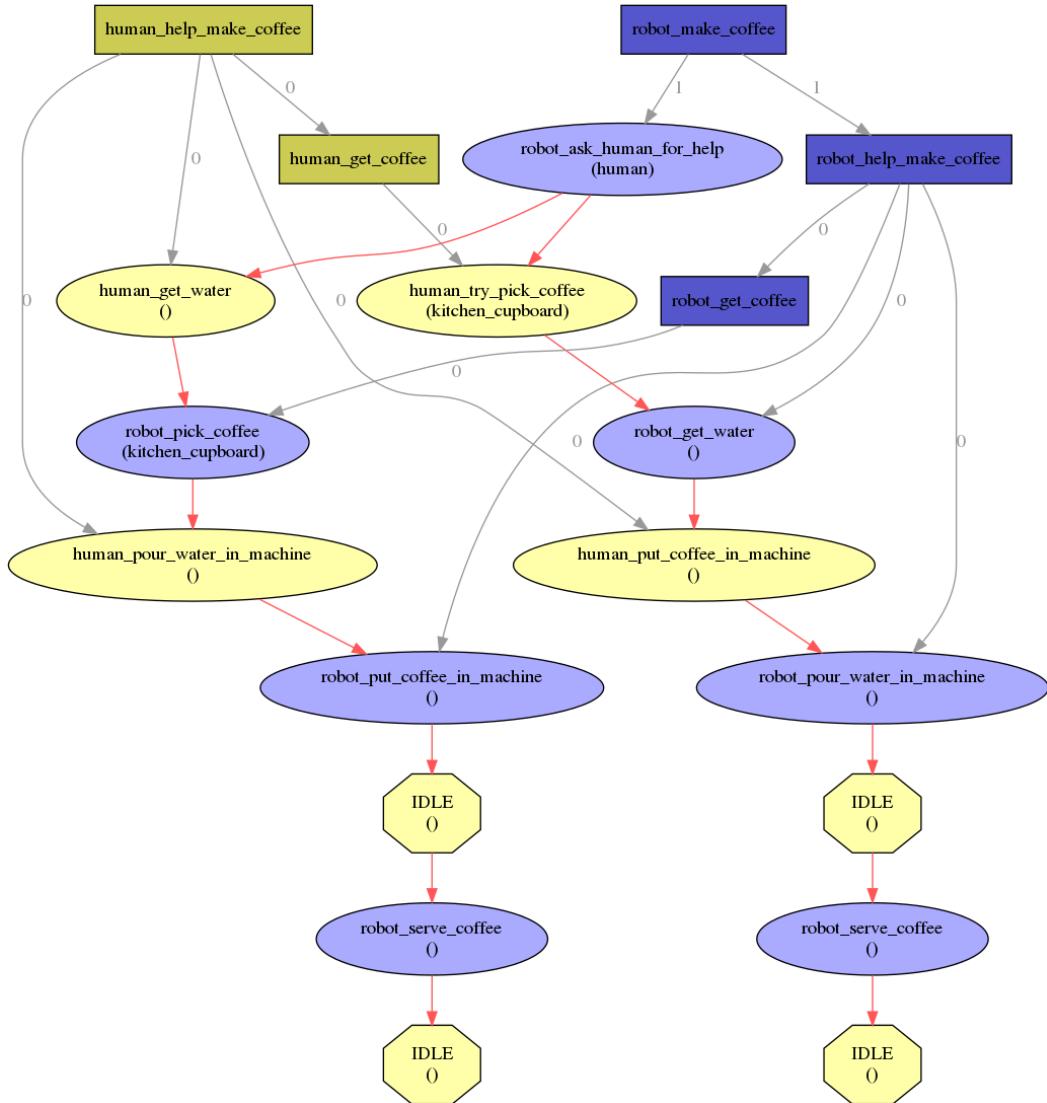


Figure 2.10: A conditional plan computed by HATP/EHDA, a planner developed by Guilhem Buisan who also wrote the domain which served for this plan. The plan indicates that the robot has to ask for human help. Then, the human will either get the coffee or fill the water. Thus, at planning time, the choice of human actions is not made, but thanks to the conditional plan, both possible solutions are planned and it is up to JAHRVIS to follow the proper one depending on the human action detected during execution.

2.6.4.1 Robot Plan management

2.6.4.2 Human Plan management

belief divergence before human action (human missed robot action)(sandra) -> com; inaction whereas compute human should act -> com; a plan manager for the human side according to human presence/visibilities/reachabilities; present algo or

Algorithm 1 Update of a plan

```

function UPDATEPLAN
    for each primTask( $i, \text{State}_i, \text{preds}_i, \text{decomp}oOf_i$ ),
        State =  $\text{PLANNED}$ ,  $i \in \mathbb{N}$  in planPrimTasks[] do
             $\text{preds} := \text{FINDALL}(j)$ 
            such as  $\text{primTask}(j, \text{State}_j, \text{preds}_j, \text{decomp}oOf_i) \in \text{planPrimTasks}[],$ 
             $j \in \text{preds}_i, \text{State}_j \neq \text{EXECUTED}$ 
            if  $\text{preds} = \emptyset$  then
                primTask( $i, \text{PLANNED}, \text{preds}_i$ )
                 $\quad := \text{primTask}(i, \text{TODO}, \text{preds}_i, \text{decomp}oOf_i)$ 
                UPDATEABSTRACTTASKSTOONGOING( $\text{decomp}oOf_i$ )
            end if
        end for
    end function

```

Algorithm 2 Update of abstract tasks on action update

```

function UPDATEABSTRACTTASKSTOONGOING( $i$ )
    if  $\exists \text{abstractTask}(i, \text{State}_i, \text{decomp}oOf_i)$  and State =  $\text{PLANNED}$  then
        abstractTask( $i, \text{PLANNED}, \text{decomp}oOf_i$ ) := abstractTask( $i, \text{ONGOING}, \text{decomp}oOf_i$ )
        UPDATEABSTRACTTASKSTOONGOING( $\text{decomp}oOf_i$ )
    end if
end function

```

state machine

2.6.4.3 Robot Resource Management

joint attention depending on the robotic platform (pepper arms+head; pr2 needs planer for action manipulation so no arm manager, only head manager) head manager: when robot execute an action, look the action object; when the robot speaks, look at the human. Programmed through channels.

deplacer presentation
dans montrer ici?

2.6.5 Action Execution Management

action model; generic algo, just task as input the action model;

2.6.6 Communication management

REG to communicate about actions and objects; relevant communications; different communication types (inform executed action, ask to perform action, other informative sentence) (cite Clodic or others?); human attention

2.6.7 Future work

take preconditions into account to evaluate next action

integrate multiple humans, interaction session handling
 improve goal management and interaction session
 plan invariants, plans pas entier

2.7 A robot evaluating its contribution to a human-robot joint action

The work presented in this section has been excerpted from a paper published in the Journal of Social Robotics [191].

2.7.1 Introduction

Robots dedicated to Human-Robot interactions are not just machines receiving commands and executing them. They should be decisional agents with high-level goals, taking decisions (potentially taking into account social norms), and acting and reacting to not only their actions but those of other agents. Cognitive and interactive robots are becoming more and more capable thanks to the use of human-aware models and algorithms [167, 281], with roboticists endowing them with the ability to execute their share of the work while adapting to contingencies, particularly those caused by human's behaviors and decisions [128, 13, 181]. The decision-making process is based on a range of knowledge about the environment, the interaction, the context... Nevertheless, curiously and interestingly, very little has been done to allow the robot, while performing its collaborative or assistive activity, to permanently evaluate if things are going well or not, as humans do. We name this ability "the measure of the Quality of Interaction from the robot point of view". We believe that enriching the robot knowledge with a good estimation about how the interaction is going, could enhance its decision-making process and thus, its social behaviour.

For example, if the robot detects that the QoI starts to drop, it can take a decision based on this information and act to try to improve the interaction quality (*e.g.*, it can choose to change some modalities such as the language in which it communicates with the human, the volume of its speakers, or the parameters of its planners). On the contrary, when the QoI is high, the robot can decide to just continue the interaction as planned. Then, endowed with a QoI Evaluator, a robot becomes more adaptive and performs better. Also, a very poor performance all along a task could allow the robot to assess that the human is not really engaged in the interaction, or even is trying to play the robot. In such situation, the robot might perhaps better disengage. Finally, from a methodological point of view, a robot deployed in the wild able to assess interactions, has an asset compared to others as it could reduce the investment in material and human resources to perform user studies. And, a developer might use the logs to improve their design.

In this paper, we only focus on the Quality of Interaction evaluation process and not on how to use its result for decision making. Therefore, we present in the sequel

the methods and tools we developed, allowing the robot to evaluate in real-time the quality of the human-robot collaborative activity it is involved in. It is based on a set of metrics we have defined, focused on two concepts: the measure of human engagement and the measure of the effectiveness of collaborative tasks performance. However, this is by no means exhaustive, and other metrics and parameters could (and should) be added later. Our work can be seen as a toolbox among which it is possible to pick the desired metrics according to tasks or contexts. We propose a way to aggregate these metrics, producing the QoI. The evaluation of the QoI is performed at three different levels of abstraction: the interaction session level, the task level and the action level. In further work, this ability could provide additional information to the robot and open the possibility for reconsidering its behaviour in case it estimates that the quality of the interaction is degrading (*e.g.*, changing its plan or the way it is achieving it, informing the human or requesting a change in their behaviour, or even deciding to disengage).

The section is organized as follows. First, we briefly discuss related work and the main challenges. In section 2.3 we present the representation of human-robot collaborative activity which we use and its hierarchical decomposition. Finally, in sections 2.7.3 and 2.7.4, we introduce our concept and proposed set of metrics to evaluate the Quality of Interaction.

2.7.2 Related work

Inspired from the evaluation methods used in Human-Computer Interactions and User Experience fields, the field of Human-Robot Interaction (HRI) has elaborated its own methods to evaluate robotic systems when they interact with humans. There are various ways to evaluate a human-robot interaction from the human perspective. Bethel *et al.* [32] divided them into five categories: (1) self-assessments, (2) interviews, (3) behavioral measures, (4) psychophysiology measures, and (5) task performance metrics. They reviewed metrics used for each of the categories. They can be grouped into two types: (1) and (2) are subjective metrics and, (3), (4) and (5) are objective ones. Since our aim is to have a robot able to evaluate interactions by itself, human subjective metrics are not usable. Then we focused on the study of existing objective metrics meant to measure how the interaction goes. Steinfeld *et al.* [274] proposed a set of metrics to be used in a wide range of tasks whose goal is to assess the system performance by measuring the task effectiveness (*i.e.*, how well the task is completed) and the task efficiency (*i.e.*, the time required to complete a task). Their work is very thorough and inspiring but does not target the evaluation of the quality of an on-going interaction. Hoffman [127] defined a type of quality of interaction, the *fluency*, pointing out that the notion is not well defined and somewhat vague but can still be assessed and recognized when compared to non-fluent scenario. To measure it, they propose a list of objective metrics, only based on duration measures, designed to be quite general: robot idle time, human idle time, concurrent activity (*i.e.*, active time of both the robot and the human), functional delay (*i.e.*, time difference between the end of one agent’s task and the

beginning of the other agent’s task). It is an interesting way to measure the fluency and thus the quality of the human-robot interaction but it only applies to shared workspace tasks and is dedicated to an offline evaluation.

Systems targeting real-time measurements during human-robot interactions, with the purpose to “close the loop” and use the information for decision-making, have been developed. Tanevska *et al.* [278] proposed a framework allowing the robot to perceive with face detection and evaluate in real-time the affective state (*i.e.*, anger, happiness, sadness, surprise, etc) and the engagement state (*i.e.*, whether the person is interested or bored in the interaction) of the people it is interacting with. However, the human affective state measure might not be enough to assess an interaction or a task as an affective state is actually a facial expression which can be misinterpreted (*e.g.*, a smile can be a sign of happiness or embarrassment) and which might be not visible when one of the agent perform an action and looks somewhere else. Moreover, as the notion of engagement is very task specific, it needs further exploration. Real-time engagement measurement has also been investigated by Anzalone *et al.* [7] using metrics such as gaze, head pose, body pose and response times. Their work is interesting and could be an element among others to assess the interaction quality but, it is dedicated to face-to-face interactions.

Cameras are not the only sensor used to assess interactions on-the-fly, some use human physiological responses such as skin conductance and temperature, heart or brain signals. Itoh *et al.* [138], Bekele *et al.* [26] or Kulic *et al.* [168] use them to detect human affective states such as anxiety or liking in real-time. However, physiological measures often imply a lot of sensors which can be invasive for the human. And, as explained by Kulic and Croft [169], physiological signals may be difficult to interpret and there is a large variability in physiological response from person to person. Thus, it can be difficult for a controller to determine which emotional state the subject is in, or whether the response was caused by an action of the system, or by an external stimulus. Moreover, we claim that the human affective state only is not enough to assess the quality of an interaction, a human could be satisfied with an interaction or a task result even though they were stressed during it.

Finally, Bensch *et al.* [30] proposed a formal approach to compute interaction quality in real-time. Their work focused on how to combine metrics together which is in the same line as ours. However, they do not provide implementation examples, remaining at an abstract level.

In summary, while a substantial number of studies have been devoted to the evaluation of collaborative interactions for analysis purposes once the interaction is over, there is a lack of methods allowing the robot to evaluate in real-time the quality of the interaction based on multiple metrics and not only anxiety or engagement. We claim that such an ability is very important and should strongly influence the situation assessment as well as the decisional abilities of interactive and collaborative robots.

2.7.3 The Quality of Interaction (QoI)

We believe the real-time assessment of the Quality of Interaction (QoI) with a human partner (*i.e.*, what the robot “thinks” about how the interaction is going) is a new knowledge that could enhance the robot decision-making process. We define the Quality of Interaction as a measure that indicates how good is the interaction during human-robot collaborative activities. It is computed in real-time based on a set of metrics, at three different levels: the interaction session level, the tasks level and the actions level. The QoI of a given level is computed from selected metrics but also from the QoIs of the level below as shown in Fig. 2.11.

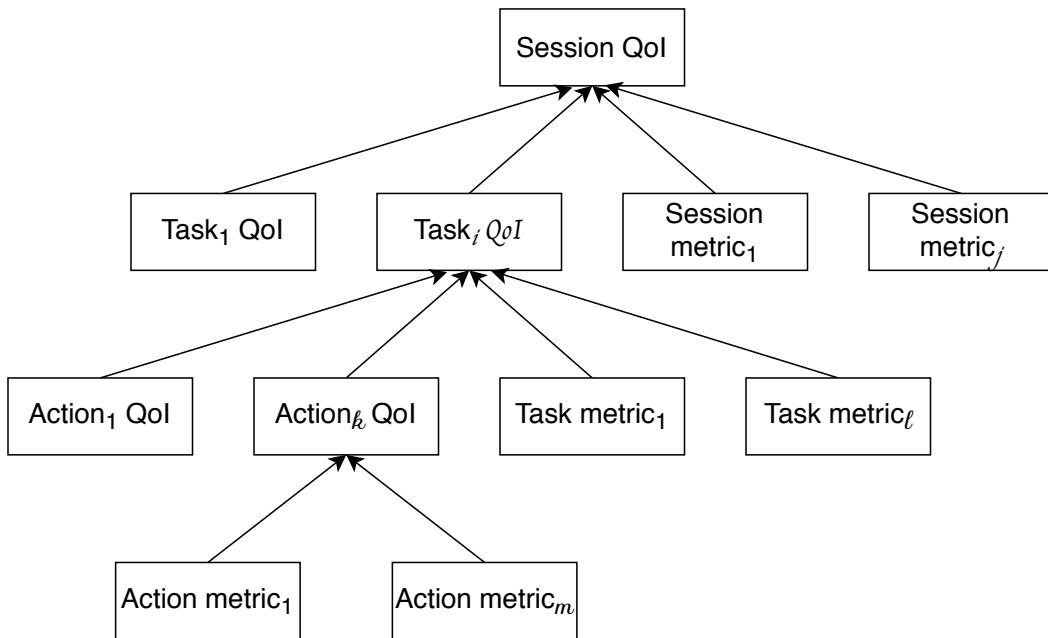


Figure 2.11: Representation of the QoI dependencies, with i the number of performed tasks during the interaction session, k the number of performed actions during the task i , j the number of metrics to measure the interaction session QoI, l the number of metrics to measure the task i QoI and m the number of metrics to measure the action k QoI.

The QoI of each level is computed as a score between [(1) for a good quality] and [(-1) for a poor one]. Metrics used to compute the QoI are divided in three categories:

- $M_p \in [0, 1]$ if it can only have a positive effect on the evaluation;
- $M_n \in [-1, 0]$ if a metric can only have a negative effect on the evaluation;
- $M \in [-1, 1]$ if a metric can have a positive or a negative effect.

Defined by the designer according to the needs and context, a metric can belong to one category or another depending on the target application. When needed, metrics values are scaled with the equations presented in Appendix B.

The evaluation of the Quality of Interaction at the level $l \in \{session_f, task_j, action_k\}$ (with f, j and k respectively the identifiers of a given interaction session, task and action), QoI_l , is computed with:

$$QoI_l = \frac{\sum_{i=0}^x W_i * M_i}{\sum_{i=0}^x W_i} + A * \frac{\sum_{i=0}^y Wn_i * Mn_i + \sum_{i=0}^z Wp_i * Mp_i}{\sum_{i=0}^y Wn_i + \sum_{i=0}^z Wp_i} \quad (2.1)$$

with W_i, Wp_i, Wn_i respectively the corresponding designer-set weights of M_i, Mp_i, Mn_i , A the designer-set weight of the right part of the $+$ sign and x, y, z respectively the number of the metrics M_i, Mp_i, Mn_i .

Equation 2.1 aggregates the values of the metrics chosen to be indicators of the interaction level quality. As all metrics do not have the same importance in the measure of the QoI, each of them is weighted. Values of these weights are empirically defined. There are two parts in the equation, the left part of the $+$ sign and the right part. The left part of the $+$ sign is a weighted mean of the third category of metrics, the M metrics. The right part is a weighted mean of the metrics seen as bonus (*i.e.*, Mp metrics) or penalty (*i.e.*, Mn metrics). This latter part is weighted with A – whose value is also empirically¹⁷ defined – to be able to adjust its influence on the left part. In such a way, if there are no Mn metrics to compensate for the Mp metrics, it is possible to limit the positive influence of the Mp metrics on the M metrics with A . It is the same if there are no Mp metrics, A can compensate the impact of the Mn metrics on the M metrics. Even though $M, Mp, Mn \in [-1, 1]$, the final result of QoI_l might be less than -1 or greater than 1 because of the addition of the M with the Mn and Mp . If it happens, QoI_l minimal value is set to -1 and its maximal value is set to 1 .

2.7.4 A set of metrics

In this section, we present a few measures to assess the QoI of an interaction session in Sect. 2.7.4.1. Then, we present metrics for the different levels based on engagement in Sect. 2.7.4.2 and effectiveness estimations during human-robot joint activities in Sect. 2.7.4.2. For example, if the human is engaged and if tasks are performed effectively, the QoI will tend to be high and *vice versa*. Both concepts are difficult to measure, so we do not exactly measure them but we compute their trends from the set of metrics presented in this section. This set is not exhaustive and will be extended in future work but it gave promising results as we show with our implementation in Chapter 3. All metrics are meant to be used for online evaluations of interactions. They are summarized in Table 2.2.

¹⁷Values are empirically defined given intuition regarding the importance of a given metrics for a given task and a set of testing experiments




	Metric names	Measures	Illustration	Session	Task	Action
Effectiveness	Distance-to-Goal	Geometric distance			x	x
	Time-to-Goal	Time			x	x
	Steps-to-Goal	Number of executed actions/subtasks			x	
	Deviation from standard duration	Time			x	x
Engagement	Fulfilling robot expectations about social interaction	e.g., attention ratio, with-me-ness,...		x	x	x
	Human contribution to the goal	e.g., number of repeated instructions, number of successful human actions,...			x	x

Table 2.2: The set of metrics presented in Section 2.7.4.

2.7.4.1 Measures to assess the QoI at the interaction session level

According to the context, the duration of an interaction session can be an indicator of the human engagement. Indeed, a human leaving only a few seconds after the beginning of the interaction is probably less engaged than a human staying with the robot several minutes. Also depending on the context, the number of executed tasks is a measure which can be considered as interesting information with respect to the engagement of the human, as well as the ratio of successful tasks. The more the human executes successful tasks with the robot, the higher the session QoI might be. Finally, it can be valuable to take into account how the session has been terminated in the evaluation of the quality of an interaction session. For instance, the fact that the human leaves abruptly in the middle of a task, during an idle time or a conversation without saying goodbye, or only at an appropriate time saying farewell to the robot is significant in terms of social interaction quality.

2.7.4.2 Metrics related to human engagement

Michael *et al.* [195] stated that commitments¹⁸ facilitates “the planning and co-ordination of joint actions involving multiple agents. Moreover, commitment also

¹⁸In the robotic domain, it is the word “engagement” and not “commitment” which is often used, unlike in the psychological and philosophical fields.

facilitates cooperation by making individuals willing to contribute to joint actions to which they would not be willing to contribute if they, and others, were not committed to doing so". As it is an important element of the joint action, we want to provide the robot with a way to estimate the engagement of its partner during an interaction.

Metrics allowing to state if an agent is engaged or not in an interaction are often specific to the type of interaction. For example, Fan *et al.* [90] implemented their measure of the human engagement as a kind of hysteresis: when the human gaze is on the robot, they are considered as engaged and when the human gaze is somewhere else during more than 3 consecutive seconds, they are considered as not-engaged.

In the same vein, we think that the measure of the engagement for a collaborative activity can be divided in 2 types of metrics, summed up in Table 2.2: the Human contribution to the goal and the Fulfilling robot expectations about social interaction.

We define in this section examples of metrics of each types which can be used to estimate the level of engagement of the human partner.

Human contribution to the goal A good and very promising indicator could be the ability from the robot to evaluate how well the human actions help to the goal progression. We call this indicator *Human contribution to the goal*. To the best of our knowledge, there is no general method to estimate it.

As a first version of the *Human contribution to the goal*, we chose to measure it through the number of times the robot has to repeat an instruction or a question before the human performs correctly, when it expects the human to answer or to perform the action. As, if it needs to repeat, it means that the human is not correctly contributing to the goal, intentionally or not, as they are not performing their part of the HR action as they should. The more the robot needs to repeat because of the human's bad performance, the less they are contributing to the goal, the more the action QoI should decrease.

Fulfilling robot expectations about social interaction During a social interaction, agents are expected to behave in a certain way and so the robot has expectations about the human. Then, the robot can monitor the human behavior to check if they are acting as they are expected to. For example, most of the time, when the robot speaks to the human, it will expect them to look at it and so it can monitor if it is the case or not as implemented by Fan *et al.* [90]. Quite similarly, Lemaignan *et al.* [179] developed a way to measure if the human is *with* the robot during their interaction, based on attention assessment, by computing if the human is looking at the desired attentional target or not. This latter metric will be integrated to our framework in future work.

As the works of Lemaignan *et al.* and Fan *et al.*, we estimate the *Fulfilling robot expectations about social interaction* with the human head orientation, in the

context of our implementation described in Chapter 3. We compute an attention ratio *i.e.*, the time during which the human is attentive to the robot (*i.e.*, staying close enough and looking at it) when it speaks compared to the total time of the speech:

$$Ar = \frac{duration_{isAttentiveTo(robot)=true}}{duration_{robot_speaks}} \quad (2.2)$$

Metrics related to effectiveness One can elaborate metrics to measure how well a task or an action is achieved. As discussed by Olsen and Goodrich [209], there are a variety of metrics such as time-based metrics which reward the speed of performance or the response times; error metrics which are based on counting retrials, failures, or mistakes; coverage metrics which measure to what extent a goal is achieved, as well as other possible metrics. We use some of them such as counting retrials, however these metrics alone were not enough for our example task as we are in a HRI context.

One can measure for different kinds of tasks, the ratio of successful¹⁹ executions to the total number of executions (*e.g.*, $R = \frac{Succ}{Exec}$) or the deviation from the initial plan (distance, cost, trajectory, etc.).

We define four metrics, summed up in Table 2.2, allowing to measure the current task and action effectiveness. Three of them are means to measure how the progress towards the goal of a task or an action varies. Indeed, they are good indicators for the interaction quality as, when executing a task or an action, if the agents are not getting closer from the goal or even diverged from it, it means that something goes wrong. There are three different metrics because the one to use depends on the type of task or action. The fourth metric allows to compare the current execution duration to the standard execution duration of the task or action, based on durations measured during previous executions.

Metrics to assess the progress towards the goal We defined three different metrics to assess the progress towards the goal. The first one allows to assess the progress towards the goal of geometric-based actions. The second estimates the progress by using the remaining time to reach the goal. Finally, the last one measures the number of remaining steps (actions or substasks) before achieving the goal of a task.

Distance-to-Goal When an agent is performing a geometric-based action such as a movement, observing if the agent is getting closer to the target position over time provides a useful information about how well the action is going.

¹⁹Obviously, the success is context and task dependent and should be defined according to the needs

Therefore, we introduce the *Distance-to-Goal* ΔDtG metric:

$$\left\{ \begin{array}{l} \Delta DtG(t = 0) = 0 \\ \Delta DtG(t) = \max(0, \Delta DtG(t - 1) - 1) \\ \quad \text{if } path_length(t) < path_length(t - 1) \\ \Delta DtG(t) = \Delta DtG(t - 1) + 1, \text{ otherwise.} \end{array} \right. \quad (2.3)$$

with $path_length(t)$ the length of the path leading the goal at time t (*e.g.*, which can be given by a reactive motion planner [155]). The metric lower bound is 0. If at time t the agent is closer to its final position than at $t - 1$, *i.e.*, progressing towards their goal, the metric is set to decrease or to remain equal to 0. Now, if the agent has not moved or is even further, the metric increases. The closer the metric value is to 0, the better it is, as it means the distance to the goal has decreased over time. We chose to not directly compute the difference between $path_length(t)$ and $path_length(t - 1)$ as the results would be very different whether it is an action implying a long path or a short path.

Time-to-Goal This measure is intended to estimate the progress of a given task or action towards its goal based on the estimation of the remaining time to reach it. It compares the current estimated time to goal with the initial estimated time to goal taking into account the current task duration. As so, it is possible to measure the variation compared to the initial plan. We define the *Time-to-Goal* ΔTtG as:


$$\Delta TtG(t) = \max(0, e(t) + TtG(t) - TtG(T_0)) \quad (2.4)$$

with $e(t) = t - T_0$ the task execution duration (time elapsed since the beginning of the task), $TtG(t)$ the current time to the goal, and $TtG(T_0)$ the initial planned time to goal. In our work, $TtG(t)$ and $TtG(T_0)$ are provided by a reactive motion planner [155] because we used the metric for navigation but it could be provided by other kind of planners.


Steps-to-Goal One way to estimate the remaining distance to the goal for a task is to count the number of remaining subtasks or actions (depending on the relevant scale) to perform. In addition, one can add a factor which estimates the weight (or effort needed) of each action or subtask. These weights can be determined by the designer, provided by the planner, etc. Then, the *Steps-to-Goal* \mathcal{D} of a task can be computed as time t :

$$\mathcal{D}(t) = \frac{\sum_{i=1}^c \mathcal{W}_i}{\sum_{i=1}^n \mathcal{W}_i} \quad (2.5)$$

with \mathcal{W}_i the weight of a subtask/action i , c the number of completed subtasks/actions and n the total number of planned subtasks/actions.

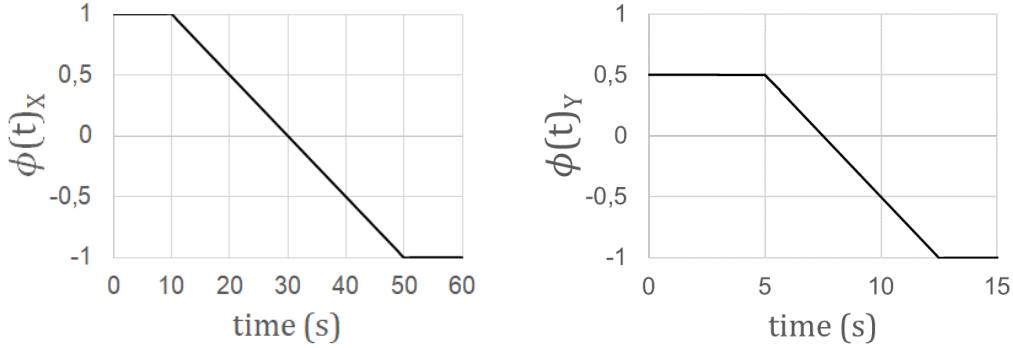

(a) Plot of $\phi(t)_X$ of the subtask X lasting 60 seconds, with $SD_X = 10\text{sec}$, $V_X = 0.5$ and $\alpha = 1$ (b) Plot of $\phi(t)_Y$ of the subtask Y lasting 15 seconds, with $SD_Y = 5\text{sec}$, $V_Y = 1$ and $\alpha = 0.5$

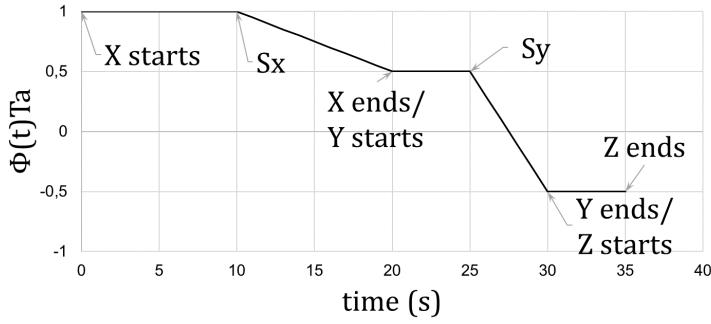

(c) Plot of $\Phi(t)_{Ta}$ for a task composed of a sequence of three subtasks X, Y, Z : the duration of X exceeded $SD_X = 10\text{s}$ and reached 20s, the duration of Y exceeded $SD_Y = 5\text{s}$ and reached 10s, finally the duration of Z was less than $SD_Z = 10\text{s}$

Figure 2.12: Examples of plots of the ϕ and Φ functions

Deviation from standard duration We introduce here a metric to measure the deviation from standard execution duration, the *Deviation from standard duration* ϕ for subtasks/actions and the *Deviation from standard duration* Φ for a whole task. This measure is intended to represent the degradation of the quality of execution of a HR task when its duration exceeds a certain time.

To each subtask/action a_i , we associate two attributes whose values are defined by the designer: a soft deadline SD_i and a decreasing quality speed V_i . If, at time t , the execution duration $e(t) = t - T_0$ of a subtask or action a_i which has started at T_0 exceeds SD_i , the quality will decrease over time at speed V_i :

$$\phi(t)_i = \max \left(V_i * \frac{-\max(e(t) - SD_i, 0)}{SD_i} + \alpha, -1 \right) \quad (2.6)$$

where α is the value initial value and the upper bound (as at $t = 0$, $\max(e(t) - SD_i, 0) = 0$) of ϕ_i , when the subtask/action a_i starts.

Then, we define a metric Φ for a task. It is an aggregation of the ϕ_i computed

for each performed subtask/action a_i of the task. At any moment, Φ can be seen as a memory of the previous steps, so the initial value α of a_i is equal to the final value of ϕ_{i-1} of the previous subtask/action a_{i-1} , $\alpha = \phi(T_{final})_{i-1}$.

We can notice that it is not possible for this metric to increase over time since it memorizes the values of the previous actions. However, the total computed QoI can get higher thanks to the other metrics. Moreover, ϕ can be used independently of Φ . In such a case, the initial of value α of ϕ can be set to 1.

Three examples are given in Fig. 2.12. Fig. 2.12a and 2.12b represent $\phi(t)_X$ and $\phi(t)_Y$ for two independent subtasks X and Y . Fig. 2.12c is a plot of $\Phi(t)_{Ta}$ for the task Ta composed of the subtasks X, Y, Z with $SD_X = 10s$, $V_X = 0.5$, $SD_Y = 5s$, $V_Y = 1$, $SD_Z = 10s$ and $V_Z = 1$.

CHAPTER 3

A direction-giving robot in a mall

Contents

3.1	Introduction	84
3.2	Related work	86
3.3	Rationale	87
3.4	Designing direction-giving behavior in a shopping mall	89
3.4.1	What we learnt from humans	89
3.4.2	Design of the collaborative task for a direction-giving robot	90
3.5	The deliberative architecture	92
3.5.1	Environment representation	93
3.5.2	Perceiving the partner	97
3.5.3	Managing the robot's resources	97
3.5.4	Describing the route to follow	98
3.5.5	Planning a shared visual perspective	100
3.5.6	Navigate close to human	102
3.5.7	Robot execution control and supervision in a joint action context	103
3.6	A robot in the wild	108
3.6.1	Pepper in Ideapark	108
3.6.2	The deliberative architecture embedded in a physical robot	109
3.7	Integration and test of the QoI Evaluator	114
3.7.1	QoI Evaluation at the task level	117
3.7.2	QoI Evaluation at the action level	118
3.7.3	Proof-of-Concept	120
3.7.4	Discussion on the results of the QoI Evaluator	124
3.8	User Study	125

This chapter is from an article submitted to the User Modeling and User Adapted Interaction (UMUAI) Journal. This work has been achieved in collaboration with Guillaume Sarthou, Guilhem Buisan, Phani-Teja Singamaneni, Yoan Sallami, Kathleen Belhassen, and Jules Waldhart. In this chapter, we first give an overview of the European H2020 Project MultiModal Mall Entertainment Robot

(MuMMER)¹. We then present the components developed by the LAAS-RIS team. My technical contributions are the Supervisor component, the component integration, the overall system debugging, the real-world deployment and the user study.

3.1 Introduction

In large scale indoor environments, like museums, shopping malls, or airports, the presence of large interactive screens, maps, or signs underline the importance of providing information on itineraries. However, orienting and reading maps to find one's own way may be challenging. As for signs, the wanted written information may not be within sight. People also look for information not available on visual media such as the location of a given product. That is where the robot has a role to play, bringing a new way to help people to get their bearings in large indoor environments such as shopping malls.

Therefore, in the context of the European H2020 Project MuMMER², we developed and deployed a social service robot in one of the largest malls of Finland, Ideapark in the city of Lempäälä. This social robot is able to engage, chat with people, and guide them. We will not talk about the two first mentioned behaviors, developed by our project partners, but focus in this paper on the direction-giving.

As the mall has approximately 1.2 kilometers of shopping and pedestrian streets and more than 150 shops, people get easily lost. In such a large environment, having a robot guiding customers to their wanted destination would be time-consuming for the robot and would prevent this resource to be available for as many customers as possible. Inspired by the manner in which the mall employees perform this activity, we chose the solution to have a robot not accompanying people to their desired destination but rather verbally describing the route while grounding it with pointing gestures. If necessary, it moves a few meters inside its dedicated area (Figure 3.13) to improve the perspective sharing with the human when pointing at a landmark, and therefore to improve the human understanding of the route. These features are unique to a robot and cannot be found on a map or an interactive screen. To endow the robot with such abilities, we built a complete implementation of a robotic architecture that has been deployed in a real-world environment, the Finnish mall. There, it ran for three months, three days a week.

All along the process, we elaborated and built the system based on the main principles and ingredients which have been identified and are investigated by the Human-Human Joint Action community. We also conducted preliminary studies and used the Joint Action perspective to analyze how human guides would achieve such an activity at the place where the robot was intended to be deployed. This was possible essentially because we were able to combine the results of the JointAction4HRI³ project with the MuMMER project.

¹<http://mummer-project.eu/>

²<http://mummer-project.eu/>

³It is a multi-disciplinary project which gathers philosophers, developmental psychologists and roboticists. <https://jointaction4hri.laas.fr/>

Our claim is that such an approach is relevant in the way the joint action principles provide pertinent guidelines and it is possible to effectively elaborate models and implement systems based on them. The output is a complete robot architecture that integrates a number of components implementing the main decisions and behaviors which have been identified. Each of them makes use of various models and decisional algorithms, all integrating explicitly human models and joint action principles and mechanisms.

The chapter is constructed as follows. In Section 3.2 we provide background information about robot guides and direction-giving task and discuss about how the human partner has been considered. In Section 3.3 we discuss how we model the direction-giving task as a human-robot joint action. We analyse the task based on human-human exploratory studies and decompose it into a succession of precise subtasks in Section 3.4. An overview of the resulting architecture and a description of its components are presented in Section 3.5. Then, we present in Section 3.6.2, the integration of the overall architecture into a physical robot and the steps until its final deployment “into the wild”. In Section 3.7, we show how we used this task to implement the QoI Evaluator presented in Chapter 2. Finally, we present the user study we performed with 35 participants and its results.

1. March 2018: beginning of the design and implementation of the direction-giving task
2. September 2018: First tests of the task on the field, *i.e.*, in a Finnish mall
3. June 2019 and September 2019: New tests of the direction-giving task on the field
4. From September to December 2019 (project formal end): The robot autonomously ran three days a week in the mall (with only remote monitoring of the robot performance by our team for debugging and tuning)
 - (a) November 2019: Integration in the *Supervisor* of a preliminary version of Quality of Interaction Evaluator implementing the model described in Chapter 2
 \implies version 1 of the QoI Evaluator
 - (b) From November 2019 to December 2019: Around 350 direction-giving tasks were performed with usual mall customers. Bug corrections and tuning of the direction-giving task. This allowed us to improve the QoI Evaluator thanks to: (i) data collection of task failures and standard durations of the subtasks executions (ii) lessons drawn about metric definitions and choices.
 \implies version 2 of the QoI Evaluator
5. January 2020: User study with 35 participants to compare three direction-giving task robot behaviors, allowing to log interactions at the same time we

could monitor them⁴. End of the project.

6. March 2020: Refinement of the QoI Evaluator, *i.e.*, improvement of the metric functions and tuning of their parameters. In the lab, with the same direction-giving task than the one used in the mall, comparison of the QoI computed by the robot when it is dealing with an “ideal” human, a “confused” human and a “non-compliant” human.
 ⇒ version 3 of the QoI Evaluator

3.2 Related work

A number of contributions have proposed robot guides, from the first museum guides [53, 282, 263, 73] to more recent robot guides in large areas [20, 289]. For example, [66] presented a guiding robot in a shopping mall where it accompanied the customer to the desired location and pointed at the shop. Another example is a shopping robot helping people to find products among the aisles of a store [114]. However, the focus in these contributions is mainly the fact that the robot is challenged to navigate until the goal destination with the presence of humans. Efficient mapping and localisation in large areas, social navigation are the main concerns. This is different from our needs where the robot is voluntarily constrained for its motion to a limited area with a focus on conveying to the human the pertinent information to reach by herself the desired place.

Direction-giving tasks have been investigated in the human-robot interaction community. [163] describes an embodied conversational agent giving route directions using deictic gestures. A number of key contributions have been developed over the years by ATR-IRC within the Robovie robot and project. First, [208] developed a model for a robot providing route directions, integrating utterances, gestures, and timing. The experiments explored the influence of gestures and highlighted the importance of timing in the directions-giving task. Then, [144, 145] implemented a guiding behavior as part of a wider system with the robot pointing toward the first direction to take and saying “please go that way” and then, continuing its explanation by saying “After that, you will see the shop on your right.”. Their robot also gave recommendations for restaurants and shops based on customer tastes. In their following work, [200] presented a route perspective model attempting to represent humans’ concept of route and visibility of landmarks, which they believed to match people’s perception of the environment. Then, [188] developed a robot able to follow a user while inferring their memory recall of shops in the visited route. When the user asked the location of other shops, it gave the route description with references to the known locations inferred with the model of the user’s memory recall. Finally, [244] showed a complete architecture of an information-providing robot able to move around a square in a mall composed of: a map, an ontology, a speech recognition system (operated), a dialog manager, a

⁴The QoI Evaluator was running in background, it was not the purpose of the study.

localization module, and a people tracker. As in their previous works, the robot verbalized utterances and used deictic gestures to give route directions.

Let us also mention [34], a robot providing verbal directions to people using deictic gestures coupled with spoken references. For example, the robot said “Go to the end of this hallway”, executing a pointing gesture at the same time, and then continued the explanation with sentences such as “Turn right and keep walking down the hallway”. [137] mentioned both guiding and direction providing as use cases of their system.

Numerous other contributions can be found but, only a few of them propose full architectures for an autonomous direction-providing robot, the most complete one being the Robovie robot presented above.

Still, to the best of our knowledge, no system tackles the overall guiding-task with flexibility. Indeed we claim that it is important for the robot to reason about the current and desired perspectives of the human and the robot and to be able to pro-actively propose to the human a pertinent placement. This is one of the basic bricks of our system and it is strongly linked to the key principles of Joint Action which involve the ability to establish and monitor joint attention, and to conduct a multi-step task achievement involving contributions of both agents. Besides, it is the duty of the robot to permanently adapt to human needs and preferences and to synthesize acceptable behaviours.

3.3 Rationale

We briefly summarize here the main issues involved in Joint Action which we exposed with more details in 1.

The design of our system has taken into account the results of several user studies involving human guides of the mall (see Section 3.4). Indeed, it could be of interest to have a robot performing in the same way as a human guide does. “If robots could display predictable behaviours that are in line with human’s expectations based on their models of human joint action, the resulting interaction would achieve greater naturalness” [79] and “human agents would then be able to apply predictive and adaptive processes acquired in human interactions to the interaction with robots” [79]. Here, we also take advantage of the fact that the robot is a humanoid and the human anthropomorphizes the robot behaviour (whatever we do). However, it is not always possible or desirable for a robot to imitate what a human would do at its place. It could let people think that the robot has more capabilities than it really has. In that way, besides the imitation, it could be desirable for the robot to exhibit its limitations, e.g. saying that it is able to provide you direction into the mall (and nothing else).

Participating agents in a joint action need to represent not only what they will do but also what will be performed by the others. Doing so, they also need to be able to consider the combined effects of their respective actions [212]. Joint action involves representations of the other agents who are actually and potentially

involved. Shared task representations provide control structures that allow agents to flexibly engage in joint action [161].

In our task, the robot has a role, it is a guide and the human is a customer with a need to find a direction. The joint action is not symmetric, there is a difference of knowledge and skills between the two agents. [79] raises the fact that “task asymmetry is an important factor to consider when investigating complex joint action settings because it drives the systemic emergence of communication and coordination dynamics (for example in the form of task distribution)”. At the supervision level (see Section 3.5.7), we modelled which part of the task falls to the robot and which part of the task falls to the human. We could also infer that knowing the robot role as guide, the human would be able to infer what it is entitled to do. This way, we could consider that they share the route description task representation. Another important point is that “shared task representations not only specify in advance the individual parts each agent is going to perform but they also govern monitoring and prediction processes that enable interpersonal coordination in real time.” [161]. Our system handles that monitoring and prediction in its supervision component(see Section 3.5.7).

Joint attention provides a mechanism to form shared perceptual representations of the situation. “The phenomenon of joint attention involves more than just two people attending to the same object or event. At least two additional conditions must be obtained. First, there must be some causal connection between the two subjects’ acts of attending (causal coordination). Second, each subject must be aware, in some sense, of the object as an object that is present to both; in other words, the fact that both are attending to the same object or event should be open or mutually manifest (mutual manifestness)” [212, p. 355].

As explained above, joint attention comes with two requirements: causal coordination and mutual manifestness. We can consider that the engagement in the interaction session represents the causal coordination. Then, at least on the robot side, we could argue for mutual manifestness. Indeed, as we will explain, we give the robot perspective-taking abilities, and abilities to find out where and how the human and itself should be placed to share a joint attention relative to a landmark. With those requirements fulfilled, “by attending jointly, co-actors establish perceptual common-ground and become aware of each other’s action opportunities and constraints” [79] (they also use the expression “spatio-temporal common ground”). Joint attention and in fact in our case, the overall interaction process by itself (aka its unfolding), could be seen as an continuous process sustaining under-construction common-ground.

In our system, the situation assessment component provides visuospatial perspective-taking. It computes, from the robot point of view, a number of facts regarding what the robot is looking at, which landmark is visible to it, what is present at its proximity, etc. It also computes the same information from the perspective of the person interacting with it. This way the robot is able to infer, based on its own models, which information is shared (or not) with the person it interacts with.



Figure 3.1: Picture from the second Human-Human study [27]. Here, the guide is giving the route description to reach a given shop by pointing at it. Positions regarding the target and the customer, as well as gazes and pointing gestures, were analyzed.

3.4 Designing direction-giving behavior in a shopping mall

3.4.1 What we learnt from humans

In order to inform the design and implementation of the pertinent functions and their articulation, two human-human exploratory studies were conducted in collaboration with VTT Technical Research Centre of Finland. It allowed us, in addition to the study of the existing literature, to enrich our knowledge on effective route descriptions and how they can be used in the very context of the actual robot deployment environment.

The first pilot study consisted in a human guide providing route information. It was carried out close to the future location of the robot in order to avoid biases linked to the location or the environment. Based on preliminary interviews with guides working at Ideapark, a list of 15 shops often requested by customers was selected. The preliminary experiment consisted of one participant asking for shop directions to a guide working at the mall information booth. Two researchers, as participants, and two guides took part in the experiment. The two guides were instructed to give guidance as they would normally do. The situations were video recorded and the guides were briefly interviewed after the sessions. The video analysis focused on non-verbal communication, and in particular the different types of gestures used to give guidance, the positions of the two protagonists in relation

to the target shop and their interlocutor, and the gazes alternation. [27] gave the first indications to consider for the robot guidance to be effective and understood by customers, resulting from this pilot study. For example, this pilot study allowed us to notice a preferential use of the ipsilateral hand to the visual field of the target. In line with the existing literature on gestures studies, we also noticed that deictic gestures were naturally more frequent than iconic gestures or beats, while metaphorical gestures were rare. As shown by [4], the hand used to point a referent was oriented vertically in the case of stores (vertical referents) or directed actions such as a path to take or turns, whereas in the case of horizontal referents (e.g. escalators), the hand was oriented horizontally (palm facing the ground).

A second exploratory study was then carried out adding complex situations (e.g. two customers requesting directions at the same time, two different shops in the same request, or someone who interrupts the conversation between the guide and the customer). Again, social signals were analyzed (see Figure 3.1 for an example). The protocol used and the results have been published [122, 123]. By analyzing the sequencing of the whole interaction, this second study showed the guide pointing the general location of the target first, before explaining and pointing the different stages of the path to take to get there. Then, the sequencing of the route description itself showed that a first deictic gesture on a visible passage (corridor, or if the shop requested is on the second floor, the escalator) preceded the explanations about the directions to take. The most interesting results concerned situations of confusion and misunderstandings. Indeed, several elements might be sources of confusion for the customer, such as using only one transmission channel (e.g. gesture without speech), the choice of landmarks which are not always appropriate, if there are several route descriptions in the same explanation, or when the distance is not specified.

3.4.2 Design of the collaborative task for a direction-giving robot

From the analysis of human-human direction-giving and through an iterative design process, we designed and implemented our directions providing robot. Our model of the collaborative task can be represented as a succession of subtasks, as shown in Figure 3.2. This figure also exhibits the incremental refinement of the task into a sequence of human-robot interactive actions. The aforementioned subtasks are:

1. **Establishing the shared goal:** In this first step, the human and the robot negotiate and establish a shared goal. Specifically, the robot tries to determine precisely the place – we called it the *target* – it should give directions for. This is immediately completed if the human directly asked for a known shop. Several verbal exchanges can be necessary in case the person asked for a kind of shop (e.g. restaurant) or a product or in case the robot has not properly understood the name of the place and needs to disambiguate.
2. **Route planning according to the human willingness and ability to climb stairs:** As the robot role is to help people, adapting to them, it needs

3.4. DESIGNING DIRECTION-GIVING BEHAVIOR IN A SHOPPING MALL91

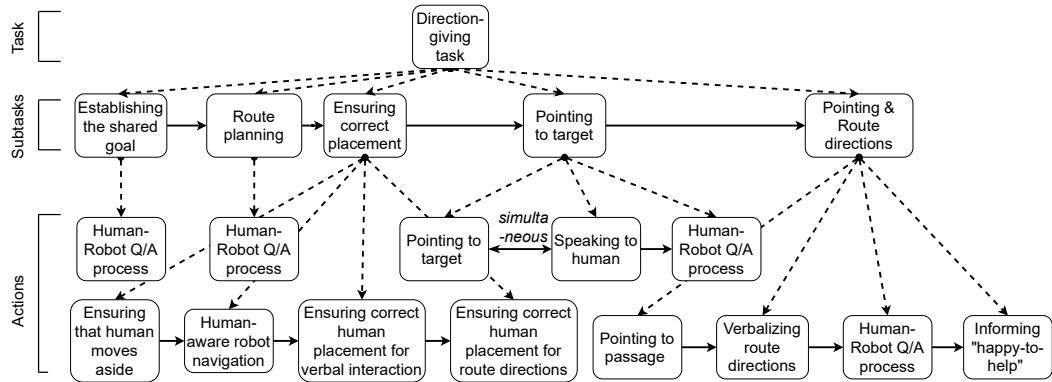


Figure 3.2: The representation of the direction-giving task as a hierarchical task network with task, subtasks and actions levels. All the horizontal arrows are sequential links and the rest are decomposition ones.

to ensure that they have the abilities to follow the route it will indicate to them. So, first the robot computes the best route to the target and then checks the presence of stairs in it. In case there are, the robot enquires whether the human can or want to climb them or not. If they cannot or do not want to, the robot computes a new route without any stairs. The planned route contains a first *passage* (*i.e.*, a corridor, a door or an escalator) which the robot will try to point.

3. Ensuring correct placement: The second human-human study, mentioned in Section 3.4.1, highlighted the fact that human guides point to a visible *passage* before giving the route directions. Thus, we endowed the robot with this ability as described further in the item 5 of this list. In order to be in good conditions while performing this item 5, that is to say to ease the human understanding of the directions, the robot seeks better positions for the human and itself. It does so by computing a position for the human, considering their visual perspective of the passage. The robot computes a new position for itself as well, to form a triangle whose vertices are the planned robot position, the planned human position and the passage, as shown in Figure 3.1 and Figure 3.3. After having computed these positions, the robot moves, and as they both are engaged in the task, expects the human to join it once its position is reached; it calls them if they do not. As the human might not be at the exact position computed for them, the robot checks their visibility of the passage. In case their visibility is too low, the robot will adjust their position thanks to verbal instructions (*i.e.*, come closer, move back). Figure 3.3 illustrates the initial and final positions of both agents, in a lab context.

4. Pointing to target: Following the sequencing obtained from the aforementioned human-human study, the robot first points in the target direction, along with a brief sentence. As the robot is a helper and it is involved in a

joint action with the human, it needs to ensure that its actions produce their expected results. In this case, if the robot computed that the target should be visible from their position, it checks that the human has seen it, either by monitoring their perspective or by asking. In case of a negative answer, it will point again.


5. **Pointing to passage and giving route directions:** Still following the sequencing from the study, when the target is not in the same physical space as them, meaning that there is a passage on the way to the target, the robot points to this passage and then verbalizes the route directions. These directions take into account the orientation the human will have and describe the route (e.g., take the corridor on the left side). Finally, the way they are built (*i.e.*, the order of the steps, the keywords to use...) is also based on the human-human study. Here again, the robot ensures that the route directions have been understood by asking the person about it or if the passage has been seen if there is one. In case of a negative answer, it will point and give the route directions again. Finally, the robot ends the task with a “happy-to-help” short sentence.

To endow a robot with the abilities described above, to build a robotic architecture embedding all these aspects, is a challenge. We tackled it with the architecture presented in the next section.


3.5 The deliberative architecture

In this section, we present the robotic architecture developed to handle the direction-giving task. This architecture relates to Beliefs, Desires, Intentions (BDI) architectures. As explained by [302], such a kind of architecture is primarily focused on practical reasoning, meaning the process of deciding step by step which action to perform to reach a goal.

The figure 3.4 represents the architecture, its components, and their interconnections. Communication between components relies on ROS. In this chapter, we only present the components developed by the LAAS-RIS team, represented by the colored blocks on the architecture. First, we present the two knowledge representations in the form of geometric and semantic representations. Next, we introduce the components related to the sensorimotor layer. It is the situation assessment and the physical resource manager. Then, we present the components related to the deliberative layer. They are the Human-Aware Navigation, the SVP (Shared Visual Perspective) planner, the Route Handler, and among the key components, we finish with the supervision and control system, designed to operate human-robot joint tasks in a joint action context.

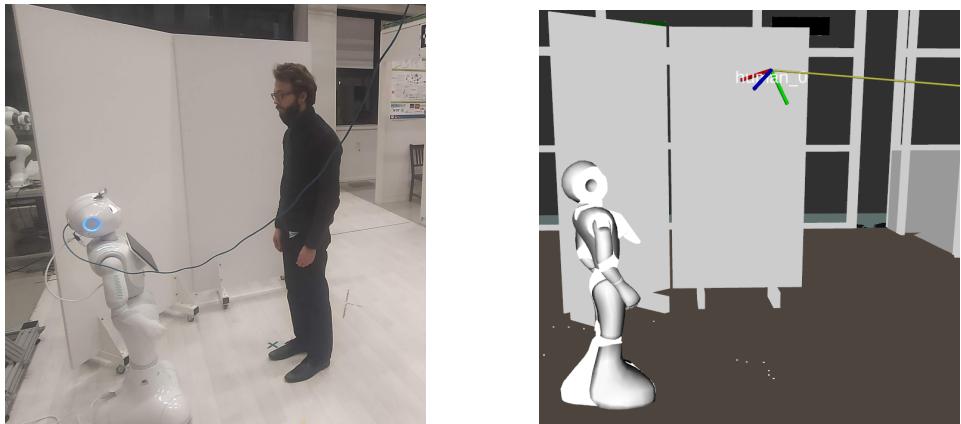

(a) Initial positions of the human and the robot. The human asked the robot for route directions to a target behind him.

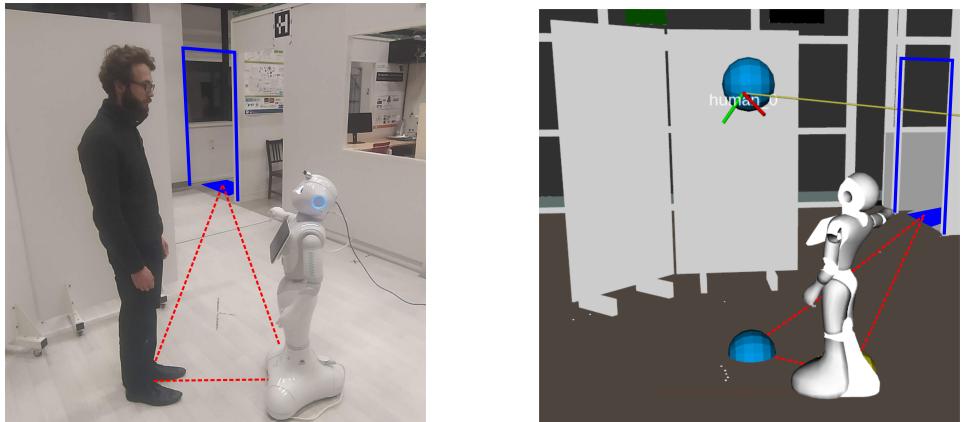

(b) The robot and the human are in their final positions. The blue spheres are the computed position for the human by the robot. The robot is pointing to the passage (in blue frame). We can observe the triangle formed between the human, the robot and the passage (the blue area on the floor) as in Figure 3.1 where two humans are in a triangle formation.

Figure 3.3: Initial and final positions of a direction-giving task in the lab context. On the left are pictures and on the right screenshots of Rviz⁵(a 3D visualization tool for ROS.)

3.5.1 Environment representation

For a service robot providing directions to people, we need information to understand humans' need, information to compute the route to the goal, and information to compute the visibility of both agents to plan the pointing position. To understand the needs of a human wanted to be guided, we need information about the type of stores and the sold items. To provide so, [243, 244] used an ontology. To compute the route to the final destination, [188] or [208] used a topological map. Each node of the graph is related to a 2D position of the environment. To estimate the human visibility of elements anywhere in the environment, [188] used a simpli-

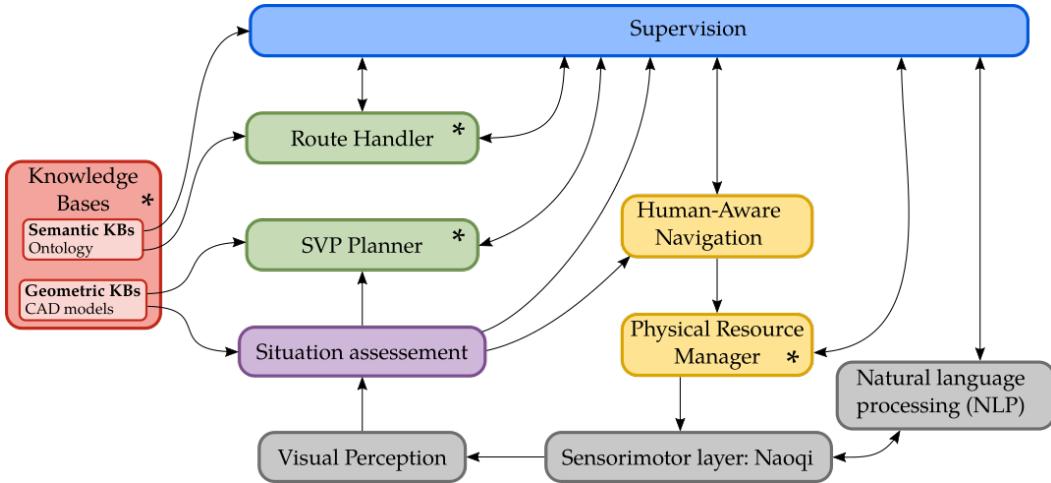



Figure 3.4: The general architecture developed for the robot guide. The components presented in this chapter are the colored blocks. The red components with the symbol * are the ones on which I participate. The visual perception and dialogue components have been respectively developed by IDIAP and HWU and are described by [97]. Naoqi is a Softbank Robotics software.

fied 3D model where shops are represented by 3D polygons. In our implementation, we only used two types of representation of the environment: a **geometric** and a **semantic**.


Since the final deployment of the robot was in a Finland mall, we have built an mockup mall in our lab for development purposes. By mockup, we mean that shops signs have been displayed in the laboratory to create configuration similar to the real mall. The representations describe hereafter have thus been created both for the real mall and the mockup one.

3.5.1.1 Geometric representation

The geometric representation is used to compute the visibility of elements of the environment from different positions needed for the pointing of landmarks. However, because the robot does not accompany the person to the final destination and therefore does not move much, the possible visibility of the two agents is limited to their immediate environment. For this reason and due to the large scale of the Finland mall, we chose to geometrically describe only the subpart of the global environment that could be visible from the interaction area. For the rest of the environment, we represented the shops with 3D points only. These points are enough to point in the right direction. The resulting geometrical representation is a three-dimensional mesh model, as shown in figure 3.5a for the mockup mall and in figure 3.5b for the real one. We have represented in the 3D model all the elements that could hinder visibility, such as poles or panels. In this way, we can precisely emulate human visibility. The model was created from the architectural plans first and then refined with measurements in the mall.

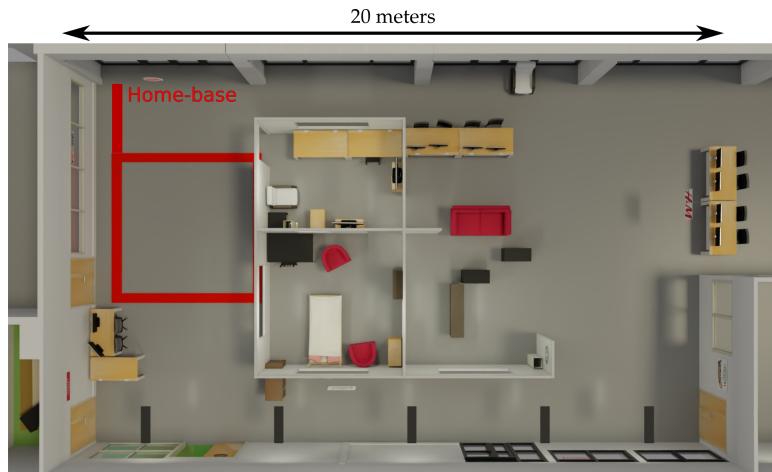

(a) The 3D mesh model of the mockup mall at laboratory. The red square represent the interaction area as a square of 4 meters per 4 meters. Signs representing the shops have been place all around the environment.

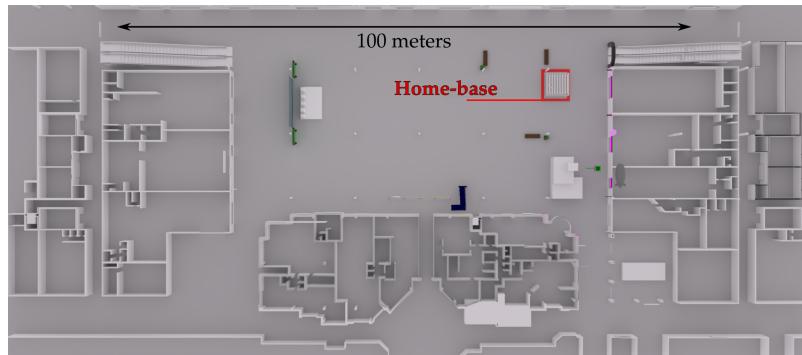

(b) The 3D mesh model of the real mall in Finland. The entire mall having a size of 528.6 meters per 247.5 meters on two levels, we have only modelled the part which can be visible from the interaction area. It results in a model of 150 meters per 69 meters.

Figure 3.5: We have built a mockup of the Finnish mall environment in our lab in order to be able to test and debug the direction-giving task in our lab. This environment comprises a two-level area with corridors, “shops”, passages, stairs, open central space and consequently allowed us to run realistic guiding scenarios.

In order for the pointing planner to compute the visibility of the landmarks used for the route description, stairs, escalators, elevators, and store signs are represented each by a single mesh while the rest of the building is a unique 3D mesh. This means that a store is said to be visible if we can see its sign, which we think to be the most relevant element to see to recognize a shop.

The 3D model is also used to generate a navigation map, constraining the robot to move in the interaction area while avoiding obstacles in it.

3.5.1.2 Semantic representation

As [243], our semantic representation is based on ontology. An ontology allows to define classes representing general concepts (e.g. Restaurant), individuals/entities being classes instantiations (e.g. Burger_King), and properties linking two entities (e.g. Burger_King isIn Ideapark). To provide storage and an efficient way to manipulate the ontology and reason about it, a lightweight software has been developed, called Ontologenius, presented by [241]. It makes it possible to share the semantic knowledge among all the components of the architecture, here especially the route handler and the supervision, thus enabling a unique repository of knowledge.

The ontology is first used to represent information about the stores. It allows to define and refine the shared goal of the task by understanding the client's wanted destination. Thus, the stores' types, their names, and the items they sell have been represented in it with a rich semantic. It allows for example to represent that both soda and hamburgers are sold in fast-foods, which are types of restaurants, but that soda can also be found in a supermarket. Thanks to Ontologenius, the names of concepts are defined in different languages and with synonyms for these names. It allows the robot to adapt itself to the human partner language. Moreover, Ontologenius endows the robot with the ability to recognize a set of names in natural language but that it will be prevented to use (e.g. the robot can understand a reference to "bank" when a human says it but only refers to it as "ATM" or "cash machine" since there was no bank office in the mall). In addition, this software offers a fuzzy match service based on Levenshtein distance, to help the supervision system to handle ambiguities coming from the speech to text component (e.g. it can match the word "Juwelsport" with "Juvesport"). This set of functionalities around the concepts' names facilitates the understanding of the partner's need and thus helps at increasing the quality of interaction.

In an effort to unify representations because representing as a 3D mesh the entire mall would be a complex task, we chose not to use the geometrical representation or a topological map to compute the route to the final goal but rather the semantic representation given by the ontology.

To include topological information into the semantic representation, the Semantic Spatial Representation (SSR) has been designed, presented by [242]. With the SSR, the overall knowledge is represented in an ontology with three upper classes which are: **region** (*i.e.*, a two-dimensional area that is a subset of the overall environment), **path** (*i.e.*, a one-dimensional element along which it is possible to move and which has a direction) and **place** (*i.e.*, a point of zero dimension that can represent a physical or symbolic element). The **place** class has three subclasses: **path intersection** (*i.e.*, the connection between only two paths and thus a waypoint to go from one path to another), **passage** (*i.e.*, the connection between only two regions and thus a waypoint to move from one region to another like a door, a staircase or a passage), and **shops**. A representation of these classes is visible in Figure 3.6.

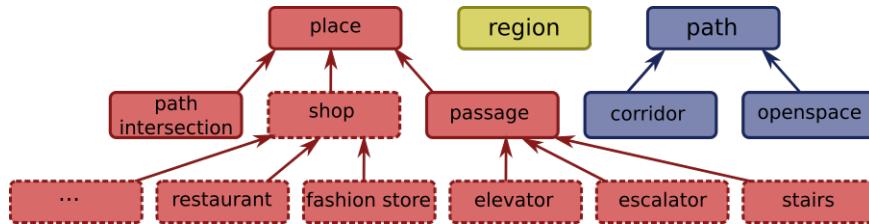


Figure 3.6: Classes for a representation of the topology of an indoor environment in a semantic description. The classes with the solid outline are the minimum classes defined by the SSR. The classes with the dotted outline are an extension of this minimal set.

An example of the final semantic knowledge represented in the ontology for a given shop is presented in Figure 3.7. We find here the identifier of the shop, the category to which each store belongs (e.g. restaurant or hairdresser), the items sold for which people ask the most (e.g. shoes or coat), and the names and synonyms in natural language and that for different languages. Moreover, thanks to the SSR we can produce the best route (in term of complexity) as well as verbalize it using a route perspective.

Concept name	H_and_M
Shop type	rdf:type :Women_clothes_store ;
Shop location (SSR)	:hasAtLeft :Gf_ww2_os1_intersection ; :isAtRightOfPath :Gf_walkway_2 ; :isAlong :Os_exp_1 ;
Items sold	:sells :Shirt ; :sells :T-shirt ; :sells :Tunic ; :sells :Blouse ; :sells :Jean ; :sells :Short ; :sells :Jacket ;
Natural language names	rdf:label "H and M" @ en ; rdf:label "Hennes Mauritz" @fi .

Figure 3.7: Properties for a representation of the topology of an indoor environment in a semantic description.

3.5.2 Perceiving the partner

The situation assessment component is based on the Underworld framework [180]. It aims at gathering perception information in the form of 3D position and orientation of human faces, with the 3D model and the robot state. With this information, it is able to generate the symbolics facts listed in table 3.1.

3.5.3 Managing the robot's resources

A humanoid robot such as Pepper can be seen as a composition of multiple physical components that can act independently of each other. For the pointing task, we

Predicate	Description
isPerceiving	The robot is perceiving a human
isCloseTo	The human is within a distance of 0 to 1 meter of the robot
isLookingAt	The human is looking at the robot
isInArea	The human is in the interaction area
isEngagingWith	The human is close to the robot and is looking at it

Table 3.1: Facts computed and monitored during the direction-giving task.

identified four resources: the head, both arms, and the base. At the beginning of the interaction, for example, the head is used to find people to interact with, but later it will be used to track the human with the gaze. Several components could access this resource to perform these actions. However, they do not have a global picture of the ongoing task. In this case, a resource could be used by several components at the time. Consequently, it could lead to task failures.

Moreover, in some cases, several resources have to be used simultaneously to perform a high-level action. To point to a landmark, one arm is selected to point while the other has to be lowered. The base is then rotated if the arm reaches the joint limit to point a target on its back. If at least one of the involved resources is simultaneously used to perform another action, the overall high-level action will fail as the global posture will no more be clear. For example, if the human gets too close to the robot and a component tries to move away from a little, the arm would no more point in the right direction.

Thus, the correct handling of all the resources is critical for performing the task, but it can be cumbersome for a deliberative component, such as the Supervision, to do all the micro-management required. To tackle this issue, a physical resource management system has been designed by Guillaume Sarthou and Guilhem Buisan. For each of the identified resources is instantiated a component called **Resource Manager**, having two types of input: permanent commands that can be preempted at any time (e.g. look at the head of the human interacting with it) and finite state machines which are not preemptable (e.g. set of commands to point). A component called **Resource Synchronizer** deals with actions requiring multiple resources such as the human-aware navigation which uses the head and the base. The synchronizer also reports the status of the ongoing coordination signal to the Supervisor to monitor the progress of the action. Finally, a priority scheme has been implemented to handle multiple active inputs at the same time for one resource.

The global resource management scheme is illustrated in Figure 3.8 with four resource managers and one synchronizer.

3.5.4 Describing the route to follow

In large-scale environments such as malls, route computation can lead to combinatorial explosion. Therefore, to simplify the problem we chose to divide it in two stages and to conceive an algorithm for each one. The first one computes the exist-

ing routes from one Region of the mall to another. A region is for example a floor of the building so if the robot is at the ground floor and the final destination also, this means that the algorithm will not take into account all the elements of the other floors. Then, the second algorithm uses the Region-to-Region routes to calculate the Place-to-Place route. These algorithms are presented with more details in [242].

Region-to-Region route In the SSR, **passages** (e.g. escalators, stairs) are elements of the environment connecting two regions through the *isIn* property. With this property and a breadth-first search algorithm, Region-to-Region route finding algorithm is able to find the routes connecting two regions using only passages. It outputs a route with the format *region – place – region – ... – region*. In the example of Figure 3.9, the final routes found by the algorithm to go from Region 1 to Region 3 are:

- *region_1 – passage_1 – region_2 – passage_2 – region_3*
- *region_1 – passage_1 – region_2 – passage_3 – region_3*

Place-to-Place route The Place-to-Place route search is based on the Region-level search results. It decomposes each route into sub-routes of the form *place – region – place*. In our example, the division gives five unique sub-routes:

- *start – region1 – passage_1*
- *passage_1 – region_2 – passage_2*

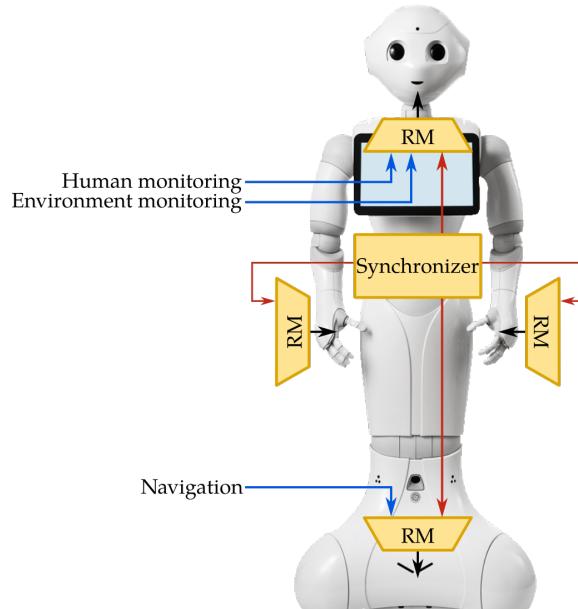


Figure 3.8: Representation of the resource management system with four resource managers and a synchronizer. The red arrows represent the state machines inputs and the blue arrows represent the inputs for permanent commands.

- *passage_2 – region_3 – end*
- *passage_1 – region_2 – passage_3*
- *passage_3 – region_3 – end*

Then, the algorithm aims to replace each sub-route region with a succession of paths and intersections. It works on the same principle as the previous search algorithm using the *isAlong* property instead of the *isIn* property. Still taking the same example and focusing on *region_1*, it can solve the sub-route *start – region_1 – passage_1*. *Region_1* is represented with its corridors and intersections in Figure 3.10. By applying the breadth-first search algorithm at the Place level, a solution of the form *place – path – place – ... – place* is obtained. So for our example, *start – corridor_1 – intersection_1 – corridor_5 – passage_1* is a solution for the first sub-route. By doing the same for each sub-route, we can then recompose the global routes and give a detailed set of routes from start to end.

The second place of the route – the third element of the route objects – is the one we call the passage in the description of the direction-giving task, the first salient landmark of the route to point to, which is on the way to reach the final place, *i.e.*, *intersection_1* in the example.

3.5.5 Planning a shared visual perspective

When the robot has to point to a target, two criteria have to be respected. First, the human has to be able to see the target. Second, the human has to be able to look at the pointed target and at the robot without turning the head too much. It goes the same for the robot as it has to see the pointed target, meaning not to point toward a wall and be able to simultaneously point at the target and look at the human. Consequently, to point a target in its back, it has to move. The robot and the human can thus move in the interaction area during the direction-giving task, to move to a better position for pointing at the target. To find the robot and human possible positions we designed a component called the SVP (Shared Visual Perspective) Planner, presented in [295]. For the purpose of the deployment, the presented version is an adapted and slightly simplified version.

To compute the visibility of both agents, the planner has access to the geometrical representation of the environment and the agents current positions. In addition,

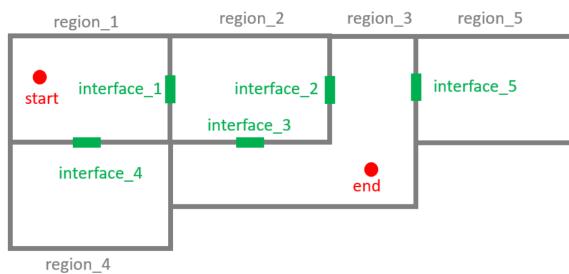


Figure 3.9: Representation of an environment at the regional level.

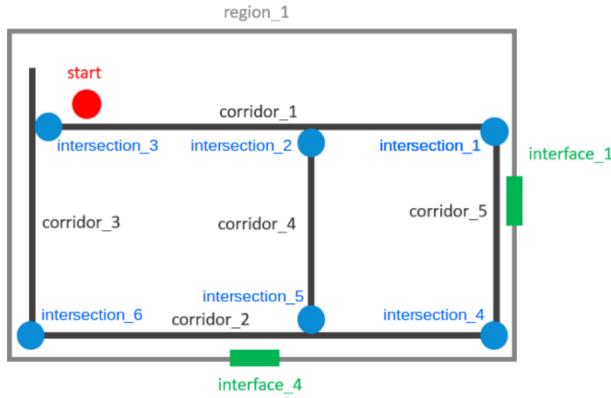


Figure 3.10: Representation of corridors and intersections in region_1

it considers an estimated agent's maximal speed to move and a visibility threshold.

When the robot explains the route to the human and points to a landmark, they form what is called an F-formation. Kendon explains that “*An F-formation arises whenever two or more people sustain a spatial and orientational relationship in which the space between them is one to which they have equal, direct and exclusive access*” [149]. This F-formation has been decomposed in [192] into two types: the social formation and the instrumental formation. While the first type corresponds to the original definition, the instrumental formation includes a physical object that all the agents can gaze at. This means that once the robot will have moved, the human will come in front of it creating a social formation in the form of a vis-a-vis (each facing the other) and when the robot will point they will change for an instrumental formation. Indeed, when both agents will reach their position computed by the planner, we want them to be able to go from one formation to the other with only a rotation; the human will not need to move again from their arriving position to see what the robot will point.

To search for better positions to reach in order to point a landmark, the planner takes three main parameters into account:

- Visibility constraint: The two agents can see either the target shop when it is the only element of the route or the passage.
- Navigation distance cost: The agents do not have to move too much.
- F-formation cost: The human-robot-target angle and a robot-human-target have to be less than 90°.

To compute the positions, the interaction area is firstly decomposed into a weighted three-dimensional (x, y for the possible positions in the area and z for the human height) grid representing the estimated human visibility of the target. The target visibility is computed offline for each position of the grid. It is based on the part that the target takes in the 360° field of view of the environment. Such grid is represented in figure 3.11 for a given human height. The white cells are

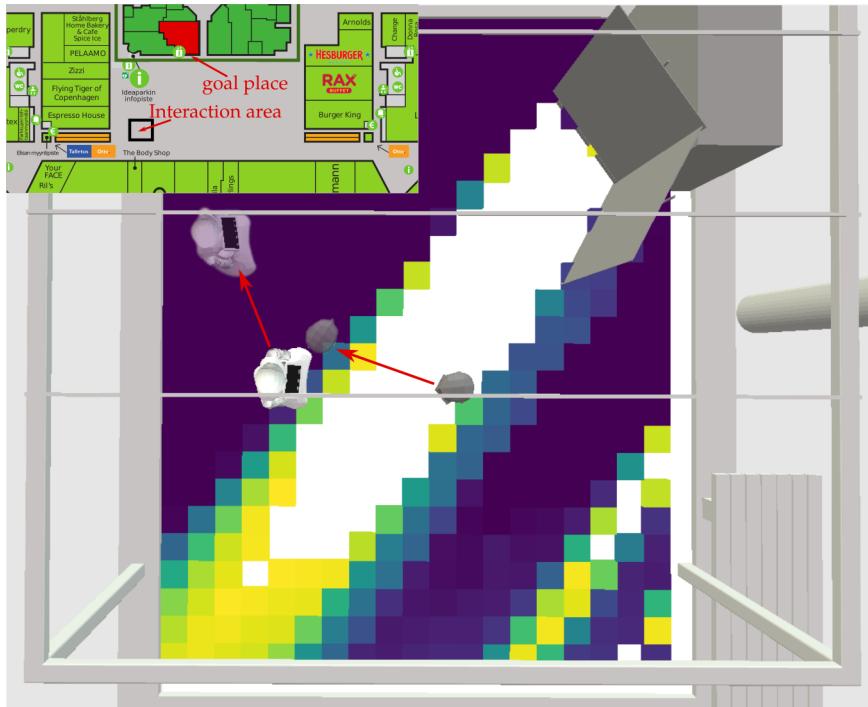


Figure 3.11: Visibility grid for a target located at the top right. The uncoloured areas represent an absence of visibility and the others represent the cost of visibility ranging from yellow for low visibility to purple for good visibility. The robot and the human in transparency on the image represent the final calculated positions while the others are the initial positions.

positions from which the human cannot see the pointed target. The other colored cells represent the degree of visibility from the poor in yellow to the good in purple. Having the human visibility grid, the goal position is computed using a weighted cost function between good visibility and restricted distance to cross. In the example of figure 3.11, the transparent human head is the human goal position while the other is the initial position. From the initial position, the human was not able to the pointed target.

The robot position is computed in a second time, according to the human planned position. Divided the search into two steps allows reducing the search complexity. The robot position is thus constrained by the human one. It has also to respect a minimal and maximal distance to the human and minimal visibility of the target from it. Finally, the robot position is also determined regarding a cost preferring an F-formation limiting the robot reorientation, meaning that it can point to the target keeping its torso and its chest oriented towards the human.

3.5.6 Navigate close to human

The Human-Aware Navigation component aims at moving the robot while avoiding dynamic and static obstacles in addition to proposing a socially acceptable naviga-

tion solution for the robot. For example, the robot should not pass too close to the human and should not show its back while navigating around the human. A full presentation of the planner is available in [266].

3.5.7 Robot execution control and supervision in a joint action context

subsubsectionA supervision and control system dedicated to human-robot joint tasks A service robot interacting with humans in a mall and providing directions to them needs a number of abilities to enable a smooth and efficient interaction. As explained in Section 3.3, the direction giving task is an asymmetric joint action, with the robot in the guide role and the human in the guided role. The *Supervisor*, the supervision and control system of the robot, is built taking this specificity into account, embedding a shared representation of the direction giving task. More specifically, when giving directions to a human, the robot plans its actions and the human ones and then execute its part of the plan. To be able to know if and when the human performs their actions, it monitors the action executions and interpret the information received from the Situation Assessment (see Section 3.5.2). Furthermore, in such interaction, communication is important, thus the robot communicates verbally as well as non-verbally, and listens to the human. All along the interaction, it needs to maintain a distinct mental state model for the human and itself concerning the knowledge of both agents and the state of the world. Finally, it should be able to tackle events and contingencies happening during the task and to drop it when necessary.

A *direction-giving task* occurs when the human involved in the ongoing interaction session asks for directions to a place or for locations of sold items.

[voir lien avec chapter 1](#)

[voir lien avec chapter 1](#)

3.5.7.1 Implementation of the direction-giving task and its associated actions

The Supervisor can be seen as a puppet master. It manages the robot's decisions of when to act, what to say, and what to do during the task. It decides, executes, and supervises the proceedings of the execution as well as the human actions, using and coordinating all the other components of the architecture at its disposal.

The Supervisor is implemented using Jason, so it can manipulate beliefs and reactive plans (written offline by the developer rather than planned during the interaction). For the interaction session and the direction-giving task, at execution time, plans are chosen among the ones from the plan library when triggered by an event or by another plan. The same plan can have multiple versions and the version to be executed is selected according to the pre-conditions (also called context). For instance, the plan *verbalization(Target)* has two different versions, one in the case where the target to point is visible and the other one in the case where it is not, and at execution time, the selected one will depend on the presence or not of the

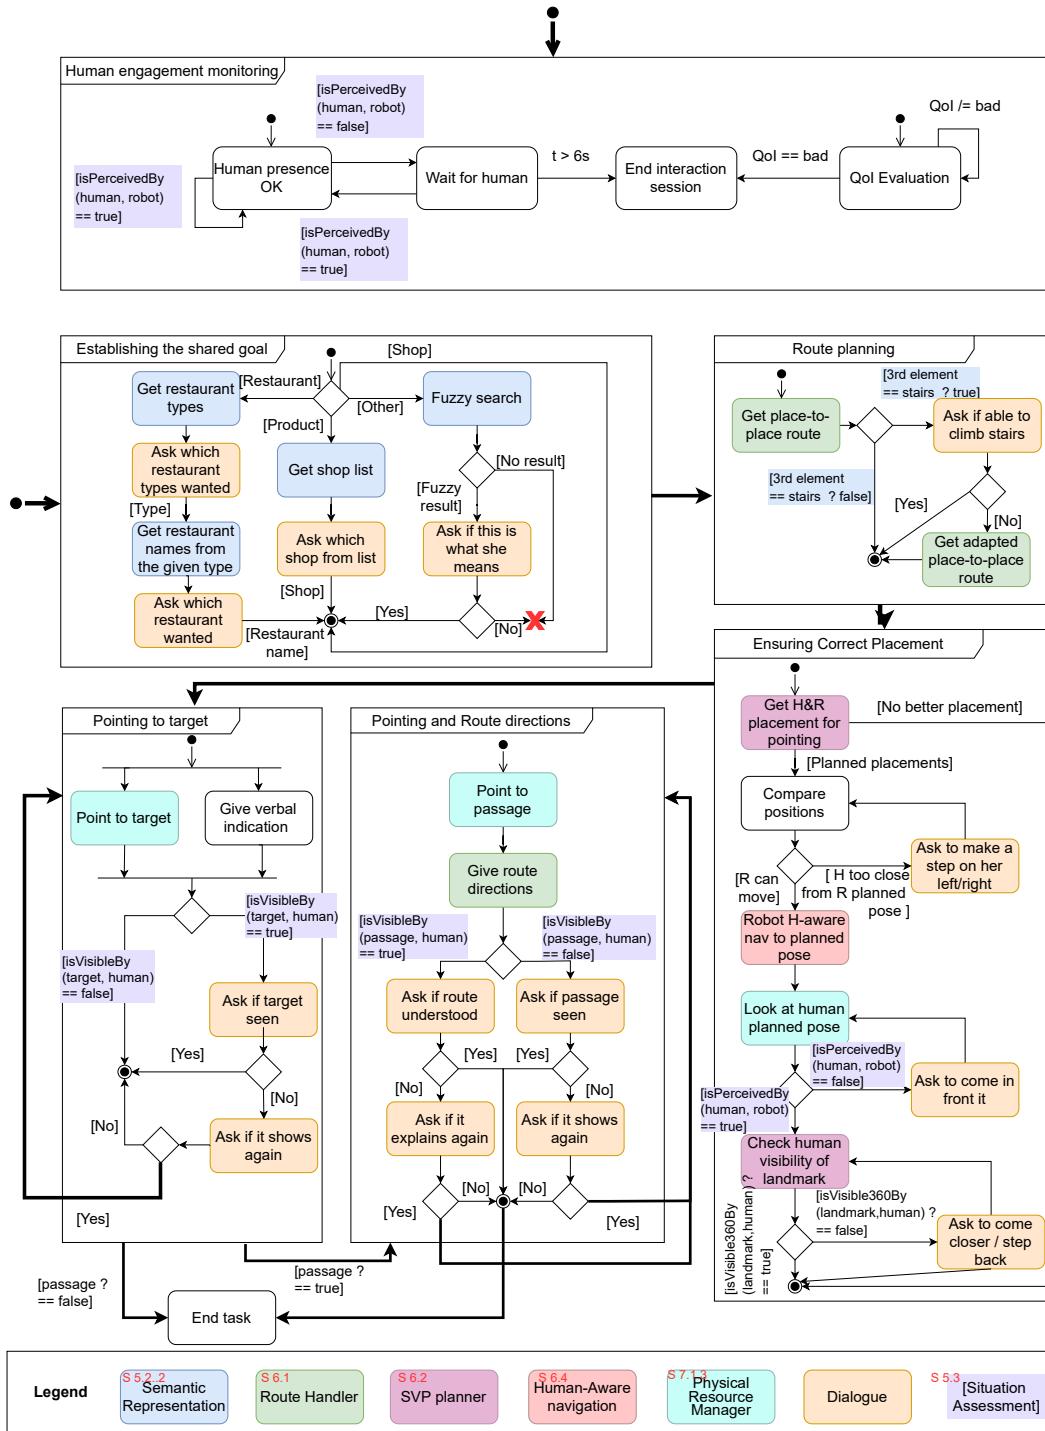


Figure 3.12: Supervisor activity diagram of the direction-giving task. Each action has a color corresponding to the component with which the Supervisor interacts to execute it. It goes through every subtasks described in Section 3.5.7.1. Also, the human engagement monitoring is represented. Texts between brackets correspond to beliefs on which depends the decision-making process. These beliefs can either be provided by other components or being the result of the Supervisor's own computations.

belief `visible_target(Target)` in the Supervisor belief base, as shown in Listing 3.1:

```
+! verbalization(Target)                      // plan name
: visible_target(Target)                     // context
<- ?verba_name(Target, Name);      // belief query
say(visible_target(Name)).           // action

+! verbalization(Target)
: not visible_target(Target)
<- ?verba_name(Target, Name);
say(not_visible_target(Name)).
```

Listing 3.1: Two different plans for `verbalization(Target)`

Even though the direction-giving task is implemented with reactive plans, it can still be represented with an activity diagram, for presentation purposes. This activity diagram is visible in Figure 3.12. Each frame represents one of the steps described in Section 3.4.2. We now present their internal functioning and the interactions with the multiple components of the system the Supervisor has.

Establishing the shared goal When a person triggers a direction-giving task, they might directly ask something like “where is the pharmacy?” which allows the robot to directly establish the shared goal but, they might also ask something less precise. In the latter case, the robot needs to inquire about the human desired place to reach in order to establish the shared goal.

reminder def

When a person asks “Where is a good restaurant?”, the robot presents a list of the types of food available, namely “There are casual dining restaurants, Asian restaurants, native food restaurants, hamburger restaurants, fast food restaurants, and pizzerias.”. This behavior is quite similar to the recommendation behaviors of [144].

To be able to display this behavior, several components of the system are requested. When the Supervisor receives $\{request = restaurant\}$ as data from the Dialogue, it asks Ontogenius (see Section 3.5.1.2) for all the existing restaurant types. This list of restaurant types is sent to the Dialogue whose role is to return to the Supervisor with the type selected by the human. Finally, similarly to the way it obtained the restaurant type from the human, the Supervisor tries to get the restaurant name. Therefore, it requests from Ontogenius all the restaurants serving the given type of food. Then, this list is sent to the Dialogue whose role is to return to the Supervisor with the restaurant selected by the human among the elements’ list. It should be noted that all the restaurants of the given type are suggested to the person, even though sometimes the list is long. We thought of alternatives such as randomly giving three restaurants among the ones of the list. However, these alternatives were not allowed by the mall policy as they could not provide equality between all shops.

The same principle goes for products. For example, people can ask “Where can I buy a dress?”. Then, the Supervisor gets from Ontogenius a list of shops selling dresses and passes it to the Dialogue. The Dialogue returns the name of the shop chosen by the person.

When the Supervisor receives as a goal a name it does not understand, it queries Ontogenius to try to match it to a known name as it may be not understood because of a speech recognition failure or a shortened name. For instance, thanks to the fuzzy match provided by Ontogenius, when a person asks to go to “jewelsport”, the system can make the assumption that the person actually asked for “Juvesport”. So the robot asks the person, “do you mean Juvesport?”, to which the person can answer “yes” or “no”. If yes, it starts the direction-giving task, if no it drops it and returns in chat mode.

Enquiry about human willingness and abilities to climb stairs As the robot is there to help humans, it has to adapt to their abilities and preferences such as a person with a shopping trolley will prefer to take escalators than stairs. The preferences definition is currently done through verbal communication.

To determine human preferences about stairs, the Supervisor first requests to the Route Handler (see Section 3.5.4) the possible routes to go to the target shop. The returned routes are of the form *place-path-place-...-place*. The Supervisor selects the one with the smallest cost and then checks if one of the *place* elements is stairs (*i.e.*, the Supervisor queries Ontogenius for the element type). If it is the case, the Supervisor asks the Dialogue with finding out if the human is able to climb stairs or not. If not, it will send a new request to the Route Handler with the parameter “no stairs” and will get a new set of routes. The Supervisor selects the one with the smallest cost. This new route will have a cost equal to or higher than the first one (since it was not the route with the smallest cost in the initial request), which means the goal might be more complicated to reach or it might take more time.

Ensuring a correct placement The robot’s role in this task is not only to give verbal route directions but also to point to the target and the passage (*i.e.*, the third element of the route as explained Section 3.5.4) the person should take in order to increase the chances that they reach their destination as it helps to orientate them in space. For the pointing to be as efficient as possible, the robot computes new positions for itself and the human where the visibility of the pointed landmarks will be better (when feasible). Then its goal is to have itself and the human reaching these new positions.

In the first step of this subtask, the Supervisor requests from the Shared Visual Perspective (SVP) Planner (see Section 3.5.5) the new positions for the robot and the human, with the passage to point (or the target if no passage) and the human identifier as parameters. Then, the Supervisor compares the newly received positions with the current ones of the human and the robot – the current position of

the human is provided by the Situation Assessment. In the case where the robot planned position is very close to the human’s current position (< 0.5 m), the robot asks the human to step aside on the right or left, depending on the human’s planned position. If the human does not move or does not go far enough from the planned robot position, the robot will ask again.

Then, the Supervisor requests the Human-Aware Navigation (see Section 3.5.6) to move the robot to its planned position. Once the Human-Aware Navigation returned that the position has been reached, the Supervisor looks for the human. It is a form of monitoring, which we show in Section 3.3 is important in a joint action. If the human is not perceived – the Supervisor did not receive from the Situation Assessment the predicate $\text{isPerceiving}(\text{robot}, \text{human}_i)$ – in the following seconds (6 seconds in the deployed version), the robot asks the human to come in front of it – this is the way we have chosen after several trials (other modalities like indicating to the human by a gesture where they should stand were not sufficiently successful). If the human is still not perceived after a few seconds, the robot will ask again, remaining engaged in their joint action for a while before giving up.

Once the human arrives in the robot field of view – which means that the human more or less reached their planned position since the robot is looking in the direction of it –, they might not exactly be at their planned position. In this case, their position may not be suited to properly see what the robot has to point at. To check if they are in a position good enough to see, the Supervisor asks the SVP Planner for the visibility (at 360 degrees) of the landmark to point. In the case where the SVP Planner returns that the landmark is visible, the interaction continues. Else, the robot asks the human to move forward or backward in order to adjust their placement according to their planned position. This stops when the robot computes that the position of the human will allow them to see the target. In this way, the robot tries to ensure to put the human in the best conditions as possible for the next steps, using key elements of the joint action: monitoring of the partner actions’, sharing a visual perspective and showing engagement in the task.

Pointing to target As it is shown that the use of deictic gestures such as pointing improves the understanding of route directions (see Section 3.4.1), we endowed the robot with this ability.

To do so, the Supervisor requests from the Physical Resource Manager that the robot points to the target. At the same time, it generates a short sentence for the robot to say and sends it to the Dialogue. The sentence varies according to the visibility of the target such as “Here, you can see Burger King” for a visible place and “The restroom is in this direction” for a non-visible one. In this way, the robot shares the human’s perspective and takes into account the knowledge they can get from their environment in respect of the joint action principles. In this way, the human knows if they have to try to notice it from their place or take this information as an orientation indication. In order to continuously look at the human and not loose them from its sight, the robot does not turn its head towards the target when

pointing.

It is important for the robot to know if it successfully communicated the information to the human. Then, it asks if the target has been seen, as it wants to ensure its action had the expected effect.

Pointing to passage and giving route directions This step is executed when there is a passage in the route returned by the Route Handler. Therefore, the Supervisor sends a route to the Route Handler which returns a verbalization of this route (e.g. “Walk through that corridor, and then, turn left. From there on, ApteeKKI will be on your right, straight after Glitter”). Then, as explained in the *Pointing to target* paragraph, the robot points, to the passage this time. And, at the same time, it verbalizes the route received from the Route Handler, added “in this direction” to the sentence if the passage is not visible.

As for ensuring the target has been seen, the robot wants to make sure it has been understood and leaves the possibility to the human to hear the route directions again if they need it. In the early versions, we had programmed the robot to ask if the passage had been seen and then if the route had been understood but it was too many questions that seemed useless to users. Indeed, we analyzed it as a postcompletion error [55], as the goal of the human was to know the route to their location, whatever actions arising after this goal has been completed are often forgotten. In the end, the first question is asked in case of a visible passage and the second one is asked in case of a non-visible one.

It may be noted in Figure 3.12 that it is possible to go in infinite loops such as Route directions - Ensuring route understood - Route directions - To avoid this issue, the Supervisor prevents to return inside a step if it has already been executed a certain number of times (in the final version, 3 was the maximal number a step could be executed).

3.6 A robot in the wild

3.6.1 Pepper in Ideapark

For availability for as many customers as possible, the robot was contained in a defined place in the mall as shown in figure 3.13. A home base was designed with the participation of all the project partners. It was a 4 per 4 meters area with a 2.5m high frame structure on it. The home base included a non-reflecting carpet on the floor and an acoustic ceiling surface on the roof.

During the first deployment in the real mall, we have updated both the Geometric Representation with actual measurements and the Semantic Spatial Representation (SSR) by making sure the regions, interfaces, corridors and intersections were represented reflecting the actual mall topology. To ensure the correctness of the instructions given by the route handler, we generated routes from the deployment location to several shops in the mall and followed them to the destination. Inaccuracies, as well as algorithmic flaws, have been fixed using this method. We



Figure 3.13: The pepper robot in its interaction area in the Finalnd mall, Ideapark.

also tested the interaction in the Finnish language with our native Finnish partners and corrected some mistakes in the route verbalization.

3.6.2 The deliberative architecture embedded in a physical robot

In the previous section, we presented a deliberative architecture designed to be embedded in a service robot. The purpose of this robot was to be deployed in a mall in Finland. To make this deployment successful, we did extensive tests in our laboratory where we had reproduced a part of the mall environment to be in the most realistic conditions possible⁶. Some of these emulated shop are visible in Fig. 3.14. In Sect. 3.6.2.1, we introduce the environment setup as well as the robot one. Then, in Sect. 3.6.2.2 and Sect. 3.6.2.3, we present our tests and deployment in the Finnish mall.

3.6.2.1 Environment and robot setup in the Finnish mall

Our architecture has been tested and deployed in a mall in Finland. As we explained previously, it has two abilities: chat with people and guide them, but in this paper we consider only the latter. The robot was able to interact in English and Finnish, though due to the vast linguistic differences between the two languages, the two versions have been kept separated, and the whole interaction can either be in one or the other.

Hardware architecture The robot is an upgraded, custom version of the Pepper platform [57], which is equipped with an Intel D435 camera and an NVIDIA Jetson TX2 in addition to the traditional sensors that are found on the previous versions of the robot. We used the Robot Operating System (ROS) to enable inter-process

⁶This setup not only was used for tests but also for public demos and even in the context of a scientific live event now accessible on <https://youtu.be/p4f3iwHht2Q?t=4495>



(a) A person being guided, the emulated shop “Zizzi” is visible in the background of the picture.



(b) A person being guided, the emulated shop “H&M” is visible.



(c) Two people simulated going to shop. The emulated shop “Burger King” is visible in the background and a small part of “Thai Papaya” is visible in the foreground.



(d) A person being guided, a sign towards the toilet and the shop “Marco Polo” are visible on the left of the picture.

Figure 3.14: Examples of emulated shops of the Finnish mall in our lab.

communication between the processing nodes. All the streams (audio, video, robot states) are sent to a remote laptop which performs all the computation. The laptop has an NVIDIA RTX 2080 graphics card (for the visual perception system) and 12 CPU cores. The 4 microphone streams are processed at a frequency of 16000 Hz, and the full perception system delivers the output at 10 fps.

3.6.2.2 Pre-deployment in the Finnish mall, in-situ tests

Three integration sessions, each lasting one week have been made on site, in September 2018, June 2019 and September 2019, in the mall in Finland. The whole LAAS developer team were part of these integration weeks, along with our project partners. So, I spent around 150 hours (3 times 5 days) in the mall for software integration debugging with the other developers, and testing and debugging of the direction-giving task. During the integration weeks, only expert users (developers) interacted with the robot for testing purpose.

To have a working system in the lab and to have a working system in a real-world site are two different things. As much as a team prepare for an in-situ deployment, there will always be elements that will need to be tuned on site and unexpected bugs arising. Thus, I had to handle a lot of contingencies, diagnosing where the issue came from, repairing if it was originating from my software, communicating with the person responsible for the component having a bug if it was not from mine, and testing again.

The first step to perform for us once on site was to update both the Geometric Representation (see Sect. 3.5.1) which was previously based on architectural plans and refined with actual measurements and the Semantic Spatial Representation (see Sect. 3.5.1) by making sure the regions, interfaces, corridors and intersections were represented reflecting the actual mall topology.

Finally, to ensure the correctness of the instructions given by the route handler, we generated routes from the deployment location to random shops in the mall, and followed them to the destination. SSR inaccuracies as well as algorithmic flaws have been fixed using this method. We also tested the interaction in Finnish language with our native Finnish partners and corrected some mistakes in the route verbalization.

Component integration problematic Even though components were integrated together before getting on site, code modifications as mentioned above and intense testing can make new issues appear. So, it was essential to test the integration between all the components after this.

Finally, once everything was running quite nicely, some time has been dedicated to fine-tune the direction-giving task, ensuring all the components could withstand running for several hours in a row, with naive users possibly interrupting the task at any stage.

3.6.2.3 “In the wild” deployment

The robot was then installed for a long-term 14 weeks deployment from September 2019 to December 2019. During this period, the robot interacted with everyday clients of the mall, who may never had the chance to interact with a robot before. The robot was active for 3 hours per day, three days a week. As it was a project with multiple partners, it was not always possible to have our direction-giving task running. The direction giving task has been available on the robot 32 days out of the 42. The days during which it was not running, the partners’ software executing on the robot where the visual perception and the dialogue that we mentioned previously, and a social signal processing feature [96].

Nowadays, having an autonomous robot in the wild is a challenge. At first glance, we could think that if the robot is able to run smoothly for a few hours, the challenge would be met. However, there are a lot of other elements to take into account. First, how to guarantee the safety of children and elderly? How to ensure that the robot will not fall on or bump into them despite the robot sensors, hurting them? Furthermore, not only people safety is important but making sure that the robot is not damaged by people as well. People might indeed be brutal towards the robot, on purpose or not.

To tackle the “obvious” issue, making sure that the robot continuously running, it was remotely watched by an on-call developer of the project team. At the beginning of the time slot, they launched all the software on the robot. Then, they checked through component monitoring, time to time, if everything was running properly, and they were in contact with the robot guard who told them if she noticed something wrong with the robot. They also had access to a video feed of the robot home-base if needed. Thus, all along this long-term deployment, we adjusted parameters and fixed bugs, with the help of the on-site team VTT and the robot guard that tested the direction-giving task when we asked her. The bugs we encountered concerned mainly Finnish translation issues (e.g. “just after Arnold’s” was translated “paikan päälle Arnolds” in Finnish but the correct way to say it in Finnish was “paikan Arnolds jälkeen” thus we changed the English sentence into “right after the place Arnolds” to be able to get this translation), shop names issues (e.g. Finnish people use the utterance “Hennes Mauritz” and not “H&M” which was the name in the robot ontology originally) and route issues (e.g. a route has one more turn than it should have).

The project consortium tackled the two safety issues (people safety and robot safety) by hiring a “robot guard” and by putting a sign notifying parents to not leave their children alone with the robot. During the robot active hours, this guard employee was physically present to ensure people were respectful towards the robot, *i.e.*, not hitting it or pulling it, to watch the kids who may get too close to the robot when it could have moved so they would not risk to be hurt, and to answer people who wanted to know more about the robot or the project than what was explained on the explanatory posters. She was also responsible for starting and shutting down the robot at the beginning and at the end of the half-day. Besides, for security and

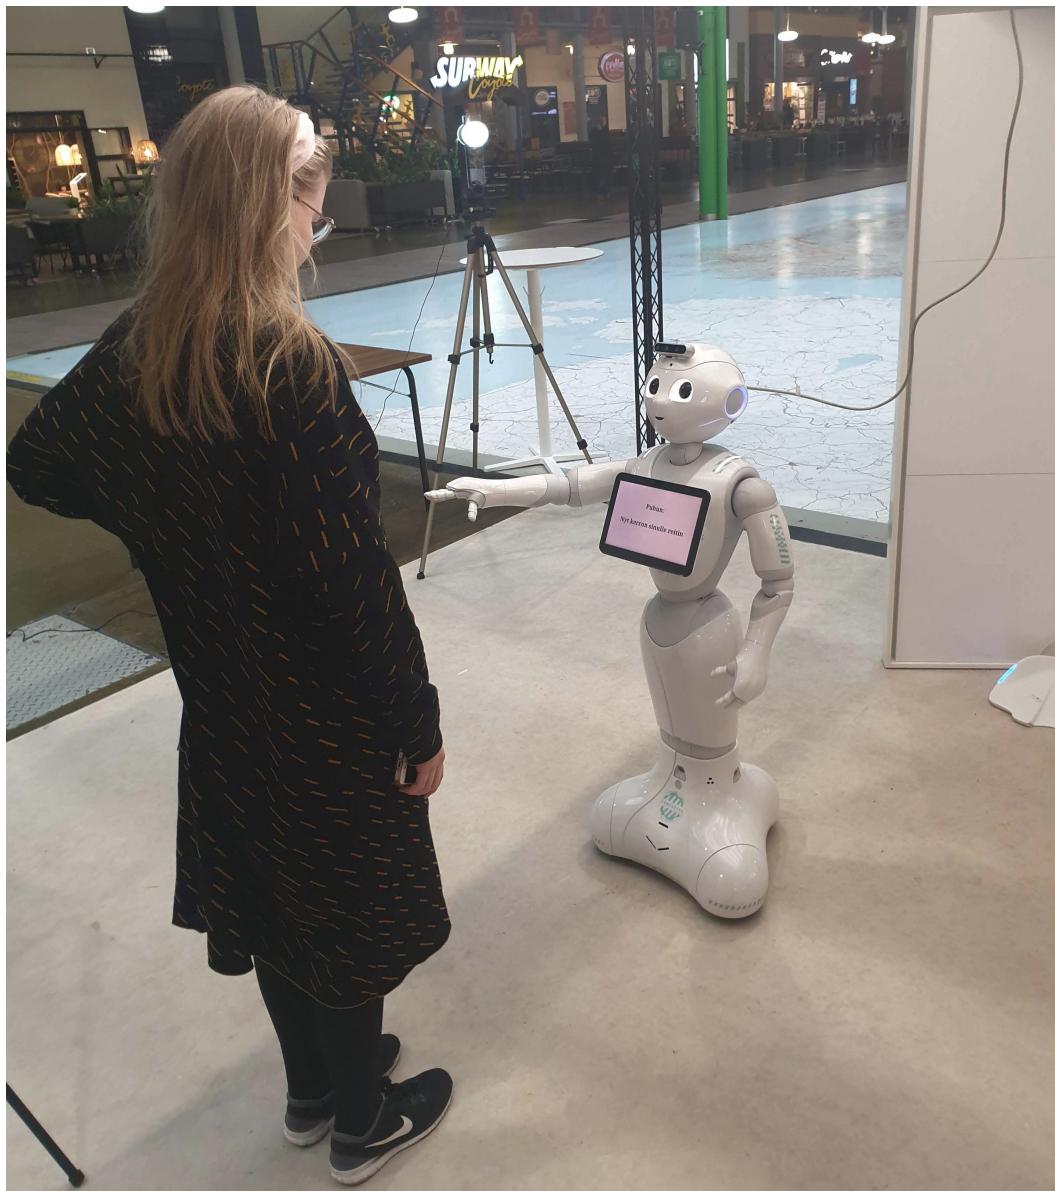


Figure 3.15: A person receiving directions from Pepper. (Image from VTT team)

legal responsibility reasons, we chose to not have the robot navigating during this deployment as it would have been a complicated issue if the robot bumped into someone, especially a kid who could be hurt. It would have been possible if Pepper had a remote emergency stop which could have been given to the guard. Therefore, the step *Ensuring correct placement* was removed in this context. Then, the Human-Aware Navigation component (see Sect. 3.5.6) was disabled and the Shared Visual Perspective Planner (see Sect. 3.5.5) was only used to compute the 360 degrees visibility of a landmark from the person position.

In total, the robot ran the direction-giving task during approximately 96 hours “in the wild”. Out of these 96 hours, it was interacting with someone during 45 hours. Table 3.2 summarizes statistical data about the interaction sessions and Table 3.3 summarizes statistical data about the direction-giving tasks.

Description	Value
Number of occurred interaction sessions between a human and the robot	979
Cumulative duration of the interaction sessions	2720 min
Minimal duration of an interaction session	0.1 min
Maximal duration of an interaction session	41 min
Average duration of an interaction session	2.8 min
Standard deviation of sessions duration	3.3 min
Average number of direction-giving tasks during a session	1.1
Percentage of sessions terminated by goodbyes	30%
Percentage of sessions terminated by the participant not perceived by the robot anymore	70%

Table 3.2: Statistics on interaction sessions in the wild

3.7 Integration and test of the QoI Evaluator

As a proof-of-concept for the QoI Evaluator presented in Section 2.7 of the Chapter 2, we integrated it in the direction-giving task described in this chapter.

More specifically, this implementation of the Quality of Interaction Evaluator measured the interaction quality at the direction-giving task level and at the elementary actions level, omitting the interaction session level as this latter was not our focus in the MuMMER project. The QoI Evaluator was integrated into JAHRVIS presented in Chapter 2. The QoI Evaluator is implemented into a Jason function (the reasoning cycle) which is invoked periodically. After multiple testings, we reached the conclusion that it was pertinent, at least in the context of the direction-giving task, to have the Evaluator computing the QoI every second for both levels. Therefore, every second, the system computes the value of each metric and then outputs a value for QoI_{task} and QoI_{action} .

Description	Value
Number of occurred direction-giving tasks between a human and the robot	1156
Cumulative duration of the direction-giving tasks	930 min
Minimal duration of a direction-giving task	0.01 min
Maximal duration of a direction-giving task	22 min
Average duration of a direction-giving task	0.8 min
Standard deviation of direction-giving tasks duration	1.27 min
Success rate of the step <i>Establishing the shared goal</i>	63%
Success rate of the step <i>Route planning according to the human willingness and ability to climb stairs</i>	100%
Success rate of the step <i>Pointing to target</i>	56%
Success rate of the step <i>Ensuring target seen</i>	39%
Success rate of the step <i>Pointing to passage and giving route directions</i>	94 %
Success rate of the step <i>Ensuring passage seen or route understood</i>	92%
Success rate of the removed step <i>Check if indications understood</i>	19%


Table 3.3: Statistics on the direction-giving task in the wild. *Ensuring target seen* is a part of the step *Pointing to target* as described in Sect. 3.4.2. Likewise, *Ensuring passage seen or route understood* is a part of the step *Pointing to passage and giving route directions*. The success rate of a step is the number of times the given step has been achieved over the number of times it was planned (e.g. *Route directions and pointing* is not planned if there is no passage to point), all direction-giving tasks combined. Steps were not achieved sometimes because of robot failures but most of the time it was because the human was leaving during the task. As mentioned in Section 3.5.7.1, we did not keep the step *Check if indications understood* all along the deployment because, as shown by the success rate, people were leaving before answering this question. Then, as this step was considered as superfluous by users, we merged it with the one before, *Ensuring passage seen*.



(a) A customer listening to Pepper after re-positioning



(b) A customer listening and Pepper pointing to a corridor

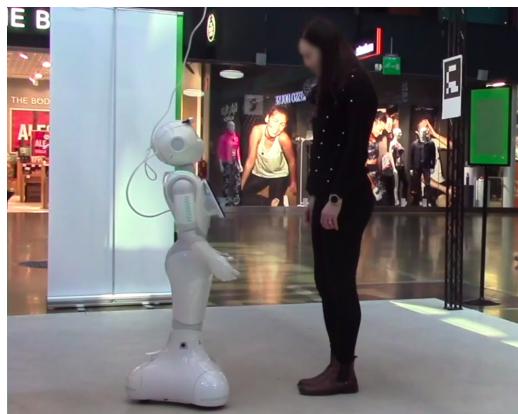

(c) A customer answering to Pepper



(d) A customer listening and Pepper pointing to a shop

Figure 3.16: MuMMER robot engaged in direction-giving tasks. Around 350 trials with customers in the mall allowed us to gather empirical data to select the metrics and tune the measuring functions parameters.

As mentioned in the step 4b of the chronicle, the robot interacted in the wild with dozens of usual customers (Fig. 3.16), executing around 350 direction-giving tasks. This allowed us to improve the performance of the direction-giving task, to gather standard durations of the subtasks executions and to draw lessons about metric definitions and choices (e.g. we realized it was not relevant to measure the human visual attention towards the robot when it was giving the route explanation as humans look around at this moment). Unfortunately, the practical conditions of the project deployments did not offer us the possibility to evaluate the QoI Evaluator based on a study in the mall with real customers. So, we demonstrated – after improvements of the metrics equations such as the Distance-to-Goal one, and manual tuning of their parameters based on the experience in the mall – our finalized concept through tests in our lab (step 6). This is shown in Sect. 3.7.3 where we present and discuss, a comparison of the QoI computed by the robot when it is dealing with an “ideal” human, a “confused” human and a “non-compliant” human during a direction-giving task, performed in the lab. Before that, we present in Sect. 3.7.1 and Sect. 3.7.2 how the QoI is evaluated at both task and action levels for the direction-giving task.

3.7.1 QoI Evaluation at the task level

In the context of the direction-giving task, we have selected two metrics to evaluate the QoI at the task level: a metric defined in the Sect. 2.7.4, the *Deviation from standard duration* and, the aggregation over time of the actions QoIs. Following the process of Fig. 2.11, we measure the QoI of the Task_{*i*} = direction-giving_task, based on the QoI of all task actions and Task metric₁ = Deviation from standard duration.

The *Deviation from standard duration* is used to measure the QoI at the task level as the task is a sequence of subtasks. Indeed, if the subtask lasts longer than expected, the QoI should decrease. Then, as needed for the metric computation we have determined the values of the soft deadlines SD_i for each subtask $a_i, i \in [0, 4]$, using the empirical data we gathered as explained in. Specifically, we have computed the average time execution of each subtask, after removing the cases for which the execution of the subtask was annotated as not smooth. These soft deadlines are presented in table 3.4. Finally, we chose $V_i = 0.5$ for all the subtasks.

Subtasks	soft deadline (s)
Target refinement process	30
Ensuring Correct HR Placement	30
Ensuring target seen	20
Direction explanation and pointing	30
Ensuring Direction Seen	20

Table 3.4: Soft deadlines SD_i for each subtask of the direction-giving task

The task QoI is also dependent on the actions QoI values (their computation is

described in Sect. 3.7.2). Indeed, the actions QoIs should be reflected on the task QoI as, if a majority of the actions have a low QoI, the task QoI cannot remain high. That is why, besides the *Deviation from standard duration*, we take into account the average of the action QoIs of the actions already executed or still running.

Then, the task QoI is computed using Equation (2.1) presented in Sect. 2.7.3. After various trials we have empirically chosen the weights W_i for each metric $M_i, i \in [0, 1]$. The final equation to compute the task QoI is:

$$QoI_{dir-giv_task}(t) = \frac{\Phi_{dir-giv_task}(t) + 3 * \overline{QoI}_{actions}}{4}$$

3.7.2 QoI Evaluation at the action level

As mentioned earlier, each subtask of the direction-giving task can be decomposed into actions. These actions involve several turn-taking steps, the robot asking complementary information, informing the human or expecting an action or reaction from them. We need to measure the QoI during the execution of each action. To do so, we have chosen one or more metrics for each action.

Metric id	Metric name	Metric equation – with Equations of Section 2.7.4	Scaled metric – with functions
$M_{H_contrib}$	Human contribution to the goal	nb_R_repet	$n_1(nb_R_repet) = 2 * \frac{nb_R_repet}{nb_R_max}$
M_{Exp_SI}	Fulfilling robot expectations about social interaction	$Ar = \frac{duration_{isAttentiveTo(robot)=true}}{duration_{robot_speaks}}$	$n_1(Ar) = 2 * Ar - 1$
M_{DtG}	Distance-to-Goal	$\begin{cases} \Delta DtG(t=0) = 0 \\ \Delta DtG(t) = \max(0, \Delta DtG(t-1) - 1) \\ \quad \text{if } path_length(t) < path_length(t-1) \\ \Delta DtG(t) = \Delta DtG(t-1) + 1, \text{ otherwise.} \end{cases}$	$-s_1(DtG(t)) = -1 + 2 \exp\left(-\ln\left(\frac{DtG(t)}{DtG(t-1)}\right)\right)$
M_{TtG}	Time-To-Goal	$\Delta TtG(t) = \max(0, e(t) + TtG(t) - TtG(T_0))$	$-s_1(TtG(t)) = -1 + 2 \exp\left(-\ln\left(\frac{TtG(t)}{TtG(T_0)}\right)\right)$

Table 3.5: Metrics used in the implementation presented in Section 3.7.

For each action of the following list, we explain which metrics M of Table 3.5 we have used and scaling functions of Appendix B and then, how we compute the action QoI.

- (a) *Robot-Human information sharing:* The robot speaks to the human, shares information such as the route direction and announces the next steps of the plan. The robot expects that they are paying attention to it. Therefore, we use the *Fulfilling robot expectations about social interaction* M_{Exp_SI} based on the attention ratio. Two parameters need to be defined for the scaling function, the bounds b_1 and b_2 . As the minimum value for the metric, a ratio, is 0 and the maximum value is 1, then $b_1 = 0$ and $b_2 = 1$. The QoI of the action is computed with this only metric.
- (b) *Human-Robot Q/A process:* The robot asks a question to the human. As for the previous action, the robot expects the human to pay attention to it so we compute the QoI with M_{Exp_SI} . It also expects the human to give an appropriate answer. If it does not happen, it will ask the human to repeat, specifying that the answer has not been understood. We have limited the possible number of attempts to 3. After 3 attempts, the robot ends the task, as it cannot carry on with the task without an answer. So, we use *Human contribution to the goal* $M_{H_contrib}$, the number of times the robot repeats. Because the maximal number of repetitions is 3, we set for the scaling function $b_1 = 3$ and $b_2 = 0$.

The QoI is computed with the two metrics: *Fulfilling robot expectations about social interaction* and *Human contribution to the goal*. The trials showed that the action QoI results were satisfying with the weights $W_i = 1, i \in [0, 1]$ as applying the Equation (2.1).

- (c) *Ensuring that Human moves aside:* This action is used if, for pointing, the robot decides to place itself in a position which is very close to where the human is currently standing. In this case, the robot asks the human to step aside to the right or left, depending on the human's future position. Then, we want to measure the progress of the human going further from the planned robot position. In order to do this, we use the *Distance-to-Goal* M_{DtG} but with the condition of the ΔDtG equation adapted, being if $path_length(t) > path_length(t - 1)$ instead of if $path_length(t) < path_length(t - 1)$. We scale the metric with $-s_1$, the additive inverse of the scaling function and not directly s_1 as the closer to 0 ΔDtG is, the better it is in terms of goal completion. From trials, we set $-s_1$ parameters values with $th = 5$ and $k = 1.5$.

If the human does not move or does not go far enough from the robot position, the robot will ask again with a limit of 3 trials (if the robot cannot move, it will carry on the task from their current positions). So, we use $M_{H_contrib}$ as for the previous action.

- (d) *Human-aware robot navigation:* The robot has to move from its initial position to its computed one. It navigates while respecting social constraints and its path may change as it adapts according to what the human is doing. At

execution time, to measure the robot progress towards its goal, we use the *Time-to-goal* M_{TtG} , with the same scaling function than M_{DtG} . The QoI of the action is computed with this only metric.

- (e) *Ensuring correct human placement for verbal interaction:* After it has moved, the robot asks the human to come in front of it. If the human is not perceived after a few seconds, the robot will ask again and so on in a maximum of 3 trials. If after these 3 times the human is still not perceived, the robot ends the task.

The QoI of this action is computed with $M_{H_contrib}$ – we do not use M_{Exp_SI} as the human is not in the field of view when the robot is calling them.

- (f) *Ensuring correct human placement for route explanation:* Once the human is in the robot field of view after the HR motion, they may not be at the right place to properly see what the robot has to point at. In this case, the robot will ask the human to move forward or backward according to what it has computed about the human perspective (e.g. this is to avoid that an object occludes the view for the human). Then, we want to measure the human progress towards the position the robot has computed for them. In order to do this, we use the *Distance-to-Goal* M_{DtG} .

The robot stops giving instructions if it computes that the position of the human allows them to see the target, or after 3 trials, so we use $M_{H_contrib}$. After 3 trials, if the human cannot see the target, still, the robot will carry on the task taking this into account.

Mall elements	Mockup mall	Real mall
Shops	19	140
Doors, stairs, elevators	10	50
Corridors	11	41
Levels	2	2

Table 3.6: Number of elements described in the mockup and real malls (geometric, topologic and semantic models in Fig. 3.5).

3.7.3 Proof-of-Concept


This section reports on an effective implementation of the approach as an illustrative proof of concept. We show the ability of the robot to conduct an interactive task, to assess in real-time the QoI and to track its evolution during three direction-giving task executions where the same human displayed a different way of behaving. In the three cases, the task was conducted until its end, in our lab where we reproduces the mall environment (Fig. 3.5a, Table 3.6). The computed QoI for each way is

Action	QoI formula (metric aggregation)
Robot-Human information sharing	$M_{Exp_SI}(t)$
Human-Robot Q/A process	$\frac{M_{Exp_SI}(t) + M_{H_contrib}(t)}{2}$
Ensuring that Human moves aside	$\frac{M_{DtG}(t) + M_{H_contrib}(t)}{2}$
Human-aware robot navigation	$M_{TtG}(t)$
Ensuring correct human placement for verbal interaction	$M_{H_contrib}(t)$
Ensuring correct human placement for route explanation	$\frac{M_{DtG}(t) + M_{H_contrib}(t)}{2}$


Table 3.7: QoI computation for each action as an aggregation of metrics

presented in Fig. 3.17. The three different ways of behaving are described in the following list:


- A human executed perfectly the expected actions and was not disturbing the robot when it navigated (*i.e.*, the “ideal” human from the robot point of view).
- A bit “confused” human tried to contribute to the task success but did not execute everything well. The human was, from time to time, not very attentive, as looking around. Also, they gave an answer to the first question that the robot did not understand, and then they took their time before answering again. Then, they prevented a bit the robot to move as it had planned and once the robot reached its position, they took time to come as close as the robot wanted.
- A human wanted to disturb the robot during the task. They gave three incomprehensible answers to the first question, blocked multiple times the robot in its move, waited for the robot to ask twice to come in front of it and finally asked the robot to point and explain the route three times.

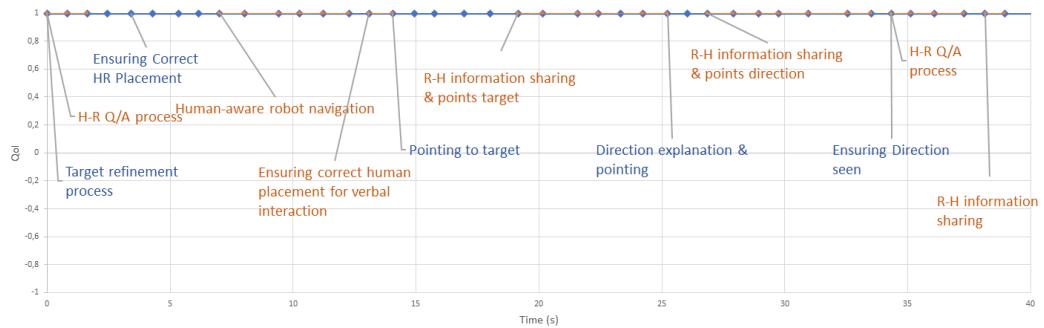

(a) Evolution over time of the measured QoI for the 'ideal' human. Both action and task QoIs remain at 1 as the task is proceeding smoothly.

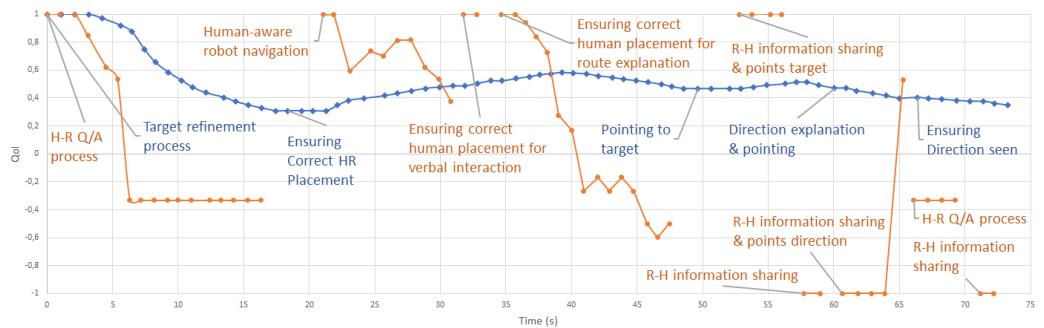

(b) Evolution over time of the measured QoI for the “confused” human. They took time to answer the first robot question and to move forward but the task QoI does not drop too much because the robot was able to give the route explanation without any issue even though the human was not very attentive.

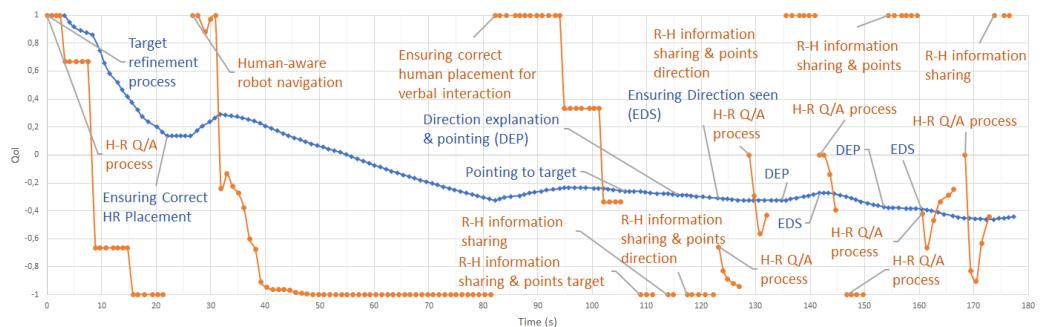

(c) Evolution over time of the measured QoI for the non-compliant human. Several times the human did not give the expected answer to the robot during the target refinement process. Then, they blocked the robot path. After that, the robot had to ask twice the human to come in front of it. Finally, the robot repeated the route direction three times but still the human kept saying that they did not understand. Therefore, the task QoI decreases all along the task.

Figure 3.17: Evolution over time of the measured QoI for the route guidance task with three different human behaviors. The QoI for the task is drawn in blue, and the QoI for the actions is drawn in orange.

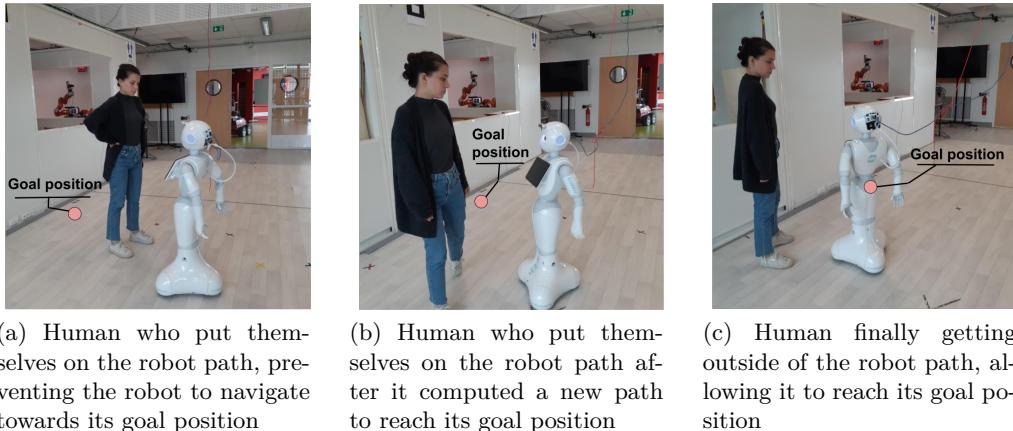


Figure 3.18: A human disturbing the robot during *Human-aware navigation*, preventing it to reach its goal position as planned.

Now, if we take a look at the QoI outputs of Fig. 3.17, we can see that their three shapes are very different. In Fig. 3.17a, we can observe that the task and actions QoIs remain with the highest value 1 all along. A graph as this one allows us to infer that everything went very smoothly during this direction-giving task. Then, we can guess that it corresponds to the execution performed with the 'ideal' human.

In Fig. 3.17b, we note that each subtask was executed in respect of the standard duration. If the QoI of *Target refinement process* drops it is because of the action QoI as the QoI of the *H-R Q/A process* drops because the robot had to repeat the question and the human was not looking at it. From 21 seconds to 40 seconds, we can see the task QoI getting higher as the QoIs of *Human-aware robot navigation*, *Ensuring correct human placement for verbal interaction* and the beginning of *Ensuring correct human placement for route explanation* are quite high. Next, seeing the shape of the computed QoI of the action *Ensuring human placement for route explanation*, we can infer that the human was not moving as the robot wanted. Indeed, they took 10 seconds to make one step forward (they had 1 meter to cross). Because of that, the task QoI started to decrease again. In the final part of the task, the human was time to time attentive to the robot answered quickly to the last question, so the task QoI remained rather equal with its final value being 0.34 which is above 0 so meaning a correct interaction.

Finally, we can see in Fig. 3.17c that the final QoI of the task is -0.44 which allows us to infer that the task was not executed smoothly. And indeed, when we look at the shape of the task QoI, it only went down (or almost) all along the task. It is explained by some subtasks that took more time than they should have and also by some actions QoIs that are very low, especially the one of *Human-aware robot navigation*. At the beginning of the robot navigation, the estimated time to goal returned by the planner was 6 seconds but the robot actually took 50 seconds

to reach its goal then the action QoI computed with $= M_{TtG}(t)$ was -1 for 40 seconds. And indeed, all along its navigation, the human was blocking the robot until they got tired of this game, as visible on Fig. 3.18.

In this example, we showed the QoI evaluation process integrated to a complete robotic architecture. The robot was able to assess the QoI in real-time while interacting with a human.

3.7.4 Discussion on the results of the QoI Evaluator

While a number of evaluation methods has been proposed to evaluate a human-robot interaction from the human perspective and often for analysis after performance, our choice to let the robot evaluate, on its own and in real-time the quality of its interaction with a human is quite new and original. To endow the robot with such an ability, we designed, implemented and tested a number of metrics and a method to aggregate them.

The work of Steinfeld *et al.* [274] was very helpful to design a first set of metrics and as an inspiration about what could be used. From there, we have elaborated and proposed a set of metrics which are meant to estimate of the quality of an ongoing interaction and not once it is over. The work of Hoffman [127] regarding the *fluency* definition and how to measure it was also inspiring. In a way, we extended his work by giving a meaning to the fluency measurement on the robot side, and in real-time – while their work applies to offline evaluation of shared workspace tasks. In Sect. 2.7.2, we mentioned systems measuring human affective states in real-time such as the framework developed by Tanevaska *et al* [278]. Although we think such metric could be an interesting additional information to assess if an interaction is going well, we believe that these measurements do not offer an accuracy that would lead to objective measurement of the quality of interaction, thus, we did not introduce them in our set for now. However, this could be done since our framework is designed to be open to new metrics. As for contributions, like the one proposed by Anzalone *et al.* [7], based on metrics such as gaze, head pose, body pose and response times to measure real-time engagement, we took them into account to some extent. However, the measure of the engagement that we propose should be refined depending on the inputs available on-line to the robot . Moreover, we will investigate how their work could be used in a more general way (e.g. depending on the action that should be done and its context, human head pose and body posture could be a good indicator of effectiveness and not only engagement).

Our intention, when we developed the idea of the Quality of Interaction Evaluation, was to use such computation to feed the decision-making process of the robot and this is what we intend to do in the future. However, such framework can also be used to compare interactions between different humans and/or robots, eventually as a benchmark similarly to the work of Sanchez-Matilla [237] or as a way for developers to detect repetitive interaction issues with an unsupervised robot in a real-world environment.

As a proof-of-concept, we implemented and deployed a first version of a QoI

Evaluator assessing task and actions QoIs. We tested it on an interactive robot dedicated to provide route guidance to customers in a large mall. The approach gave satisfactory results. It showed the potential ability of a robot to detect momentary decreases of the Quality of Interaction and also more serious degradation of it which may need drastic change of behavior for the robot. This is only a first step and it should be validated with a study where we will ask humans to evaluate the quality of their interaction with the robot in a similar manner. The goal will be to analyse and compare this to the evaluation of the interaction quality estimated by our robot and, based on that, investigate potential improvements.

Finally, we do not claim to have a perfect measure of the Quality of Interaction. However, although the concept of Quality of Interaction is quite abstract, Movellan *et al.* showed that when it is measured by human observers, the inter-observer reliability of the concept is quite high. Therefore, we believe we can endow the robot with an effective and pertinent ability aiming at measuring the quality of an interaction. We are aware that the set of metrics we proposed to do so is not exhaustive but the framework is designed to be easily extended with new metrics.

3.8 User Study

CHAPTER 4

The Director Task: a Psychology-Inspired Task to Assess Cognitive and Interactive Robot Architectures

Contents

4.1	Introduction	128
4.2	From psychology to Human-Robot Interaction	130
4.2.1	The original task	130
4.2.2	The Director Task setup	132
4.2.3	The adapted task	134
4.2.4	Additional abilities	135
4.3	Architecture and knowledge link	136
4.3.1	Storing and reasoning on symbolic statements	137
4.3.2	Assessing the world: from geometry to symbolism	138
4.3.3	Planning with symbolic facts	140
4.3.4	Managing the interaction	141
4.3.5	Speaking and understanding	142
4.4	Experiments	143
4.4.1	Pr2 as the director	144
4.4.2	Pr2 as the receiver	145
4.5	Open challenges for the community	147
4.5.1	Challenges to take up	147
4.5.2	User studies to perform	149

In this chapter, we propose a new psychology-inspired task, gathering perspective-taking, planning, knowledge representation with theory of mind, manipulation, and communication. Along with a precise description of the task allowing its replication, we present a cognitive robot architecture able to perform it in its nominal cases. In addition, we suggest some challenges and evaluations for the Human-Robot Interaction research community, all derived from this easy-to-replicate task.

The contribution presented in this chapter is excerpted from our work, published in the proceedings of the RO-MAN 2021 conference [240]. This contribution closes this thesis and has been achieved in collaboration with other PhD students of the HRI teams. Guilhem Buisan was concerned about the task planning part. Amandine Mayima worked on the supervision component. Kathleen Belhassein has designed the presented task with us giving her psychologist point of view to create a task on which user studies could be performed. The engineer Yannick Riou worked on the motion planning component allowing us to develop a task where the robot acts on its environment. My concern about this task has been the integration of my previous contributions about Ontology and the REG. It has also been the opportunity to create an entire architecture extending the ones presented all along with this thesis and linked with the contributions of the team. Finally, I contribute to the Situation assessment component and on the Language understanding part.

The components related to my teammates will be briefly described to give an overview of the architecture. The newly introduced capabilities on which I work will be more detailed to explain the links I make between all my contributions, centred on the knowledge representation.

4.1 Introduction

Developing robotic architectures adapted to Human-Robot Interaction and thus able to carry out interactions in an acceptable way is still today a real challenge. The complexity comes, among other things, from the number of capabilities that the robot must be endowed with and therefore from the number of software components which must be integrated in a consistent manner. Such architectures should provide the robot with the capability to perceive its environment and its partners, to merge and interpret this perceptual information, to communicate about it, to plan tasks with its partner, to estimate the others' perspective and mental state, etc. Once developed, the evaluation of these architectures can be difficult because all these components grouped into a single system. The tasks we usually want the robot to handle must highlight a maximum of abilities, while still being simple enough to be reproduced by the community. Moreover, we should be able to conduct user studies with it to validate choices regarding naive users.

Since a long term goal of the robotic field is to see robots evolving in our daily life, many tasks and scenarios have been inspired by everyday activities. Even if these tasks offer a large variety of situation to be handle, since the human partner is not limited in his actions, they have the disadvantage of not highlighting some subtle abilities which are nevertheless necessary for good interaction. The robot guide task [244] in mall, museum, or airport, requires high communication skills to understand free queries (possibly involving chatting) and respond to them, whether to indicate a direction or to give advice. However, the perception needs can be limited due to the vast environments, as well as the perspective-taking needs due

to the same perception of the environment by the robot and the human¹. Finally, with such a task the human partner is not an actor of the task and just has to listen to the robot once their question is asked. Even if being in more constrained environments, bartender-like tasks [217] have the same disadvantages. Indeed, the human is considered as a customer, and as such, the interaction with the robot is limited. The robot will never ask the human to help it for performing a task and their actions do not require coordination either full collaboration.

To involve the human partner in the task and requiring him to act with the robot, assembly-like tasks [279] can be used. Nevertheless, in most cases, the human acts as an assistant rather than as a partner as full collaboration can be challenging to perform. The robot thus elaborates a plan and performs the assemble, then asks for help when detecting errors during the execution (e.g., when it cannot reach some pieces). Here the task leads to unidirectional communication. Moreover, because in such a task both the robot and the human have equivalent knowledge about the environment, it can be hard to design situations where belief divergence appears and thus perspective-taking would be required.

Scaling down an everyday task to transform it into a toy task around a table can reduce the task complexity and allow easy reproducibility. Moreover, it allows the robot and the human to work in the vicinity of each other, with smaller robots for example. With the toy version of the assembly task presented in [45], the human is more involved in the task. They ask the robot to take pieces and to hold them to help them assemble a chair. Even if the communication is unidirectional, we could imagine inverting the roles to test different abilities. Moreover, communication implies objects referring with the use of various visual features about the entities. Even if both agents have the same knowledge about the environment, the communication is grounded according to the current state of the world. In this task, no decision has to be made by the robot but once again, inverting the roles could open other challenges.

To focus studies around perspective-taking and belief management, the Sally and Anne scenario, coming from a psychology test, has been studied in robotic [197]. In this scenario, the robot is an observer of a situation where two humans come and go from a room, and move an object from a box to another. Since a human is in the room when the other is acting, a belief divergence appears between the two humans and the robot has to understand it. While the task highlights the belief management, it is first limited regarding the perspective-taking since the human presence or not could be sufficient to estimate the humans beliefs². Moreover, the humans do not act with the robot since it is just an observer of the scene. In addition, no goal is formulated and the human neither interacts with one another. Finally, no communication is needed in the task. The scenario is thus focussed on

¹For sure we can find some tricky cases where it could help but they do not reflect common situations.

²When both humans are in the room they have the same perception of the scene but have different beliefs about hidden objects. Perspective-taking would be required if the humans could lean over the boxes to check what is inside.

the analysis of a situation.

In this chapter, we first propose a new psychology-inspired task that we think to be challenging for the Human-Robot Interaction community and rich enough to be extended: the Director Task. *Inter alia*, it requires perspective-taking, planning, knowledge representation with theory of mind, manipulation, communication, and decision-making. Then, we present the robotic cognitive architecture that we develop to perform the task in its nominal cases. Finally, on the basis of the presented task and what has been developed, we present a discussion about the possible future challenges and evaluations for the research community, with possible extensions of the task.

4.2 The Director Task: From psychology to Human-Robot Interaction

In this section, we present the origins of the Director Task and the needs it aims to respond to regarding other tasks from the psychology. We then detail the setup we have designed in terms of objects characteristics and organisation in the environment. We end this section with our adaptation and the required abilities we have identified.

4.2.1 The original task

The Director Task has been mainly used in psychology as a test of the Theory-of-Mind usage in referential communication. This task originates from a referential communication game from [166]. In this game, two participants are one in front of the other with an opaque panel between them. A speaker has to describe odd designs to a listener, either to number them for the adults or create a stack of cubes for the children. To refer to the odd figures, participants have to use images (e.g. “it looks like a plane”).

This game was then adapted by Keysar et al. [152] and becomes the Director Task. It has been used to study the influence of mutual knowledge in language comprehension. In this task, two people are placed one in front of the other but instead of an opaque panel between them, they place a vertical grid composed of different cells and objects in some of them. The **director**, a participant or in most cases an accomplice, instructs the **receiver**, a participant, about objects to move in the grid. The receiver thus follows the director’s instructions about objects to move. The particularity of the task is that some cells are hidden from the director, meaning that the receiver, being on the other side of this grid, does not have the same perspective as the director. He thus knows the content of more cell than the director and consequently sees more objects. When the director instructs the receiver to move an object, for a successful performance, participants must take the perspective of the director to move the right one. Because the configuration evolves all along with the task, he has to update this estimated perspective all along with

the interaction.

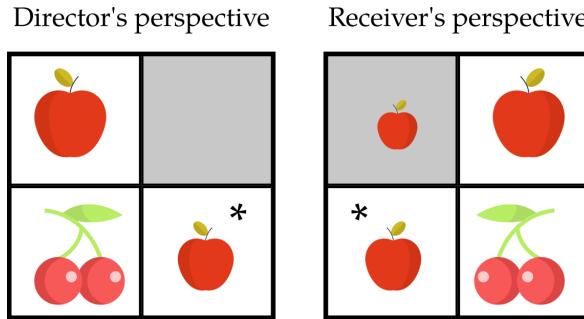


Figure 4.1: Sample display from the director’s and the receiver’s perspectives. The asterisk indicates the target object. Giving the sentence “the smallest apple” the receiver should find the good one even if he can see a smallest one in its perspective.

Taking the example of figure 4.1, if the director instructs the receiver to take the smallest apple, the target object in its perspective is the one marker with the symbol *. However, for receiver, in its perspective, the target object is not the smallest apple since the smallest one (called distractor) is only visible by the participant and not by the director. The participant then must understand the director’s perspective to take the target apple and not the distractor. Some studies showed that for their first attempt, participants took the smallest apple from their own point of view and only after, the target one. These results were interpreted in [150, 153, 151, 154] as the participants understanding language in an egocentric way. Some social cognition studies used a computer-version of the Director Task [88] whose results are consistent with the ones mentioned previously, namely that participants do not use Theory-of-Mind inferences in language interpretation.

Although Theory-of-Mind and perspective-taking both require the attribution of mental states to others, some authors trend at distinguishing Theory-of-Mind tasks and perspective-taking tasks as involving distinct although related mechanisms. In [239], they consider that perspective-taking abilities were measured by the Director Task whereas Theory-of-Mind usage was investigated through another task called “strange stories” [118]. This Theory-of-Mind task requires the attribution of mental states to a story protagonist, meaning to maintain an estimation of others’ mental states. At the difference, the Director Task requires the adoption the perspective of the director in order to follow the instructions, meaning to use this knowledge in order to execute the task properly. In this way, the authors estimated that the Director Task requires a higher degree of self-other distinction by continuously isolating our own perspective from the director one, in order to use it to act. In addition to perspective-taking abilities, the Director Task makes use of executive functions [234] (*i.e.*, vary the processing of information according to current goals in an adaptive manner) and attentional resources [185].

To summaryse, the Director Task has been used to study referential communication, language comprehension, and perspective-taking abilities. However, to our

knowledge, it has never been exploited in the context of a HRI although this task presents interesting challenges for this field. More than technical challenges, it provides a way to investigate the different cognitive and behavioral processes involved in such a cooperative Human-Robot task.

4.2.2 The Director Task setup

The material used in this task has been chosen to be easily acquired and can be hand-built. It is composed of blocks, compartments, and a storage area. Each element is equipped with AR-tags allowing the robot to perceive them without advanced perception algorithms.



Figure 4.2: Part of the material used for the Director Task. Each element is equipped with AR-tags allowing their detection by the robot. Each block has four visual characteristics: a main color, a border color, a geometric figure and a figure color.

Three types of compartment exist and are illustrated on the right part of figure 4.2. The basic ones are open on two of their opposite sides (d). They allow both the receiver and director to see the content and to manipulate it. Others are open only on one of their sides (e). With such a compartment, only one of the participants can see and take what is inside. The other participant can neither know if a block is inside or not. The last compartment type (not used in the implemented version) has an open side and the opposite one equipped with a wired mesh (c). Because of the side with the wire mesh, both participants can see what is inside but only one of them can take it. Thanks to these three types, we will be able to vary the awareness of the blocks (e.g., a block is known to be present but not necessarily visible), the visibility of the blocks, and their reachability (e.g., a block can be visible but not reachable). While the original Director Task uses a vertical grid, we prefer here to use several compartments to create the grid. It allows more modularity to create different situations.

While the tasks used in psychology use everyday objects, we rather choose blocks that can easily be manipulated by robots and on which we can fix tags for their detection (a-b on 4.2). The blocks have a primary color covering them all. On two opposite faces, additional visual features are drawn. The top part of these faces

is dedicated to the robot's perception with a unique AR-tag on each face³. The bottom part is the same on both faces and is dedicated to human perception. In addition to the primary color, three visual features are available for the human to distinguish them: a colored border, a colored geometric figure (both the color and the figure can change making two features). Every visual feature (the colors and the forms) has exactly two variants. The colors are either blue or green and the figures are either a triangle or a circle. We can thus have 16 unique blocks.

The agents can use the four visual features to refer to a specific block and the complexity of the description depends on the used features. While the main color is directly related to a block, the other colors are respectively related to the border and the figure. In this way, for two blocks for which the only difference is the color of one of these elements, the said element has to be referred to in order to refer to the divergent color. A description of a block involving all its four features would be "the [color] block with the [color] border and the [color] [figure]".

The figures and colors have been chosen in such a way to allow the emergence of "coded words" between the participant to identify a block. With a bit of imagination, some could refer to the left-most block (a) through the sentence "the mountain in the sea" or the other (b) by "the puddle".

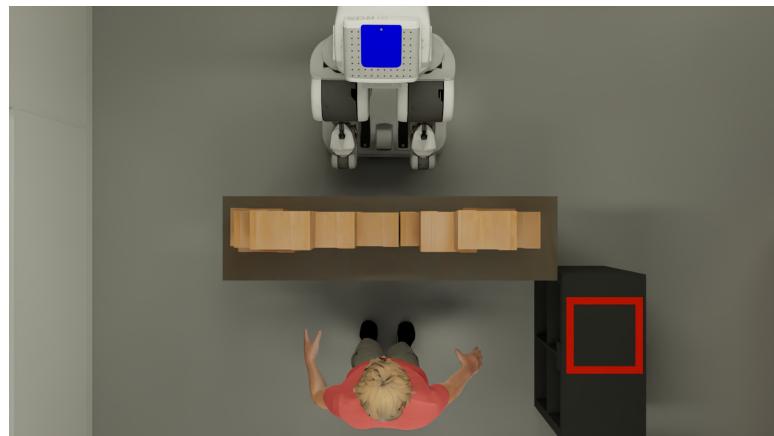


Figure 4.3: The Director Task setup with the robot and the human partner one in front of the other and a piece of furniture between them. Compartments are placed on top of the furniture and blocks are placed in the compartments. Next to the agent having the receiver role, here the human, a storage area is placed to drop the removed blocks.

Regarding the disposition, the compartments are stacked on a piece of furniture to create a kind of grid. The blocks can be put in a compartment. As illustrated in figure 4.3, the two agents are placed one in front of the other with the furniture and thus the compartments between them. Finally, one storage area, corresponding to the place where the receiver has to store the blocks, is delimited by a rectangle on

³Since the tags are different on each side, the director cannot refer to them as the receiver does not see the same ones

a shelf next to the receiver. In the figure, the human would be the receiver since he has the storage area on his right.

4.2.3 The adapted task

Now we explained the Director Task setup and the available material, we present the rules we have adapted for HRI applications. First, the high-level goal of the task is known by both agents: to put a set of blocks away. The precise goal is given by the experimenter to the director, either the robot or the human. It corresponds to a subset of the blocks presents in the compartment that the receiver should remove from and put in the storage area. This choice, to remove the objects instead of moving them in the grid, enables an evolution of the situation over time. It thus requires a constant adaptation during the interaction. The goal can be given on a sheet of paper, a screen behind the receiver, or marks on the blocks on the director side. No block order is required in the formulation of the goal. The director is thus allowed to elaborate a strategy if needed.

As mentioned previously, the Director Task characteristics bring a number of interesting challenges for a collaborative robot to solve. Because this is a task with roles, one of the first challenges is to build a robotic architecture that gives the robot the ability to play both roles. Then, each role brings some specific problems to solve from a robotic point of view.

In order to enrich the task with perspective-taking, we adapted the task so that both the director and the receiver have to use perspective-taking. Since in the original task, the director knows he has a subset of the receiver's perspective, he can consider all the objects when communicating. Thus, only the receiver has to reason about the other's perspective, taking into account that some objects are not visible by the director. For HRI applications, we use the one side hidden compartments in a way to also have objects hidden from the receiver and visible by the director. Therefore, both roles have to perform perspective-taking, whether to give instructions or to understand them. On the illustration of figure 4.4, the director (left image) can instruct the receiver to take the blue blocks as the other blue blocks in his perspective is hidden from the receiver. From the receiver point of view (right image), he can find the instructed block as the other blue block is hidden from the director.

To be able to study precise skills, such as verbal communication, perspective-taking, and adaptation, we defined a set of rules for both roles. First, the agents are not allowed to point to objects, either with their hands or gaze. They thus have to verbally describe the objects, focusing the task on verbal communication. However, to avoid too easy description of the kind “the fully green block”, we remove the four uni-color variants⁴. In addition, to not fall into simple referential communication task, participants are not allowed to use spatial relations in the verbal communications. They cannot, for example, say “the leftmost block” or “the

⁴When we said too easy it is from the human point of view, generating and understanding such description can be challenging for a robot.

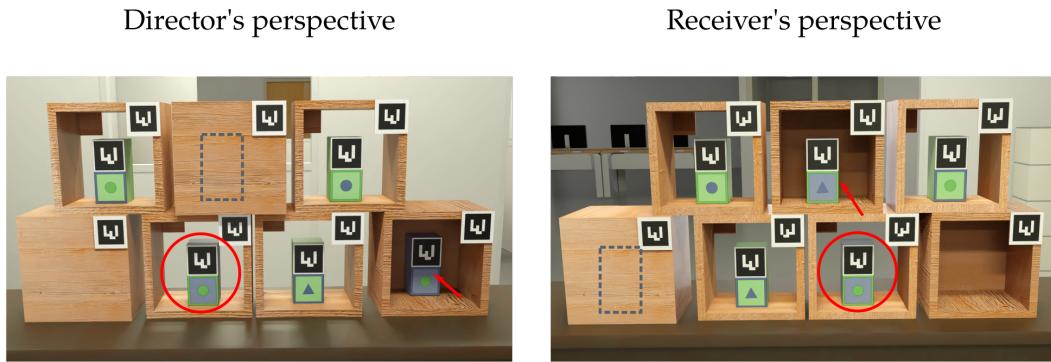


Figure 4.4: A director task setup adapted to the HRI with the director’s and receiver’s perspectives. For the material, each element (blocks and compartment) is equipped with AR-tags allowing their detection by the robot. Each block has four visual characteristics: a main color, a border color, a geometric figure, and a figure color. Compartments can be hidden for the director or the receiver. For the director to designate the block marked with a red circle, estimating the receiver’s perspective, he can refer to it by its main color (blue) because he estimates the other blue block is not visible by the receiver. For the receiver, by taking into account the director’s perspective, he can understand the referred block as he estimates the other blue block to not be visible by the director.

block to the right of the green one”. In this way, they are limited to few visual features, with high ambiguity. Since a description of a block using its four visual features can be hard for the human to process, we first expect the participants to minimize the complexity of their communication by referring to the blocks only using the features distinguishing them from other blocks. Moreover, we also expect the participant to take into account the other perspective allowing once again to minimize the complexity of the communication.

Over these elements, we can see that the task can easily be replicated and offer a controlled setup, making it a good task for human-robot user studies. Moreover, due to the number of involved processes and the number of situations that can be made, there are a lot of elements that can be analyzed and explored. Also, with the same setup, it is possible to perform human-human studies or human-robot studies which can be interesting to compare.

4.2.4 Additional abilities

More than being an easily reproducible scenario to perform user studies on human-robot interactions in a controlled environment, the Director Task allows to demonstrate abilities of a robotic system. We detail here some additional abilities for which the task has been designed for.

Planning When a large number of blocks has to be considered to achieve the goal, it quickly becomes complicated to communicate about some of them as the

director would have to add a lot of adjectives to be able to refer to one block. Therefore when the robot is the director, it becomes interesting to integrate the communication and the task planning. Indeed, depending on the order in which the blocks are designated, the complexity of instructions can decrease or increase over time. Then, the planner can return an optimal order in which the robot has to give the instructions to the human.

Contingencies handling While performing the Director Task, errors can easily happen. Either because the director gives a wrong instruction or the receiver mis-understands the instruction and takes the wrong block. In both cases, it can be because of a wrong consideration of the other agent’s perspective or simply inattention. Moreover, because some instructions might be right but hard to interpret by the receiver leading also to an error from them. Finally, errors can happen because of failure of the robotic system, as a failed action execution leading to a block to fall on the floor. A robot with a robust decision-making system will be able to analyze, try to determine their origin, and handle a number of these contingencies. For example, if the human takes the wrong block, the robot can react in different ways, either by asking the human to put it back if this block is not part of the goal, or saying nothing and re-planning if this block was among the ones to take. If errors happen repeatedly, the robot can also react differently than for a punctual error and maybe try to modify its behavior.

Communication We saw that the task requires to put a focus on communications. The communication about an object can be more or less efficient, depending on the number of characteristics given about the object or the pertinence of these characteristics. Instructing for the blue block with a circle in figure 4.4, the geometrical figure information is not mandatory. Thus, the robot needs to be able to give proper instructions but also to understand the human ones. Moreover, in complementarity with the error management, the robot can communicate to help to solve the detected contingency. Taking a situation (with the disposition of figure 4.4) where the human as director instructs the robot to remove the green block with a circle. This instruction matching two blocks, the robot could say that it does not find the instructed block. A preferable reaction would be to help the human to refine the instruction and say “the one with a blue circle or a green circle ?”.

4.3 The cognitive architecture and the knowledge link

In this section, we present the architecture developed to handle the Director Task in its nominal case for both roles. The architecture aims at being extending but already endows the robot with the abilities listed previously even if there are not mandatory to achieve the task. This architecture is the continuity of the one presented all along this thesis. It can also be seen as a whole new instantiation of the deliberative architecture for Human-Robot Interaction presented in [181]. The seven identified

modules are represented in figure 4.5 with their respective communication links. In the rest of this section, we detail each module and how we have refined them in terms of functionality and links to others. The modules already presented in this thesis will be briefly recalled but not detailed in depth.

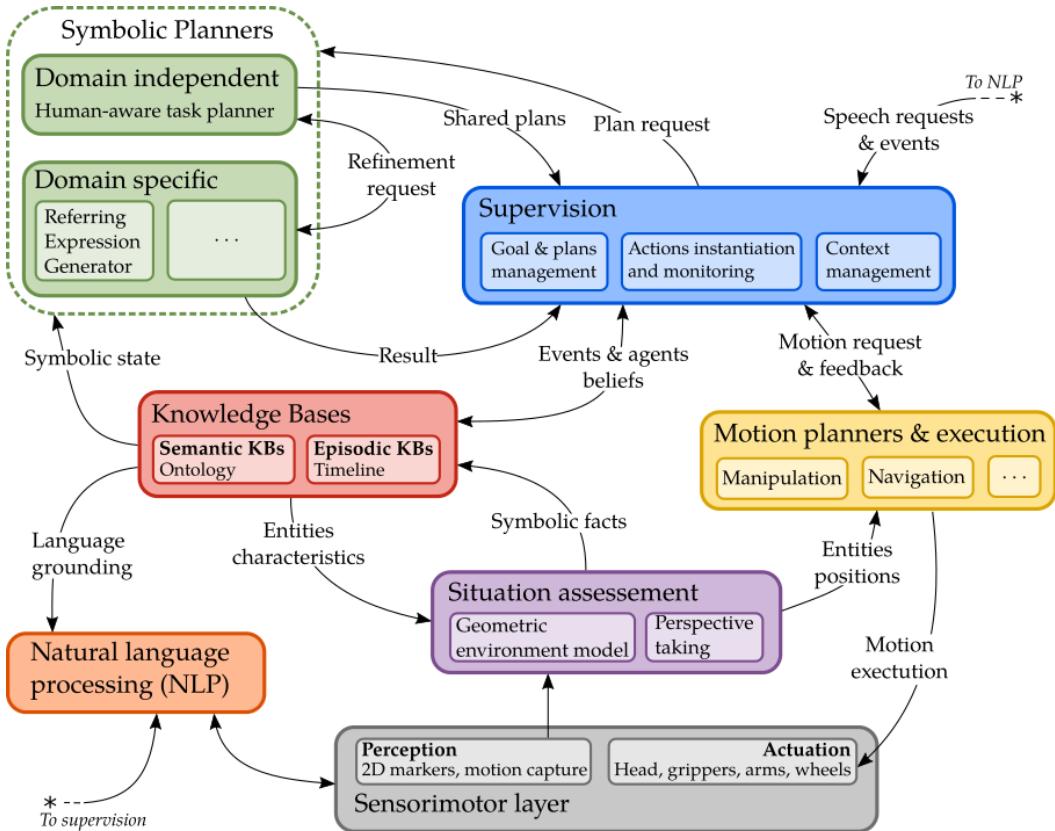


Figure 4.5: An overview of the cognitive architecture developed to handle the Director Task. Each block does not necessarily represent one software component but rather an architectural module (in terms of the features it implements). The arrows represent the type of information exchanged between the modules. This architecture extends the ones presented all along with this thesis.

4.3.1 Storing and reasoning on symbolic statements

The knowledge representation is always a core component of cognitive architectures as organising the knowledge allowing the robot to better understand the environment it evolves in. Moreover, it is on the basis of this knowledge that a robot can communicate with its human partner about the current state of the world and ground the partner's utterance regarding this world state.

Some architectures propagate knowledge all along their components [119], each of them enriching knowledge at each stage before filling it to the next ones. Others consider their knowledge base as an active server, activating perception processes

when needed, depending the information we are looking for [24]. For our architecture, we remain on the principle of a central, server-based knowledge base. It is refined into two distinct sub-modules, the semantic knowledge base and the episodic one. The semantic part is in charge of representing the environment elements: the objects' and agents' types, their applicable properties, the descriptions and parameters of the actions, a part of the language model with verbs or pronouns, and their names in natural language. Besides, we also use it to represent the current symbolic world-state (the computed facts) and thus the instantiation of the concepts in terms of physical (e.g., this particular block) or abstract (e.g., this particular action instance) entities. Among these instantiations, we have a part used for the interaction in itself, like the blocks' visual features, and others for the robot programming, like the objects' computer-aided design (CAD) models or tags ids. The episodic knowledge base aims at keeping a trace of the symbolic transitions of the world over time. It is strongly linked to the semantic knowledge base as it allows to semantically interpret these transitions.

The semantic knowledge base is still an ontology managed by the software Ontogenius. The episodic one is in the form of a timeline, managed by the software Mementar⁵.

4.3.2 Assessing the world: from geometry to symbolism

The role of the geometrical Situation Assessment module is first to gather different perceptual information and build an internal geometric representation of the world, composed of objects and agents. From this world representation, the module runs reasoning processes to interpret it in terms of symbolic statements between the objects themselves and between the involved agents and the objects. Doing so, the module only builds the robot's representation. However, it does not necessarily reflect what the human partner believes about the world. This is the case with the occluded compartments of the task. If a block is present in a compartment occluded from the human perspective, this block is not visible and thus unknown to the human. Consequently, it should not exist in the human representation of the world. Here is the second role of the Situation Assessment module, estimate the human's perspective and build an estimation of their world representation. It is the first step allowing to implement the theory of mind principles [17].

To implement this module, we have chosen the Underworld framework [180]. Its advantage is to not be monolithic⁶. It works on the principle of a set of worlds, each working at a different granularity and providing specific features, links to create a so-called cascading structure. In the idea, it can be compared to a perception pipeline like [23]. It allows easy reuse of existing modules and makes the core reasoning capabilities independent of the used perception modalities. Even if we choose to use tags for objects detection in this implementation, we could easily

⁵<https://github.com/sarthou/mementar>

⁶It can however be a disadvantage in terms of performance but for research purpose, it allows more flexibility.

switch to machine learning approaches. In the same way, we could use the module with simulations or Virtual Reality systems.

The four worlds we create for the Director Task and their connexions are represented in figure 4.6. At the top (a), we have the perception modalities. For the objects we use AR-tags [92]. For humans, we use a motion capture (mocap) system with helmets equipped with reflectors. For now, only the head is tracked. From each perception input, we create a dedicated world. In these worlds, we can filter the perception data depending on the used system. For the mocap, the data is clean enough. For the AR-tags we apply first a motion filter to discard data acquired when the robot moves. In addition, we apply a field of view (FOV) filter to discard data from the border of the camera because of distortions giving wrong positions even with camera calibration. To know to which object correspond a given tag unique identifiers (UID), the worlds have access to the ontology and can query it to get the UID related to. In the same principle, they can get the objects CAD model. As the output of these worlds, we ensure to have stable data with UID related to the knowledge base.

The world of the middle (b) is the robot's world representation. Information from the perception worlds are merged along with the static elements, like the building walls, and the robot model. From this world, additional perception reasoning processes are applied for the objects that are no more visible in the way of [197]. If an entity is no more perceived in one of the previous worlds, we first test if it should be in the robot's FOV. If so, the robot should see it. To get an explanation of this absence, we test if another entity could hide it. If not, the object is removed from the world representation. Otherwise, we keep it as we have found an explanation. Once the entities are stabilised, geometric reasoners are applied to them to extract symbolic facts. In the current version of the system, the computed facts are *isOnTopOf*, for an object on top of another with a direct contact, *isInside*, for a block in a compartment, *isVisibleBy*, assessing if an agent could see the object or not from his position, and *isReachableBy*, assessing if an object can be taken by an agent. All these facts are sent to the robot's semantic knowledge base, where reasoners will deduce further facts. For example, if a block is in a compartment, thanks to inverse property *hasInside* the fact that the compartment has the block inside is computed. In the same way, if this compartment is on top of the table, the block inside is computed to be above the table (*isAbove*) thanks to chain axiom.

While the previous world corresponds to the robot's representation, the human partner cannot have the same because of the occluded compartments. The world c) thus aims at estimating the representation of the world from the partner's perspective. From the robot's world, we compute a segmentation image from the human point of view and use it as a filtered perception world. This allows us to instantiate the same world management process we used for the robot but this time for the human. In this way, we emulate their perception capability and geometric reasoning process. Symbolic facts are thus computed and sent to the human's semantic knowledge base. In the world of the bottom (c) on figure 4.6, we can see that the two blocks in the occluded compartments are not present in the human world. Here

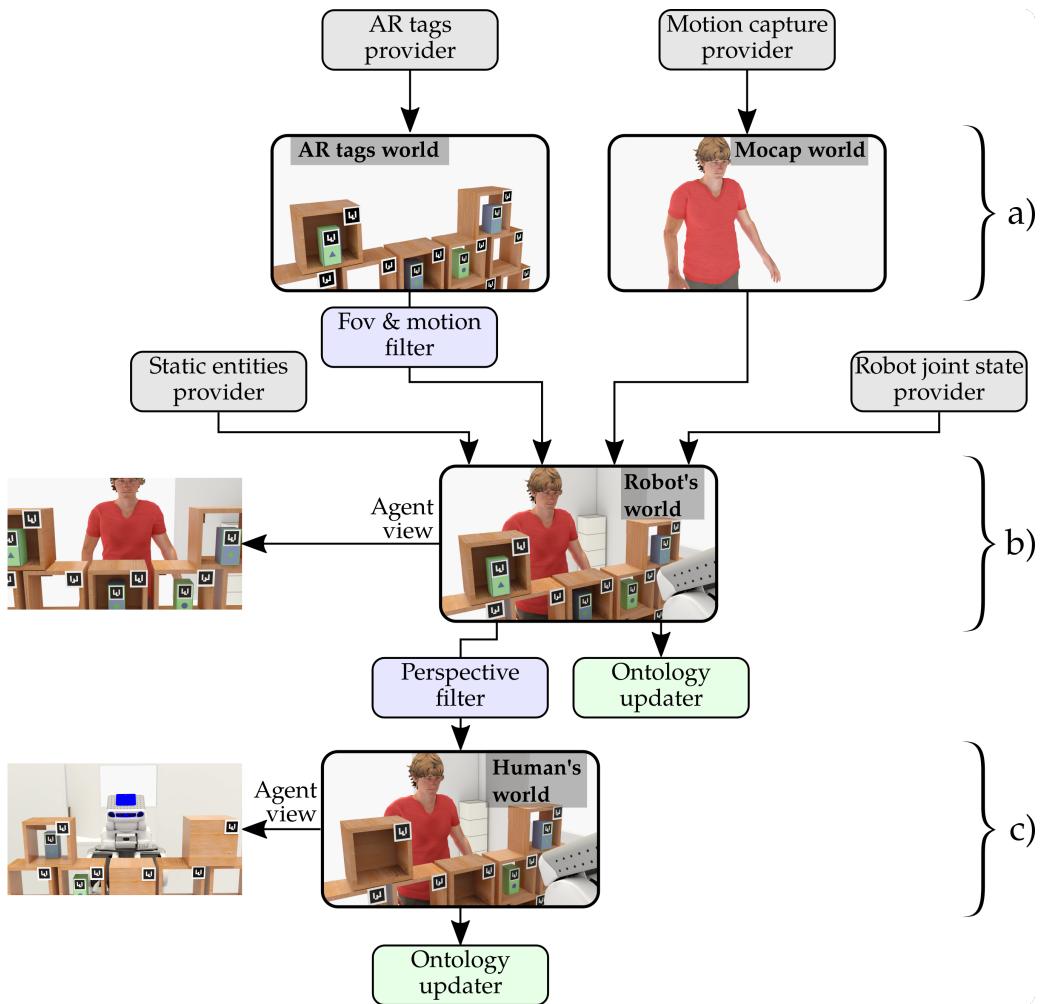


Figure 4.6: The world cascading structure of the geometrical situation assessment system. The two worlds at the top (a) are built from the perception systems and filtered. The world of the middle (b) merges the different perception information and computes symbolic facts on it. The world at the bottom (c) is the estimation of the human world representation and is computed from perspective-taking in the robot's world. Like for the world of the middle, symbolic facts are computed and sent to the semantic knowledge base.

we make explicit the difference between an object that is unknown and an object that is known but not visible. We could have an interaction where the human goes to see the robot side and the robot would consequently estimate the blocks in the occluded compartments as known to the human but not visible.

4.3.3 Planning with symbolic facts

The symbolic planners are divided into two categories: the domain-independent one, planning high-level tasks, and the domain-dependant one, specialized in solving

precise problems. For the Director Task, the only domain-specific planner used is the Referring Expression Generator.

Where we previously used HATP [172] as task planner, for this task we used its next-generation presented in [52]. In the same way as HATP, the new planner aims at taking into account the human's contribution to planning how to perform a high-level task. To do so, it can generate a shared plan in which parts of the task are assigned to the human partner and other to the robot itself, depending on some criteria. However, the robot's partner is not an agent that the planner can directly control. Indeed, it must sometimes communicate about the plan to inform the human about their next actions. The new planner rather trends at emulating the human decision, action, and reaction processes to generate a shared plan. For the Director Task, emulating the human reaction to a given instruction enables the comparison between multiple blocks order, the communication of higher-level instructions to the human and the balance between multiple communication modalities.

The REG planner has been successfully integrated with the new planner allowing it to estimate the cost and the feasibility of referring communication at task planning level. The initial world state is fetched from the ontology leading to a uniformity of the knowledge among the architecture.

4.3.4 Managing the interaction

The supervision component aims at managing the overall interaction. In this architecture, we use JAHRVIS (Joint Action-based Human-aware supeRVisor) which constitutes the decisional kernel of this cognitive architecture. Like its predecessors, SHARY [72] and its extensions [94, 84], it is designed for a human-aware robot. It has to not only handle the robot's action execution but also to estimate the human mental state, monitoring his actions, and communicate with him. To handle these features, several processes are needed:

Interaction sessions management: It manages an interaction session that is first refined into tasks, themselves refine into action coming from the task planner. Moreover, it is in charge of the greetings happening at the beginning of an interaction, the goodbyes at the end, and all events and exchanges happening outside tasks (e.g., conversation, goal negotiation) or during a task but not related to it like a human doing a parallel task on its own.

Communication management: Communications are categorized in JAHRVIS either to: give information updating the receiver beliefs; ask a question to update the emitter belief; ask the other agent to perform an action; discuss with dialogue not related to a task or a goal/plan negotiation.

Human management: As the supervision system manages shared plans, it has to make sure the human follows them. Moreover, even if some communications are

planned, it also has to make sure that the human has all the knowledge he needs for what he has to perform and if not, it hence acts or communicates through the other processes. To do so, it monitors the human beliefs about the ongoing task and plan.

Task management Even if the human has also the necessary information about the plan, contingencies can happen. The supervision can react and perform a repair thanks to action or communication.

Quality of Interaction management Even if a task is achieved, it could be done more or less efficiently and smoothly. All along an interaction session and a task, the supervision system thus estimates in real-time the Quality of Interaction (QoI) [190]. It measures the human engagement and the effectiveness of collaborative task performance. This information can then be used by the decision-making process to tune dynamically others processes such as the cost of properties for the REG.

4.3.5 Speaking and understanding

The Natural Language Generation is made of two parts, a static one for action verbs and communications to signify a lack of understanding and a dynamic part for the referring expressions. The content is determined by the REG and the linguistic realisation is done on the basis of concepts' labels in the ontology and a simple grammar model to know in which order the adjectives have to be sorted depending on the language.

Natural Language Understanding is more difficult due to the variety of ways the same information can be communicated. Moreover, in a given communication, we have different information. In the Director Task, we have the action to perform and the object on which the action has to be performed. First, we use the Google Speech To Text (STT) API to pass from an audio stream to a string of characters. Even if such technology is now well mastered, mistakes still appear in the transcription⁷. On the string, we perform a first analysis trying to match words and group of words with labels of the ontology. We used sliding windows limited on the length and the fuzzy match technique available with ontogenius. To cover a maximum of possibilities, several action verbs are described as well as synonyms for the concepts. We also tried to have a good hierarchy in the ontology types for the robot to better catch the concepts depending on the abstraction level used by the human. To refer to the blocks, some only use the terms “object” as they are the only ones involved in the task. At the end of this analysis, we have a list of concepts. Depending on the number of uncaught words (the words unknown in the ontology), we can already know if the understanding is poor or not. On the concept list, we first extract the action verb to know the instructed action (e.g. take, place, remove). The rest of

⁷And this, even more, depending on our English accent and the quality of the microphone used

the sentence is analysed thanks to the inverse grammar model for one part but also thanks to the properties ranges and domains. When we said “the red apple”, we do not have any word representing the used property⁸. With the analysis of the usable properties linking color to an apple (and thus to a vegetable and so on), we are able to find the corresponding property. The result of this analysis is a SPARQL query in the same way such query is used for the NLU. Depending on the number of concepts successfully linked we can estimate the comprehension quality. The SPARQL query describing the entity to act upon is then merged with the context of the task and sent to the ontology to find the target entity. In our case, the context would be the same as for the generation meaning that we are speaking about an object being above the table of interaction.

In the case the human gives an accurate description, we should have only one match for the target entity. However, we cannot consider that the human will never do a mistake or that the robot will fully understand the instruction. In this case, we run a REG on all the ambiguous entities. The context of these generations is the SPARQL query coming from the understanding process. If we know that we are already speaking of a green block, we do not have to recall it. We fall back into Natural Language Generation and generate sentence like “do you mean the block with a circle or a triangle ?”. When the human responds, we use again the SPARQL query coming from the first utterance and merge it with the newly understood.

For the Natural Language Understanding part, we could use machine learning approaches based on sequence-to-sequence (seq2seq) models like [214]. However, doing so we duplicate the knowledge already existing in the ontology to put it in a neural network. Unless creating a standard of concept identifier, such model should be trained for each used knowledge base in order to be compatible with it and use the same symbols. Having different symbols would lead to failure, having more symbols in the trained model would lead to failure (queries that could not match), and having fewer symbols in the trained model would lead to a lack of understanding. Moreover, in addition, to create the ontology, we would have to create the corresponding training dataset that is a huge amount of work even if artificially augmented dataset creation techniques exist.

Even if our method can be seen as being ha-doc, we ensure uniformity of the knowledge among the architecture. Moreover, it can be easily extended and even dynamically extended during an interaction.

4.4 Experiments

The architecture has been successfully implemented on a Pr2 robotic platform. The robot is thus able to play both roles, the director and the receiver. In this section, we comment and analyse a video⁹ of two experiments. The only emulated element is the human action recognition to trigger the next actions of the robot and it is

⁸It is often the case of the attributes where relations between entities are more explicit.

⁹<https://youtu.be/jtSyZeqBkp0>

the director.

4.4.1 Pr2 as the director

We start this section with a Pr2 in the role of the director (0:21 in the video). The setup is composed of six compartments including two compartments hidden from one side. One of these compartments is hidden from the human (the receiver) and one from the robot (the director). One block has been placed in each compartment. Consequently, only four blocks are known by both the human and the robot. Figure 4.7 is a visualization of the estimated geometric model of the human, maintained by the situation assessment component. Even if a block is present in each compartment, the leftmost one is not present in the estimation of the human's world. This absence comes from the fact that the human can not see what is in the compartment and thus can not know this block.

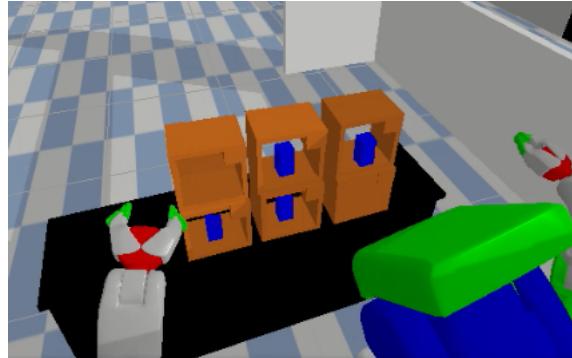


Figure 4.7: A visualization of the human's estimated goemetric world. Even if a block is present in each compartment, the left most one is not present in this worls since the human can not see this block.

Figure 4.8 represents the entire interaction when the robot is the director. At the initial state, four blocks are visible from both agents. Describing them with all their visual features, they are:

- A blue block with a blue border and a green triangle
- A blue block with a blue border and a green circle
- A blue block with a green border and a blue triangle
- A green block with a green border and a blue circle

Thanks to the estimation of the communication cost at task planning using the results of the REG, the robot is able to find the optimal sequence of blocks to intrust. The overall communication is thus minimized and the RE is unambiguous in each situation. In the initial state (a to b), the robot asks for the green block as only one of the visible blocks is green. Since the green block has a circle on it, removing it, only one of the remaining blocks has a circle on it. The robot can thus use this feature to refer to the next block (b to c).

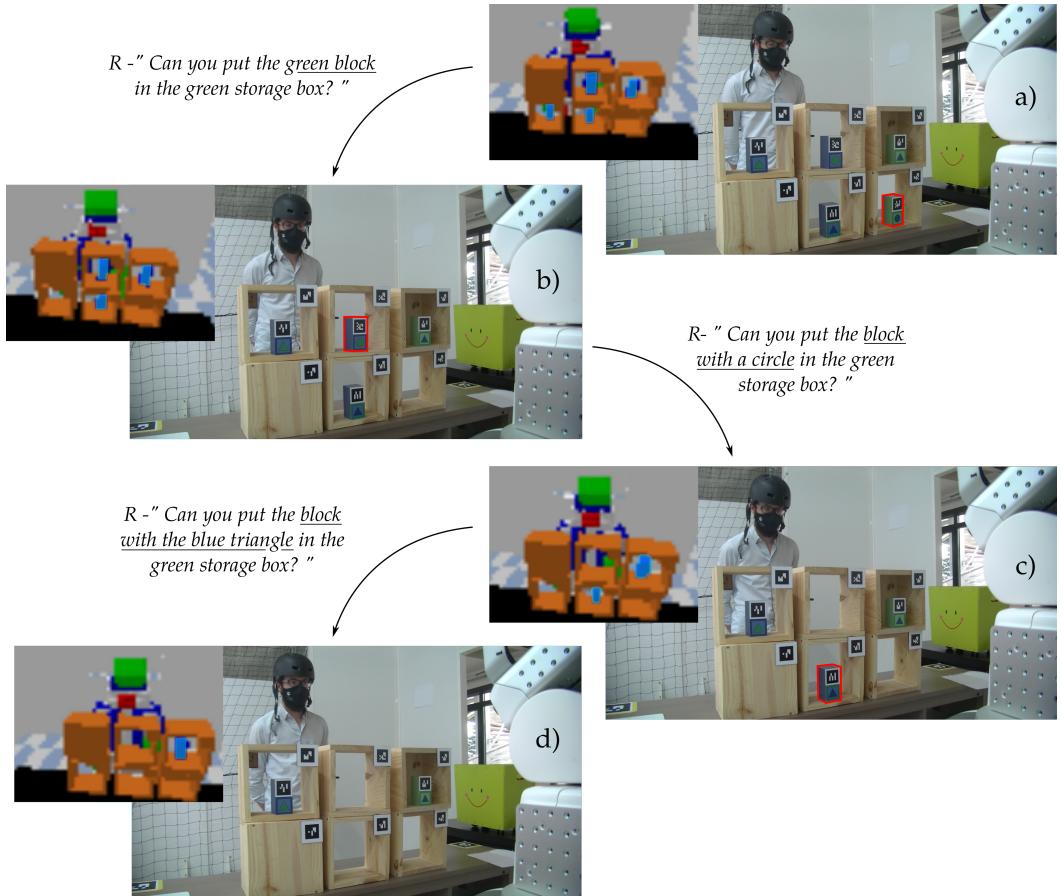


Figure 4.8: The director task handled by an autonomous PR2 robot in the role of the director. Each picture represents a step toward the achievement of the task. The estimated human perspective is displayed in the top left-hand corner of each picture. On top of the arrows leading to a new state are the sentences said by the robot to the human. The block outlined in red are the blocks referred to at each step.

4.4.2 Pr2 as the receiver

While in its previous role the robot just had to instruct the human, when the robot is the receiver (1:33 in the video) more reasoning is needed. A retranscription of part of the interaction is represented in figure 4.9. In the initial state, the same four blocks as previously are visible by both the agents. The robot is able to understand three actions: take, drop, and remove. The latter action is a combination of the two others.

For the first block (a to b on the figure), the human instruct the robot for the green block. The natural language understanding module return the SPARQL query:

(?0, isA, Block), (?0, hasColor, green)

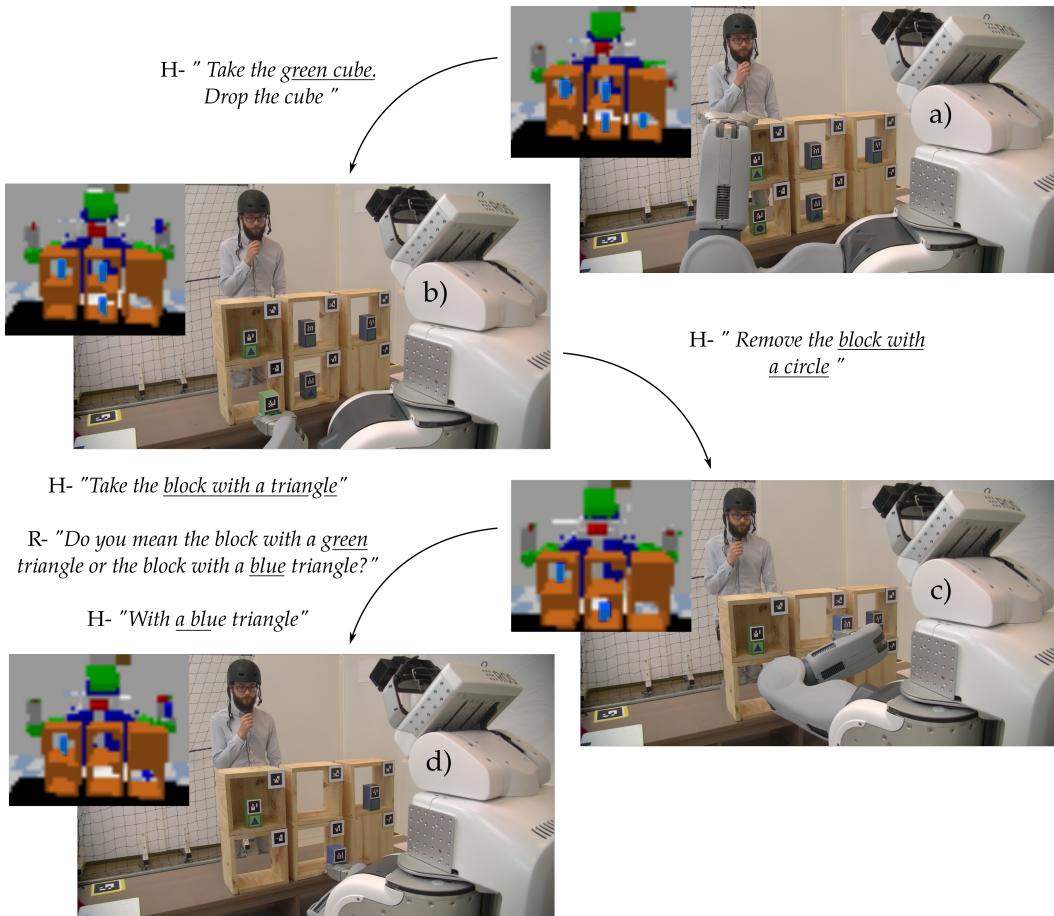


Figure 4.9: The director task handled by an autonomous PR2 robot in the role of the receiver. Each picture represents a step toward the achievement of the task. The estimated human perspective is displayed in the top left-hand corner of each picture. On top of the arrows leading to a new state are the sentences said by the human to the human and for the last situation the refinement query from the robot to the human.

Since the robot assumes the human to speak about objects on the table, the understood query is merged with another one representing the context of the task: (?0, isAbove, table_1). Querying the human estimated ontology with the merged query, only one entity match. There is no ambiguity in human instruction. The robot takes the instructed block then drop it. If the query was applied to the robot ontology, two blocks would have matched since the block unknown by the human is also green. It goes the same for, the second instruction. There is no ambiguity. The SPARQL query related to this second block is:

$$(?0, \text{isA}, \text{Block}), (?0, \text{hasFigure}, ?1), (?1, \text{isA}, \text{Circle})$$

The third instruction given by the human as the director is the most interesting for us. The human asks for “*The block with a triangle*”. However, the speech to text

returns “*take is about to whip a triangle*”. With this sentence, the NLU module can only extract two known concepts being “take” and “triangle”. Due to the limited amount of word understood, it does not try to generate a SPARQL query. The robot thus informs the human about its incapacity and repeat the heard sentence as a back loop for the human. At the second try, the sentence is understood and gives the query:

(?0, isA, Block), (?0, hasFigure, ?1), (?1, isA, Triangle)

However, matching this query to the human’s estimated ontology, we get two results. Once again, matching it to the robot’s ontology would give three results but the third one is not visible from the human. Since all the concepts of the sentence have been understood and linked together to create the query, the human should have made a mistake, providing an ambiguous referring expression.

To be proactive, we want the robot to ask precision about the block to take by proposing visual features to distinguish them. To do so, we use the REG algorithm on each ambiguous block. As a context for the REG, we pass the previously merged SPARQL query. It represents what has already been understood by the robot. In the current situation, the robot thus performs two REG and their results are used to generate the disambiguation sentence:

“Do you mean the block with a green triangle or the block with a blue triangle?”

When the human responds, for sure it does not generate a complete description of the block to be taken. It rather answers the question. The query extracted from his answer is thus combined with the previously understood one in case some information is missing. Matching this last query to the human’s estimated ontology, the robot finally get the block to remove.

With this latter case, we saw how the robot can react to a human’s mistake and use the REG to help the progress of the task, even if it is the receiver.

4.5 Open challenges for the community

So far, we have described the main abilities a robot has to be endowed with to perform the Director Task. Then, we have proposed a cognitive robot architecture handling the Director Task in its simplest form, both for the director and receiver roles. However, we have only tackled the normals cases that the task offers. In this section, we now present some open challenges that we have identified around the task. In addition, since we see that the environment of the task can be controlled, we also propose some user studies to investigate the ways of sharing information.

4.5.1 Challenges to take up

The components or abilities related to each challenge are reported in the following table. The list of challenges is not exhaustive. Moreover, even if some challenges

have already been mentioned among the presentation of the components, they are here reported as requiring finer and more generic management.

Challenged abilities / components	Challenges
Perspective-taking	1
Communication	4, 6, 7
Task planning	2, 3, 4
Reference generation	4, 5, 8
Contingencies handling	1, 2, 3, 4

1. **Finer contingency analysis:** In this task, failures can easily arise due to the high ambiguity between the blocks and the difference of perspective. Such failures have to be handled by the robot and to do so their origin have to be understood to react to them in an appropriate manner. In the case the human as the receiver does not take the instructed block, the failure can have different origins. First, it could come from a perspective not taken into account. However, this lack of perspective-taking can be assigned either to the director or the receiver. Another origin can be a description not clear enough or correct but too complex. Finally, it can just be an error of inattention. Each of these origins has to be handled in a different way.
2. **Handling contingencies as errors:** When the receiver takes another block than the one instructed, has to fix the error through communication and negotiation. First, the wrong block has to be put back in its original compartment. Then, the robot has to adapt its original instruction to make it clearer and improve the chances to have the receiver taking the right one.
3. **Not handling contingencies as errors:** When the receiver takes the wrong block, even if it is the instructed one, it can however be part of the goal. In this case, the robot not necessarily has to repair the plan, asking the human to put it back as no order is required for the task. It can thus re-plan or re-instruct the human for the same block without further information. It may also mention to the receiver for the mistake and explain that it does not matter because this one is also part of the goal. Rather than re-planning, the robot could use a conditional plan, anticipating possible confusions, and adapt according to the human's actions.
4. **Adapting to recurrent failures:** In case of recurrent failures by the partner or degradation of the Quality of interaction with numbers of latencies, the robot could try to analyse the origin of the problems and determine if a common point exists. If so, it can adapt itself to increase the QoI and reduce the failures. For example, if the partner is found to have difficulties with certain visual features, the robot can react through properties' cost adaptation. If the partner still consider the removed blocks, it can react through communication context adaptation.

5. **Allowing spatial references:** As explained in section in the origins of the task, the Director Task is originally a task to test referential communication. Even if the present version asks the participants to not use spatial reference, this rule could be relaxed to study perspective-corrected spatial Referring Expression Generation.
6. **Understanding the human instructions:** In the current implemented version, the robot can only understand a limited vocabulary and restricted to the context of the task. In this way, the robot only understands descriptions of blocks. In a more natural interaction, humans could use a richer vocabulary, give a single instruction in multiple steps, or have communications not directly linked to the task. During tests for designing the task, it was common to have instructions like “take the block with a ... triangle. No, rather the one with a green border”. Such complex communications where the director corrects his explanations should have to be managed by the robot.
7. **Introducing code words:** As presented through the design of the used material, the visual features on the blocks have been chosen in a way to allow the visualisation of landscapes on them, with a little imagination. Considering multiple tasks with the same robot and human, alternating the roles if needed, the introduction of coded words could be interesting to reduce the communication complexity and thus the overall efficiency. The robot could thus try to negotiate some coded words. Once introduced, it would also have to remember them and understand them as being part of a description.
8. **Communicating about multiple blocks:** With the currently implemented system, the director only instruct one block at a time. It can either be through a reference matching all of them, like “Take all the blocks with a triangle on them”, or multiple descriptions in a raw. The latter method could bring different kinds of communications such as “I do not remember the instruction for the last block” when the human is the receiver. For the first method, when the robot is the receiver, it would also be a different kind of instructions to interpret.

4.5.2 User studies to perform

Some robot behaviours, mainly about the referring expression generation, have been designed with regard to the current literature. However, the Director Task could be used to refine them thanks to user studies. More than providing a controlled task and environment, this task has the advantage to hide the real goal of the study. From the participant point of view, the goal is to remove blocks from compartments. The goal of the study can be focused on other aspects and could help the community in the design of architectures applied to more realistic scenarios.

Currently, the references to the blocks are made in such a way as to minimize the number of visual features used while staying discriminative. Such implementation

fit Grice's Maxim of Quantity [112]. However, due to all the cognitive mechanisms to use in this task (e.g., perspective-taking) and the high ambiguity among the blocks, evaluating such behaviour compared to a full explanation could be interesting. Indeed, giving a reference with more information than needed would ensure to not match blocks being only visible by the receiver, which could help them to select the right block. In a way, it could allow to not use perspective-taking at the cost of complex communications.

During the material presentation, we have introduced a special compartment equipped with a wire mesh. Because a block in such a compartment is visible from the receiver but not accessible, referring to a block matching also this one could disturb the receiver. We could expect such a situation to require a higher cognitive load to determine the right block to take. Such behavior could also be interesting to evaluate as even if the human receiver is able to take the right block it could also decrease the Quality of Interaction. In the same way, a block previously visible by the receiver and that the director moves in a hidden compartment could disturb the receiver to interpret a description.

CHAPTER 5

A robot in a storage room

Conclusion

On the Human Agent Interaction Guidelines

Limitations and Future Work

Notes

check refs to CA	4
check si evolution depuis 2006	22
needed ? don't know what to put inside...	35
modifs à faire	42
lien avec commitment chap 1	43
derniere tache existera???	52
related work	53
mettre state machine théorique que j'ai faite ? je n'ai pas redeveloppé ce module depuis mummer	60
faire un état de l'art rapide ?	61
replan	68
deplacer presentation dans mummer ici?	70
to remove once written in chapter 1	84
voir lien avec chapter 1	103
voir lien avec chapter 1	103
reminder def	105
ref sec	117
add colors and rules	157
ajouter tous les prenoms pour harmoniser	192

APPENDIX A

Code of JAHRVIS ROS-Jason Agents

[add colors and rules]

A.1 Human Actions Monitoring

```
+NewPredicate [source(percept)]
: (action(_30, _31, Name, _32, Params) [source(robot_executor)] & .
  isPredicateRobotAction(NewPredicate, Params))

+NewPredicate [source(percept)]
: (isMovementRelatedToActions(NewPredicate,
  ActionList) & (possibleStartedActions(ActionList2) &
  (jia.intersection_literal_list(ActionList, ActionList2, I) &
  ((.length(I) > 0))))
<- jia.update_action_list(possibleStartedActions, ActionList);
  ++possibleStartedActions(ActionList).

+NewPredicate [source(percept)]
: isMovementRelatedToActions(NewPredicate, ActionList)
<- ++possibleStartedActions(ActionList).

+NewPredicate [source(percept)]
: (isProgressionEffect(NewPredicate, ActionList) &
  matchingStartedActions(Predicate, ActionList, ActionList2))
<- jia.update_action_list(possibleStartedActions, ActionList2);
  ++possibleProgressingActions(ActionList2).

+NewPredicate [source(percept)]
: isProgressionEffect(NewPredicate, ActionList)
<- ++possibleProgressingActions(ActionList).

+NewPredicate [source(percept)]
: (isNecessaryEffect(NewPredicate, ActionList) &
  (matchingProgressingActions(Predicate, ActionList,
    ActionList2) | matchingStartedActions(Predicate, ActionList,
    ActionList2)))
```

```

<- !addFinishedActions(ActionList2).

+!addFinishedActions(ActionList)
  <- jia.update_action_list(possibleStartedActions, ActionList);
  jia.update_action_list(possibleProgressingActions,
ActionList);
  ++possibleFinishedActions(ActionList).

+NewPredicate [source(percept)]
  : isNecessaryEffect(NewPredicate, ActionList2)
  <- ++possibleFinishedActions(ActionList2).

+possibleStartedActions(ActionList)
  <- .send(human_management, tell, possibleStartedActions(ActionList));
  .fork(or, .wait((possibleProgressingActions(A) &
  (jia.intersection_literal_list(A, ActionList, I) &
  ((.length(I) > 0))), .wait((possibleFinishedActions(A) &
  (jia.intersection_literal_list(A, ActionList, I) &
  ((.length(I) > 0)))), !timeoutMovement(ActionList)).

+!timeoutMovement(ActionList)
  <- .wait(50000);
  -possibleStartedActions(ActionList) [add_time(_33)].

+possibleProgressingActions(ActionList)
  <- .send(human_management, tell, possibleProgressingActions(ActionList));
  .fork(or, .wait((possibleFinishedActions(A) &
  (jia.intersection_literal_list(A, ActionList, I) &
  ((.length(I) > 0))), !timeoutProgressing(ActionList)).

+possibleFinishedActions(ActionList)
  <- .send(human_management, tell, possibleFinishedActions(ActionList));
  -possibleFinishedActions(ActionList).

-possibleStartedActions(ActionList)
  <- .send(human_management, untell, possibleStartedActions(ActionList)).

-possibleProgressingActions(ActionList)
  <- .send(human_management, untell, possibleProgressingActions(ActionList)).

+!timeoutProgressing(ActionList)

```

```
<- .wait(30000);
-possibleProgressingActions(ActionList) [add_time(_34)];
.findall(possibleStartedActions(A), (possibleStartedActions(A)
& (jia.intersection_literal_list(A, ActionList, I) &
((.length(I) > 0))), L);
.foreach(.member(M, L), -M;
+M).

+!drop(G
<- !reset.
```

APPENDIX B

Scaling Functions

As the metrics are aggregated to compute the QoI, their values need to be on the same scale. In order to do this, we use scaling functions rescaling metrics into a range of $[-1, 1]$, as the QoI bounds. As all the metrics does not have the same properties, they have to be scaled by using different functions. The two properties to check to choose which function to apply to which metric are the following ones:

- does the metric already have a bounded value ?
- what value of the metric should make the QoI decrease, increase or remain the same ?

Therefore, we designed three functions to be used with metrics having bounded values and three functions for metrics that do not have upper bounds. Then, among these two sets of functions, it is possible to choose the one to use according to the positive, neutral or negative impact a value should have on the QoI.

B.1 Scaling of bounded metrics: Min-Max Normalization

We defined three min-max normalization functions, illustrated in Fig. B.1. They were designed to be used for metrics whose values belong to a bounded set, *i.e.*, metrics for which the minimum and maximum values are known. The first function is to apply in cases for which a measure approaching the bound value b_1 has a negative impact on the quality evaluation whereas a measure approaching b_2 has a positive one. It allows to scale a measure x between -1 and 1:

$$n_1(x) = 2 * \frac{x - b_1}{b_2 - b_1} - 1 \quad (\text{B.1})$$

The second function is intended to be applied in cases for which a measure approaching the bound value b_1 has a neutral impact on the quality evaluation whereas a measure approaching b_2 has a positive one. It allows to scale a measure x between 0 and 1:

$$n_2(x) = \frac{x - b_1}{b_2 - b_1} \quad (\text{B.2})$$

Finally, the last function is to apply in cases for which a measure approaching the bound value b_1 has an negative impact on the quality evaluation whereas a measure

approaching b_2 has a neutral one. It allows to scale a measure x between -1 and 0:

$$n_3(x) = \frac{x - b_2}{b_2 - b_1} \quad (\text{B.3})$$

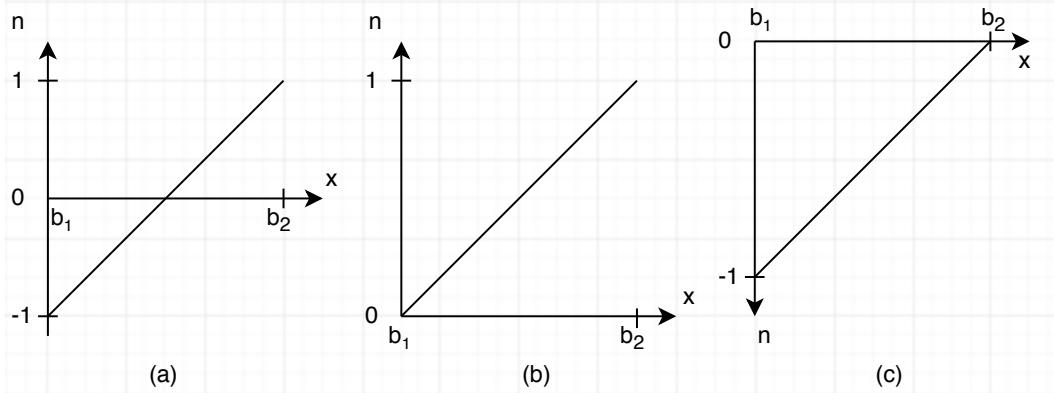


Figure B.1: (a), (b) and (c) respectively represent the min-max normalization functions (B.1), (B.2) and (B.3)

B.2 Scaling of unbounded metrics: Sigmoid Normalization

We defined three sigmoid-like functions to scale and squash values of metrics without an upper bound. As for the min-max normalization, there is one function to scale the metrics values between -1 and 1, another one to scale between 0 and 1 and the last one to scale between -1 and 0.

The first function allows to scale between -1 and 1 the values of a metric, for a metric whose values are between 0 and $+\infty$ (e.g. a duration whose final value is unknown during the execution). The function is defined as:

$$s_1(x) = 1 - 2 \exp \left(-\ln(2) \left(\frac{x}{th} \right)^k \right), x > 0 \quad (\text{B.4})$$

with $s_1(x) \in [-1, 1]$, th the value of the sigmoid's midpoint (*i.e.*, $s_1(th) = 0$) and, k setting the shape of the function curve. k and th values are set off-line by the designer and they allow to define the shape of the metric scaling.

The second function is designed for metric which cannot have a negative impact on the QoI as it scales the value between 0 and 1 (and with $x \in [0, +\infty]$ as well):

$$s_2(x) = 1 - \exp \left(-\ln(2) \left(\frac{x}{th} \right)^k \right), x > 0 \quad (\text{B.5})$$

with $s_2(x) \in [0, 1]$, th the value of the sigmoid's midpoint (i.e., $s_2(th) = 0.5$) and, k setting the shape of the function curve.

The third function is designed for metric which cannot have a positive impact on the QoI as it scales the value between -1 and 0 (and with $x \in [0, +\infty]$ as well):

$$s_3(x) = -1 + \exp\left(-\ln(2)\left(\frac{x}{th}\right)^k\right), x > 0 \quad (\text{B.6})$$

with $s_3(x) \in [-1, 0]$, th the value of the sigmoid's midpoint (i.e., $s_3(th) = -0.5$) and, k setting the shape of the function curve.

The functions $s_1(x)$ and $s_2(x)$ are illustrated in Fig. B.2 with four examples.

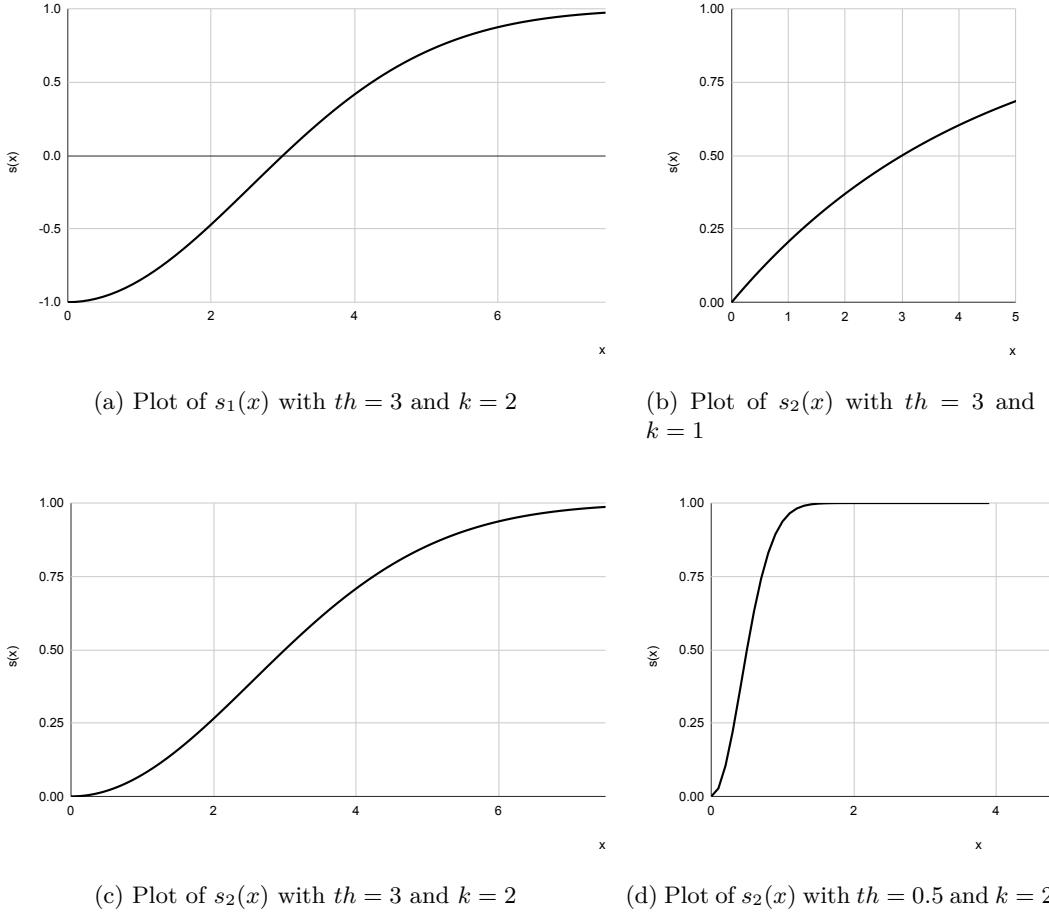


Figure B.2: Plots of the sigmoid-like functions $s_1(x)$ and $s_2(x)$ with different parameters values

Bibliography

- [1] Norman Donald A. *The psychology of everyday things*. Basic Books, New York, 1988. (Cited in page 21.)
- [2] Henny Admoni and Brian Scassellati. Social eye gaze in human-robot interaction: a review. *Journal of Human-Robot Interaction*, 6(1):25–63, 2017. (Cited in page 29.)
- [3] Rachid Alami, Aurélie Clodic, Vincent Montreuil, Emrah Akin Sisbot, and Raja Chatila. Toward human-aware robot task planning. In *AAAI spring symposium: to boldly go where no human-robot team has gone before*, pages 39–46, 2006. (Cited in page 30.)
- [4] Gary L. Allen. Gestures accompanying verbal route directions: Do they point to a new avenue for examining spatial representations? *Spatial Cognition & Computation*, 3(4):259–268, 2003. (Cited in page 90.)
- [5] Federica Amici and Lucas M Bietti. Coordination, collaboration and cooperation: Interdisciplinary perspectives. *Interaction Studies*, 16(3):vii–xii, 2015. (Cited in page 13.)
- [6] Kristin Andrews. *Do apes read minds?: Toward a new folk psychology*. MIT Press, 2012. (Cited in page 24.)
- [7] Salvatore M. Anzalone, Sofiane Boucenna, Serena Ivaldi, and Mohamed Chetouani. Evaluating the engagement with social robots. *International Journal of Social Robotics*, vol. 7(4):pp. 465–478, Aug 2015. (Cited in pages 73 and 124.)
- [8] Michael Argyle. *Social Interaction*. Transaction Publishers, 1973. (Cited in page 5.)
- [9] Janet Wilde Astington and Jennifer M Jenkins. Theory of mind development and social understanding. *Cognition & Emotion*, 9(2-3):151–165, 1995. (Cited in page 26.)
- [10] John Langshaw Austin. *How to Do Things with Words*. Clarendon Press, 1962. (Cited in page 24.)
- [11] Patric Bach, Toby Nicholson, and Matthew Hudson. The affordance-matching hypothesis: how objects guide action understanding and prediction. *Frontiers in human neuroscience*, 8:254, 2014. (Cited in page 20.)
- [12] Roger Bakeman and Lauren B Adamson. Coordinating attention to people and objects in mother-infant and peer-infant interaction. *Child development*, pages 1278–1289, 1984. (Cited in page 21.)

- [13] Jimmy Baraglia, Maya Cakmak, Yukie Nagai, Rajesh P. N. Rao, and Minoru Asada. Efficient human-robot collaboration: When should a robot take initiative? *International Journal of Robotics Research*, vol. 36(5-7):pp. 563–579, 2017. (Cited in page 71.)
- [14] Jimmy Baraglia, Maya Cakmak, Yukie Nagai, Rajesh PN Rao, and Minoru Asada. Efficient human-robot collaboration: When should a robot take initiative? *The International Journal of Robotics Research*, 36(5-7):563–579, 2017. (Cited in page 35.)
- [15] Yvonne Barnes-Holmes, Louise McHugh, and Dermot Barnes-Holmes. Perspective-taking and theory of mind: A relational frame account. *The Behavior Analyst Today*, 5(1):15, 2004. (Cited in page 27.)
- [16] Simon Baron-Cohen. *Mindblindness*. MIT Press, 1995. (Cited in page 31.)
- [17] Simon Baron-Cohen, Alan M Leslie, and Uta Frith. Does the autistic child have a “theory of mind”? *Cognition*, 21(1):37–46, 1985. (Cited in pages 27, 40, and 138.)
- [18] Pablo Barros, Nestor T Maciel-Junior, Bruno JT Fernandes, Byron LD Bezerra, and Sergio MM Fernandes. A dynamic gesture recognition and prediction system using the convexity approach. *Computer Vision and Image Understanding*, 155:139–149, 2017. (Cited in page 30.)
- [19] Elizabeth Bates. *The emergence of symbols: Cognition and communication in infancy*. Academic Press, 1979. (Cited in page 26.)
- [20] Andrea Bauer, Klaas Klasing, Tingting Xu, Stefan Sosnowski, Georgios Lidoris, Quirin Muhlbauer, Tinguang Zhang, Florian Rohrmuller, Dirk Wollherr, Kolja Kuhnlenz, et al. The autonomous city explorer project. In *IEEE International Conference on Robotics and Automation (ICRA)*, pages 1595–1596. IEEE, 2009. (Cited in page 86.)
- [21] Andrea Bauer, Dirk Wollherr, and Martin Buss. Human–robot collaboration: a survey. *International Journal of Humanoid Robotics*, 5(01):47–66, 2008. (Cited in page 44.)
- [22] Cristina Becchio, Luisa Sartori, and Umberto Castiello. Toward you: The social side of actions. *Current Directions in Psychological Science*, 19(3):183–188, 2010. (Cited in page 13.)
- [23] Michael Beetz, Ferenc Bálint-Benczédi, Nico Blodow, Daniel Nyga, Thiemo Wiedemeyer, and Zoltán-Csaba Marton. Robosherlock: Unstructured information processing for robot perception. In *IEEE International Conference on Robotics and Automation (ICRA)*, pages 1549–1556, 2015. (Cited in page 138.)

- [24] Michael Beetz, Daniel Beßler, Andrei Haidu, Mihai Pomarlan, Asil Kaan Bozcuoğlu, and Georg Bartels. Know rob 2.0—a 2nd generation knowledge processing framework for cognition-enabled robotic agents. In *IEEE International Conference on Robotics and Automation (ICRA)*, pages 512–519. IEEE, 2018. (Cited in page 138.)
- [25] Michael Beetz, Lorenz Mösenlechner, and Moritz Tenorth. Cram—a cognitive robot abstract machine for everyday manipulation in human environments. In *2010 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 1012–1017. IEEE, 2010. (Cited in pages 34 and 45.)
- [26] Esubalew Bekele and Nilanjan Sarkar. Psychophysiological feedback for adaptive human–robot interaction (hri). In Stephen H. Fairclough and Kiel Gilleade, editors, *Advances in Physiological Computing*, pages pp. 141–167. Springer London, 2014. (Cited in page 73.)
- [27] Kathleen Belhassen, Aurélie Clodic, Hélène Cochet, Marketta Niemelä, Päivi Heikkilä, Hanna Lammi, and Antti Tammela. Human-human guidance study. Technical report, 2017. (Cited in pages 89 and 90.)
- [28] Kathleen Belhassen, Víctor Fernández Castro, and Amandine Mayima. A horizontal approach to communication for human-robot joint action: Towards situated and sustainable robotics. In *Culturally Sustainable Social Robotics*, pages 204–214. IOS Press, 2020. (Cited in page 12.)
- [29] Kathleen Belhassen, Víctor Fernández Castro, Amandine Mayima, Aurélie Clodic, Elisabeth Pacherie, Michèle Guidetti, Rachid Alami, and Hélène Cochet. Addressing joint action challenges in hri: Insights from psychology and philosophy. *Acta Psychologica*. submitted. (Cited in page 12.)
- [30] S. Bensch., A. Jevtić., and T. Hellström. On interaction quality in human–robot interaction. In *Proceedings of the 9th International Conference on Agents and Artificial Intelligence (ICAART)*, pages pp. 182–189, 2017. (Cited in page 73.)
- [31] Matt Berlin, Jesse Gray, Andrea Lockerd Thomaz, and Cynthia Breazeal. Perspective taking: An organizing principle for learning in human–robot interaction. In *AAAI*, volume 2, pages 1444–1450, 2006. (Cited in page 31.)
- [32] Cindy L. Bethel and Robin R. Murphy. Review of human studies methods in hri and recommendations. *International Journal of Social Robotics*, vol. 2(4):pp. 347–359, Dec 2010. (Cited in page 72.)
- [33] Paul Bloom and Tim P German. Two reasons to abandon the false belief task as a test of theory of mind. *Cognition*, 77(1):B25–B31, 2000. (Cited in page 28.)

- [34] Dan Bohus, Chit W Saw, and Eric Horvitz. Directions Robot: In-the-Wild Experiences and Lessons Learned. In *Proceedings of the 13th International Conference on Autonomous Agents and Multiagent Systems (AAMAS)*, page 8, 2014. (Cited in page 87.)
- [35] Rafael H. Bordini, Jomi Fred Hübner, and Michael Wooldridge. *Programming Multi-Agent Systems in AgentSpeak Using Jason (Wiley Series in Agent Technology)*. John Wiley & Sons, Inc., 2007. (Cited in pages 45 and 46.)
- [36] Jeffrey M Bradshaw, Paul J Feltovich, and Matthew Johnson. Human–agent interaction. In *The handbook of human-machine interaction*, pages 283–300. CRC Press, 2017. (Cited in page 29.)
- [37] Marcel Brass, Harold Bekkering, and Wolfgang Prinz. Movement observation affects movement execution in a simple response task. *Acta psychologica*, 106(1-2):3–22, 2001. (Cited in page 19.)
- [38] Michael Bratman. Two faces of intention. *The Philosophical Review*, 93(3):375–405, 1984. (Cited in page 16.)
- [39] Michael Bratman et al. *Intention, plans, and practical reason*, volume 10. Harvard University Press Cambridge, MA, 1987. (Cited in page 34.)
- [40] Michael E Bratman. Shared cooperative activity. *The philosophical review*, 101(2):327–341, 1992. (Cited in pages 20 and 23.)
- [41] Michael E Bratman. Shared intention. *Ethics*, 104(1):97–113, 1993. (Cited in pages 16 and 17.)
- [42] Michael E Bratman. *Shared agency: A planning theory of acting together*. Oxford University Press, 2014. (Cited in page 18.)
- [43] Michael E Bratman, David J Israel, and Martha E Pollack. Plans and resource-bounded practical reasoning. *Computational intelligence*, 4(3):349–355, 1988. (Cited in page 34.)
- [44] Lars Braubach, Alexander Pokahr, and Winfried Lamersdorf. Jadex: A bdi-agent system combining middleware and reasoning. In Rainer Unland, Monique Calisti, and Matthias Klusch, editors, *Software Agent-Based Applications, Platforms and Development Kits*, pages 143–168, Basel, 2005. (Cited in page 45.)
- [45] Jake Brawer, Olivier Mangin, Alessandro Roncone, Sarah Widder, and Brian Scassellati. Situated human–robot collaboration: predicting intent from grounded natural language. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 827–833. IEEE, 2018. (Cited in page 129.)

- [46] Cynthia Breazeal. Regulation and entrainment in human—robot interaction. *The International Journal of Robotics Research*, 21(10-11):883–902, 2002. (Cited in pages 30 and 32.)
- [47] Cynthia Breazeal. Emotion and sociable humanoid robots. *International journal of human-computer studies*, 59(1-2):119–155, 2003. (Cited in pages 30 and 32.)
- [48] Cynthia Breazeal. Function meets style: insights from emotion theory applied to hri. *IEEE Transactions on Systems, Man, and Cybernetics*, 34(2):187–194, 2004. (Cited in page 30.)
- [49] Cynthia Breazeal et al. A motivational system for regulating human-robot interaction. In *AAAI-98 Proceedings*, pages 54–61, 1998. (Cited in page 30.)
- [50] Ingar Brinck. The role of intersubjectivity in the development of intentional communication. *The shared mind: Perspectives on intersubjectivity*, pages 115–140, 2008. (Cited in page 26.)
- [51] Ingar Brinck and Christian Balkenius. Mutual recognition in human-robot interaction: A deflationary account. *Philosophy and Technology*, 1(1):53–70, 2018. (Cited in page 26.)
- [52] Guilhem Buisan and Rachid Alami. A human-aware task planner explicitly reasoning about human and robot decision, action and reaction. In *Companion of the 2021 ACM/IEEE International Conference on Human-Robot Interaction*, HRI ’21 Companion, page 544–548, New York, NY, USA, 2021. (Cited in pages 42, 68, and 141.)
- [53] Wolfram Burgard, Armin B Cremers, Dieter Fox, Dirk Hähnel, Gerhard Lakemeyer, Dirk Schulz, Walter Steiner, and Sebastian Thrun. The museum tour-guide robot rhino. In *Autonome Mobile Systeme 1998*, pages 245–254. Springer, 1999. (Cited in page 86.)
- [54] George Butterworth and Nicholas Jarrett. What minds have in common is space: Spatial mechanisms serving joint visual attention in infancy. *British journal of developmental psychology*, 9(1):55–72, 1991. (Cited in page 21.)
- [55] Michael D. Byrne and Susan Bovair. A working memory model of a common procedural error. *Cognitive Science*, 21(1):31–61, 1997. (Cited in page 108.)
- [56] Luigia Camaioni, Paola Perucchini, Francesca Bellagamba, and Cristina Colonnese. The role of declarative pointing in developing a theory of mind. *Infancy*, 5(3):291–308, 2004. (Cited in page 26.)
- [57] Maxime Caniot, Vincent Bonnet, Maxime Busy, Thierry Labaye, Michel Beombs, Sébastien Courtois, and Edouard Lagrue. Adapted pepper. Technical report, SoftBank Robotics Europe, 2020. (Cited in page 109.)

- [58] Malinda Carpenter. Just how joint is joint action in infancy? *Topics in Cognitive Science*, 1(2):380–392, 2009. (Cited in page 12.)
- [59] Malinda Carpenter and Kristin Liebal. Joint attention, communication, and knowing together in infancy. *Joint attention: New developments in psychology, philosophy of mind, and social neuroscience*, pages 159–181, 2011. (Cited in page 22.)
- [60] Víctor Fernández Castro and Manuel Heras-Escribano. Social cognition: A normative approach. *Acta Analytica*, 35(1):75–100, 2020. (Cited in page 24.)
- [61] Víctor Fernández Castro and Elisabeth Pacherie. Joint actions, commitments and the need to belong. *Synthese*, pages 1–30, 2020. (Cited in page 13.)
- [62] Ravi Teja Chadalavada, Henrik Andreasson, Robert Krug, and Achim J Lilienthal. That’s on my mind! robot to human intention communication through on-board projection on shared floor space. In *2015 European Conference on Mobile Robots (ECMR)*, pages 1–6. IEEE, 2015. (Cited in pages 29 and 30.)
- [63] Raphaël Chalmeau and Alain Gallo. La coopération chez les primates. *L’Année psychologique*, 95(1):119–130, 1995. (Cited in page 13.)
- [64] Mai Lee Chang, Reymundo A Gutierrez, Priyanka Khante, Elaine Schaertl Short, and Andrea Lockerd Thomaz. Effects of integrated intent recognition and communication on human-robot collaboration. In *2018 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 3381–3386. IEEE, 2018. (Cited in page 30.)
- [65] Marjorie H Charlop-Christy and Sabrina Daneshvar. Using video modeling to teach perspective taking to children with autism. *Journal of Positive Behavior Interventions*, 5(1):12–21, 2003. (Cited in page 27.)
- [66] Yingfeng Chen, Feng Wu, Wei Shuai, and Xiaoping Chen. Robots serve humans in public places—kejia robot as a shopping assistant. *International Journal of Advanced Robotic Systems*, 14(3):1–20, 2017. (Cited in page 86.)
- [67] Hui-Qing Chong, Ah-Hwee Tan, and Gee-Wah Ng. Integrated cognitive architectures: a survey. *Artificial Intelligence Review*, 28(2):103–130, 2007. (Cited in page 33.)
- [68] Herbert H Clark. *Arenas of language use*. University of Chicago Press, 1992. (Cited in pages 22 and 24.)
- [69] Herbert H Clark. *Using language*. Cambridge university press, 1996. (Cited in pages 13 and 22.)
- [70] Herbert H Clark. Social actions, social commitments. In *Roots of human sociality*, pages 126–150. Routledge, 2006. (Cited in pages 14 and 18.)

- [71] Herbert H Clark and J Wade French. Telephone goodbyes. *Language in Society*, pages 1–19, 1981. (Cited in page 7.)
- [72] Aurélie Clodic, Hung Cao, Samir Alili, Vincent Montreuil, Rachid Alami, and Raja Chatila. Shary: a supervision system adapted to human-robot interaction. In *Experimental robotics*, pages 229–238. Springer, 2009. (Cited in pages 35 and 141.)
- [73] Aurélie Clodic, Sara Fleury, Rachid Alami, Raja Chatila, Gérard Bailly, Ludovic Brethes, Maxime Cottret, Patrick Danes, Xavier Dollat, Frédéric Elisei, et al. Rackham: An interactive robot-guide. In *IEEE International Symposium on Robot and Human Interactive Communication (ROMAN)*, pages 502–509. IEEE, 2006. (Cited in page 86.)
- [74] Aurélie Clodic, Elisabeth Pacherie, Rachid Alami, and Raja Chatila. Key Elements for Human Robot Joint Action. In *Sociality and Normativity for Robots Philosophical Inquiries into Human-Robot Interactions*, Studies in the Philosophy of Sociality, pages 159–177. Springer, 2017. (Cited in page 14.)
- [75] Philip R Cohen and Hector J Levesque. Intention is choice with commitment. *Artificial intelligence*, 42(2-3):213–261, 1990. (Cited in pages 16 and 34.)
- [76] Philip R Cohen and Hector J Levesque. Teamwork. *Nous*, 25(4):487–512, 1991. (Cited in pages 12, 16, 18, 20, 23, and 30.)
- [77] Richard Cooper and Tim Shallice. Contention scheduling and the control of routine activities. *Cognitive neuropsychology*, 17(4):297–338, 2000. (Cited in page 19.)
- [78] Michael D Coover, Tiffany Lee, Ivan Shindev, and Yu Sun. Spatial augmented reality as a method for a mobile robot to communicate intended movement. *Computers in Human Behavior*, 34:241–248, 2014. (Cited in pages 29 and 30.)
- [79] Arianna Curioni, Gunther Knoblich, and Natalie Sebanz. *Joint Action in Humans: A Model for Human-Robot Interactions*, pages 1–19. Springer Netherlands, Dordrecht, 2017. (Cited in pages 14, 87, and 88.)
- [80] Kerstin Dautenhahn, Bernard Ogden, and Tom Quick. From embodied to socially embedded agents—implications for interaction-aware robots. *Cognitive Systems Research*, 3(3):397–428, 2002. (Cited in page 9.)
- [81] Jenny L Davis and Tony P Love. Self-in-self, mind-in-mind, heart-in-heart: The future of role-taking, perspective taking, and empathy. In *Advances in group processes*. Emerald Publishing Limited, 2017. (Cited in page 27.)
- [82] Daniel C. Dennett. *Brainstorms: Philosophical Essays on Mind and Psychology*. Bradford Books, 1978. (Cited in page 27.)

- [83] Sandra Devin. *Decisional issues during human-robot joint action*. PhD thesis, 2017. Thèse de doctorat dirigée par Alami, Rachid et Ghallab, Malik Intelligence Artificielle Toulouse, INPT 2017. (Cited in page 38.)
- [84] Sandra Devin and Rachid Alami. An implemented theory of mind to improve human-robot shared plans execution. In *2016 11th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 319–326. IEEE, 2016. (Cited in pages 31, 35, 44, 67, and 141.)
- [85] Sandra Devin, Aurélie Clodic, and Rachid Alami. About decisions during human-robot shared plan achievement: Who should act and how? In *International Conference on Social Robotics*, pages 453–463. Springer, 2017. (Cited in pages 39 and 67.)
- [86] Mark d’Inverno, David Kinny, Michael Luck, and Michael Wooldridge. A formal specification of dmars. In Munindar P. Singh, Anand Rao, and Michael J. Wooldridge, editors, *Intelligent Agents IV Agent Theories, Architectures, and Languages*, pages 155–176. Springer Berlin Heidelberg, 1998. (Cited in page 45.)
- [87] Anca D Dragan, Kenton CT Lee, and Siddhartha S Srinivasa. Legibility and predictability of robot motion. In *2013 8th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 301–308. IEEE, 2013. (Cited in page 30.)
- [88] Iroise Dumontheil, Ian A Apperly, and Sarah-Jayne Blakemore. Online usage of theory of mind continues to develop in late adolescence. *Developmental science*, 13(2):331–338, 2010. (Cited in page 131.)
- [89] Nathan J Emery. The eyes have it: the neuroethology, function and evolution of social gaze. *Neuroscience & biobehavioral reviews*, 24(6):581–604, 2000. (Cited in pages 22 and 23.)
- [90] J. Fan, D. Bian, Z. Zheng, L. Beuscher, P. A. Newhouse, L. C. Mion, and N. Sarkar. A robotic coach architecture for elder care (rocare) based on multi-user engagement models. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, vol. 25(8):pp. 1153–1163, 2017. (Cited in page 77.)
- [91] Víctor Fernández Castro, Amandine Mayima, Kathleen Belhassen, and Aurélie Clodic. The role of commitments in socially appropriate robotics. submitted. (Cited in page 12.)
- [92] Mark Fiala. Artag, a fiducial marker system using digital techniques. In *IEEE Computer Society Conference on Computer Vision and Pattern Recognition (CVPR’05)*, volume 2, pages 590–596. IEEE, 2005. (Cited in page 139.)
- [93] Anika Fiebich and Shaun Gallagher. Joint attention in joint action. *Philosophical Psychology*, 26(4):571–587, 2013. (Cited in page 12.)

- [94] Michelangelo Fiore, Aurélie Clodic, and Rachid Alami. On planning and task achievement modalities for human-robot collaboration. In *Experimental Robotics*, pages 293–306. Springer, 2016. (Cited in page 141.)
- [95] John H Flavell, Patricia T Botkin, Charles L Fry, John W Wright, and Paul E Jarvis. The development of role-taking and communication skills in children. 1968. (Cited in page 27.)
- [96] Mary Ellen Foster, Bart Craenen, Amol Deshmukh, Oliver Lemon, Emanuele Bastianelli, Christian Dondrup, and et al. Mummer: Socially intelligent human-robot interaction in public spaces. In *AAAI 2019 Fall Symposium Series*, Arlington, United States, November 2019. (Cited in page 112.)
- [97] Mary Ellen Foster, Bart Craenen, Amol Deshmukh, Oliver Lemon, Emanuele Bastianelli, Christian Dondrup, Ioannis Papaioannou, Andrea Vanzo, Jean-Marc Odobez, Olivier Canévet, Yuanzhouhan Cao, Weipeng He, Angel Martínez-González, Petr Motlicek, Rémy Siegfried, Rachid Alami, Kathleen Belhassen, Guilhem Buisan, Aurélie Clodic, Amandine Mayima, Yoan Sal-lami, Guillaume Sarthou, Phani-Teja Singamaneni, Jules Waldhart, Alexandre Mazel, Maxime Caniot, Marketta Niemelä, Päivi Heikkilä, Hanna Lammi, and Antti Tammela. Mummer: Socially intelligent human-robot interaction in public spaces. In *Artificial Intelligence for Human-Robot Interaction Symposium (AI-HRI)*, Arlington, VA, United States, 2019. AAAI Fall Symposium Series 2019. (Cited in page 94.)
- [98] Andre Gaschler, Kerstin Huth, Manuel Giuliani, Ingmar Kessler, Jan de Ruiter, and Alois Knoll. Modelling state of interaction from head poses for social human-robot interaction. In *Proceedings of the Gaze in Human-Robot Interaction Workshop held at the 7th ACM/IEEE International Conference on Human-Robot Interaction (HRI 2012)*, 2012. (Cited in pages 7 and 9.)
- [99] M Georgeff and A Rao. Modeling rational agents within a bdi-architecture. In *Proc. 2nd Int. Conf. on Knowledge Representation and Reasoning (KR'91)*. Morgan Kaufmann, pages 473–484. of, 1991. (Cited in page 34.)
- [100] Michael Georgeff and Felix Ingrand. Decision-making in an embedded reasoning system. In *International Joint Conference on Artificial Intelligence*, 1989. (Cited in page 34.)
- [101] Malik Ghallab, Craig Knoblock, David Wilkins, Anthony Barrett, Dave Christianson, Marc Friedman, and et al. *PDDL - The Planning Domain Definition Language*, 08 1998. (Cited in page 44.)
- [102] Malik Ghallab, Dana S. Nau, and Paolo Traverso. *Automated Planning and Acting*. Cambridge University Press, 2016. (Cited in page 42.)
- [103] James J Gibson. The theory of affordances. In *The Ecological Approach to Visual Perception*, pages 127–137. Houghton Mifflin, 1979. (Cited in page 20.)

- [104] Margaret Gilbert. *On social facts*. Routledge, 1989. (Cited in page 16.)
- [105] Margaret Gilbert. Shared intention and personal intentions. *Philosophical studies*, 144(1):167–187, 2009. (Cited in page 18.)
- [106] Margaret Gilbert. *Joint commitment: How we make the social world*. Oxford University Press, 2013. (Cited in page 18.)
- [107] Rachel Gockley, Allison Bruce, Jodi Forlizzi, Marek Michalowski, Anne Mundell, Stephanie Rosenthal, Brennan Sellner, Reid Simmons, Kevin Snipes, Alan C Schultz, et al. Designing robots for long-term social interaction. In *2005 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 1338–1343. IEEE, 2005. (Cited in page 8.)
- [108] Erving Goffman. *Interaction ritual: Essays on face-to-face interaction*. Al-dine, 1967. (Cited in page 4.)
- [109] Erving Goffman. The interaction order: American sociological association, 1982 presidential address. *American sociological review*, 48(1):1–17, 1983. (Cited in page 10.)
- [110] O Can Görür, Benjamin Rosman, Fikret Sivrikaya, and Sahin Albayrak. Social cobots: Anticipatory decision-making for collaborative robots incorporating unexpected human behaviors. In *Proceedings of the 2018 ACM/IEEE International Conference on Human-Robot Interaction*, pages 398–406, 2018. (Cited in page 35.)
- [111] Maria Gräfenhain, Malinda Carpenter, and Michael Tomasello. Three-year-olds’ understanding of the consequences of joint commitments. *PLoS One*, 8(9):e73039, 2013. (Cited in page 13.)
- [112] Herbert P Grice. Logic and conversation. In *Speech acts*, pages 41–58. Brill, 1975. (Cited in page 150.)
- [113] Paul Grice. *Studies in the Way of Words*. Harvard University Press, 1989. (Cited in page 25.)
- [114] H-M Gross, H Boehme, Ch Schroeter, Steffen Müller, Alexander König, Erik Einhorn, Ch Martin, Matthias Merten, and Andreas Bley. Toomas: interactive shopping guide robots in everyday use-final implementation and experiences from long-term field trials. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 2005–2012. IEEE, 2009. (Cited in page 86.)
- [115] Barbara J Grosz and Sarit Kraus. Collaborative plans for complex group action. *Artificial Intelligence*, 86(2):269–357, 1996. (Cited in pages 20 and 44.)

- [116] Orhan Görür, Benjamin Rosman, Guy Hoffman, and Sahin Albayrak. Toward integrating theory of mind into adaptive decision-making of social robots to understand human intention. In *Workshop on The Role of Intentions in Human-Robot Interaction in 12th ACM/IEEE International Conference on Human-Robot Interaction (HRI'17)*, 03 2017. (Cited in page 35.)
- [117] Adriana Hamacher, Nadia Bianchi-Berthouze, Anthony G Pipe, and Kerstin Eder. Believing in bert: Using expressive communication to enhance trust and counteract operational error in physical human-robot interaction. In *2016 25th IEEE international symposium on robot and human interactive communication (RO-MAN)*, pages 493–500. IEEE, 2016. (Cited in page 32.)
- [118] Francesca GE Happé. An advanced test of theory of mind: Understanding of story characters’ thoughts and feelings by able autistic, mentally handicapped, and normal children and adults. *Journal of autism and Developmental disorders*, 24(2):129–154, 1994. (Cited in page 131.)
- [119] Nick Hawes, Michael Zillich, and Jeremy Wyatt. Balt & cast: Middleware for cognitive robotics. In *IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*, pages 998–1003. IEEE, 2007. (Cited in page 137.)
- [120] Meghan L Healey and Murray Grossman. Cognitive and affective perspective-taking: evidence for shared and dissociable anatomical substrates. *Frontiers in neurology*, 9:491, 2018. (Cited in page 27.)
- [121] Raphaela Heesen, Emilie Genty, Federico Rossano, Klaus Zuberbühler, and Adrian Bangerter. Social play as joint action: A framework to study the evolution of shared intentionality as an interactional achievement. *Learning & behavior*, 45(4):390–405, 2017. (Cited in pages 13 and 14.)
- [122] Päivi Heikkilä, Hanna Lammi, and Kathleen Belhassein. Where can i find a pharmacy? -human-driven design of a service robot’s guidance behaviour. In *Workshop on Public Space Human-Robot Interaction (PubRob) as part of the International Conference on Human-Computer Interaction with Mobile Devices and Services (MobileHCI)*, pages 1–2, 2018. (Cited in page 90.)
- [123] Päivi Heikkilä, Hanna Lammi, Marketta Niemelä, Kathleen Belhassein, Guillaume Sarthou, Antti Tammela, Aurélie Clodic, and Rachid Alami. Should a robot guide like a human? a qualitative four-phase study of a shopping mall robot. In *International Conference on Social Robotics (ICSR)*, pages 548–557. Springer, 2019. (Cited in page 90.)
- [124] Laura M Hiatt, Anthony M Harrison, and J Gregory Trafton. Accommodating human variability in human-robot teams through theory of mind. In *Twenty-Second International Joint Conference on Artificial Intelligence*, 2011. (Cited in page 31.)

- [125] Laura M. Hiatt, Cody Narber, Esube Bekele, Sangeet S. Khemlani, and J. Gregory Trafton. Human modeling for human-robot collaboration. *International Journal of Robotics Research*, vol. 36(5-7):pp. 580–596, 2017. (Cited in page 44.)
- [126] Laura M Hiatt and J Gregory Trafton. A cognitive model of theory of mind. In *Proceedings of the 10th international conference on cognitive modeling*, pages 91–96. Citeseer, 2010. (Cited in page 31.)
- [127] G. Hoffman. Evaluating fluency in human–robot collaboration. *IEEE Transactions on Human-Machine Systems*, 49(3):pp. 209–218, June 2019. (Cited in pages 72 and 124.)
- [128] G. Hoffman and C. Breazeal. Cost-based anticipatory action selection for human–robot fluency. *IEEE Transactions on Robotics*, vol. 23(5):pp. 952–961, 2007. (Cited in page 71.)
- [129] Shanee Honig and Tal Oron-Gilad. Understanding and resolving failures in human-robot interaction: Literature review and model development. *Frontiers in psychology*, 9:861, 2018. (Cited in pages 31 and 32.)
- [130] Chien-Ming Huang and Andrea L Thomaz. Joint attention in human-robot interaction. In *2010 AAAI Fall Symposium Series*, 2010. (Cited in page 29.)
- [131] Marcus J. Huber. Jam: A bdi-theoretic mobile agent architecture. In *Proceedings of the Third Annual Conference on Autonomous Agents*, AGENTS '99, page 236–243, 1999. (Cited in page 45.)
- [132] Catherine A. Hynes, Abigail A. Baird, and Scott T. Grafton. Differential role of the orbital frontal lobe in emotional versus cognitive perspective-taking. *Neuropsychologia*, 44(3):374–383, 2006. (Cited in page 27.)
- [133] M. Imai, T. Ono, and H. Ishiguro. Physical relation and expression: joint attention for human-robot interaction. *IEEE Transactions on Industrial Electronics*, 50(4):636–643, 2003. (Cited in page 29.)
- [134] Félix Ingrand and Malik Ghallab. Deliberation for autonomous robots: A survey. *Artificial Intelligence*, vol. 247:pp. 10–44, June 2017. (Cited in page 42.)
- [135] F.F. Ingrand, R. Chatila, R. Alami, and F. Robert. Prs: a high level supervision and control language for autonomous mobile robots. In *Proceedings of IEEE International Conference on Robotics and Automation*, volume 1, pages 43–49 vol.1, 1996. (Cited in page 45.)
- [136] Luca Iocchi, Laurent Jeanpierre, Maria Teresa Lazaro, and Abdel-Illah Mouaddib. A practical framework for robust decision-theoretic planning and execution for service robots. In *Twenty-Sixth International Conference on Automated Planning and Scheduling*, 2016. (Cited in page 35.)

- [137] Luca Iocchi, Maria Teresa Lázaro, Laurent Jeanpierre, and Abdel-Illah Mouaddib. Personalized Short-Term Multi-modal Interaction for Social Robots Assisting Users in Shopping Malls. In Adriana Tapus, Elisabeth André, Jean-Claude Martin, François Ferland, and Mehdi Ammi, editors, *Social Robotics*, volume 9388, pages 264–274. Springer International Publishing, Cham, 2015. (Cited in pages 7 and 87.)
- [138] K. Itoh, H. Miwa, Y. Nukariya, M. Zecca, H. Takanobu, S. Roccella, and et al. Development of a bioinstrumentation system in the interaction between a human and a robot. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages pp. 2620–2625, Beijing, China, Oct 2006. (Cited in page 73.)
- [139] Lorenzo Jamone, Emre Ugur, Angelo Cangelosi, Luciano Fadiga, Alexandre Bernardino, Justus Piater, and José Santos-Victor. Affordances in psychology, neuroscience, and robotics: A survey. *IEEE Transactions on Cognitive and Developmental Systems*, 10(1):4–25, 2016. (Cited in page 20.)
- [140] Matthew Johnson and Yiannis Demiris. Perceptual perspective taking and action recognition. *International Journal of Advanced Robotic Systems*, 2(4):32, 2005. (Cited in page 31.)
- [141] Peter H Kahn, Nathan G Freier, Takayuki Kanda, Hiroshi Ishiguro, Jolina H Ruckert, Rachel L Severson, and Shaun K Kane. Design patterns for sociality in human-robot interaction. In *Proceedings of the 3rd ACM/IEEE international conference on Human robot interaction*, pages 97–104, 2008. (Cited in page 10.)
- [142] Peter H Kahn, Brian T Gill, Aimee L Reichert, Takayuki Kanda, Hiroshi Ishiguro, and Jolina H Ruckert. Validating interaction patterns in hri. In *2010 5th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 183–184. IEEE, 2010. (Cited in page 10.)
- [143] Takayuki Kanda, Rumi Sato, Naoki Saiwaki, and Hiroshi Ishiguro. A two-month field trial in an elementary school for long-term human–robot interaction. *IEEE Transactions on Robotics*, 23(5):962–971, 2007. (Cited in page 8.)
- [144] Takayuki Kanda, Masahiro Shiomi, Zenta Miyashita, Hiroshi Ishiguro, and Norihiro Hagita. An affective guide robot in a shopping mall. In *ACM/IEEE international Conference on Human-Robot interaction (HRI)*, pages 173–180, 2009. (Cited in pages 86 and 105.)
- [145] Takayuki Kanda, Masahiro Shiomi, Zenta Miyashita, Hiroshi Ishiguro, and Norihiro Hagita. A communication robot in a shopping mall. *IEEE Transactions on Robotics*, 26(5):897–913, 2010. (Cited in page 86.)
- [146] Frederic Kaplan and Verena V Hafner. The challenges of joint attention. *Interaction Studies*, 7(2):135–169, 2006. (Cited in pages 20, 21, and 22.)

- [147] Erez Karpas, Steven J Levine, Peng Yu, and Brian C Williams. Robust execution of plans for human-robot teams. In *Twenty-Fifth International Conference on Automated Planning and Scheduling*, 2015. (Cited in page 35.)
- [148] Zerrin Kasap and Nadia Magnenat-Thalmann. Building long-term relationships with virtual and robotic characters: the role of remembering. *The Visual Computer*, 28(1):87–97, 2012. (Cited in page 9.)
- [149] Adam Kendon. *Conducting interaction: Patterns of behavior in focused encounters*, volume 7. CUP Archive, 1990. (Cited in pages 6, 9, and 101.)
- [150] Boaz Keysar. The illusory transparency of intention: Linguistic perspective taking in text. *Cognitive psychology*, 26(2):165–208, 1994. (Cited in page 131.)
- [151] Boaz Keysar and Dale J Barr. Self-anchoring in conversation: Why language users do not do what they ‘should’. *Heuristics and biases: The psychology of intuitive judgment*, 2002. (Cited in page 131.)
- [152] Boaz Keysar, Dale J Barr, Jennifer A Balin, and Jason S Brauner. Taking perspective in conversation: The role of mutual knowledge in comprehension. *Psychological Science*, 11(1):32–38, 2000. (Cited in page 130.)
- [153] Boaz Keysar, Dale J Barr, and William S Horton. The egocentric basis of language use: Insights from a processing approach. *Current directions in psychological science*, 7(2):46–49, 1998. (Cited in page 131.)
- [154] Boaz Keysar, Shuhong Lin, and Dale J Barr. Limits on theory of mind use in adults. *Cognition*, 89(1):25–41, 2003. (Cited in page 131.)
- [155] Harmish Khambaita and Rachid Alami. Viewing robot navigation in human environment as a cooperative activity. In Nancy M. Amato, Greg Hager, Shawna Thomas, and Miguel Torres-Torriti, editors, *Robotics Research*, pages pp. 285–300. Springer International Publishing, 2020. (Cited in page 79.)
- [156] Cory D Kidd and Cynthia Breazeal. Robots at home: Understanding long-term human-robot interaction. In *2008 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 3230–3235. IEEE, 2008. (Cited in page 9.)
- [157] Hyo Young-Rock Kim and Dong-Soo Kwon. Computational model of emotion generation for human–robot interaction based on the cognitive appraisal theory. *Journal of Intelligent & Robotic Systems*, 60(2):263–283, 2010. (Cited in page 30.)
- [158] Gary Klein, Paul J. Feltovich, Jeffrey M. Bradshaw, and David D. Woods. *Common Ground and Coordination in Joint Activity*, chapter 6, pages 139–184. John Wiley & Sons, Ltd, 2005. (Cited in page 13.)

- [159] Mark L Knapp, Roderick P Hart, Gustav W Friedrich, and Gary M Shulman. The rhetoric of goodbye: Verbal and nonverbal correlates of human leave-taking. *Communications Monographs*, 40(3):182–198, 1973. (Cited in page 7.)
- [160] Ross A Knepper, Stefanie Tellex, Adrian Li, Nicholas Roy, and Daniela Rus. Recovering from failure by asking for help. *Autonomous Robots*, 39(3):347–362, 2015. (Cited in page 33.)
- [161] Günther Knoblich, Stephen Butterfill, and Natalie Sebanz. Chapter three - psychological research on joint action: Theory and data. In Brian H. Ross, editor, *Advances in Research and Theory*, volume 54 of *Psychology of Learning and Motivation*, pages 59–101. Academic Press, 2011. (Cited in pages 19, 21, 23, and 88.)
- [162] Harumi Kobayashi, Tetsuya Yasuda, Hiroshi Igarashi, and Satoshi Suzuki. Language use in joint action: The means of referring expressions. *International Journal of Social Robotics*, pages 1–9, 2018. (Cited in page 13.)
- [163] Stefan Kopp, Paul A. Tepper, Kimberley Ferriman, Kristina Striegnitz, and Justine Cassell. *Trading Spaces: How Humans and Humanoids Use Speech and Gesture to Give Directions*, chapter 8, pages 133–160. John Wiley & Sons, Ltd, 2007. (Cited in page 86.)
- [164] Iuliia Kotseruba and John K Tsotsos. 40 years of cognitive architectures: core cognitive abilities and practical applications. *Artificial Intelligence Review*, 53(1):17–94, 2020. (Cited in page 34.)
- [165] Robert M Krauss and Susan R Fussell. Perspective-taking in communication: Representations of others' knowledge in reference. *Social cognition*, 9(1):2–24, 1991. (Cited in page 27.)
- [166] Robert M Krauss and Sam Glucksberg. Social and nonsocial speech. *Scientific American*, 236(2):100–105, 1977. (Cited in page 130.)
- [167] Thibault Kruse, Amit Kumar Pandey, Rachid Alami, and Alexandra Kirsch. Human-Aware Robot Navigation: A Survey. *Robotics and Autonomous Systems*, vol. 61(12):pp. 1726–1743, December 2013. (Cited in page 71.)
- [168] D. Kulic and E. A. Croft. Affective state estimation for human–robot interaction. *IEEE Transactions on Robotics*, vol. 23(5):pp. 991–1000, 2007. (Cited in page 73.)
- [169] Dana Kulić and Elizabeth A. Croft. Estimating intent for human-robot interaction. In *IEEE International Conference on Advanced Robotics*, pages pp. 810–815, 2003. (Cited in page 73.)
- [170] I-Han Kuo. *Designing Human-Robot Interaction for Service Applications*. PhD thesis, ResearchSpace@ Auckland, 2012. (Cited in pages 10 and 11.)

- [171] Minae Kwon, Sandy H. Huang, and Anca D. Dragan. Expressing robot incapability. In *Proceedings of the 2018 ACM/IEEE International Conference on Human-Robot Interaction, HRI '18*, page 87–95, New York, NY, USA, 2018. (Cited in page 32.)
- [172] Raphaël Lallement, Lavindra De Silva, and Rachid Alami. HATP: An HTN Planner for Robotics. In *2nd ICAPS Workshop on Planning and Robotics*, Portsmouth, United States, June 2014. (Cited in pages 42, 67, and 141.)
- [173] Philippe Lamarre and Yoav Shoham. Knowledge, certainty, belief, and conditionalisation (abbreviated version). In *Principles of knowledge representation and reasoning*, pages 415–424. Elsevier, 1994. (Cited in page 34.)
- [174] David A. Leavens, William D. Hopkins, and Roger K. Thomas. Referential communication by chimpanzees (*pan troglodytes*). *Journal of Comparative Psychology*, 118(1):48–57, 2004. (Cited in page 26.)
- [175] John O. Ledyard. Public Goods: A Survey of Experimental Research. *Public Economics* 9405003, University Library of Munich, Germany, May 1994. (Cited in page 17.)
- [176] Min Kyung Lee, Jodi Forlizzi, Sara Kiesler, Paul Rybski, John Antanitis, and Sarun Savetsila. Personalization in hri: A longitudinal field experiment. In *2012 7th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 319–326. IEEE, 2012. (Cited in page 9.)
- [177] Min Kyung Lee, Sara Kiesler, Jodi Forlizzi, Siddhartha Srinivasa, and Paul Rybski. Gracefully mitigating breakdowns in robotic services. In *2010 5th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 203–210. IEEE, 2010. (Cited in page 33.)
- [178] Iolanda Leite, Carlos Martinho, and Ana Paiva. Social robots for long-term interaction: a survey. *International Journal of Social Robotics*, 5(2):291–308, 2013. (Cited in page 8.)
- [179] S. Lemaignan, F. Garcia, A. Jacq, and P. Dillenbourg. From real-time attention assessment to “with-me-ness” in human-robot interaction. In *11th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages pp. 157–164, 2016. (Cited in page 77.)
- [180] Séverin Lemaignan, Yoan Sallami, Christopher Wallhridge, Aurélie Clodic, Tony Belpaeme, and Rachid Alami. Underworlds: cascading situation assessment for robots. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 7750–7757. IEEE, 2018. (Cited in pages 97 and 138.)
- [181] Séverin Lemaignan, Mathieu Warnier, E Akin Sisbot, Aurélie Clodic, and Rachid Alami. Artificial cognition for social human–robot interaction: An

- implementation. *Artificial Intelligence*, 247:45–69, 2017. (Cited in pages 34, 40, 71, and 136.)
- [182] Alan M Leslie. Spatiotemporal continuity and the perception of causality in infants. *Perception*, 13(3):287–305, 1984. (Cited in page 31.)
- [183] David Lewis. *Convention: A philosophical study*. Wiley-Blackwell, 1969. (Cited in page 22.)
- [184] Shuyin Li, Britta Wrede, and Gerhard Sagerer. A computational model of multi-modal grounding for human robot interaction. In *Proceedings of the 7th SIGdial Workshop on Discourse and Dialogue*, pages 153–160, 2006. (Cited in page 32.)
- [185] Shuhong Lin, Boaz Keysar, and Nicholas Epley. Reflexively mindblind: Using theory of mind to interpret behavior requires effortful attention. *Journal of Experimental Social Psychology*, 46(3):551–556, 2010. (Cited in page 131.)
- [186] Célia Martinie, Philippe Palanque, and Marco Winckler. Structuring and composition mechanisms to address scalability issues in task models. In *IFIP Conference on Human-Computer Interaction*, pages 589–609. Springer, 2011. (Cited in page 59.)
- [187] Robert S Marvin, Mark T Greenberg, and Daniel G Mossler. The early development of conceptual perspective taking: Distinguishing among multiple perspectives. *Child Development*, pages 511–514, 1976. (Cited in page 27.)
- [188] Takahiro Matsumoto, Satoru Satake, Takayuki Kanda, Michita Imai, and Norihiro Hagita. Do you remember that shop? computational model of spatial memory for shopping companion robots. In *Proceedings of the seventh annual ACM/IEEE international conference on Human-Robot Interaction*, pages 447–454, 2012. (Cited in pages 86 and 93.)
- [189] Alyxander David May, Christian Dondrup, and Marc Hanheide. Show me your moves! conveying navigation intention of a mobile robot to humans. In *2015 European Conference on Mobile Robots (ECMR)*, pages 1–6. IEEE, 2015. (Cited in page 30.)
- [190] A. Mayima, A. Clodic, and R. Alami. Toward a robot computing an online estimation of the quality of its interaction with its human partner. In *2020 29th IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)*, pages 291–298, 2020. (Cited in page 142.)
- [191] A. Mayima, A. Clodic, and R. Alami. Towards robots able to measure in real-time the quality of interaction. 2021. (Cited in page 71.)
- [192] David McNeill. Gesture, gaze, and ground. In *International workshop on machine learning for multimodal interaction*, pages 1–14. Springer, 2005. (Cited in page 101.)

- [193] John Michael and Elisabeth Pacherie. On commitments and other uncertainty reduction tools in joint action. *Journal of Social Ontology*, 1(1):89–120, 2015. (Cited in pages 18 and 24.)
- [194] John Michael and Alessandro Salice. The sense of commitment in human–robot interaction. *International Journal of Social Robotics*, vol. 9(5):pp. 755–763, Nov 2017. (Cited in pages 17 and 44.)
- [195] John Michael, Natalie Sebanz, and Günther Knoblich. The sense of commitment: A minimal approach. *Frontiers in Psychology*, vol. 6:1968, 2016. (Cited in pages 18 and 76.)
- [196] Grégoire Milliez, Raphaël Lallement, Michelangelo Fiore, and Rachid Alami. Using human knowledge awareness to adapt collaborative plan generation, explanation and monitoring. In *2016 11th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 43–50. IEEE, 2016. (Cited in page 31.)
- [197] Grégoire Milliez, Matthieu Warnier, Aurélie Clodic, and Rachid Alami. A framework for endowing an interactive robot with reasoning capabilities about perspective-taking and belief management. In *The 23rd IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*, pages pp. 1103–1109, Edinburgh, United Kingdom, August 2014. (Cited in pages 31, 44, 129, and 139.)
- [198] Stephen Monsell. Task switching. *Trends in cognitive sciences*, 7(3):134–140, 2003. (Cited in page 19.)
- [199] Cecilia G Morales, Elizabeth J Carter, Xiang Zhi Tan, and Aaron Steinfeld. Interaction needs and opportunities for failing robots. In *Proceedings of the 2019 on Designing Interactive Systems Conference*, pages 659–670, 2019. (Cited in page 32.)
- [200] Y. Morales, Satoru Satake, Takayuki Kanda, and Norihiro Hagita. Modeling environments from a route perspective. In *ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 441–448, 2011. (Cited in page 86.)
- [201] D. Morley and K. Myers. The spark agent framework. In *Proceedings of the Third International Joint Conference on Autonomous Agents and Multiagent Systems, 2004. AAMAS 2004.*, pages 714–721, 2004. (Cited in page 45.)
- [202] Clément Moulin-Frier, Tobias Fischer, Maxime Petit, Grégoire Pointeau, Jordi-Ysard Puigbo, Ugo Pattacini, Sock Ching Low, Daniel Camilleri, Phuong Nguyen, Matej Hoffmann, et al. Dac-h3: a proactive robot cognitive architecture to acquire and express knowledge about the world and the self. *IEEE Transactions on Cognitive and Developmental Systems*, 10(4):1005–1022, 2017. (Cited in page 34.)

- [203] Bilge Mutlu, Allison Terrell, and Chien-Ming Huang. Coordination mechanisms in human-robot collaboration. In *Proceedings of the Workshop on Collaborative Manipulation, 8th ACM/IEEE International Conference on Human-Robot Interaction*, pages 1–6, 2013. (Cited in page 33.)
- [204] Allen Newell. *Unified theories of cognition*. Harvard University Press, 1994. (Cited in page 7.)
- [205] Kai Nickel and Rainer Stiefelhagen. Visual recognition of pointing gestures for human–robot interaction. *Image and vision computing*, 25(12):1875–1884, 2007. (Cited in page 29.)
- [206] Donald A. Norman. Categorization of action slips. *Psychological Review*, 88(1):1–15, 1981. (Cited in page 28.)
- [207] Bernard Ogden, Kerstin Dautenhahn, and Penny Stribling. Interactional structure applied to the identification and generation of visual interactive behavior: Robots that (usually) follow the rules. In *International Gesture Workshop*, pages 254–268. Springer, 2001. (Cited in page 9.)
- [208] Yusuke Okuno, Takayuki Kanda, Michita Imai, Hiroshi Ishiguro, and Norihiro Hagita. Providing route directions: design of robot’s utterance, gesture, and timing. In *ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 53–60. IEEE, 2009. (Cited in pages 86 and 93.)
- [209] Dan R. Olsen and Michael A. Goodrich. Metrics for evaluating human-robot interaction. In *PERMIS*, Gaithersburg, United States, 2003. (Cited in page 78.)
- [210] Richard Osborne. *An ecological approach to educational technology: affordance as a design tool for aligning pedagogy and technology*. PhD thesis, University of Exeter, 2014. (Cited in page 20.)
- [211] Elisabeth Pacherie. The phenomenology of action: A conceptual framework. *Cognition*, 107(1):179–217, 2008. (Cited in page 14.)
- [212] Elisabeth Pacherie. The Phenomenology of Joint Action: Self-Agency vs. Joint-Agency. In Axel Seemann, editor, *Joint Attention: New Developments*, pages 343–389. MIT Press, 2012. (Cited in pages 12, 14, 19, 20, 23, 24, 87, and 88.)
- [213] Elisabeth Pacherie. Intentional joint agency: shared intention lite. *Synthese*, 190(10):1817–1839, 2013. (Cited in page 26.)
- [214] Anand Panchbhai, Tommaso Soru, and Edgard Marx. Exploring sequence-to-sequence models for sparql pattern composition. In *Iberoamerican Knowledge Graphs and Semantic Web Conference*, pages 158–165. Springer, 2020. (Cited in page 143.)

- [215] Julia Peltason and Britta Wrede. Pamini: A framework for assembling mixed-initiative human-robot interaction from generic interaction patterns. In *Proceedings of the SIGDIAL 2010 Conference*, pages 229–232, 2010. (Cited in page 12.)
- [216] Josef Perner and Heinz Wimmer. “john thinks that mary thinks that...” attribution of second-order beliefs by 5-to 10-year-old children. *Journal of experimental child psychology*, 39(3):437–471, 1985. (Cited in page 27.)
- [217] Ronald PA Petrick, Mary Ellen Foster, and Amy Isard. Social state recognition and knowledge-level planning for human-robot interaction in a bartender domain. In *AAAI Workshop on Grounding Language for Physical Systems, Toronto, ON, Canada, July*, 2012. (Cited in page 129.)
- [218] Gregoire Pointeau and Peter Ford Dominey. The role of autobiographical memory in the development of a robot self. *Frontiers in neurorobotics*, 11:27, 2017. (Cited in page 31.)
- [219] Daniel J Povinelli and Jennifer Vonk. We don’t need a microscope to explore the chimpanzee’s mind. *Mind & Language*, 19(1):1–28, 2004. (Cited in page 26.)
- [220] David Premack and Guy Woodruff. Does the chimpanzee have a theory of mind? *Behavioral and brain sciences*, 1(4):515–526, 1978. (Cited in page 26.)
- [221] Morgan Quigley, Ken Conley, Brian Gerkey, Josh Faust, Tully Foote, Jeremy Leibs, Rob Wheeler, Andrew Y Ng, et al. Ros: an open-source robot operating system. In *ICRA workshop on open source software*, volume 3, page 5. Kobe, Japan, 2009. (Cited in page 50.)
- [222] Timothy P Racine. Getting beyond rich and lean views of joint attention. *Joint attention: New developments in psychology, philosophy of mind, and social neuroscience*, pages 21–42, 2011. (Cited in page 22.)
- [223] Verónica C Ramenzoni, Michael A Riley, Kevin Shockley, and Tehran Davis. Short article: Carrying the height of the world on your ankles: Encumbering observers reduces estimates of how high an actor can jump. *Quarterly Journal of Experimental Psychology*, 61(10):1487–1495, 2008. (Cited in page 19.)
- [224] Anand S. Rao. AgentSpeak(L): BDI agents speak out in a logical computable language. In *Proceedings of the 7th European Workshop on Modelling Autonomous Agents in a Multi-Agent World: Agents Breaking Away*, pages 42–55, Berlin, Heidelberg, 1996. (Cited in page 45.)
- [225] Anand S Rao and Michael P Georgeff. Bdi agents: From theory to practice. In *ICMAS*, volume 95, pages 312–319, 1995. (Cited in pages 34 and 35.)

- [226] Jens Rasmussen. Human errors. a taxonomy for describing human malfunction in industrial installations. *Journal of Occupational Accidents*, 4(2):311–333, 1982. (Cited in page 28.)
- [227] James Reason. *Human error*. Cambridge university press, 1990. (Cited in pages 28 and 29.)
- [228] Mauricio Reyes, Ivan Meza, and Luis A Pineda. The positive effect of negative feedback in hri using a facial expression robot. In *International Workshop on Cultural Robotics*, pages 44–54. Springer, 2015. (Cited in page 32.)
- [229] Michael J Richardson, Kerry L Marsh, and Reuben M Baron. Judging and actualizing intrapersonal and interpersonal affordances. *Journal of experimental psychology: Human Perception and Performance*, 33(4):845, 2007. (Cited in page 21.)
- [230] Giacomo Rizzolatti and Laila Craighero. The mirror-neuron system. *Annu. Rev. Neurosci.*, 27:169–192, 2004. (Cited in page 20.)
- [231] Jeffrey D. Robinson. *The handbook of conversation analysis*, volume 121, chapter Overall Structural Organization. John Wiley & Sons, 2012. (Cited in pages 5, 6, and 43.)
- [232] Raquel Ros, E Akin Sisbot, Rachid Alami, Jasmin Steinwender, Katharina Hamann, and Felix Warneken. Solving ambiguities with perspective taking. In *2010 5th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 181–182. IEEE, 2010. (Cited in page 31.)
- [233] Abraham Sesshu Roth. Shared agency and contralateral commitments. *The Philosophical Review*, 113(3):359–410, 2004. (Cited in page 18.)
- [234] Paula Rubio-Fernández. The director task: A test of theory-of-mind use or selective attention? *Psychonomic bulletin & review*, 24(4):1121–1128, 2017. (Cited in page 131.)
- [235] Rudolph J Rummel. Understanding conflict and war: vol. 2: the conflict helix. *Beverly Hills: Sage*, 1976. (Cited in page 5.)
- [236] Harvey Sacks. *Lectures on Conversation*. Wiley-Blackwell, Oxford, volumes i and ii edition edition, January 1995. (Cited in page 6.)
- [237] Ricardo Sanchez-Matilla, Konstantinos Chatzilygeroudis, Apostolos Modas, Nuno Ferreira Duarte, Alessio Xompero, Pascal Frossard, Aude Billard, and Andrea Cavallaro. Benchmark for human-to-robot handovers of unseen containers with unknown filling. *IEEE Robotics and Automation Letters*, 5(2):1642–1649, 2020. (Cited in page 124.)

- [238] Valerio Sanelli, Michael Cashmore, Daniele Magazzeni, and Luca Iocchi. Short-term human-robot interaction through conditional planning and execution. In *Proceedings of the International Conference on Automated Planning and Scheduling*, volume 27, 2017. (Cited in page 7.)
- [239] Idalmis Santiesteban, Sarah White, Jennifer Cook, Sam J Gilbert, Cecilia Heyes, and Geoffrey Bird. Training social cognition: from imitation to theory of mind. *Cognition*, 122(2):228–235, 2012. (Cited in page 131.)
- [240] Guillaume Sarthou, Mayima Amandine, Buisan Guilhem, Belhassen Kathleen, and Aurélie Clodic. The director task: a psychology-inspired task to assess cognitive and interactive robot architectures. In *IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)*, pages 1–8. IEEE, 2021. (Cited in page 128.)
- [241] Guillaume Sarthou, Aurélie Clodic, and Rachid Alami. Ontologenius: A long-term semantic memory for robotic agents. In *28th IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)*, pages 1–8. IEEE, 2019. (Cited in pages 54 and 96.)
- [242] Guillaume Sarthou, Aurélie Clodic, and Rachid Alami. Semantic spatial representation: a unique representation of an environment based on an ontology for robotic applications. In *Proceedings of the Combined Workshop on Spatial Language Understanding (SpLU) and Grounded Communication for Robotics (RoboNLP)*, pages pp.50–60, Minneapolis, United States, 2019. (Cited in pages 96 and 99.)
- [243] Satoru Satake, Kotaro Hayashi, Keita Nakatani, and Takayuki Kanda. Field trial of an information-providing robot in a shopping mall. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 1832–1839. IEEE, 2015. (Cited in pages 93 and 96.)
- [244] Satoru Satake, Keita Nakatani, Kotaro Hayashi, Takyuki Kanda, and Michita Imai. What should we know to develop an information robot? *PeerJ Computer Science*, 1:8, 2015. (Cited in pages 61, 86, 93, and 128.)
- [245] Allison Sauppé and Bilge Mutlu. Design patterns for exploring and prototyping human-robot interactions. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, pages 1439–1448, 2014. (Cited in page 11.)
- [246] Thomas Scanlon. *What we owe to each other*. Belknap Press of Harvard University Press, 2000. (Cited in page 17.)
- [247] Brian Scassellati. Theory of mind for a humanoid robot. *Autonomous Robots*, 12(1):13–24, 2002. (Cited in page 31.)

- [248] Roger C. Schank and Robert P. Abelson. *Scripts, plans, goals, and understanding : an inquiry into human knowledge structures.* Hillsdale, N.J. : Lawrence Erlbaum Associates, 1977. (Cited in page 24.)
- [249] Emanuel A Schegloff. The routine as achievement. *Human studies*, 9(2-3):111–151, 1986. (Cited in page 6.)
- [250] Emanuel A Schegloff. Word repeats as unit ends. *Discourse Studies*, 13(3):367–380, 2011. (Cited in page 5.)
- [251] Emanuel A Schegloff, Gail Jefferson, and Harvey Sacks. The preference for self-correction in the organization of repair in conversation. *Language*, 53(2):361–382, 1977. (Cited in page 28.)
- [252] Emanuel A Schegloff and Harvey Sacks. Opening up closings. *Semiotica*, 8(4):289–327, 1973. (Cited in pages 7 and 43.)
- [253] Matthias Scheutz, Paul Schermerhorn, and James Kramer. The utility of affect expression in natural language interactions in joint human-robot tasks. In *Proceedings of the 1st ACM SIGCHI/SIGART conference on Human-robot interaction*, pages 226–233, 2006. (Cited in pages 30 and 34.)
- [254] Matthias Scheutz, Thomas Williams, Evan Krause, Bradley Oosterveld, Vasanth Sarathy, and Tyler Frasca. An overview of the distributed integrated cognition affect and reflection diarc architecture. *Cognitive architectures*, pages 165–193, 2019. (Cited in page 34.)
- [255] Stephen Schiffer. *Meaning*. Oxford, Clarendon Press, 1972. (Cited in page 22.)
- [256] John Searle. Collective intentions and actions. In Philip R. Cohen Jerry Morgan and Martha Pollack, editors, *Intentions in Communication*, pages 401–415. MIT Press, 1990. (Cited in page 20.)
- [257] John R. Searle. *Intentionality: An Essay in the Philosophy of Mind*. Cambridge University Press, 1983. (Cited in page 16.)
- [258] Natalie Sebanz, Harold Bekkering, and Günther Knoblich. Joint action: bodies and minds moving together. *Trends in cognitive sciences*, 10(2):70–76, 2006. (Cited in pages 12, 19, 20, 23, and 24.)
- [259] Natalie Sebanz and Guenther Knoblich. Prediction in joint action: What, when, and where. *Topics in Cognitive Science*, 1(2):353–367, 2009. (Cited in pages 19 and 23.)
- [260] Natalie Sebanz, Günther Knoblich, and Wolfgang Prinz. How two share a task: corepresenting stimulus-response mappings. *Journal of Experimental Psychology: Human Perception and Performance*, 31(6):1234, 2005. (Cited in page 19.)

- [261] Julie Shah, James Wiken, Brian Williams, and Cynthia Breazeal. Improved human-robot team performance using chaski, a human-inspired plan execution system. *HRI '11*, New York, NY, USA, 2011. Association for Computing Machinery. (Cited in page 35.)
- [262] Candace L Sidner and Christopher Lee. Engagement rules for human-robot collaborative interactions. In *IEEE International Conference on Systems, Man and Cybernetics.*, volume 4, pages 3957–3962. IEEE, 2003. (Cited in page 43.)
- [263] Roland Siegwart, Kai O Arras, Samir Bouabdallah, Daniel Burnier, Gilles Froidevaux, Xavier Greppin, Björn Jensen, Antoine Lorotte, Laetitia Mayor, Mathieu Meisser, et al. Robox at expo. 02: A large-scale installation of personal robots. *Robotics and Autonomous Systems*, 42(3-4):203–222, 2003. (Cited in page 86.)
- [264] Gustavo R. Silva, Leandro B. Becker, and Jomi F. Hübner. Embedded architecture composed of cognitive agents and ros for programming intelligent robots. *IFAC-PapersOnLine*, 53(2):10000–10005, 2020. 21th IFAC World Congress. (Cited in page 50.)
- [265] Rui Silva, Luís Louro, Tiago Malheiro, Wolfram Erlhagen, and Estela Bicho. Combining intention and emotional state inference in a dynamic neural field architecture for human-robot joint action. *Adaptive Behavior*, 24(5):350–372, 2016. (Cited in page 32.)
- [266] Phani-Teja Singamaneni and Rachid Alami. Hateb-2: Reactive planning and decision making in human-robot co-navigation. In *IEEE International Symposium on Robot and Human Interactive Communication (RO-MAN)*, pages 179–186. IEEE, 2020. (Cited in page 103.)
- [267] Barbora Siposova and Malinda Carpenter. A new look at joint attention and common knowledge. *Cognition*, 189:260–274, 2019. (Cited in page 21.)
- [268] Barbora Siposova, Michael Tomasello, and Malinda Carpenter. Communicative eye contact signals a commitment to cooperate for young children. *Cognition*, 179:192–201, 2018. (Cited in pages 17 and 18.)
- [269] Emrah Akin Sisbot and Rachid Alami. A human-aware manipulation planner. *IEEE Transactions on Robotics*, 28(5):1045–1057, 2012. (Cited in page 30.)
- [270] Beate Sodian and Susanne Kristen-Antonow. Declarative joint attention as a foundation of theory of mind. *Developmental psychology*, 51(9):1190–1200, 2015. (Cited in page 26.)
- [271] D. Sperber and D. Wilson. *Relevance: Communication and Cognition*. Blackwell, 1995. (Cited in pages 24 and 25.)

- [272] Thorsten P Spexard, Marc Hanheide, Shuyin Li, Britta Wrede, et al. Oops, something is wrong-error detection and recovery for advanced human-robot interaction. 2008. (Cited in page 33.)
- [273] Maria Staudte and Matthew W Crocker. Visual attention in spoken human-robot interaction. In *2009 4th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 77–84. IEEE, 2009. (Cited in page 29.)
- [274] Aaron Steinfeld, Terrence Fong, David Kaber, Michael Lewis, Jean Scholtz, Alan Schultz, and Michael Goodrich. Common metrics for human-robot interaction. In *Proceedings of the 1st ACM SIGCHI/SIGART Conference on Human-robot Interaction*, pages pp. 33–40, Salt Lake City, United States, 2006. (Cited in pages 72 and 124.)
- [275] Daniel Szafir, Bilge Mutlu, and Terrence Fong. Communicating directionality in flying robots. In *2015 10th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 19–26. IEEE, 2015. (Cited in page 30.)
- [276] Aaquib Tabrez, Matthew B. Luebbers, and Bradley Hayes. A survey of mental modeling techniques in human–robot teaming. *Current Robotics Reports*, Aug 2020. (Cited in page 44.)
- [277] Leila Takayama, Doug Dooley, and Wendy Ju. Expressing thought: improving robot readability with animation principles. In *Proceedings of the 6th international conference on Human-robot interaction*, pages 69–76, 2011. (Cited in page 30.)
- [278] A. Tanevska, G. Rea, F. Sandini, and A. Sciutti. Towards an Affective Cognitive Architecture for Human-Robot Interaction for the iCub Robot. In *1st Workshop on “Behavior, Emotion and Representation: Building Blocks of Interaction”*, Bielefeld, Germany, October 2017. (Cited in pages 73 and 124.)
- [279] Stefanie Tellex, Ross Knepper, Adrian Li, Daniela Rus, and Nicholas Roy. Asking for help using inverse semantics. In *Proceedings of Robotics: Science and Systems*, Berkeley, USA, July 2014. (Cited in page 129.)
- [280] Kyle A Thomas, Peter DeScioli, Omar Sultan Haque, and Steven Pinker. The psychology of coordination and common knowledge. *Journal of personality and social psychology*, 107(4):657, 2014. (Cited in page 22.)
- [281] Andrea Thomaz, Guy Hoffman, and Maya Çakmak. Computational human-robot interaction. *Foundations and Trends in Robotics*, vol. 4(2-3):pp. 105–223, 2016. (Cited in page 71.)
- [282] S. Thrun, M. Bennewitz, W. Burgard, A. B. Cremers, F. Dellaert, D. Fox, D. Hahnel, C. Rosenberg, N. Roy, J. Schulte, and D. Schulz. Minerva: a

- second-generation museum tour-guide robot. In *Proceedings 1999 IEEE International Conference on Robotics and Automation (Cat. No.99CH36288C)*, volume 3, pages 1999–2005, 1999. (Cited in page 86.)
- [283] Deborah Tollefson. Let’s pretend!: Children and joint action. *Philosophy of the Social Sciences*, 35(1):75–97, 2005. (Cited in pages 13, 17, and 26.)
 - [284] Michael Tomasello. *The cultural origins of human cognition*. Harvard university press, 1999. (Cited in pages 21 and 22.)
 - [285] Michael Tomasello and Malinda Carpenter. Shared intentionality. *Developmental science*, 10(1):121–125, 2007. (Cited in page 22.)
 - [286] Michael Tomasello, Malinda Carpenter, Josep Call, Tanya Behne, and Henrike Moll. Understanding and sharing intentions: The origins of cultural cognition. *Behavioral and brain sciences*, 28(5):675–691, 2005. (Cited in pages 12, 16, 17, 20, and 21.)
 - [287] Michael Tomasello et al. Joint attention as social cognition. In Chris Moore, Philip J Dunham, and Phil Dunham, editors, *Joint attention: Its origins and role in development*, pages 103–130. Psychology Press, 1995. (Cited in page 22.)
 - [288] J Gregory Trafton, Laura M Hiatt, Anthony M Harrison, Franklin P Tamborello, Sangeet S Khemlani, and Alan C Schultz. Act-r/e: An embodied cognitive architecture for human-robot interaction. *Journal of Human-Robot Interaction*, 2(1):30–55, 2013. (Cited in page 34.)
 - [289] Rudolph Triebel, Kai Arras, Rachid Alami, Lucas Beyer, Stefan Breuers, Raja Chatila, Mohamed Chetouani, Daniel Cremers, Vanessa Evers, Michelangelo Fiore, et al. Spencer: A socially aware service robot for passenger guidance and help in busy airports. In *Field and service robotics*, pages 607–622. Springer, 2016. (Cited in page 86.)
 - [290] Jochen Triesch, Christof Teuscher, Gedeon O Deák, and Eric Carlson. Gaze following: why (not) learn it? *Developmental science*, 9(2):125–147, 2006. (Cited in page 22.)
 - [291] Raimo Tuomela. *The Importance of Us: A Philosophical Study of Basic Social Notions*. Stanford University Press, 1995. (Cited in page 16.)
 - [292] Cordula Vesper, Ekaterina Abramova, Judith Bütepage, Francesca Ciardo, Benjamin Crossey, Alfred Effenberg, Dayana Hristova, April Karlinsky, Luke McEllin, Sari R. R. Nijssen, Laura Schmitz, and Basil Wahn. Joint action: Mental representations, shared information and general mechanisms for co-ordinating with others. *Frontiers in Psychology*, 7:2039, 2017. (Cited in page 19.)

- [293] Cordula Vesper, Stephen Butterfill, Günther Knoblich, and Natalie Sebanz. A minimal architecture for joint action. *Neural Networks*, 23(8-9):998–1003, 2010. (Cited in pages 23 and 24.)
- [294] Cordula Vesper and Michael J Richardson. Strategic communication and behavioral coupling in asymmetric joint action. *Experimental brain research*, 232(9):2945–2956, 2014. (Cited in page 26.)
- [295] J. Waldhart, A. Clodic, and R. Alami. Reasoning on shared visual perspective to improve route directions. In *28th IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)*, New Delhi, India, Oct 2019. (Cited in page 100.)
- [296] Mathieu Warnier, Julien Guitton, Séverin Lemaignan, and Rachid Alami. When the robot puts itself in your shoes. managing and exploiting human and robot beliefs. In *2012 IEEE RO-MAN: The 21st IEEE International Symposium on Robot and Human Interactive Communication*, pages 948–954. IEEE, 2012. (Cited in page 31.)
- [297] Henry M Wellman, David Cross, and Julianne Watson. Meta-analysis of theory-of-mind development: The truth about false belief. *Child development*, 72(3):655–684, 2001. (Cited in page 28.)
- [298] Carol Westby and Lee Robinson. A developmental perspective for promoting theory of mind. *Topics in language disorders*, 34(4):362–382, 2014. (Cited in pages 26 and 27.)
- [299] H. Wimmer. Beliefs about beliefs: Representation and constraining function of wrong beliefs in young children’s understanding of deception. *Cognition*, 13(1):103–128, 1983. (Cited in page 27.)
- [300] Daniel M Wolpert, Kenji Doya, and Mitsuo Kawato. A unifying computational framework for motor control and social interaction. *Philosophical Transactions of the Royal Society of London. Series B: Biological Sciences*, 358(1431):593–602, 2003. (Cited in page 23.)
- [301] Robin Wooffitt and I Hutchby. *Conversation analysis*. Polity, 2008. (Cited in page 28.)
- [302] Michael Wooldridge. Intelligent agents. *Multiagent systems*, 6, 1999. (Cited in page 92.)
- [303] Chen Yu, Matthias Scheutz, and Paul Schermerhorn. Investigating multi-modal real-time patterns of joint attention in an hri word learning task. In *2010 5th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 309–316. IEEE, 2010. (Cited in page 29.)

- [304] Kuanhao Zheng, Dylan F Glas, Takayuki Kanda, Hiroshi Ishiguro, and Norihiro Hagita. Designing and implementing a human–robot team for social interactions. *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, 43(4):843–859, 2013. (Cited in page 7.)
- [305] Vittorio A. Ziparo, Luca Iocchi, Pedro U. Lima, Daniele Nardi, and Pier F. Palamara. Petri net plans - A framework for collaboration and coordination in multi-robot systems. *Autonomous Agents and Multi-Agent Systems*, 23(3):344–383, 2011. (Cited in page 45.)

ajouter tous les
prénoms pour har-
moniser

