


DC - CYLINDRIC
TYP: IBLI3015 / PNP NC



| | |
|---|---------------------|
| Configuration: | M30 |
| Fitting: | flush |
| Sensing Distance Sn (mm): | 10,0 mm |
| Connection: | pluggable M12 |
| Nominal Voltage: | 24 VDC |
| Voltage Range: | 10-35 VDC |
| max. Load Current: | 300 mA |
| No-Load Current: | < 10 mA |
| Voltage Drop: | < 2,5 V |
| Switching Frequency: | 250 Hz |
| Hysteresis: | < 15 % (Sr) |
| Reproduceability: | < 1 % (Sr) |
| Temperature Drift: | < 10 % (Sr) |
| Ambient Temperature: | -25 Å°C ... +70 Å°C |
| Protection Class: | IP 67 |
| Short Circuit- /Inverse Polarity Protection: | yes |
| Housing Material: | Brass nickel plates |
| LED: | yes |
| Connection: | Plug M12 |
| Material Active Surface: | |
| EMC: | |
| Shock/Vibration: | |

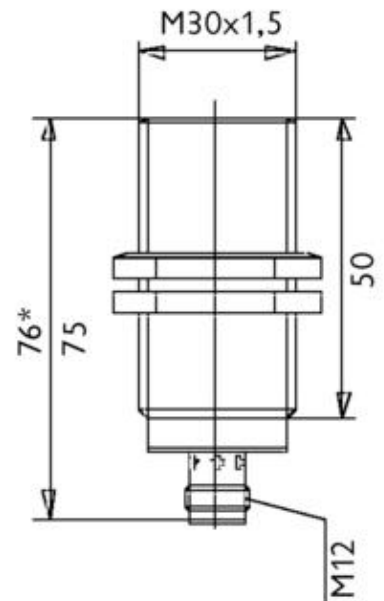

Schönbuch Sensor GmbH & Co KG - Hauffstraße 9 - D-75385 Bad Teinach-Zavelstein
Telefon 07053/92591-00 - Fax 07053/92591-10 - info@schoenbuch-sensor.net