## DC - CYLINDRIC TYP: IBCT3014 / PNP NO



Configuration: M30 Fitting: flush Sensing Distance Sn (mm): 10,0 mm Connection: Cable **Nominal Voltage:** 24 VDC 10-35 VDC Voltage Range: max. Load Current: 300 mA **No-Load Current:** < 10 mA < 2,5 V Voltage Drop: Switching Frequency: 250 Hz Hysteresis: < 15 % (Sr) Reproduceability: < 1 % (Sr) **Temperature Drift:** < 10 % (Sr)

Ambient Temperature: -25 ŰC ... +70 ŰC

Protection Class: IP 67
Short Circuit-/Inverse Polarity yes
Protection:

Housing Material: Brass nickel plates


LED: yes

Connection: 2 m PVC/3 x 0,5 mm2

**Material Active Surface:** 

EMC:

Shock/Vibration:

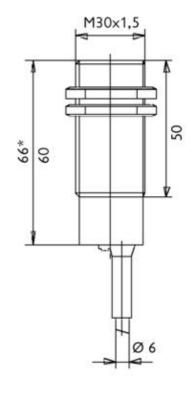

Schönbuch Sensor GmbH & Co KG - Hauffstraße 9 - D-75385 Bad Teinach-Zavelstein Telefon 07053/92591-00 - Fax 07053/92591-10 - info@schoenbuch-sensor.net