Stick arrow, drill template 1:1 (349.76 x 102.32 mm)

Print at 100 % (actual size, do NOT fit to page) and check that the scale bar below measures 100 mm.

Each stick: outer body 83 x 10 mm, LED window 74 x 4 mm, 2 mm free space between sticks.

Black dot = the ball of the stick (the round marker on its board). Mount each stick with its ball at the dot (left half: dots left, right half: dots right, caps: up).

CUT LINE (page 1 of 2): cut along it and discard the right part

Butt the two cut edges together (the crosses must meet) and tape.

This page: the LEFT half of the arrow (arrow x 0.00 ... 174.88 mm).

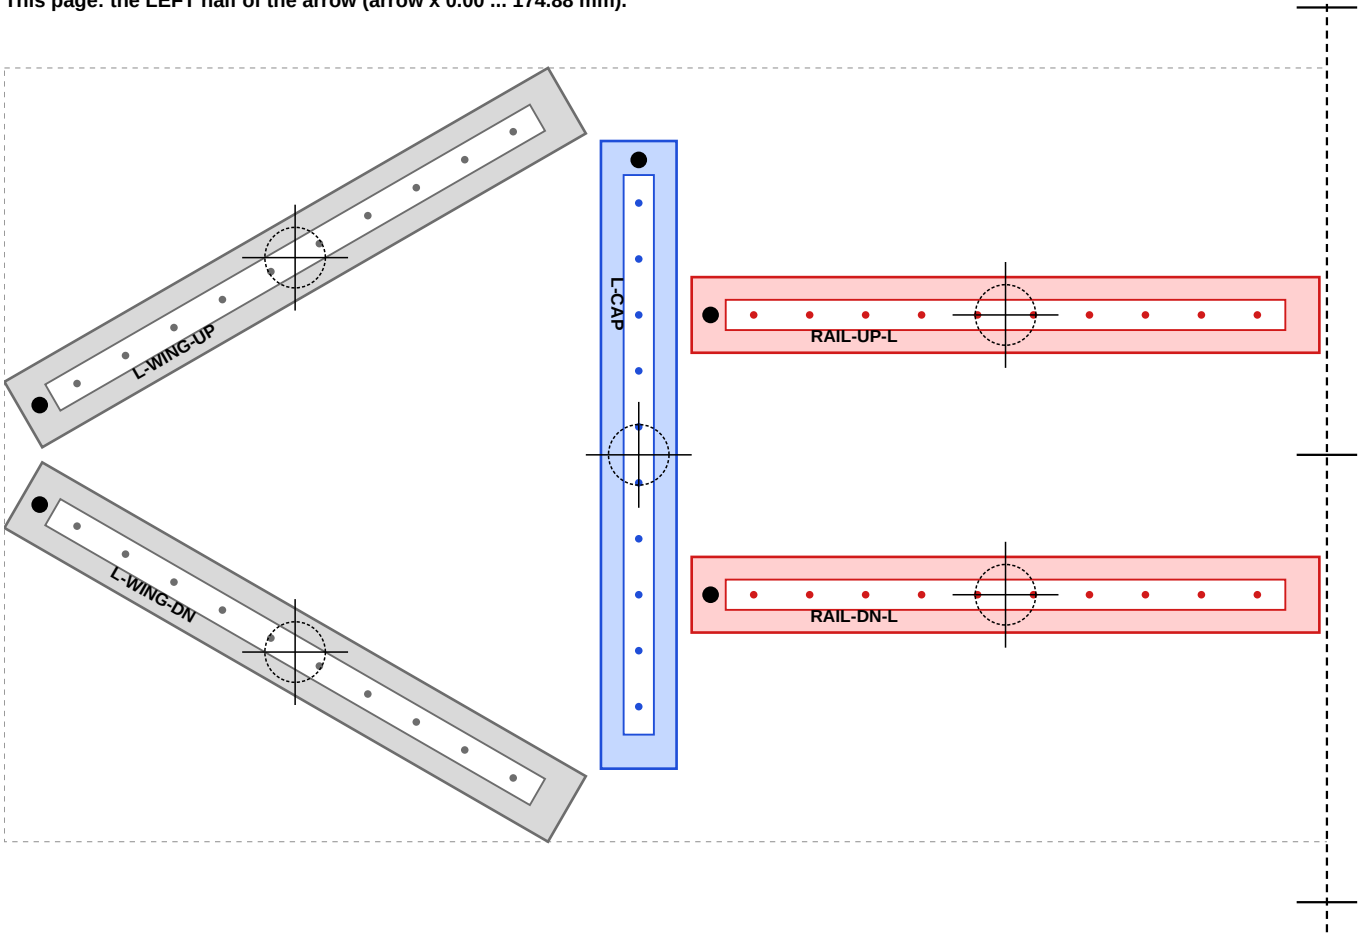



Drilling positions: centre of each stick = centre of the cable hole (mm from the top-left corner of the arrow)

Stick	x	y	angle	Grove connector on the shield
L-CAP	83.88	51.16	90	D2
L-WING-UP	38.44	25.08	150	D3
L-WING-DN	38.44	77.24	30	D4
RAIL-UP-L	132.38	32.66	0	D5
RAIL-UP-R	217.38	32.66	0	D6
RAIL-DN-L	132.38	69.66	0	D7
RAIL-DN-R	217.38	69.66	0	D8
R-CAP	265.88	51.16	90	A0
R-WING-UP	311.32	25.08	30	A1
R-WING-DN	311.32	77.24	150	A2

Stick arrow, drill template 1:1 (349.76 x 102.32 mm)

Print at 100 % (actual size, do NOT fit to page) and check that the scale bar below measures 100 mm.

Each stick: outer body 83 x 10 mm, LED window 74 x 4 mm, 2 mm free space between sticks.

Black dot = the ball of the stick (the round marker on its board). Mount each stick with its ball at the dot (left half: dots left, right half: dots right, caps: up).

This page: the RIGHT half of the arrow (arrow x 174.88 ... 349.76 mm).

CUT LINE (page 2 of 2): cut along it and discard the left part
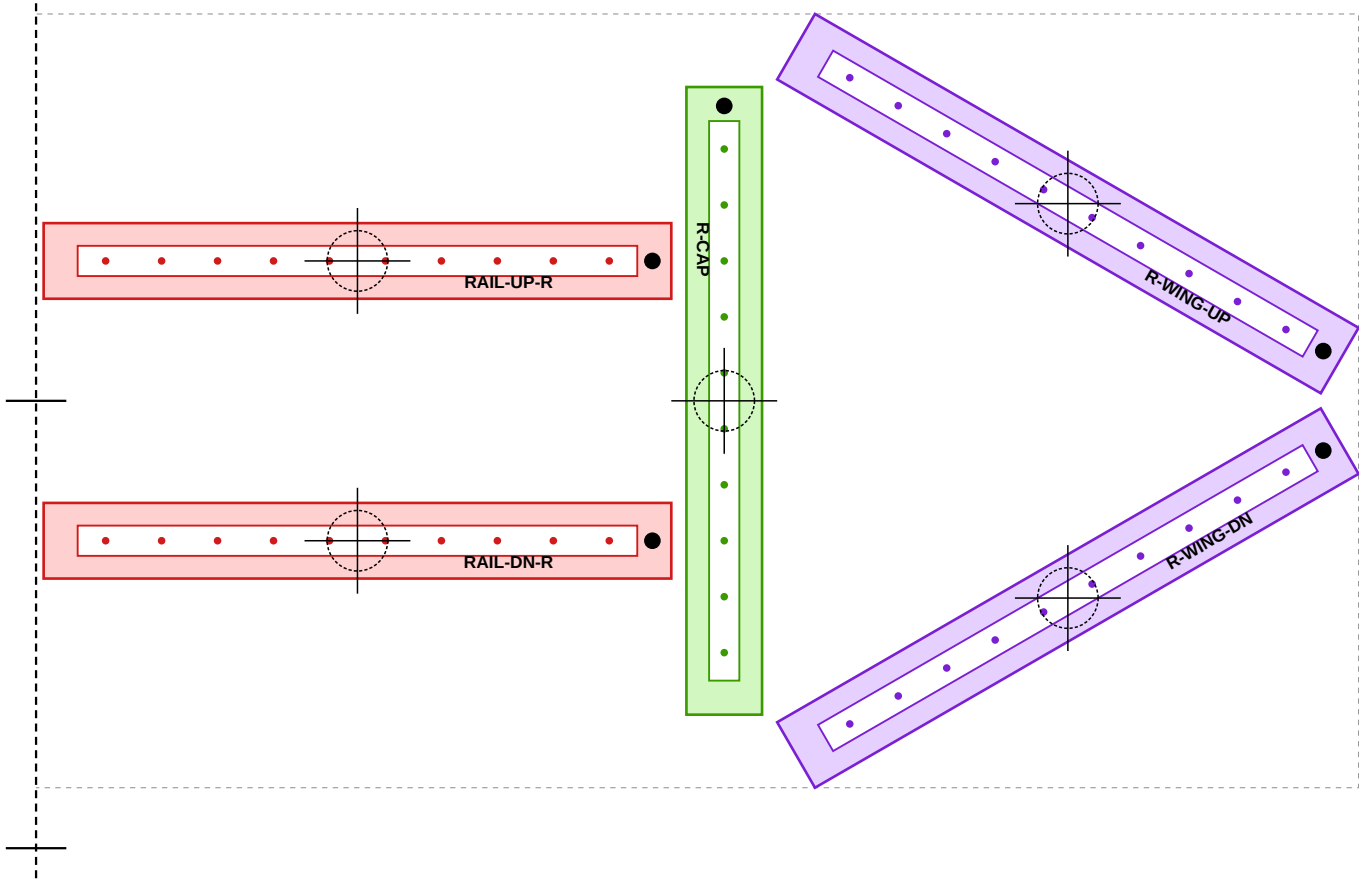
Butt the two cut edges together (the crosses must meet) and tape.