Hex rotary switch test - where the wires go (not to scale)

Mega 2560: long double-row header (from above)

One column holds the even pins, the other the odd pins (read the numbers on the board).

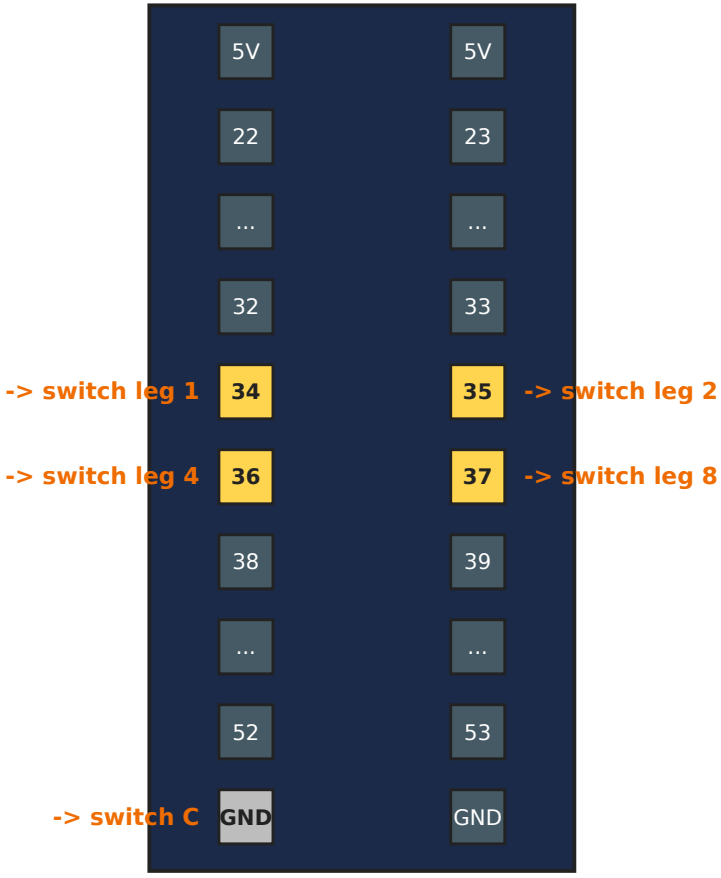

Yellow = the four switch pins, grey = GND for the common leg C.

Any other GND pin of the Mega works as well.

Switch legs

Switch leg	Bit weight	Mega pin
1	1	D34
2	2	D35
4	4	D36
8	8	D37
C (one of two)	common	GND
C (other)	-	free

The legs of the switch are marked 1, 2, 4, 8 and C on its body.
The order of the legs on the case differs between makers: read the marks.

LCD (I2C backpack)

GND	-> Mega GND
VCC	-> Mega 5V
SDA	-> Mega D20
SCL	-> Mega D21

D20 (SDA) and D21 (SCL) are on the communication header; the pins marked SDA and SCL next to AREF are the same two lines.