

DEVIL XBT

Data Formats

TURO TECHNOLOGY PTY LTD



Devil Data Formats

Disclaimer

Although Turo Technology Pty Ltd (Turo) has taken all care in preparing this document, Turo makes no explicit or implied warranty with regards to the information contained herein and will not be liable for any damage or claim arising out of the information.

Revision History

Devil Data Formats

Date	Revision	Description
20 April 2009	R12	<ol style="list-style-type: none">1. Table 3.5.2 CSIRO Format foot note, number of bytes for ship call sign now 9.2. Section 3.5 Transmitted Data Format (TxData) explanation of maximum number of Temperature Depth points.
8 Feb 2008	R11	<ol style="list-style-type: none">1. Updated netCDF format.
4 Sept 2008	R10	<ol style="list-style-type: none">1. Iridium header byte definition
28 June 2008	R9	<ol style="list-style-type: none">1. Corrected CSIRO Format call sign bytes.
25 June 2008	R8	<ol style="list-style-type: none">1. Iridium SBD packet length changed.
16 June 2008	R7	<ol style="list-style-type: none">1. ASCII mode in "Packing Iridium Transmissions"
27 Apr 2008	R6	<ol style="list-style-type: none">1. ASCII mode in "Packing Iridium Transmissions"
5 Mar 2008	R5	<ol style="list-style-type: none">1.
22 Feb 2008	R4	<ol style="list-style-type: none">1. Amended JJVV file description and added .xvt format and added CSIRO transmission format
17 Jan 2008	R3	<ol style="list-style-type: none">1. Added reassembling and TxData (transmit message) format.
31 May 2007	R3	<ol style="list-style-type: none">1. Added definitions for columns of ascii formatted data.
28 May 2007	R2	<ol style="list-style-type: none">1. Added links to netCDF and WOCE version 3.0 format.
17 May 2007	R1	<ol style="list-style-type: none">1. Original document

CONTENTS

1	Devil Files and Formats.....	2
2	Files	2
2.1	netCDF File	2
2.2	Exported Ascii Text Files	4
2.2.1	CSIRO Text Format	4
2.2.2	CSV Format.....	5
2.3	JJVV File	5
2.4	Sage XBT File	6
3	Satellite Transmission Formats	7
3.1	Packaging Argos Transmissions.....	7
3.2	Recovering Argos Transmissions:.....	8
3.3	Packaging Iridium Transmissions	9
3.4	Recovering Iridium Transmissions:	9
3.5	Transmitted Data Format (TxData).....	10
3.5.1	BOM Format	11
3.5.2	CSIRO Format.....	12

1 Devil Files and Formats

A number of different files are created. The files and formats used are:

- netCDF file
- 2 types of ascii text file, “CSIRO” format and csv format
- an ascii text file of a hexadecimal representation of a JJVV bathymessage
- an ascii text file in “Sage XBT” format
- 2 types of binary formats for satellite transmission
- 2 type of packaging formats for satellite transmission, depending on the transmitter being used

The underlying data is stored in netCDF format.

Data from every XBT drop and test drop is saved in netCDF format and JJVV formats. Depending on the installation MODE, other files are also automatically generated.

2 Files

2.1 netCDF File

The netCDF file follows the WOCE version 3.0 format as described in:

http://woce.nodc.noaa.gov/wdiu/utls/netcdf/woce_conventions/woce_netcdf_format.htm.

A complete description of netCDF files can be found at

<http://www.unidata.ucar.edu/software/netcdf>.

Tools for reading these files are summarised in:

http://www.bodc.ac.uk/data/online_delivery/international_sea_level/woce_netcdf.html.

This data format has many advantages, the most important of which is that it is self-describing. This means that software packages can directly read the data and determine their structure, the variables' names and essential metadata such as the units.

The following is an example of a file describing the format:

```
netcdf drop019 {
dimensions:
    time = 1 ;
    depth = 1577 ;
    latitude = 1 ;
    longitude = 1 ;
variables:
    int time(time) ;
        time:long_name = "time" ;
        time:units = "seconds since 2008-01-01 00:00:00" ;
        time:data_min = 14083562 ;
```

```

        time:data_max = 14083562 ;
        time:_FillValue = -1 ;
int woce_date(time) ;
    woce_date:long_name = "WOCE date" ;
    woce_date:units = "yyyymmdd UTC" ;
    woce_date:data_min = 20080612 ;
    woce_date:data_max = 20080612 ;
    woce_date:_FillValue = -1 ;
int woce_time(time) ;
    woce_time:long_name = "WOCE time" ;
    woce_time:units = "hhmmss UTC" ;
    woce_time:data_min = 602 ;
    woce_time:data_max = 602 ;
    woce_time:_FillValue = -1 ;
float depth(depth) ;
    depth:long_name = "depth" ;
    depth:units = "meters" ;
    depth:positive = "up" ;
    depth:data_min = 0.67f ;
    depth:data_max = 999.21f ;
    depth:_FillValue = NaNf ;
double latitude(latitude) ;
    latitude:long_name = "latitude" ;
    latitude:units = "degrees_N" ;
    latitude:data_min = -9.37 ;
    latitude:data_max = -9.37 ;
    latitude:_FillValue = NaN ;
double longitude(longitude) ;
    longitude:long_name = "longitude" ;
    longitude:units = "degrees_E" ;
    longitude:data_min = 132.436666666667 ;
    longitude:data_max = 132.436666666667 ;
    longitude:_FillValue = NaN ;
double sampleTime(time, depth, latitude, longitude) ;
    sampleTime:long_name = "sample time" ;
    sampleTime:units = "milliseconds since 2008-01-01 00:00:00" ;
    sampleTime:data_min = 14083562281. ;
    sampleTime:data_max = 14083719890. ;
    sampleTime:_FillValue = NaN ;
float temperature(time, depth, latitude, longitude) ;
    temperature:long_name = "temperature" ;
    temperature:units = "degree C" ;
    temperature:data_min = 19.061f ;
    temperature:data_max = 27.472f ;
    temperature:_FillValue = NaNf ;
float resistance(time, depth, latitude, longitude) ;
    resistance:long_name = "resistance" ;
    resistance:units = "ohms" ;
    resistance:data_min = 4461.f ;
    resistance:data_max = 6517.f ;
    resistance:_FillValue = NaNf ;
float procTemperature(time, depth, latitude, longitude) ;
    procTemperature:long_name = "processed temperature" ;
    procTemperature:units = "degree C" ;
    procTemperature:data_min = 19.061f ;
    procTemperature:data_max = 27.472f ;
    procTemperature:_FillValue = NaNf ;
byte sampleQC(time, depth, latitude, longitude) ;
    sampleQC:long_name = "sample QC" ;
    sampleQC:units = "" ;
    sampleQC:data_min = 0b ;
    sampleQC:data_max = 0b ;
    sampleQC:_FillValue = -51b ;

// global attributes:
:WOCE_VERSION = "3.0" ;
:Conventions = "COARDS/WOCE" ;
:Data_Type = "XBT" ;
:Ship = "Wana Bhum" ;
:CallSign = "HSB3403" ;
:Voyage = "618/1118" ;
:LineNo = "PX02" ;
:Operator = "1st Officer" ;
:SoftwareVersion = "5.18" ;
:CRC = "2a91bf39" ;
:Type = "DeepBlue" ;
:Code = "052" ;
:InterfaceType = "Devil" ;
:HardwareVersion = "4.4.1" ;

```

```

:HardwareSerialNo = "45" ;
:FirmwareVersion = "3.1" ;
:HardwareCalibration = "Cal1 = 17998.2, Cal2 = 3900.5, Cal Date = 13:46 26/11/2007" ;
:SerialNo = "904181" ;
:TestCanister = "no" ;
:Scale = "0.9991" ;
:Offset = "10.0" ;
:DropNo = "19" ;
:WaterDepth = "NaN" ;
:XBT_SST = "27.456" ;
:XBT_SST_DEPTH = "NaN" ;
:SeaState = " " ;
:Operations = " " ;
:PreDropComments = "MOD SEA,SPD 17.2 KTS,AIR TEMP 27 C" ;
:PostDropComments = "\n",
    "QC failure: Failed climatology test\n",
    "" ;
}

```

2.2 Exported Ascii Text Files

The underlying data in the netCDF files can be exported in ASCII format for quick viewing or use in spreadsheets, etc. The only way to generate these files is by operator intervention using the Export facility.

Select either the CSIRO Text or the CSV format.

2.2.1 CSIRO Text Format

For CSIRO Text Format of netCDF file “drop008.nc” the example output “drop8.asc” is:

```

HShip Lollipop
HCruise SOTIV
HLineNo
HDrop number 8
HLatitude 49:00.00S
HLongitude 179:10.00E
HBottom depth unknown
HProbe type DeepBlue
HHardware version 3.40.1.0
HHardware serial no. 031
HFirmware version 2.05
HHardware calibration Cal1 = 17987, Cal2 = 3896, Cal Date = 08:46 02/05/2007
S Probe launched,10-May-2007,13:09:30
DDate 10-May-2007
DTime (UTC) 13:09:30
DLast header record
D 0.000, 0.67, 4703.500, 26.40
D 0.110, 1.34, 4703.400, 26.40
D 0.219, 2.01, 4702.900, 26.40
D 0.329, 2.68, 4703.200, 26.40
D 0.438, 3.34, 4703.600, 26.40
D 0.548, 4.01, 4703.200, 26.40
D 0.657, 4.68, 4703.200, 26.40
D 0.766, 5.35, 4703.300, 26.40
D 0.876, 6.02, 4703.400, 26.40
D 0.985, 6.69, 4703.200, 26.40

```

The lines beginning with ‘H’ are header lines containing metadata.

The line beginning with ‘S’ gives the launch date and time.

The lines beginning with ‘D’ contain recorded data.

Each line of profile data (after the ‘D’) contains:

time in seconds, depth in metres, thermistor resistance in ohms, temperature in deg C

The “time” is the zero based recorded computer time when that line of data was processed, this is NOT the exact acquisition time. The acquisition time is determined by the sample interval which is controlled by the Devil box and is exactly 0.1 seconds. This is a legacy parameter that was used to confirm that no sample was missed by the computer.

2.2.2 CSV Format

For CSV of netCDF file “drop008.nc” the example output file “drop008.csv” is

```
Time,Depth,Resistance,Temperature
0.000, 0.67, 4703.500, 26.40
0.110, 1.34, 4703.400, 26.40
0.219, 2.01, 4702.900, 26.40
0.329, 2.68, 4703.200, 26.40
0.438, 3.34, 4703.600, 26.40
0.548, 4.01, 4703.200, 26.40
0.657, 4.68, 4703.200, 26.40
0.766, 5.35, 4703.300, 26.40
0.876, 6.02, 4703.400, 26.40
0.985, 6.69, 4703.200, 26.40
1.095, 7.36, 4703.400, 26.40
1.095, 8.03, 4703.500, 26.40
1.204, 8.69, 4703.600, 26.40
1.313, 9.36, 4702.400, 26.41
1.423, 10.03, 4703.100, 26.40
```

The data in each column is as per the definition in the CSIRO Text Format.

2.3 JJVV File

The JJVV format is a binary format specified in

http://www.meds-sdmm.dfo-mpo.gc.ca/Meds/Prog_Int/J-COMM/CODES/bathycode_e.htm.

In every installation MODE an ascii hexadecimal representation of a JJVV message is generated with a file extension of “.jjv”. The following is an example:

```
JJVV 05028 2101/ 339000 139001 88888 05271 04264 13264 99901 12264
13240 13182 14127 15110 15127 16141 25141 25129 26094 27051 27022
28015 29017 99902 01017 SHIP=
```

The temperature depth points are obtained from the XBT Message used for transmission. The method used to obtain these points is either selected in the menu item Configuration->Transmitter Message or in the case of SECURE Mode the method used is CSIRO Fixed Tolerance using the Douglas Peucker Decimator (fixed tolerance).

The JJVV file is not transmitted, it is only generated and saved in the same directory as the netCDF files.

2.4 Sage XBT File

In some installation MODEs an ascii text file with extension “.xbt” is generated, in other MODEs it is possible to export in this format. This text file has the following format:

```
Sage Input File
07/02/2008
13:41
C:\XBT 080207\FEB08\drop001.nc
45 00 S
148 00 E
222
21
Depth Temp
0 23.6
47 23.7
49 23.8
59 23.6
62 23.4
67 23.0
76 22.5
78 22.4
80 22.3
86 21.9
99 21.4
103 21.2
105 21.0
125 20.7
132 20.5
141 20.3
175 19.6
203 19.2
204 19.1
205 19.0
222 18.3
```

Where the lines are:

Line 1	heading = “Sage Input File”
Line 2	date
Line 3	time
Line 4	the full path and file name to the netCDF file
Line 5	latitude
Line 6	longitude
Line 7	maximum depth of this profile in metres
Line 8	number of Depth Temperature points (metres, deg C) in this file
Line 9	heading “Depth Temp”
Line 10	first Depth Temperature pair (has to be a depth = 0 metres)
Line 11	second Depth Temperature pair eg “1 25.01” = 1 metre, 25.01°C
Lines >11	remainder of the Depth Temperature pairs

3 Satellite Transmission Formats

When data is transmitted by satellite the message may be broken into several packets – for example 4 packets of 32 byte Argos messages or several packets of 335 byte Iridium SBD messages (the number of bytes may change, see page 8, Recovering Iridium Transmissions:). These packets have to be reassembled into the one contiguous message. In other documents this is referred to as the TxData.

This poses restrictions on the size of the transmit message (TxData), depending on the particular transmitter. The following is implemented in the software:

ARGOS: maximum of 116 bytes

IRIDIUM: maximum of 8000 bytes

3.1 Packaging Argos Transmissions

The TxData[T] array is separated into consecutive 29 byte packets, each packet is preceded by a 3 byte header to produce a 32 byte packet. The length of TxData can be up to 116 bytes. If TxData is longer, then the array is truncated to use only the first 116 bytes, which are then packaged for transmission.

Maximum Argos lengths of 32 bytes are used. Four of these transmissions are used to send up to 116 bytes of data. If the data (TxData[T]) is less than 116 bytes, the transmission data is padded out with zeroes (0x00) to make up 116 bytes.

The consecutive transmissions are cycled through four 32 byte packets.

Header Definition

bits 0 to 15:	crc	this is a 16 bit cyclic redundancy check of the following 30 bytes (bits 16 thru 255)
bits 16 to 21:	sn	binary number, initially random, then incremented for subsequent TxData
bits 22 to 23:	txnum	binary number, starting at 0, then incremented for subsequent 32 byte packets of the current TxData.

CRC Definition

CRC-CCITT polynomial $X^{16} + X^{12} + X^5 + 1$

Width : 16
Poly : 1021
Init : FFFF
RefIn : False
RefOut : False
XorOut : 0000

Reference information from: Ross N. Williams, "A Painless Guide to CRC Error Detection Algorithms", 19 August 1993.

Transmission Byte Order

The following illustrates the packaging a message of 80 bytes (TxData[80]) for **Argos**.

assume T = 80 (length of TxData)

assume sn binary = 001000

ARGOS BYTE	ARGOS MESSAGE /PACKET	DATA
1 st -2 nd	message 1 =	CRC
3 rd	message 1 =	0x20
4 th -32 nd	packet 1 =	TxData[0 thru 28]
1 st -2 nd	message 2 =	CRC
3 rd	message 2 =	0x21
4 th -32 nd	packet 2 =	TxData[29 thru 57]
1 st -2 nd	message 3 =	CRC
3 rd	message 3 =	0x22
4 th -25 th	packet 3 =	TxData[58 thru 79]
26 th -32 nd	packet 3 =	0x00
1 st -2 nd	message 4 =	CRC
3 rd	message 4 =	0x23
4 th -32 nd	packet 4 =	0x00

3.2 Recovering Argos Transmissions:

Recovering the data involves acquiring a collection of Argos messages. Each message should be 32 bytes long. The data is reassembled in the steps:

1. Check that the Argos messages have come from the same Argos ID.
2. A TxData is broken up into 4 packets, each packet is in a single Argos message. The first 3 bytes of each Argos message consists of a 2 byte CRC (1st & 2nd bytes) and a sn_txnum number (3rd byte). The four Argos messages that contain the four consecutive packets making up a single TxData have consecutive sn_txnum (3rd byte) values beginning with XXXX XX00B. Identify these four Argos messages.
3. Check each message for errors by calculating the CRC and comparing it with the CRC in the first 2 bytes of the message. If the calculated CRC is different from that in the message, there are errors in that message.
4. Assemble the full TxData by concatenating the 4th through 32nd bytes of each consecutive message (116 bytes in total). This is the raw TxData from the Devil XBT system.

3.3 Packaging Iridium Transmissions

The Iridium transmission uses the Short Burst Data mode. The Transmitter supported is the NAL 9601-D. This unit only supports 340 bytes transmit (Mobile Originate – MO) and 270 bytes receive (Mobile Terminate MT).

The TxData message can be up to 8000 bytes. TxData is divided into 335 byte parcels. Each parcel has a 5 byte header and then it is transmitted as a single SBD packet.

SBD Packets

The 5 byte header has the following definition:

BYTE	
1 st -2 nd	= Sequence Number (unsigned int)
3 rd	= Parcel Number (SBD number) (unsigned char)
4 th	= Total number of Parcels (SBD's) (unsigned char)
5 th	= not used

If CONTConfigure has the “ASCII” parameter in the command, then no header is implemented and the data begins at the first byte.

When the header is implement the remainder of the SBD packet contains up to 335 bytes of TxData. Otherwise when the header is not implemented the SBD packet contains up to 340 bytes of TxData.

The Sequence Number begins at a random number the first time the program is used after the program is installed and then incremented for every TxData.

The Parcel Number begins at 1 for every new TxData and is incremented for each SBD packet.

NOTE: The number of bytes in an SBD (MT or MO) may vary in future as Iridium and/or NAL change the technology.

3.4 Recovering Iridium Transmissions:

There are 2 ways to sort the order of the SBD packets.

1. Each SBD packet arrives as an attachment to an email. The filename of the attachment includes a sequence number allocated by the 9600-D transmitter and incremented for each subsequent packet.
2. The other way is to use the 5 byte header of the data which is present when the “ASCII” parameter in the command CONTConfigure was not used. For a particular message (TxData), every packet has the same Sequence Number. So the packets with the same sequence number have the Parcel Number incremented (beginning at 1) for each successive parcel. The parcels are then concatenated, leaving out the 5 byte header. Thus reassembled, it is the raw TxData from the Devil XBT system.

3.5 Transmitted Data Format (TxData)

Once reassembled the message (TxData) format is the same irrespective of the transmitter used.

There are 2 formats: BOM format and CSIRO format. The CSIRO format has all the parameters that the BOM format has plus several extra features. The extras features are:

- Number of Temperature Depth points is limited to 63 in the BOM format and has a maximum of 16383 in the CSIRO format.
- The CSIRO format has provision for a 9 character ship call sign. BOM format has no provision for a call sign.

The practical affect of these differences is that it is possible to recreate a JJVV file from the CSIRO format, but not possible from a BOM format because of the ship call sign, and it is possible to have much longer messages. Note that to have longer messages it is necessary that the transmitter being used can support longer messages.


Note that the maximum number of Temperature Depth points mentioned here (63 and 16383) are defined for these two formats (BOM and CSIRO). But when they are packaged for transmission, another restriction is set by the particular transmitter used (Argos or Iridium – see section 3 Satellite Transmission Formats) that further limits the number of Temperature Depth points – these are:

- 34 points for BOM format using Argos or Iridium
- 31 points for CSIRO format using Argos
- 2262 points for CSIRO format using Iridium (in the future, if there is demand, this will be changed to accommodate up to 16383 points)

It is recommended that ALL new applications use the CSIRO format and not the BOM format.

3.5.1 BOM Format


The following specifies the reassembled TxData when in BOM format:

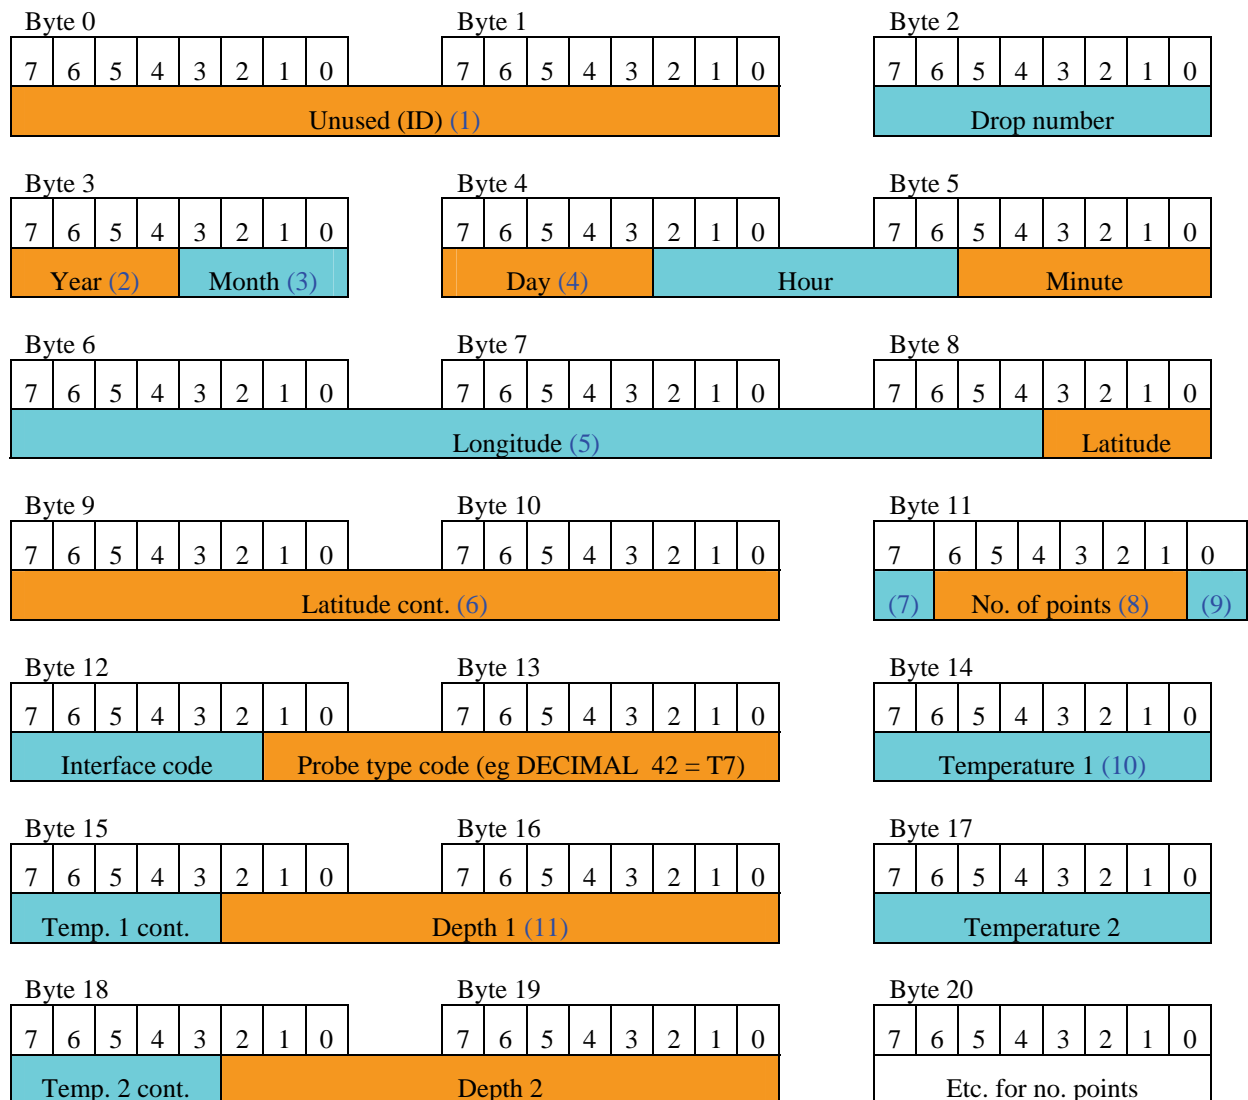

1. Message type ID. Ascii 'B2' if fixed length (34 points) or 'B3' for fixed tolerance (maximum of 63 points)
2. Year is stored as modulo 16 (eg 2008/16 = 125 with 8 remainder, 8 = year)
3. Month number = 0 -> 11 = Jan -> Dec
4. Day number = 1 -> 28, or 29 or 30 or 31 (0 = invalid)
5. Longitude * 2900 (eg HEX27989 = DECIMAL 162185/2900 = 55.92 = 55deg.55min 55sec E)
6. (Latitude + 90) * 2900 (eg HEX42CF = DECIMAL 271311/2900 = 93.55 (-90) = 3deg.33min 33sec N)
7. If set, this bit indicates that data is to be sent to the GTS.
8. Number of Temperature/Depth points here (max 63)
9. Most significant bit of interface type code
10. (Temperature (°C) + 3) * 200 (eg HEX 18F6, DECIMAL 6390 = 6390/300 - 3 = 28.95)
11. Depth * 2 (eg HEX 7B, DECIMAL 123 = 123/2 = 61.5)

3.5.2 CSIRO Format

The following specifies the reassembled TxData when in CSIRO format:

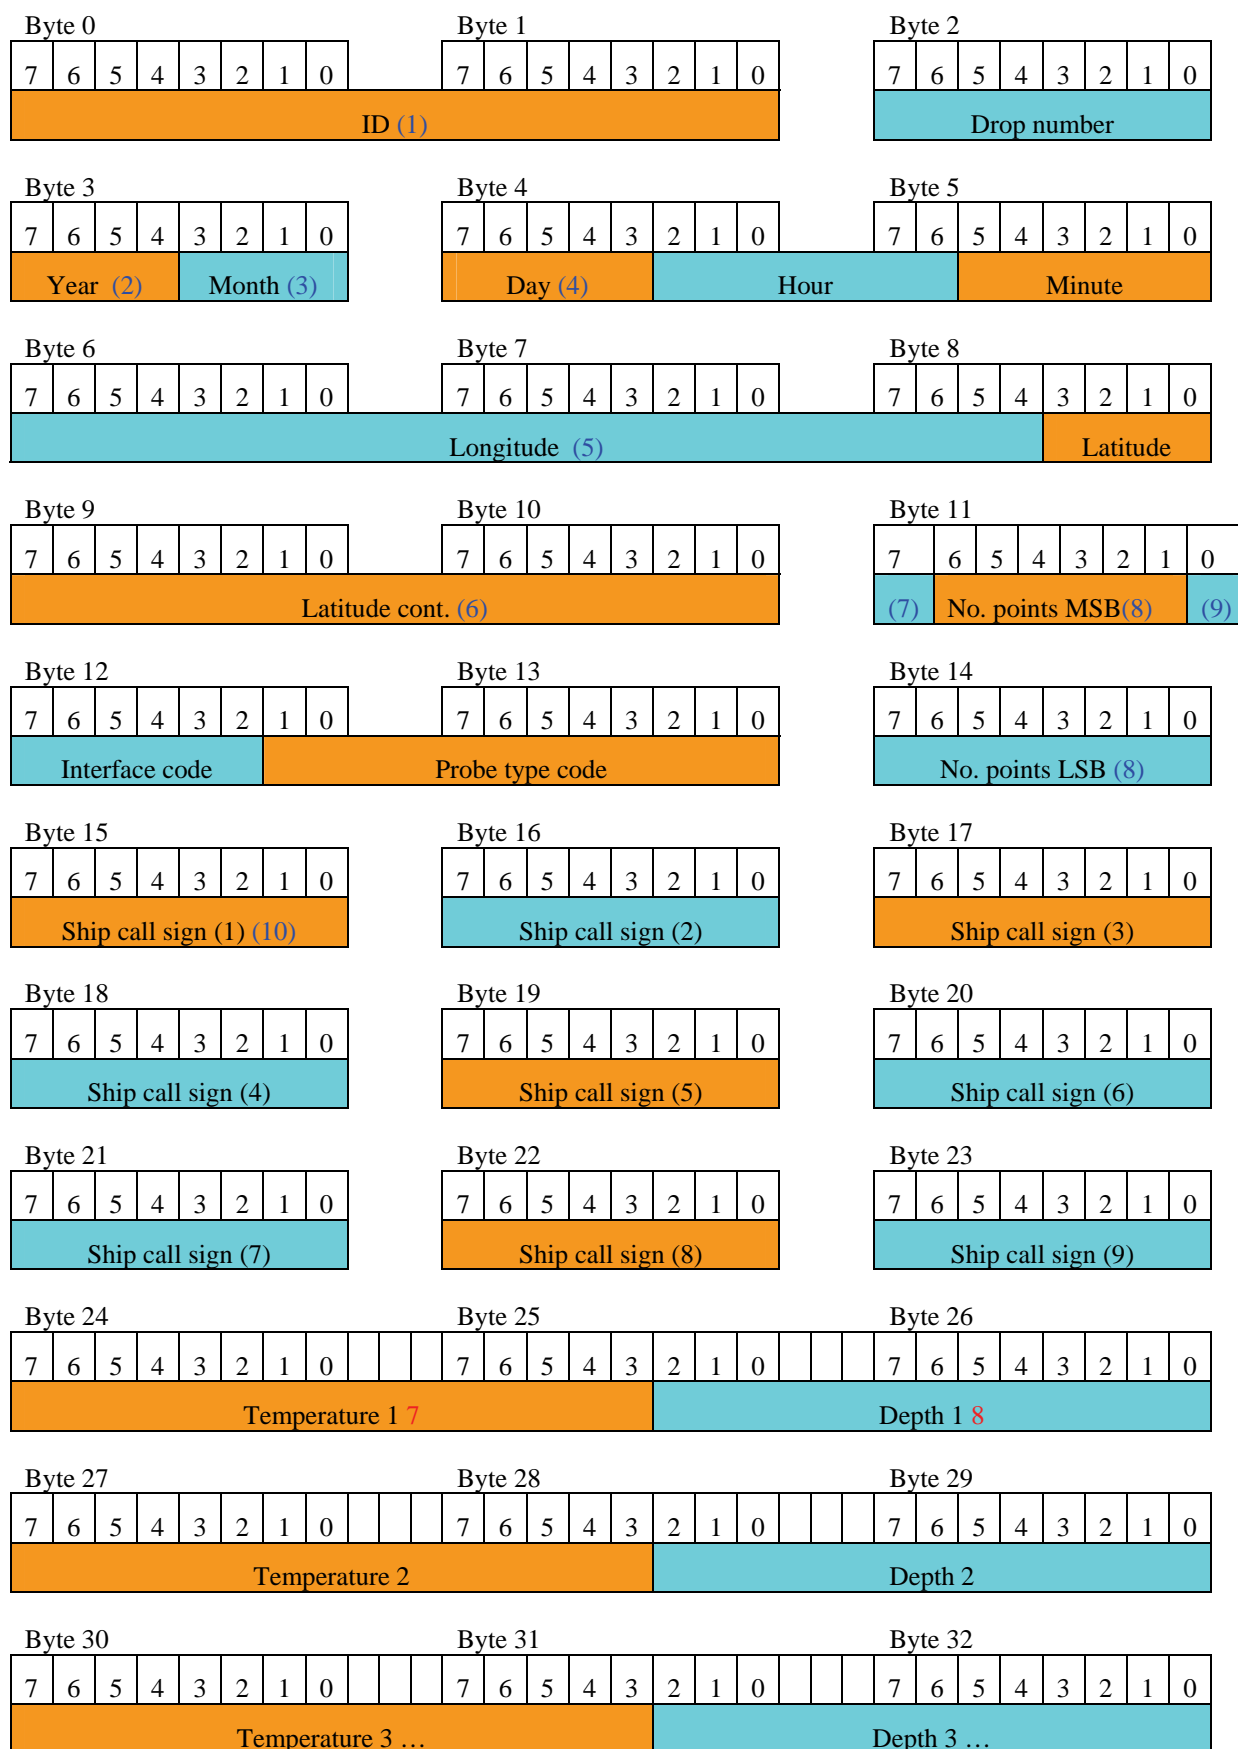

1. Message type ID. Ascii 'C2' if fixed length (eg 34 points) or 'C3' for fixed tolerance (maximum of 63 points)
2. Year is stored as modulo 16 (eg $2008/16 = 125$ with 8 remainder, 8 = year)
3. Month number = 0 -> 11 = Jan -> Dec
4. Day number = 1 -> 28, or 29 or 30 or 31 (0 = invalid)
5. Longitude * 2900 (eg HEX27989 = DECIMAL 162185/2900 = 55.92 = 55deg.55min 55sec E)
6. (Latitude + 90) * 2900 (eg HEX42CF = DECIMAL 271311/2900 = 93.55 (-90) = 3deg.33min 33sec N)
7. If set, this bit indicates that data is to be sent to the GTS.
8. Number of Temperature/Depth points here (max 16383)
9. Most significant bit of interface type code
10. Ship call sign in ASCII characters (max 9 characters)
11. (Temperature (°C) + 3) * 200 (eg HEX 18F6, DECIMAL 6390 = $6390/300 - 3 = 28.95$)
12. Depth * 2 (eg HEX 7B, DECIMAL 123 = $123/2 = 61.5$)