

IB-0400 - 8 Ch. GMSL2 interface module

[Description](#)

[Blockdiagram](#)

[Connection and jumper config](#)

[Driver software](#)

[Documentation](#)

[General](#)

[Deserializer](#)


Description

The IB-0400 module is an interface module which add 8 GMSL2 channels to the BLOX platform. The module is build on the MAX96724 deserializer, this is a new generation Quad Tunneling GMSL2/1 deserializer from Analog Semiconductor.

The module has 2 deserializer. Each serialized is connected to 2×2 lanes CSI-2 interface. With the virtual lanes, the cameras can be streamed over those 2 CSI-2 interfaces.

The module has a configurable output voltage selection which allows to have 17V or 24V on the GMSL2 outputs. The 17V output are for the Leopard Imaging cameras, the 24V can be used for the Allied Vision cameras.

Blockdiagram

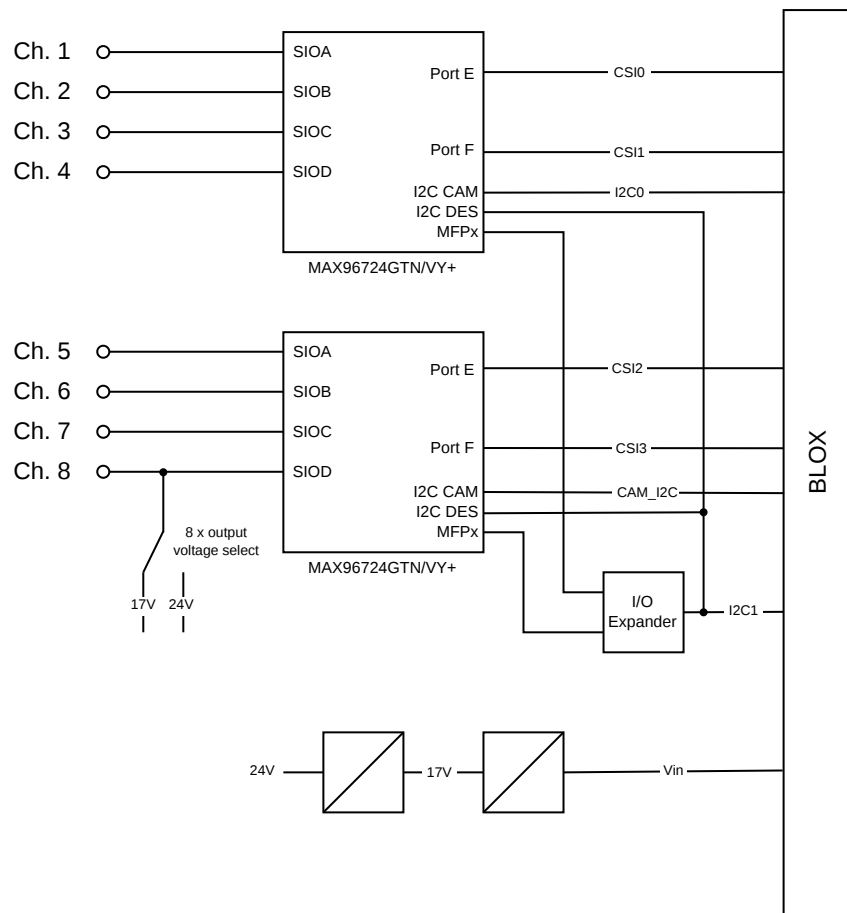

Connection and jumper config

The image below shows the connections and which connection is which channel.

Important are the jumpers for the power supply selection. When placing the jumper in the upper position, the output will be connected 17V. When placing the jumper in the lower position, the output will be connected to 24V.

Make sure you select the right voltage per channel as choosing the wrong voltage could destroy the camera!

Each output is protected with a fuse. The type number of the fuse is 0453.75 from Littelfuse



Driver software

The driver is currently in development. For now only Ch1 is supported with the LI-AR0234CS-GMSL2 camera from Leopard Imaging. The camera is based on the NVIDIA reference design.

The source code is available under Github:

```
git clone git@github.com:ai-blox/max9672.git  
cd max9672
```

```
git checkout
```

Documentation

General

[0453.75.pdf](#)

Deserializer

[max96724.pdf](#)