


## TELESCOPIC SYSTEMS



**mit-mol** Telescopic systems, also known as Booms or extendable conveyors, will load/unload virtually any loose item quickly, safely and efficiently. By extending directly into the Truck / Trailer without the need of support we will significantly reduce load/unload times. Our systems are modern and robust in design to provide our users superior service and reliability.

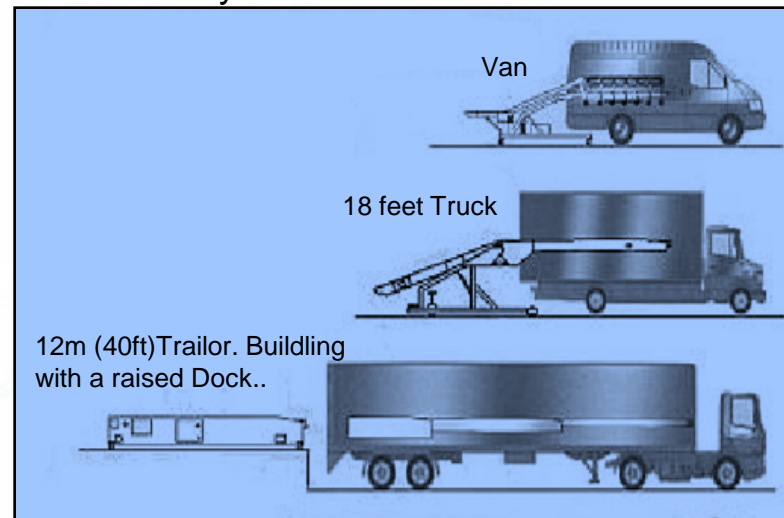

MODEL NO	RETRACTED (FT)	REACH(FT)	EXTENDED(FT)
MTS-SS-20	13	7	20
MTS-SS-30	18	12	30
MTS-SS-40	23	17	40
MTS-DS-20	11	10	21
MTS-DS-30	14	16	30
MTS-DS-40	18	24	42
MTS-DS-54	22	32	54

Gravity Telescopic Boom Conveyors will load most items quickly, safely and efficiently by extending directly into the trailer without the need of support. The use of this unit will reduce load times significantly whilst improving operator working conditions.

50 kg capacity per linear metre (level)  
Heavy duty ø50 steel rollers.  
600mm and 800mm roller width. 75mm roller pitch.

3° – 5° gravity decline typical.



All Models  
Minimum Base Bed Height 1000mm  
Max Belt Width 900mm  
Max Boom Travel Speed 18m/min  
Max Conveyor Speed 28 m/min.

