

## FENDER" VIBROLUX"SCHEMATIC

1 C 1-VOLTAGES READ TO GROUND. WITH ELECTRONIC VOLTMETER. VALUES SHOWN + OR - 20%, 2-ALL RESISTORS 1/2 WATT, 10%, TOLERANCE IF NOT SPECIFIED. 3-ALL CAPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED.

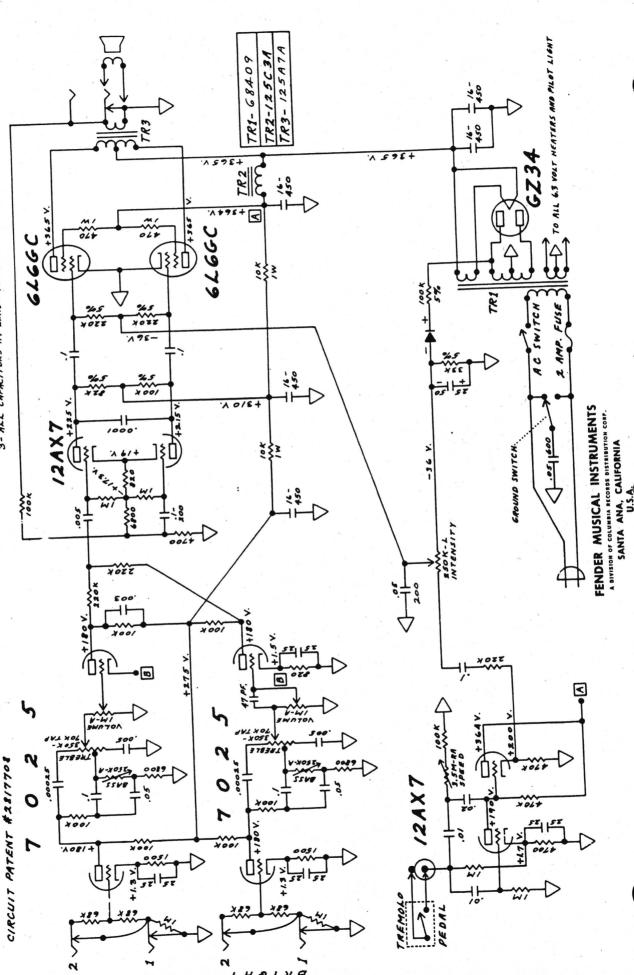

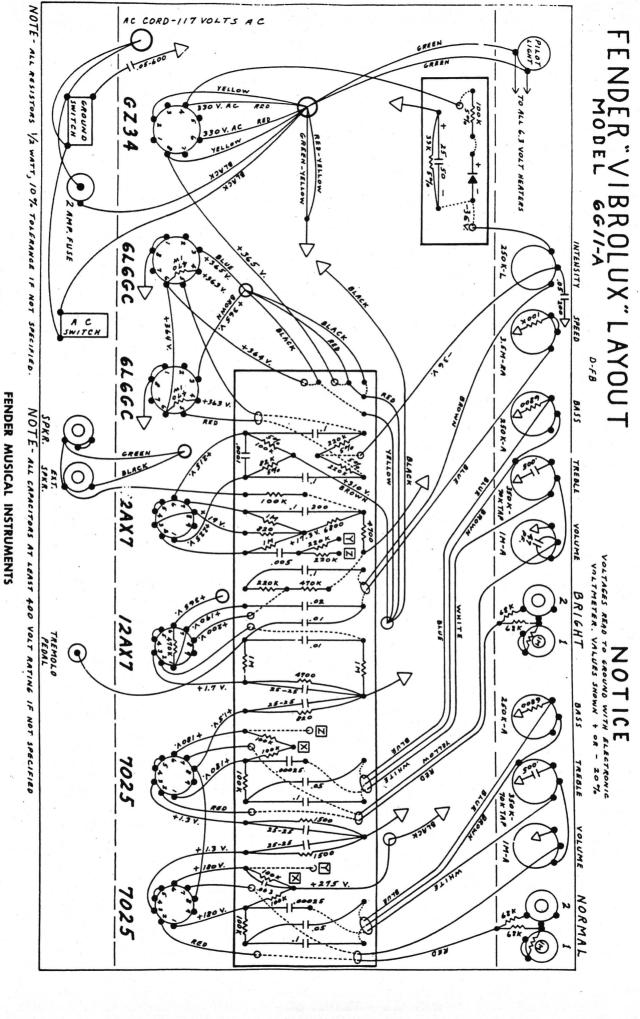

A DIVISION OF COLUMBIA RECORDS DISTRIBUTION CORP.

SANTA ANA, CALIFORNIA U.S.A.