
FENDER" VIBROLUX" SCHEMATIC MODEL 66// 1-FA

NOTICE

I- VOLTAGES READ TO GROUND WITH ELECTRONIC
VOLTMETER. VALUES SHOWN + OR - 20%.

2-ALL RESISTORS 1/2 WATT, 10% TOLERANCE IF NOT SPECIFIED.


3-ALL CAPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED.

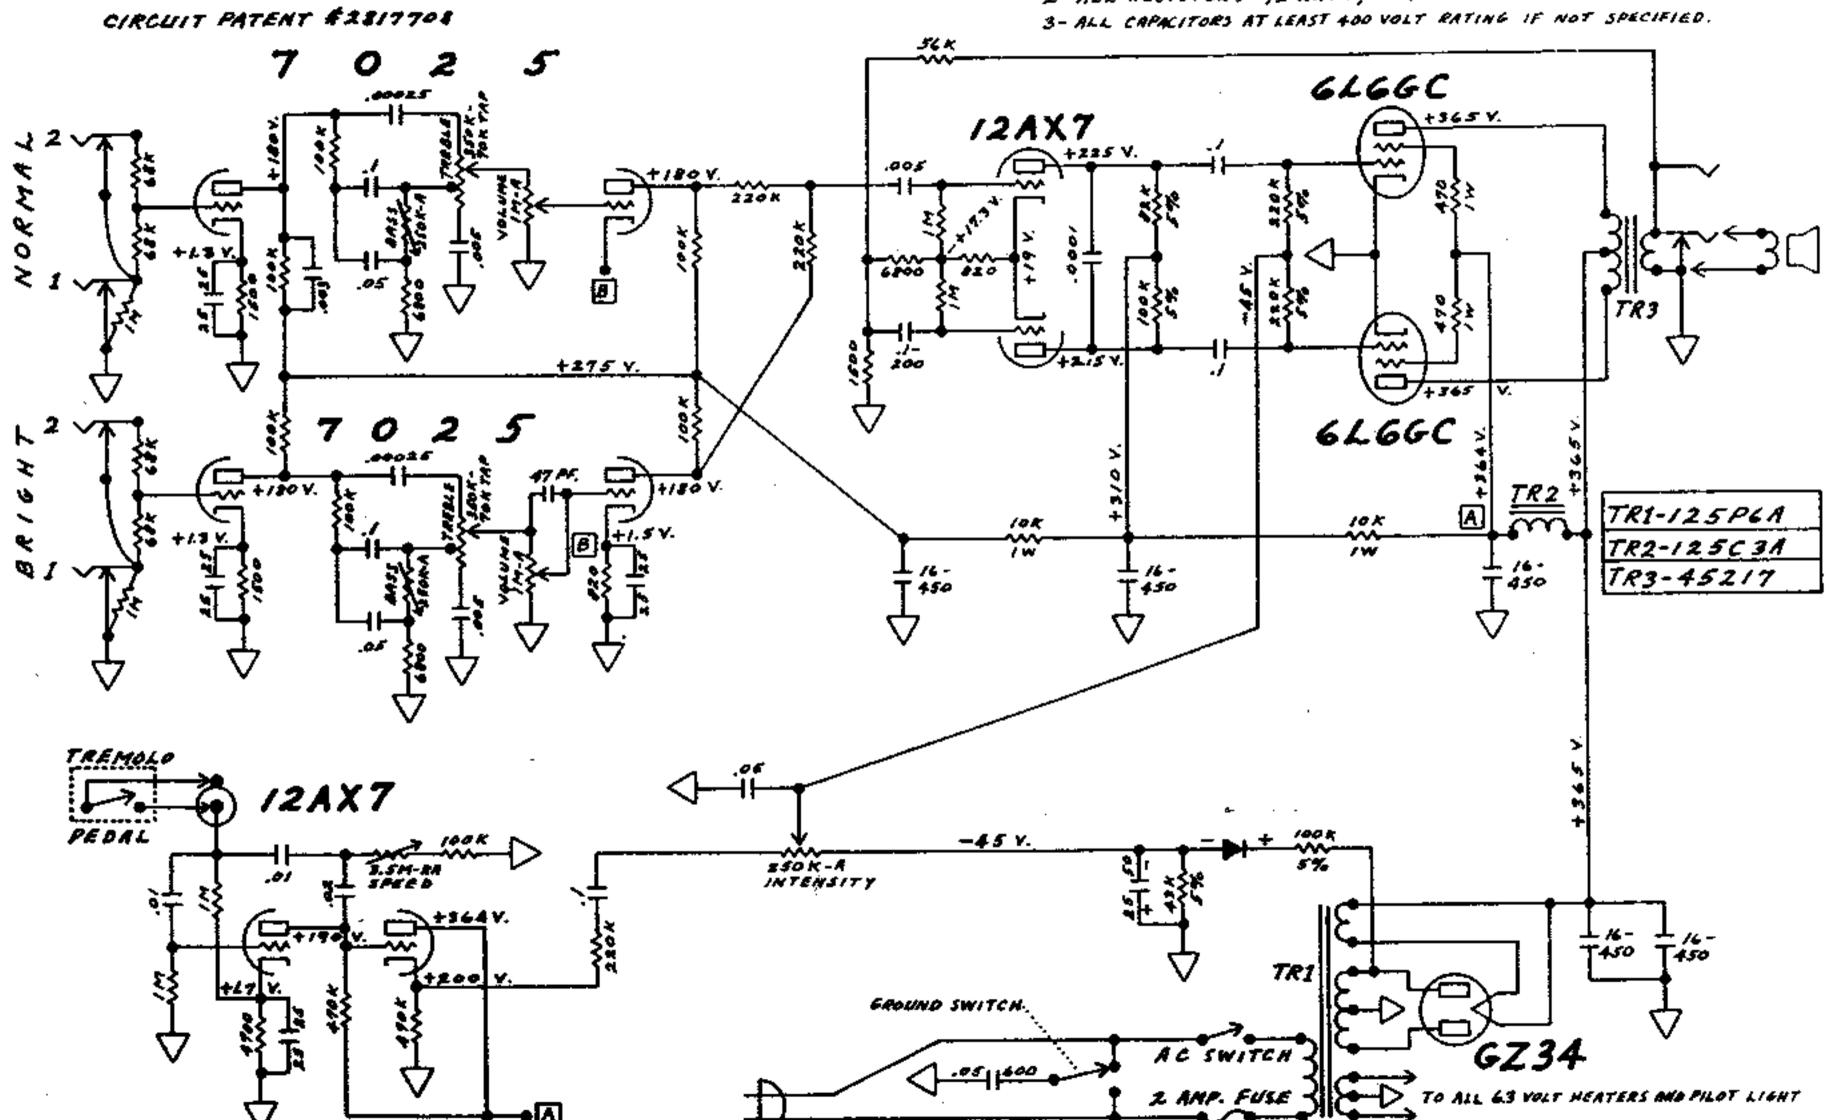

FENDER "VIBROLUX" LAYOUT %

NOTIC

VOLTAGES READ TO GROUND WITH ELECTRONIC

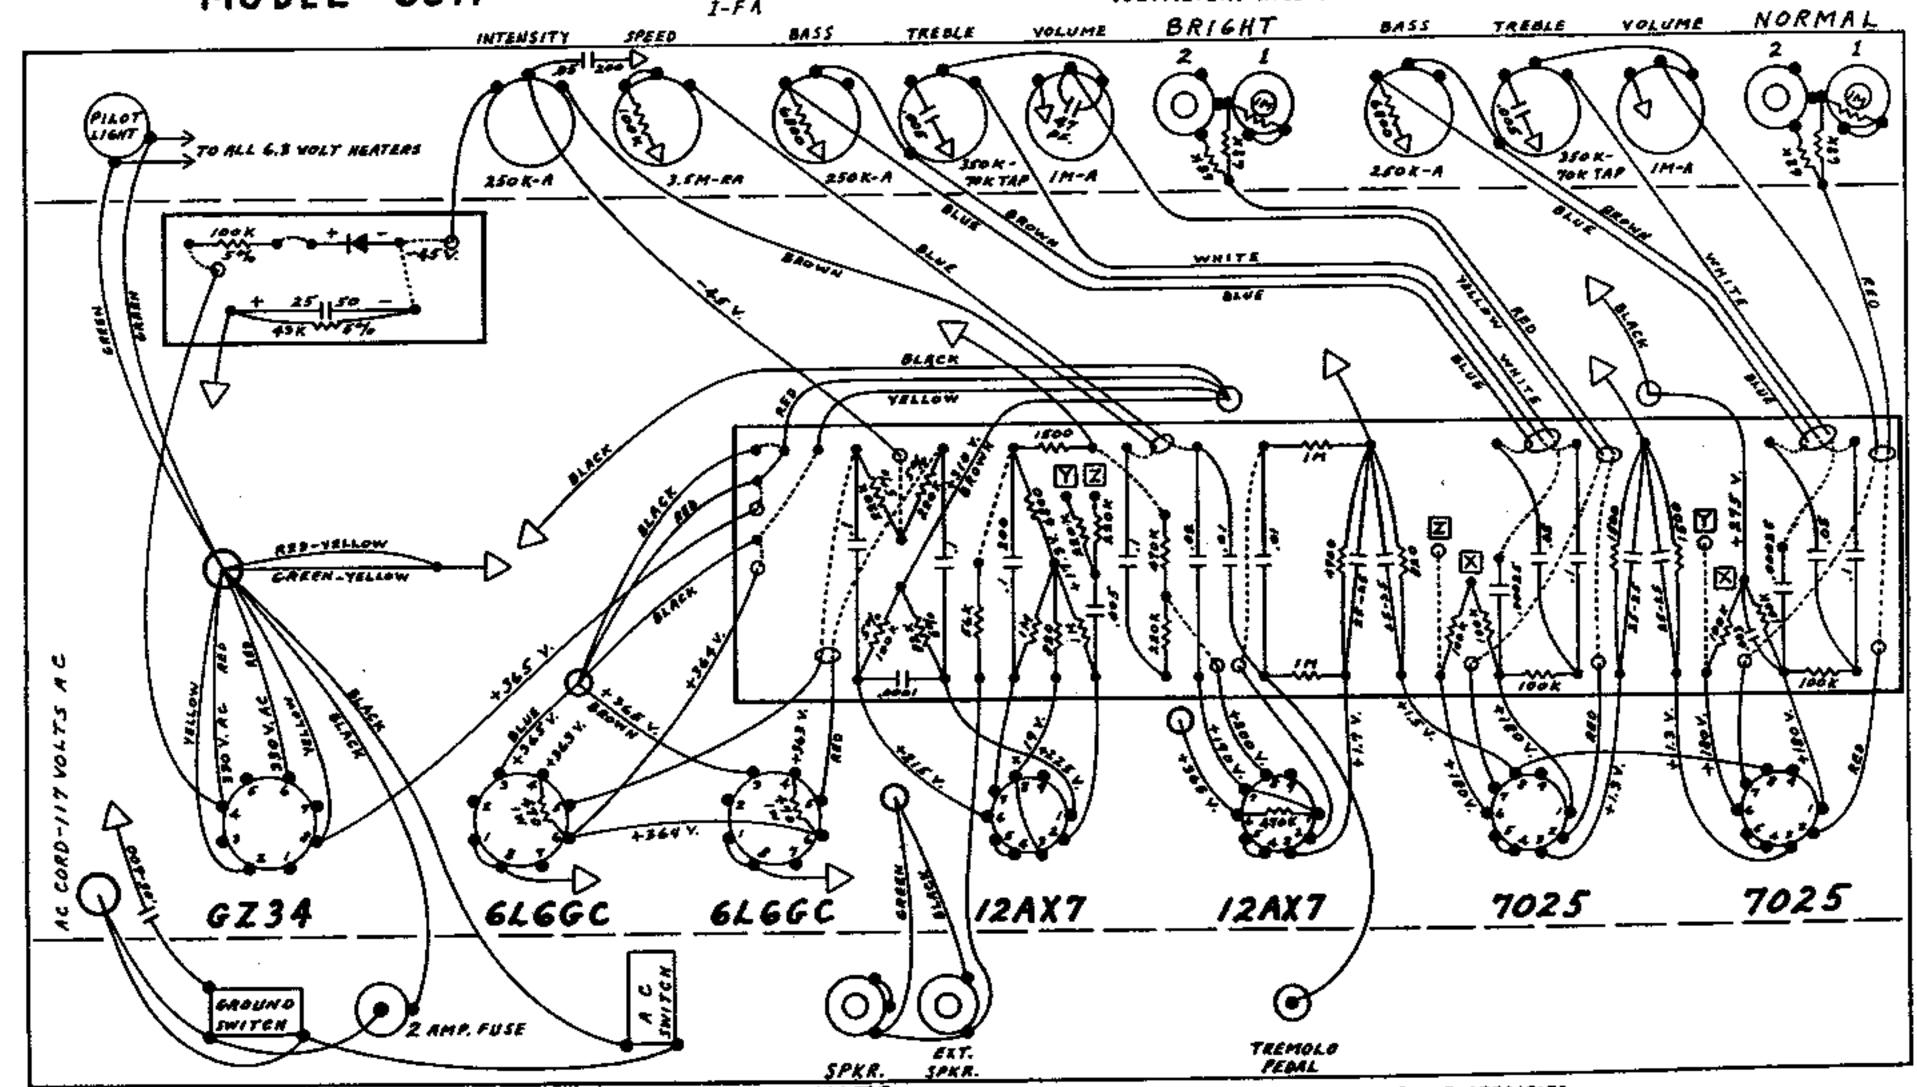

NOTE- ALL RESISTERS 1/2 WATT, 107- TOLERANDE IF NOT SPECIFIED.

NOTE- ALL EMPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED.