

ME VERSION USE DI/US VAC. P/N DIB764 NO SUBSTITUTO

SED IN SOME VERSIONS.

LL CAPACITORS 600 K MIN.

LL RESISTORS 1/2 WATT 10%.


ENOTES TYPICAL INHE SIGNAL REQUIRED FOR I WATT R.M.S. OUTPUT

LL CONTROLS MAX.

SCHEMATIC—BASSMAN 20
DOMESTIC, C.S.A, EXPORT & JAPAN

NELEANE SLEE D 019381 —

SCALE MODEL
NONE NO.

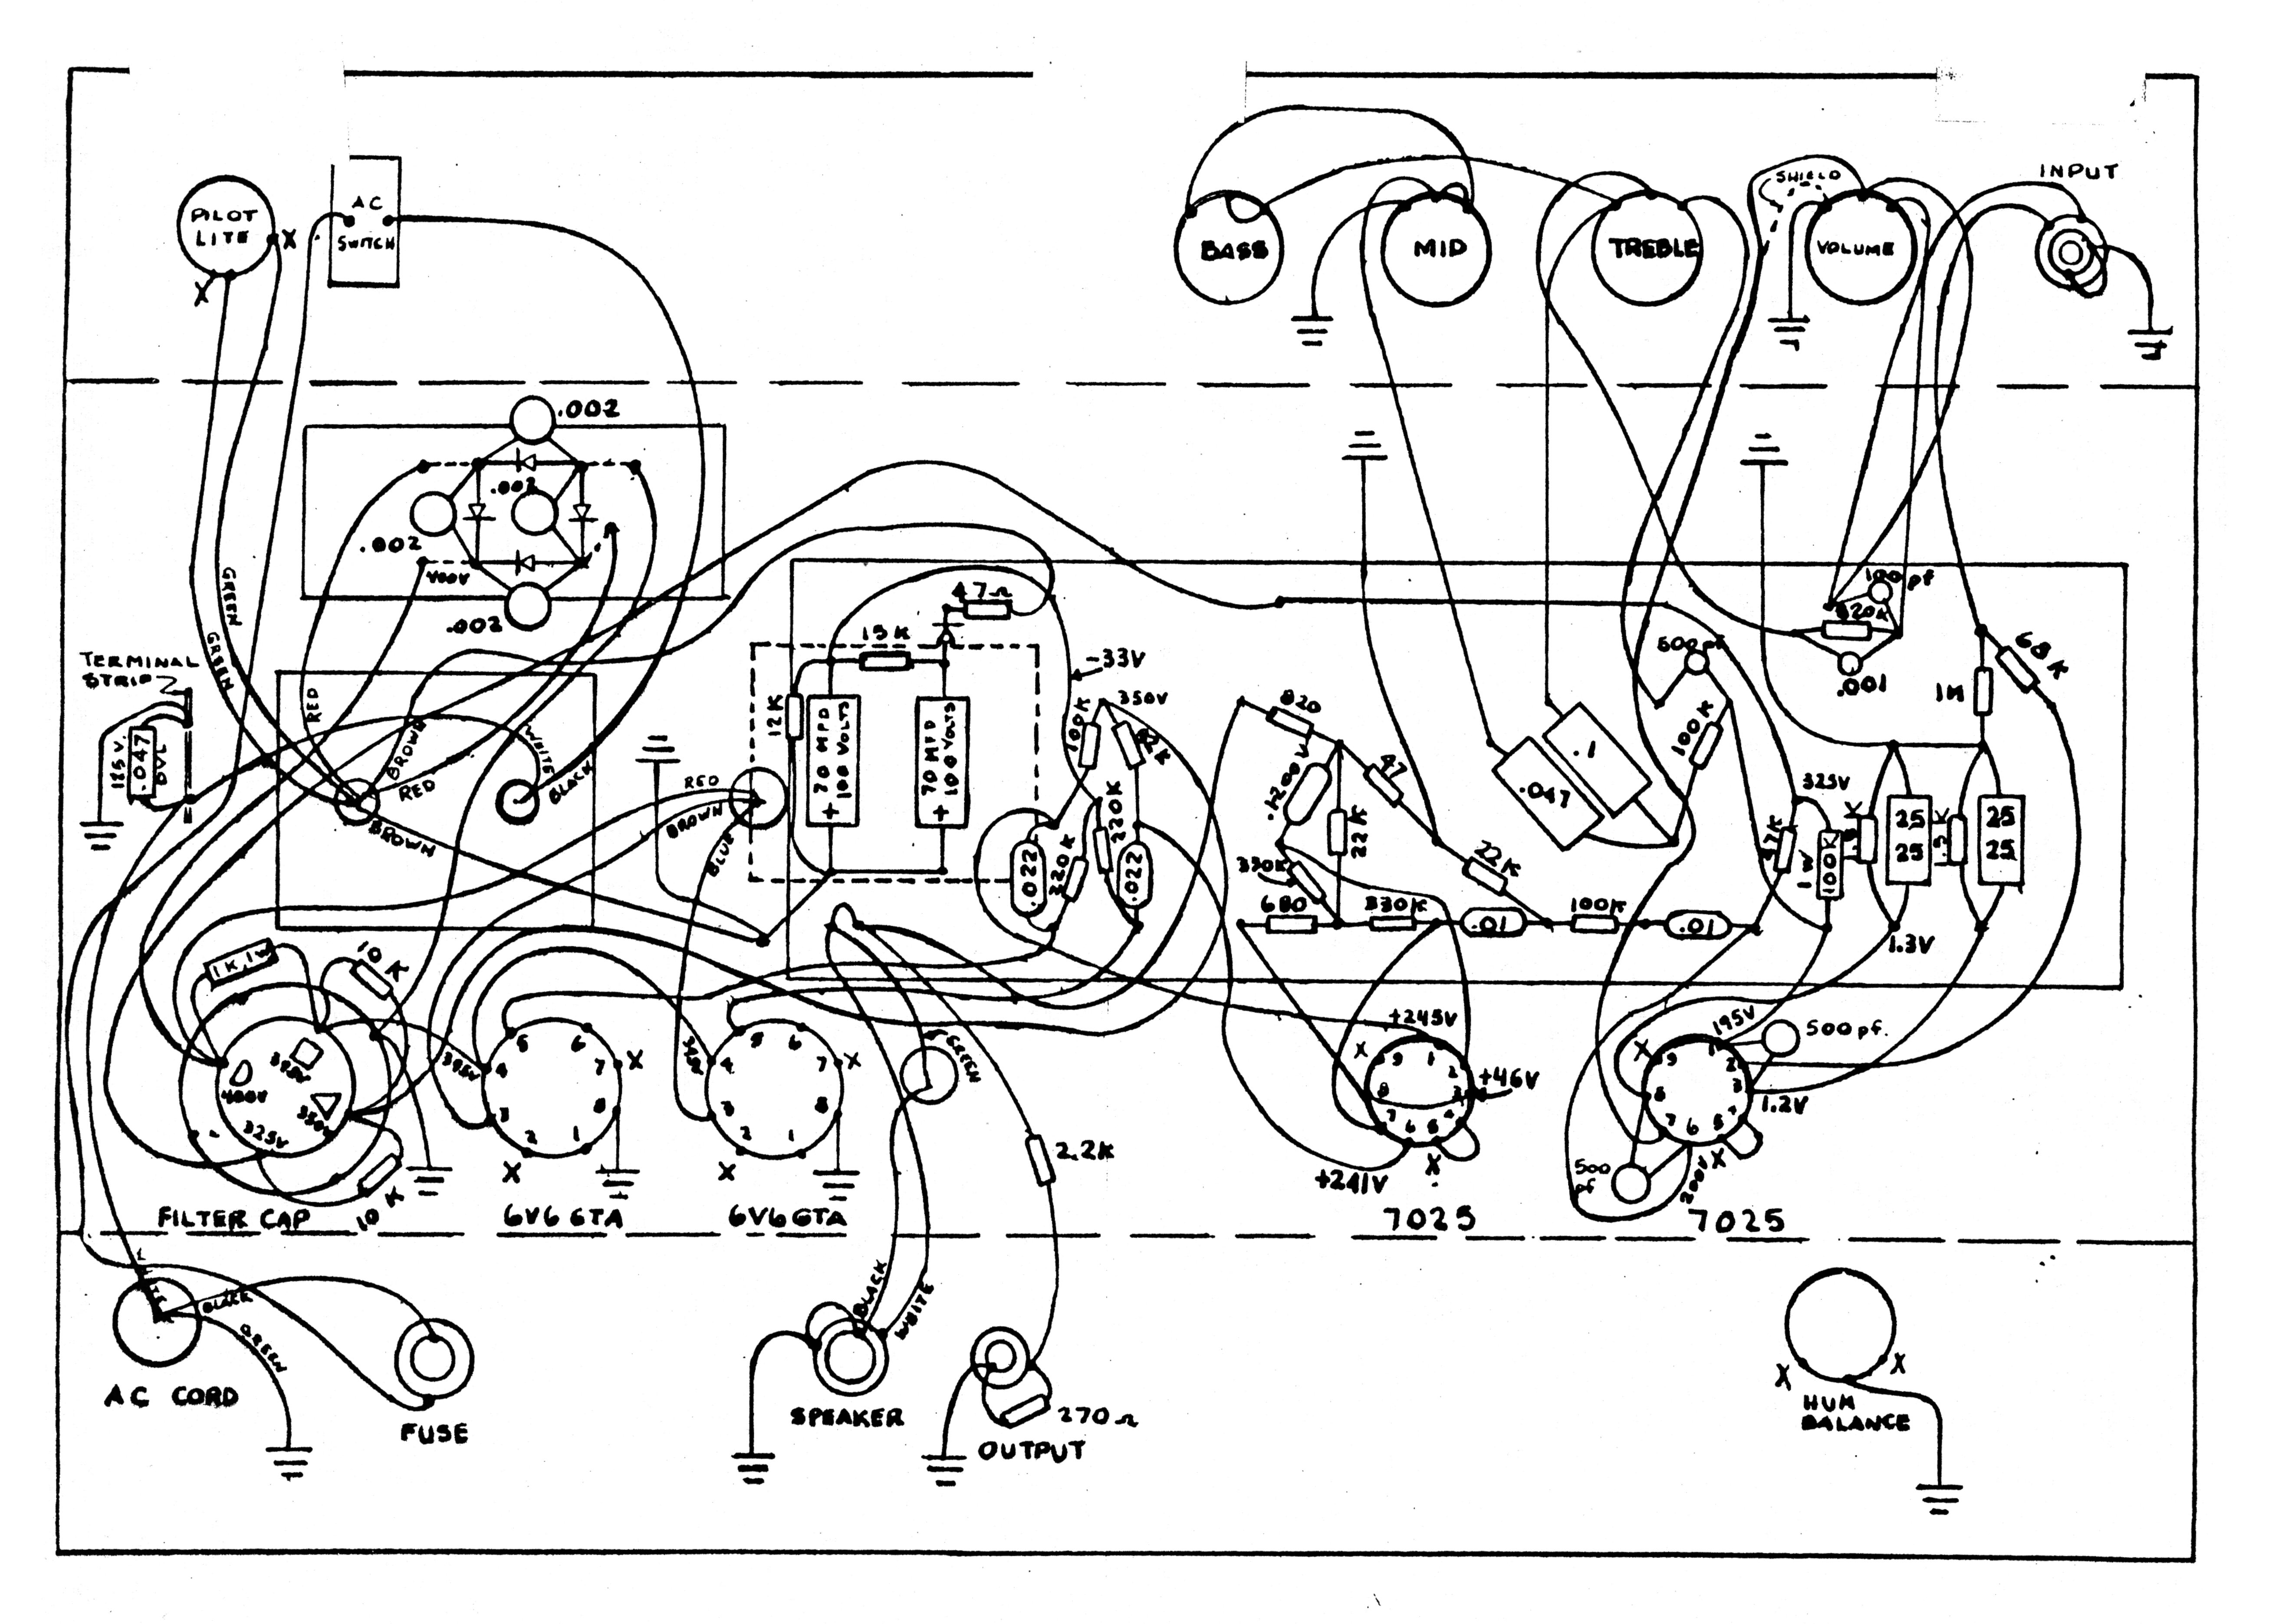

Fender Bassman 20 Amplifier Wiring Diagram