
FENDER "TREMOLUX" SCHEMATIC

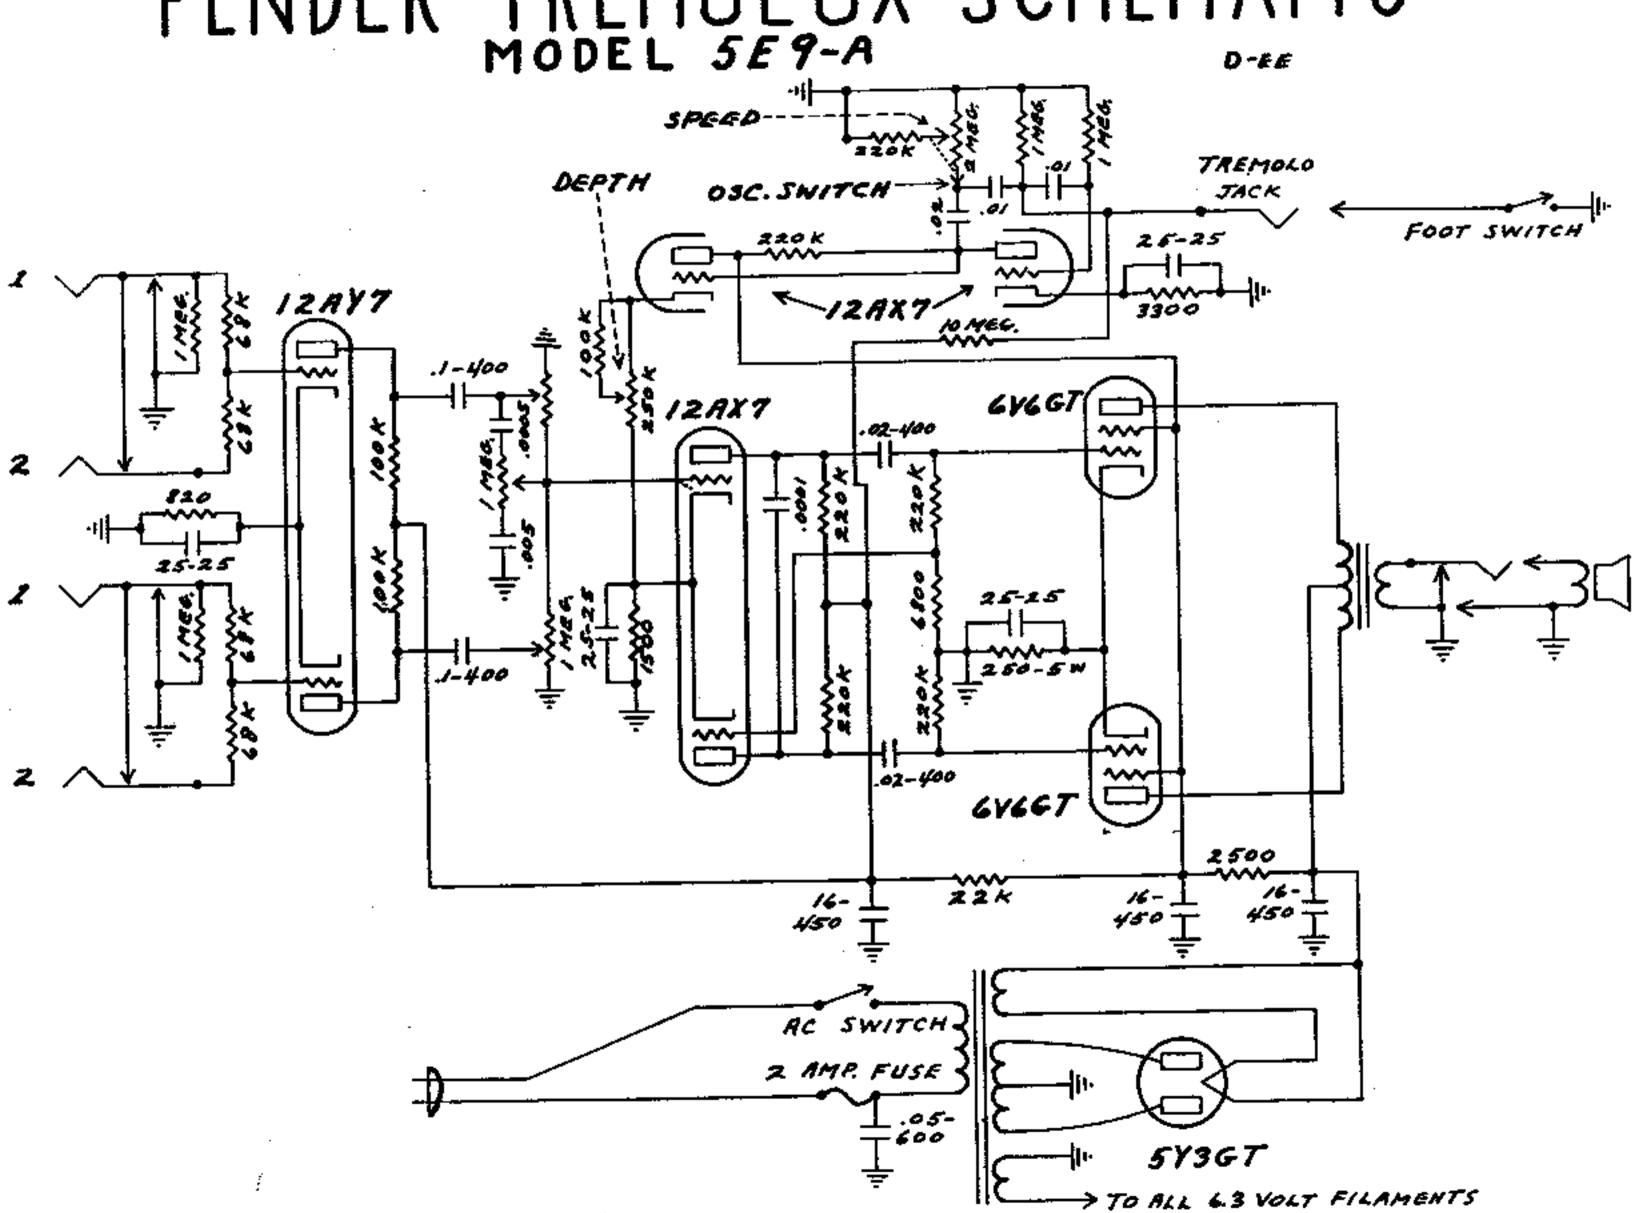

FENDER "TREMOLUX" LAYOUT

NOTICE

VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER VALUES SHOWN + OR - 20%

VALUES SHOWN + OR - 20% .05 MFD. DEPTH SPEED TONE VOLUME YOLUME ADDE HED. MICA LITE +36 × 2500 AC SPKR. JACK 5U46A 646 GT 646GT 12AX7 12147 12AXT

NOTE - MODEL SEQ USES SYSGT WISTERD OF SUGGR

NOTE - EARLY MODELS HAVE SWITCH ON DEPTH CONTROL INSTEAD OF SPEED CONTROL. CARCUIT IS SAME.