

FENDER BANDMASTER REVERB- AMP AA1069" SCHEMATIC

NOTICE

- VOLTAGES READ
- ALL RESISTORS VZ WATT LOW TOLERANCE IF NOT SPECIFIED.
   ALL CAPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED.
   ALL VOLTAGES READ WITH VIBRATO PEDAL GROUNDED AND NO INPUT SIGNAL.

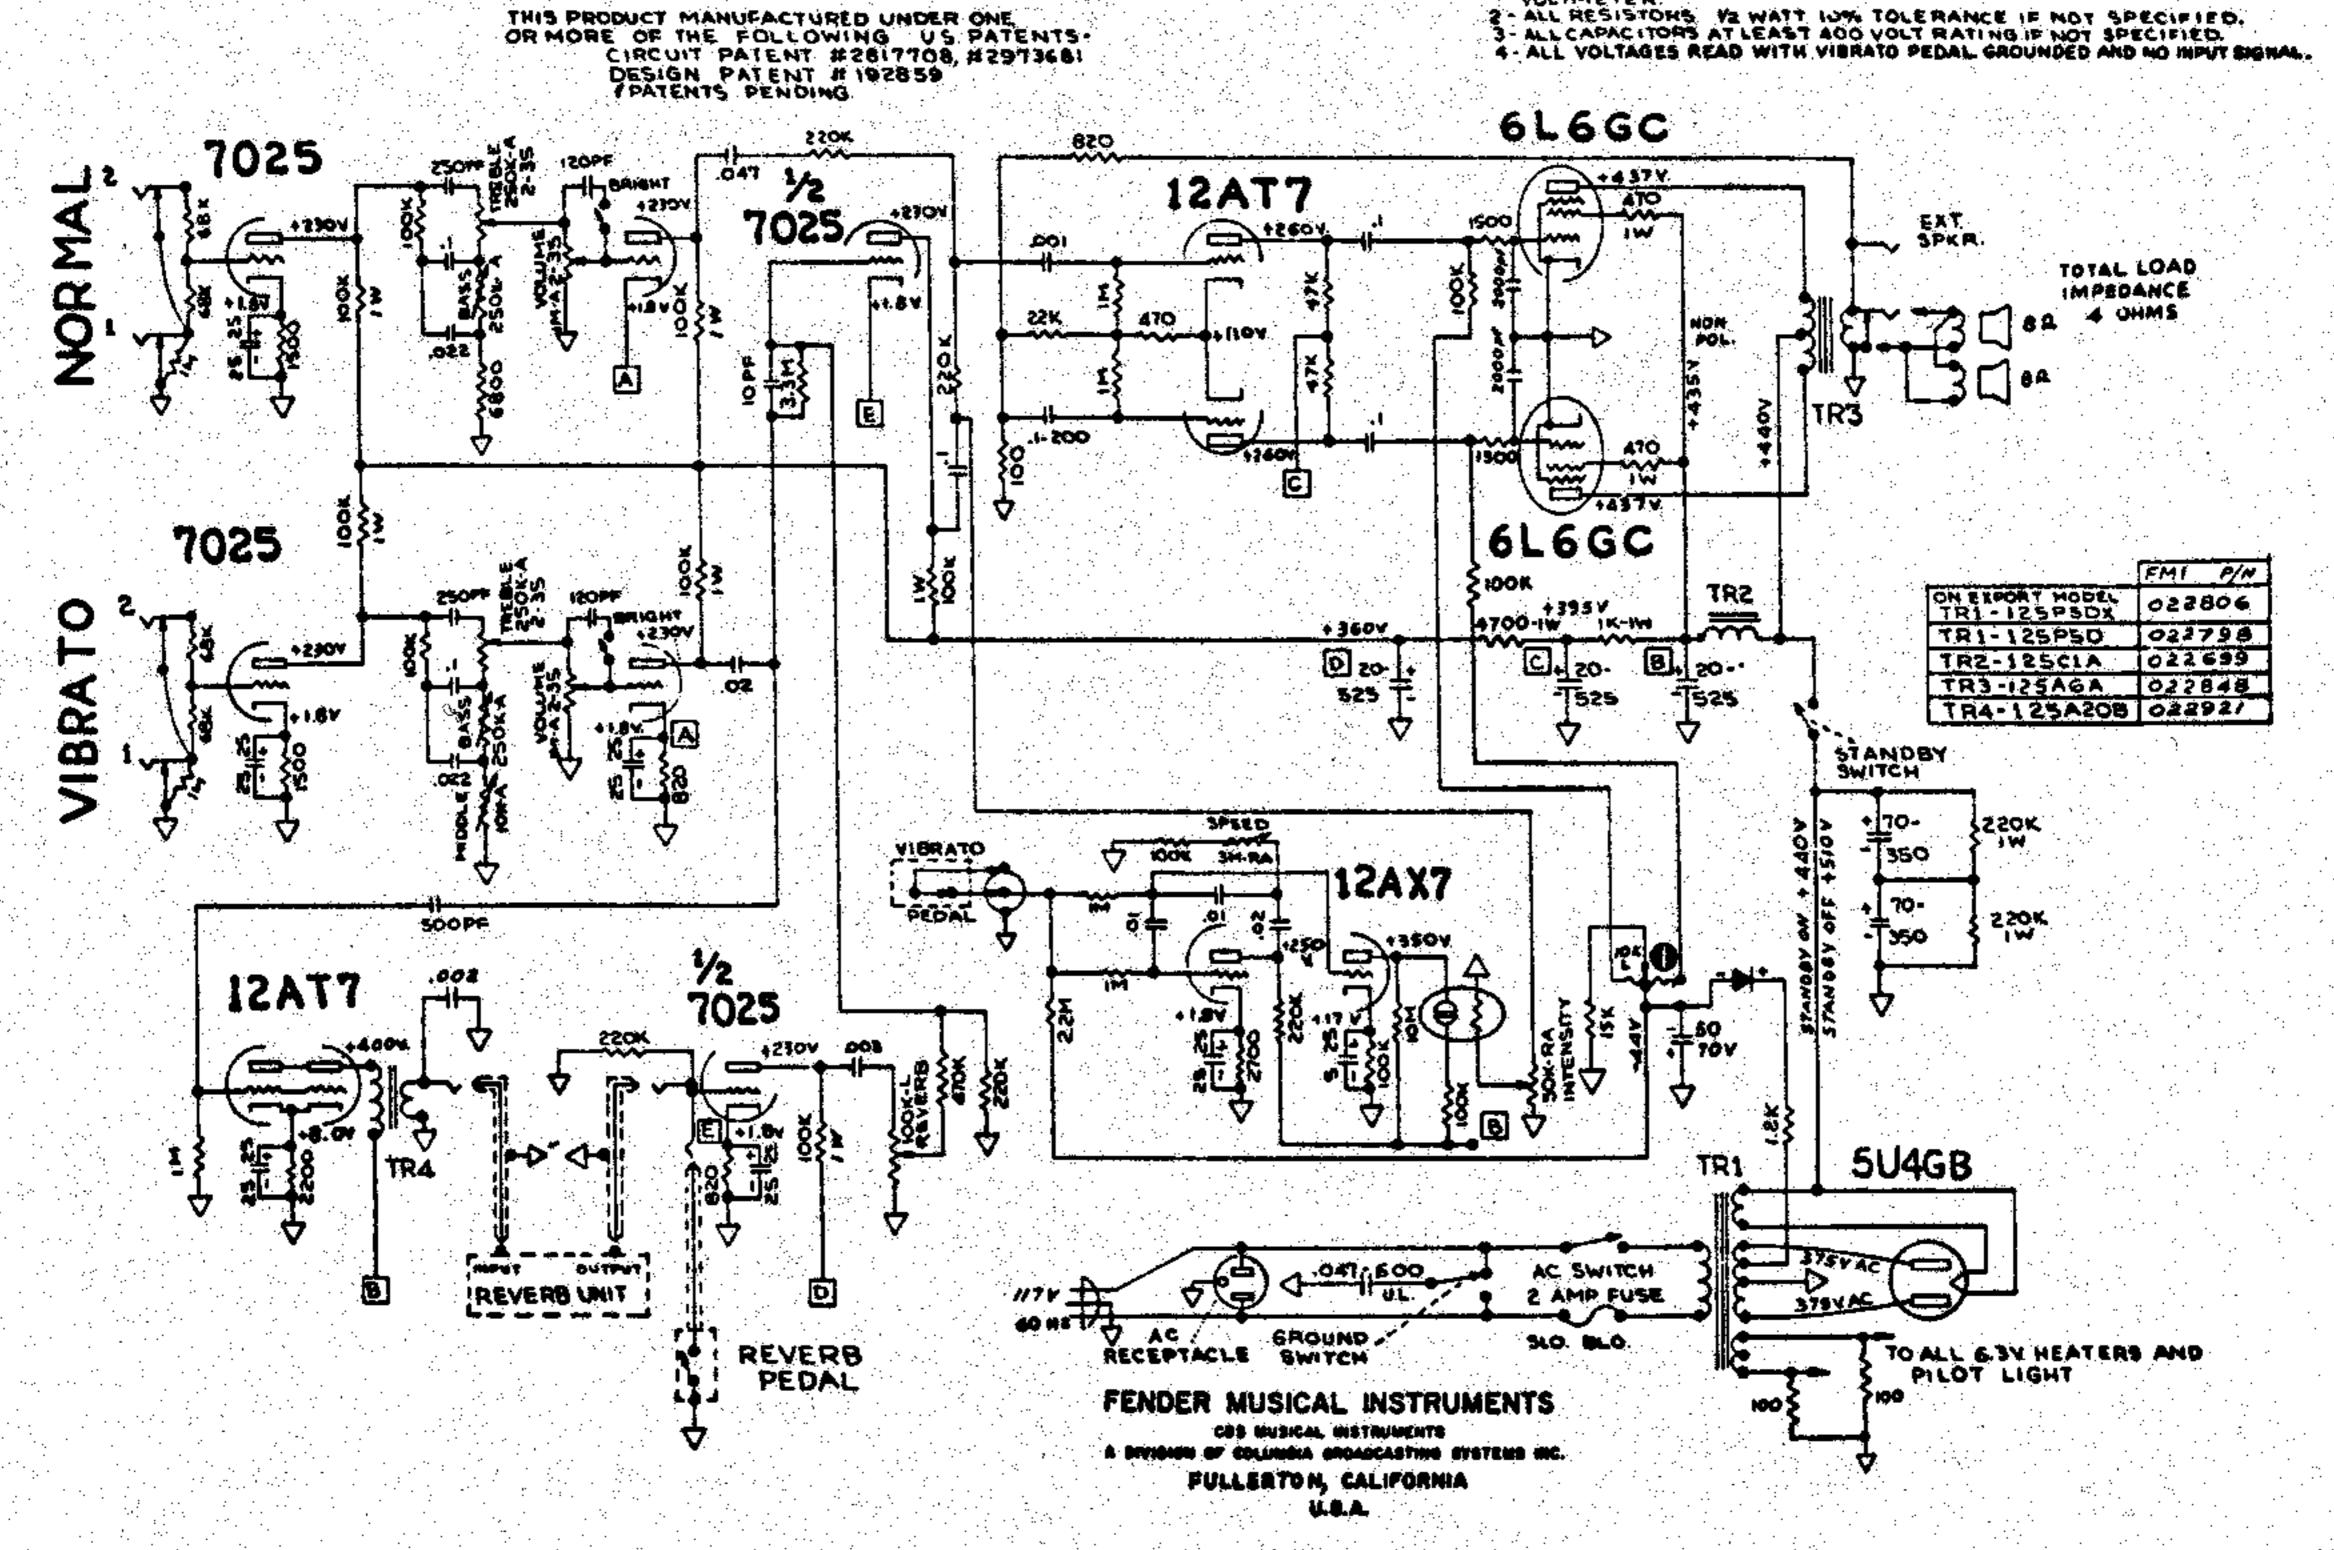

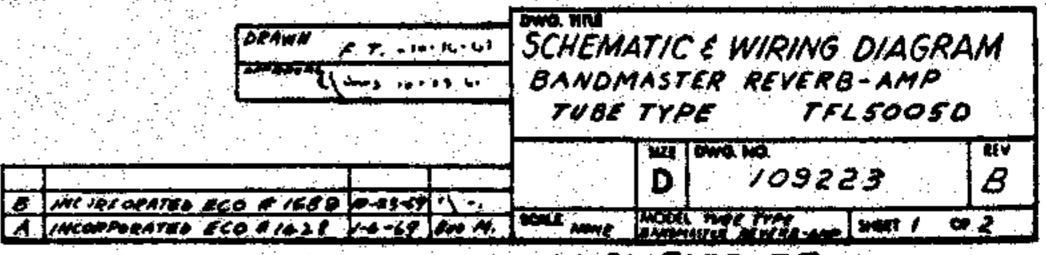

AMPLIFIER TT

FENDER

## BANDMASTER REVERB-AMP AA1069 "LAYOUT

TFL5005D

NOTICE

VOLTAGES READ TO GROUND WITH ELECTRONIC

VOLTMETER WITH VIBRATO-GROUNDED, NO INPUT SIGNAL.

NORMAL TREBLE VOLUME A-XOES BOK-RA IOK-A (40¢3 100 K-4 250K-A WHITE 100K 100 MED-YELLOW Ø., 7025 6L6GC **12AX7** TTASI. 7025 7025 TAS1 **ELEGC** 5U4GB 047 -600 UL AC RECEPT. BUACE STOR. 4 II GROUND GREEN SWITCH INPUT EXT. SPKR PEDAL OUTPUT SPKR. PEDAL

NOTE: ALL PRISTORS IS WATT 10% TOLERANCE, IF NOT SPECIFIED

NOTE ML CAPACITORS AT LEAST 600 VOLT RATING IF NOT SPECIFIED.

## FENDER MUSICAL INSTRUMENTS

COS MUSICAL MISTRUMENTS
A DIVISION OF COLUMNA BROADCASTING SYSTEMS WE.
FULLERTON, CALIFORNIA

ERTON, CALIFORNIA U.S.A. SCHEMATIC & WIRING DIAGRAM

BANDMASTER REVERB-AMP

TUBE TYPE TFL50050

SIZE OWO. NO.

KEV