
FENDER SUPER-AMP SCHEMATIC

NOTICE

VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTHETER VALUES SHOWN + OR - 20%

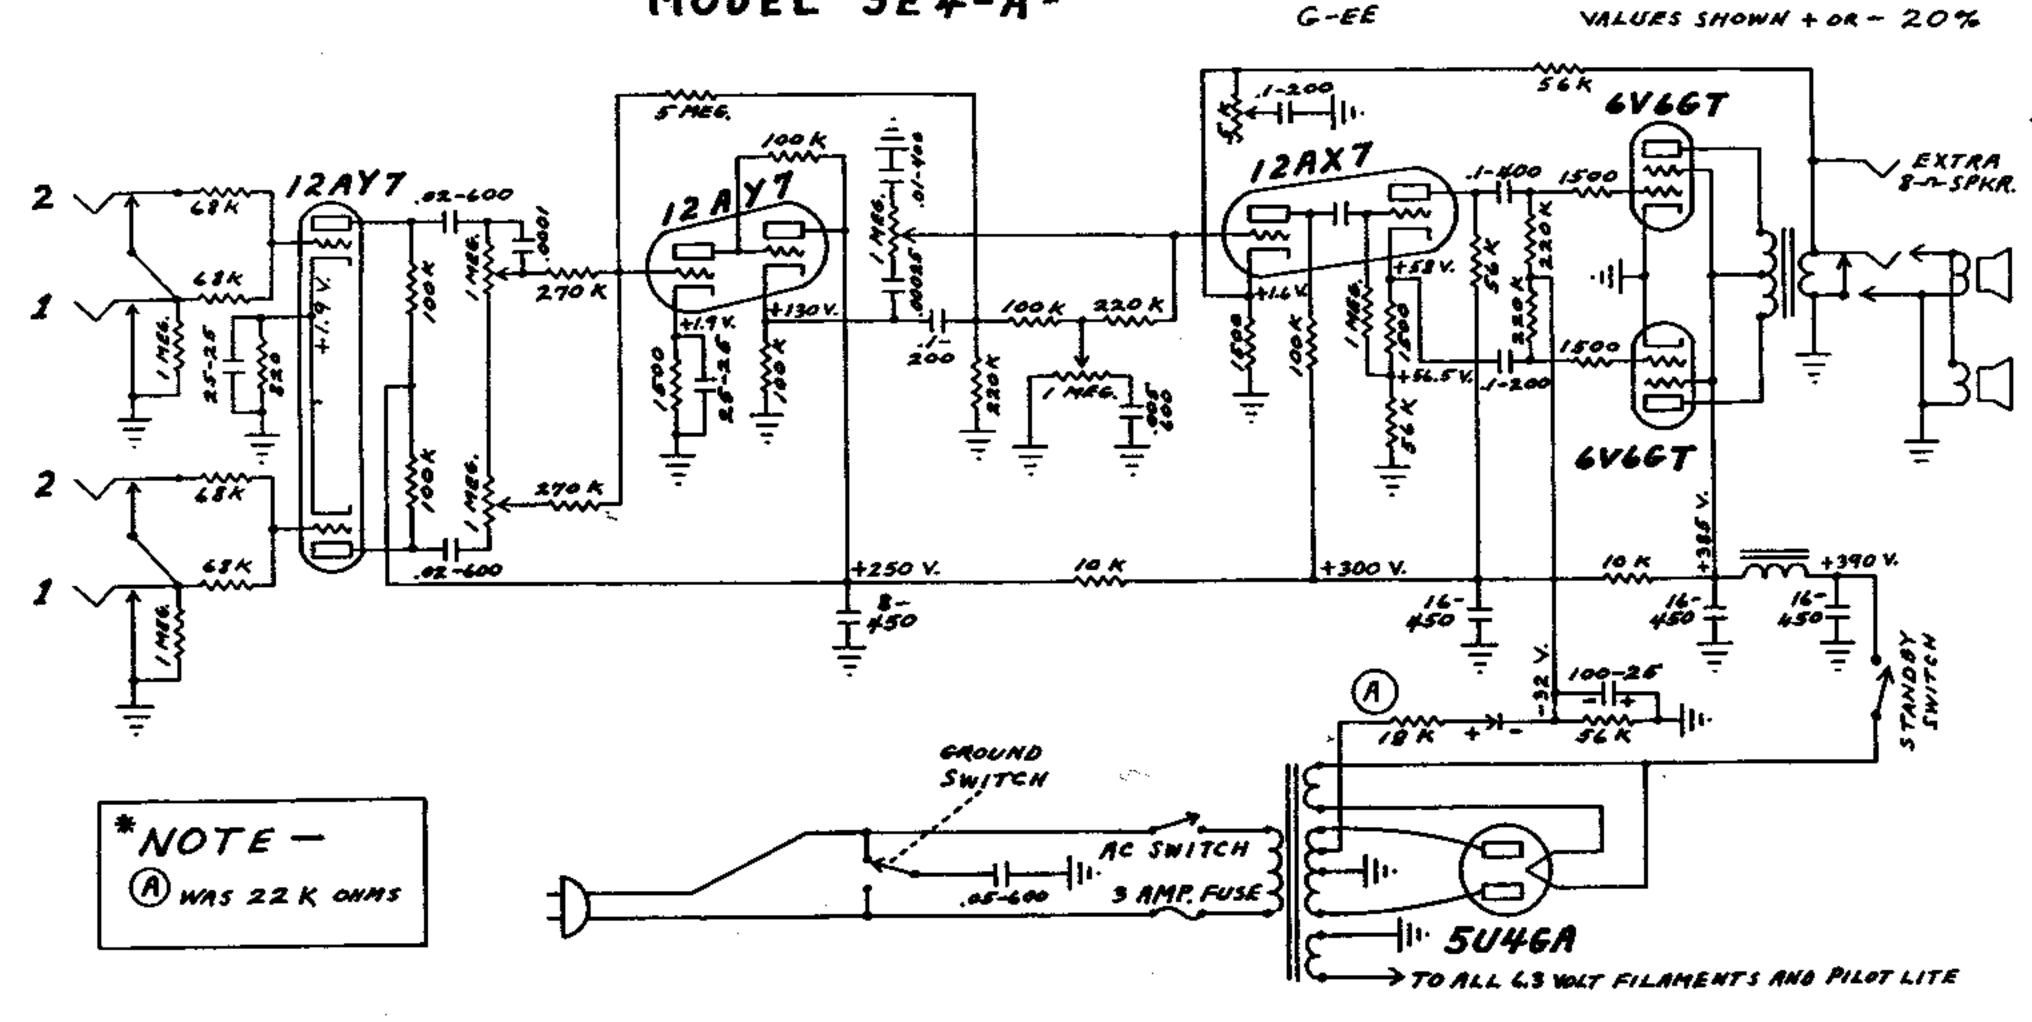

FENDER SUPER-AMP LAYOUT

& SEE NOTE ON REVERSE SIDE

NOTICE

VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER VALUES SHOWN + OR - 20%

G-EE VALUES SHOWN + OR - 20% PRESENCE BASS TREBLE INST. VOL. MIC. VOL. 1500 + 380 V.-SPKR. EXT. SPKR. TACK JACK 5U4GA 6V6GT 12AY7 12AY7 GVGGT 12AXT