FENDER


"SHOWMAN-AMP AB 763" SCHEMATIC %

NOTICE

THIS PRODUCT MANUFACTURED UNDER ONE OR MORE OF THE FOLLOWING U.S. PATENTS-#2817708, #2973681, 192859 # PATENTS PENDING

C-FD

1.-VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER,
VALUES SHOWN + OR - 20%
2-ALL RESISTORS 1/2 WATT 10% TOLERANCE IF NOT SPECIFIED.
3-ALL CAPACITORS AT LEAST 400 YOLT RATING IF NOT SPECIFIED.

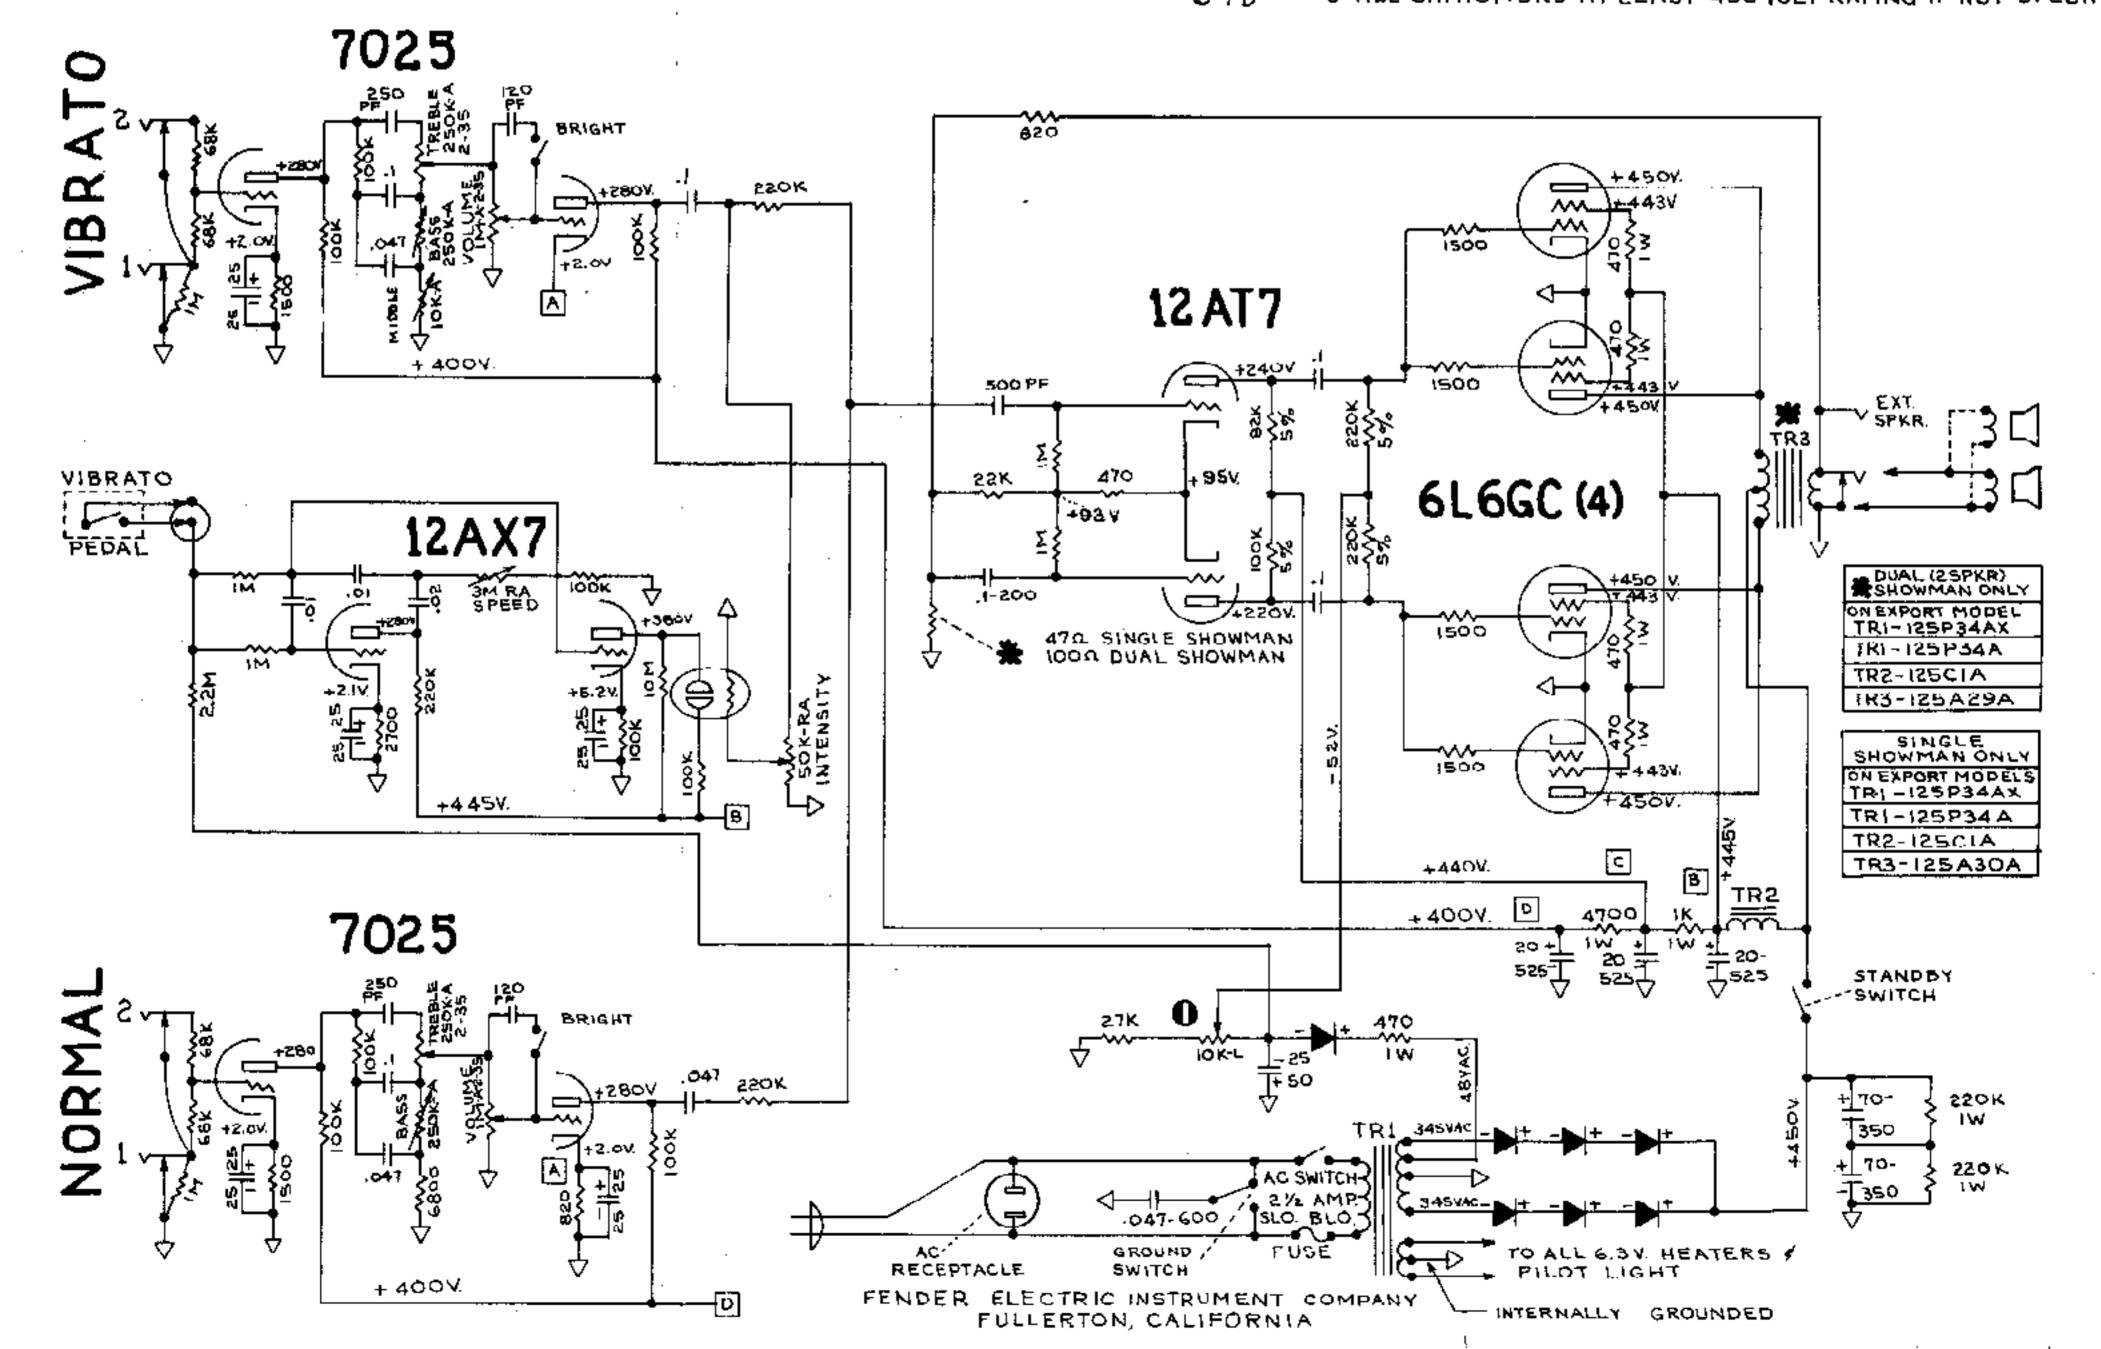

FENDER "SHOWMAN-AMP AB763" LAYOUT

NOTICE VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER VALUES SHOWN + OR -20%. C-FD VIBRATO INTENSITY SPEED MIDDLE TREBLE VOLUME BASS TREBLE VOLUME NORMAL PRIGHT /PILOT \LIGHT TO ALL 6.3 VOLT HEATERS SOK-RA 3.0 M 250K-A 10K-A 250K-A 250K-A 2-35 250K-A 1M-A 2-35 2 35 2-35 RED YELLOW WHITE WHITE -52V YELLOW Y **X** 100 K V-+95V. 6L6GC erecc erecc 6L6GC 12AT7 7025 12 A X 7 7025 -047-600V AC RECEPT. STANDBY GROUND SWITCH

NOTE: ALL RESISTORS 1/2 WATT 10% TOLERANCE IF NOT SPECIFIED. NOTE: ALL CAPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED. FENDER ELECTRIC INSTRUMENT COMPANY FULLERTON, CALIFORNIA

EXT. SPKR.

VIBRATO