FENDER "SUPER-AMP" SCHEMATIC MODEL 664-A


NOTICE

I- VOLTAGES READ TO GROUND WITH ELECTRONIC

VOLTMETER. VALUES SHOWN + OR - 20 %


2- ALL RESISTORS 1/2 WATT, 10 % TOLERANCE IF NOT SPECIFIED

3- ALL CAPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED

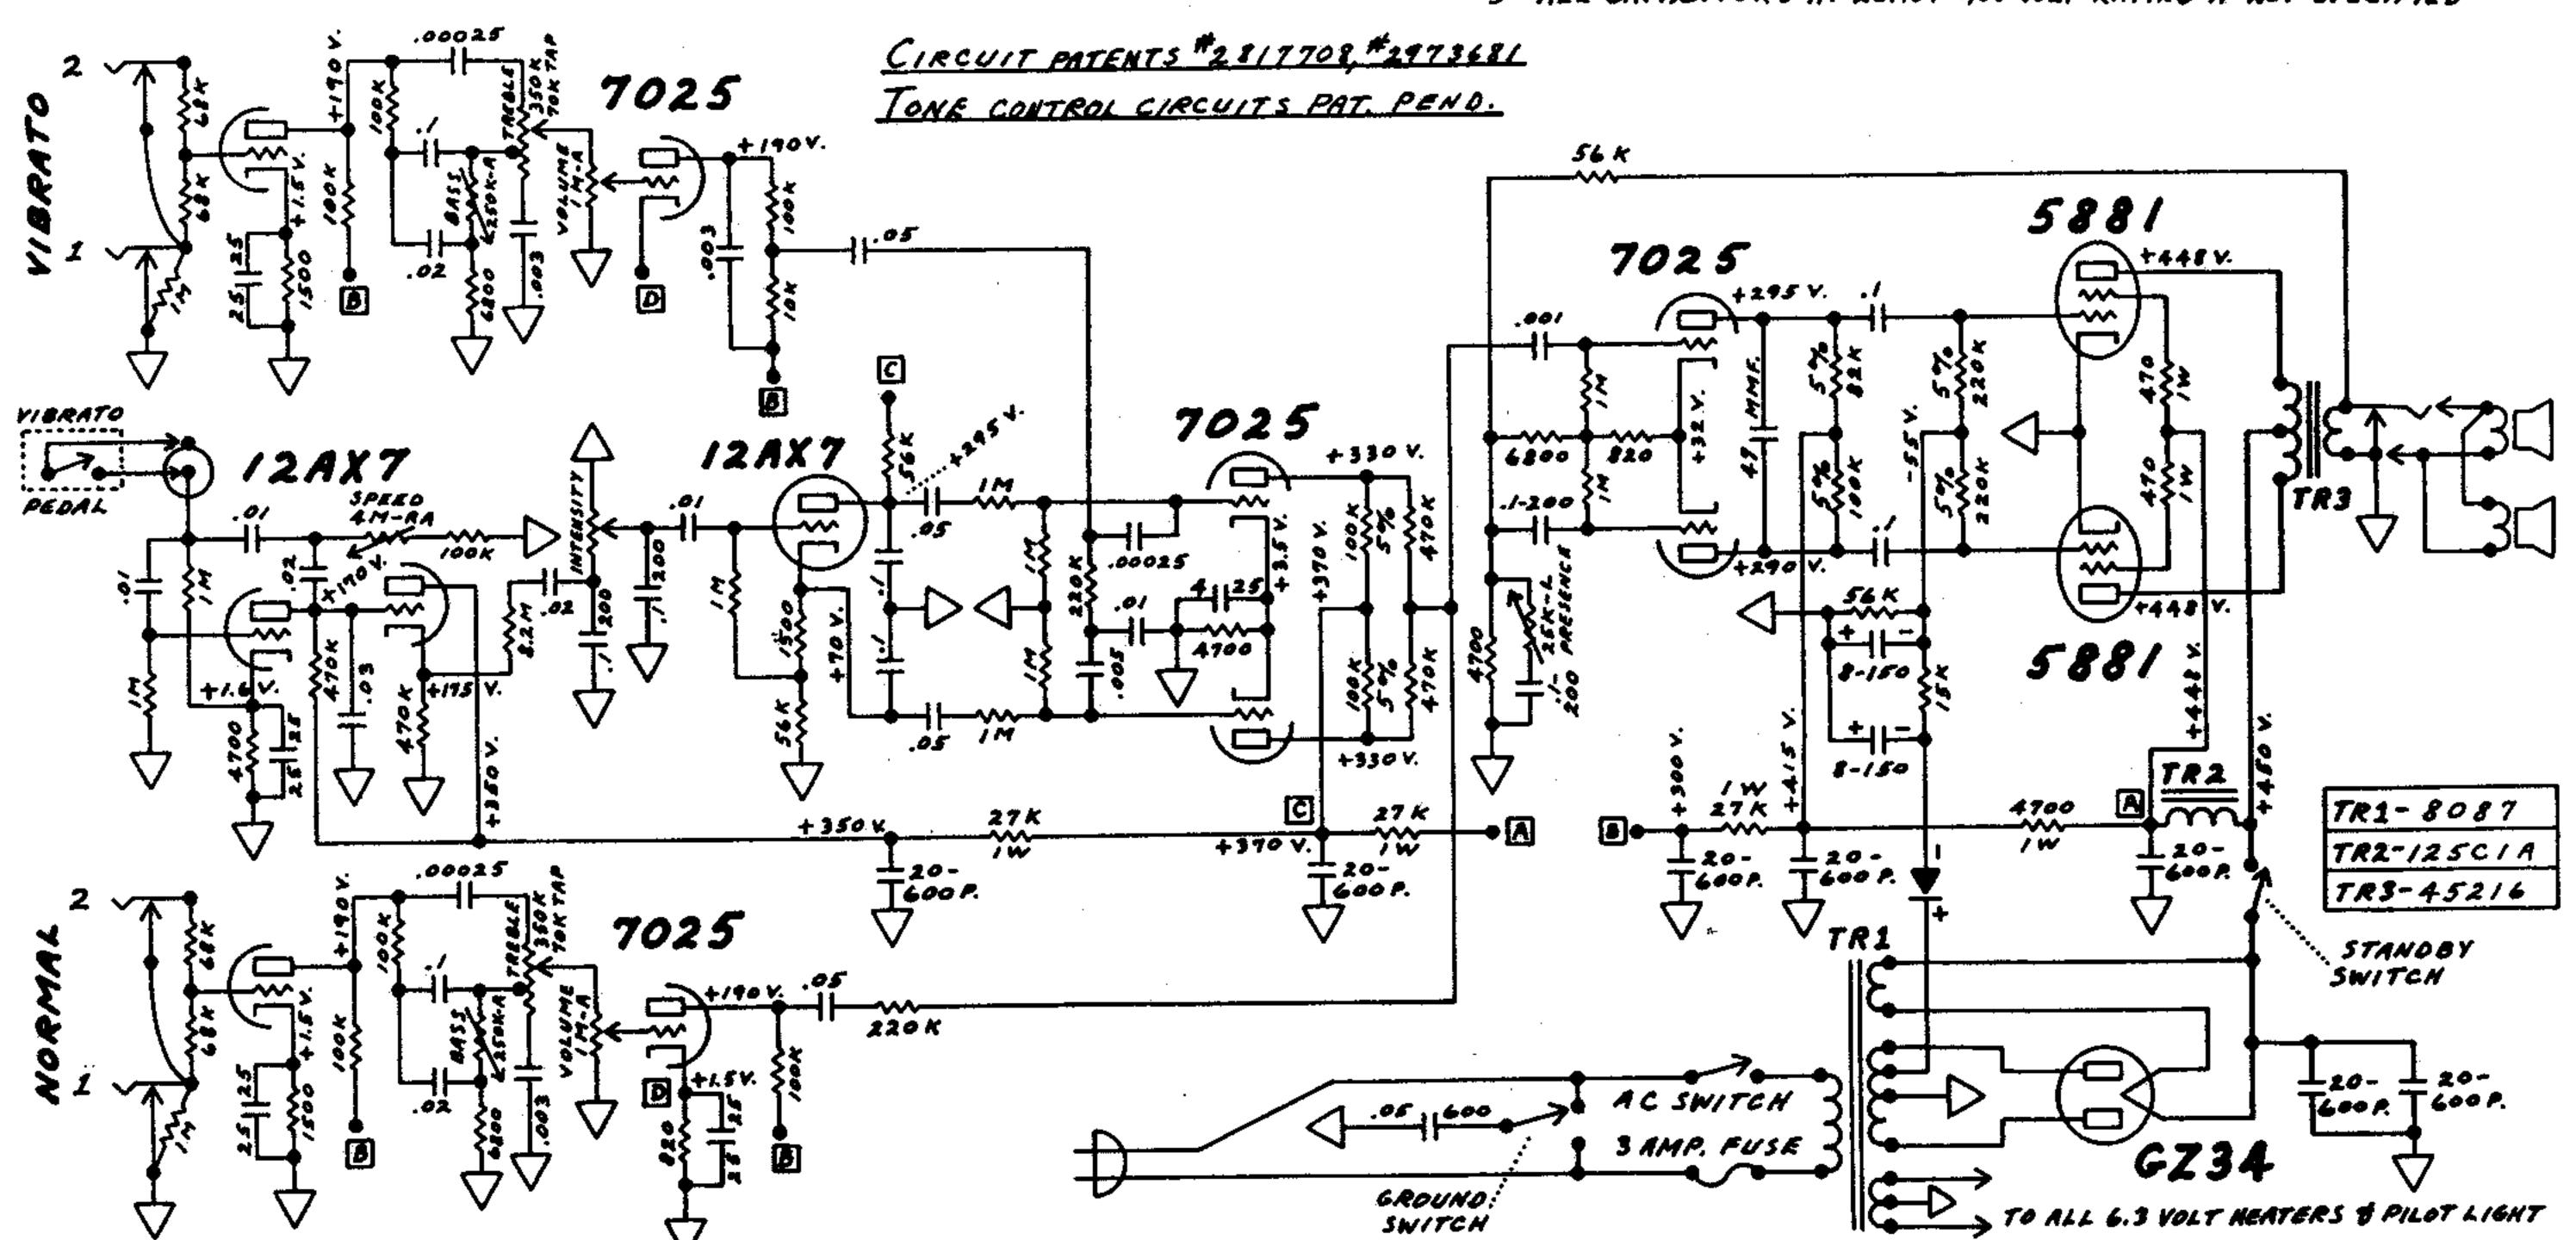

FENDER "SUPER-AMP"LAYOUT MODEL 664-A K-FJ INTENSITY SPEED

NOTICE VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTAGES, VALUES SHOWN + OR - 20%.

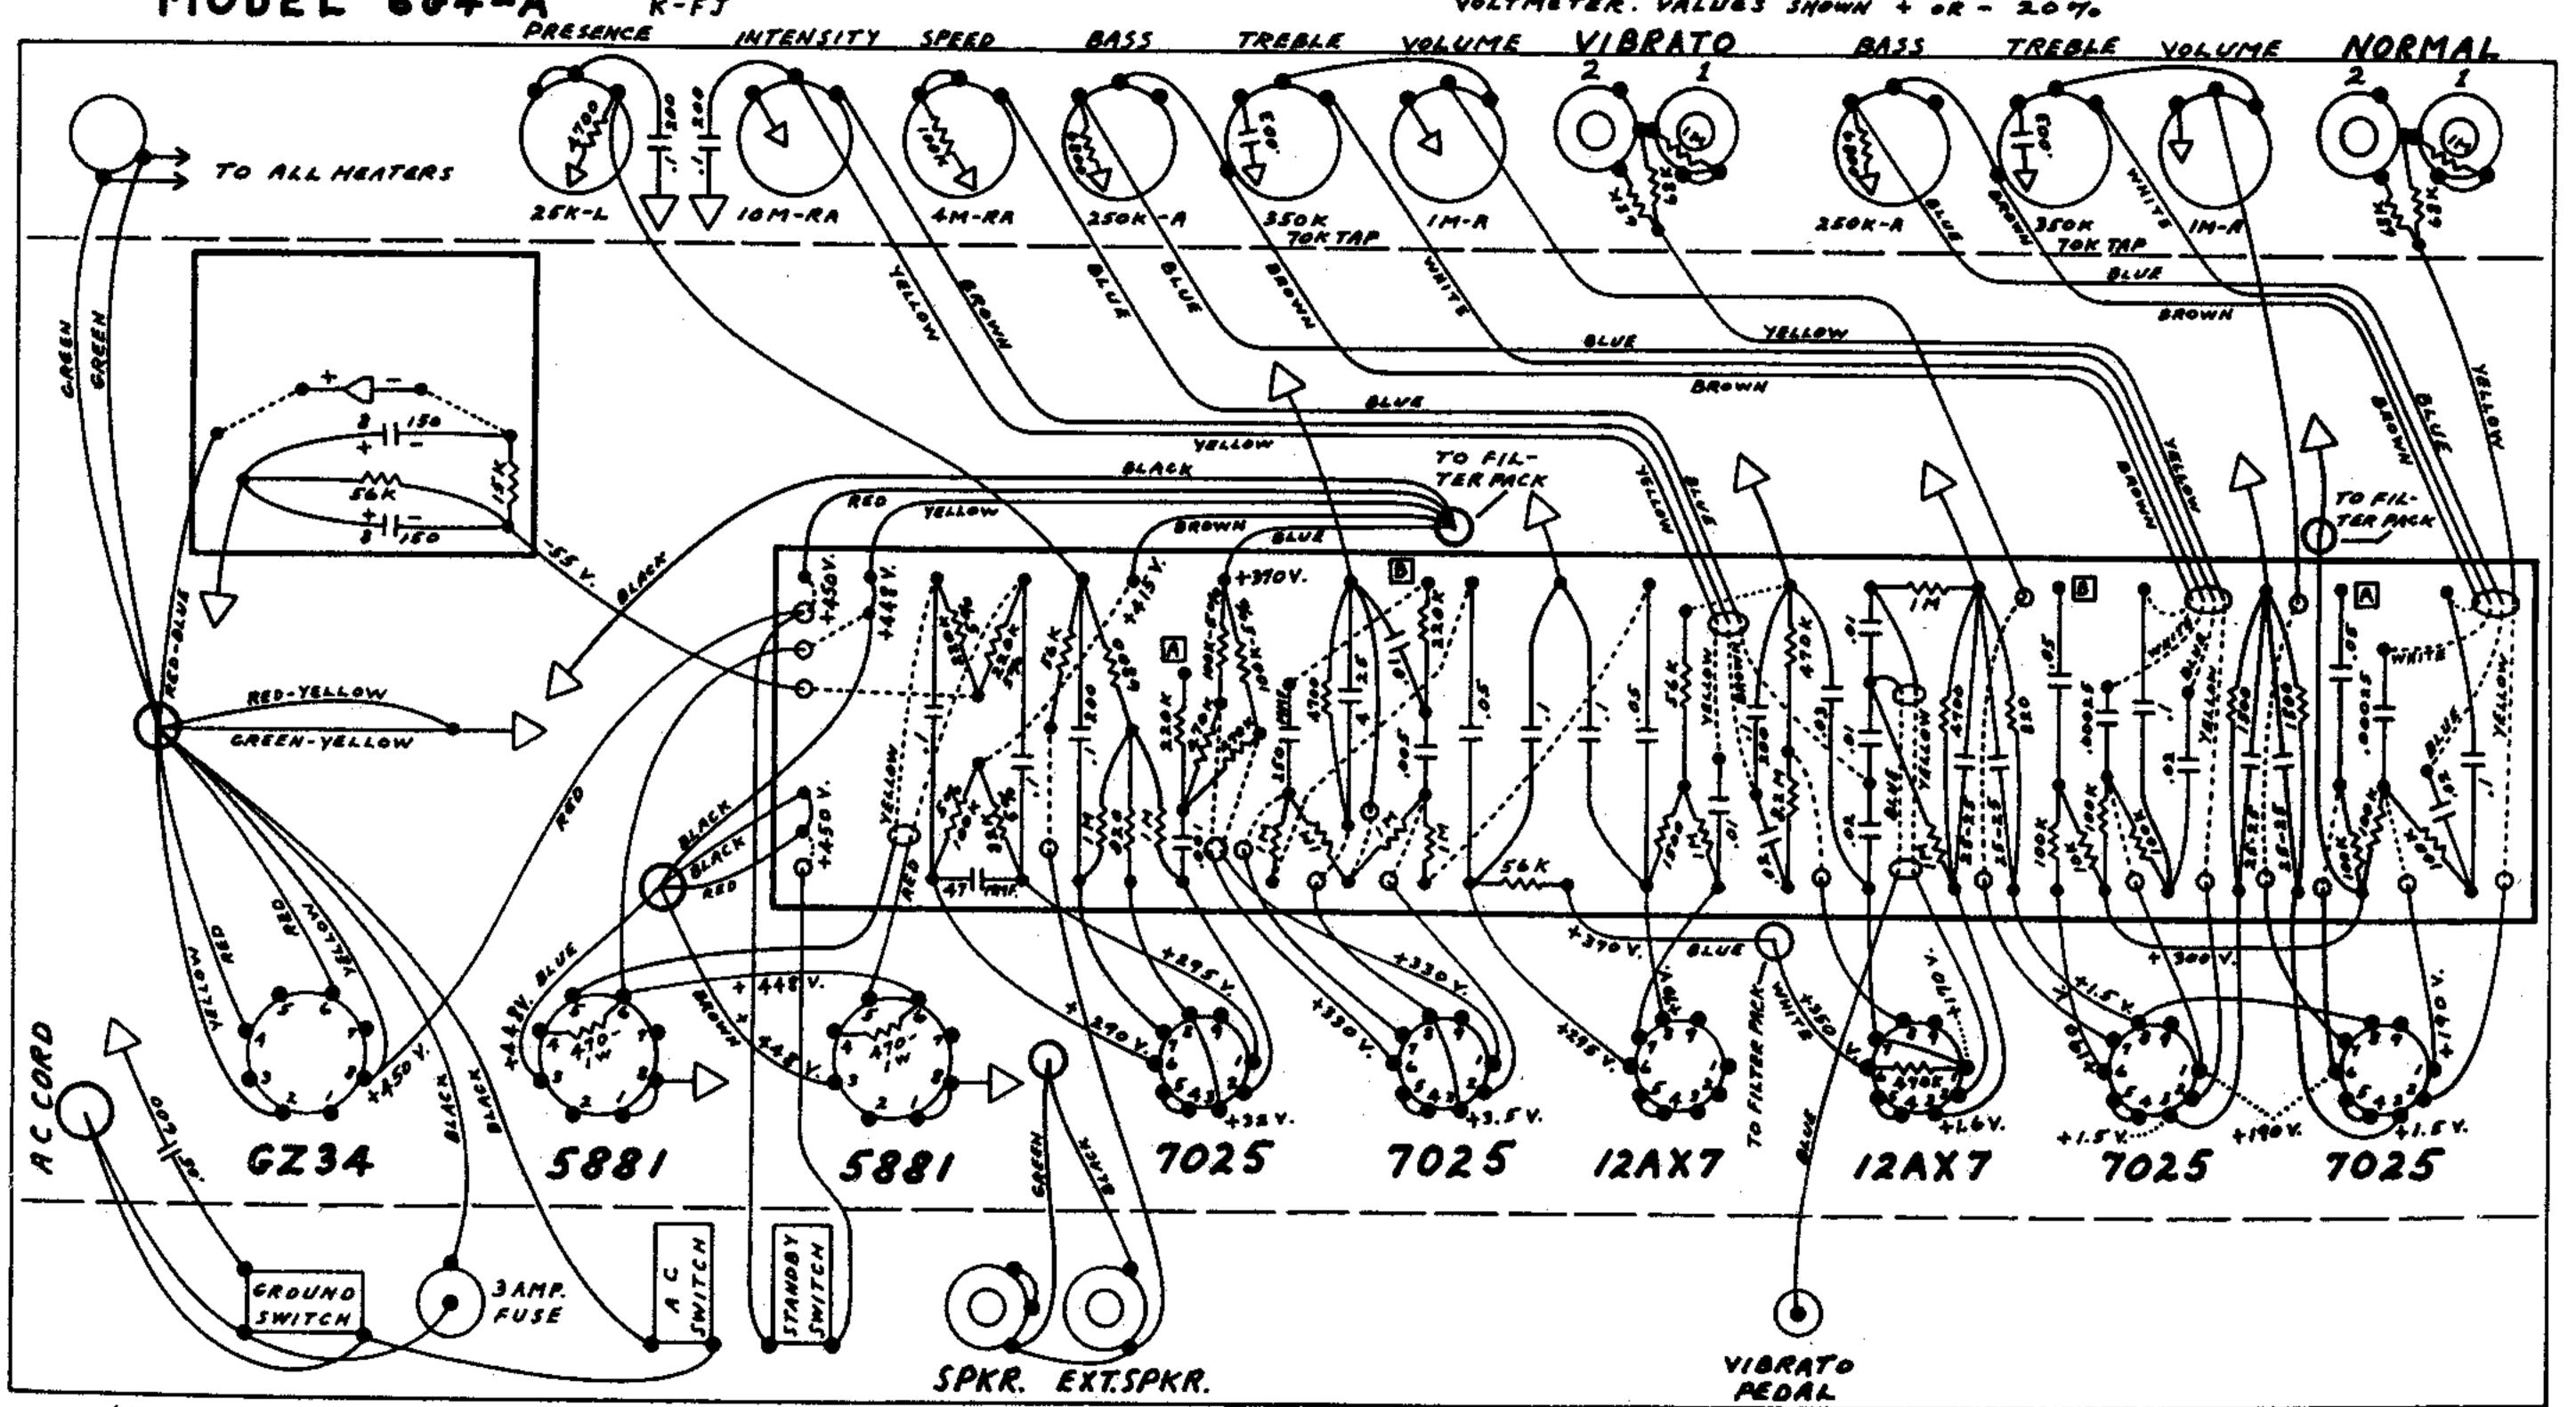

NOTE-ALL RESISTORS 1/2 WATT, 10% TOLERANCE, UNLESS SPECIFIED. NOTE-ALL CAPACITORS AT LEAST 400 VOLT RATING UNLESS SPECIFIED