


# VL1220

## Coin-type Vanadium Rechargeable Lithium Batteries



## Features & Benefits

- Retains high-discharge voltage performance.

## Specifications

Charging Voltage		3.25V to 3.55V
Nominal Voltage		3.0V
Nominal Capacity* <sup>1</sup>		7.0mAh
Continuous drain		0.02mA
Dimensions* <sup>2</sup>	Diameter (Max.)	12.5mm
	Height (Max.)	2.0mm
Weight* <sup>2</sup>		Approx. 0.80g
Operating Temperature		-20°C to +60°C

\*<sup>1</sup> Based on standard drain and cut-off voltage down to 2.5V at 20°C.

\*<sup>2</sup> Without tabs.

## Applications

Memory backup, RTC backup (printers, composite machines, medical equipment, FA equipment), remote keyless entry, fire alarms.

## Terminal types

Please see the documents for the terminal and lead wire settings.

- [Line up of tab terminal types by product number](#)

F type



## Charging circuits

Please ask Panasonic about constant- current charging system.

The charging circuit is crucial in terms of ensuring that full justice will be done to the battery characteristics.

Please study it carefully as the wrong charging circuit can cause trouble.

Charging/discharging cycle	Approx. 1,000times at 10% discharge depth to nominal capacity.
Charging system	Constant-voltage system
Operating temperature	-20°C to +60°C


[Panasonic Energy Co., Ltd.](#)

As of July, 2024. This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. The contents of this product information are subject to change without notice.




## Characteristics

### Discharging Characteristics

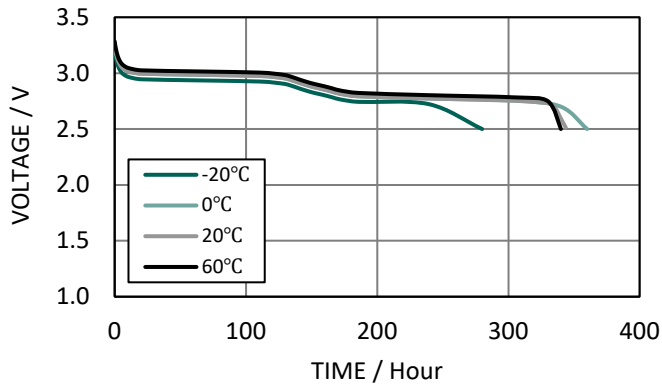


### Cycle Life Characteristics

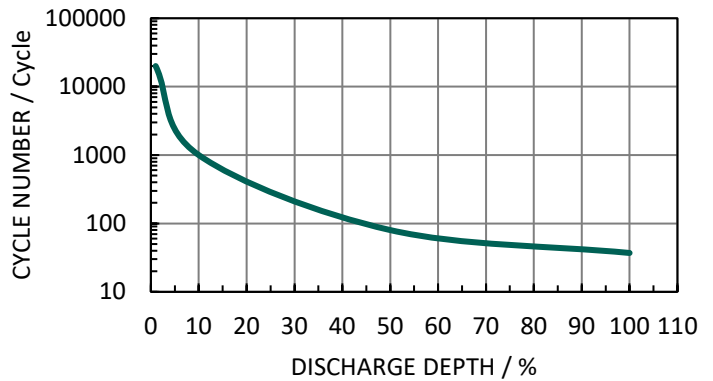

Charging Condition : CV(3.4V, 560Ω, 48H)  
Discharging Condition : CR(100kΩ, 2.5V Cut-off)

### Continuous Charging Characteristics (60°C)

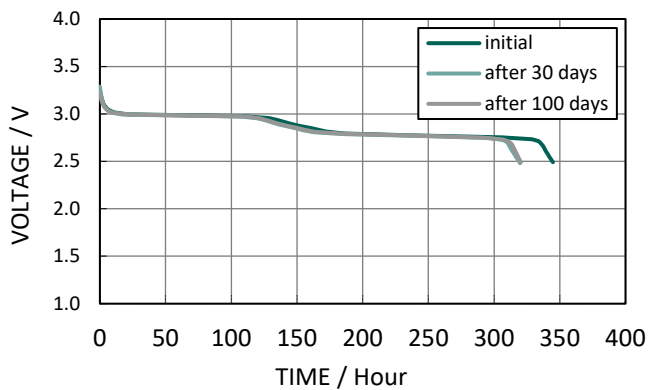

Charging Condition : CV(3.4V, 560Ω, 48H, 60°C)  
Discharging Condition : CR(100kΩ, 60°C)

## Handling Guidelines

1. If a fixed-charging method is applied, please adhere to the specified charging voltage.

**Guaranteed voltage is 3.4V±0.15V at the temperature of -20°C to 60°C.**

If the charging voltage exceeds the specifications, the internal resistance of the battery will rise and may cause battery deterioration.

Also with a charge voltage around 4V, corrosion of the positive(+) terminal (case) may occur causing leakage.

It is not possible for the battery to recover completely when the charging voltage is below the specification.

2. Under no circumstances trickle charging should be used.

Ignoring this precaution will cause the battery voltage to rise to about 5V, resulting in a deterioration of performance.

