

A

B

C

D

1

2

3

4

5

6

7

8

密级
Level

秘 密
Confidential

序号/No.	图号/Drawing No.	图纸名称/Drawing Name	Ver.	Date	Remark
01	ENV-ELE-001-01	Cover Page	0		
02	ENV-ELE-001-02	Catalogue	0		
03	ENV-ELE-001-03	Description	0		
04	ENV-ELE-001-04	BESS BLOCK Single Line Diagram	0		
05	ENV-ELE-001-05	Auxiliary Power Supply	0		
06					
07					
08					
09					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					

序号/No.	图号/Drawing No.	图纸名称/Drawing Name	Ver.	Date	Remark
26					
27					
28					
29					
30					
31					
32					
33					
34					
35					
36					
37					
38					
39					
40					
41					
42					
43					
44					
45					
46					
47					
48					
49					
50					

版本
Version

日期
Date

状态
Status

修改内容摘要
Summary of modified content

修改记录
Modify Record

设计
Designer

校核
Checker

审核
Inspector

批准
Approver

批 准
Approver

审 核
Inspector

校 核
Checker

Jacob Yang

Jintao Wu

设 计
Designer

日 期
Date

Hongbo Wang
Yanjing Gao

13.03.2026

远景能源有限公司
Envision Energy LTD.

图号
No.

ENV-ELE-001-02

版本
Version

0

页码
Page

2

ENS-D6G-24120-10100-000

项目
Project

Catalogue

打印尺寸
Print size

A2

1

2

3

4

5

6


7

8

The drawing and content is property of Envision Energy LTD.
It may not be used, copied or published without written permission of the owner.
该图纸和内容由远景能源有限公司提供。未经所有者书面许可不得使用、复制或发布。

A											密级 Level		秘 密 Confidential																			
	Description 1. This volume is electrical primary diagram of a single energy storage unit ENS-D6G-24120-10100-000. 2. Each energy storage unit includes four PCS AC all-in-one machine (AC side) and four Battery bank-and-cabinets A,B,C and D (DC side). 3. The cables inside 4 containers are all assembled in the factory, and All cables and optical cables between different containers, AC systems, and station equipment are designed, selected, laid, fusion spliced, installed, and inspected by the BOP. Envision can provide a recommended cable list for reference,and please refer to the cable list volume for details.																															
B																																
C																																
D																																
											远景能源有限公司 Envision Energy LTD. 批准 Approver 审 核 Inspector 校 核 Checker Jacob Yang 设 计 Designer 比 例 Scale 日 期 Date Hongbo Wang Yanjing Gao 13.03.2026 Jintao Wu			项目 Project		打印尺寸 Print size		A2														
版本 Version			日期 Date		状态 Status		修改内容摘要 Summary of modified content				设计 Designer		校核 Checker		审核 Inspector		批准 Approver		Description													
							修改记录 Modify Record												图号 No.				ENV-ELE-001-03		版本 Version		0		页码 Page		3	

		1		2		3		4		5		6		7		8			
																密级 Level		秘 密 Confidential	
A		AC Unit of ESS Unit		RMU		RMU Scheme		CCV		36kV 630A 25kA/1s									
				Load Switch		1LBS ~ 2LBS		Manual + Motor AC230V											
				Earthing Switch		1ES ~ 2ES		Manual											
						Three position Disconnector		DS/ES		Manual									
						Vacuum circuit breaker		VCB		Manual + Motor AC230V									
						Voltage indicating system		1VPIS ~ 3VPIS		AC230V with latches									
						Current transformer		1TA ~ 3TA		600/1 5P30 5VA									
						Cable connector		1T ~ 6T 7T ~ 12T		T-connector is BOP scope, RMU reserve C-type bushing 150mm2 cable installed in the factory									
						Surge Protective Device		1F ~ 6F		model to be selected (BOP Scope)									
						Note 1		The upper and lower disconnector schemes of the RMU are subject to the actual supply.											
B				Oil Type Transformer		Current transformer		10TA		250/5 0.5 2.5VA(Only for internal use)									
						Split-Winding Type Transformer		10100/33											
						10100kVA 33±2×2.5%/0.69-0.69kV													
						Impedance voltage [HV-(LV1// LV2)]		10.5%;											
						Dy11-y11													
				PCS		PCS1 ~ PCS4: 2520kW													
						DC Voltage: 1000-1500V													
						AC Voltage : 690V													
						Frequency: 50Hz													
						Current Transformer(4TA ~ 9TA):		5000/5 0.2 10VA+5000/1 5P30 5VA(Only for internal use)											
						PCS AC side Frame Circuit Breaker (-Q1):		Ie=2500A,Ue=690Vac,3P,Ics=75kA											
						PCS AC side lightning arrester(-FA1):		Uc=690Vac,In=20kA.											
						PCS DC side load switch(-QS1,-QS2):		Ie=1600A,Ue=1500VDC											
						PCS DC side lightning arrester(-FA2,-FA3):		Ucpy=1500VDC,In=20kA.											
						PCS DC fuse(-F1.1,-F2.1):		1500Vdc/1800A											
C		Cable (BOP scope, Based on the cable selected by BOP)				The following are the recommended cables. The final model will be selected by the BOP party.													
						2x[4x(1c 300mm2 copper core rubber cable non-armor,1500VDC)](PCS1-DC ContainerA)													
						2x[4x(1c 300mm2 copper core rubber cable non-armor,1500VDC)](PCS2-DC ContainerB)													
						2x[4x(1c 300mm2 copper core rubber cable non-armor,1500VDC)](PCS3-DC ContainerC)													
						2x[4x(1c 300mm2 copper core rubber cable non-armor,1500VDC)](PCS4-DC ContainerD)													
		DC Side of ESS Unit (Container)		DC DIST. Cabinets		D.C.1331.2V(Ue),1500V(Umax)													
						SPD:1500Vdc/4.5kV													
				Racks & DC Junction Boxes		DC Junction Box:													
						DC Breaker: 1500Vdc/400A													
						DC contactor: 1500Vdc/600A													
						DC fuse: 1500Vdc/450A/250kA													
						Each Battery Rack (4 Packs):													
						1005.056kWh 1331.2Vdc													
						Each Battery Pack (1P104S LFP cells):													
						251.264kWh 332.8V													
						LFP cell: 755Ah 3.2V													
D				Container A: 6 Battery racks; 6030 kWh															
				Container B: 6 Battery racks; 6030 kWh															
				Container C: 6 Battery racks; 6030 kWh															
				Container D: 6 Battery racks; 6030 kWh															

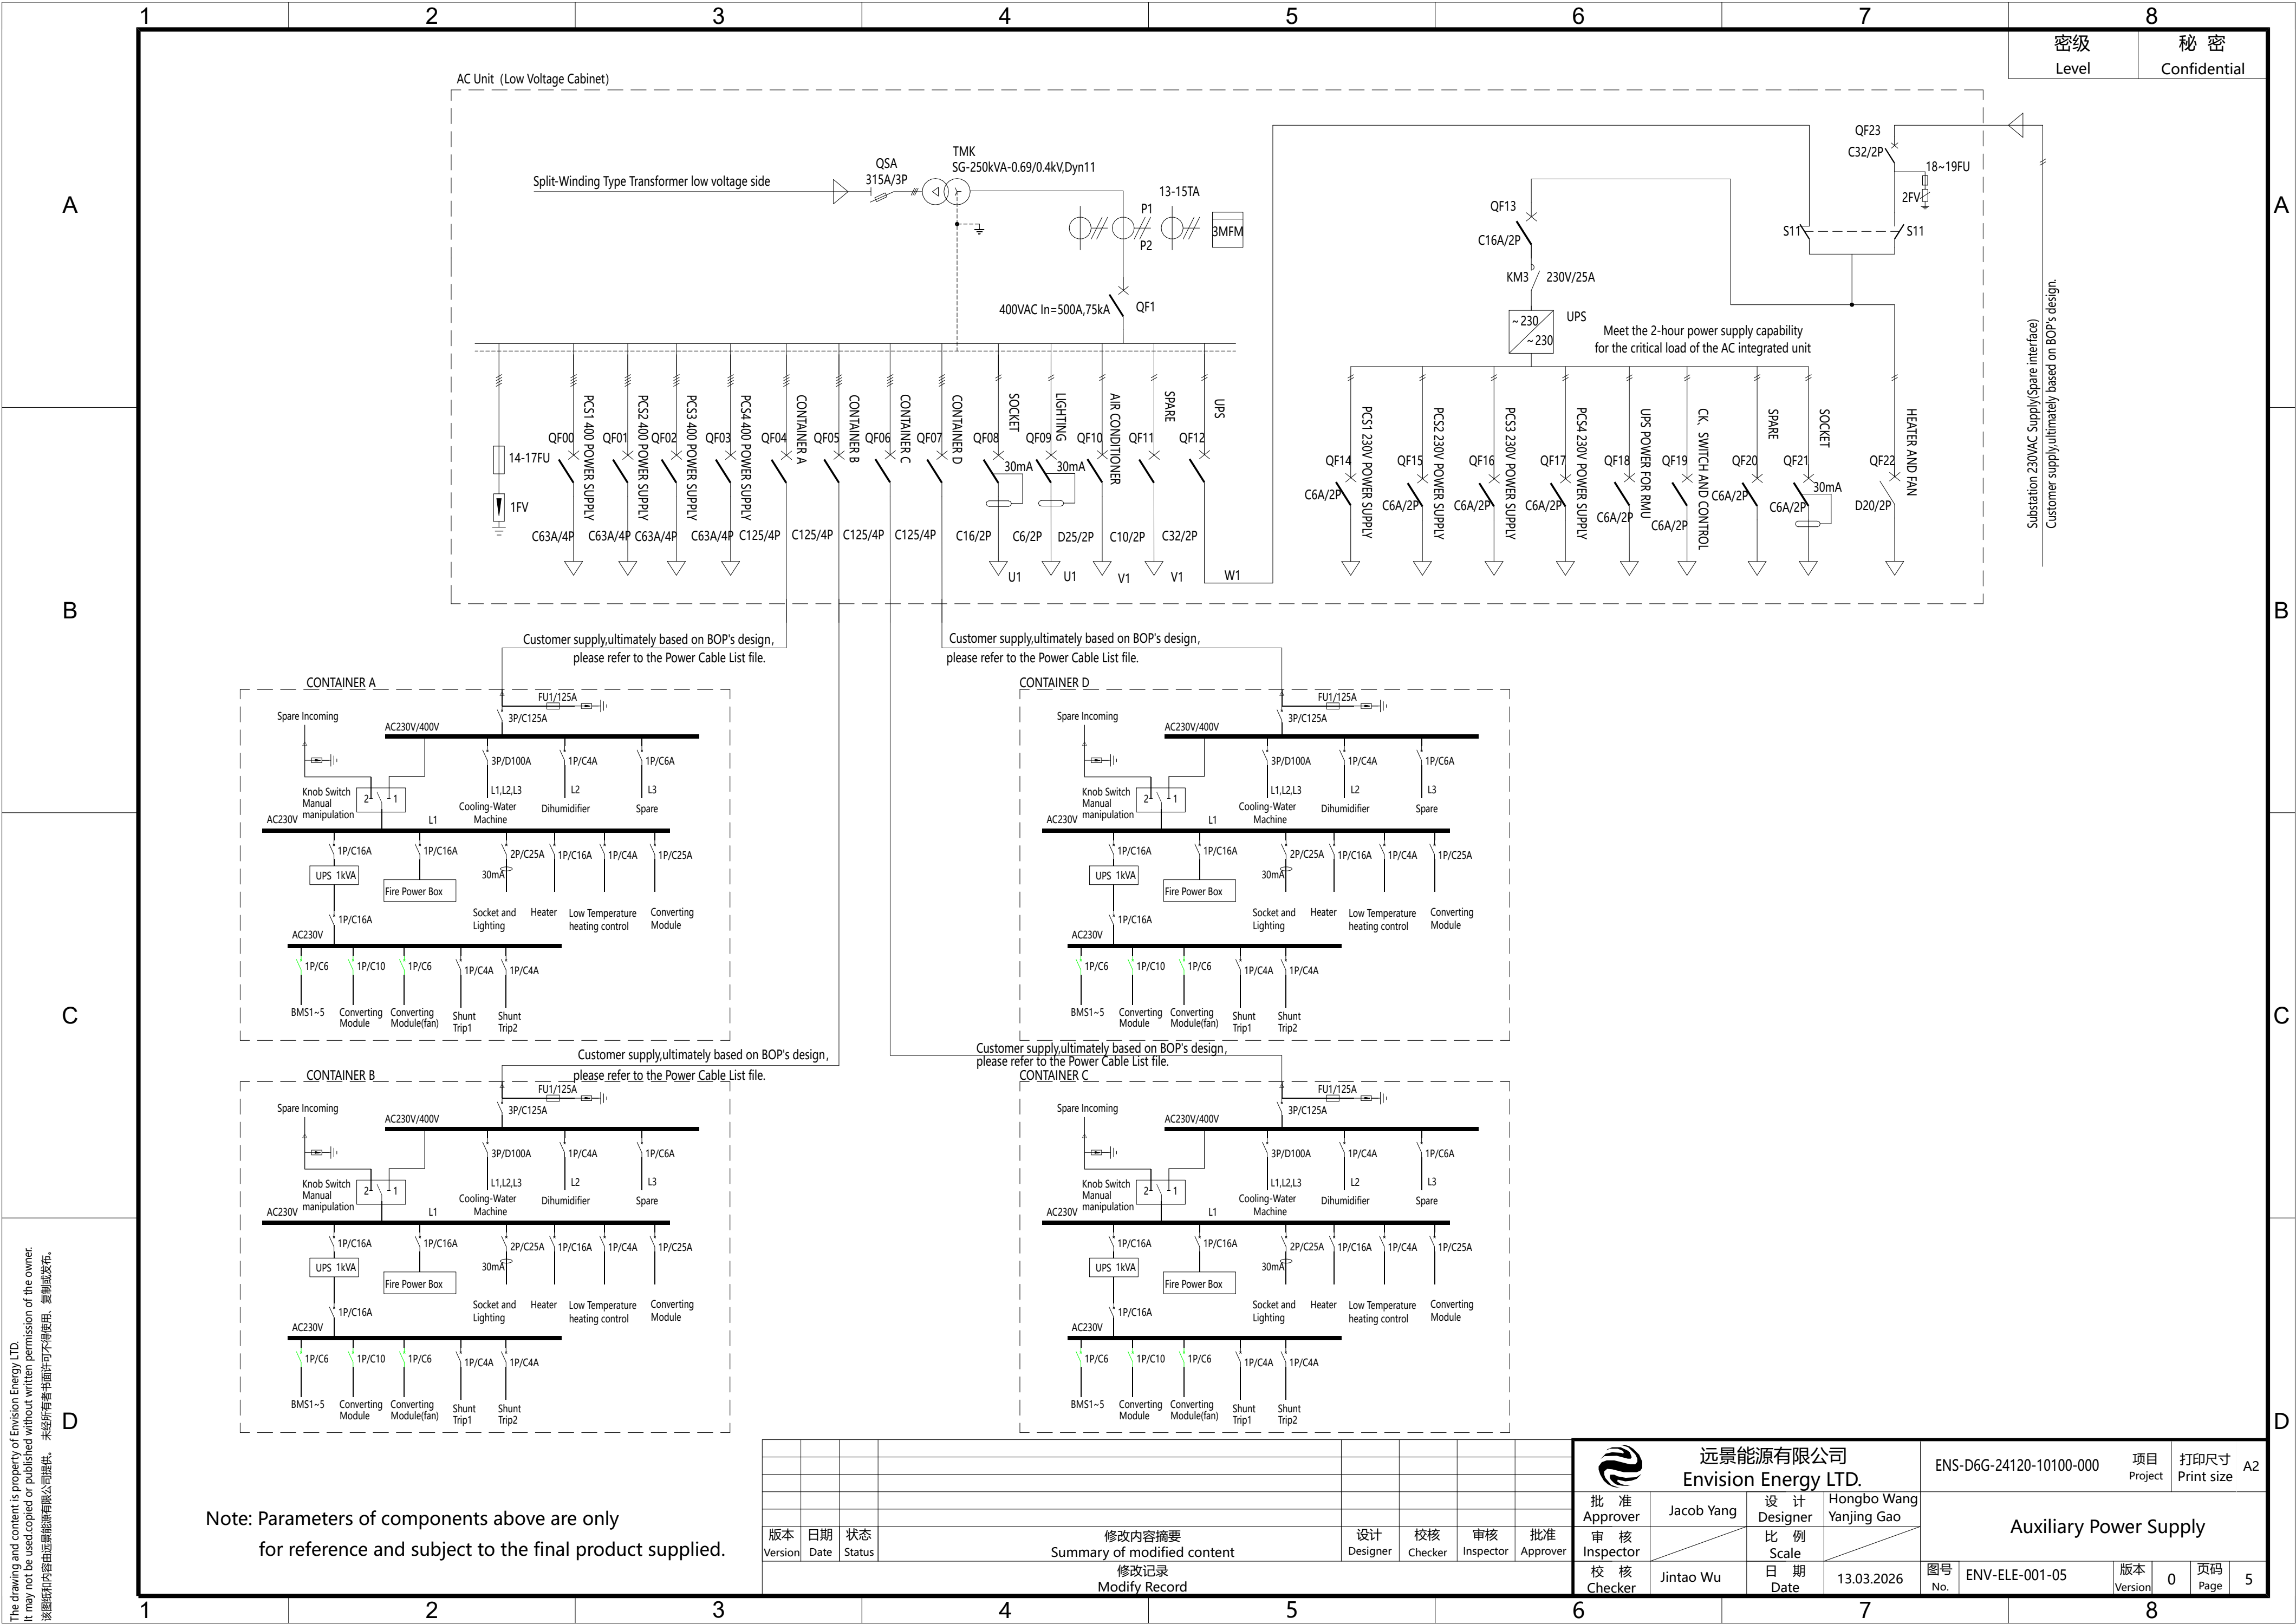

Note: Parameters of components above are only for reference and subject to the final product supplied.

版本

Version

日期

Date

状态

Status

修改内容摘要

Summary of modified content

修改记录

Modify Record

设计

Designer

校核

Checker

审核

Inspector

批准

Approver

远景能源有限公司

Envision Energy LTD.

批 准

Approver

审 核

Inspector

校 核

Checker

Jacob Yang

设计

Designer

比例

Scale

日期

Date

Hongbo Wang

Yanjing Gao

13.03.2026

Jintao Wu

项目

Project

ENS-D6G-24120-10100-000

图号

No.

ENV-ELE-001-05

版本

Version

0

页码

Page

5

打印尺寸

Print size

A2

Auxiliary Power Supply

The drawing and content is property of Envision Energy LTD.
It may not be used copied or published without written permission of the owner.
该图纸和内容由远景能源有限公司提供。未经所有者书面许可不得使用、复制或发布。