

Ex.N.3: Spectrum Analysis of Sub-1 GHz, Mid-band & mmWave by Plotting Propagation Loss

AIM: To analyze the propagation loss characteristics of different frequency bands (Sub-1 GHz, Midband, and mmWave) in wireless communication systems and compare their performance over varying distances using MATLAB.

Objective : 1. To compute the Propagation Loss (dB) for Sub-1 GHz, Mid-band, and mmWave frequency ranges using standard path loss models.

2. To evaluate the impact of different Operating Frequencies (GHz) on signal attenuation and coverage performance.

3. To analyze how Communication Distance (km) affects propagation loss across different spectrum bands.

Procedure

1. Define frequency bands: Sub-1 GHz (0.9 GHz), Mid-band (3.5 GHz), and mmWave (28 GHz).

2. Set communication distance range (e.g., 0.1 km to 5 km).

3. Use Free Space Path Loss (FSPL) formula to compute propagation loss:

$$PL(dB) = 20 \log_{10} \left[\frac{4\pi d f}{c} \right] + 32.44$$

4. Calculate propagation loss for each frequency band over varying distances.

5. Plot distance vs propagation loss curves for comparison.

6. Analyze how higher frequencies experience higher attenuation.

7. Compare coverage efficiency of each spectrum band.

8. Display results using MATLAB plots.

OBJECTIVE-3.1

```
clc;
clear;
close all;
d = 0.1:0.1:5;
f = [900 3500 28000];
PL1 = 32.44 + 20*log10(f(1)) + 20*log10(d);
PL2 = 32.44 + 20*log10(f(2)) + 20*log10(d);
PL3 = 32.44 + 20*log10(f(3)) + 20*log10(d);
figure
subplot(2,1,1);
plot(d,PL1,'b','LineWidth',2);

hold on

plot(d,PL2,'r','LineWidth',2)

plot(d,PL3,'k','LineWidth',2)

title('Propagation Loss vs Distance')

xlabel('Distance (km)')

ylabel('Loss (dB)')
```

```
grid on
```

```
% ----- Graph 2 (NO legend used to avoid error) -----
```

```
subplot(2,1,2)
```

```
Freq = [900 3500 28000];
```

```
Loss = [PL1(10) PL2(10) PL3(10)];
```

```
plot(Freq, Loss, '-o', 'LineWidth', 2)
```


```
title('Propagation Loss vs Frequency')
```

```
xlabel('Frequency (MHz)')
```

```
ylabel('Loss (dB)')
```

```
grid on
```

OUTPUT :-

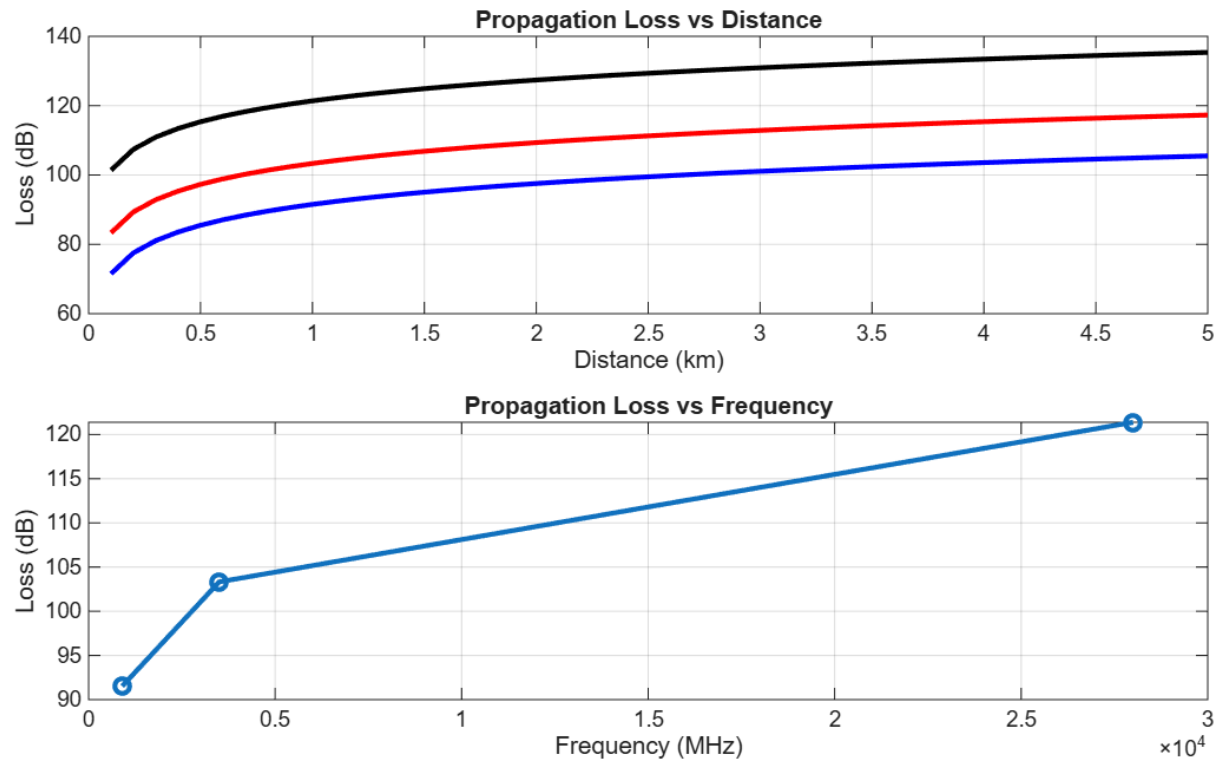

OBJECTIVE-3.2

```
clc;
```

```
clear;
```

```
close all;
```

```
d = 2; % fixed distance (km)
```

```
f = [900 3500 28000]; % MHz
```

$PL = 32.44 + 20 \cdot \log_{10}(f) + 20 \cdot \log_{10}(d);$

figure

% ----- Graph 1: Frequency vs Loss -----

subplot(2,1,1)

plot(f,PL,'-o','LineWidth',2)

title('Propagation Loss vs Operating Frequency')

xlabel('Frequency (MHz)')

ylabel('Propagation Loss (dB)')

grid on

% ----- Graph 2: Band Comparison -----

subplot(2,1,2)

bar(PL)

title('Comparison of Propagation Loss Across Bands')


```
xlabel('Frequency Bands (Index: 1=Sub-1GHz, 2=Mid-band, 3=mmWave)')
```

```
ylabel('Propagation Loss (dB)')
```

```
xticklabels({'Sub-1GHz','Mid-band','mmWave'})
```

```
grid on
```

OUTPUT:-

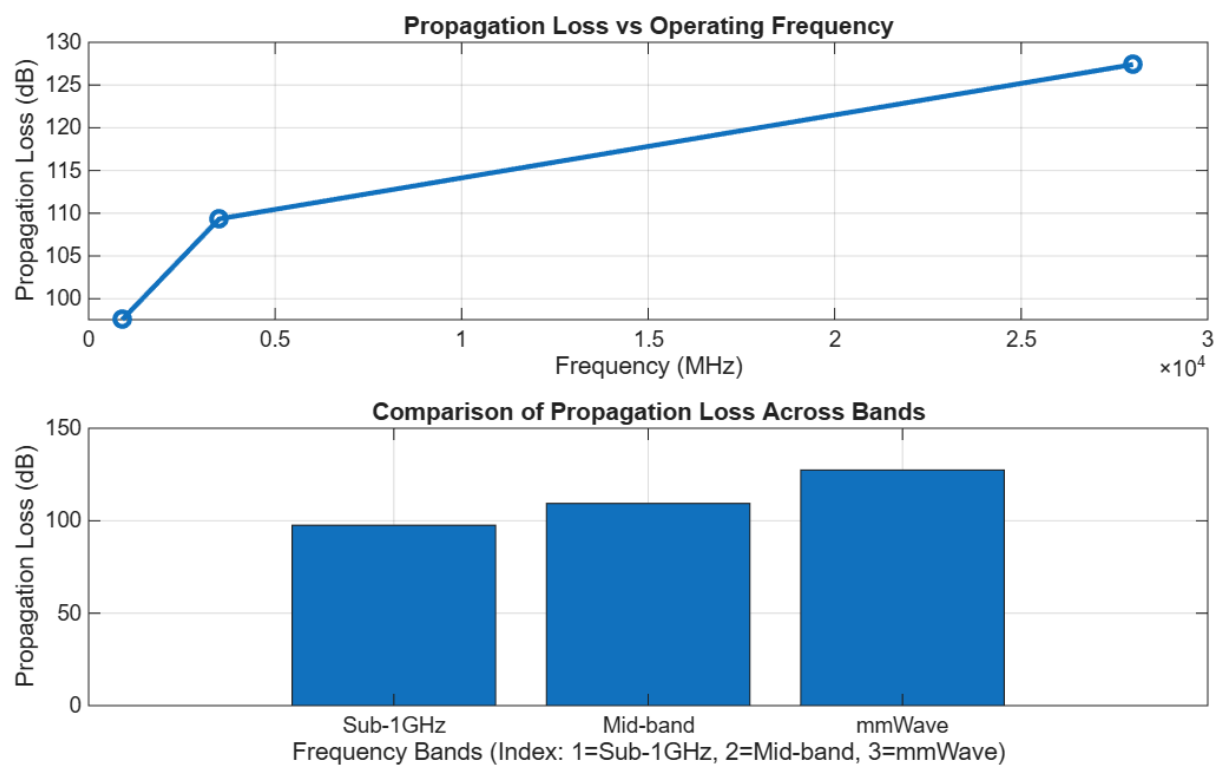

OBJECTIVE-3.3

```
clc;
```

```
clear;
```

```
close all;
```

```
% Frequency bands (MHz)
```

```
f = [900 3500 28000];
```

```
% Distance (km)
```

```
d = 2;
```

```
% Propagation Loss (FSPL)
```

```
PL = 32.44 + 20*log10(f) + 20*log10(d);
```

```
figure
```

```
% ----- Graph 1: Simple Line Plot (SAFE) -----
```

```
subplot(2,1,1)
```

```
plot(f, PL, '-o', 'LineWidth', 2)
```

```
title('Propagation Loss vs Operating Frequency')
```

```
xlabel('Frequency (MHz)')
```

```
ylabel('Propagation Loss (dB)')
```

```
grid on
```

```
% ----- Graph 2: Safe Comparison Plot -----
```

```
subplot(2,1,2)
```

```
plot(1:3, PL, '-s', 'LineWidth', 2)
```

```
title('Band-wise Propagation Loss Comparison')
```

```
xlabel('Band Index (1=Sub1GHz, 2=Mid-band, 3=mmWave)')
```

```
ylabel('Propagation Loss (dB)')
```

```
grid on
```


OUTPUT:-

