




To Kakute pads: 5V G R3 T4 R4 T6 R6 SDA SCL T1 R1 G




To Kakute 8-pin port 2 leads: GND M5 M6 M7 M8 (B+ and R7 NOT brought down)




VBAT tap from ESC battery pads (20 AWG)




PTC fuse 1812, >=33 V, ~1.1 A hold (part TBC)




Micro BEC input leads




Micro BEC output leads (set to 5.0 V)




Spare power: 5V_AUX G 5V_FC G




TBS M10Q: order matches its pads TX RX GND VCC SCL SDA




SiK radio (UART4)



FS-iA10B iBUS servo lead (S + −)



TF-Luna pin order 1-6 (CFG tied to GND = I2C mode)




470uF 10V low-ESR (servo/Pi rail)



1k 0805



Green 0805: 5V_AUX on



Spare FC I2C (5 V supply, shared bus)




Payload servo on M5 (S + −)




Spare output M6 (S + −)




Spare output M7 (S + −)



Spare output M8 (S + −)

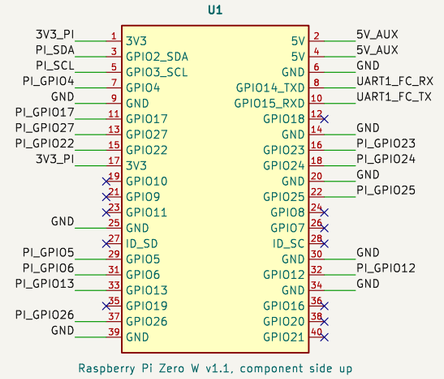

Raspberry Pi Zero W v1.1, component side up

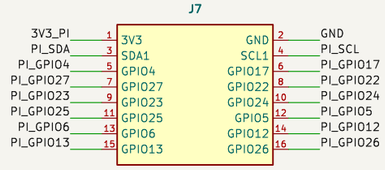

Pi expansion: 3V3 logic ONLY

MAAME CARRIER BOARD rev A (draft, layout pending frame measurements)

1. The 65 A battery path is NOT on this board: XT60 -> Tekko32 BAT+/BAT- with 12 AWG, 1000uF 35V at the ESC pads.
   J3 takes a thin VBAT tap (20 AWG) from the ESC pads for the micro BEC only, through F1.
2. Kakute H7 + Tekko32 stack on H1-H4 (30.5 mm, M3), stock 8-pin ESC cable between them, unchanged.
3. Every Kakute link is a soldered wire into J1/J2 (labelled), never a plug-to-plug cable, so a reversed
   JST lead can't put 9 V or B+ onto a signal. 9V, B+ and R7 are deliberately not brought down.
4. 5V_AUX (micro BEC: Pi, servos) and 5V_FC (Kakute 5 V: GPS, SiK, RX, TF-Luna) are separate rails. GND shared.
5. UART nets are named from the FC side: UARTn_FC_TX goes to the device RX.
6. Pi I2C/GPIO on J7 are 3.3 V. Do not connect them to the FC I2C bus (5 V pull-ups on GPS).
7. UNCONFIRMED: TF-Luna lead order, SiK lead order, M10Q lead colours. Silkscreen labels every pin; beep before soldering.

Base board under Kakute H7 V1.5 + Tekko32 stack, Pi Zero W socket, peripheral headers

Sheet: /
File: maame_carrier.kicad_sch

Title: Maame carrier board

Size: A3	Date: 2026-10-27	**Rev: A-draft**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1