
80 x 80 x 38

12V / 1.8A

20mm ADAPTER

TS1 67L065 metal bracket / M3 / z-hole=18; LEADS UP (proposal)

DUCTED AIR -> +X / EXHAUST OFF BOARD

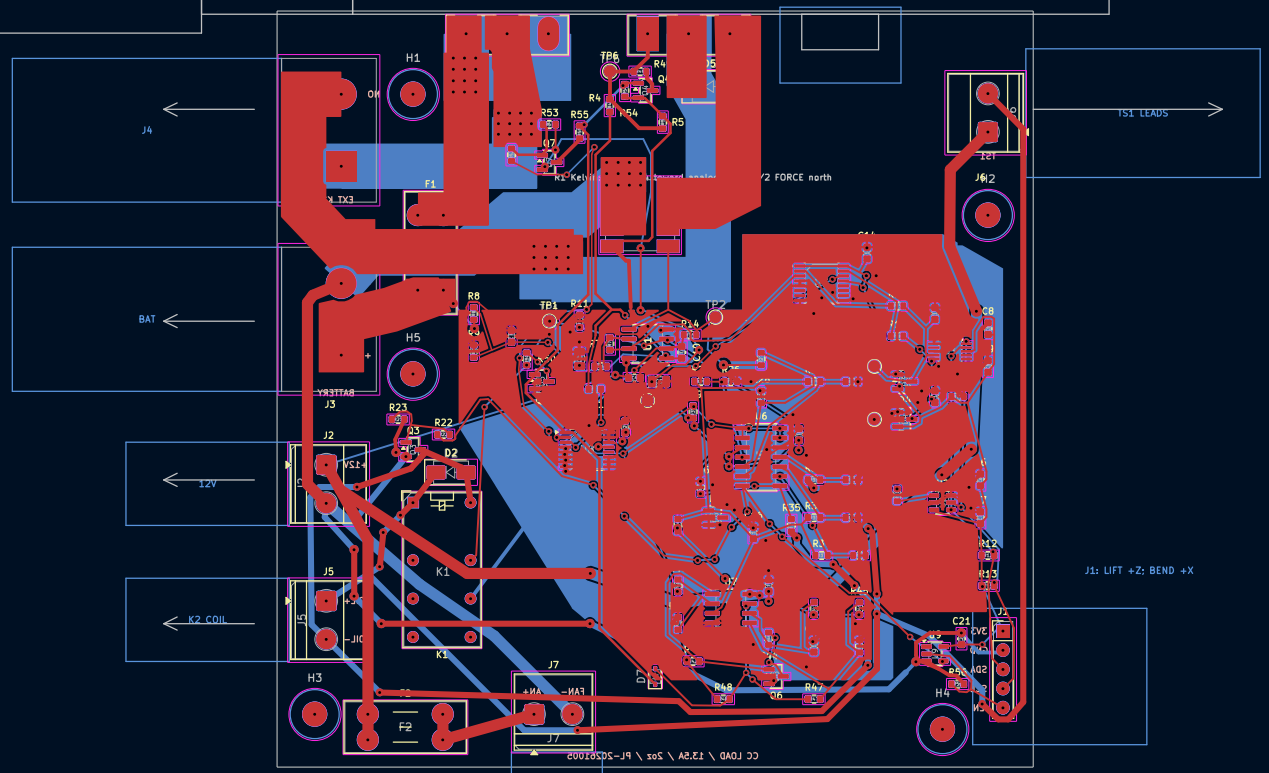

POST-LAYOUT 2026-10-05: 2 LAYERS / FINISHED Cu >=70um EACH / 1.6mm FR4

PTH wall Cu MIN25um (order 30um nominal); holes +/-0.05mm; nominal annulus>=0.25 / finished>=0.15mm

Preserve R1 FORCE/SENSE isolation; analog GND MUST NOT be joined to GNDPWR in CAM

PREPROTOTYPE: PCBWay advanced 2oz / green mask 0.102mm bridge; first-article assembly/startup verification required

PLACEMENT FROZEN 2026-09-30 / NET CLASS AND ROUTING RELEASED; ASSEMBLY DETAILS PENDING

Only J3/J4/J6 placement changed. H1-H5: diameter 3.2 NPTH, M3, 10mm standoffs.

Hole keepouts: 8 x 8mm on BOTH copper layers; no tracks/vias/pours; other pads checked separately.

Sink: Seifert KL-845 L100; 100 x 75 XY, height62. Independent chassis support.

Fan: SUNON PF80381B1-1000U-A9H; 80 x 80 x 38; 71.5 pitch, dia4.5 holes.

Fan z=-6..74; 20mm custom sealed adapter; inlet and exhaust >=20mm clear.

SUNON full-speed12V/1.8A: F2 MINI5A; RSD-100B-12 8.4A. Startup acceptance required.

Q1/D1 x104.45/80.45; back y50.67; Fischer WFK65 0.25mm dry insulating pad.

Sheet:
File: 18650_CC_Discharge_Controller.kicad_pcb

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 1/1