PABX-Configuration

Grand Stream IP Phone configure

Step 1: Make sure your ip phone/PABX network configure dhcp mode, Check network status (**Menu -> Status -> Network Status**)

Step 2: Collect your PABX defaul ip (Like 192.168.1.99) open your web browser and open new tab and hit your PABX defaul ip
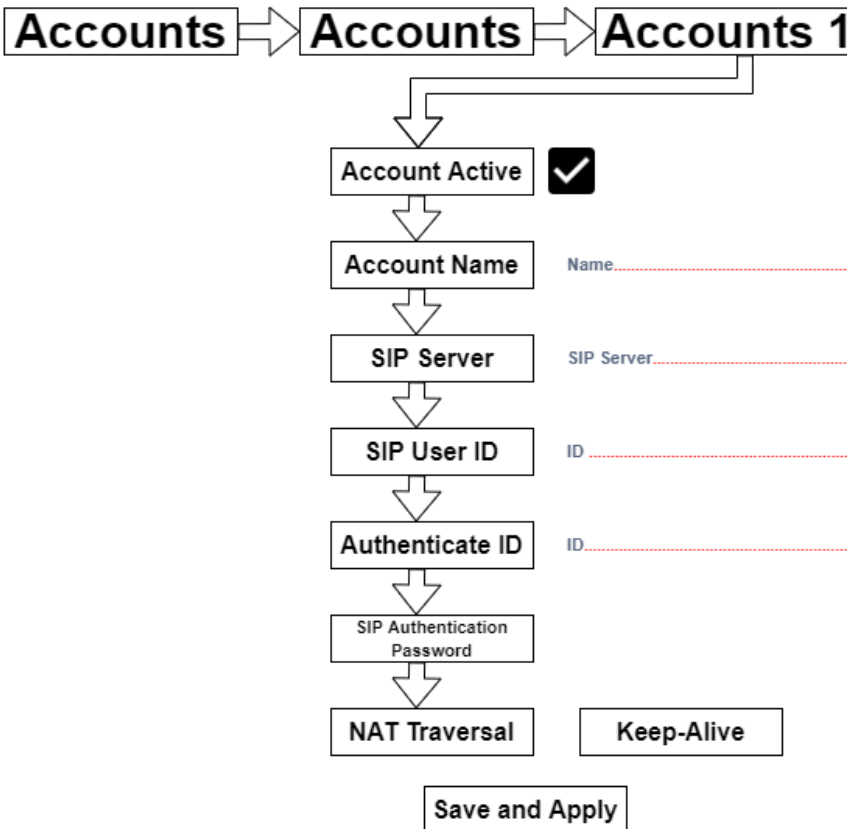
Step 3: PABX Configure Login Page (please enter your user & password) default User: **admin** Password: Check PABX display or default **(admin)**

Change your default password

Welcome to GRP2602P

Username

Password

Login

Cofiguration Part : Account Information

Accounts ⇒ Accounts ⇒ Accounts 1

Account Active ✓

Account Name — Name..

SIP Server — SIP Server..

SIP User ID — ID ....

Authenticate ID — ID..

SIP Authentication Password

NAT Traversal   Keep-Alive

Save and Apply

PABX-Configuration

Grand Stream IP Phone configure

Step 1: Make sure your ip phone/PABX network configure dhcp mode, Check network status (**Menu -> Status -> Network Status**)

Step 2: Collect your PABX defaul ip (Like 192.168.1.99) open your web browser and open new tab and hit your PABX defaul ip
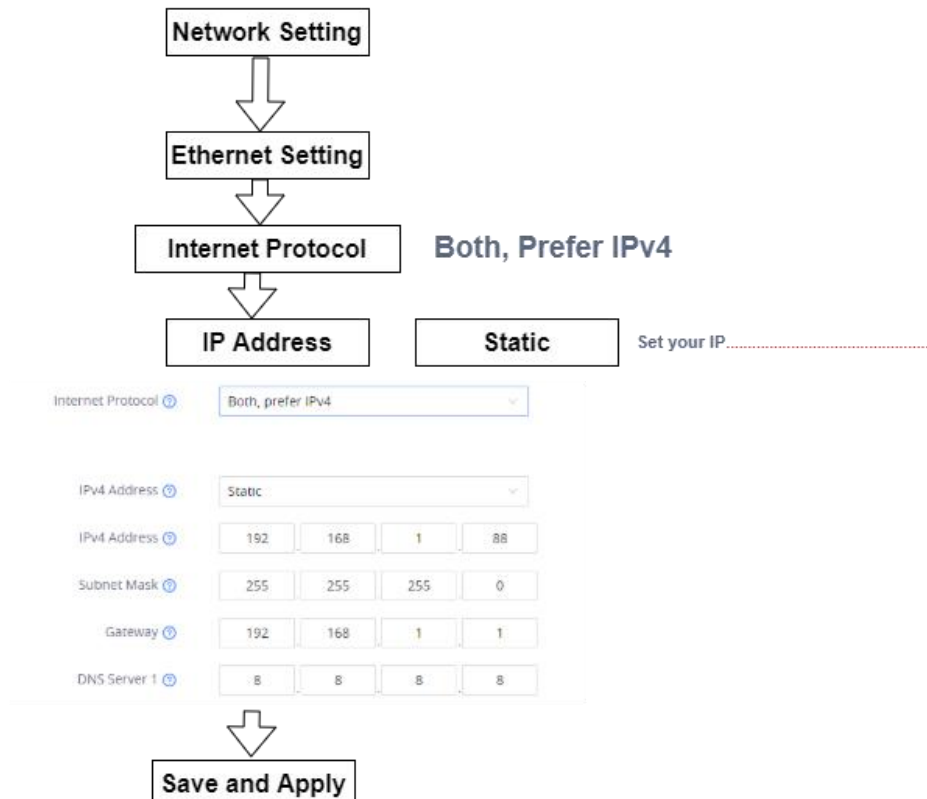
Step 3: PABX Configure Login Page (please enter your user & password) default User: **admin** Password: Check PABX display or default **(admin)**

Change your default password

Welcome to GRP2602P

👤 Username

🔒 Password 〰

Login

Cofiguration Part :Network Configuration

Network Setting

⬇

Ethernet Setting

⬇

Internet Protocol   **Both, Prefer IPv4**

⬇

IP Address   Static   Set your IP..

Internet Protocol ⑦	Both, prefer IPv4		
IPv4 Address ⑦	Static		
IPv4 Address ⑦	192	168	1	88
Subnet Mask ⑦	255	255	255	0
Gateway ⑦	192	168	1	1
DNS Server 1 ⑦	8	8	8	8

⬇

Save and Apply

PABX-Configuration

Grand Stream IP Phone configure

Step 1: Make sure your ip phone/PABX network configure dhcp mode, Check network status (**Menu -> Status -> Network Status**)

Step 2: Collect your PABX defaul ip (Like 192.168.1.99) open your web browser and open new tab and hit your PABX defaul ip
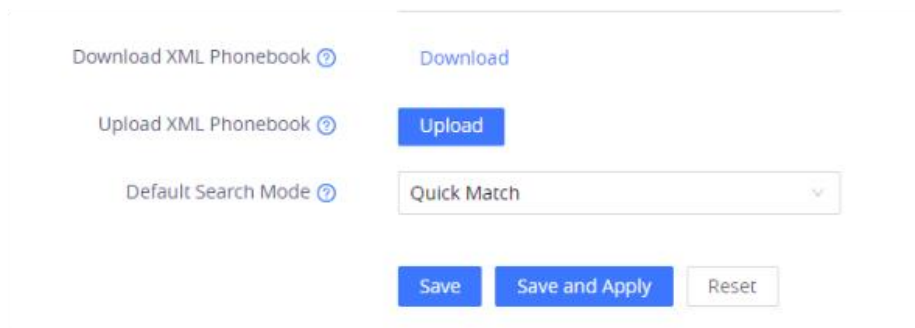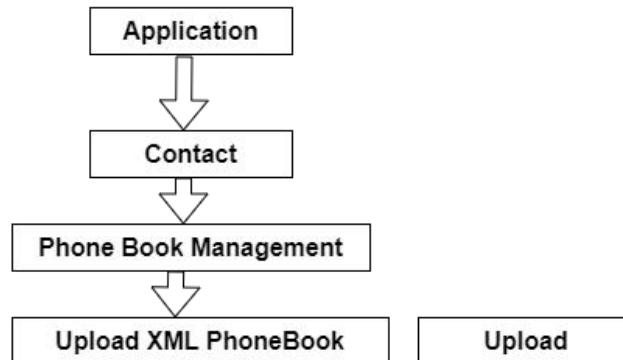
Step 3: PABX Configure Login Page (please enter your user & password) **default User: admin** Password: Check PABX display or default **(admin)**

Change your default password

Welcome to GRP2602P

Username

Password

Login

Cofiguration Part :Address Book Update

```
Application
    ↓
Contact
    ↓
Phone Book Management
    ↓
Upload XML PhoneBook          Upload
```

Download XML Phonebook ⑦   Download

Upload XML Phonebook ⑦   Upload

Default Search Mode ⑦   Quick Match

Save   Save and Apply   Reset

↓

Save and Apply