

# **SENSOR NETWORK FOR AIR POLLUTION MONITORING**

by

**Ashlin Saju**

B.Tech, Mahatma Gandhi University, Kerala, India, 2016

THESIS SUBMITTED IN PARTIAL FULFILLMENT OF  
THE REQUIREMENTS OF THE DEGREE OF  
MASTER OF SCIENCE  
IN  
COMPUTER SCIENCE

UNIVERSITY OF NORTHERN BRITISH COLUMBIA  
September 2019

© Ashlin Saju, 2019

## **Abstract**

Among the risk factors with serious health issues, air pollution ranks the highest annually. Air pollution is considered as the main cause for the majority of deaths and suffering with chronic diseases. To address this issue, we believe, active participation from public on collecting and interpreting data, educating to change the behavior of individuals and industries, and helping to control and manage pollution sources effectively is crucial. Fortunately, this goal appears to be achievable due to recent revolution of electronic and computing technologies. It is possible that small, portable, and off-the-shelf pollution sensors along with low power processors and wireless communication modules can be bought at low cost. Also, the availability of open source software for general and specific purposes is consistently increasing. What is needed is a system framework on how to build a low cost portable pollution monitoring system and install necessary open source software modules to make the system operational with least effort and technical knowledge. Contributing to achieve this task is the objective of this work. We propose a portable pollution monitoring system framework and demonstrate its feasibility with a prototype system that we built in our lab using low cost off the shelf pollution sensors and open source software.

# Contents

Abstract . . . . .	ii
Table of Contents . . . . .	iii
List of Tables . . . . .	v
List of Figures . . . . .	vi
Acknowledgement . . . . .	vii
Dedication . . . . .	viii
<b>1 Introduction</b>	<b>1</b>
1.1 Air Pollutants and Measurement Metrics . . . . .	2
1.2 Impact of Air Pollution . . . . .	5
1.3 Background . . . . .	6
1.3.1 Existing Environmental Monitoring station . . . . .	6
1.3.2 Sensor Network for Air Quality Monitoring . . . . .	8
1.4 Motivation . . . . .	8
1.5 Research Problem . . . . .	9
1.6 Thesis Contribution . . . . .	10
1.7 Research Question . . . . .	10
1.8 Research Challenges . . . . .	11
1.9 Structure of the Thesis . . . . .	13
<b>2 Literature Survey</b>	<b>14</b>

<b>3</b>	<b>Design and Implementation of Air pollution Monitoring System</b>	<b>15</b>
3.1	Design Goals . . . . .	15
3.2	Targeted Pollutants . . . . .	17
3.3	System Architecture . . . . .	18
3.3.1	Hardware Architecture . . . . .	19
3.3.2	Sensor . . . . .	21
3.3.3	Communication Middleware . . . . .	24
3.4	System Overview . . . . .	25
3.5	IoT Architecture . . . . .	27
<b>4</b>	<b>Calibration Of Low Cost Sensor</b>	<b>28</b>
4.1	Calibration Procedure . . . . .	30
4.2	Macro Analysis Tool -MAT . . . . .	31
4.3	Linear Regression . . . . .	33
	Bibliography . . . . .	35

# List of Tables

1.1	Estimated cost of Reference Instruments(USD) [1]	7
3.1	Technical specification	21

# List of Figures

1.1	Air Quality Index (AQI) [2]	4
1.2	Air Quality Health Index (AQHI) [3]	4
3.1	System Architecture	19
3.2	Arduino Ethernet Board	20
3.3	Sensitivity characteristics curve [4]	23
3.4	System Overview	25
3.5	Schematic diagram of Air pollution monitoring system	26
3.6	Printed Circuit Board	26
4.1	MAT Output	31
4.2	Correlation Graph	32
4.3	Time-Series Graph	32
4.4	Linear Regression Model [5]	33

## Acknowledgement

*I would like to express my deep sense of gratitude to my worthy supervisor Dr. Alex Aravind for allowing me to carry out my work under his invaluable guidance. His interest in scientific problems and moral inspiration have made current work possible. I am extremely indebted to the Chairperson, Department of Computer Science, Northern University of British Columbia, Prince George, for providing all the necessary facilities to complete this work. Also, a special thanks is extended to Dr. Stephen Rader and Dr. George Jones for offering their valuable assistance as my committee members.*

*I am also indebted to my labmates Apratim, Ashlin, Conan, Brae, Davis, Suresh, Shanthini, Darshik, Rahim, Ketan, Arthi, Raja and Rodrigo for their support, discussion, encouragement, and pleasant company. Special thanks to the teaching and nonteaching staff members, UNBC, for their help in all possible ways.*

*It is a pleasure to acknowledge the good company of fellow researchers and my friends Hardev, Gurjeet, Ashish, Ramneesh, Johny, Priyanka, Amit, Navjot, Bashet, Dorob, Bryan and many others.*

*Finally, I want to express my deepest gratitude to my family for their love, support and encouragement, without which this work would not have taken this shape.*

*Prince George, BC*

*September , 2019*

*(Ashlin Saju)*

***Dedicated***

***to***

***My Parents***



# Chapter 1

## Introduction

Earth, our home planet, is the only place in the known universe affirmed to host life. The life on earth is characterized by three components, air, land, and water. Each element has its own special property and are required in its proper proportions to maintain the healthy life of all living beings [6]. The quality of life relies upon the quality of the environment. However, industrial development and other manmade activities create a disturbance in the natural environment. This process of making land, water, air and other parts of the environment unsuitable and unsafe for the living is called pollution.

Pollution is a universal phenomenon that degrades the land, air, water bodies, and structures by the introduction of a contaminant into the natural environment. This changes the quality of the atmosphere and is transboundary, as they travel thousands of miles [6]. Organic pollutants which contain organic compounds are non-biodegradable and resist degradation by microorganisms; therefore they remain in the ecosystems for quite a while. The environmental scientists these days mainly face problems related to global warming and climate change. Out of different types of pollution, air pollution plays a major role in global warming.

Air contamination alludes to release of pollutants into the environment that is unfavorable to human wellbeing and the planet in general. Air pollution is stated as a complex mixture of gases and particles whose sources and composition vary over space and time [7]. The boom

in the development of industries and technology have created an alarming situation that is, degrading the quality of air. Contamination of air is a matter of serious concern and society is less aware of the impact that it causes to human health as well as to the surrounding. The World Health Organization (WHO) reported that 9 out of 10 people breathe polluted air which estimates a death rate of around 7 million every year [8] [9]. This has made many motivated individuals like researchers and communities to work towards creating awareness among the people. There are already different studies going on air pollution due to its increasing effects on the environment day by day.[CONNECTING SENTENCE INSERT] I choose to work on sensor network for air pollution since it's an application level problem and also due to my background in electronics. In the next section, I will discuss the background to introduce my research work.

## 1.1 Air Pollutants and Measurement Metrics

There are various pollutants that contribute to the contamination of the environment. These pollutants differ from region to region depending on the human activities. For example, industrial area which manufactures products from raw material, such as production of iron from its ore or production of gasoline from crude oil, releases inorganic carbon compounds into the atmosphere [10]. Urban areas are the major sources of the particulate matter, [NEEDS TO EDIT THIS] ozone and carbon compounds produced from the burning of fuels in the vehicle. Based on the severity of health impact and the kind of human activities, the National Ambient Air Quality Standards (NAAQS) has set six common criteria pollutants that harm health, environment or even property damage. The NAAQS was established by the United States Environmental Protection Agency (EPA) under the Clean Air Act which specifies the pollutants that are harmful for the public health and environment [11] [12]. The criteria pollutants specified by NAAQS are particulate matters (*PM*), ozone (*O<sub>3</sub>*), nitrogen dioxide (*NO<sub>2</sub>*), carbon monoxide (*CO*), sulphur dioxide (*SO<sub>2</sub>*), lead (*Pb*).

Different countries measure different set of pollutants, for example, India measures 8

major pollutants such as ( $PM$ ), ( $O_3$ ), ( $NO_2$ ), ( $CO$ ), ( $SO_2$ ), ( $NH_3$ ), and ( $C_6H_6$ ) (in some places ( $Pb$ ) instead). Most other countries measures a subset of these criteria pollutant for example, Canada measures  $PM$ ,  $O_3$ ,  $NO_2$ ,  $SO_2$  and  $CO$  [13]. Particulate matters are measured at two levels; 2.5 microns size particles ( $PM_{2.5}$ ) and 10 microns size ( $PM_{10}$ ), and they are measured in micro-grams per cubic meters ( $\mu g/m^3$ ).  $CO$  is measured in parts per million ( $ppm$ ) and other gases are measured in parts per billion ( $ppb$ ). These individual measurements make less sense to the common public and therefore are not very helpful in understanding the cumulative impact of the air quality. Taking this into account the government agencies of each country developed their own indices corresponding to the NAAQS for representing the quality of air. The different indices are Air Quality Health Index (AQHI), Air Quality Index (AQI), Air Pollution Index (API), Pollution Standard Index (PSI), Comprehensive Air Quality Index (CAI), Daily Air Quality Index, Common Air Quality index (CAQI) are few used in different countries. Out of all these indexes the most common are AQI and AQHI which are proposed and used by different countries [13].

India, USA, UK, and many other countries use AQI and Canada, Hong Kong uses AQHI. These metrics are designed by carefully examining those pollutants which are harmful to human health and environment. AQI is a piecewise linear function of the pollutant concentration [14] and is measured using the following formula.

$$AQI = \text{Max}\{I_i | i = 1, \dots, 8\} \quad (1.1)$$

where  $I_i$  is an air quality subindex corresponding each pollutant and it is computed as

$$I_i = \lceil \left( \frac{I_{high} - I_{low}}{C_{high} - C_{low}} \right) \rceil \times (C - C_{low}) + I_{low} \quad (1.2)$$

where  $C$  is concentration of the  $i^{th}$  pollutant.  $C_{low}$  and  $C_{high}$  are lower and upper concentration breakpoints of  $C$  respectively.  $I_{low}$  and  $I_{high}$ , respectively, are index breakpoints corresponds to  $C_{low}$  and  $C_{high}$ . The value of AQI varies from 0 to 400+ as shown in the figure 1.1

and each colour code shows the quality of air in the atmosphere.

Good (0-50)	Satisfactory (51-100)	Moderately polluted (101-200)	Poor (201-300)	Very poor (301-400)	Severe (> 401)
----------------	--------------------------	----------------------------------	-------------------	------------------------	-------------------

Figure 1.1: Air Quality Index (AQI) [2]

In Canada, the Environmental agency developed AQHI to make the common public aware about the air that surrounds them. It was based on five major pollutants  $PM_{2.5}$ ,  $O_3$ ,  $NO_2$ ,  $SO_2$ , and  $CO$  initially and later the last two pollutants were dropped from the calculation as they were identified to contribute very less in predicting health effects. AQHI computed using the following formula.

$$AQHI = \lceil (\frac{1000}{10.4}) \times [e^A - 1] + [e^B - 1] + [e^C - 1] \rceil \quad (1.3)$$

where  $A = 0.000537 \times \text{concentration of } O_3$ ,  $B = 0.000871 \times \text{concentration of } NO_2$  and  $C = 0.000487 \times \text{concentration of } PM_{2.5}$ . The value of AQHI varies from 1 to 10+ as shown in figure 1.2

1	2	3	4	5	6	7	8	9	10	+
Risk: Low (1-3)			Moderate (4-6)			High (7-10)			Very High (Above 10)	

Figure 1.2: Air Quality Health Index (AQHI) [3]

Now the question is which is a better measure, AQI or AQHI? Health index was created with a different objective which is to provide a combined effects of pollutants to the human health. AQI is based on a single pollutant and hence it is hard to see its direct relationship with health compared to AQHI [13]. On the other hand AQHI is based on the exposure-response relationship between the major air pollutant mix and human health [13], which gives more close relation to the mixture of air pollutant than AQI. It is to be noted that both

the indices failed to project the health outcomes associated with the exposure to the polluted environment [13].

## 1.2 Impact of Air Pollution

Air pollution has significantly increased after the industrialization and urbanization have taken place. The burning of fossil fuels, exhaust from factories and industries, and mining operations are the major contributors towards air pollution. The exposure to air pollutants causes premature deaths, cardiovascular disease, stroke, and other respiratory diseases [QANDEEL CONNECTION]. The state of global air 2017 has discussed the effects of long-term exposure to harmful air pollutants such as particulate matter which contributes to over 4 million premature deaths and is estimated to double by 2050, if the issue remains unattended [7]. Among the risk factors causing the serious health issues, air pollution ranks the highest for majority of deaths annually. Particles with a diameter of less than 10 microns ( $PM_{10}$ ), and less than 2.5 microns ( $PM_{2.5}$ ) causes the greatest threat to health, as they are capable of penetrating the lungs which leads to cardiovascular and chronic obstructive pulmonary diseases (COPD). [8] [15]. Exposure to carbon monoxide ( $CO$ ) which is a colorless and odorless gas is absorbed into bloodstream from lungs and reduces the ability to transfer oxygen which in turn affects the functionality of organs such as brain and heart [16] [17]. Respiratory issues such as decrease in responsiveness of airways, inflammation in airways and lung infectivity occurs due to exposure of high concentration of ozone ( $O_3$ ) [18]. Another pollutant is nitrogen dioxide ( $NO_2$ ) which causes illness such as wheezing, coughing, bronchitis and increases severity of flu symptoms. The exposure of mixed air pollutants leads to diverse health effects like birth defects, development delays in children, skin irritation or even cancer [19]. [CONNECT TO NEXT SECTION QANDEEL]

---

## 1.3 Background

The quality of the air has declined since the industrialization has taken place in the mid 19th century. Ever since then it has affected not just the environment but also the human health. Development of heavy industries across Europe and North America which used coal as their major source of energy contributed to black smoke pollution [20] [21]. Coal was not just used in industries but also in houses for heating in winter which made the pollution even worse [22]. These emissions resulted in serious health impacts on residents in urban areas that increased the mortality rate during this period. One such important event in the history of pollution is the great smog of London which killed as many as 12,000 people mostly infants. This was caused due to the combination of cold weather with smoke and lasted for several days [23]. There was a string of similar events reported in New York and accross England around the same time. All these incidents led to the development of Environmental Protection Agency (EPA) who enforced the need for installing the monitoring stations. The government along with these environmental agencies established acts like clean air act, motor vehicle air pollution act, air pollution control acts for a better quality of air [24]. Apart from that, they took initiative to monitor the air pollution by installing systems which could measure the concentration of pollutants and could give warnings to public as well as industries regarding the polluted atmosphere.

### 1.3.1 Existing Environmental Monitoring station

The government and the environmental agencies are making an effort to install monitoring stations for improving the air quality. The EPA monitors the criteria pollutants along with any special pollutant dominant in that area. These monitoring stations are fixed in a location and are operated by environmental agencies. The stations are equipped with instruments not just monitoring criteria pollutants but also analyzes other parameters like wind speed, humidity, precipitation. These analytical instruments work by the principle of

---

sampling of the air collected from the atmosphere. There are two main methods for pollutant sampling: 1) passive sampling, and 2) active sampling [25] [26]. These sampling techniques are considered as one of the most significant development for air quality measurement. These approaches are used widely for monitoring purposes. In passive sampling the pollutants are collected by physical process such as diffusion through a static air layer or membrane. These pollutants in the air are diffused to adsorb on the sampling media due to difference in the chemical composition of pollutants. The analysis of the pollutant on the sampling media gives the time-averaged contaminant concentration [27]. On the other hand, in active sampling there is an air sampling pump which actively pulls the air through a collection device like filter and weighted concentration is calculated. However these static instruments have a major drawback of temporal resolution as they are large in size and needs high maintenance. These instruments are expensive and are financially impractical to expand to more station[QANDEEL FOR REPHRASE]. The table 1.1 gives the average estimated cost for purchasing air quality monitoring equipment produced by US Environment protection agency.

Pollutant/Parameter	Estimated cost
<i>NO<sub>x</sub></i>	10,4440
<i>SO<sub>2</sub></i>	35,000
<i>CO<sub>x</sub></i>	28,000
<i>O<sub>x</sub></i>	6,600
<i>PM</i>	37,700
FTIR Analyzer	100,000

\*FTIR: Fourier Transform Infrared spectroscopy measures multiple gases

Table 1.1: Estimated cost of Reference Instruments(USD) [1]

As a result of high cost there can only be a few monitoring stations installed for an area. Thus, we can claim that spatial resolution is limited by these conventional monitoring equipments. This made the researchers and scientists to work more on portable sensor networks to understand air pollution in a better way [CONNECTION TO NEXT SECTION].

### **1.3.2 Sensor Network for Air Quality Monitoring**

There is an emerging trend of using air sensors to understand the quality of air because of its low cost, small size and low power consumption [28]. These sensors are way cheaper than reference station and can be replaced easily in case of any damage. The advancement in the micro-electro-mechanical (MEMS) system made it possible to integrate all the functions into a single electronic circuit which makes it more compact. These sensors do not need any deployment cost, infrastructure cost or any frequent maintenance which makes the overall expense even less. There is a huge amount of other application which could be achievable with sensor such as military monitoring purpose, surveillance and tracking, traffic density calculation and road condition and environmental application [29]. The sensor unit can be accommodated on an automobile, building tops or even could be worn in order to track. This enables high spatial resolution without establishing huge reference station [30]. Sensors measuring different compounds are integrated together to make a sensor node system. There are many research done with the available sensors in the market.

## **1.4 Motivation**

One of the important components in solving this issue is to increase the awareness among public about the current situation and its impact so that they can act on it. The conventional method of monitoring the air quality with the help of a few heavyweight expensive stationary monitoring systems typically installed by the state may not be effective enough for this task. To achieve the goal effectively and without further delay, pollution monitoring must become part of daily activity for everyone. For that the devices to monitor pollution must be small, portable, inexpensive, and part of a global system. With the technological advancement of low-cost computing, communication, and sensing devices, and the revolution and the importance of open source software [31], we believe it is possible to build pervasive air pollution monitoring system with commodity hardware and open source software. Now the question

---



is how to design such pollution monitoring devices faster and make them accessible to as many as possible.

Achieving the above stated goal requires a suitable system framework that can help to accelerate the process of the design and implementation of a air pollution monitoring system using the off-the-shelf commodity hardware and open source software. There are some recent attempts in this direction, but none is comprehensive and simple enough to follow and build an air pollution monitoring system with a little or moderate effort. This thesis is an attempt to fill that gap by first proposing a simple and comprehensive framework and then demonstrating its feasibility and use by creating our own pollution monitoring system that is operational in our lab. We have also added a step of calibration by implementing a web-based tool to find out the quality of data obtained from the system. Our contribution is a step towards inspiring and motivating not only the public to use the device, but also many amateur electronic hobbyists to buy the hardware locally and download the associated software to build their own pollution monitoring device.

## 1.5 Research Problem

The aim is to design and develop an air pollution monitoring system using off the shelf hardware and open source software and analyze the quality of data obtained through calibration with the following objectives in mind.

1. To develop a calibration tool which could give how accurate the sensor data is when compared with reference data.
  2. To educate the common people on adverse effect of air pollution by showing how polluted the vicinity is.
  3. To influence the behaviour of people by representing the concentration of pollutant as well as air quality health index which provides a measure of adverse affects on health by pollutants.
-

4. To give an idea of how to integrate all the hardware components to a processor and also make an independent software, which can be accessed anywhere in the world.
5. To encourage and help citizen science to solve the issue of air pollution and give more understanding to the impact it causes to human health and environment.

## 1.6 Thesis Contribution

## 1.7 Research Question

Some important research questions to be addressed related to the issue of air quality are:

1. What kind pollutants affect the human health most? How to measure them?
  2. As the pollution is in the atmosphere, should it not be measured everywhere all the time? If so, what kind of infrastructure is needed to facilitate such a ubiquitous measurement?
  3. What all factors should be considered while selecting sensors for measurement of pollutants?
    - (a) Accuracy of the data collected from the sensors.
    - (b) The cost of the sensors.
    - (c) The size of the sensors.
    - (d) Integration with the processor.
  4. Which processor to be used for processing the data collected from sensors?
    - (a) The ability to process analog signals collected from the sensor.
    - (b) Opens source platform.
    - (c) Ability to use in real time application.
-

- 
- (d) Able to connect with the Wi-Fi module easily.
5. How should the hardware component i.e the sensors and the processor, should be packaged?
- (a) As compact as possible.
  - (b) The value of the sensors should not be affected.
6. What is the difference between different metrics which is used to show the effect of pollution?
- (a) Understanding why different indexes are used for pollution monitoring.
  - (b) To identify which all indexes should be displayed in the software.
  - (c) Out of all the indexes which one is the most relevant to public and why?
7. How can the seriousness of pollution be made aware?
- (a) What all graphs or charts to be used?
  - (b) How to make a impressive software tool for demonstration?
8. How can the representation of Air quality metrics be done?
- (a) Should there be any categorization within the society for data visualization?
  - (b) If so, what all data should be shown for each section?
  - (c) How to demonstrate a simple view of complex effectively?

## 1.8 Research Challenges

The major challenges expected on creating a complete system are:

---

1. The integration of different sensors with the processor.

As each sensor has its own property, there can be issues when connecting all of them together in a single platform. Most of the sensors used for measurement are heat sensor and needs to be powered atleast 12 hours before operating. There is a particular operating temperature range for each sensor connected. As each of the sensor needs different environment for working, all the factors should be incorporated for a complete working environment.

2. Integration of communication module which is WiFi with processor as it requires a different voltage level to drive.

The data transferring module used here is a WiFi module which needs a separate voltage level of 3.3 Volt when compared to the sensors which are driven with a voltage of 5 Volt each. A voltage more than 3, will result in burning the entire module and hence the WiFi module it needs a separate voltage line.

3. Calibration of each sensors based on the data sheet.

As I am selecting commodity sensors which says that it is already calibrated but usually it should be done for each environment. The data collected changes for each environment and this should be taken care of. This can be a tough task as for each of the sensors it changes based on the slope of internal resistance and the internal voltage values given in data sheet.

4. Packaging of hardware component.

To make the whole system portable it should be packed carefully. For certain sensor like dust sensor, it should be exposed to the environment so as to estimate the particulate matter. This packing should be done in such a way that the it does not hinder with the observed value.

5. Transferring the data to a platform or a database using the WiFi module.
-

6. Checking whether the collected data is accurate.

## **1.9 Structure of the Thesis**

## **Chapter 2**

### **Literature Survey**

One of the greatest innovation in the field of electronics was the development of Wireless Sensor Network (WSN) which paved the way for various research works. The miniaturization of the components has allowed the user to experiment in various field of science such as health care, military applications, traffic control, monitoring, data collection [32] [33].

## **Chapter 3**

# **Design and Implementation of Air pollution Monitoring System**

The progress in technology has made it easy for researchers to explore more in different areas. One such development was is in the area of sensor technology which completely changed the outlook of different application level problems. In this chapter, I share my hands-on experience in the development, design, integration, and operation of the air pollution system using commodity sensor. Earlier, the approach for understanding air pollution used complex and stationary equipment which collects data and used these data for analyzing, but things have changed after the low cost, easy to use, portable sensors came in markets [34].

### **3.1 Design Goals**

There are many factors which need to be considered for the development of a simple yet reliable system. In this section, we have mentioned the factors which should be considered for an effective air pollution monitoring system.

1. Sensor Identification

The very first task is to figure out which all sensors need to be included for the completion of the system. There are sensors available in the market for the measurement of almost all types of gases in the atmosphere. It should be very clear that which all gases need to be measured and this definitely changes from region to region as in certain places the concentration of a particular gas is more. Having said that, there will be a certain set of gases which must be included for measurement regardless of the region.

## 2. Communication Module

As the system is completely based on wireless sensors the selection of data transmission is another crucial factor. The communication between the server and the sensors should be taken into consideration. The collected data from the sensors should be transferred over a database or to the sever. For that the type of communication module can be either Wi-Fi or bluetooth module.

## 3. Reliability

The success of the system depends upon how much accurate the data is. The value which we obtain from the sensor should make sense to the audience. There will be a lot of noise coming with the collection of data, the sensor should have the ability to remove the noise data or it should allow the programmer to make changes or apply certain algorithm so that the data sets will be refined.

## 4. Easy Integration

The integration of sensors with the processor is one important factor that needs to be kept in mind. Some sensors can be easily integrated with any processor but others needs driver codes to be written in order to work with the processor.

## 5. Printed Circuit Board

The final system should be build on a printed circuit board as it is more dependable. Circuit build on basic breadboard might even come out as it is not permanently fixed

---



and this will cause frequent breakdown. Its always easy to work on breadboard but that will be useful only for the initial set up. The system should be transformed to PCB.

#### 6. Maintenance

In case of any sensor damage it should be easily replaceable which means the complete system should be a plug and play type model. On building up such a model like that will help in debugging the problems caused by sensors if any. It should also be considered that the sensors selected for the system should be easily available in market so that it can be replaced if needed.

7. Easy Replication The idea behind creating such a system is that it can be replicated by anyone without even knowing the dept knowledge. The system should be designed in such a way that it should use the most available sensors and processors in the market. The programming part of the sensors to processor will be easy if the selection of processor is simple. This could definitely bring down a lot of work done at the hardware level.

#### 8. Low Cost

Within the available sensors in the market one could find sensors ranging from a very low price to costliest of all. There was a budget set for the the complete system and finding the right sensors with the affordable cost is one crucial factor.

## 3.2 Targeted Pollutants

Our surrounding is filled with various gases, these gases will become harmful if the concentration of it increases to an undesired level. On the development of a air pollution system measurement of all the gases in the atmosphere is not necessary as the collected data from all the sensor will make no sense to the public. Our main idea here is to make the general people

---

aware about the dominant gases and the extend of health hazard caused by these gases. This can be identified through different indexes know as Air Quality Health Index(AQHI) which is a scale from one to ten developed by health and environmental professionals [35] and Air Quality index (AQI)which gives the level of air quality status in an area [36].

The development of such indexes by the scientists will give the general public more idea of the pollution. The main gases to be included for the measurement for the indexes are  $PM_{2.5}$ ,  $O_3$ ,  $NO_2$ , and  $CO$  along with temperature and humidity sensor for awareness. These gases are mainly caused due to industrialization, urbanization and motorization [37]. Industrial and vehicles release greenhouse emissions which are largely responsible for air pollution [38]. The sensors thus can be limited to five which will also make the system compact.

### 3.3 System Architecture

In this section we describe the architecture for air pollution monitoring system which include a hardware side and a software side. The system is designed in such a way that it collects the data through the sensors, performs certain mathematical equation on the collected data and calculate the indexes then transfer these data to an IoT platform where it is visualized. The hardware section includes multiple sensors, processor and also on the wireless communication module for transmitting and receiving signals. Second, we will discuss the IoT side which includes the visualization part. The complete idea of the system is as shown in the figure and each part along with the sensor specification, implementation, design will be discussed further in the section.

---

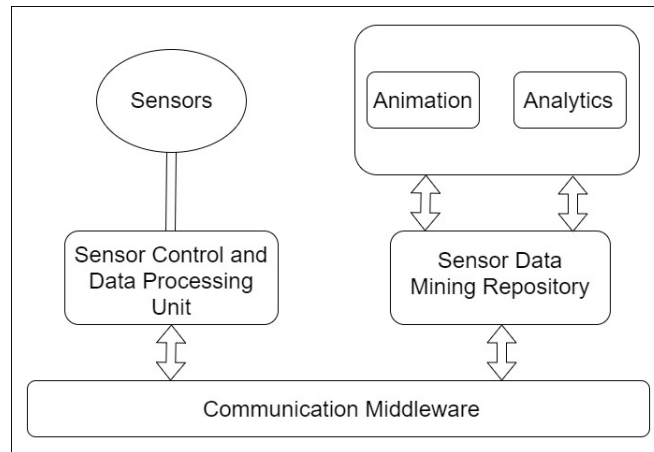


Figure 3.1: System Architecture

### 3.3.1 Hardware Architecture

#### Sensor Control and Data Processing Unit

This unit is the core for the pollution monitoring as it is where all the other modules are connected including the communication middleware. This module does the following function:

1. Control the sensors in collecting data.
2. It filters and processes the collected data and forward to the software.
3. Provide the necessary voltage for all the hardware connected to it.

For simplicity and ease of programming we have selected one of the most popular processor in market, Arduino Ethernet board which has ATmega328 microcontroller as shown in Fig.3.2.

Arduino is an open source physical computing platform that is divided into two parts, one is the hardware which is the board itself in which the external components are added to and other is the software which is the development environment for the processing language. It is very easy and simple to use the board with any external devices such as sensors or actuators and is widely used by researchers. There are different features which makes arduino popular and can be listed as [39]:

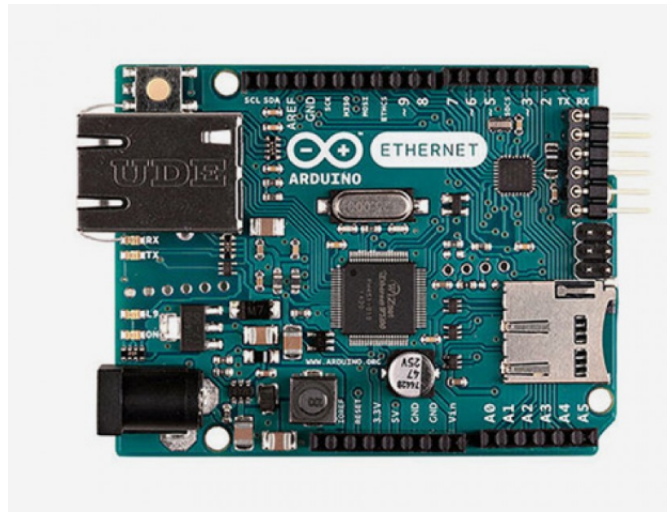


Figure 3.2: Arduino Ethernet Board

1. Arduino is multi-platform and can be used with windows, mac and linux.
2. The programming is done via USB cable and not serial port and is useful as modern computers don't have serial port.
3. As it is open source hardware and software all the necessity for an external hardware to be worked on like circuit diagram, the code can be easily downloaded.
4. There is an Integrated Development Environment (IDE) which can be used as an interface for talking with the hardware and is very simple.
5. There is an active arduino forum in which many researchers or developers who are working on projects contribute their ideas and will help in trouble shooting.
6. The cost of the hardware is very cheap and will come under 60 CAD and is easily affordable.

The board can be powered either by using a FTDI cable/USB serial connector, external power supply or using an optical Power Over ethernet module (PoE). The ATmega328 has 2 KB of SRAM and 1 KB of EEPROM. The detailed specification [40] of the board is given below in the table 3.1.

Description	specification
Microcontroller	ATmega328P
Operating Voltage	5V
Input Voltage Plug (recommended)	7-12V
Input Voltage Plug (limits)	6-20V
Input Voltage PoE (limits)	36-57V
Digital I/O Pins	14 (of which 4 provide PWM output)
Analog Input Pins	6
Flash Memory	32 KB (ATmega328P) of which 0.5 KB used by bootloader
SRAM	2 KB (ATmega328P)
EEPROM	1 KB (ATmega328P)
Clock Speed	16 MHz

Table 3.1: Technical specification

Having all these specification gives the freedom for researchers to explore with different electronic devices easily. The board is programmed with the help of arduino programming language which is very close to embedded C language and it is done on Arduino development environment.

### 3.3.2 Sensor

Sensor networks are new instruments useful to detect the conditions in remote places in the physical world in environmental monitoring applications such as pollution monitoring, transportation management, intrusion detection and many more [41]. With the constant development in electronics industry, it is possible to collect data remotely and collected data can be transferred to the required platform at a short period of time. There are different sensors available in market which can measure the pollutants and display the value, but the idea here is to select the one which is of low cost and also gives the most accurate values.

Having said that there is a variety of options available for sensors based on the way it measures the pollutants. One such category is Metal Oxide Semiconductor (MOS) gas sensor also known as semiconductor gas sensor, which is used to detect the concentration of any hazardous gases in the atmosphere by changing its resistance. The most popular series available in market for this category is MQ-XX sensors which is popular for its wide

detecting scope, long life, stability, high sensitivity, fast response and also simple drive circuit [4]. The sensing material is made up either from Aluminum Oxide ( $Al_2O_3$ ) or Tungsten trioxide ( $WO_3$ ) based ceramic and has a coating of Tin Oxide  $SnO_2$  that acts as the sensing material for the desired gas. The sensing element is heated through Platinum wires which is connected to leads made up of Nickel-Chromium, well known conductive alloy. The gas to be detected has a specific temperature at which it gets ionized and the task of the sensor is to work at that temperature. Once the gas gets ionized it gets absorbed by the sensing material which changes the resistance and in turn changes the voltage across the sensor and can be read by the microcontroller [42]. The voltage value along with reference voltage and other resistor's resistance is used to find the resistance of sensor. Once the resistance of the sensor is known then by using the sensitivity curve the concentration could be found out.


Another popularly used MOS sensor which we explored was MICS which are MEMS based whose mode of operation is similar to the above said sensor as both of them are metal oxide. Here, oxidizing gas or the pollutant gas add to the insulative oxygen species causing the resistance to increase [43]. Other than MOS sensors, we also took a look at optical sensor which are spectroscopic devices which uses light scattering principle to find the concentration of pollutants. These sensors are known for its detecting capability of particulate matter of different sizes and is one of the recent development in the field of air quality monitoring. Highly responsive, reliable and long life are the main highlights of this sensor.

### Selected Sensor

After understanding the wide range of sensor options in the market the sensors were selected based on their performance, availability, ease of integration, and cost. The selected sensors were:

1. MQ-2 Sensor: This is a semiconductor gas sensor which has an electrochemical sensor which detects multiple gases such as Carbon monoxide, LPG, methane, and other combustible steam. The sensor is connected in series with a variable resistor to

form a voltage divider circuit and the variable resistor is used to change the sensitivity. The sensitivity curve for the sensor is shown for different types of gases.

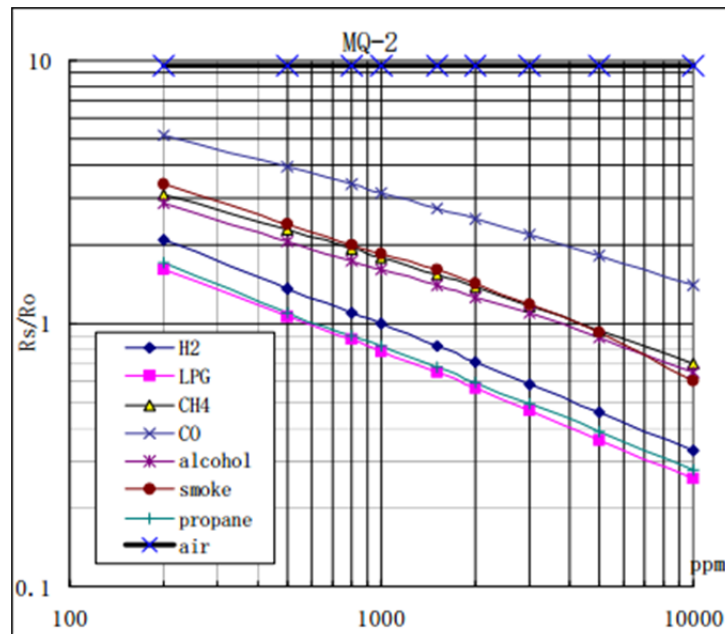

where  $R_o$  is the sensor resistance in air and  $R_s$  is the sensor resistance when exposed to gas.

From the curve in Fig.3.3, the voltage across the sensor is found out depending on which gas one wants to detect and there after using this voltage value the concentration of pollutant is calculated. The range of detection of gas is from 100ppm to 10,000 ppm and has a high sensitivity and fast response time. The sensor is small and portable and provides integration in famous MCU platforms like arduino, raspberry pi etc.

2. MQ 131: Another MQ-XX series sensor that we used for the system is for ozone. The working of the sensor is similar to MQ-2 sensor. It decreases the resistance when exposed to ozone and becomes more conductive when exposed to large concentration of the gas. This can be used to measure the concentration of ozone in air. The detecting concentration scope is from 10ppb to 2 ppm of ozone and also has a fast response time and long life.
3. MICS-2714: This is a robust MEMS sensor used for the detection of Nitrogen dioxide

( $NO_2$ ). The detection range is from 0.05 to 10 ppm and has a response time of 10 seconds. The sensor is comparatively small and of low cost.

4. PPD42NS Particulate sensor: The sensor detects the particulate matter through light scattering mechanism and consists of infrared LED positioned in forward angle to a photo diode. As soon as there is a variation in light density, the photo diode detects this and changes the current from the diode [44]. The circuit generates a measurable signal known as Low Pulse Occupancy (LPO) which is proportional to PM concentration [45]. This sensor can measure both PM2.5 and PM10 concentration.
5. DHT11: This a very low cost sensor available in market for temperature and humidity measurement and has a calibrated digital output. The measurement range for temperature is from 0 degree to 50 degree Celsius. The device can be integrated to almost all platforms of Microcontroller and is considered to be the best choice for many applications.

### 3.3.3 Communication Middleware

The collected data needs to be transferred to a platform so that user can understand and interpret the data from the sensor. We have used a WiFi module for this purpose, which will collect the data from the processor and transfers it to a IOT platform said to. The WiFi module used here is ESP8266, which is a highly integrated SOC that meets the requirement of user demand of efficient power usage, compact design and reliable performance [46]. The ESP module can be connected to a processor or it can also be programmed on its own as the module itself is a MCU unit. Unlike the other sensor modules connected to the processor which needs a 5V power supply for its working, this module needs a 3.3V for its power up. The ESP module comes along with installed firmware from AI-thinker and it can be communicated with AT commands. On typing the AT command in the serial monitor the output would come as 'OK' if there is a successful connection.

---



This firmware can be replaced with user's own code which gives the power of flexibility of connecting with any IOT platform. The arduino platform supports the programming of ESP module which makes the integration much easier. The code can be written in the Arduino IDE and can be flashed into the ESP board by connecting it separately. The circuit for the ESP flashing is as shown in figure 3.4 which is a voltage divider circuit.

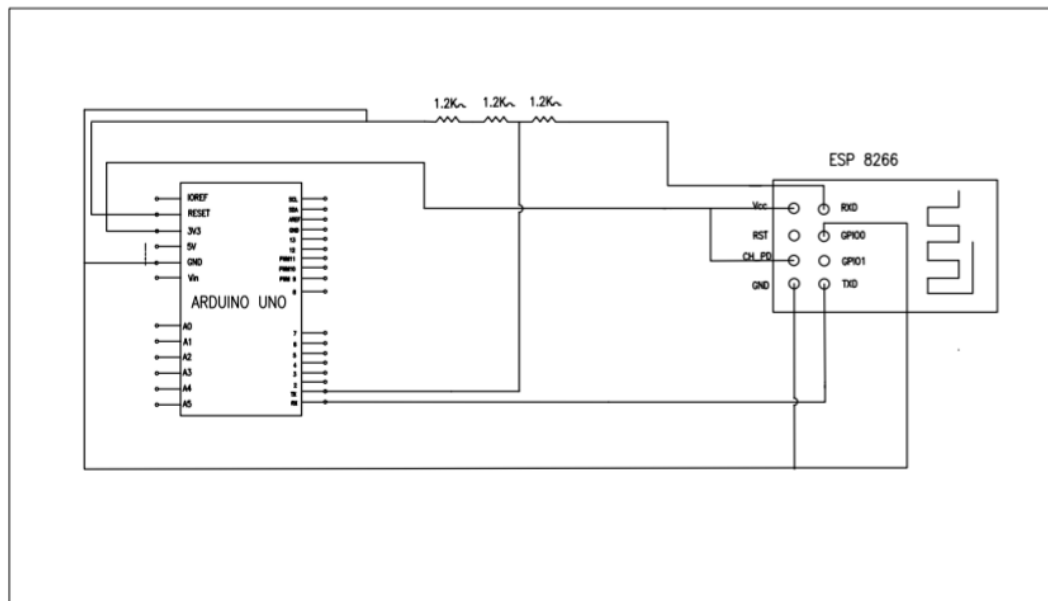


Figure 3.4: System Overview

When the TX and RX pin of arduino is connected to TX and RX pin of the WiFi module it becomes in the programming mode and flashing occurs.

### 3.4 System Overview

The complete circuit diagram of how the components are integrated to the Microcontroller is as shown in the figure 3.5. Each of these sensors were carefully arranged so that it reduces the spatial interferences. As majority of the sensors are heat sensors and discharges heat it affects the working of the sensor placed near to it. The initial arrangement of the sensors were done in the breadboard with wires. Building the circuit in breadboard gave the flexibility of working with different arrangements.

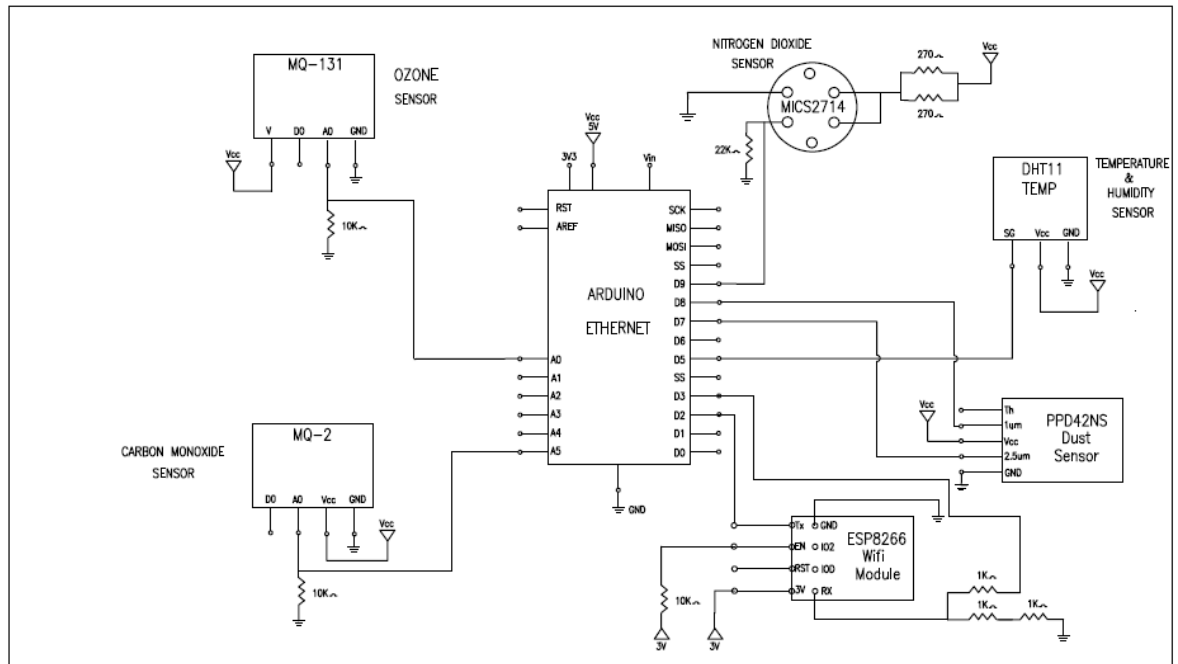


Figure 3.5: Schematic diagram of Air pollution monitoring system

After building the circuit in breadboard, it was migrated to a Printed Circuit Board (PCB) developed by Flemings Solution Ltd, India. The design of the board is as shown in the figure 3.6. The PCB was designed in such a way that each sensors and the microcontroller itself was plug-in model to board. This was done so that in case of any malfunctioning of any of the sensors or processor, it could be replaced easily. The main advantage of using a PCB design is that all the components are fixed and there is no wiring at all. This produces a zero error circuit and there wont be any short circuiting.




Figure 3.6: Printed Circuit Board

### 3.5 IoT Architecture

The hardware is the one responsible for the data collection but making these data available to user is done by the visualizing tool. The main objective which was kept when developing the system was the data collected should be accessed from anywhere and thats why IoT platforms were selected. We use an open source IoT platform called Thingspeak [47]. It is integrated with the system to aggregate, analyze, visualize, and store the sensor data that we collect [47]. Thinkspeak can allow many users to integrate their system with other systems for collective and cooperative analysis of sensor data and promote citizen science in solving important global problems. It also offer a ‘hub’ model for data repository and a set of APIs for accessing and using the sensor data for their analysis and interpretations. Thinkspeak provides an intuitive user interface that is easy to understand. It also provides a mobile application called Thingview which can be installed on our phone and the same data from the system can be visualized simultaneously. For our purpose, we use Thinkspeak to display the results. As soon as the value is transferred to Thingspeak, it can immediately draw graph showing online visualization. We have used eight channels of Thingspeak for the graph representation of all the pollutants measured by the sensors and the AQI and AQHI metrics.

---

## **Chapter 4**

# **Calibration Of Low Cost Sensor**

With the development of sensor technology for air pollution it has attracted a majority of researchers as well as common people to explore and understand more about the pollutants and its effects. This has given freedom for one to set up their own monitoring system at residences, office or even at schools. The problem with this is to identify how accurate the data collected from these commodity sensors to the reference monitoring system. The reference system are the pollution monitoring devices that are developed to a clearly defined standard for a specific criteria pollutant [s] and has completed a rigorous testing and analysis protocol [48]. If the system is giving values which is way too different from the reference value then it brings down the advantages of this technology. This issue can be dealt through calibration which will reduce the uncertainty in data and makes the output more accurate.

Calibration can be defined as the act of evaluating and adjusting the precision and accuracy of measurement equipment [49]. If the measured output from the sensor is not equals to the actual output then it shows that there is a need for calibration. Usually all the electronic instruments are calibrated according to a particular conditions in the laboratory and acquires a certification of calibration before its sold out in the markets. Even then the measured value does not reach accuracy as the condition or the environment where it was calibrated changes that leaves the user with some raw values that gives no information. This issue was taken up and explored by a few researchers in the US Environmental Protection Agency(EPA)

and suggested with three 'Straw-Man Approach' to improve the usability of such data and presented in the Air sensor Workshop [50].

The first approach was by a signal-based calibration technique which requires the data from the remote stations, which is the reference station, to be broadcasted to the local station where the sensor is located and will receive this data and performs a single point calibration of the response. This approach would have been easy if the sensor was already equipped with the data collection and would process automatic calibration.

The next option for calibrating is called the direct sensor calibration that involves placing the sensor in a chamber in which a known concentration of pollutant is set and response is observed. As the concentration of the pollutant is already known the output curve can be compared with it and calibrated accordingly. This is the most common method used for calibration as is often called as laboratory evaluation. Another way of approaching direct calibration is by inspecting the pre-defined response given by the manufacturer and checking how accurate the sensor is to the given concentration. In either case the calibration requires equipment and skills to give accurate concentration value.

The last option is by secondary data normalization in which the concentration values of the pollutant from the low cost sensor is normalized in accordance with the federal reference method (FRM) or federal equivalent method (FEM) analyzers. This approach is cost effective when compared to the other techniques and is less complex. This could be achieved by the use of a linear mathematical equation model that will convert the non-calibrated data into data of an acceptable form. The linear relationship equation  $y = mx + c$  where  $m$  is the slope and  $c$  is the intercept of the sensor raw data is compared with analyzer data and a relationship pattern is found out from this. The drawback of this is that the sensor data does not always give a linear response and thus not applicable for all the curves.

Even though these 'Straw-Man Approach' was defined well it was still hard to implement it practically. This eventually led to the development of the 'Air Sensor Toolbox' by the Environmental Protection Agency (EPA) [51] which introduced a tool called 'Macro Analysis Tool' (MAT) for performing comparisons of air sensor data with reference data

---

and interpreting the results [52].

## 4.1 Calibration Procedure

The Air Sensor Toolbox provide guidelines for researchers, citizen scientists and developers with working of low cost sensor and its calibration to give more insight about air quality [53].

The Air Sensor guidebook [52] provides a three step procedure for calibrating a sensor:

1. Comparing the data from the low cost sensor with a reference instrument.

This means the data collected from the sensor system should be compared with the data from an already calibrated system which is placed by the local authority. This type of comparison is called as 'collocation' and in order to collocate, first find out where the reference system is placed and get access to the data from these system. After getting access to these system place the sensor system at the same level as the standard reference. Once this is done the data collected from both the system can be downloaded in the desired format.

2. Creating a calibration curve with the help of Macro Analysis Tool (MAT).

The relationship between the response of an analytical instrument to the concentration or amount of an analyte introduced into a known instrument is referred to as the "calibration curve" [54]. The MAT tool by EPA is used for drawing the calibration curve and will give an error function as output. This error function is an equation which can be used for calibrating the sensor.

3. Repeating the calibration periodically.

This procedure of calibration should be done periodically as the performance of instruments changes often. There will be changes in the equation and graph each time and this should be noted so as to get accurate value.

---

## 4.2 Macro Analysis Tool -MAT

The development of MAT tool gives a huge reliefs for the researchers in calibrating sensor data. This is an Excel based user-friendly macro tool that compares sensor data with reference data [55] even if measurements weren't recorded at precisely the same time, or were collected at different time intervals, such as 1-minute versus 5-minute intervals [56]. The user needs to insert the data from the sensor into the sensor page of the tool and the values from the reference station is inserted into the reference page of the tool. After these values are inserted the details of pollutant, time interval, measurement units and data completeness (amount of usable data obtained) needs to be added in the set up page of the MAT. After all the required fields are filled the output page as shown in the figure 4.1 shows the two sets of data being compared as per the control panel setting made in the tool [55]. This output page basically gives the statistical comparison of two different data sets. From this page it could be seen that the date and time stamps are averaged to a single value for both the system. There is another column in the sheet which is the invalid data points that gives the total number of non validated data points during the observed time. This non validated data points occurs due to either the fault by instrument or it could be the fault in reading by MAT or it could be even due to unacceptable range specified by the user.

**DATE AND TIME STAMPS ARE MATCHED**

	A	B	C	D	E	F
	Date Time	Average Cadillac reference concentration NO2 µg/m <sup>3</sup>	# of invalid reference data points	Average Chevy sensor concentration NO2 µg/m <sup>3</sup>	# of invalid sensor data points	
1	07-12-2016 18:00					
2	07-12-2016 19:00					
3	07-12-2016 20:00	4.76	1	37.95	0	
4	07-12-2016 21:00	5.03	0	38.79	0	
5	07-12-2016 22:00	4.88	0	37.51	0	
6	07-12-2016 23:00	7.52	0	41.24	0	
7	08-12-2016 00:00	3.94	1	32.55	1	
8	08-12-2016 01:00	4.14	1		9	
9	08-12-2016 02:00	4.22	0	26.44	0	
10	08-12-2016 03:00	4.38	0	27.69	0	
11	08-12-2016 04:00	6.16	0	31.59	0	
12	08-12-2016 05:00	6.32	0	34.88	0	
13	08-12-2016 06:00	6.33	0	35.17	0	
14	08-12-2016 07:00	6.56	0	36.43	0	
15	08-12-2016 08:00	7.10	0	40.27	0	
16	08-12-2016 09:00	5.78	0	37.80	0	
17	08-12-2016 10:00	3.99	0	38.52	0	
18	08-12-2016 11:00	3.65	0	41.63	0	
19	08-12-2016 12:00	1.76	0	34.96	0	
20	08-12-2016 13:00	1.52	0	37.67	0	
21	08-12-2016 14:00	2.15	0	39.91	0	
22						

Figure 4.1: MAT Output

Another output page provided by the tool is correlation graph which plots a graph between the reference monitor and the sensor data as in the figure 4.2. The graph drawn will be a scatter plot and a line called as 'slope-intercept' will be drawn through the data points and is represented simply by the equation  $y = mx + c$ . This equation represents the average behavior of the sensor data (vertical axis, represented by y) compared with the reference data (horizontal axis, represented by x) [55]. The slope of the graph shows the similarity or difference in sensor measurements when compared with the reference instrument, on average.

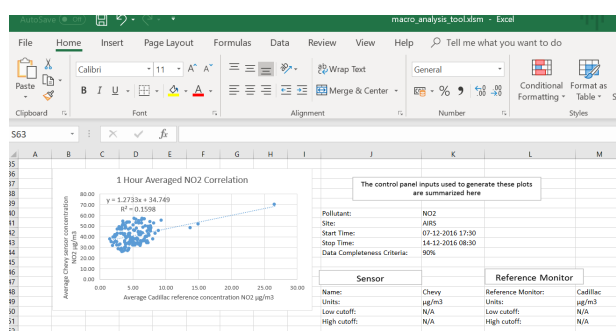


Figure 4.2: Correlation Graph

The tool also generates a coefficient of determination (also known as correlation coefficient in statistics) or R-Squared ( $R^2$ ) shows how close the value is to the slope-intercept line. The value ranges from 0 to 1 and the closer  $R^2$  is to 1, the stronger the agreement between the sensor and the reference data [57]. Along with these output the tool also generates a time series output graph which will show the concentration of pollutant for both the system as in the figure 4.3

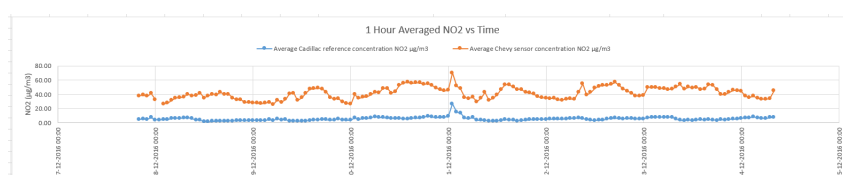


Figure 4.3: Time-Series Graph

From the Time-Series graph it could be seen how the closely value from two different system is related to. Having included all these functionality in the tool gives a strong solution for the calibration. The development of the tool was a year-long project of EPA with



other community group(Clean Air Carolina) and one tribal nation(Eastern Band of Cherokee Indians). The next section will expand in detail about the background concept about the working of tool which is linear regression.

### 4.3 Linear Regression

Calibration can be done through different statistical methods and the most popular approach is Linear Regression method. In statistics, the term regression is used to describe a group of methods that summarize the degree of association between one variable (or set of variables) and another variable (or set of variables) [58]. Linear Regression establishes relationship between two variables one is the independent variable which will be on the  $x$  axis and the dependent variable in the  $y$  axis by drawing a straight line. If there are many observations and is plotted as a scatter plot then a line called as regression line as in the figure 4.4 could be drawn through it by Least Square method.

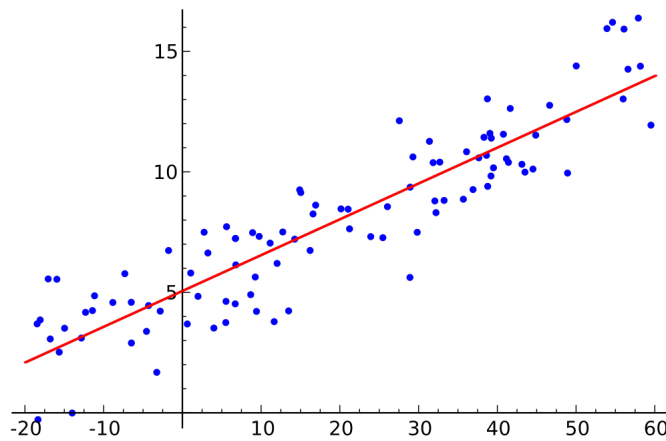


Figure 4.4: Linear Regression Model [5]

The method of Least Squares is a procedure to determine the best fit line to data [59] by minimizing the errors between the observed value and the actual value. This method considers that, for each value of  $x$ , there is a sub-population of  $y$  values normally distributed, that the means of all the sub-populations of  $y$  lie on the same straight line and all the sub-populations of  $y$  values have equal variances [60] [61]. The line drawn will have a slope  $m$

and is given by the formula

$$m = \frac{\sum_i [(x_i - \bar{x})(y_i - \bar{y})]}{\sum_i (x_i - \bar{x})^2} \quad [62] \quad [63] \quad [58]$$

where  $m$  is the slope,  $x_i$  and  $y_i$  are the reference and observed data values,  $\bar{x}$  and  $\bar{y}$  are the mean values of the data. The mean values will act as the centroid of the regression line and it has to pass through these points. The intercept equation  $c$  is

$$C = \bar{y} - m\bar{x} \quad [62] \quad [64]$$

On getting the slope and intercept value the equation of line can be found. Once the Regression line is drawn, to find out how much the data is scattered and to what extend, correlation coefficient ( $R^2$ ) is used. In other words  $R^2$  gives the measure of degree to which the values of  $x$  and  $y$  are linearly correlated [62]. The equation for finding the regression value is

$$R^2 = \frac{\sum_i [(x_i - \bar{x})(y_i - \bar{y})]}{\sqrt{[\sum_i (x_i - \bar{x})^2][\sum_i (y_i - \bar{y})^2]}} \quad [62]$$

The range of value for  $R^2$  is between 0 to 1 and closer the value is to 1, the stronger the correlation between the two data. All these equation can be easily calculated with the help of Excel and thus all these equations are integrated to the MAT tool.

# Bibliography

- [1] Daniel C Mussatti, Margaret Groeber, and Dan Maloney. Generic Equipment and Devices for continous emission minitoring system. *Environent Protection Agency*, pages 4–1 – 4–40, 2000.
- [2] Government of India and Forests & Climate Change Ministry of Environment. National Air Quality Index. page 58, 2014.
- [3] Frequently Asked Questions Air Quality Health Index. The air quality health index. *Air Quality health index FAQ*.
- [4] Technical Data. MQ-2 Semiconductor Sensor for Alcohol. *Structure*, pages 3–5, 2012.
- [5] The free Encyclopedia Wikipedia. Linear regression. [https://en.wikipedia.org/wiki/Linear\\_regression](https://en.wikipedia.org/wiki/Linear_regression), 2018. [Online; accessed 04-December-2018].
- [6] Wikipedia. Natural Environment. [https://en.wikipedia.org/wiki/Natural\\_environment](https://en.wikipedia.org/wiki/Natural_environment), 2017. [Online; accessed 26-January-2018].
- [7] Health Effects Institute. State of Global Air 2017. *Health Effects Institute*, page 15, 2017.
- [8] World Health Organization. How air pollution is destroying our health. <https://www.who.int/air-pollution/news-and-events/how-air-pollution-is-destroying-our-health>, 2019. [Online; accessed 04-January-2019].
- [9] WHO. Preventing disease through healthy environments exposure to air pollution: A major public health concern. 2010.
- [10] Daniel Vallero. Tool Steel - an overview (pdf) | ScienceDirect Topics. *Fundamentals of Air Pollution (Fifth Edition)*, pages 1–10, 2014.
- [11] OAR US EPA. NAAQS Table.
- [12] Definition of National Ambient Air Quality Standards (NAAQS). *ohioepa.custhelp.com*.
- [13] H Chen and R Copes. *Review of Air Quality Index and Air Quality Health Index*. 2013.
- [14] Nikhil Soni and Neetishree Soni. Benefits of pedestrianization and warrants to pedestrianize an area. *Land Use Policy*, 57:139–150, 2016.

- 
- [15] Rundong Tian, Christine Dierk, Christopher Myers, and Eric Paulos. MyPart: Personal, Portable, Accurate Airborne Particle Counting. *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems*, pages 1338–1348, 2016.
- [16] M Artha P Atricia Sierra-vargas and L U I S M Teran. INVITED REVIEW SERIES : AIR POLLUTION AND LUNG HEALTH Air pollution : Impact and prevention. (January), 2012.
- [17] Farideh Golbabaei, Hamid Hassani, Asghar Ghahri, and Mirghani Seyed Someah. Risk Assessment of Exposure to Gases Released by Welding Processes in Iranian Natural Gas Transmission Pipelines Industry. 4(2):6–9, 2012.
- [18] Morton Lippmann. Health Effects Of Ozone A Critical Review. *Journal of the Air Pollution Control Association*, 39(5):672–695, 1989.
- [19] Elias Castanas Marilena Kampa. Human health effects of air pollution. 151:362–367, 2007.
- [20] K Heidorn. A Chronology of Important Events in the History of Air Pollution Meteorology to 1970. *Bulletin of the American Meteorological Society*, 59(12):1589–1597, 1978.
- [21] Timothy Hatton. Quantifying the impact of smoke pollution on health in the 19th century. <https://voxeu.org/article/smoke-pollution-and-health-19th-century>, 2017. [Online; accessed 26-January-2019].
- [22] Viktor P Ál. The Environmental Consequences of Industrialization in Western European Core Countries and the Borsod Basin of Hungary , 1850 – 1945 : A Comparative Outline. 3:75–84, 2016.
- [23] Wikipedia. Great Smog of London. [https://en.wikipedia.org/wiki/Great\\_Smog\\_of\\_London](https://en.wikipedia.org/wiki/Great_Smog_of_London), 2019. [Online; accessed 26-January-2019].
- [24] Wikipedia. Air Pollution Control Act. [https://en.wikipedia.org/wiki/Air\\_Pollution\\_Control\\_Act](https://en.wikipedia.org/wiki/Air_Pollution_Control_Act), 2018. [Online; accessed 26-January-2019].
- [25] K Balakrishnan, M Brauer, G Chen, and J Chow. *To Humans Outdoor Air Pollution*, volume 109. 2015.
- [26] Eddie Salter. Active versus Passive Air Sampling . <https://www.envirotech-online.com/article/health-and-safety/10/skc/active-versus-passive-air-sampling-eddie-salter/923>, 2011. [Online; accessed 26-January-2019].
- [27] Ministry of Environment. 4 How to Monitor? – Monitoring Methods | Ministry for the Environment, 2009.
-

- [28] Li Sun, Ka Chun Wong, Peng Wei, Sheng Ye, Hao Huang, Fenhuan Yang, Dane Westerdahl, Peter K.K. Louie, Connie W.Y. Luk, and Zhi Ning. Development and application of a next generation air sensor network for the Hong Kong marathon 2015 air quality monitoring. *Sensors (Switzerland)*, 16(2), 2016.
  - [29] Abdullah Kadri, Elias Yaacoub, Mohammed Mushtaha, and Adnan Abu-Dayya. Wireless sensor network for real-time air pollution monitoring. *2013 1st International Conference on Communications, Signal Processing and Their Applications, ICCSPA 2013*, pages 1–5, 2013.
  - [30] David Hasenfratz and Enabling. *Enabling Large-Scale Urban Air Quality*. 2015.
  - [31] Gary Anthes. Open source software no longer optional. *Communications of the ACM*, 59(8):15–17, 2016.
  - [32] Kavi Kumar Khedo and Vishwakarma Chikhooreeah. Low-Cost Energy-Efficient Air Quality Monitoring System Using Wireless Sensor Network. *Wireless Sensor Networks - Insights and Innovations*, (October), 2017.
  - [33] Yang Huang Liu, Liang Hu, Disheng Yang, and Hengchang. Air-Sense: indoor environment monitoring evaluation system based on ZigBee network. *IOP Conference Series: Earth and Environmental Science*, 81(1):12208, 2017.
  - [34] Emily G. Snyder, Timothy H. Watkins, Paul A. Solomon, Eben D. Thoma, Ronald W. Williams, Gayle S. W. Hagler, David Shelow, David A. Hindin, Vasu J. Kilaru, and Peter W. Preuss. The Changing Paradigm of Air Pollution Monitoring. *Environmental Science & Technology*, 47(20):11369–11377, 2013.
  - [35] Frequently Asked Questions. The air quality health index. *Air Quality health index FAQ*.
  - [36] J S Asha and P Sindhu. Website : [www.ijirset.com](http://www.ijirset.com) Assessment of Air Quality in Two Cities of Kerala based on AQI by USEPA Method and. (2009):9284–9292, 2017.
  - [37] Debanshee Saha. IoT based Air Quality Monitoring System using Wireless Sensors deployed in Public Bus Services. 1952.
  - [38] Various Contributors. Essay on Air pollution: Introduction, Causes, Sources, Impact and Control Measures. 2013.
  - [39] Massimo Banzi and First Edition. *Getting started with Arduino*. :Books, an imprint of Maker Media, a division of O’Reilly Media, Inc., october 20 edition, 2008.
  - [40] Manuel Ruiz Guti. *Arduino + Ethernet Shield*. pages 1–42, 2017.
  - [41] Young Jin Jung, Yang Koo Lee, Dong Gyu Lee, Yongmi Lee, Silvia Nittel, Kate Beard, Kwang Woo Nam, and Keun Ho Ryu. Design of sensor data processing steps in an air pollution monitoring system. *Sensors*, 11(12):11235–11250, 2011.
-

- 
- [42] Vaibhav Jain. Insight - Learn the Working of a Gas Sensor. <https://www.engineersgarage.com/insight/how-gas-sensor-works>, 2013. [Online; accessed 10-November-2018].
- [43] SGX Sensortech. SGX Sensortech Data Sheet MiCS-2714 MOS Sensor for Nitrogen Dioxide. pages 1–5.
- [44] Tracy Allen. De-construction of the Shinyei PPD42NS dust sensor. (510):0–3, 2002.
- [45] Joel Kuula, Timo Mäkelä, Risto Hillamo, and Hilikka Timonen. Response characterization of an inexpensive aerosol sensor. *Sensors (Switzerland)*, 17(12), 2017.
- [46] Espressif Systems. ESP8266EX. pages 1–22, 2018.
- [47] Thingspeak. Things speak- IOT platform. <https://thingspeak.com/>, 2017. [Online; accessed 26-January-2018].
- [48] Eric S Hall, Surender M Kaushik, Robert W Vanderpool, Rachelle M Duvall, Melinda R Beaver, Russell W Long, and Paul A Solomon. Federal Reference Method (FRM), Federal Equivalent Method (FEM), National Ambient Air Quality Standards (NAAQS), Sensors; Federal Reference Method (FRM), Federal Equivalent Method (FEM), National Ambient Air Quality Standards (NAAQS), Sensors. *American Journal of Environmental Engineering*, 4(6):147–154, 2014.
- [49] Davis) Kejuruteraan, Fakulti Tekn, NIST Engineering Statistics Handbook Jenny Wu (University of California and 3. Instrument Calibration. pages 1–7, 2018.
- [50] Ron Williams, Tim Watkins, and Russell Long. Low Cost Sensor Calibration Options The Straw-Man Approach. 2013.
- [51] Ron Williams, Vasu J Kilaru, Emily G Snyder, Amanda Kaufman, Timothy Dye, Andrew Rutter, Ashley Russell, and Hilary Hafner. Air Sensor Guidebook. *Epa/600/R-14/159*, (1):1–5, 2014.
- [52] U.S. Environmental Protection Agency. Macro Analysis Tool -MAT. [https://cfpub.epa.gov/si/si\\_public\\_record\\_report.cfm?dirEntryId=340520&Lab=NERL](https://cfpub.epa.gov/si/si_public_record_report.cfm?dirEntryId=340520&Lab=NERL), 2018. [Online; accessed 04-December-2018].
- [53] U.S. Environmental Protection Agency. Air Sensor Toolbox for Citizen Scientists, Researchers and Developers. <https://www.epa.gov/air-sensor-toolbox>, 2018. [Online; accessed 04-December-2018].
- [54] Epa and Ord. Calibration Curves: Program Use/Needs Final. (October), 2010.
- [55] National Exposure Research Laboratory Office of Research and Development. How to Evaluate Low-Cost Sensors by Collocation with Federal Reference Method Monitors. pages 1–45, 2017.
-

- 
- [56] Instruction guide and macro analysis tool for community-led air monitoring. <https://www.epa.gov/air-research/instruction-guide-and-macro-analysis-tool-community-led-air-monitoring>, 2016. Accessed: 2018-12-06.
- [57] Ron Williams. Emerging Sensor Technologies. 2018.
- [58] Shaun Burke and High Wycombe. Regression and Calibration. pages 13–18.
- [59] S.Miller. The Method of Least Squares and Signal Analysis. pages 1–7, 1992.
- [60] A. M. Almeida, M. M. Castel-Branco, and A. C. Falcão. Linear regression for calibration lines revisited: Weighting schemes for bioanalytical methods. *Journal of Chromatography B: Analytical Technologies in the Biomedical and Life Sciences*, 774(2):215–222, 2002.
- [61] Wayne W Daniel and Chad Lee Cross. *Biostatistics: a foundation for analysis in the health sciences*. Wiley, 2018.
- [62] D Stone and J Ellis. Calibration and Linear Regression Analysis: A Self-Guided Tutorial (Part 2). pages 1–7, 2001.
- [63] Diana Arsova, Sofia Babanova, and Petko Mandjukov. Linear Calibration – Is It so Simple ? pages 35–42, 2009.
- [64] David Harvey. 5.4: Linear Regression and Calibration Curves - Chemistry LibreTexts. *LibreTexts*, pages 1–12, 2016.
-