

## Abstract

The small (1 mm) nematode *Caenorhabditis elegans* has become widely used as a model organism; in particular, the *C. elegans* connectome has been completely mapped, and *C. elegans* locomotion has been widely studied (c.f. <http://www.wormbook.org>). We describe a minimal network of FitzHugh-Nagumo neurons, coupled through diffusion, which generates key features of *C. elegans* undulation, and thus locomotion. This network may be considered as a simple biomimetic realization of the Izquierdo-Beer neuroanatomical model [1] for the *C. elegans* and also Xu et al.'s "descending pathway" description of the *C. elegans* central pattern generator (CPG) [2]. Olivares et al [3] present a likely more realistic model which relies on small networks of neurons, and presents a distributed model of the CPG. Finally, we realize our reaction-diffusion simulation with a network of coupled Keener [4] analog neurons.

## The FitzHugh-Nagumo model

The FitzHugh-Nagumo equations have the form:

$$\begin{aligned}\frac{dv}{dt} &= f(v) - w + I_{ext} + D \cdot (v_{\text{driving}} - v) \\ \frac{dw}{dt} &= \epsilon(v - \gamma w + \beta) \\ f(v) &= v - \frac{v^3}{3}\end{aligned}$$

where  $v$  is the membrane potential,  $w$  is a slow inhibitor variable, and  $\epsilon$ ,  $\gamma$  and  $\beta$  are constants. It turns out that  $f(v)$  can be any cubic-like function which sufficiently approximates  $v - v^3/3$ . A method for diffusive inter-neuron coupling has been introduced in green.  $D$  is the diffusion coefficient, and can be positive (excitatory synapses, gap junctions) or negative (inhibitory junctions). The quantity scaled by  $D$  is simply the voltage difference between the driving neuron and the driven one.

## The central pattern generator

A central pattern generator is a small neural circuit which generates and regulates the movement of complex organisms. This structure is present in different forms in many animals, and it regulates many types of periodic motion. *C. elegans* is a small nematode with a well-known neuronal layout. Its central pattern generator can be sufficiently approximated by a simple neuronal network, arranged as such: The central pattern generator has two principal components.

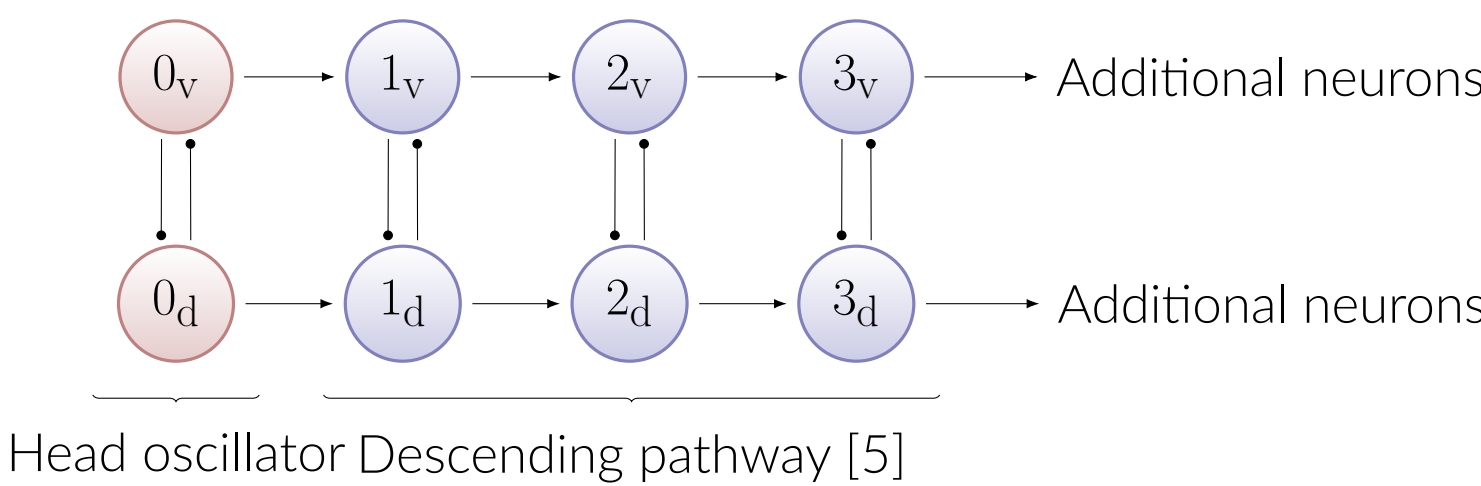


Figure 1. The central pattern generator, simplified.

wherein  $0 \rightarrow 1$  represents unidirectional diffusion coupling, and  $0 \rightleftarrows 1$  represents bidirectional diffusion coupling. The head oscillator drives the descending pathway to create sinusoidal oscillations.

## Simulation and experimental data

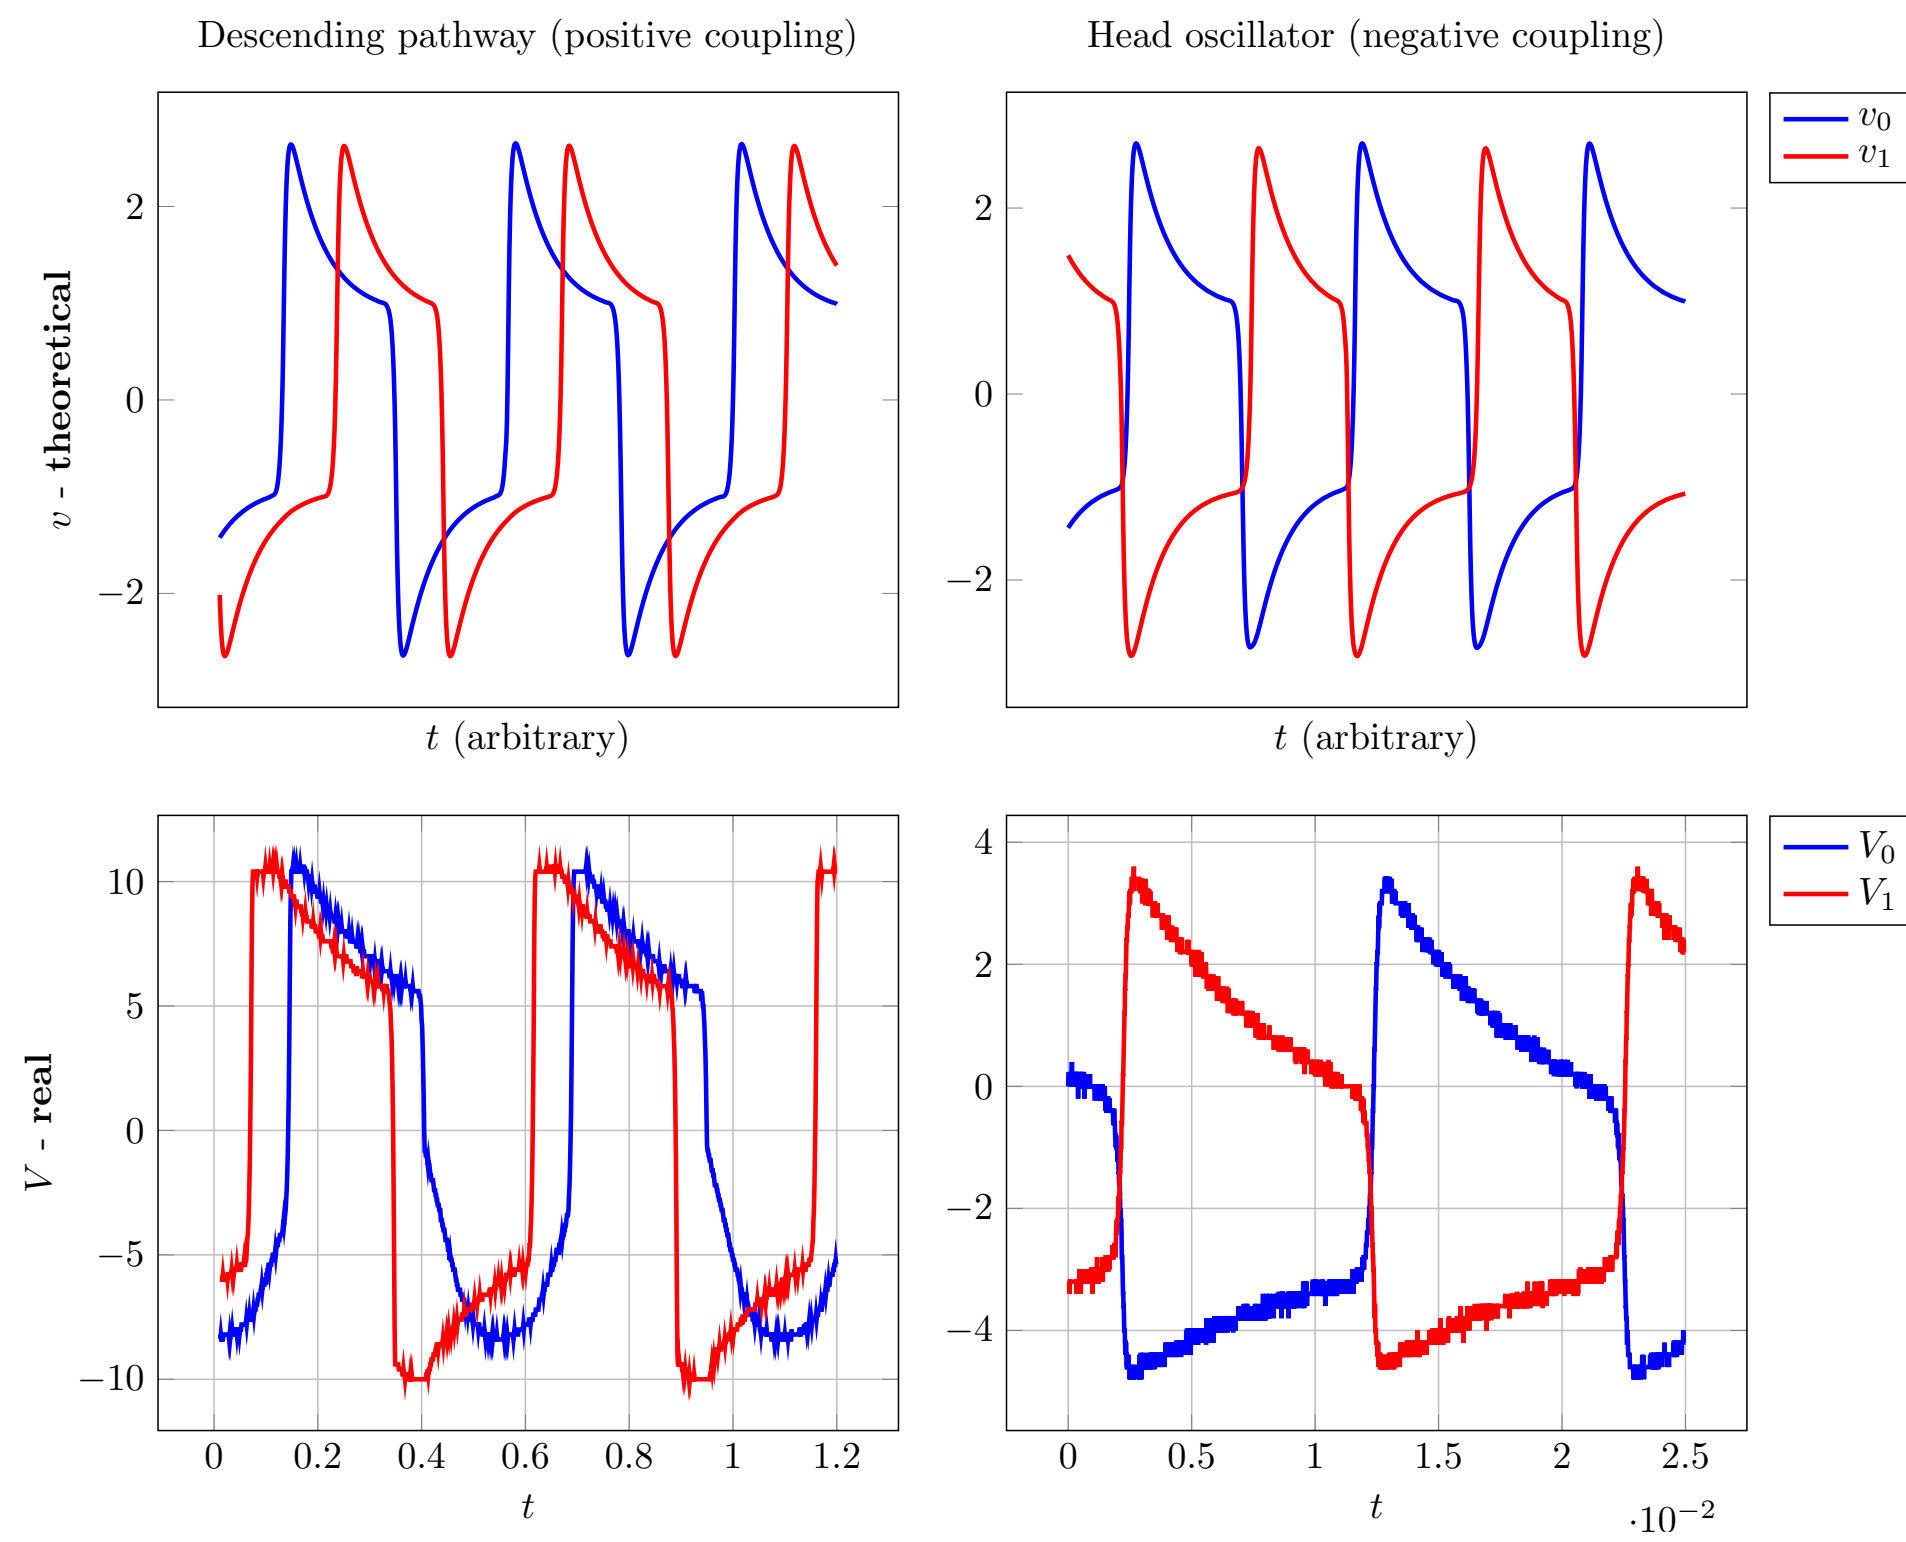


Figure 2. A comparison between simulation and analog implementation. Coupled systems of neurons can be used to describe all relevant dynamics of the CPG; in this instance, we use the head oscillator (mutually inhibitory coupling) and a single pair of ventral neurons with positive coupling, to simulate impulse propagation along the descending pathway.

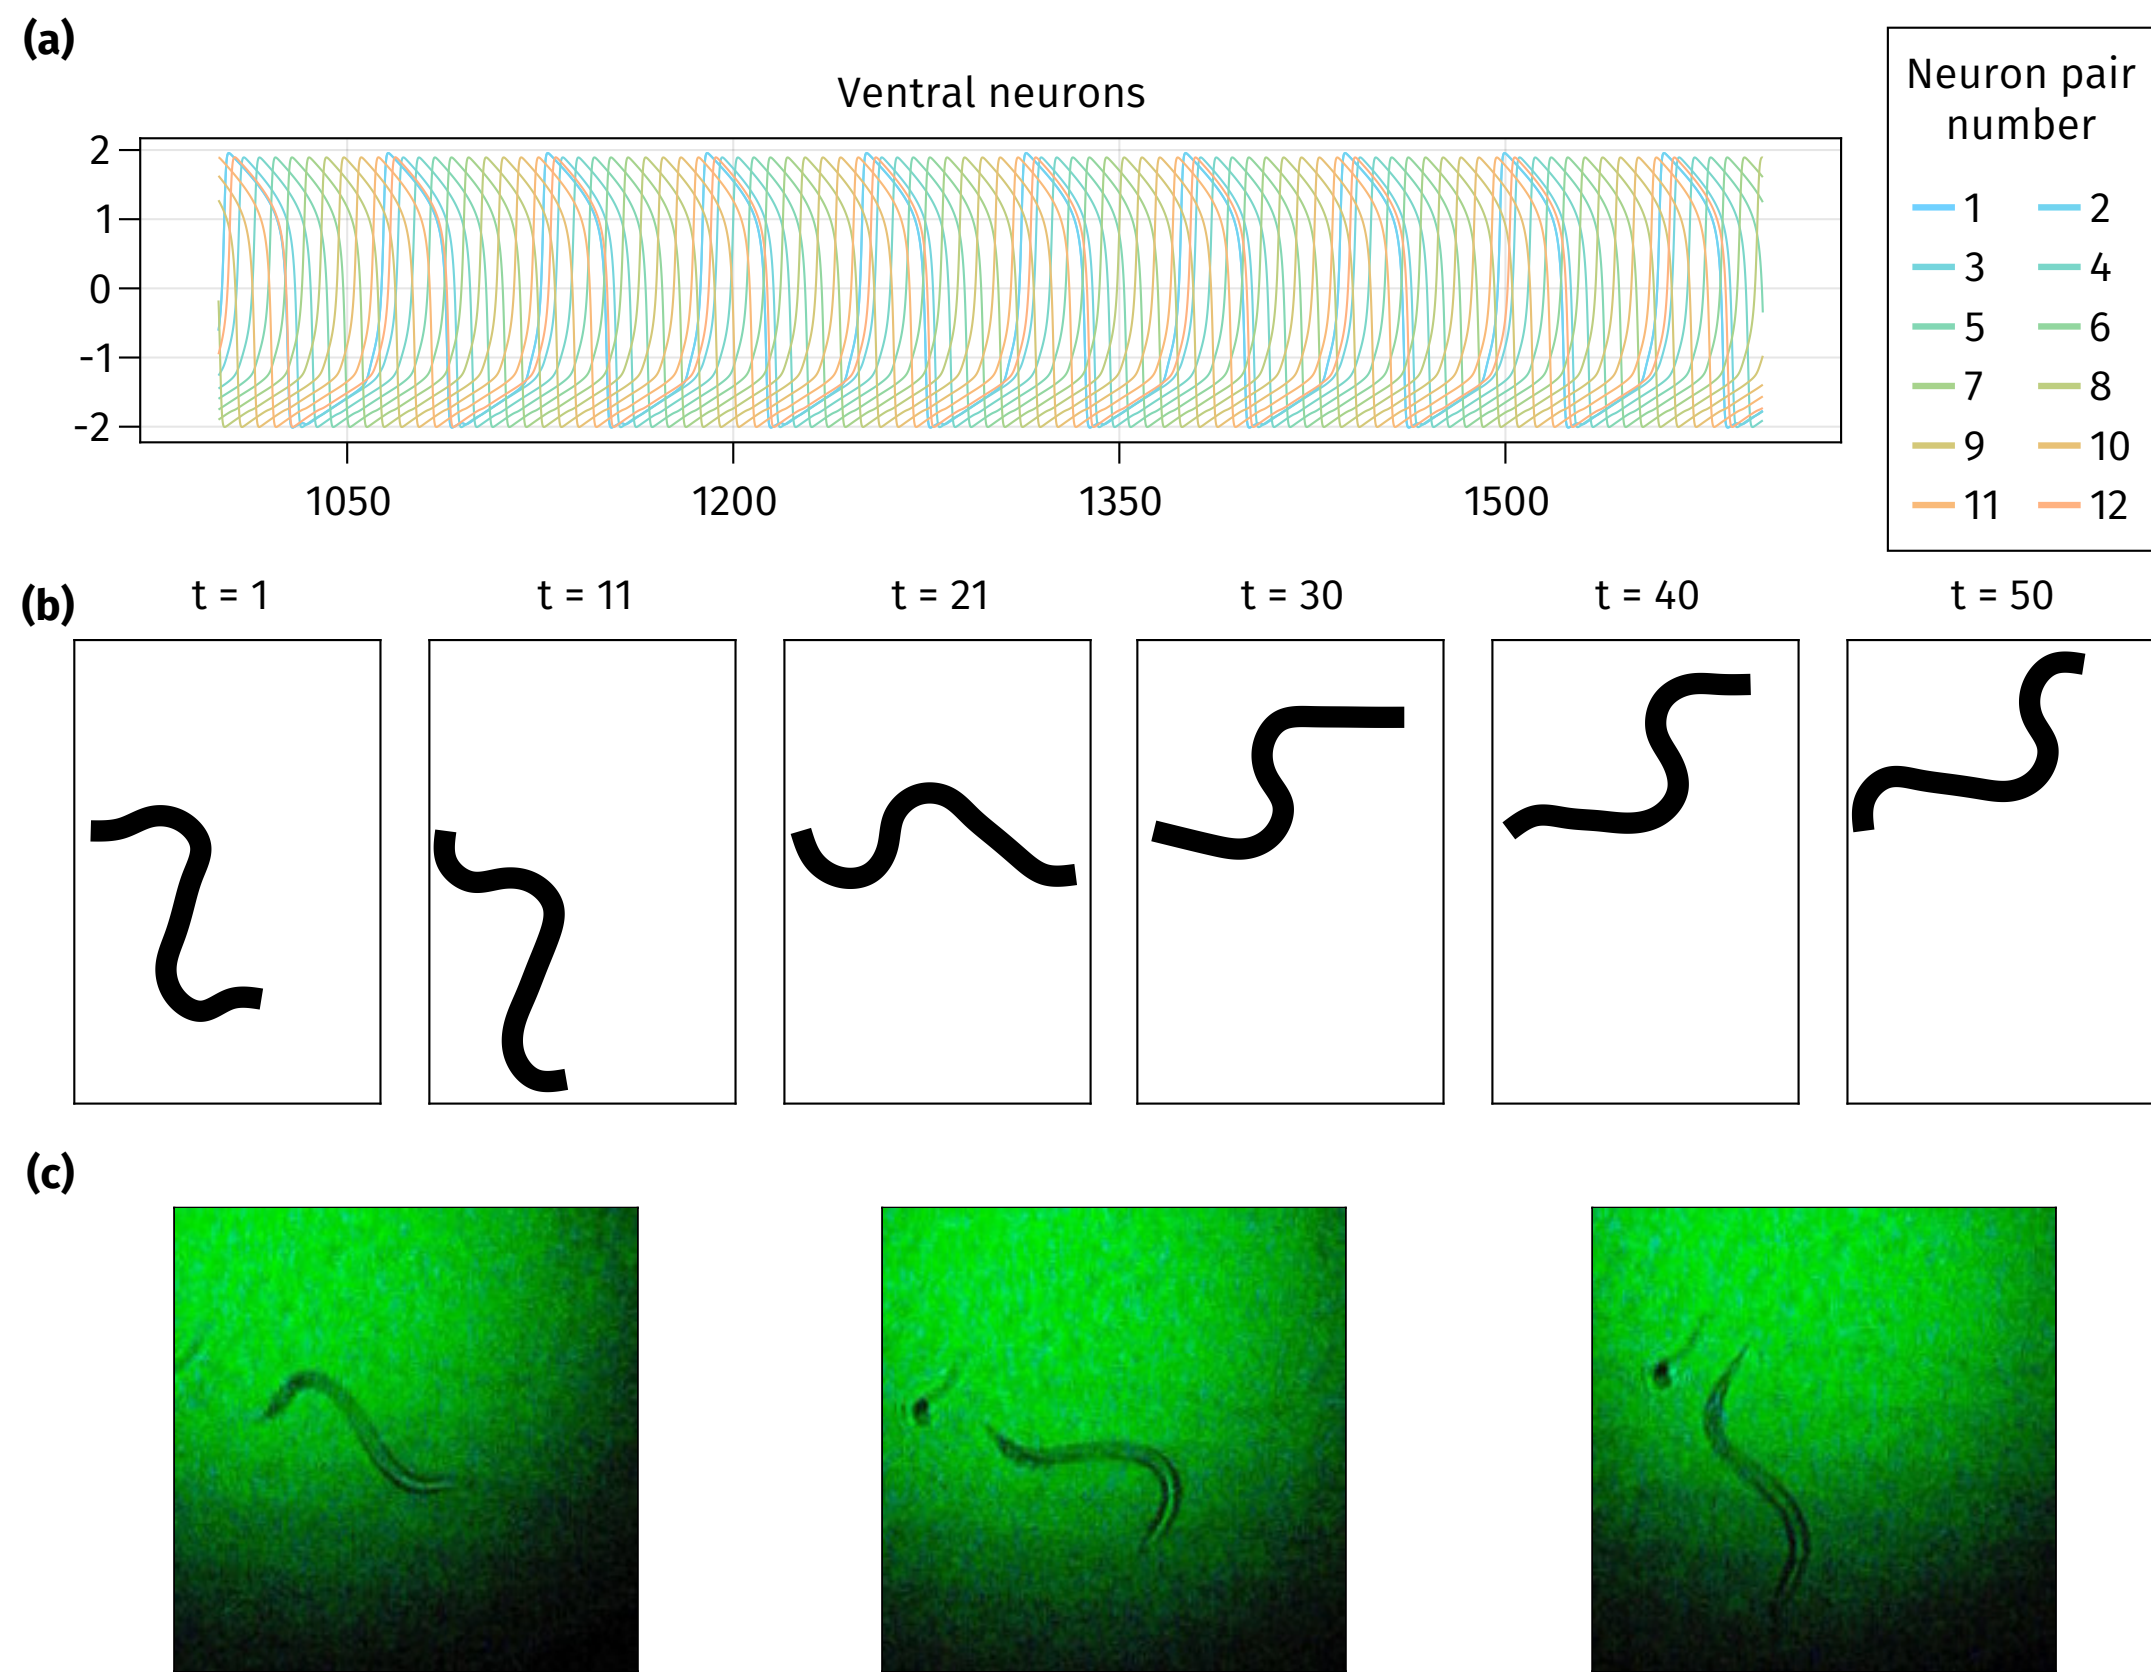


Figure 3. A "dashboard view" representing the neuron and worm. (a) shows the potentials of the ventral neurons, coloured by number running down the worm. (b) shows "images" of the simulated worm at different timepoints. The worm was simulated by running the neuron potentials through a Gaussian filter to simulate muscle dampening, then taking the amplitude as an angular displacement, representing contraction or relaxation. (c) shows images of a real *C. elegans* in a cuvette, taken via shadow imaging.

## The circuit

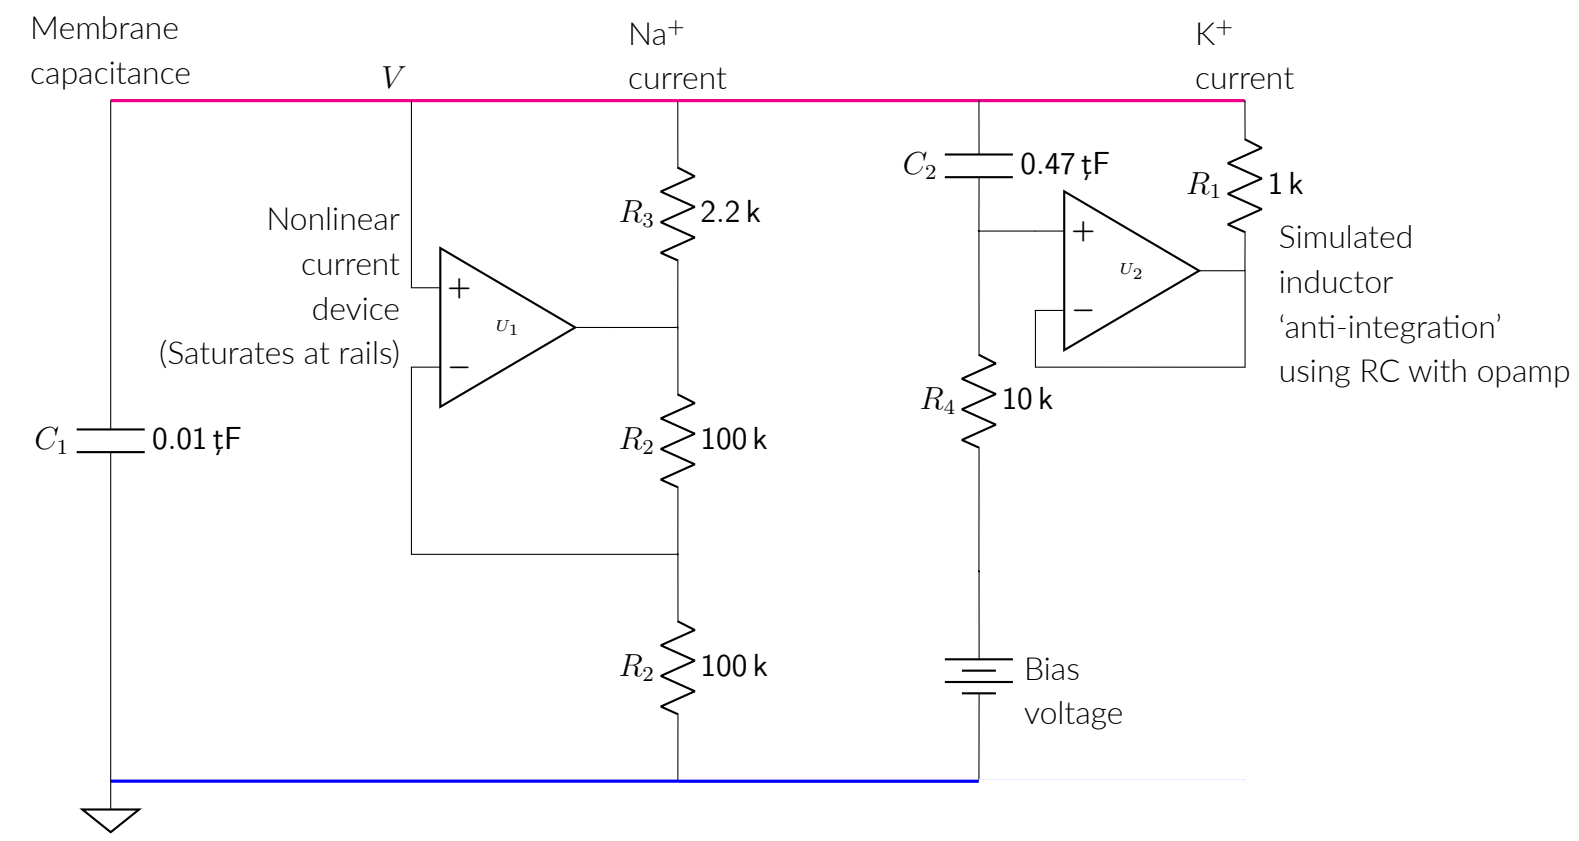


Figure 4. Our circuit (modified from [4]), simulating one Keener neuron.

The FitzHugh-Nagumo equations translate directly into a circuit that uses inductors, as  $L = \frac{dI}{dt}$ , however, that is an expensive and impractical solution due to mutual inductance effects. Keener's circuit proposes a simulation of the inductors with operational amplifiers, which make the circuit considerably cheaper and stabler (see [4] for more details). The frequency of oscillation changes with the values of the components, as well as the bias voltage, but is approximately **2 Hz** with the circuit values here.

We have implemented simple diffusive coupling techniques, using a resistor to vary the coupling strength. Excitatory (positive-coefficient) coupling is implemented by a simple resistor, whereas inhibitory (negative-coefficient) coupling is implemented by an inverting amplifier, constructed using an operational amplifier and two resistors. For extra safety, a follower can also be added to avoid loading the driving neuron's circuit.

## Conclusion

We have shown that the undulatory motion of *C. elegans* can be simulated using a structured CPG, with a head oscillator driving a descending pathway, and simple biomimetic neurons. This system is computationally cheap, and translates to a simple analog circuit. Our model of the nematode is surprisingly similar to real unconstrained motion. While most measurements of *C. elegans* are taken on horizontal agar sheets, observations made in clear, water-filled cuvettes where the worm floats freely seem to resemble our simulated worm more. Our model exhibits key features of the nematode's movement; namely the shape, sinusoidal oscillations, a travelling wave down the worm, and the correct spatial wavelength.

Given the flexibility of the model, by introducing defects and asymmetries into the topology, future work can study how mutations affect the nematode's motion, as well as the structures underlying differences in phenotypes. Additionally, the effects of external forcing on the head oscillator can be observed.

## References

- 1 E. J. Izquierdo and R. D. Beer, "From head to tail: a neuromechanical model of forward locomotion in *Caenorhabditis elegans*", Phil. Trans. R. Soc. B (2018).
- 2 T. Xu, J. Huo, S. Shao, M. Po, T. Kawano, Y. Lu, M. Wu, M. Zhen, and Q. Wen, "Descending pathway facilitates undulatory wave propagation in *Caenorhabditis elegans* through gap junctions", PNAS (2018).
- 3 E. Olivares, E. J. Izquierdo, and R. D. Beer, A neuromechanical model of multiple network oscillators for forward locomotion in *C. elegans*, preprint (July 22, 2019).
- 4 J. P. Keener, "Analog circuitry for the van der Pol and FitzHugh-Nagumo equations", IEEE Trans. Syst., Man, Cybern. (1983).
- 5 J. Gjorgjieva, D. Biron, and G. Haspel, "Neurobiology of *Caenorhabditis elegans* Locomotion: Where Do We Stand?", BioScience (2014).