


TFT SPI Screen Headers (from front panel)

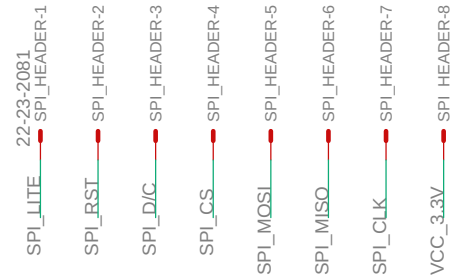

The diagram illustrates the pinout for the PocketBeagle board, organized into several functional blocks. Each block lists the pin number, the internal component or function, and the corresponding external connection or component value.

CLICK0

P1_24	VOUT	P1_24
P2_23	3.3V	P2_23
P1_28	I2C2.SCL	P1_28
P1_26	I2C2.SDA	P1_26
P1_30	UART0.TX	P1_30
P1_32	UART0.RX	P1_32
P2_29	SPI1.CLK	P2_29
P2_25	SPI1.MOSI	P2_25
P2_27	SPI1.MISO	P2_27
P2_31	SPI1.CS	P2_31
P2_35	AIN5(3.3V)GPIO86	P2_35
P1_34	GPIO26	P1_34
P2_33	GPIO45	P2_33
P1_36	PWM0A	P1_36
P1_22	GND	P1_22
P2_21	GND	P2_21

CLICK1

P2_13	VOUT	P2_13
P1_14	3.3V	P1_14
P2_09	I2C1.SCL	P2_09
P2_11	I2C1.SDA	P2_11
P2_07	UART4.TX	P2_07
P2_05	UART4.RX	P2_05
P1_08	SPI0.CLK	P1_08
P1_12	SPI0.MOSI	P1_12
P1_10	SPI0.MISO	P1_10
P1_06	SPI0.CS	P1_06
P1_02	AIN6(3.3V)GPIO87	P1_02
P2_03	GPIO23	P2_03
P1_04	GPIO89	P1_04
P2_01	PWM1A	P2_01
P1_16	GND	P1_16
P2_15	GND	P2_15

GPIO

P1_20	GPIO20	P1_20
P2_19	GPIO27	P2_19
P2_24	GPIO44	P2_24
P2_22	GPIO46	P2_22
P2_18	GPIO47	P2_18
P2_10	GPIO52	P2_10
P2_06	GPIO57	P2_06
P2_04	GPIO58	P2_04
P2_02	GPIO59	P2_02
P2_08	GPIO60	P2_08
P2_20	GPIO64	P2_20
P2_17	GPIO65	P2_17

USB1

P1_03	DRVVBUS	P1_03
P1_05	VBUS	P1_05
P1_07	USB1.VIN	P1_07
P1_09	USB1.D-	P1_09
P1_11	USB1.D+	P1_11
P1_13	USB1.ID	P1_13
P1_15	GND	P1_15

ANALOG

P1_18	AIN.VREF+	P1_18
P1_17	AIN.VREF-	P1_17
P1_19	AIN0(1.8V)	P1_19
P1_21	AIN1(1.8V)	P1_21
P1_23	AIN2(1.8V)	P1_23
P1_25	AIN3(1.8V)	P1_25
P1_27	AIN4(1.8V)	P1_27
P2_36	AIN7(1.8V)	P2_36

PRU

P1_33	PRU0.1	P1_33
P2_32	PRU0.2	P2_32
P2_30	PRU0.3	P2_30
P1_31	PRU0.4	P1_31
P2_34	PRU0.5	P2_34
P2_28	PRU0.6	P2_28
P1_29	PRU0.7	P1_29
P1_35	PRU1.10	P1_35

Other Components

- Capacitors:** C1 (0.1μF) connected to P2_13 and P1_14; C4 (10μF) connected to P2_09 and P2_11.
- Buttons:** BTN_RESET (P1_20), BTN_COLOUR (P2_19), LED_RED (P2_24), LED_GREEN (P2_22), LED_BLUE (P2_18).
- Other:** SPI_CLK (P1_08), SPI_MOSI (P1_12), SPI_MISO (P1_10), SPI_CS (P1_06), SPI_D/C (P2_03), SPI_LITE (P2_01).

22-23-2041

COLOUR_HEADER-1 LED_RED

COLOUR_HEADER-2 LED_GREEN

COLOUR_HEADER-3 LED_BLUE

COLOUR_HEADER-4 BTN_COLOUR

22-23-2021
POT_HEADER-1 POT_Y
POT_HEADER-2 POT_X

Ground connections are shared across all headers and components.