SEGMENTS

ID	CARRIER	FROM	TO	CABLE	L mm	END A	END B
W20d	COLUMN	the column joint P8 (R1-CASS)	column fuse block (behind the hub zone cover)	4 x 18 AWG (2 per pole), Class 2	380	Mini-Fit Jr 10-way plug (with W24d): pulled out through FX-COL to mate W20c, pushed back into P8 before the column goes in	fuse block input (ferrules: they pass the 7.9 mm bushing)
W24d	COLUMN	the column joint P8 (R1-CASS)	hub I/O (hub zone)	6 x 24 AWG screened	380	shares W20d's 10-way plug	hub I/O (HOLD H-ELE-05; ferrules, so it passes the 7.9 mm bushing)
W40	COLUMN	F3a 2 A + hub PWM 1, tach 1	supply fan box, high in DR	4 x 20 AWG screened, plenum (CMP)	1910	fuse block and hub terminals	4-way PWM fan connector into a Y-cable at the fan pair (housing HOLD H-ELE-07)
W41	COLUMN	F3b 2 A + hub PWM 2, tach 2	exhaust fan box, soffit right end	4 x 20 AWG screened, plenum (CMP)	1470	fuse block and hub terminals	4-way PWM fan connector into a Y-cable (housing HOLD H-ELE-07)
W42	COLUMN	hub sensor port	supply fan box inlet (DR)	4 x 20 AWG screened, plenum (CMP)	2110	hub sensor connector (HOLD, ISS-060)	sensor probe (HOLD H-ELE-06)
W43	COLUMN	F3c 1 A	sensor hub	2 x 18 AWG, Class 2	300	fuse block	hub power connector (HOLD, ISS-060)
W44	COLUMN	BOOST, TEST, CALL buttons and the LIGHT knob	hub inputs	6 x 24 AWG screened	300	button and knob tags	hub inputs (HOLD H-ELE-05)

FORMBOARD 1:5 (lengths to scale along the line; a plug pair, a strip feed ring or a stroke at each end)

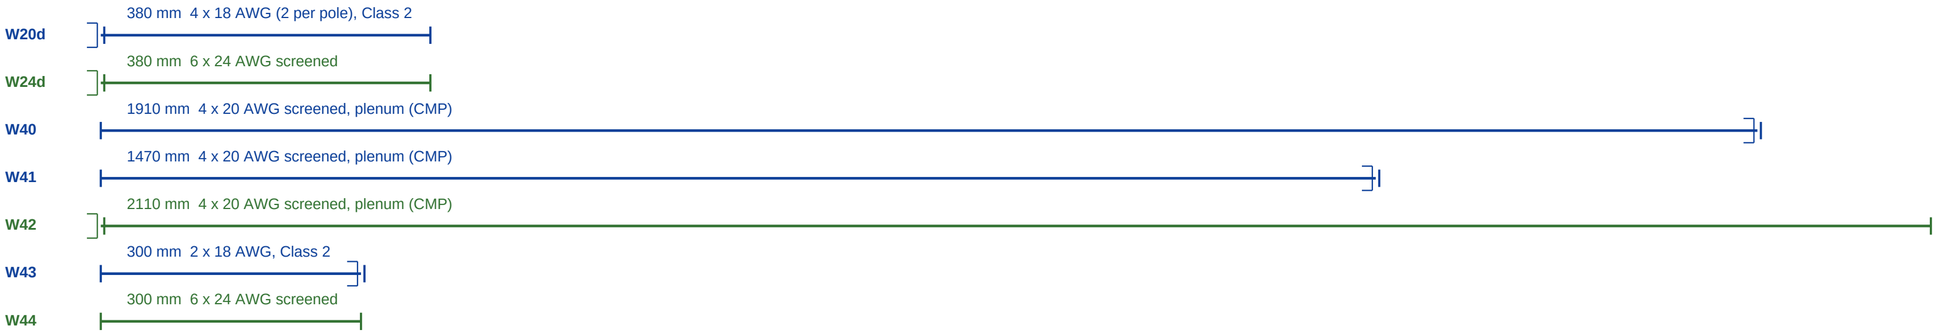

MATERIAL FOR THIS HARNESS (its share of the parts list lines, counted from the segments above)

PART NO.	NAME	QTY
718023	ELECTRICAL - CABLE - 2 X 18 AWG - CLASS 2 - SOUTHWIRE R40018-1	0.3 m
718024	ELECTRICAL - CABLE - 4 X 18 AWG - CLASS 2 - SOUTHWIRE R40049-1	0.38 m
718025	ELECTRICAL - CABLE - 6 X 24 AWG SCREENED - CLASS 2 - BELDEN 9536	0.68 m
718026	ELECTRICAL - CABLE - 4 X 20 AWG SCREENED - PLENUM - BELDEN 6402FE	5.49 m
718035	ELECTRICAL - CONNECTOR - MINI-FIT JR PLUG 10 WAY V-0 - MOLEX 39-01-3109 (5559-10P1)	1 pc

Bushings, cordgrips and edge-protected slots it passes: G-COL1, G-COL2 (Heyco SB 437-5 snap bushings, 718084); G-FBOX, G-SOFFIT (Heyco RLTCG M12 cordgrips, 718085).
Ties on AIR's tie points: 7 x 718086 (ELECTRICAL - CABLE TIE - 160 MM - NYLON 6/6 - HEYCO NYTYE 13142B).
Terminals: Mini-Fit Jr female 39-00-0039 (718036) and male 39-00-0041 (718037) on 18 AWG, one per way; 24 AWG cores: female 39-00-0047 (718077) and male 39-00-0049 (718078).

NOTES
Segments, ends and lengths from the harness list (710000_P01_ELECTRICAL-HARNESS-LIST_SPEC.csv), same revision.
UNITS: mm. GENERAL TOLERANCE: harness segment lengths +20/-0 mm; positions taken from the route model +/-5 mm;
sheet-metal parts ISO 2768-m (their DXF or drawing rules). Status of every number: parts list and harness list.
Every harness segment is tested in the factory before it ships (D-87): continuity, polarity, no shorts, latch pull,
label with its ID. Cables clip to the cassette tray only (D-26). Supply side = receptacle (female contacts).
Bought parts are named from their datasheets (those still on HOLD give their reason in the parts list 710000); no order, no supplier contact. From the electrical model and parts data.

PROJECT	FocusPod v2 - Spaceship
TITLE	**ELECTRICAL - HARNESS - AIR COLUMN: ASSEMBLY**
DWG / PART NO.	710023 (assembly)
REV / STATUS	P01 / DRAFT - not for production
UNITS / SCALE	mm / formboard 1:5; tables not to scale
SHEET	1 of 1 (A2)
DATE / BY	2026-11-01 / Autonomous
SOURCE	electrical_model.py, electrical_parts.py