




Specifications

| | |
|------------------------|------------------------|
| Rating: | 3A 125VAC, 1.5A 250VAC |
| Housing Material: | PA66 |
| Contact Material: | Silver Plated Brass |
| Contact Resistance: | 50mΩ Max |
| Insulation Resistance: | 100MΩ Min |
| Dielectric Strength: | 1000VAC 1 minute |
| Operating Temperature: | -20°C to +65°C |
| Electrical Life: | 10,000+ Cycles |

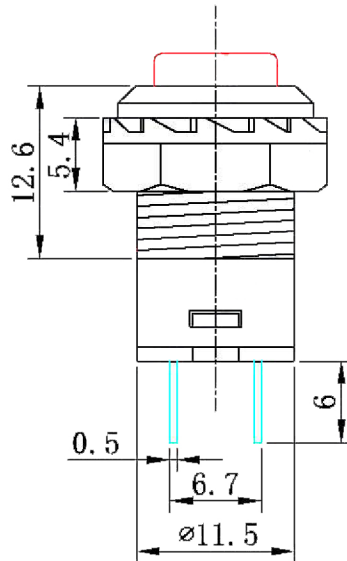

Panel Cut-out

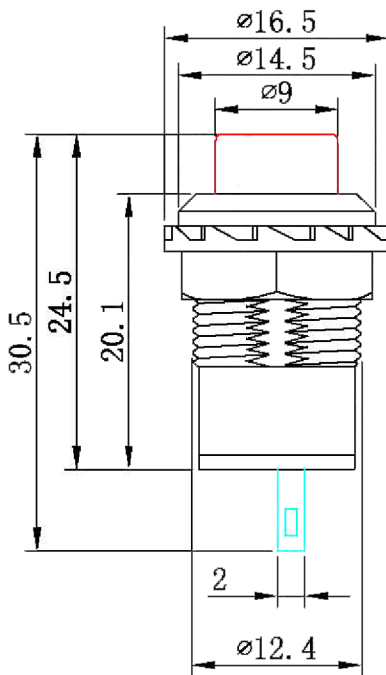

| Description | Ref Code |
|---|----------|
| Red Off(On) Momentary Round 12mm Switch SPST | 103111 |