





How to Update CineMoco Software (v1.1)

1. Install Arduino from <http://arduino.cc/en/main/software>
2. Download and unzip the CineMoco update files from <https://github.com/cinetics/CineMoco/archive/master.zip>
3. In the CineMocoUpdate folder, move the "hardware" folder into your Arduino folder.
For Windows: \Users\Username\My Documents\Arduino
For Mac: /Users/Username/Documents/Arduino
(Note: You may have to open the Arduino program once for the folder to be created)

Windows:

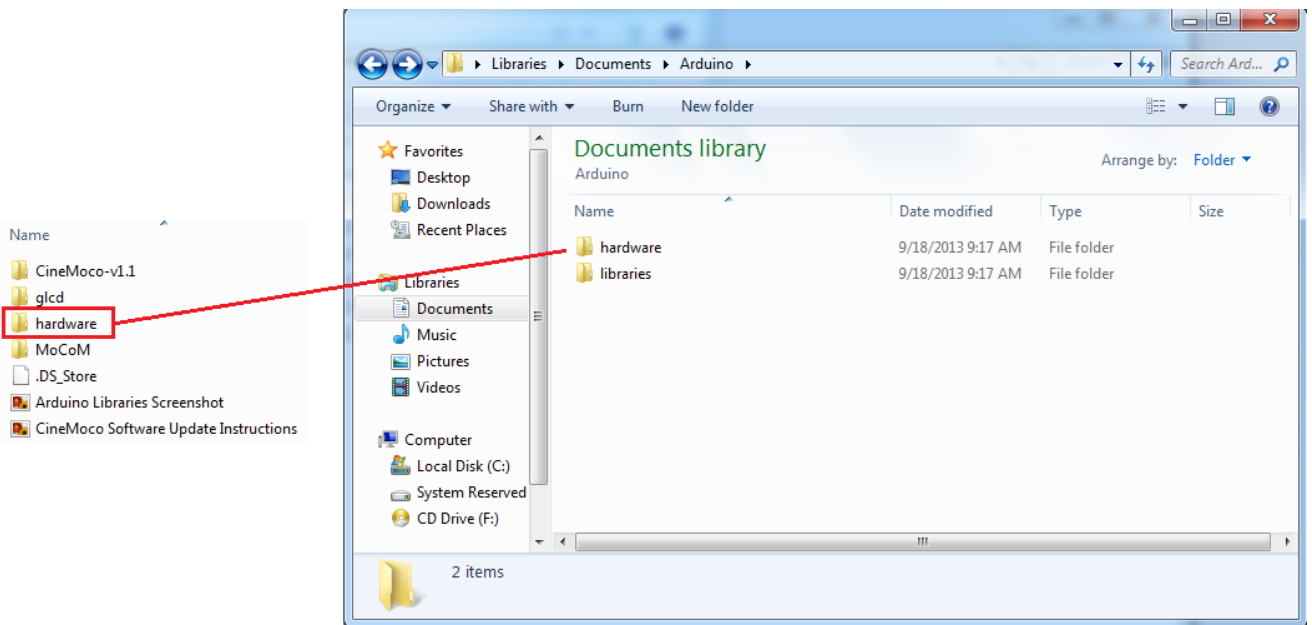


Mac:

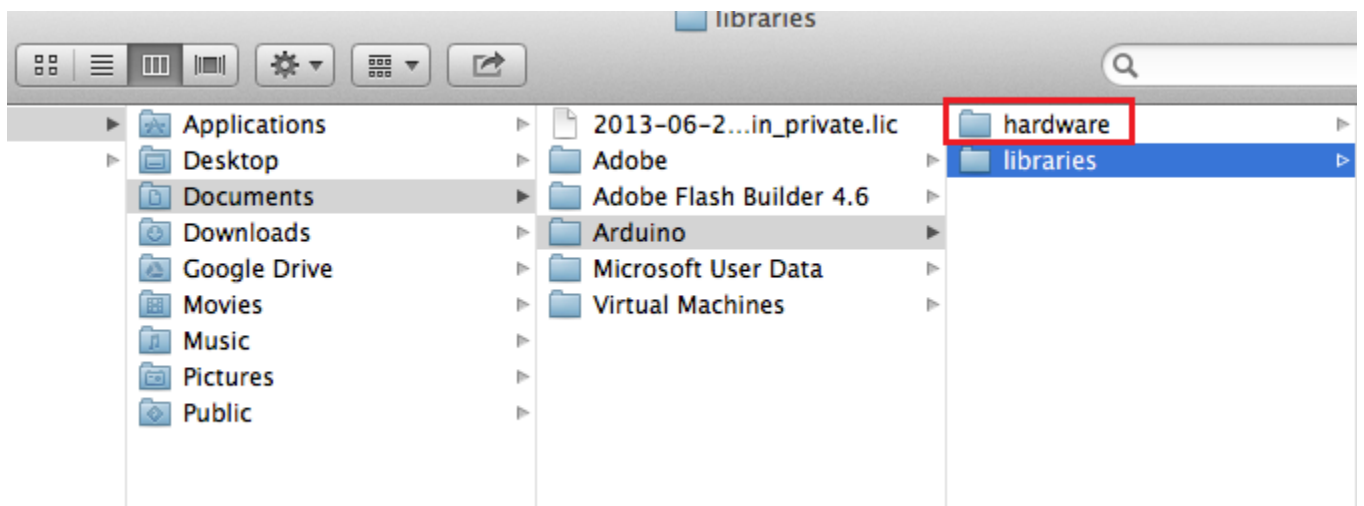


4. In the CineMocoUpdate folder, move the “glcd” and “MoCoM” folders into the Arduino libraries folder.

Windows:

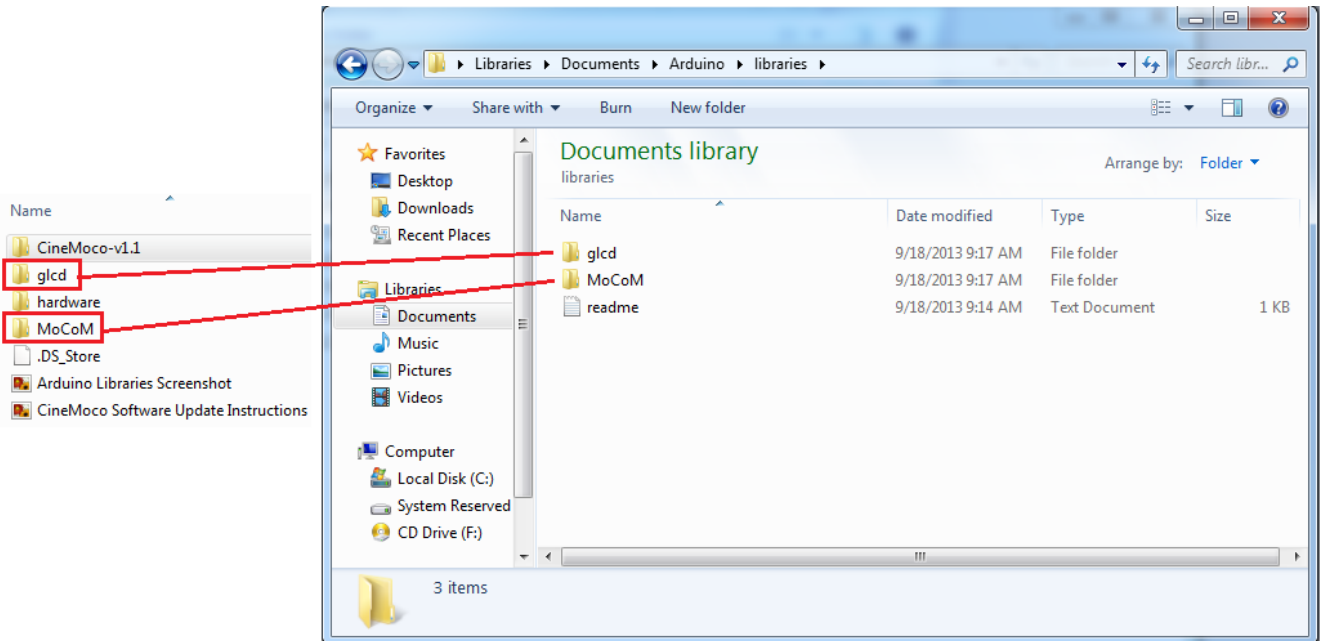


Mac:

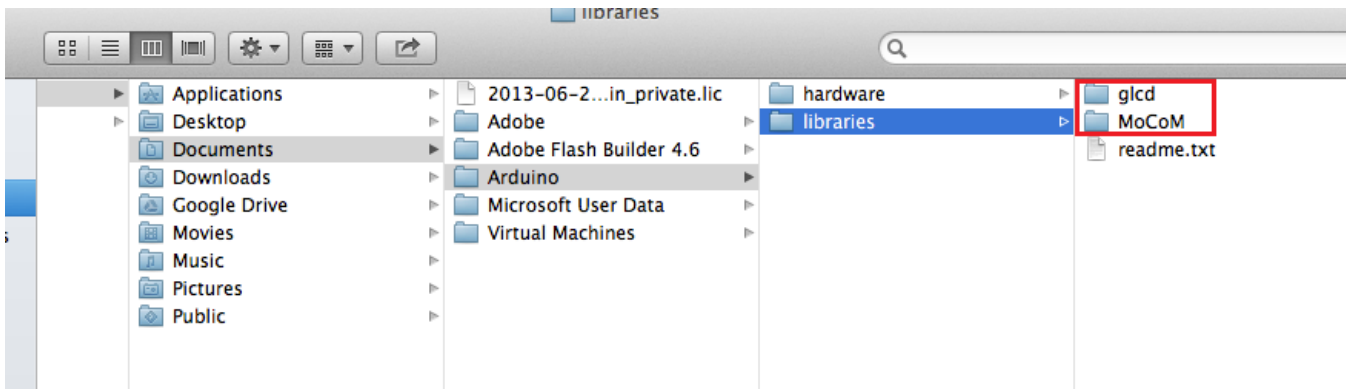


5. Connect the CineMoCo controller to your computer with a micro USB cable.


6. Open Arduino and open the miniE_cineMoco.ino file located in the CineMoco-v1.1 folder.

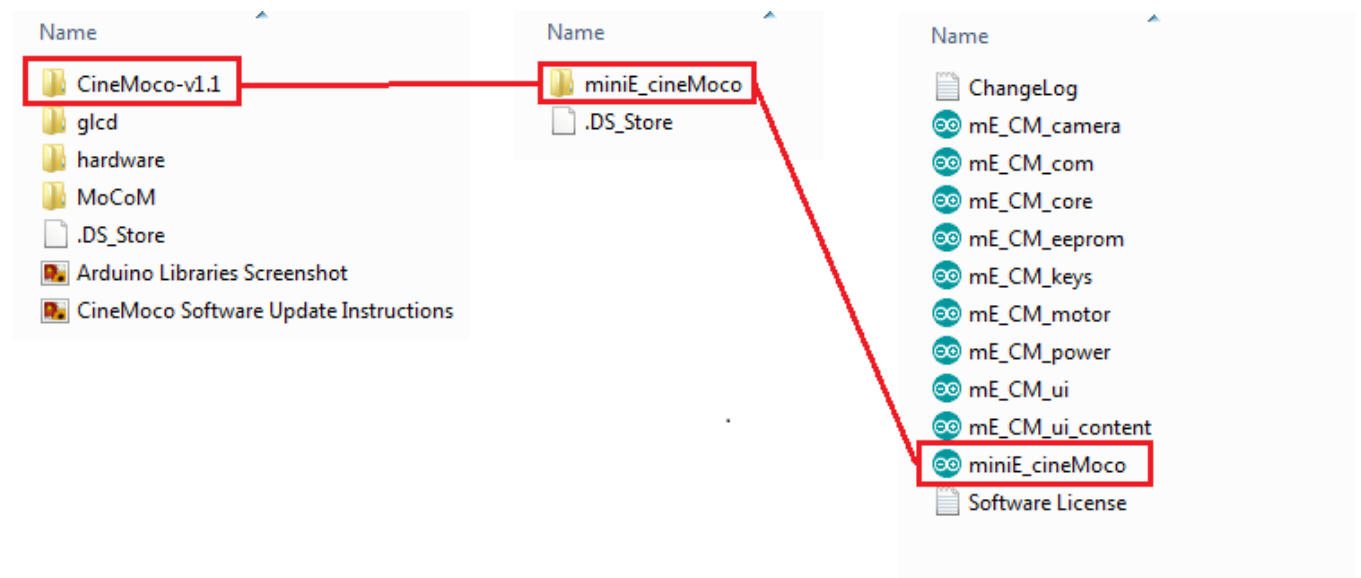

7. Go to Tools → Board, then select “miniE cineMoco”.

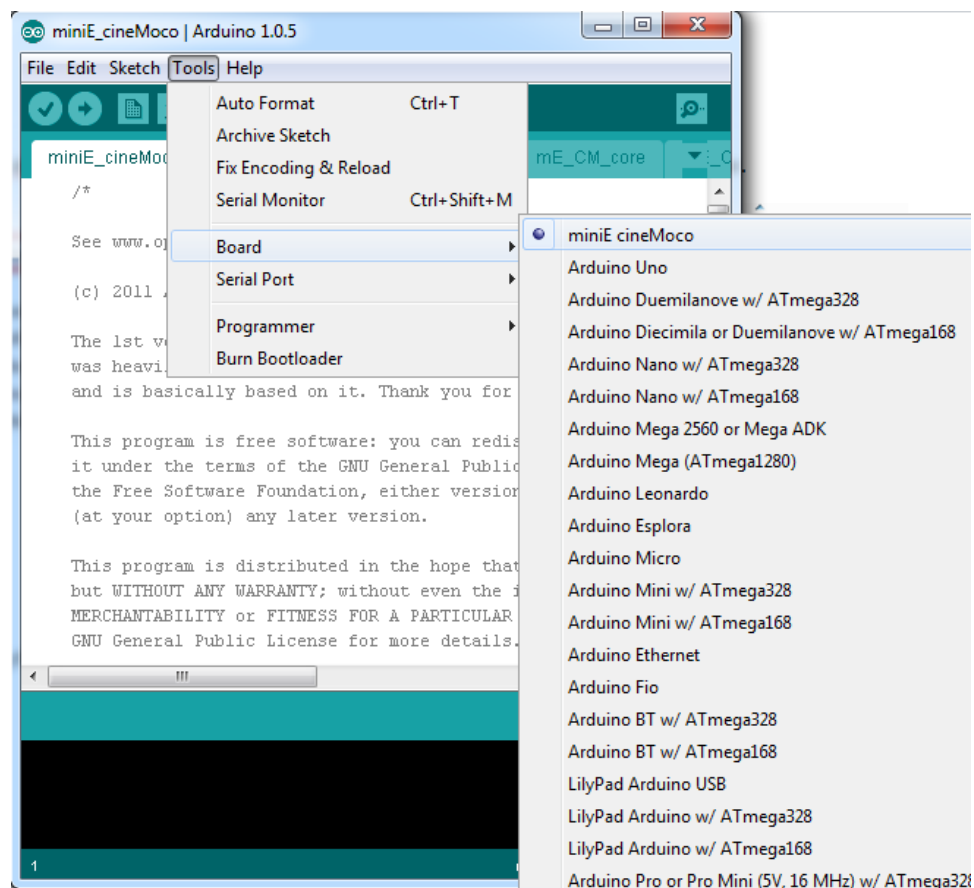

8. Go to Tools → Serial Port, and then select the port linked to the controller. You can verify which one is the correct one by disconnecting the controller and then reconnecting it to see which port shows up.

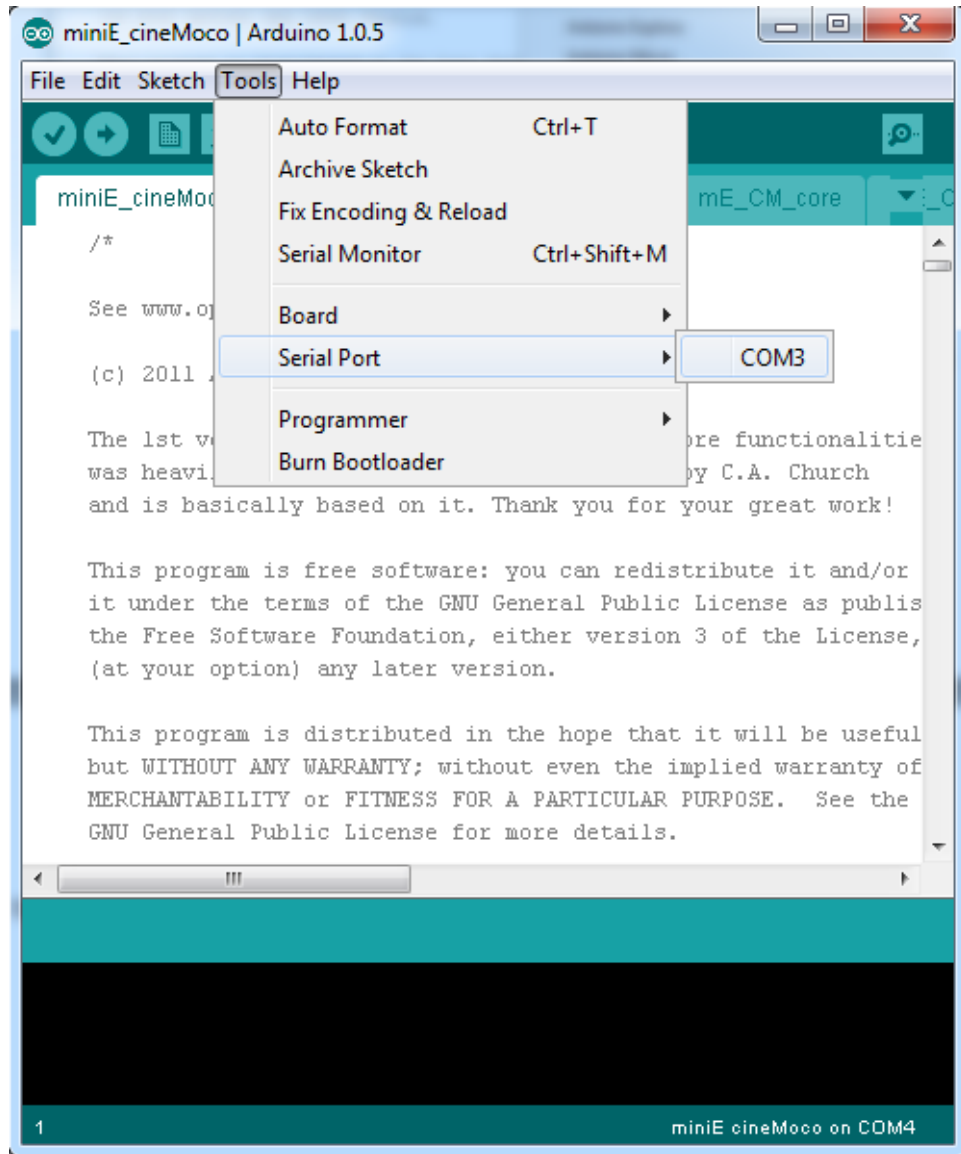

9. Click the upload button and wait for the program to upload completely. Once finished, unplug the controller and turn it on to verify that the version has updated on the splash page.

